




BUREAU
VERITAS

Reference No.: PSU-QSU2503120111RF06

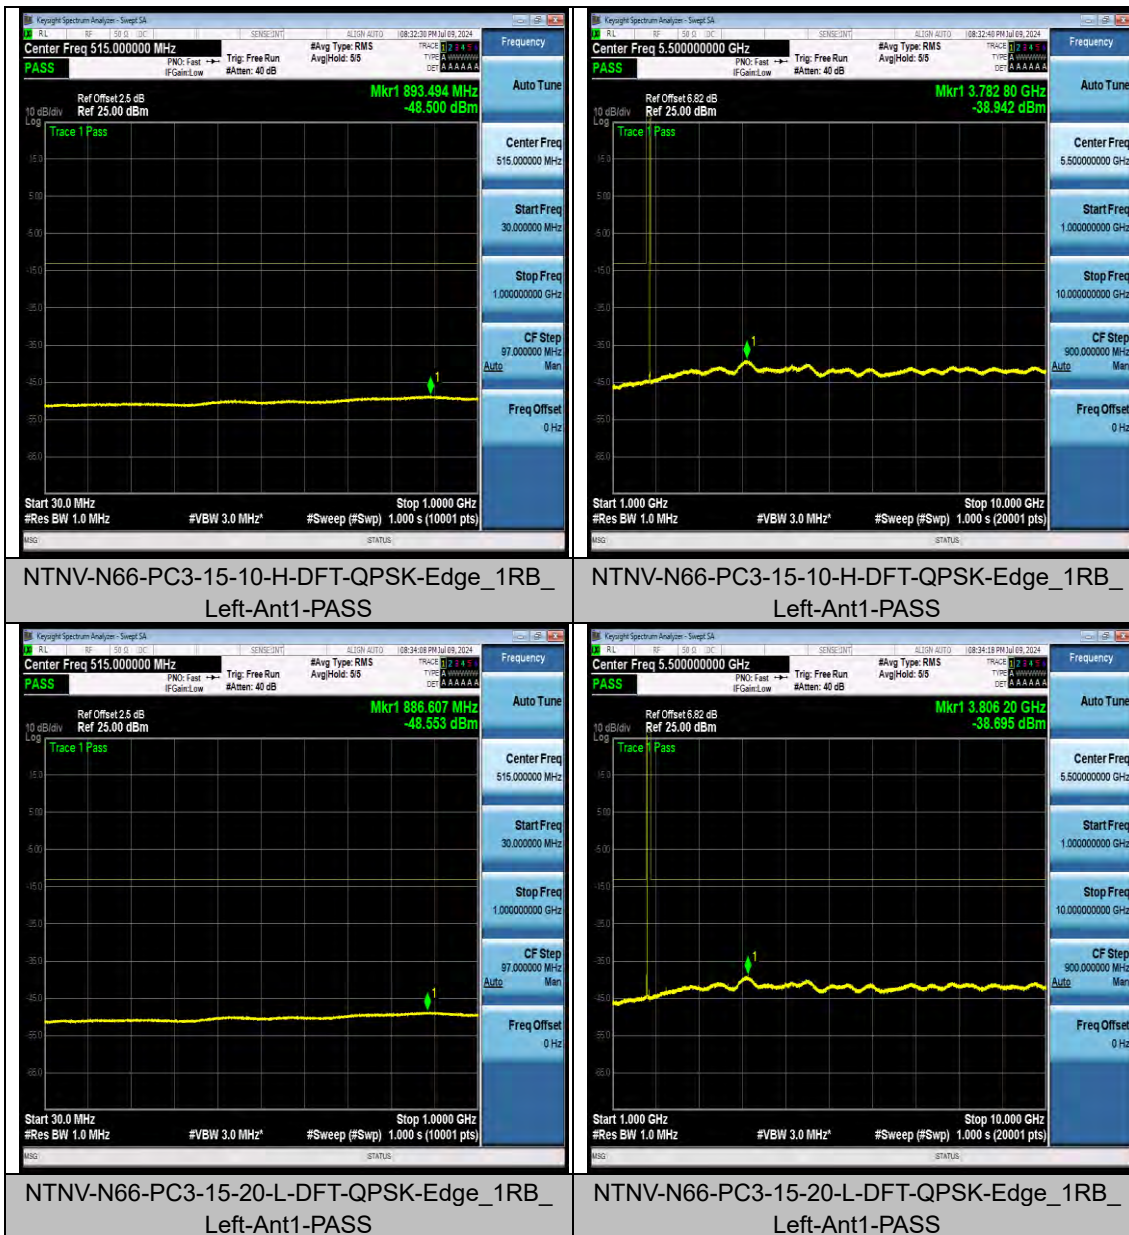

Huarui 7layers High Technology
(Suzhou) Co., Ltd.


Tower N, Innovation Center, 88 Zuyi Road, High-tech
District, Suzhou City, Anhui Province

Tel: +86 (0557) 368 1008



BUREAU
VERITAS


Reference No.: PSU-QSU2503120111RF06

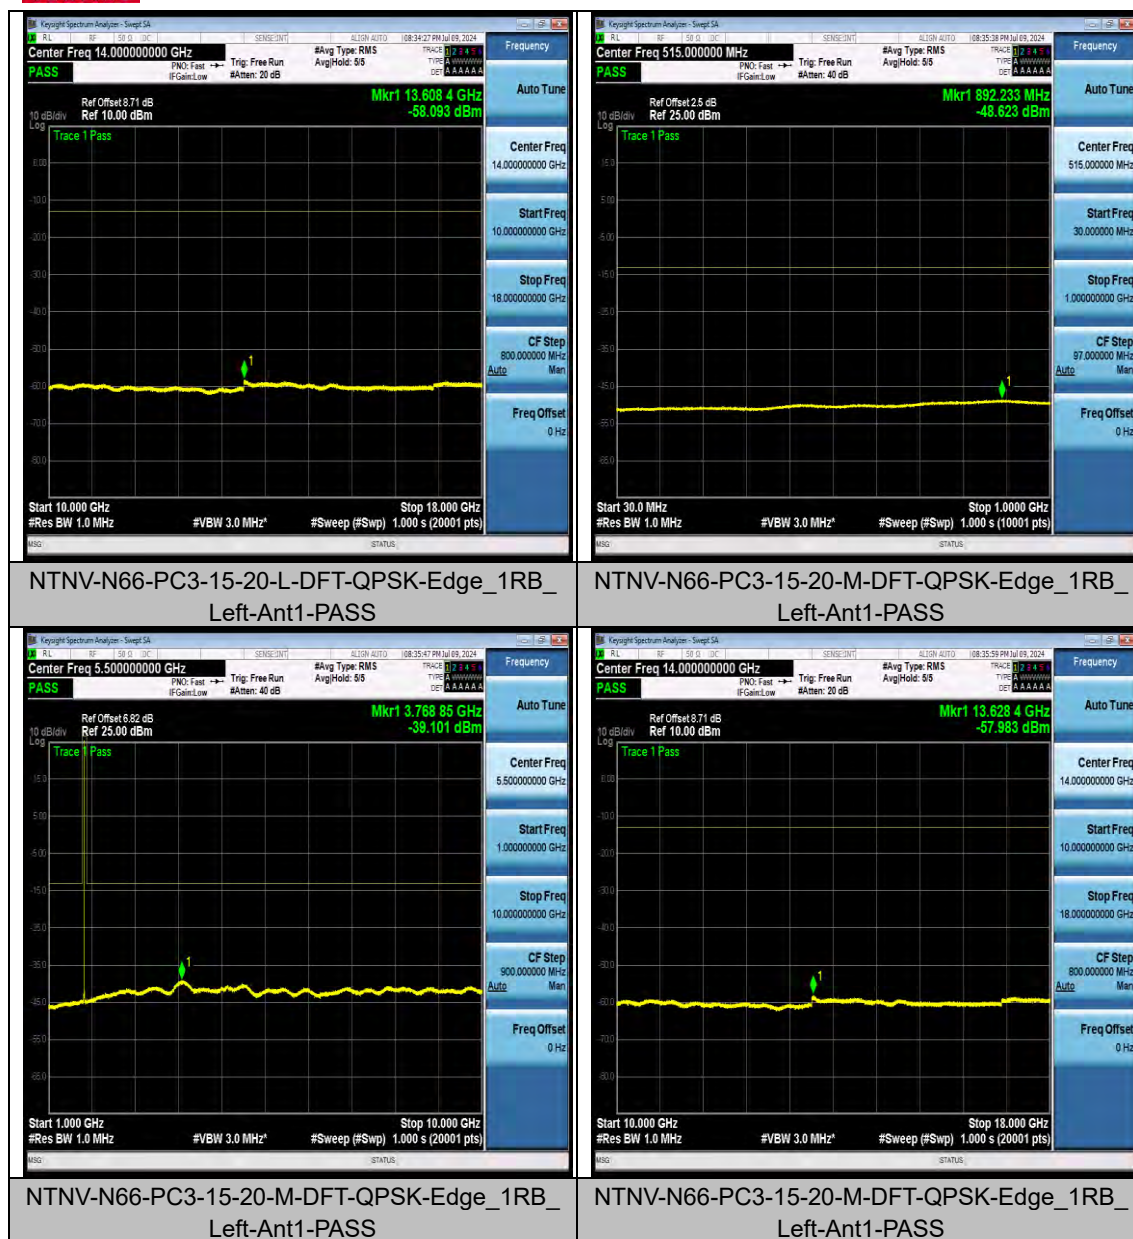



BUREAU
VERITAS

Reference No.: PSU-QSU2503120111RF06

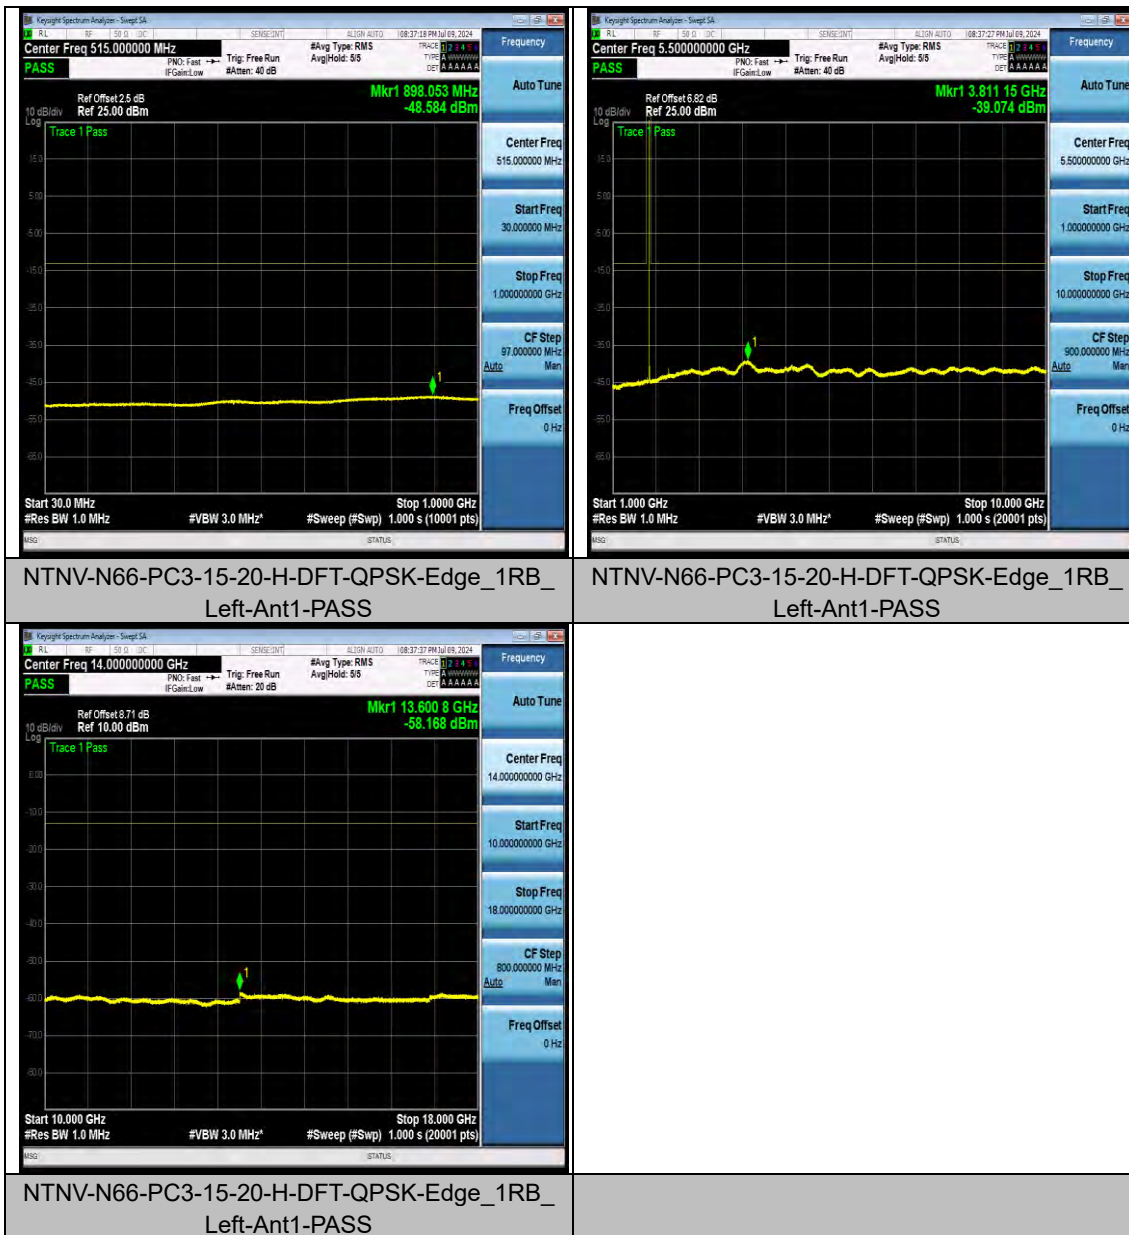



Reference No.: PSU-QSU2503120111RF06

FREQUENCY STABILITY FOR SA TEST RESULT

Frequency Error VS. Voltage

Voltage													
Band	SCS	Bandwidth	Modulation	Channel	RB Config	Voltage	Temperature	Deviation(Hz)	Deviation (ppm)	FL (MHz)	FH (MHz)	Limited (MHz)	Verdict
N66	15	20	DFT-QPSK	L	Outer_Fu II	VL	NT	10.00	0.005814	1710.007764	---	1710-1810	PASS
N66	15	20	DFT-QPSK	L	Outer_Fu II	VN	NT	15.00	0.008721	1710.002432	---	1710-1810	PASS
N66	15	20	DFT-QPSK	L	Outer_Fu II	VH	NT	5.00	0.002907	1710.028024	---	1710-1810	PASS
N66	15	20	DFT-QPSK	L	Outer_Fu II	NV	-30	10.00	0.005814	1710.028043	---	1710-1810	PASS
N66	15	20	DFT-QPSK	L	Outer_Fu II	NV	-20	6.00	0.003488	1710.003623	---	1710-1810	PASS
N66	15	20	DFT-QPSK	L	Outer_Fu II	NV	-10	15.00	0.008721	1710.014899	---	1710-1810	PASS
N66	15	20	DFT-QPSK	L	Outer_Fu II	NV	0	11.00	0.006395	1710.000272	---	1710-1810	PASS
N66	15	20	DFT-QPSK	L	Outer_Fu II	NV	10	7.00	0.004070	1710.033854	---	1710-1810	PASS
N66	15	20	DFT-QPSK	L	Outer_Fu II	NV	20	4.00	0.002326	1710.032237	---	1710-1810	PASS
N66	15	20	DFT-QPSK	L	Outer_Fu II	NV	30	1.00	0.000581	1710.025551	---	1710-1810	PASS
N66	15	20	DFT-QPSK	L	Outer_Fu II	NV	40	9.00	0.005233	1710.007764	---	1710-1810	PASS
N66	15	20	DFT-QPSK	L	Outer_Fu II	NV	50	5.00	0.002907	1710.002432	---	1710-1810	PASS
N66	15	20	DFT-QPSK	H	Outer_Fu II	VL	NT	9.00	0.005085	---	1809.953487	1710-1810	PASS
N66	15	20	DFT-QPSK	H	Outer_Fu II	VN	NT	14.00	0.007910	---	1809.600767	1710-1810	PASS
N66	15	20	DFT-QPSK	H	Outer_Fu II	VH	NT	15.00	0.008475	---	1809.859184	1710-1810	PASS
N66	15	20	DFT-QPSK	H	Outer_Fu II	NV	-30	8.00	0.004520	---	1809.64637	1710-1810	PASS
N66	15	20	DFT-QPSK	H	Outer_Fu II	NV	-20	4.00	0.002260	---	1809.845263	1710-1810	PASS
N66	15	20	DFT-QPSK	H	Outer_Fu II	NV	-10	10.00	0.005650	---	1809.925257	1710-1810	PASS
N66	15	20	DFT-QPSK	H	Outer_Fu II	NV	0	18.00	0.010169	---	1809.638321	1710-1810	PASS
N66	15	20	DFT-QPSK	H	Outer_Fu II	NV	10	8.00	0.004520	---	1809.792043	1710-1810	PASS



Reference No.: PSU-QSU2503120111RF06

N66	15	20	DFT-QPSK	H	Outer_Fu II	NV	20	16.00	0.009040	---	1809.74 8993	1710- 1810	PASS
N66	15	20	DFT-QPSK	H	Outer_Fu II	NV	30	6.00	0.003390	---	1809.95 3487	1710- 1810	PASS
N66	15	20	DFT-QPSK	H	Outer_Fu II	NV	40	14.00	0.007910	---	1809.60 0767	1710- 1810	PASS
N66	15	20	DFT-QPSK	H	Outer_Fu II	NV	50	13.00	0.007345	---	1809.85 9184	1710- 1810	PASS




Reference No.: PSU-QSU2503120111RF06

N71 PEAK-TO-AVERAGE RATIO(CCDF)

TEST RESULT

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Result	Limit	Verdict
N71	15	20	DFT-QPSK	L	Outer_Full	5.41	≤ 13	PASS
N71	15	20	DFT-QPSK	L	Edge_1RB_Left	4.61	≤ 13	PASS
N71	15	20	DFT-QPSK	M	Outer_Full	5.08	≤ 13	PASS
N71	15	20	DFT-QPSK	M	Edge_1RB_Left	4.92	≤ 13	PASS
N71	15	20	DFT-QPSK	H	Outer_Full	5.54	≤ 13	PASS
N71	15	20	DFT-QPSK	H	Edge_1RB_Left	4.82	≤ 13	PASS

TEST GRAPHS

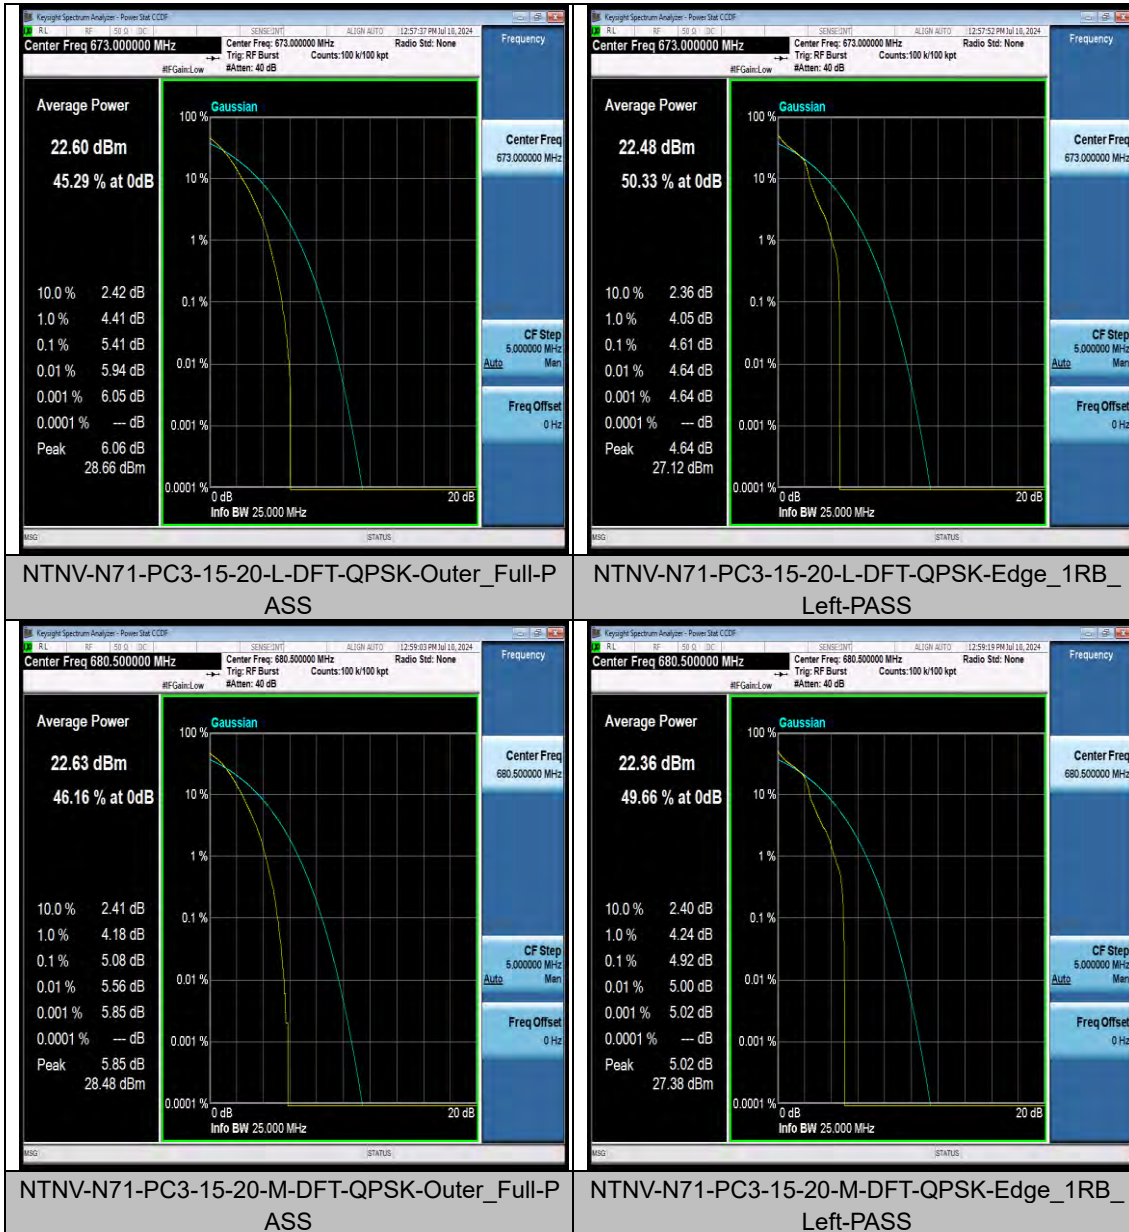



BUREAU
VERITAS

Reference No.: PSU-QSU2503120111RF06






Reference No.: PSU-QSU2503120111RF06

26DB BANDWIDTH AND OCCUPIED BANDWIDTH FOR SA

TEST RESULT

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Result (99%)	Result (26dB)	Verdict
N71	15	5	DFT-PI2BPSK	M	Outer_Full	4.4775	4.945	PASS
N71	15	5	DFT-QPSK	M	Outer_Full	4.4656	5.015	PASS
N71	15	5	DFT-16QAM	M	Outer_Full	4.4655	5.034	PASS
N71	15	5	DFT-64QAM	M	Outer_Full	4.4771	4.866	PASS
N71	15	5	DFT-256QAM	M	Outer_Full	4.4756	5.015	PASS
N71	15	10	DFT-PI2BPSK	M	Outer_Full	8.8975	9.488	PASS
N71	15	10	DFT-QPSK	M	Outer_Full	8.8965	9.480	PASS
N71	15	10	DFT-16QAM	M	Outer_Full	8.9021	9.432	PASS
N71	15	10	DFT-64QAM	M	Outer_Full	8.9027	9.568	PASS
N71	15	10	DFT-256QAM	M	Outer_Full	8.8910	9.591	PASS
N71	15	15	DFT-PI2BPSK	M	Outer_Full	13.384	14.11	PASS
N71	15	15	DFT-QPSK	M	Outer_Full	13.357	14.11	PASS
N71	15	15	DFT-16QAM	M	Outer_Full	13.382	14.34	PASS
N71	15	15	DFT-64QAM	M	Outer_Full	13.361	14.16	PASS
N71	15	15	DFT-256QAM	M	Outer_Full	13.363	14.25	PASS
N71	15	20	DFT-PI2BPSK	M	Outer_Full	17.793	18.69	PASS
N71	15	20	DFT-QPSK	M	Outer_Full	17.798	18.72	PASS
N71	15	20	DFT-16QAM	M	Outer_Full	17.840	18.75	PASS
N71	15	20	DFT-64QAM	M	Outer_Full	17.827	18.65	PASS
N71	15	20	DFT-256QAM	M	Outer_Full	17.786	18.64	PASS


TEST GRAPHS

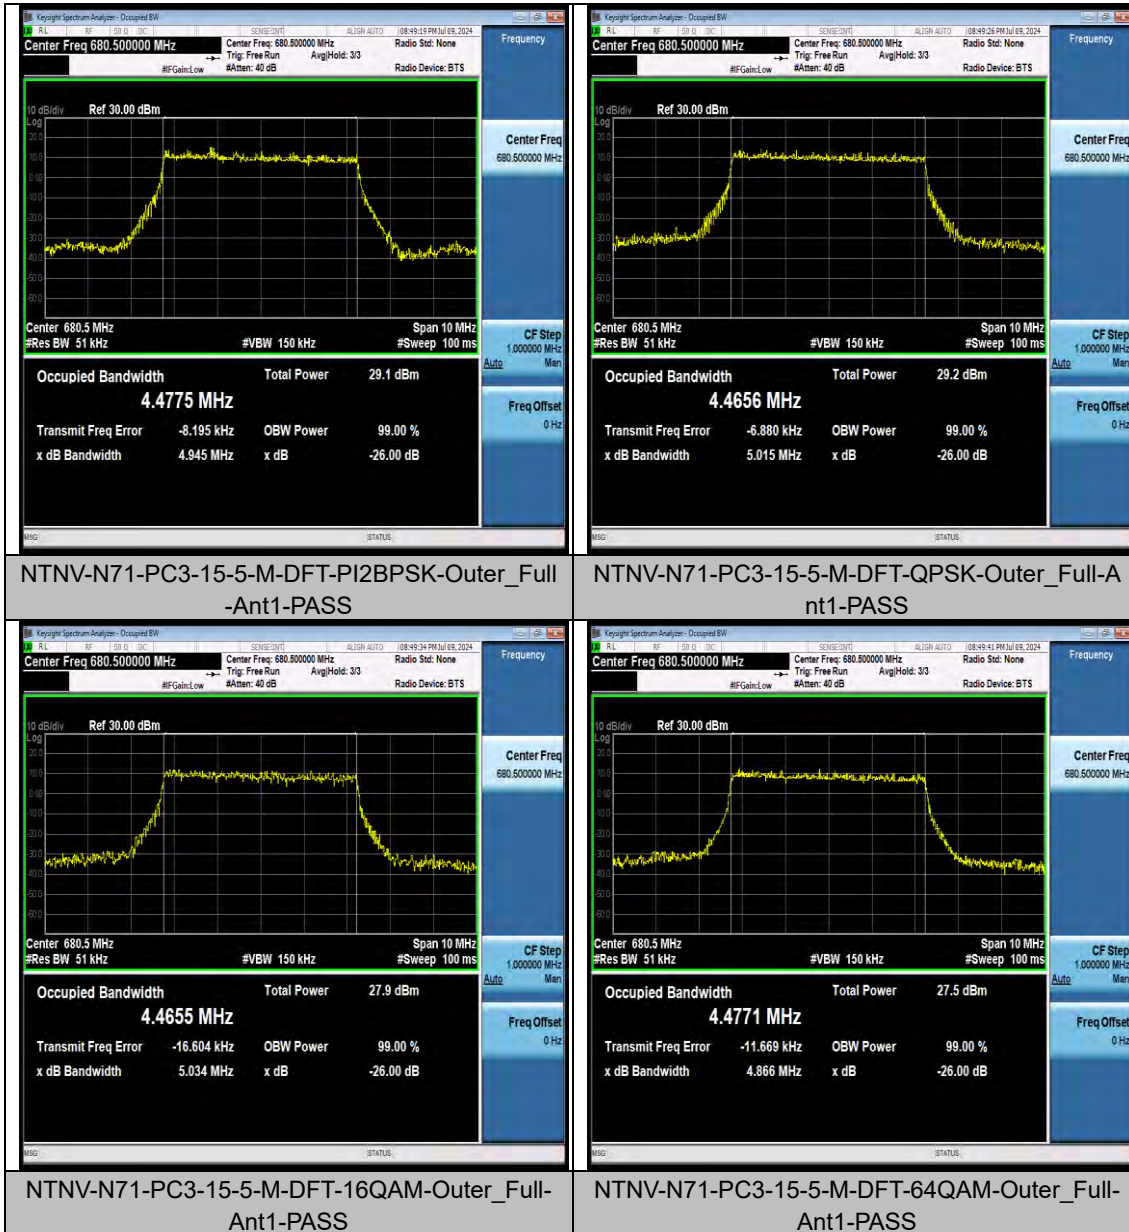




BUREAU
VERITAS

Reference No.: PSU-QSU2503120111RF06

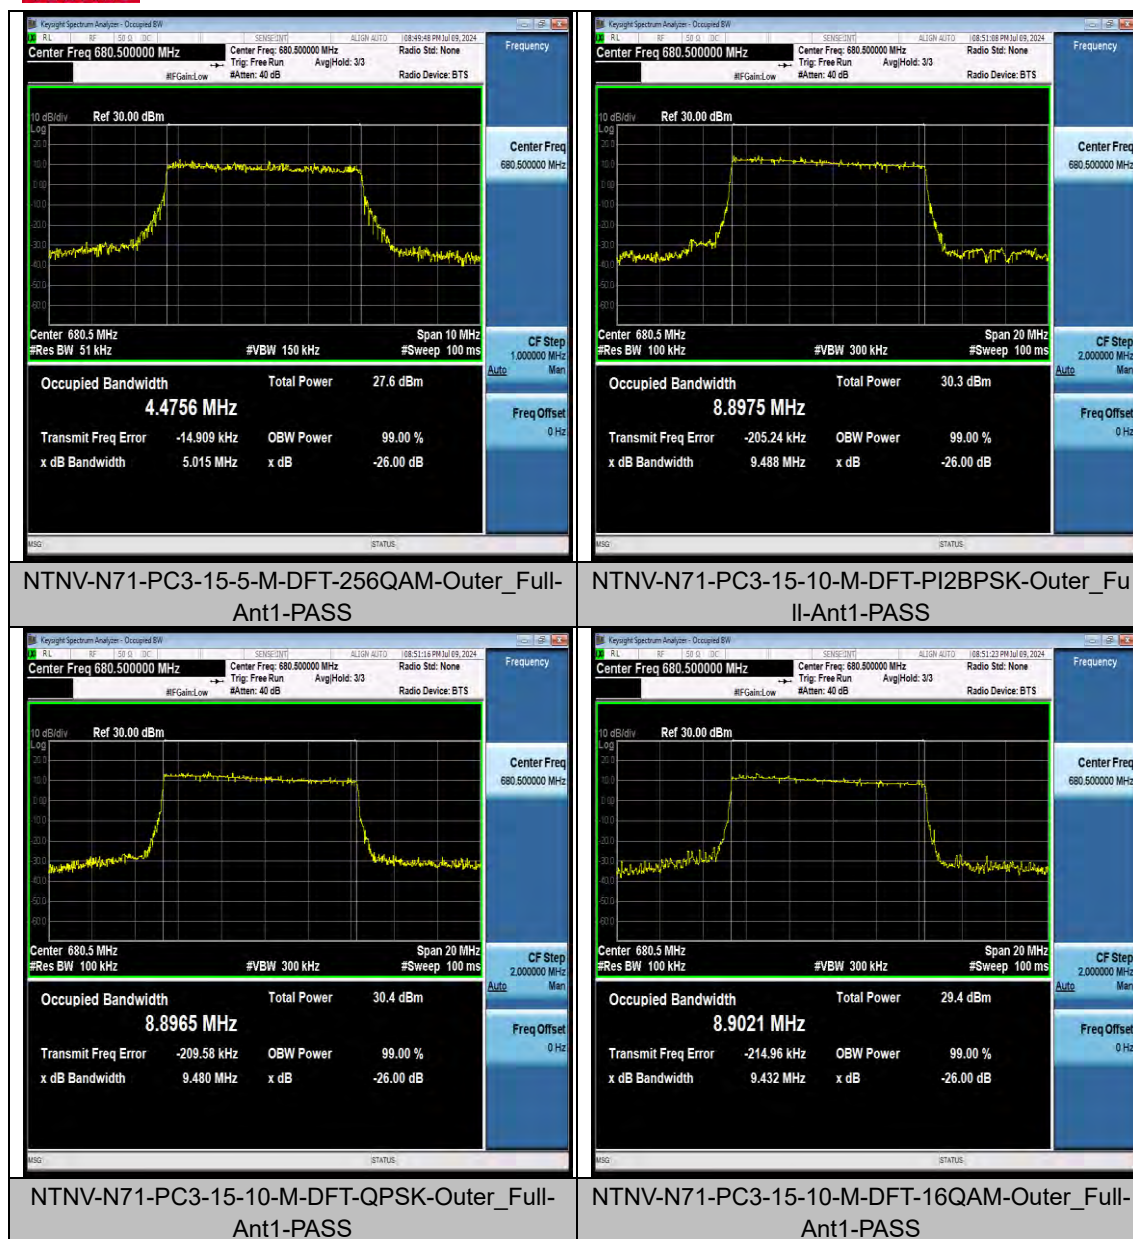




Reference No.: PSU-QSU2503120111RF06

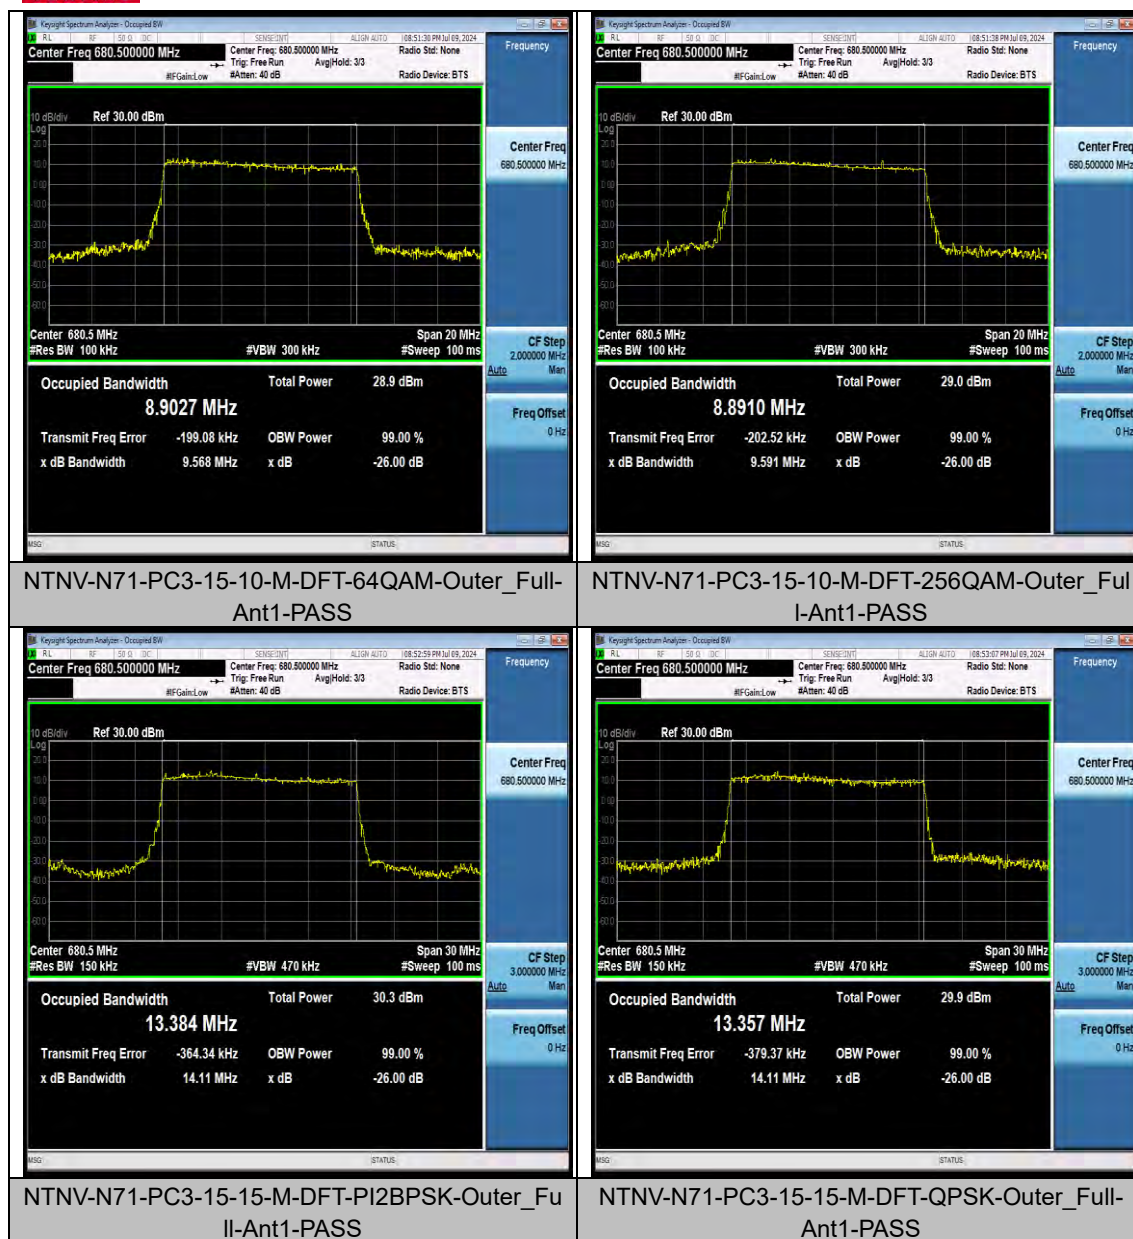



BUREAU
VERITAS


Reference No.: PSU-QSU2503120111RF06

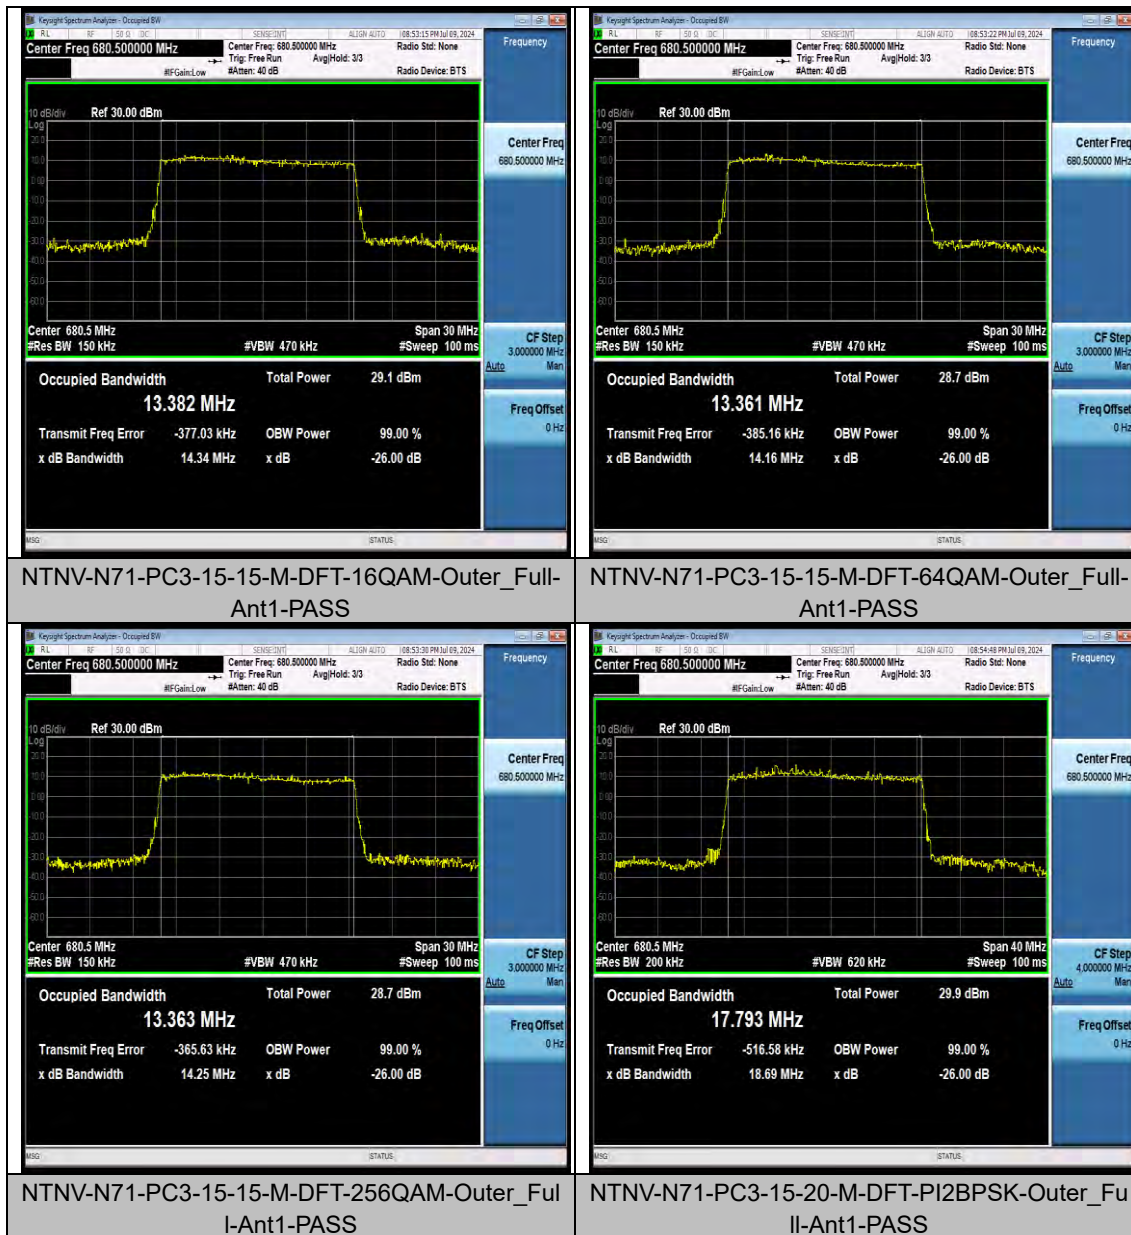



BUREAU
VERITAS


Reference No.: PSU-QSU2503120111RF06

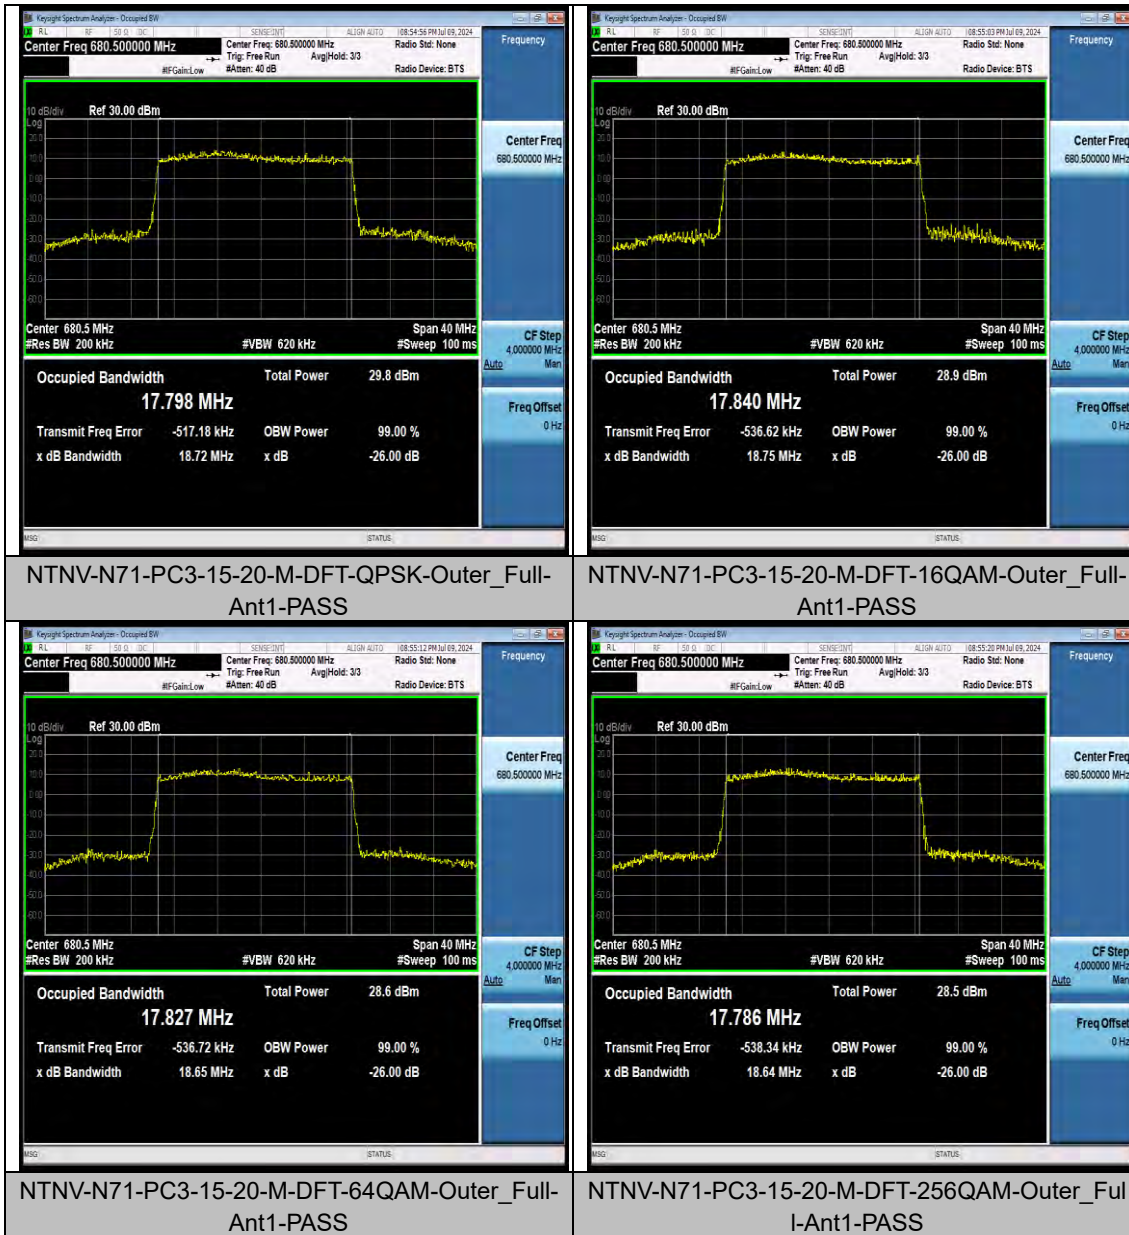

BAND EDGE FOR SA TEST RESULT

Band	SCS	Bandwidth	Modulation	Channel	RB Config	Result	Verdict
N71	15	5	DFT-QPSK	L	Outer_Full	-30.45	PASS
N71	15	5	DFT-QPSK	H	Outer_Full	-32.46	PASS
N71	15	5	DFT-QPSK	H	Edge_1RB_Right	-27.42	PASS
N71	15	10	DFT-QPSK	L	Outer_Full	-33.91	PASS
N71	15	10	DFT-QPSK	L	Edge_1RB_Left	-28.97	PASS
N71	15	10	DFT-QPSK	H	Outer_Full	-41.57	PASS
N71	15	10	DFT-QPSK	H	Edge_1RB_Right	-29.30	PASS
N71	15	20	DFT-QPSK	L	Outer_Full	-39.90	PASS
N71	15	20	DFT-QPSK	L	Edge_1RB_Left	-34.61	PASS
N71	15	20	DFT-QPSK	H	Outer_Full	-40.07	PASS
N71	15	20	DFT-QPSK	H	Edge_1RB_Right	-35.66	PASS


TEST GRAPHS

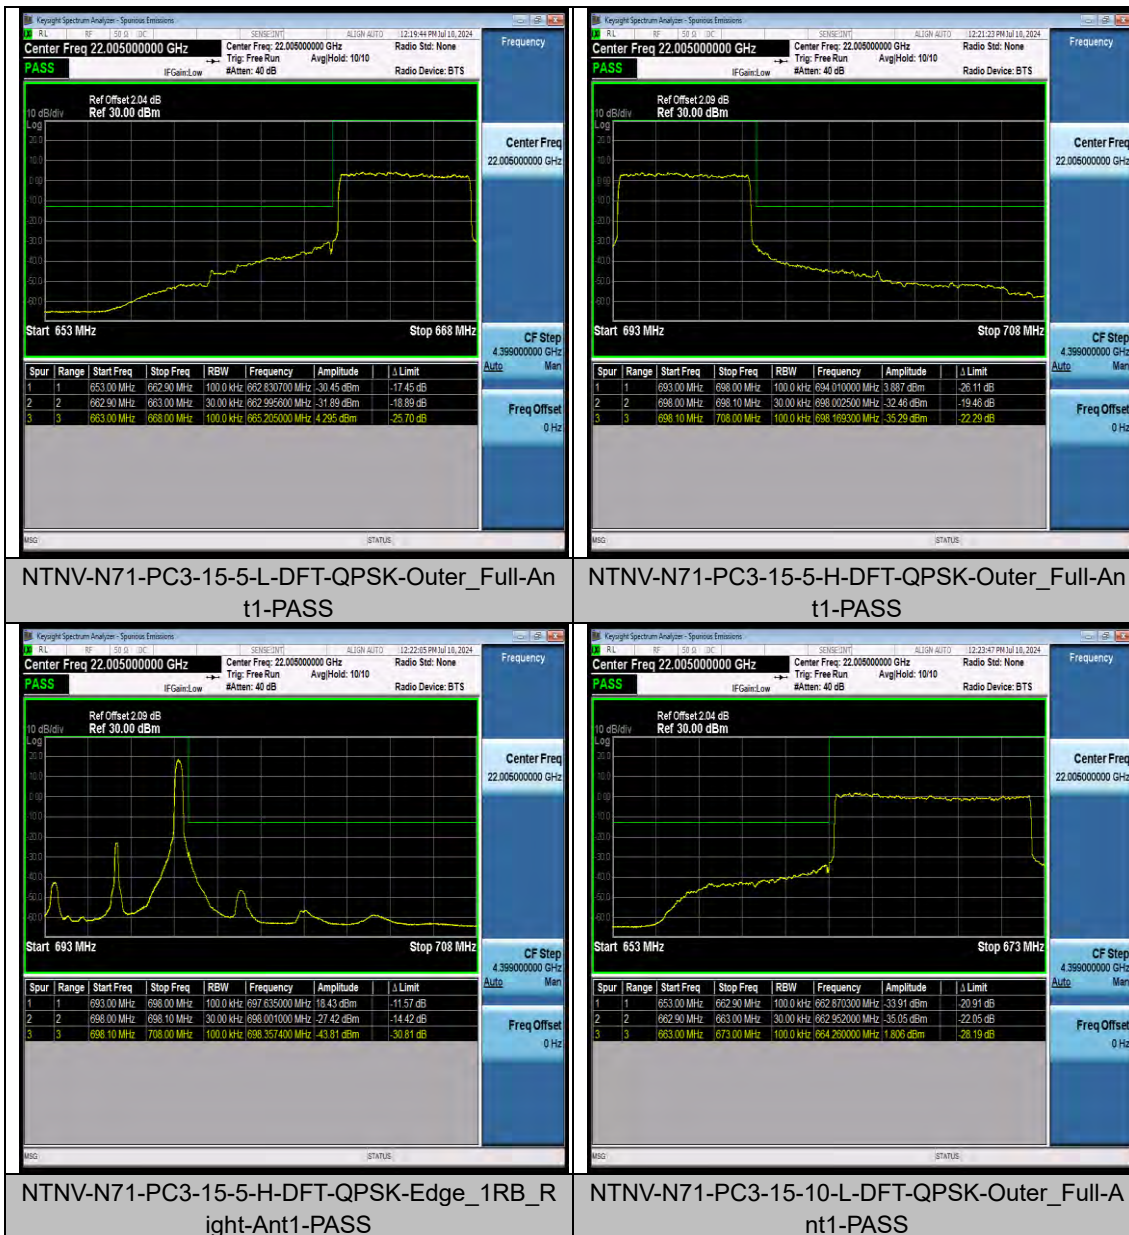



BUREAU
VERITAS


Reference No.: PSU-QSU2503120111RF06

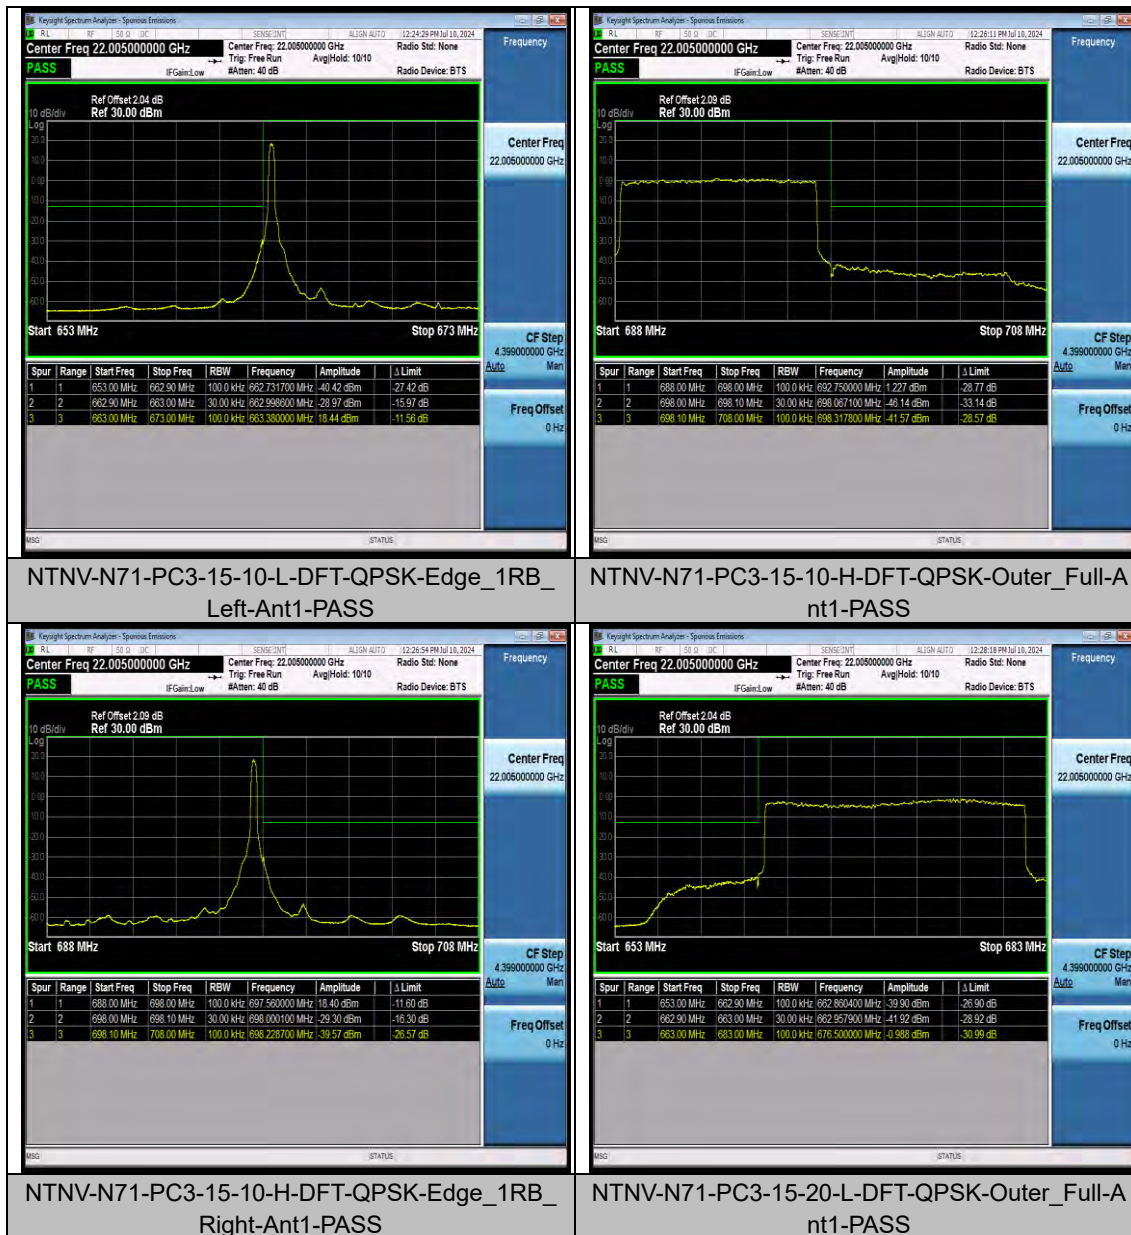



BUREAU
VERITAS

Reference No.: PSU-QSU2503120111RF06

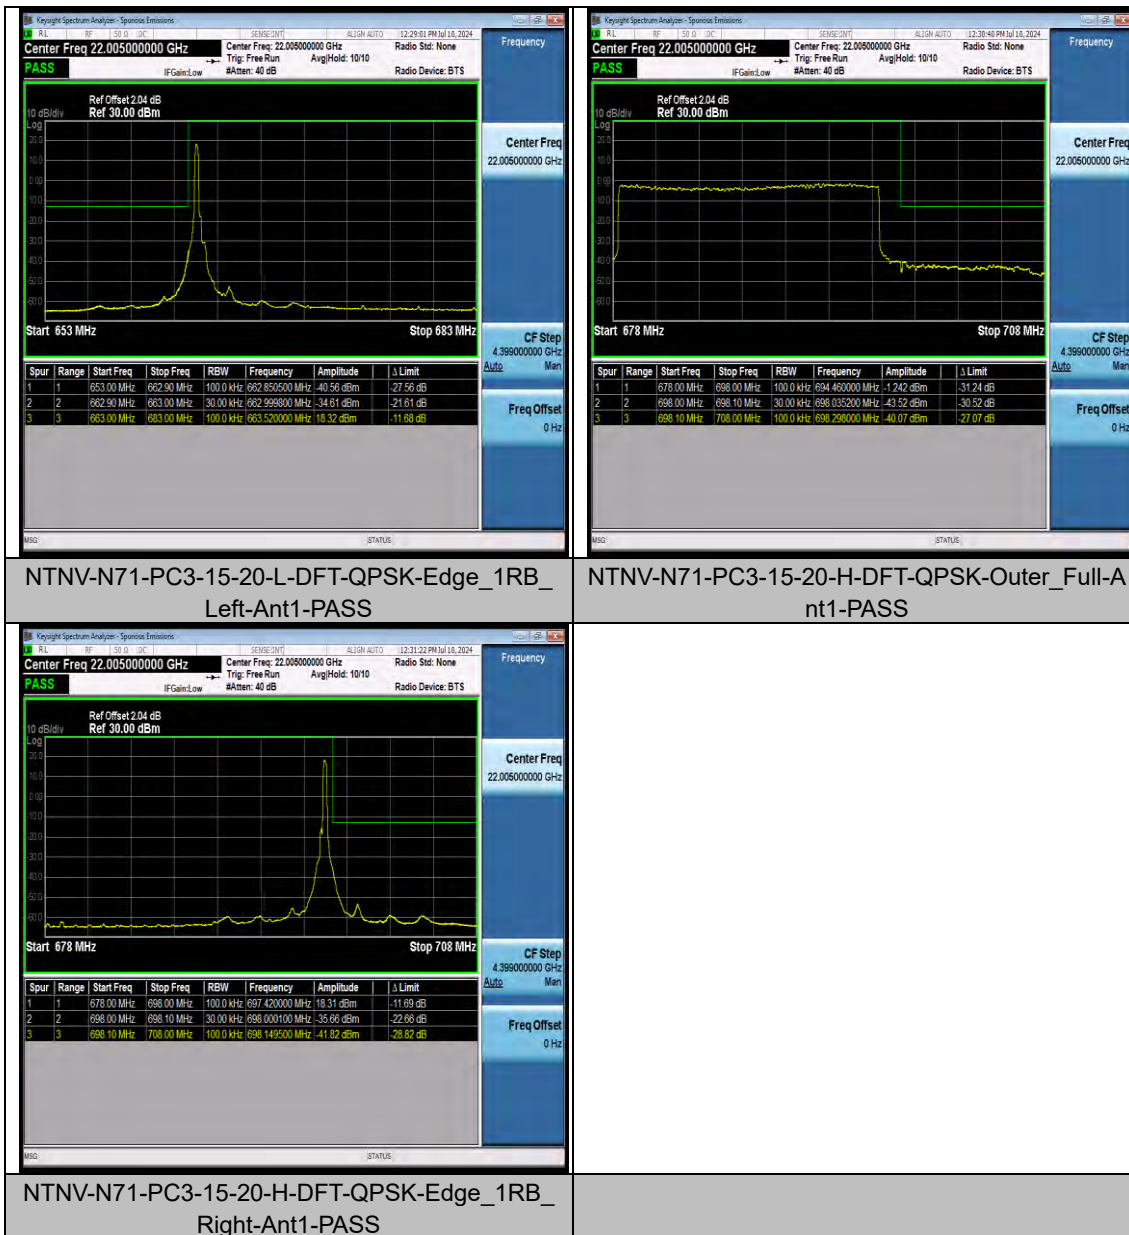




Reference No.: PSU-QSU2503120111RF06

CONDUCTED SPURIOUS EMISSION FOR SA TEST RESULT

Band	SCS	Bandwidth	Modulation	Channel	RB Config	StartFreq	StopFreq	Result	Limit	Verdict
N71	15	5	DFT-QPSK	L	Edge 1RB Left	30	1000	-57.14	-13	PASS
N71	15	5	DFT-QPSK	L	Edge 1RB Left	1000	7000	-39.88	-13	PASS
N71	15	5	DFT-QPSK	M	Edge 1RB Left	30	1000	-57.55	-13	PASS
N71	15	5	DFT-QPSK	M	Edge 1RB Left	1000	7000	-40.03	-13	PASS
N71	15	5	DFT-QPSK	H	Edge 1RB Left	30	1000	-57.47	-13	PASS
N71	15	5	DFT-QPSK	H	Edge 1RB Left	1000	7000	-40.14	-13	PASS
N71	15	10	DFT-QPSK	L	Edge 1RB Left	30	1000	-57.54	-13	PASS
N71	15	10	DFT-QPSK	L	Edge 1RB Left	1000	7000	-40.02	-13	PASS
N71	15	10	DFT-QPSK	M	Edge 1RB Left	30	1000	-57.39	-13	PASS
N71	15	10	DFT-QPSK	M	Edge 1RB Left	1000	7000	-40.12	-13	PASS
N71	15	10	DFT-QPSK	H	Edge 1RB Left	30	1000	-57.58	-13	PASS
N71	15	10	DFT-QPSK	H	Edge 1RB Left	1000	7000	-39.94	-13	PASS
N71	15	20	DFT-QPSK	L	Edge 1RB Left	30	1000	-57.52	-13	PASS
N71	15	20	DFT-QPSK	L	Edge 1RB Left	1000	7000	-39.96	-13	PASS
N71	15	20	DFT-QPSK	M	Edge 1RB Left	30	1000	-57.72	-13	PASS
N71	15	20	DFT-QPSK	M	Edge 1RB Left	1000	7000	-40.08	-13	PASS
N71	15	20	DFT-QPSK	H	Edge 1RB Left	30	1000	-57.67	-13	PASS
N71	15	20	DFT-QPSK	H	Edge 1RB Left	1000	7000	-40.02	-13	PASS


TEST GRAPHS

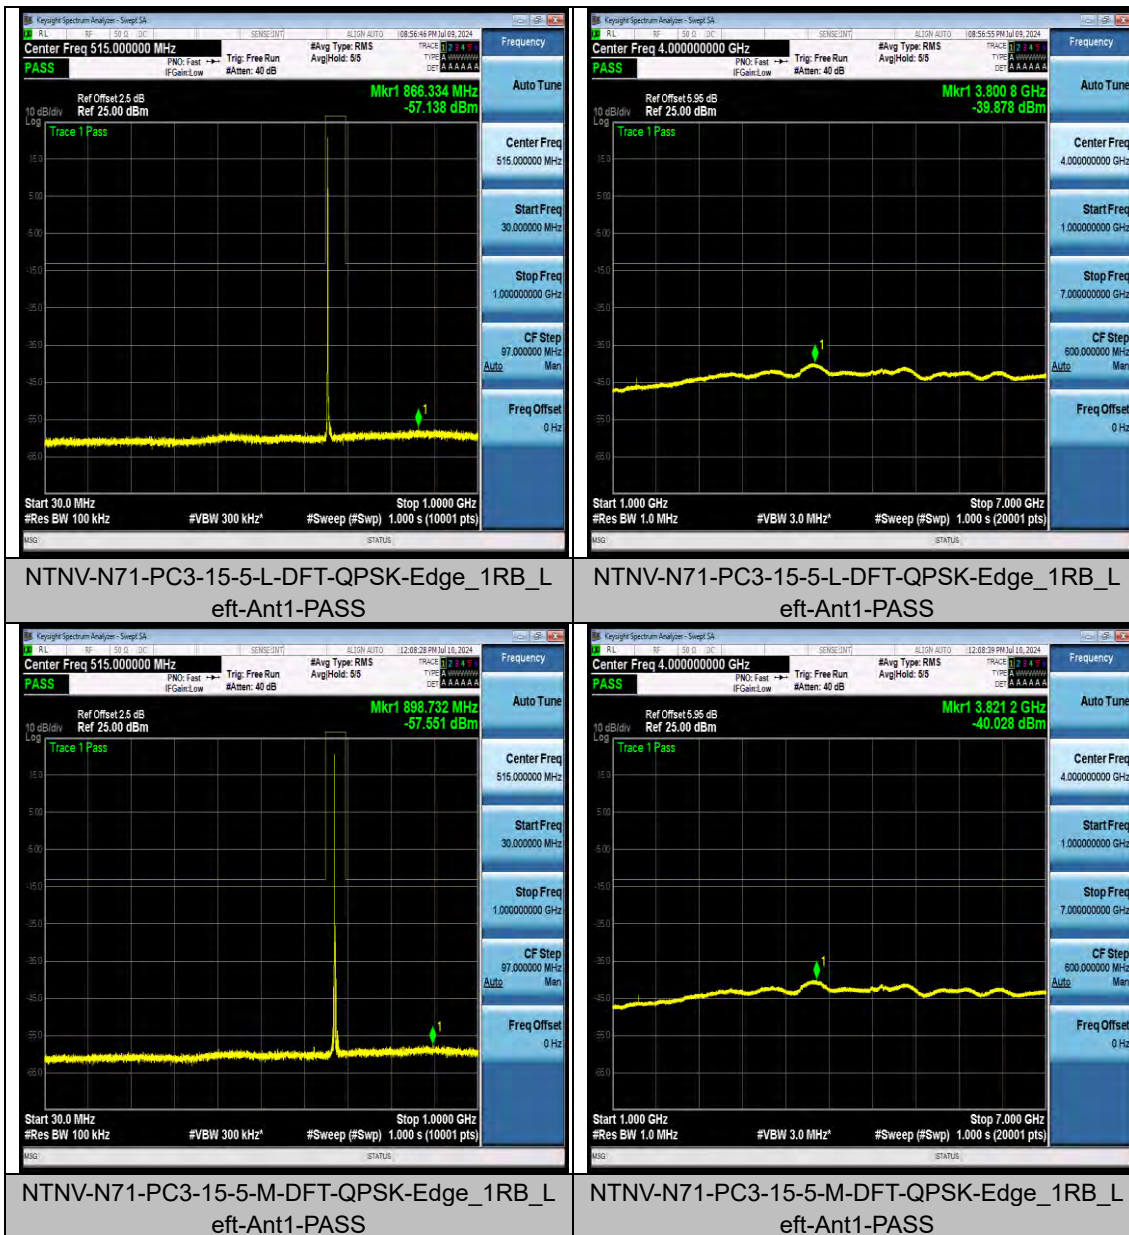



BUREAU
VERITAS


Reference No.: PSU-QSU2503120111RF06

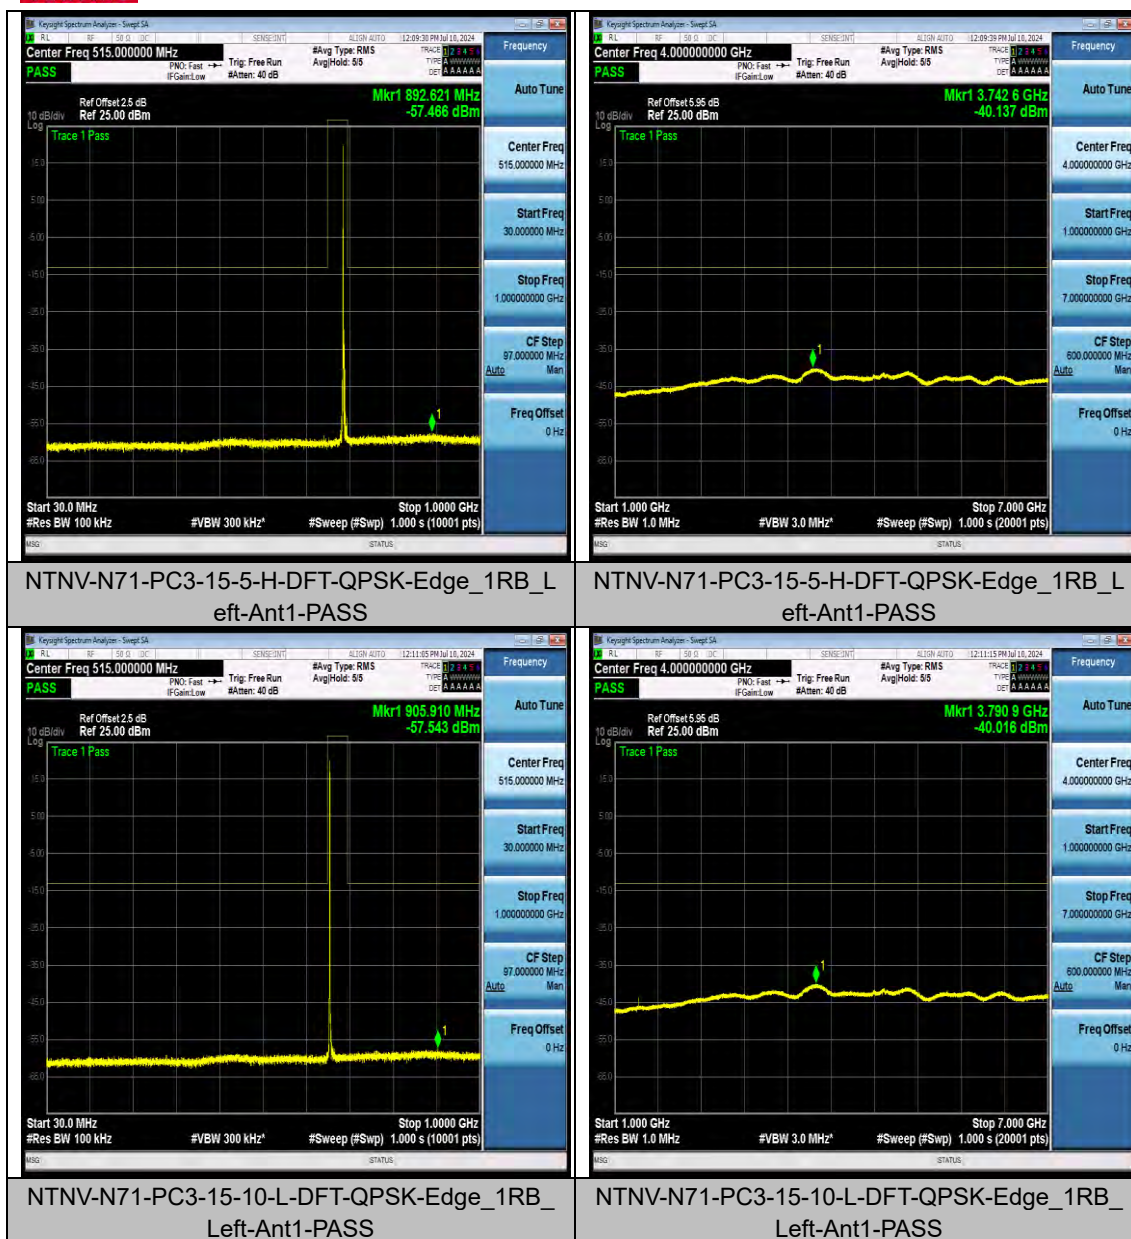



BUREAU
VERITAS


Reference No.: PSU-QSU2503120111RF06

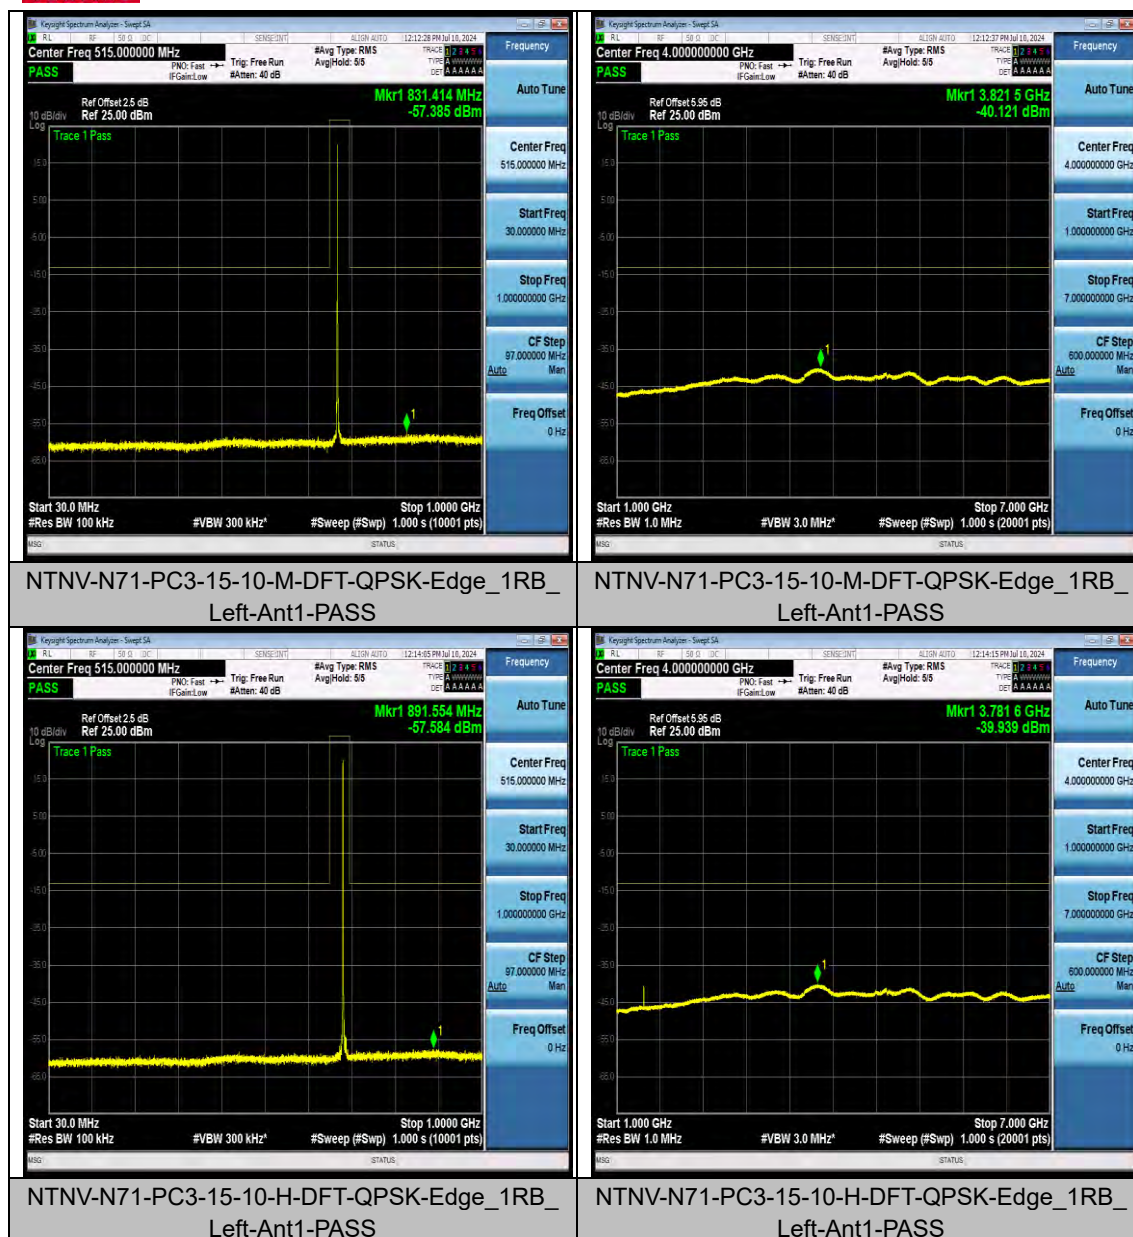



BUREAU
VERITAS


Reference No.: PSU-QSU2503120111RF06

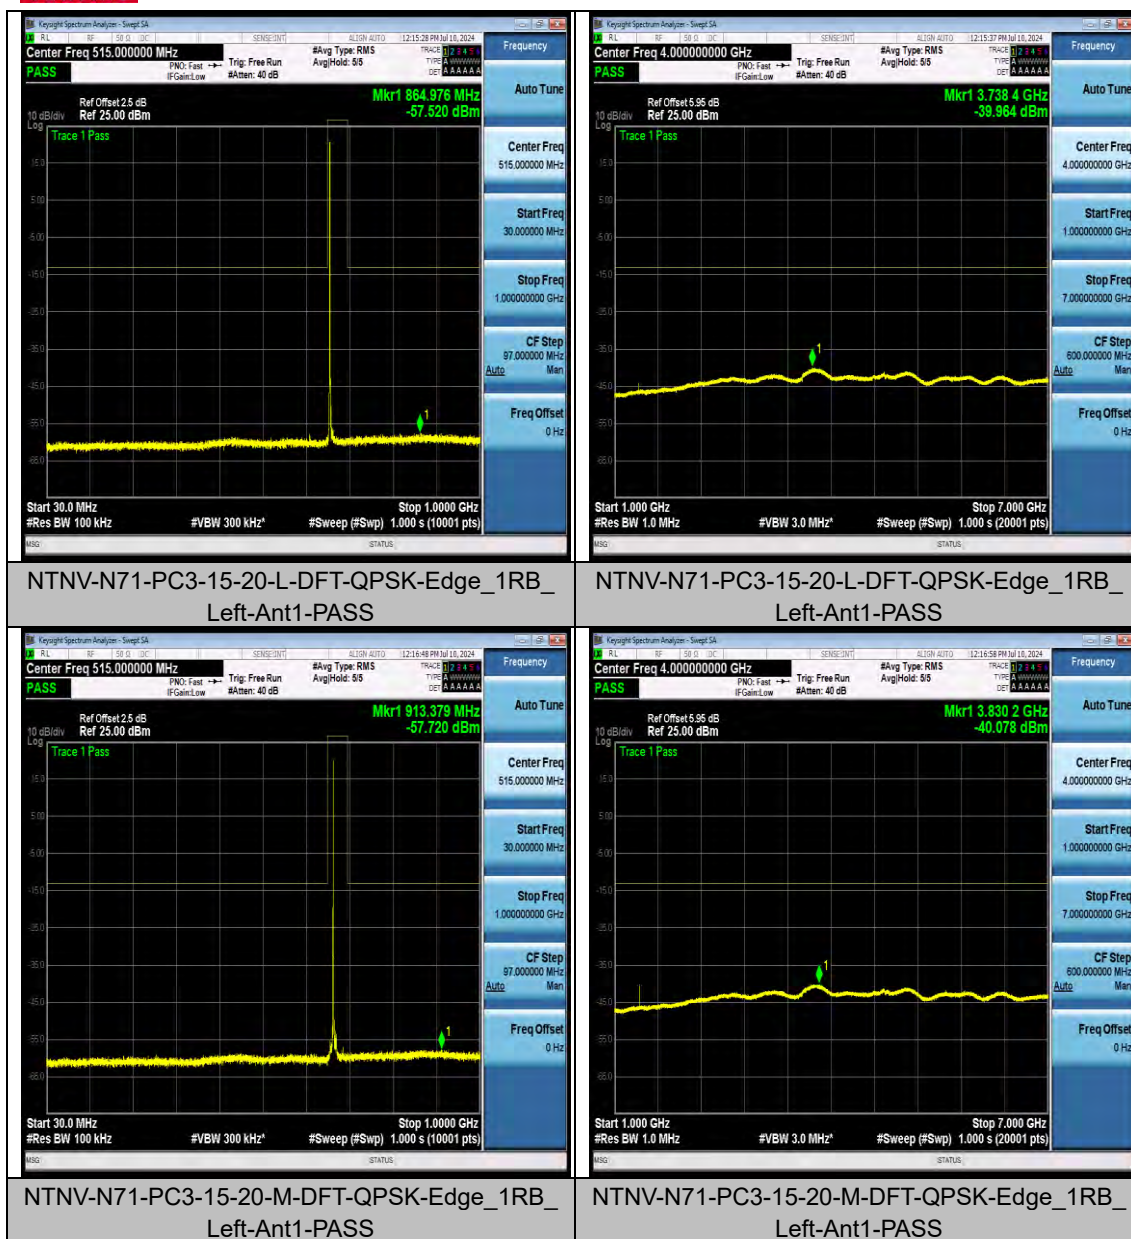



BUREAU
VERITAS

Reference No.: PSU-QSU2503120111RF06

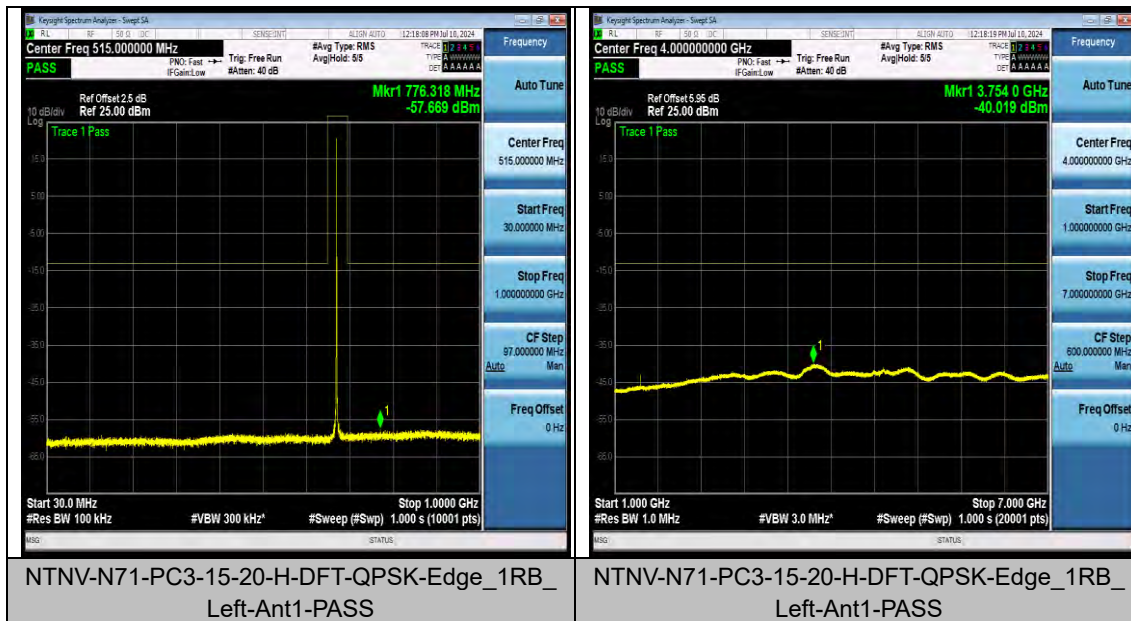

Huarui 7layers High Technology
(Suzhou) Co., Ltd.

Tower N, Innovation Center, 88 Zuyi Road, High-tech
District, Suzhou City, Anhui Province

Tel: +86 (0557) 368 1008



Reference No.: PSU-QSU2503120111RF06

FREQUENCY STABILITY FOR SA TEST RESULT

Voltage													
Band	SCS	Bandwidth	Modulation	Channel	RB Config	Voltage	Temperature	Deviation(Hz)	Deviation(ppm)	FL(MHz)	FH(MHz)	Limited(MHz)	Verdict
N71	15	20	DFT-QPSK	L	Outer_Full	VL	NT	16.00	0.023774	663.0154883	---	663-698	PASS
N71	15	20	DFT-QPSK	L	Outer_Full	VN	NT	11.00	0.016344	663.0327187	---	663-698	PASS
N71	15	20	DFT-QPSK	L	Outer_Full	VH	NT	19.00	0.028232	663.0335872	---	663-698	PASS
N71	15	20	DFT-QPSK	L	Outer_Full	NV	-30	12.00	0.017831	663.0444587	---	663-698	PASS
N71	15	20	DFT-QPSK	L	Outer_Full	NV	-20	1.00	0.001486	663.0398524	---	663-698	PASS
N71	15	20	DFT-QPSK	L	Outer_Full	NV	-10	11.00	0.016344	663.0436006	---	663-698	PASS
N71	15	20	DFT-QPSK	L	Outer_Full	NV	0	1.00	0.001486	663.0355817	---	663-698	PASS
N71	15	20	DFT-QPSK	L	Outer_Full	NV	10	16.00	0.023774	663.0050051	---	663-698	PASS
N71	15	20	DFT-QPSK	L	Outer_Full	NV	20	6.00	0.008915	663.0362453	---	663-698	PASS
N71	15	20	DFT-QPSK	L	Outer_Full	NV	30	14.00	0.020802	663.0265245	---	663-698	PASS
N71	15	20	DFT-QPSK	L	Outer_Full	NV	40	4.00	0.005944	663.0154883	---	663-698	PASS
N71	15	20	DFT-QPSK	L	Outer_Full	NV	50	3.00	0.004458	663.0327187	---	663-698	PASS
N71	15	20	DFT-QPSK	H	Outer_Full	VL	NT	1.00	0.001453	---	697.6804195	663-698	PASS
N71	15	20	DFT-QPSK	H	Outer_Full	VN	NT	10.00	0.014535	---	697.9230745	663-698	PASS
N71	15	20	DFT-QPSK	H	Outer_Full	VH	NT	13.00	0.018895	---	697.6312799	663-698	PASS
N71	15	20	DFT-QPSK	H	Outer_Full	NV	-30	2.00	0.002907	---	697.6107292	663-698	PASS
N71	15	20	DFT-QPSK	H	Outer_Full	NV	-20	2.00	0.002907	---	697.7464292	663-698	PASS
N71	15	20	DFT-QPSK	H	Outer_Full	NV	-10	10.00	0.014535	---	697.9709676	663-698	PASS
N71	15	20	DFT-QPSK	H	Outer_Full	NV	0	19.00	0.027616	---	697.9643385	663-698	PASS
N71	15	20	DFT-QPSK	H	Outer_Full	NV	10	12.00	0.017442	---	697.9810726	663-698	PASS
N71	15	20	DFT-QPSK	H	Outer_Full	NV	20	2.00	0.002907	---	697.78	663-698	PASS



Reference No.: PSU-QSU2503120111RF06

			SK		II						38874	98	
N71	15	20	DFT-QP SK	H	Outer_Fu II	NV	30	10.00	0.014535	---	697.68 04195	663-6 98	PASS
N71	15	20	DFT-QP SK	H	Outer_Fu II	NV	40	18.00	0.026163	---	697.92 30745	663-6 98	PASS
N71	15	20	DFT-QP SK	H	Outer_Fu II	NV	50	8.00	0.011628	---	697.63 12799	663-6 98	PASS

--END--