



## Appendix B

### RF Test Data for 2.4GWIFI (Conducted Measurement)

Product Name: Aegis Network Encoder

Test Model: NE7

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 23.8° C   |
| Relative Humidity: | 52.1%     |
| ATM Pressure:      | 100.0 kPa |
| Test Engineer:     | Jay Luo   |
| Supervised by:     | Nick Peng |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## B.1 -6dB Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | b    | 2412            | Ant1    | 9.38                  | $\geq 0.5$                  | Pass    |
| NVNT      | b    | 2437            | Ant1    | 9.845                 | $\geq 0.5$                  | Pass    |
| NVNT      | b    | 2462            | Ant1    | 8.871                 | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2412            | Ant1    | 16.406                | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2437            | Ant1    | 16.441                | $\geq 0.5$                  | Pass    |
| NVNT      | g    | 2462            | Ant1    | 16.427                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 17.328                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2437            | Ant1    | 17.019                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 17.29                 | $\geq 0.5$                  | Pass    |






## Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1




-6dB Bandwidth NVNT b 2437MHz Ant1

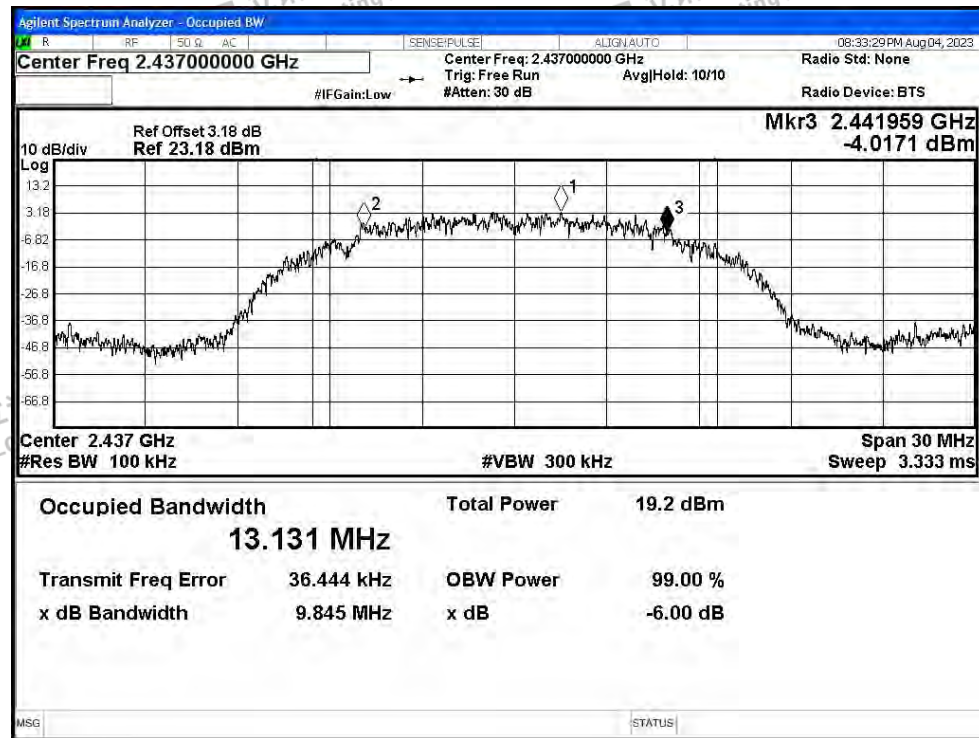



## -6dB Bandwidth NVNT b 2462MHz Ant1

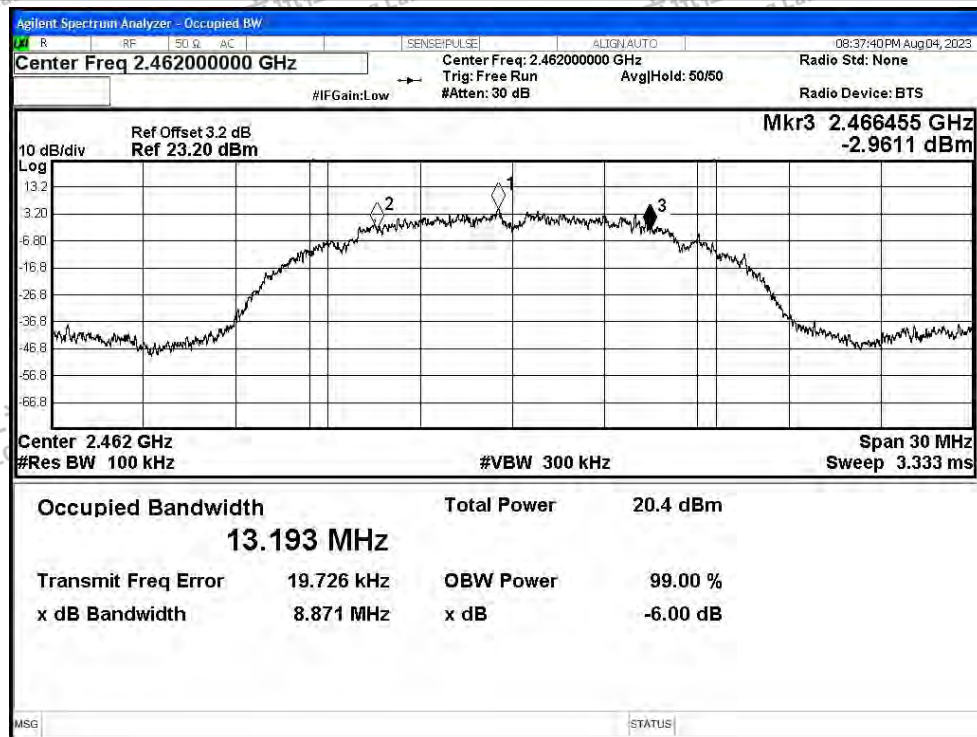

## -6dB Bandwidth NVNT g 2412MHz Ant1



Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



-6dB Bandwidth NVNT g 2437MHz Ant1

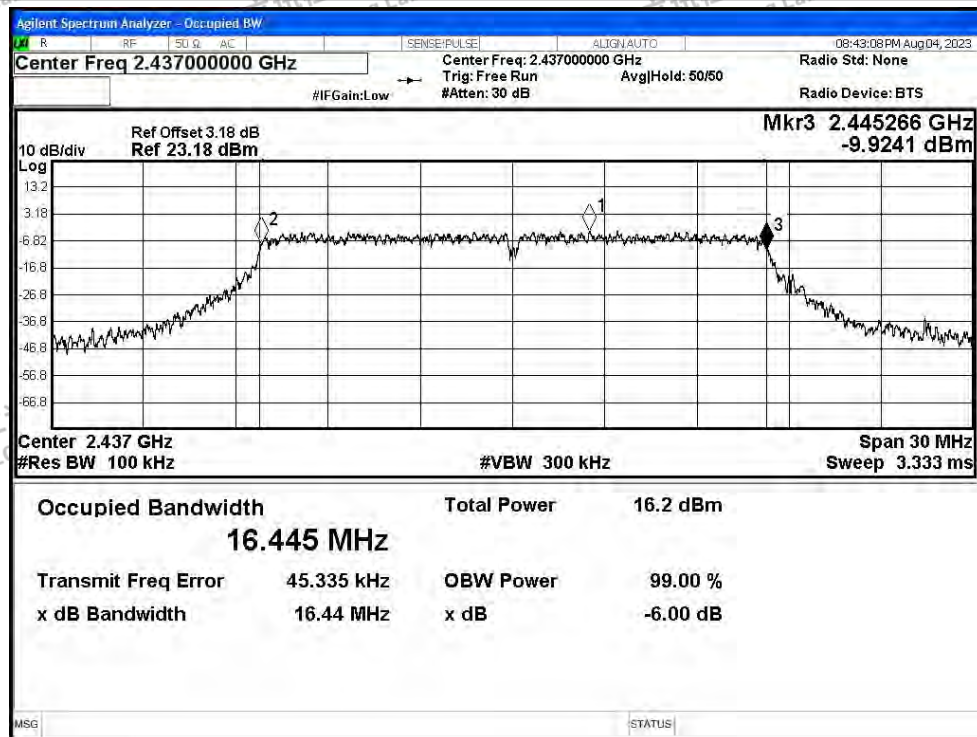


-6dB Bandwidth NVNT g 2462MHz Ant1






-6dB Bandwidth NVNT n20 2412MHz Ant1

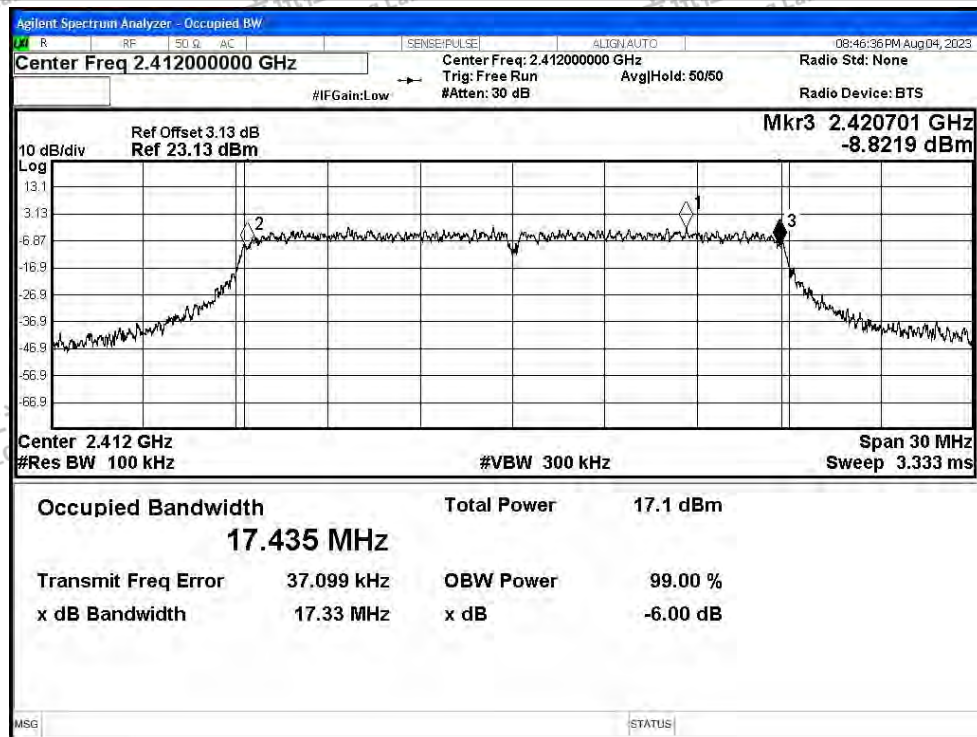

-6dB Bandwidth NVNT n20 2437MHz Ant1



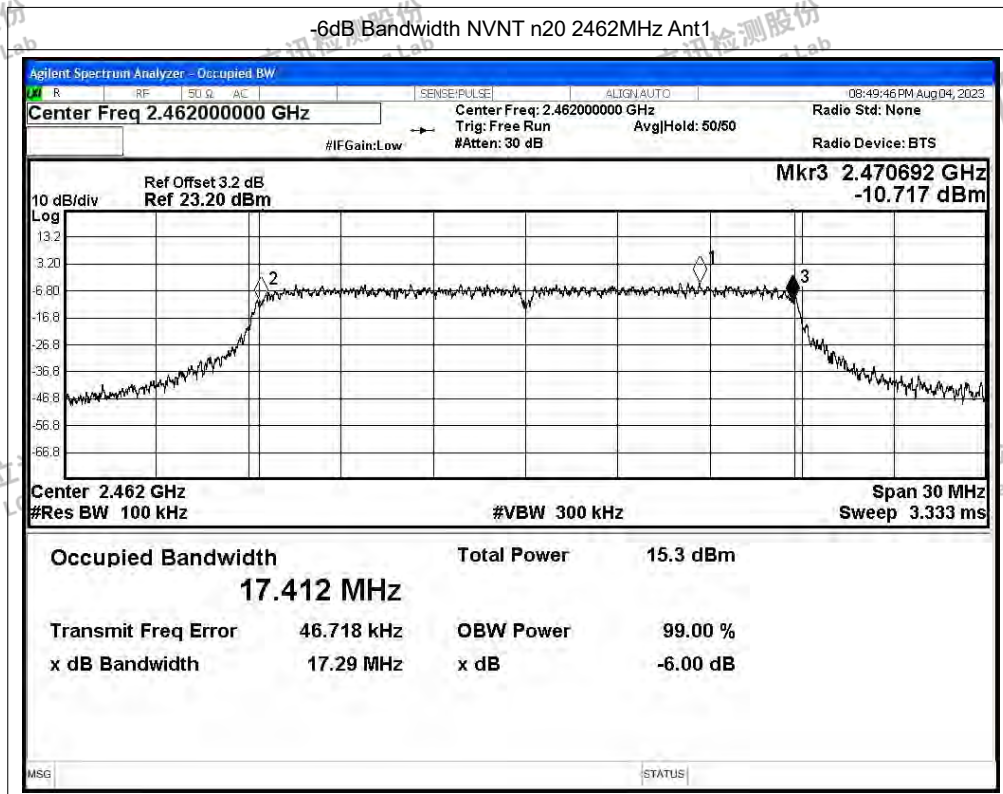



## B.2 Maximum Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | 18.62                 | 30          | Pass    |
| NVNT      | b    | 2437            | Ant1    | 18.29                 | 30          | Pass    |
| NVNT      | b    | 2462            | Ant1    | 16.54                 | 30          | Pass    |
| NVNT      | g    | 2412            | Ant1    | 14.62                 | 30          | Pass    |
| NVNT      | g    | 2437            | Ant1    | 13.58                 | 30          | Pass    |
| NVNT      | g    | 2462            | Ant1    | 12.86                 | 30          | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 14.55                 | 30          | Pass    |
| NVNT      | n20  | 2437            | Ant1    | 13.51                 | 30          | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 14.3                  | 30          | Pass    |





### B.3 Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|-----------|------|-----------------|---------|--------------------------|------------------|---------|
| NVNT      | b    | 2412            | Ant1    | -7.79                    | 8                | Pass    |
| NVNT      | b    | 2437            | Ant1    | -9.81                    | 8                | Pass    |
| NVNT      | b    | 2462            | Ant1    | -9.7                     | 8                | Pass    |
| NVNT      | g    | 2412            | Ant1    | -16.38                   | 8                | Pass    |
| NVNT      | g    | 2437            | Ant1    | -17.92                   | 8                | Pass    |
| NVNT      | g    | 2462            | Ant1    | -17.97                   | 8                | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -16.52                   | 8                | Pass    |
| NVNT      | n20  | 2437            | Ant1    | -17.5                    | 8                | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -18.08                   | 8                | Pass    |






## Test Graphs

PSD NVNT b 2412MHz Ant1

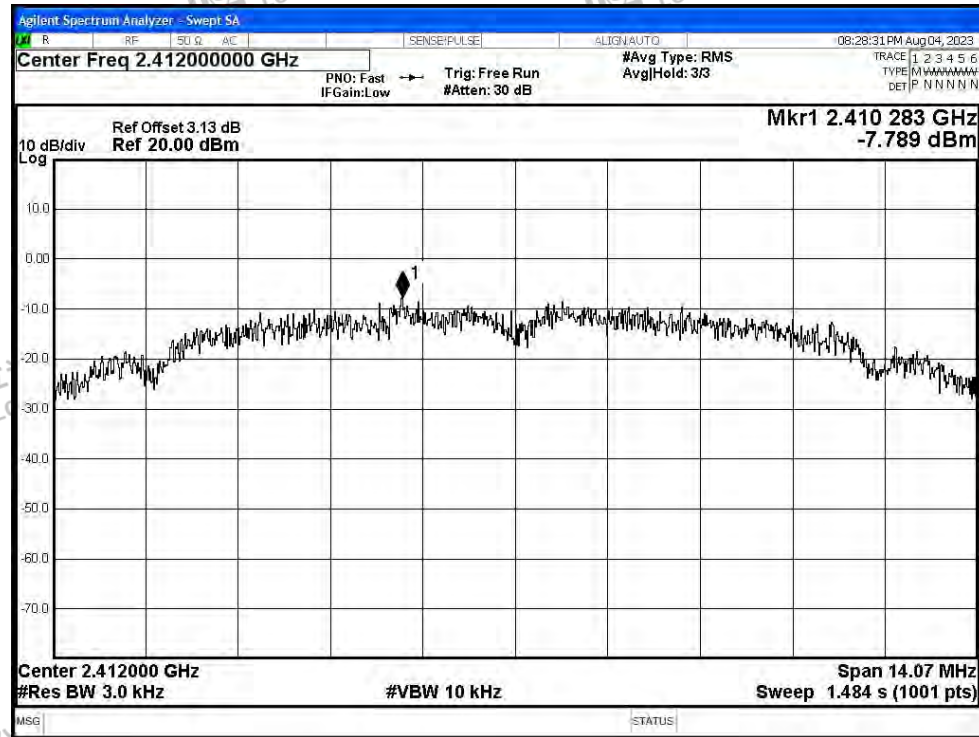


PSD NVNT b 2437MHz Ant1

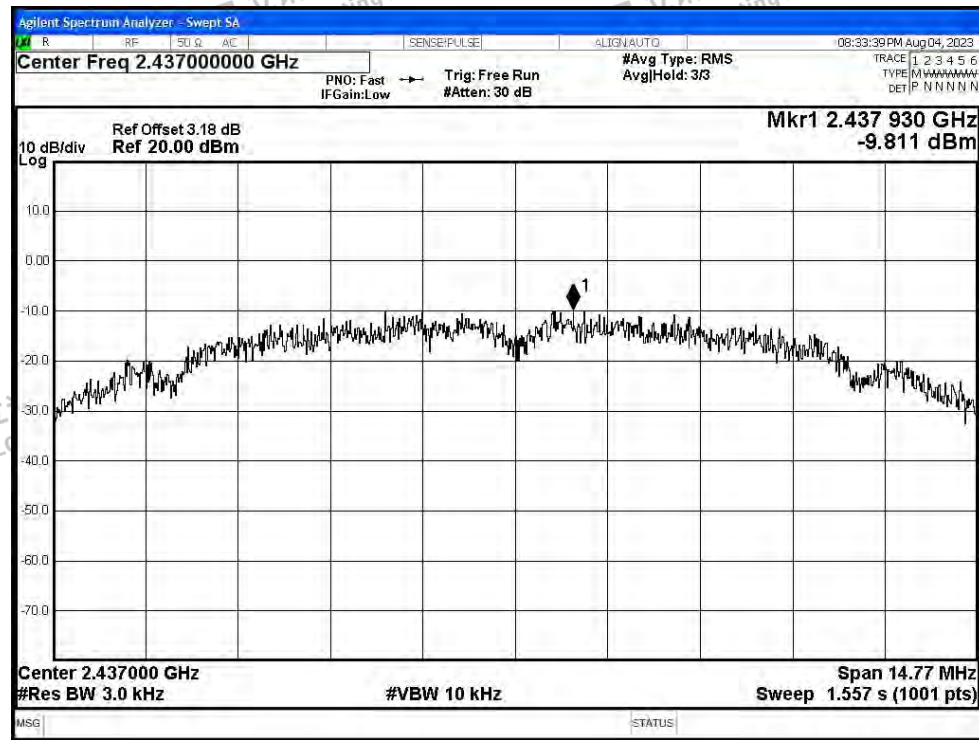




PSD NVNT b 2462MHz Ant1

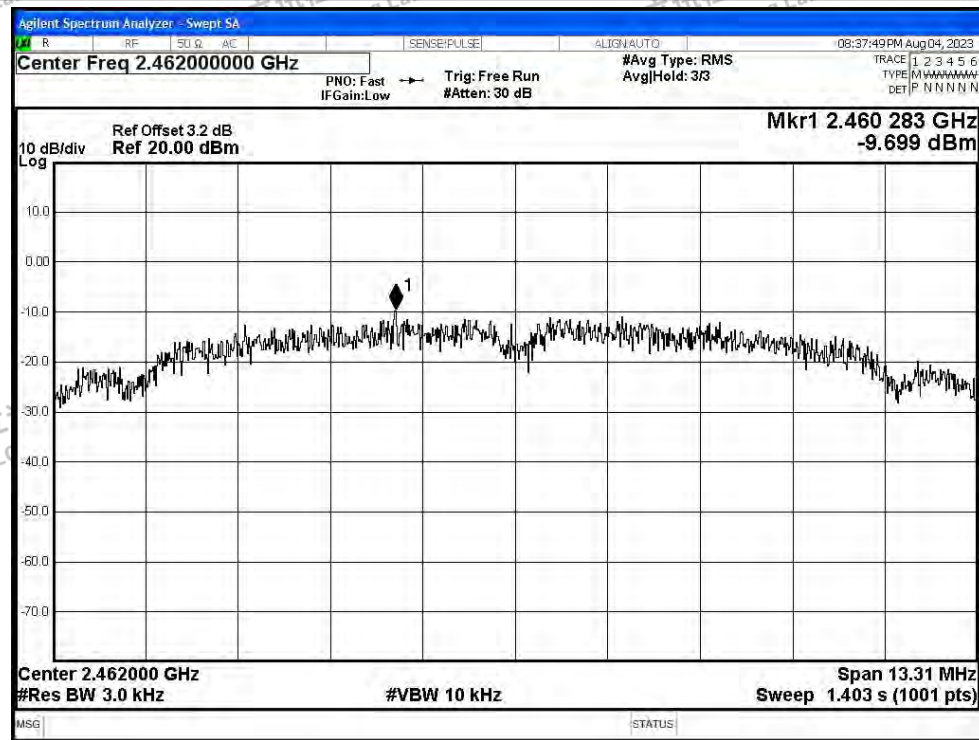


PSD NVNT g 2412MHz Ant1

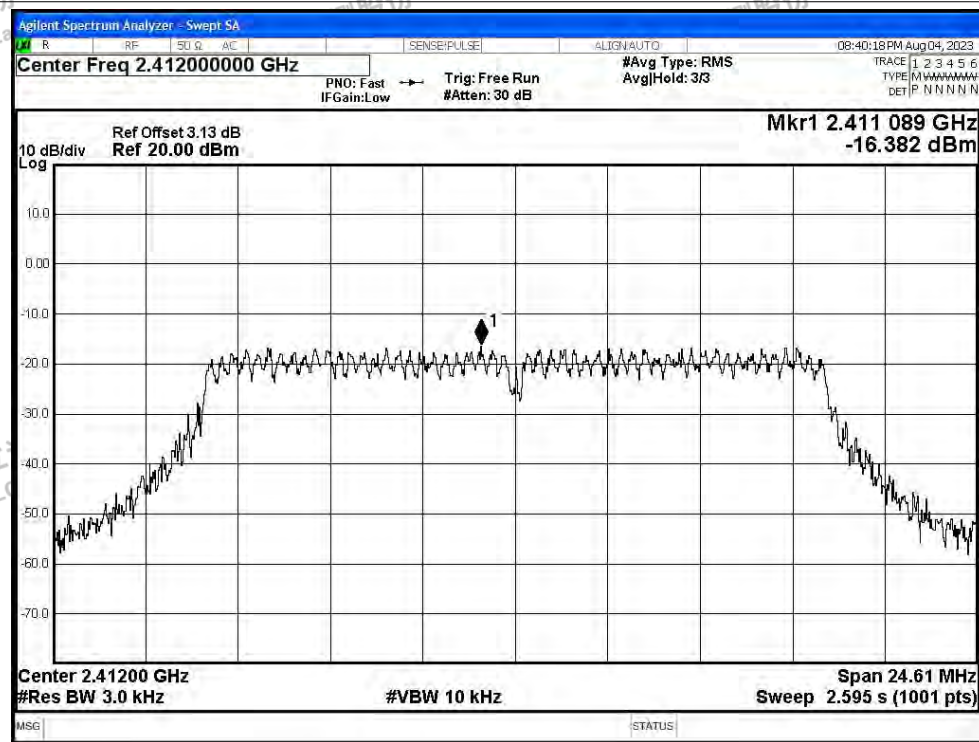




PSD NVNT g 2437MHz Ant1

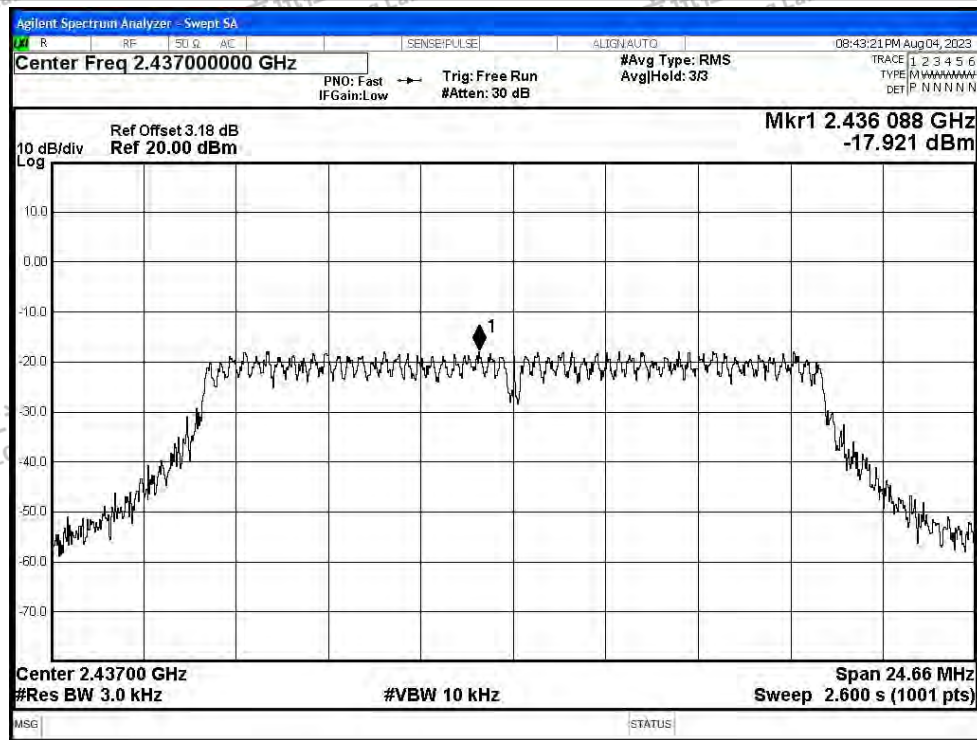


PSD NVNT g 2462MHz Ant1

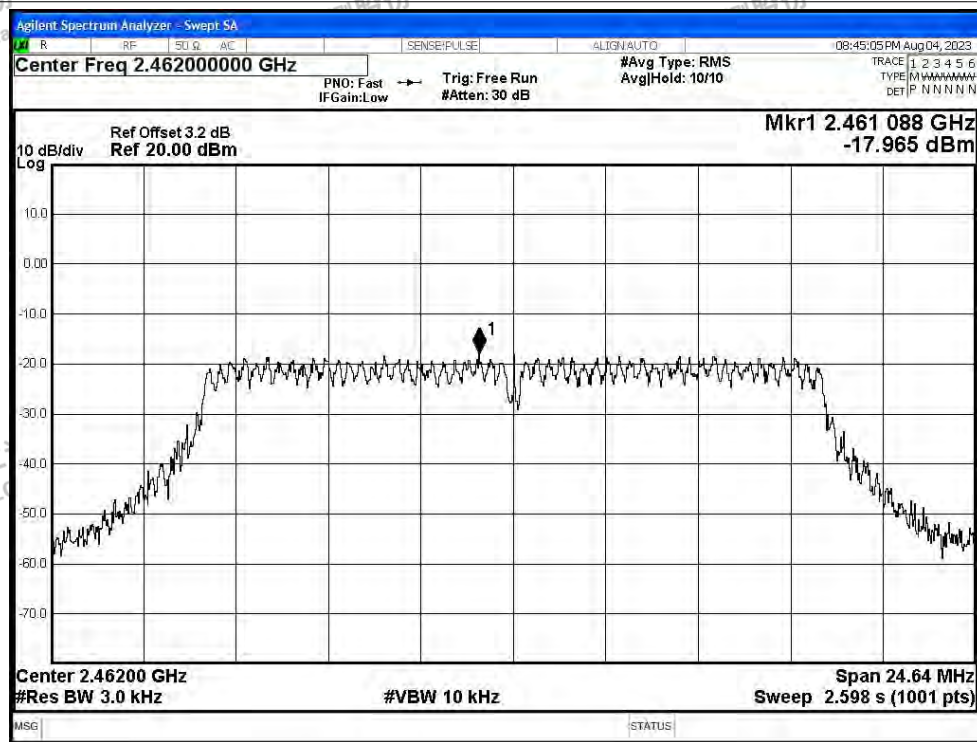





PSD NVNT n20 2412MHz Ant1

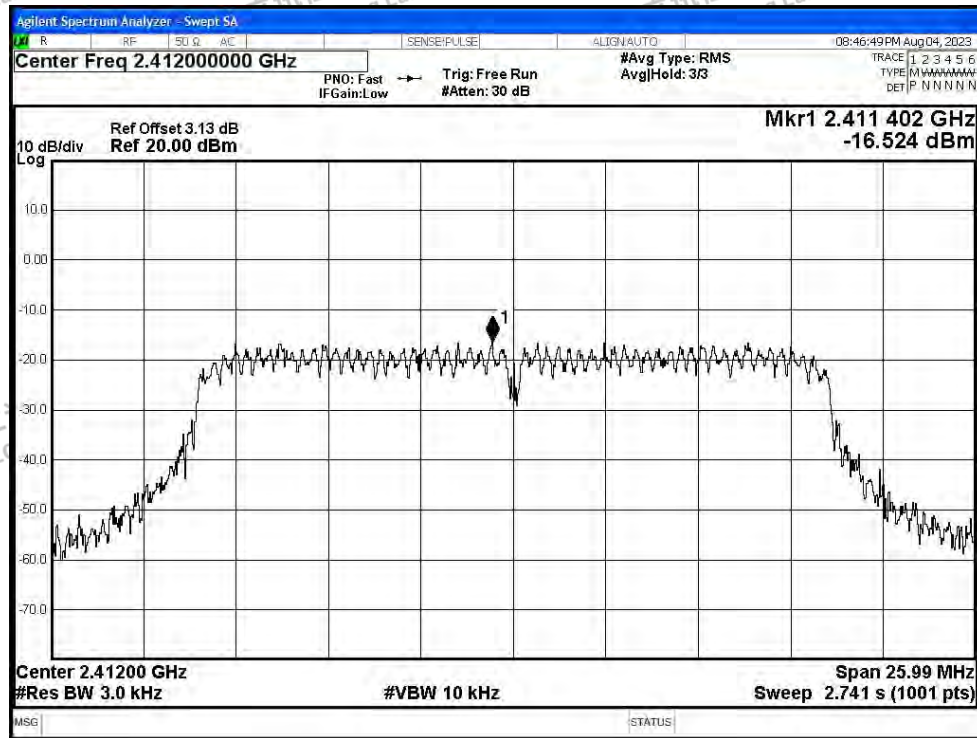

PSD NVNT n20 2437MHz Ant1

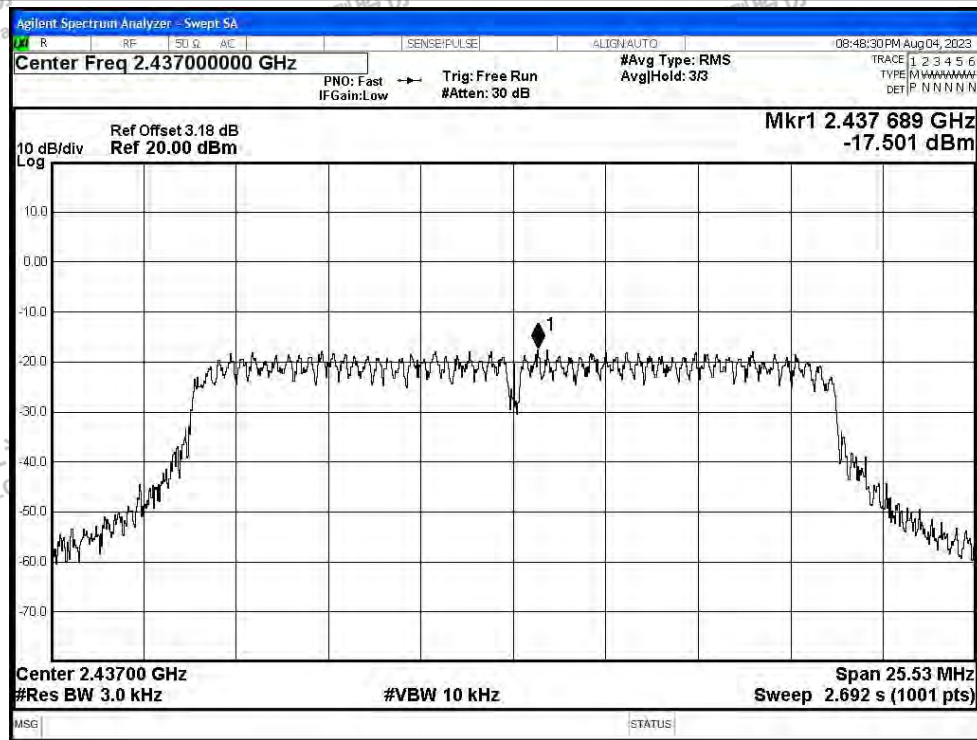

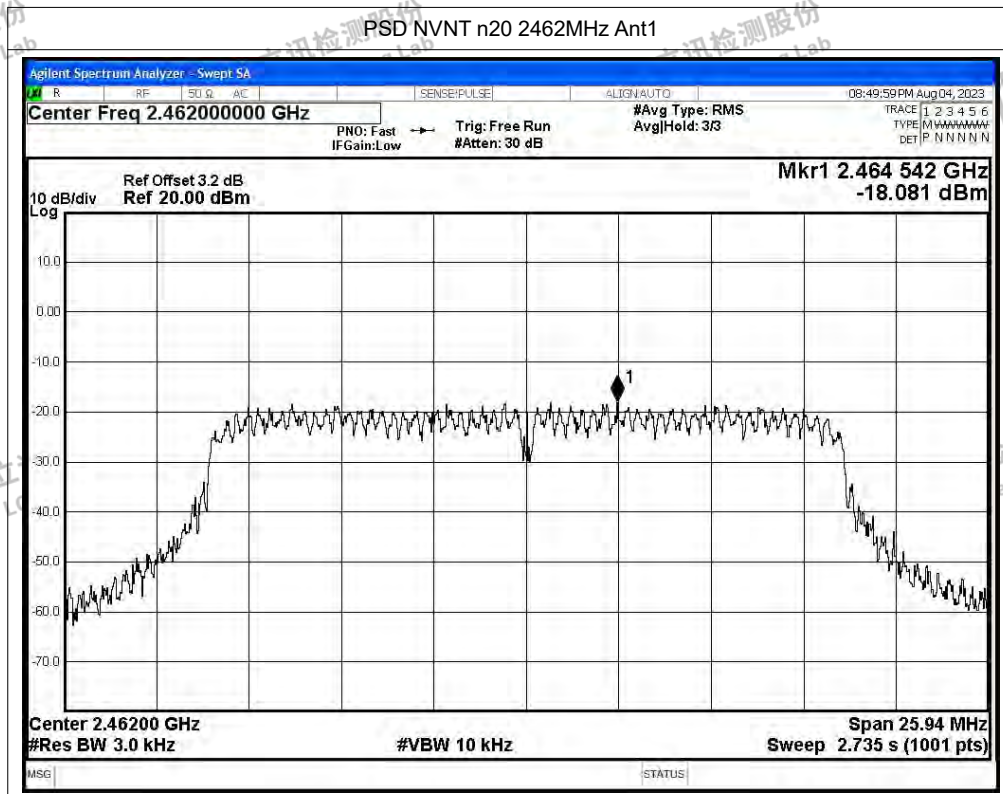



## B.4 Band Edge

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | -47.44          | -20         | Pass    |
| NVNT      | b    | 2462            | Ant1    | -58.4           | -20         | Pass    |
| NVNT      | g    | 2412            | Ant1    | -36.51          | -20         | Pass    |
| NVNT      | g    | 2462            | Ant1    | -47.3           | -20         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -37.01          | -20         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -44.68          | -20         | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

## Band Edge NVNT b 2412MHz Ant1 Ref

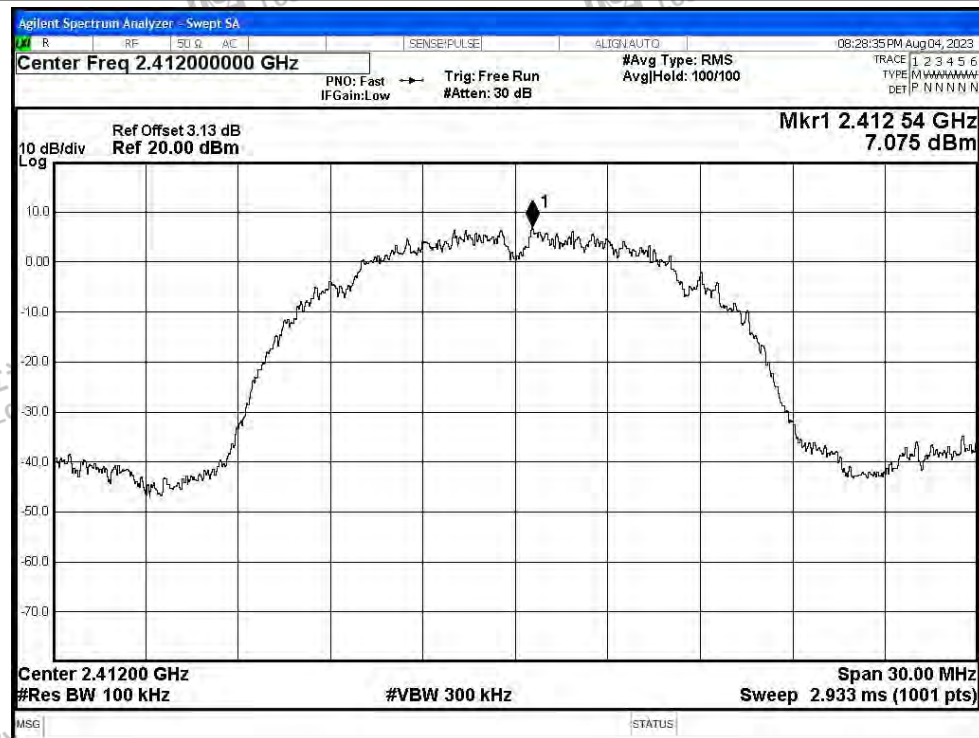


## Band Edge NVNT b 2412MHz Ant1 Emission

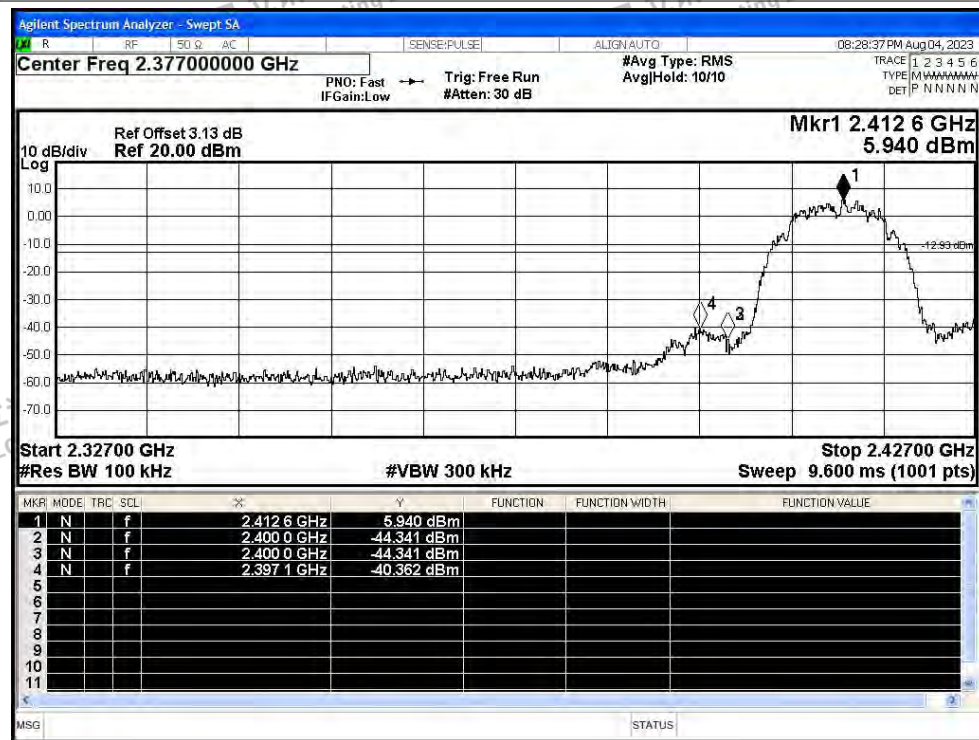




## Band Edge NVNT b 2462MHz Ant1 Ref

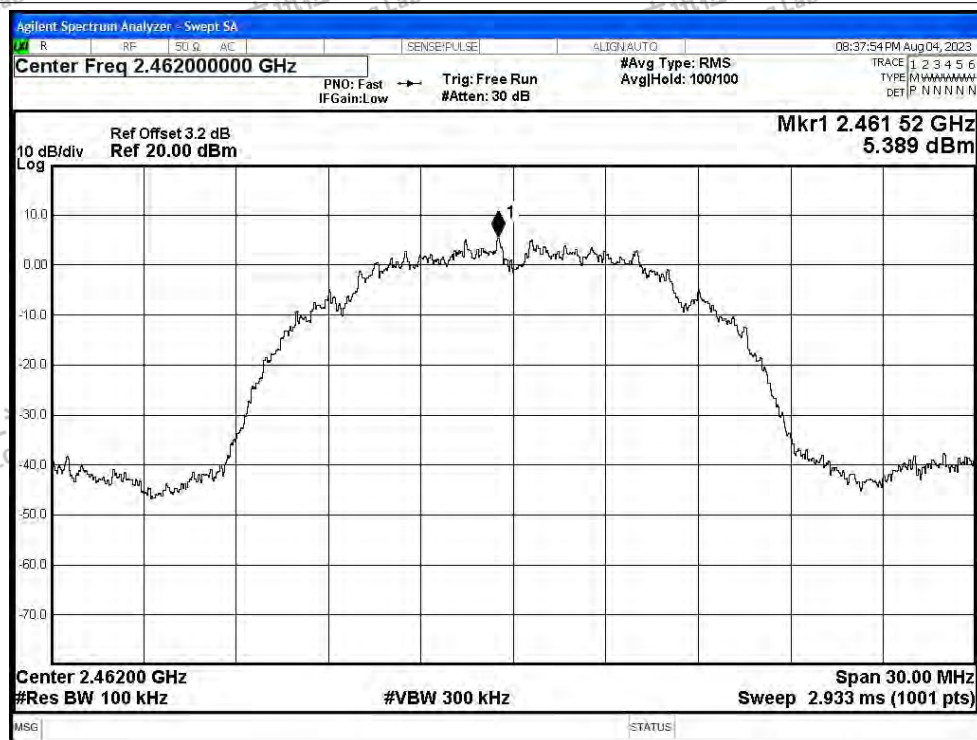


## Band Edge NVNT b 2462MHz Ant1 Emission

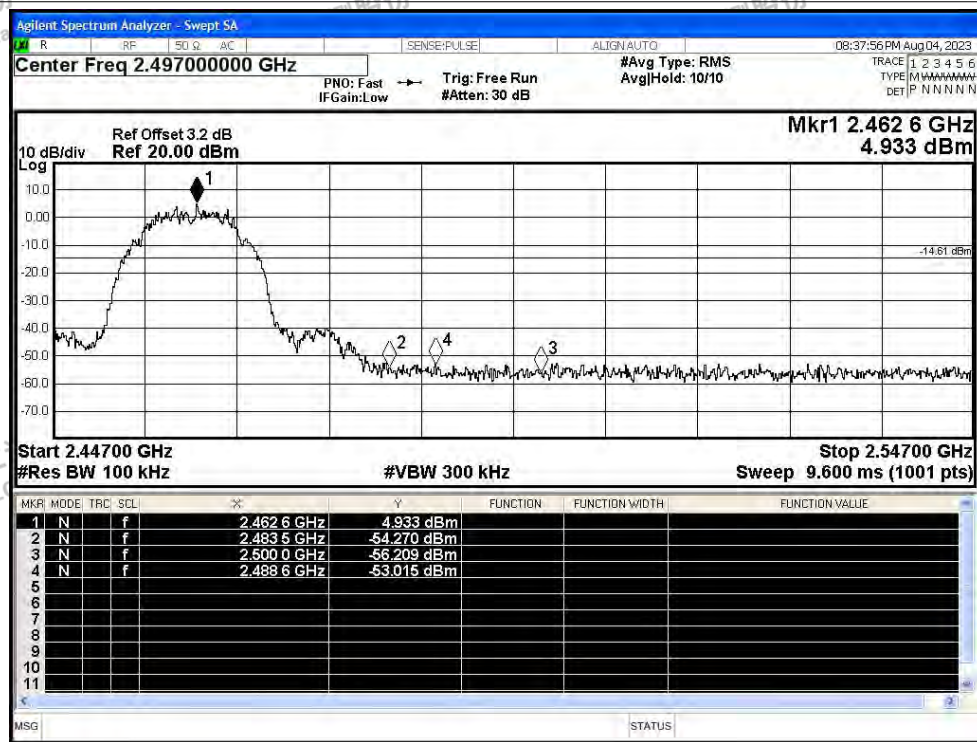



## Band Edge NVNT g 2412MHz Ant1 Ref

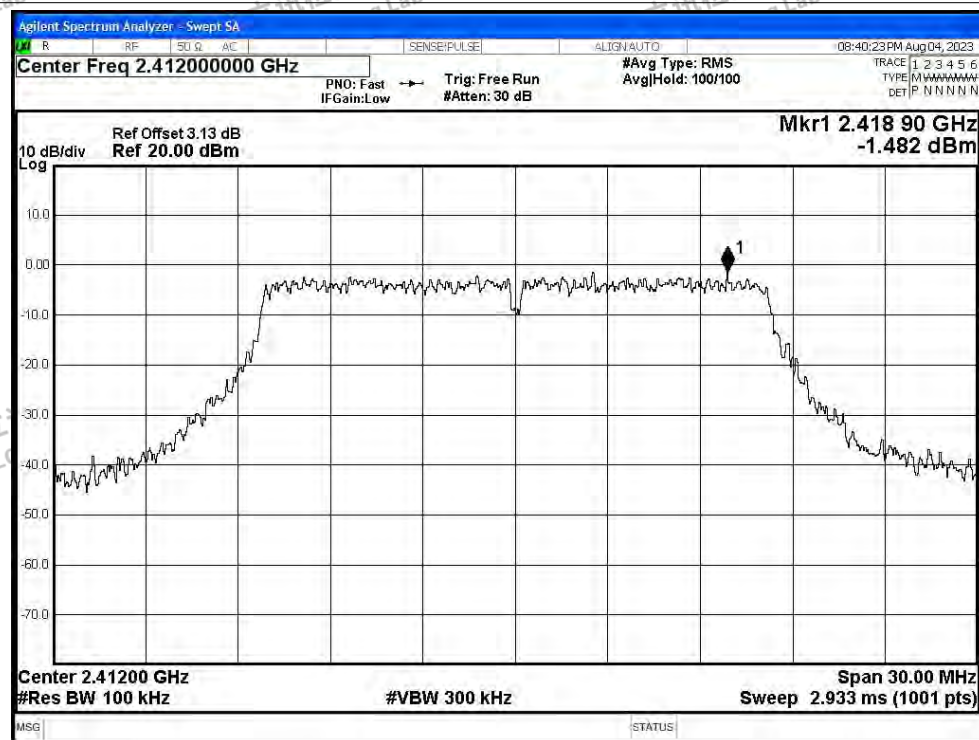


## Band Edge NVNT g 2412MHz Ant1 Emission






## Band Edge NVNT g 2462MHz Ant1 Ref

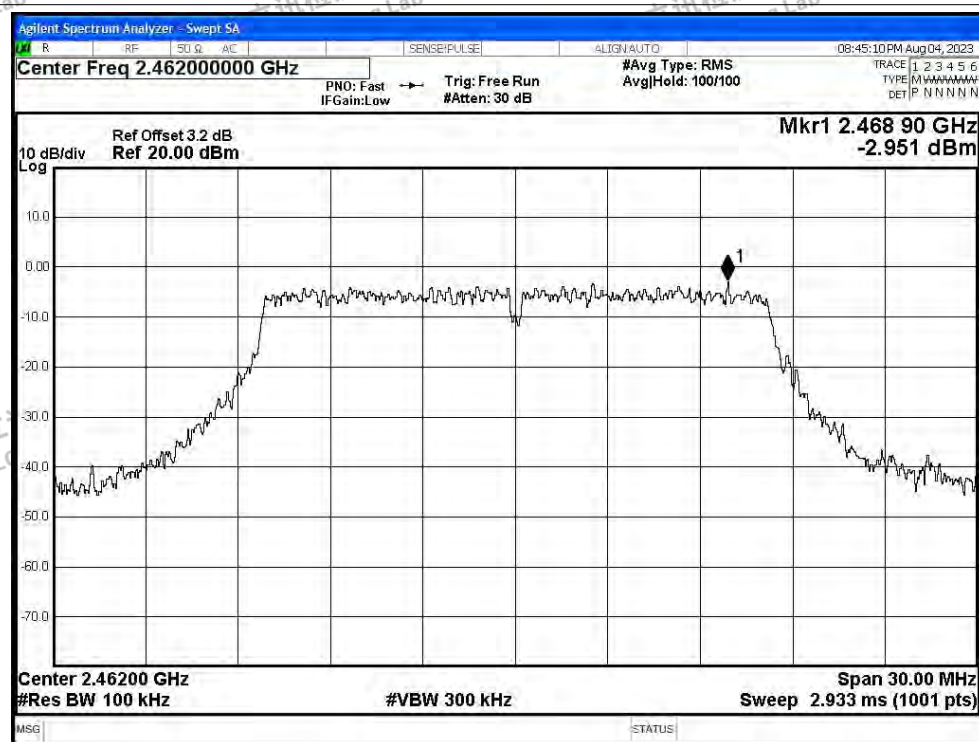


## Band Edge NVNT g 2462MHz Ant1 Emission

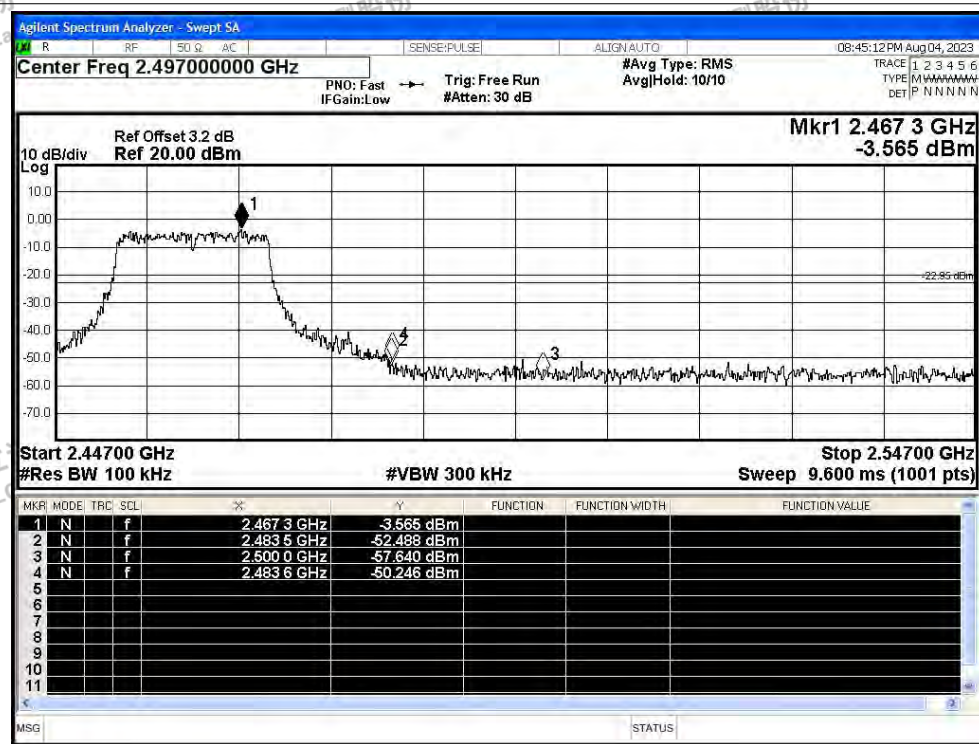




## Band Edge NVNT n20 2412MHz Ant1 Ref

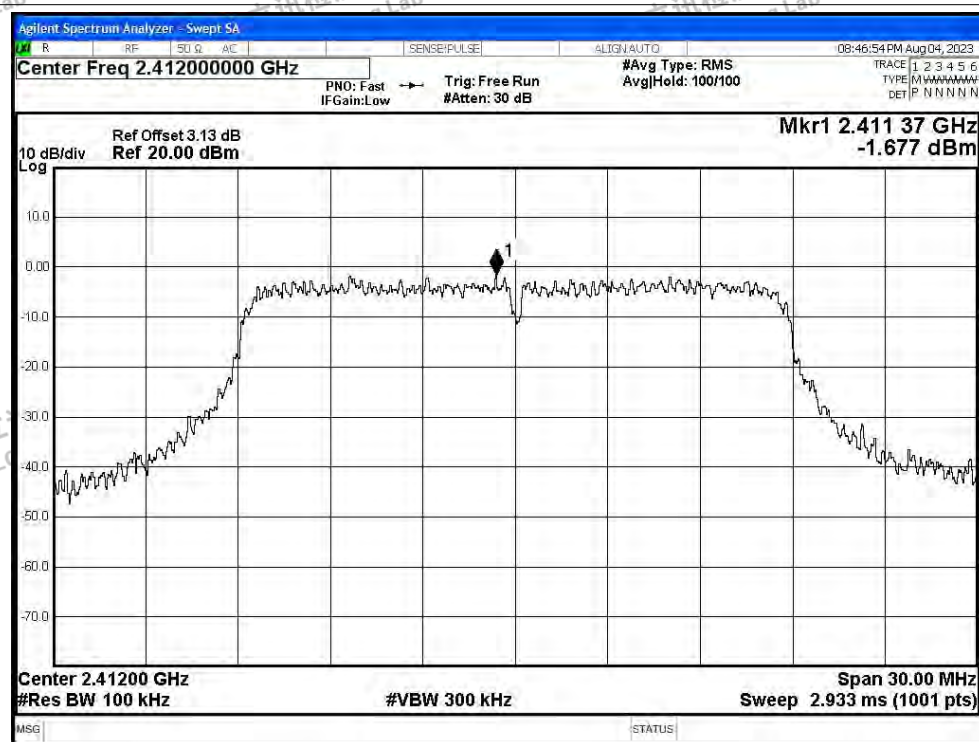


## Band Edge NVNT n20 2412MHz Ant1 Emission

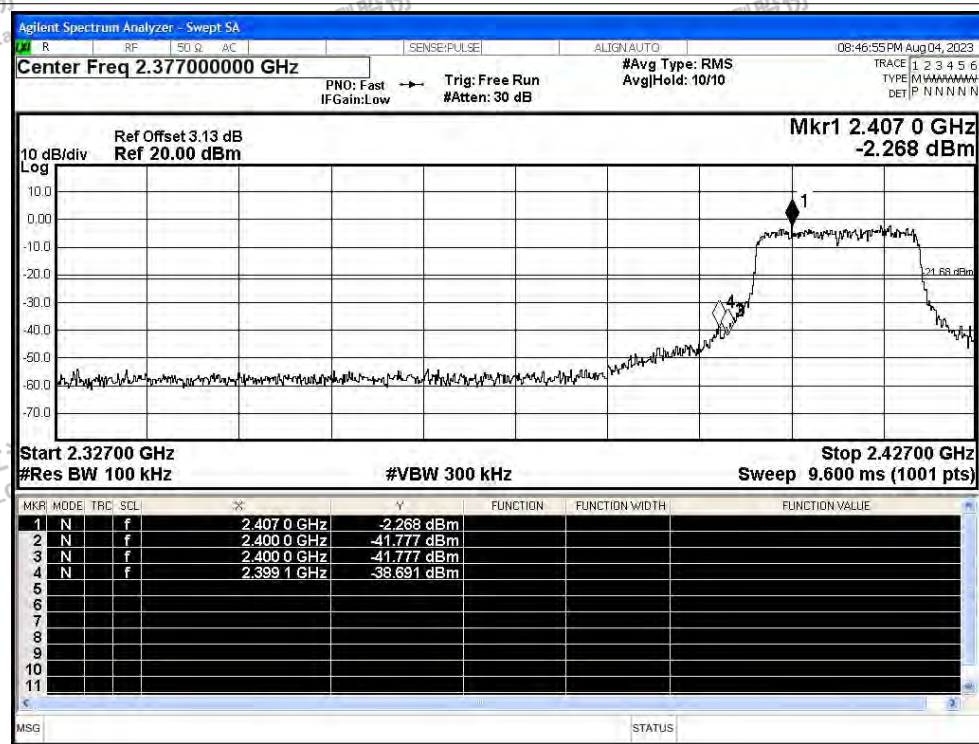




## Band Edge NVNT n20 2462MHz Ant1 Ref

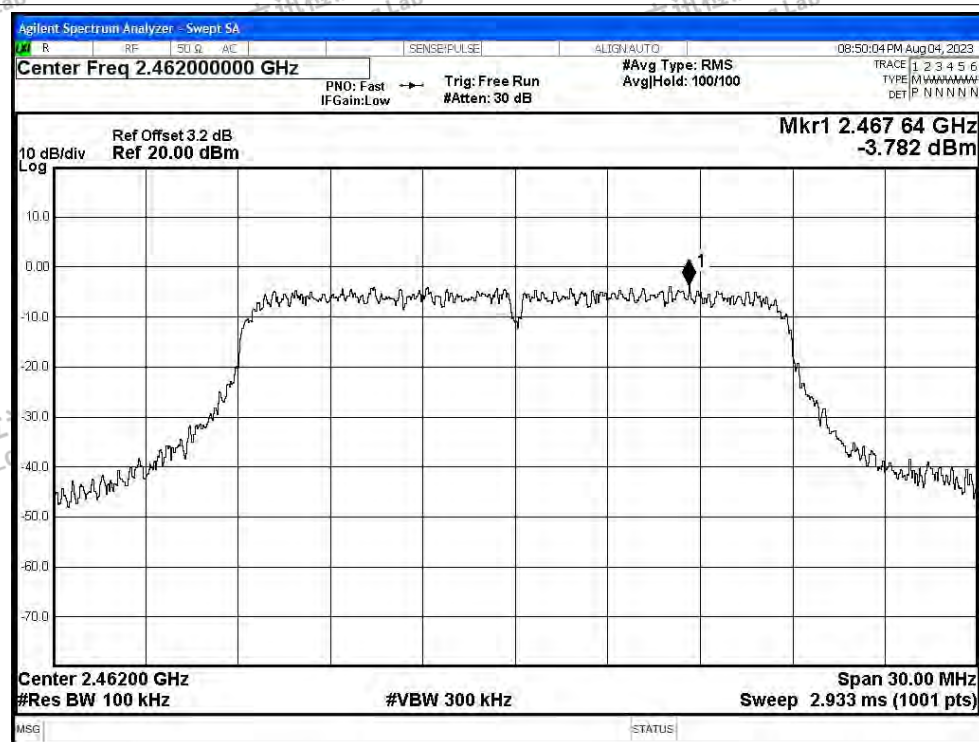

## Band Edge NVNT n20 2462MHz Ant1 Emission

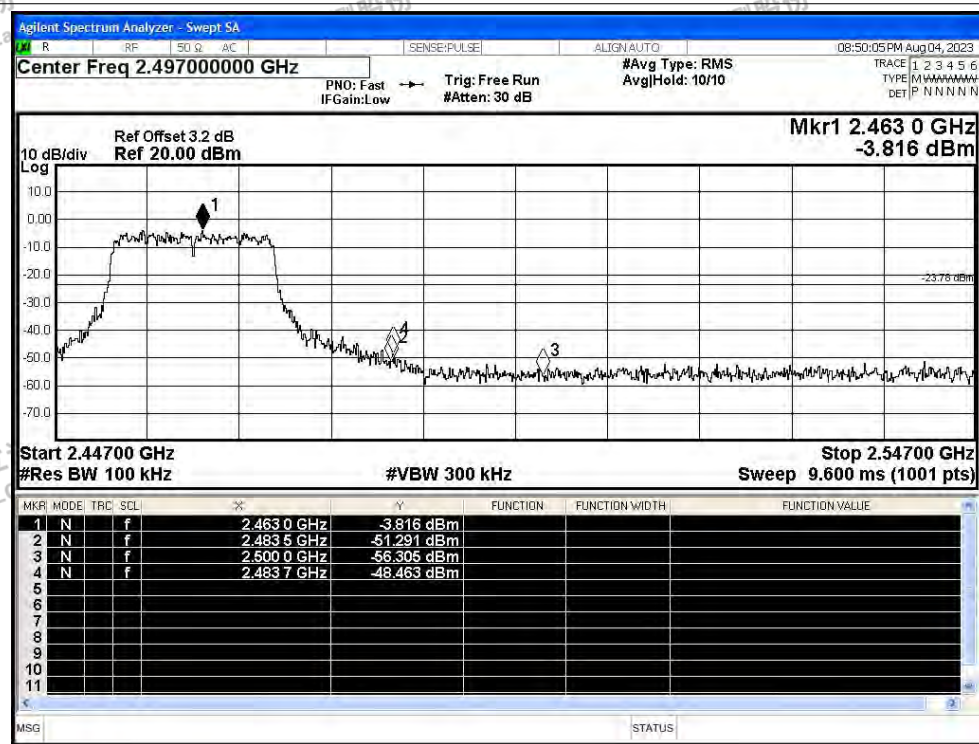



## B.5 Conducted RF Spurious Emission

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|---------|
| NVNT      | b    | 2412            | Ant1    | -35.79          | -20         | Pass    |
| NVNT      | b    | 2437            | Ant1    | -36.09          | -20         | Pass    |
| NVNT      | b    | 2462            | Ant1    | -38.45          | -20         | Pass    |
| NVNT      | g    | 2412            | Ant1    | -34.85          | -20         | Pass    |
| NVNT      | g    | 2437            | Ant1    | -33.47          | -20         | Pass    |
| NVNT      | g    | 2462            | Ant1    | -33.54          | -20         | Pass    |
| NVNT      | n20  | 2412            | Ant1    | -34.32          | -20         | Pass    |
| NVNT      | n20  | 2437            | Ant1    | -33.57          | -20         | Pass    |
| NVNT      | n20  | 2462            | Ant1    | -33.36          | -20         | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

Tx: Spurious NVNT b 2412MHz Ant1 Ref

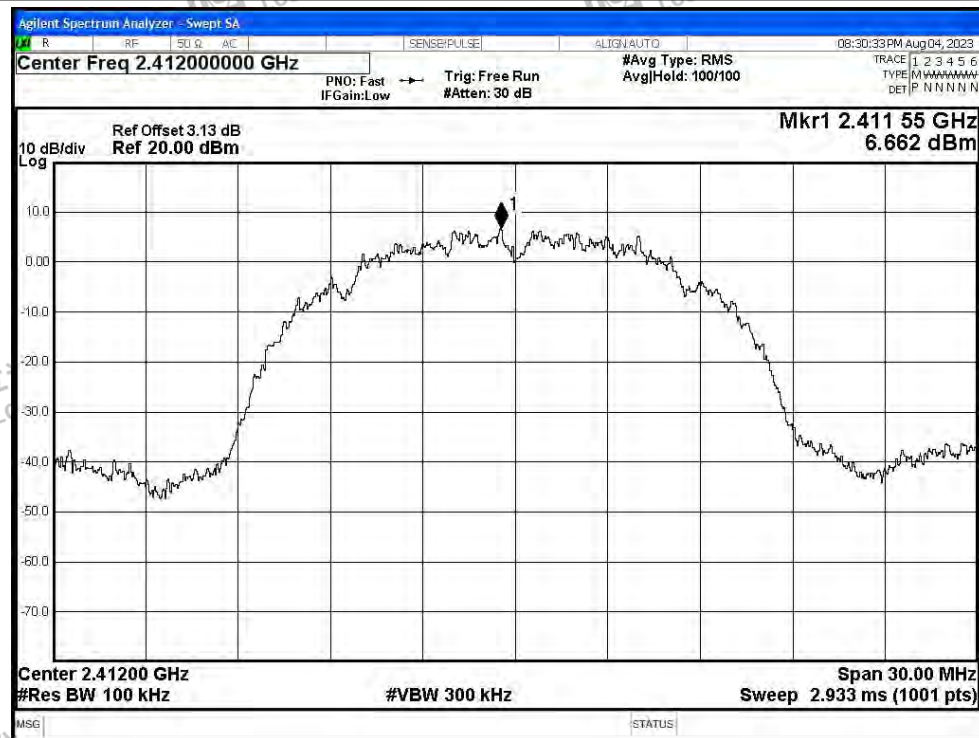

Tx: Spurious NVNT b 2412MHz Ant1 Emission

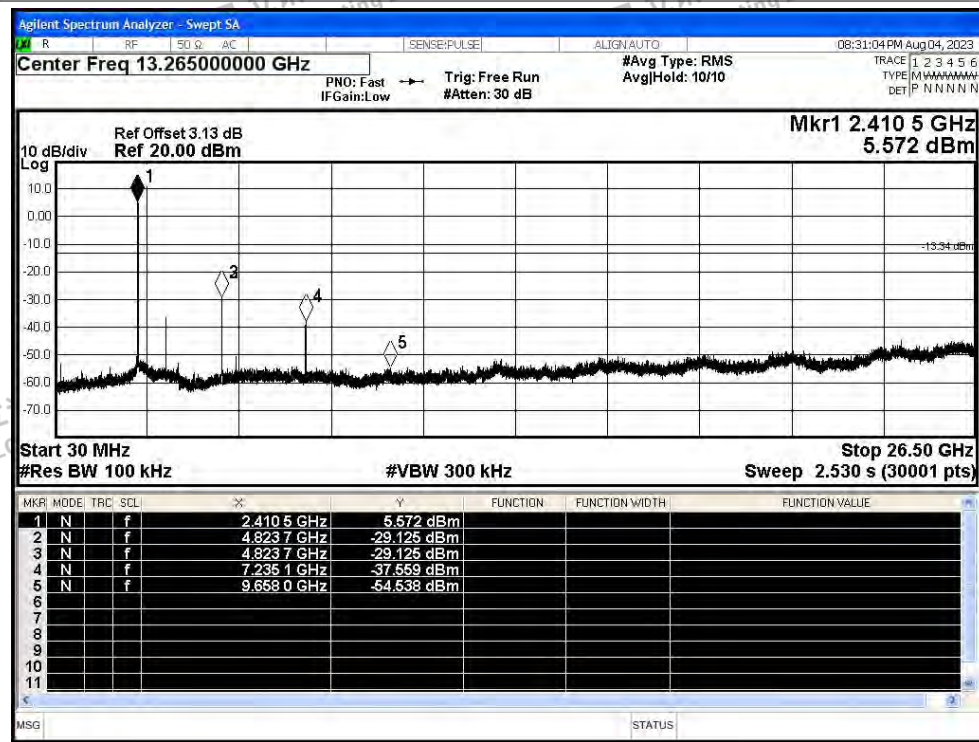

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Tx. Spurious NVNT b 2437MHz Ant1 Ref

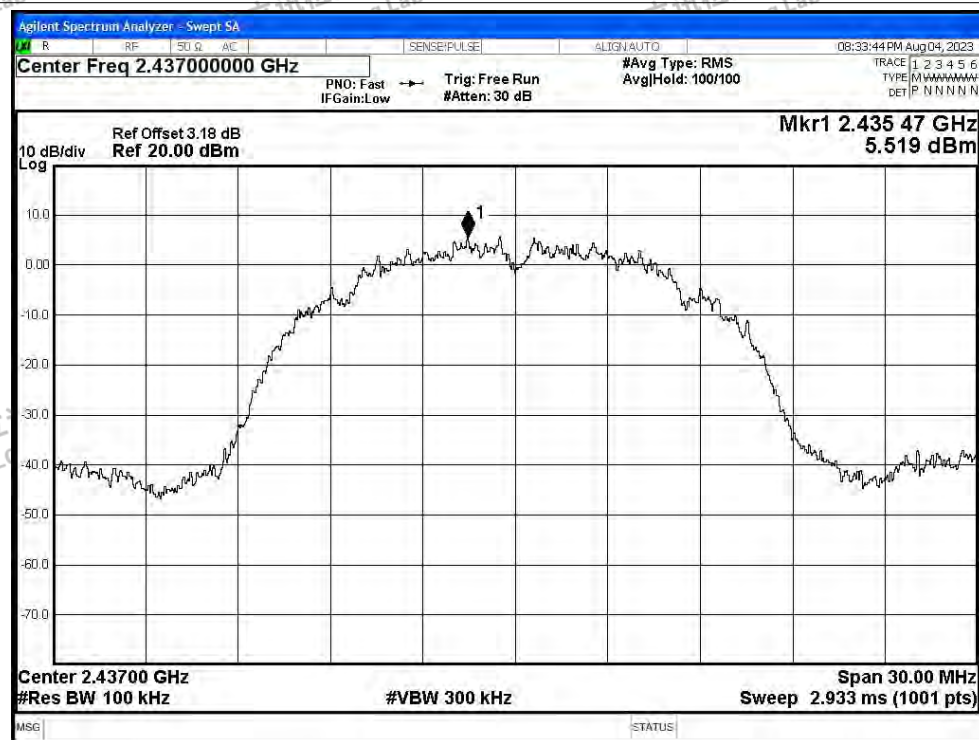


## Tx. Spurious NVNT b 2437MHz Ant1 Emission

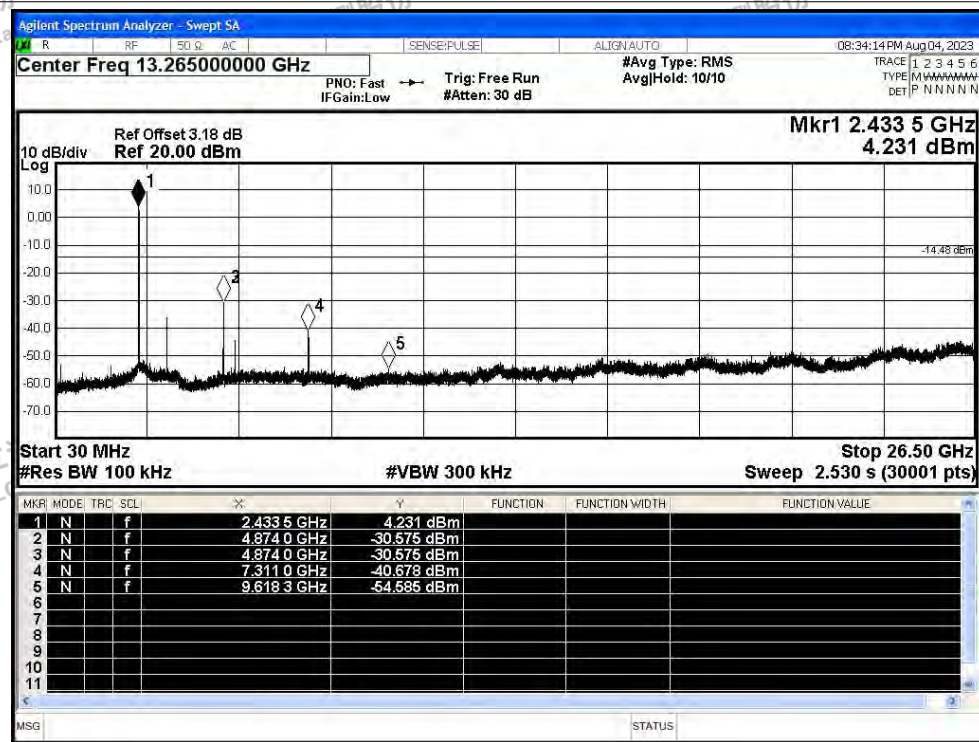




## Tx. Spurious NVNT b 2462MHz Ant1 Ref

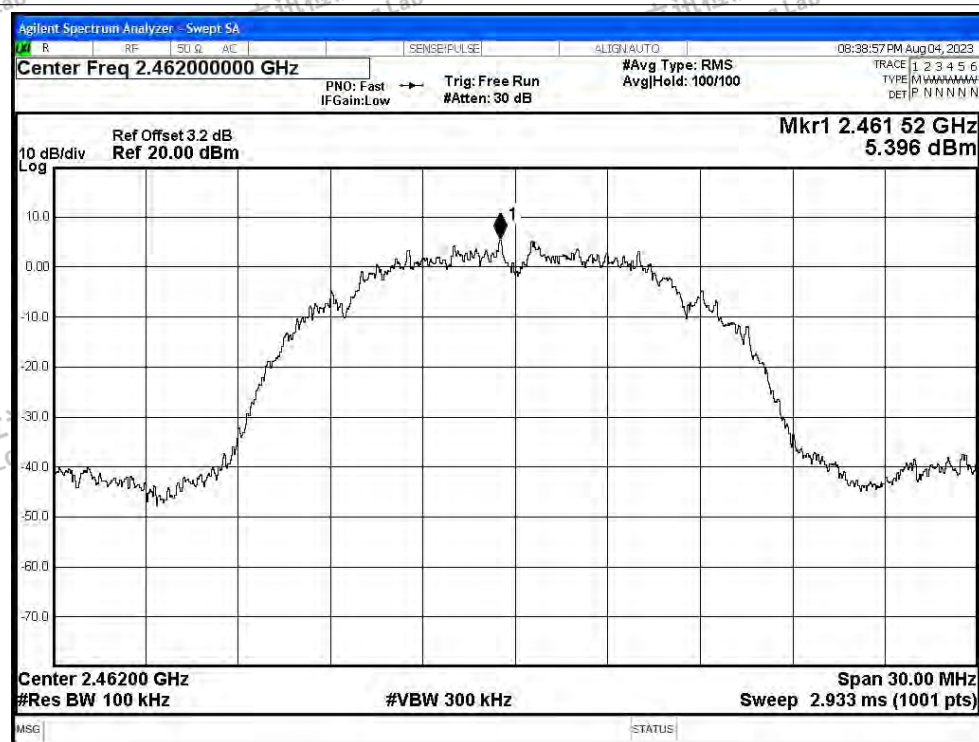


## Tx. Spurious NVNT b 2462MHz Ant1 Emission

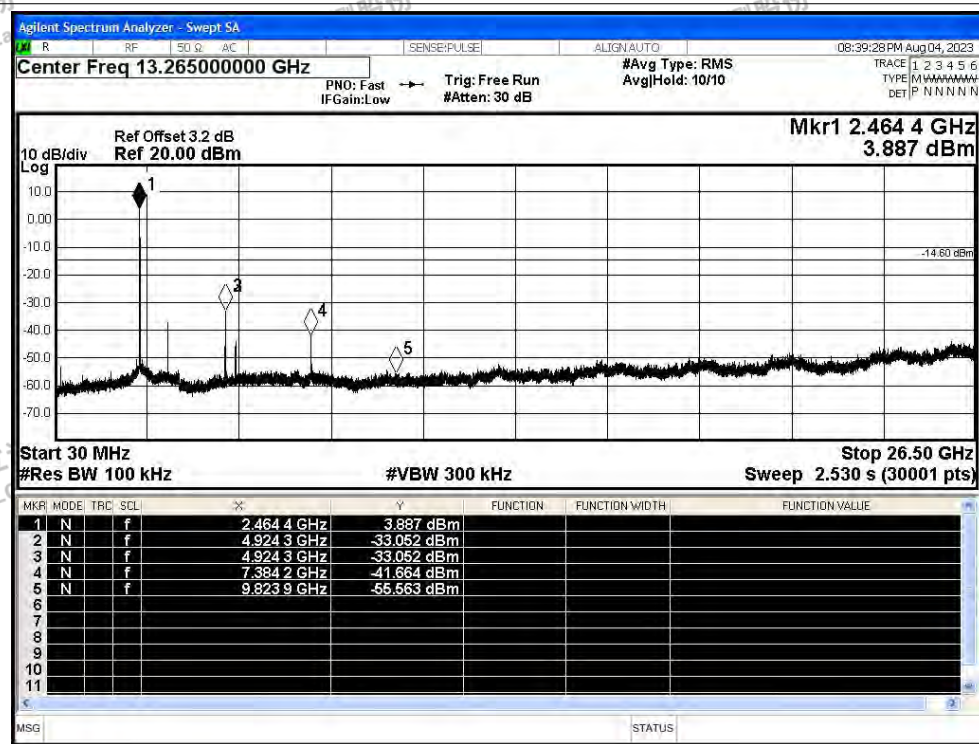




Tx. Spurious NVNT g 2412MHz Ant1 Ref

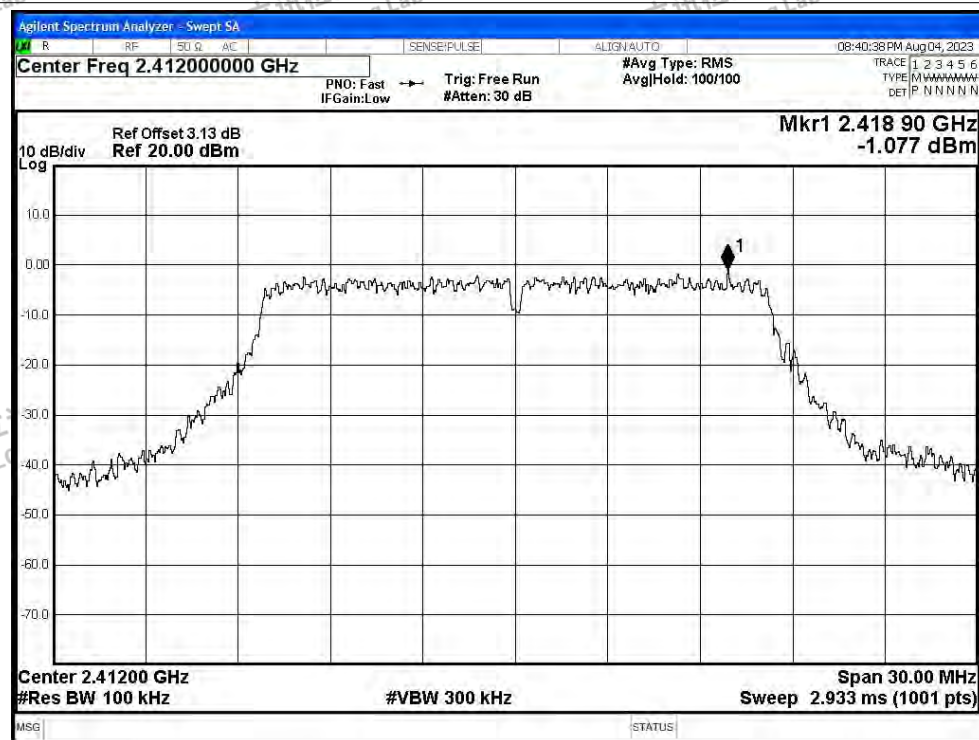


Tx. Spurious NVNT g 2412MHz Ant1 Emission

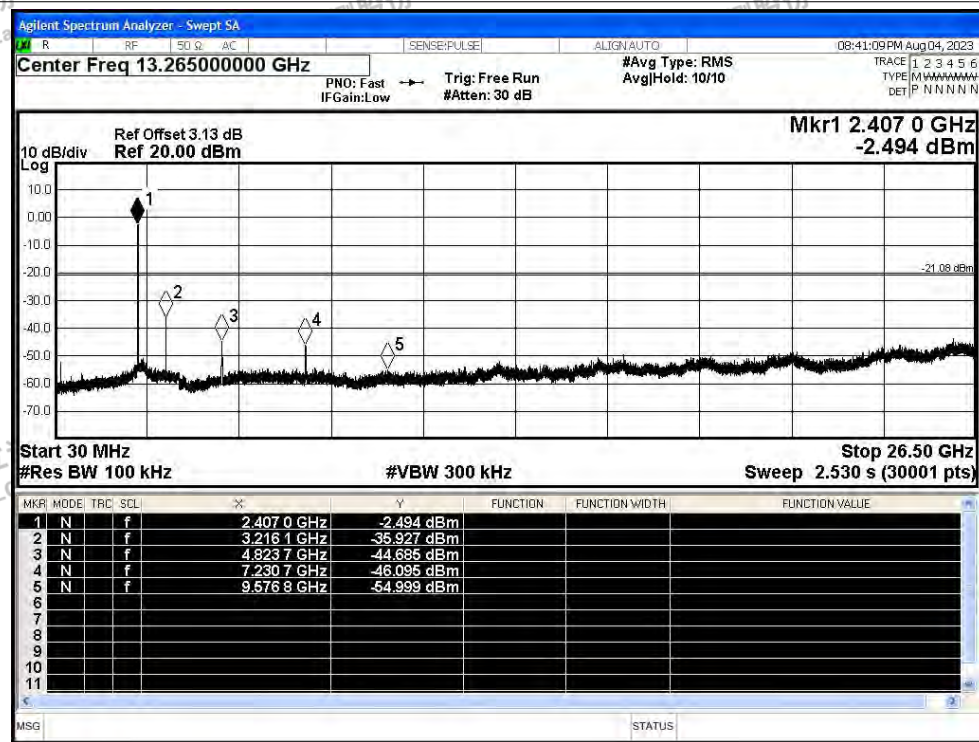




Tx. Spurious NVNT g 2437MHz Ant1 Ref

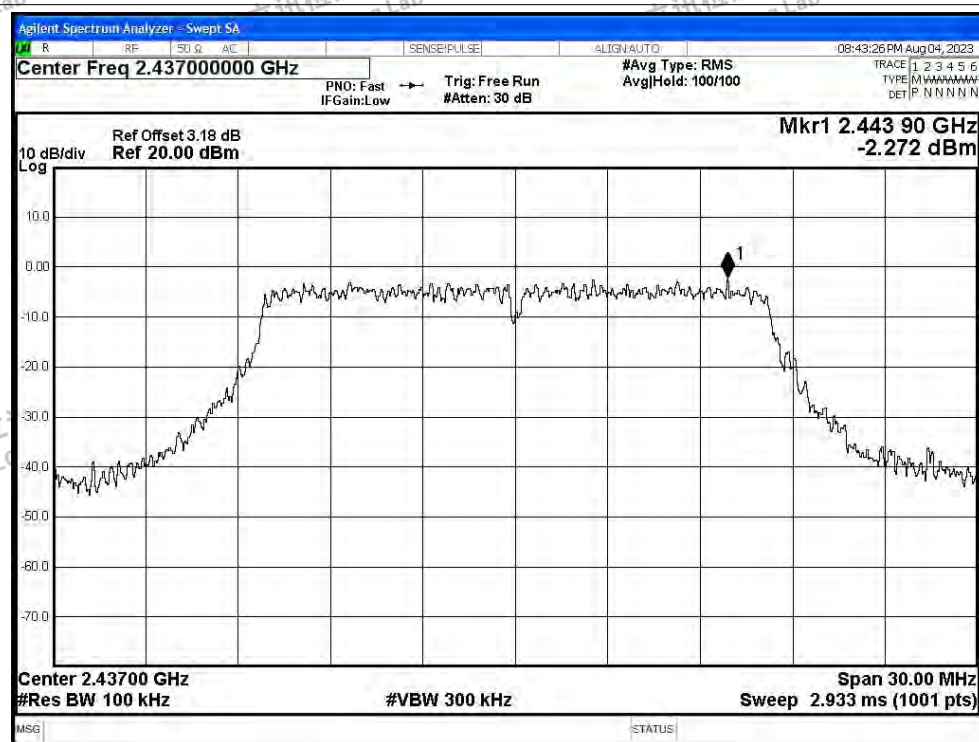


Tx. Spurious NVNT g 2437MHz Ant1 Emission

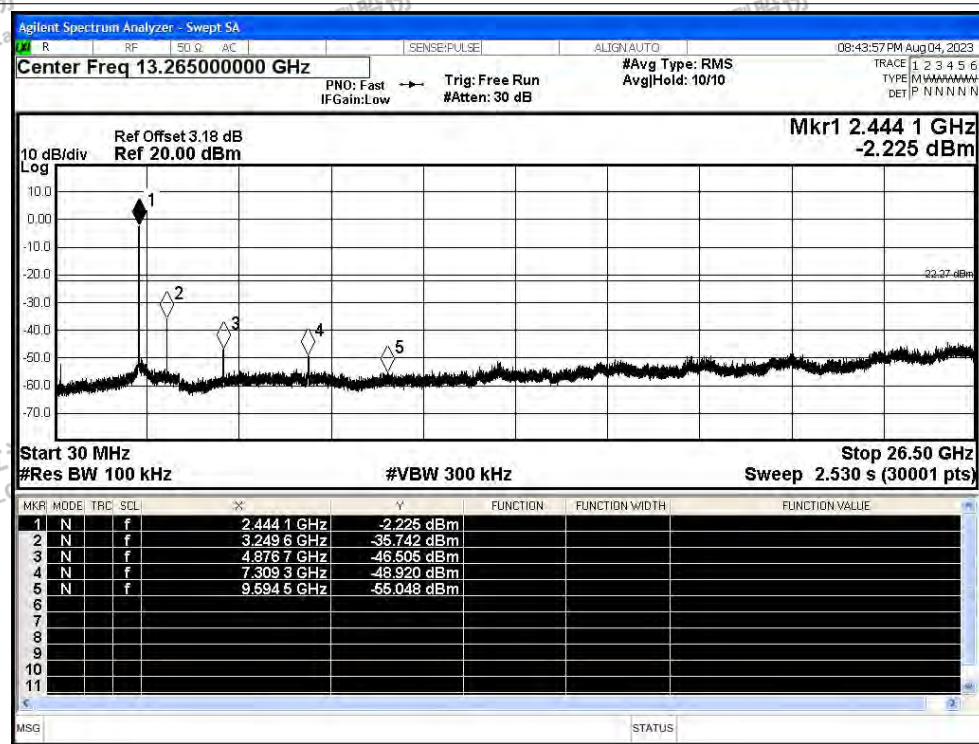




## Tx. Spurious NVNT g 2462MHz Ant1 Ref

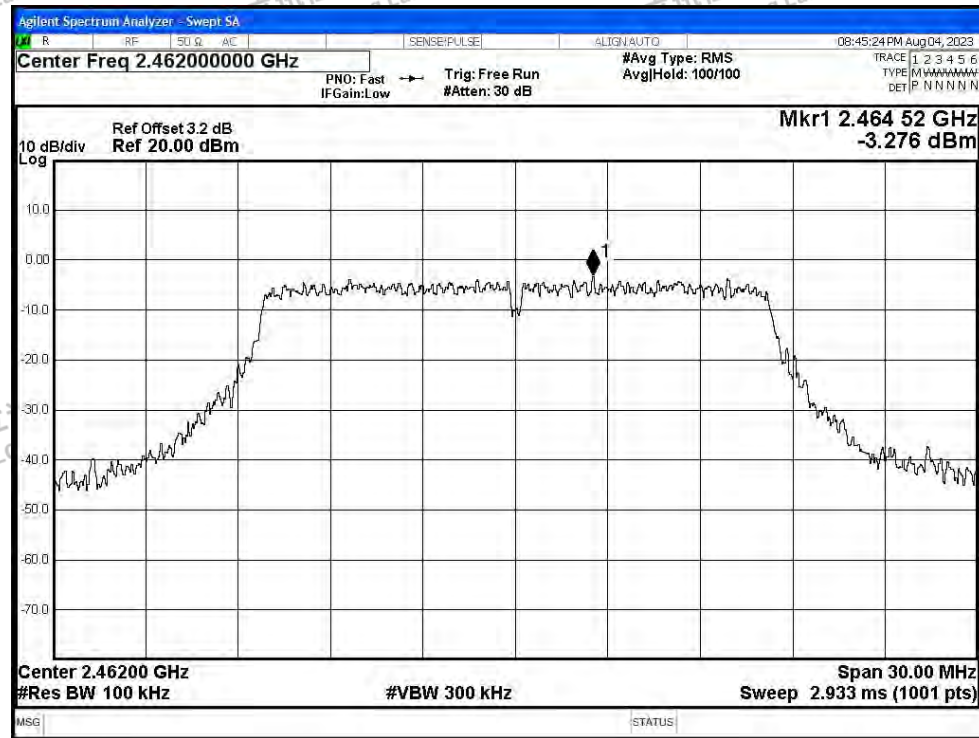


## Tx. Spurious NVNT g 2462MHz Ant1 Emission

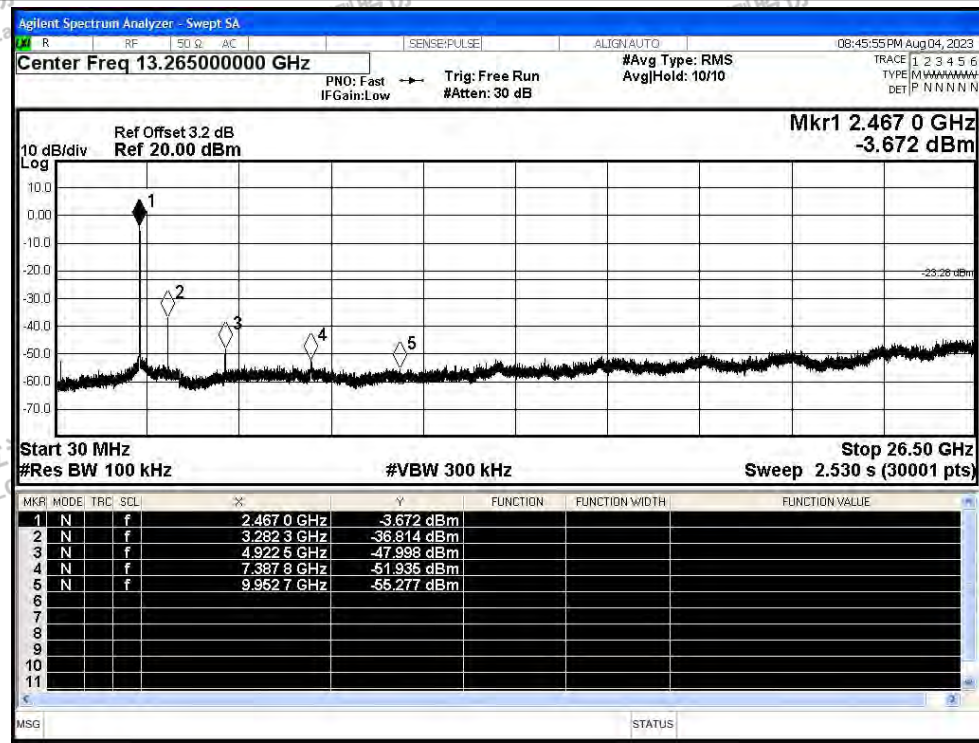




## Tx. Spurious NVNT n20 2412MHz Ant1 Ref

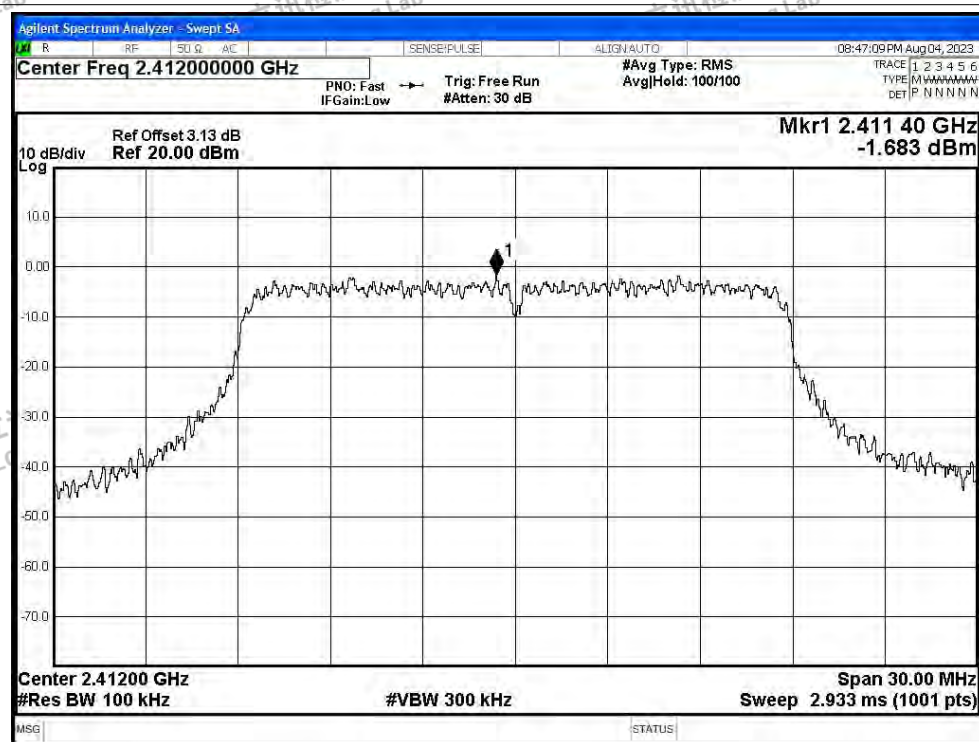


## Tx. Spurious NVNT n20 2412MHz Ant1 Emission

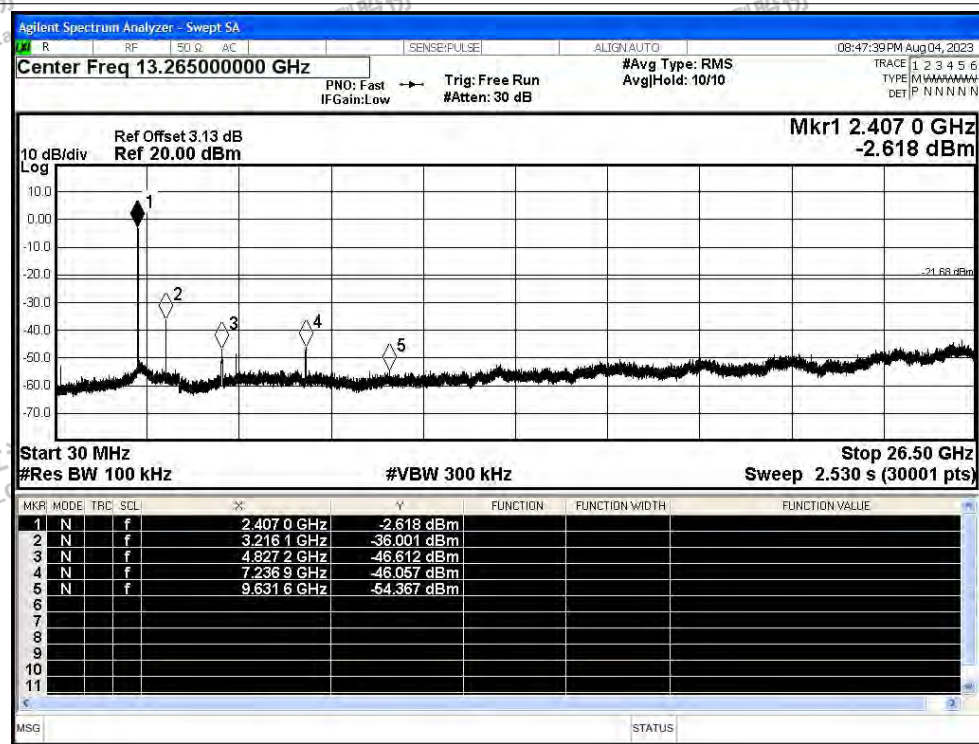




## Tx. Spurious NVNT n20 2437MHz Ant1 Ref

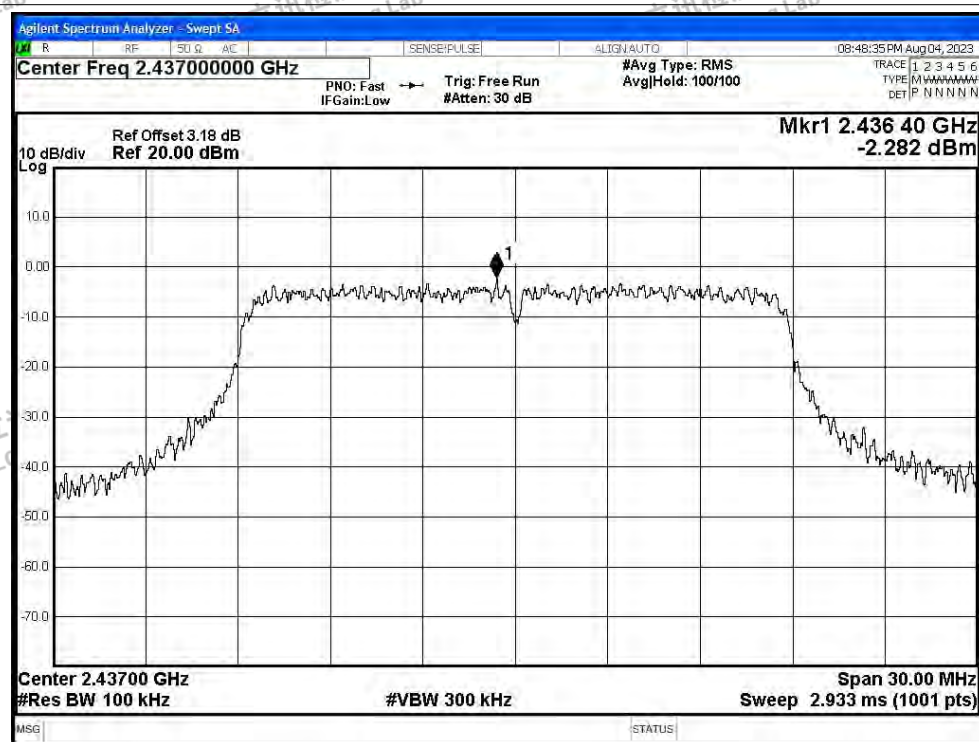


## Tx. Spurious NVNT n20 2437MHz Ant1 Emission

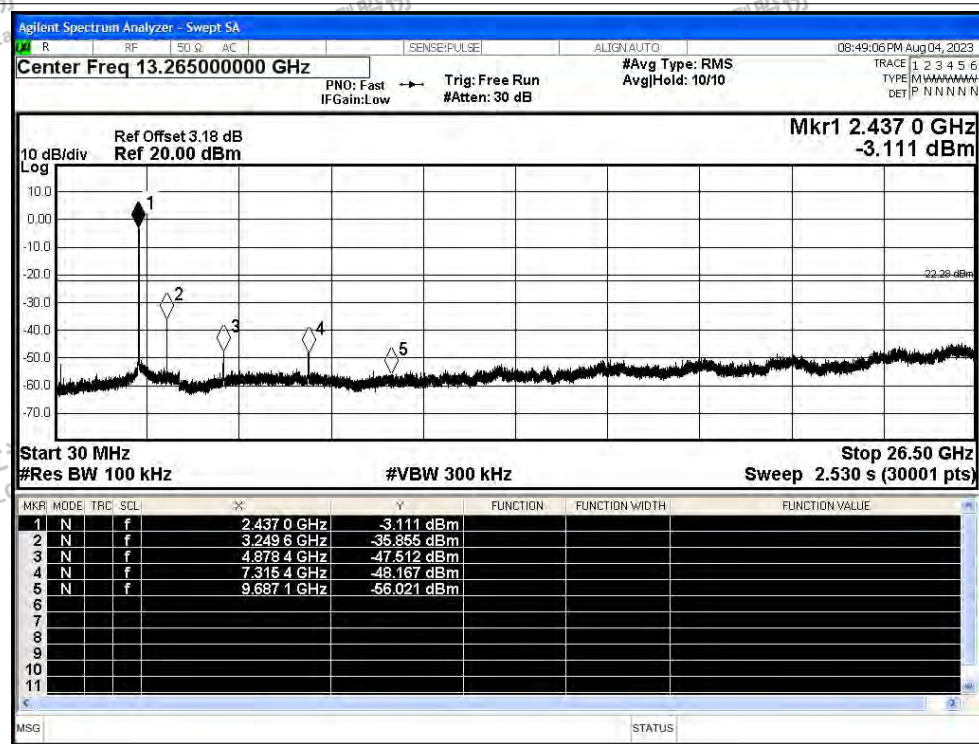




## Tx. Spurious NVNT n20 2462MHz Ant1 Ref

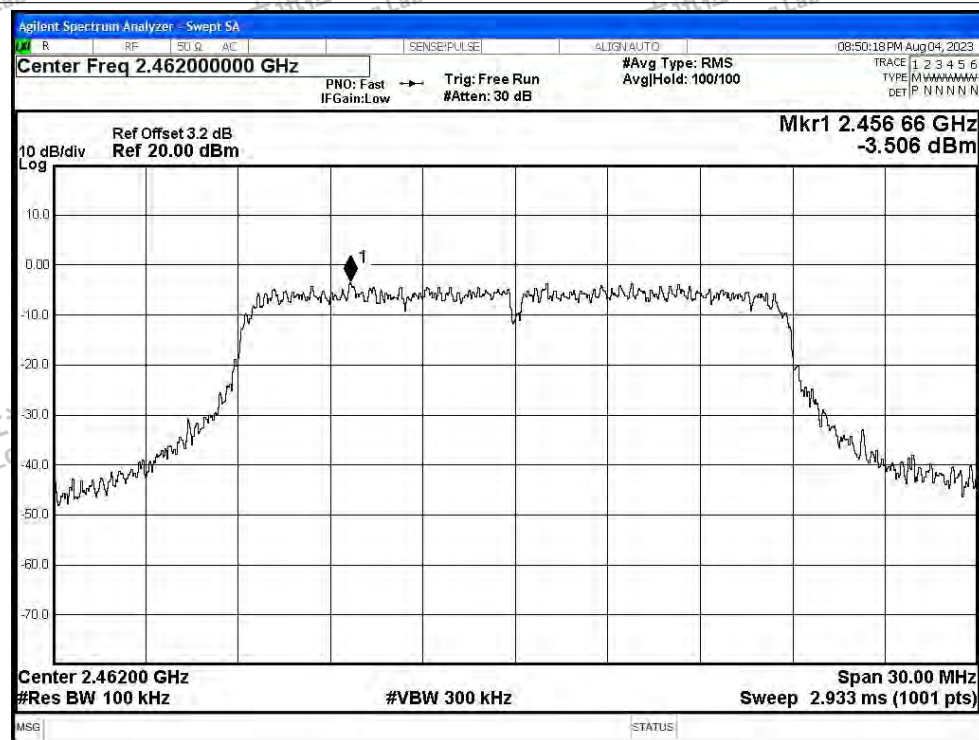

## Tx. Spurious NVNT n20 2462MHz Ant1 Emission

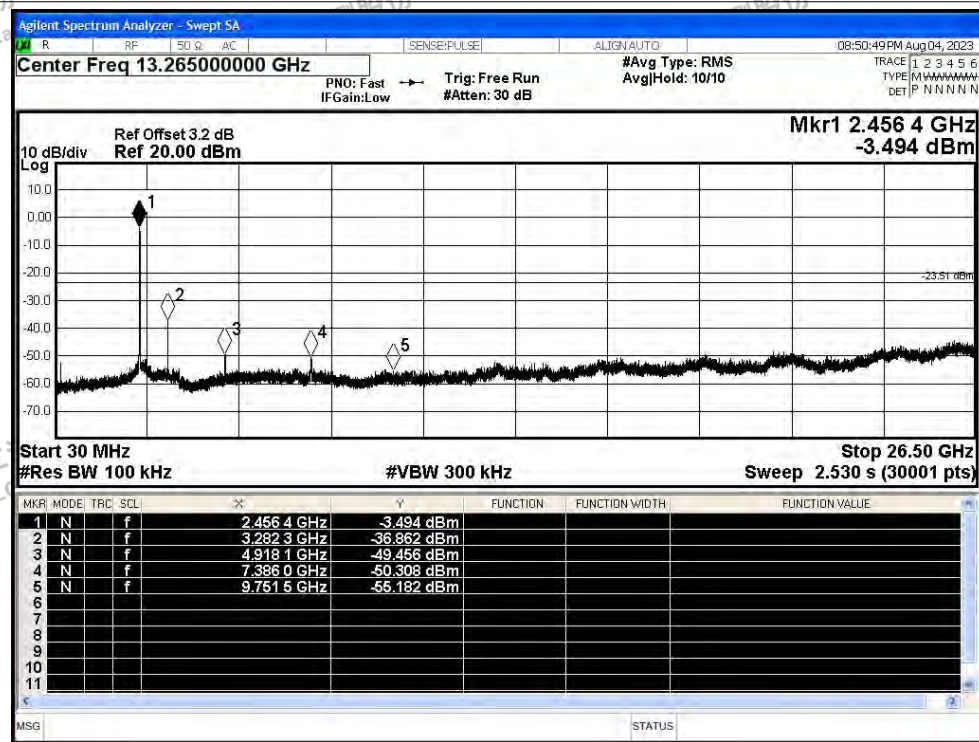



## B.6 Duty Cycle

| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | b    | 2412            | Ant1    | 100            | 0                      | 0         |
| NVNT      | b    | 2437            | Ant1    | 100            | 0                      | 0         |
| NVNT      | b    | 2462            | Ant1    | 100            | 0                      | 0         |
| NVNT      | g    | 2412            | Ant1    | 100            | 0                      | 0         |
| NVNT      | g    | 2437            | Ant1    | 100            | 0                      | 0         |
| NVNT      | g    | 2462            | Ant1    | 100            | 0                      | 0         |
| NVNT      | n20  | 2412            | Ant1    | 100            | 0                      | 0         |
| NVNT      | n20  | 2437            | Ant1    | 100            | 0                      | 0         |
| NVNT      | n20  | 2462            | Ant1    | 100            | 0                      | 0         |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

## Duty Cycle NVNT b 2412MHz Ant1

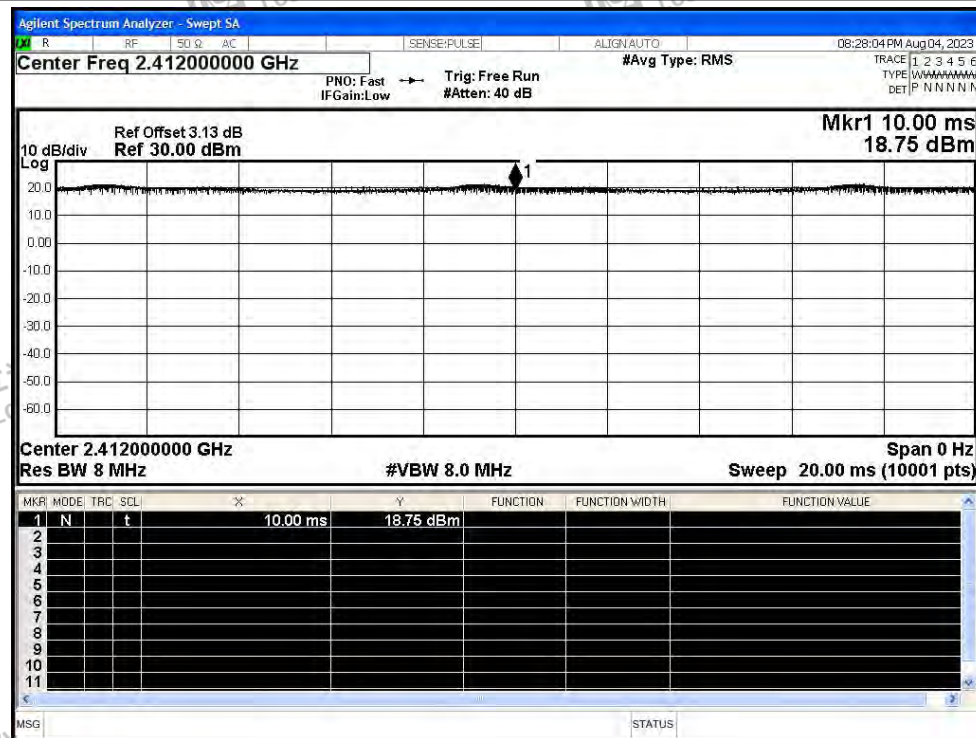


## Duty Cycle NVNT b 2437MHz Ant1

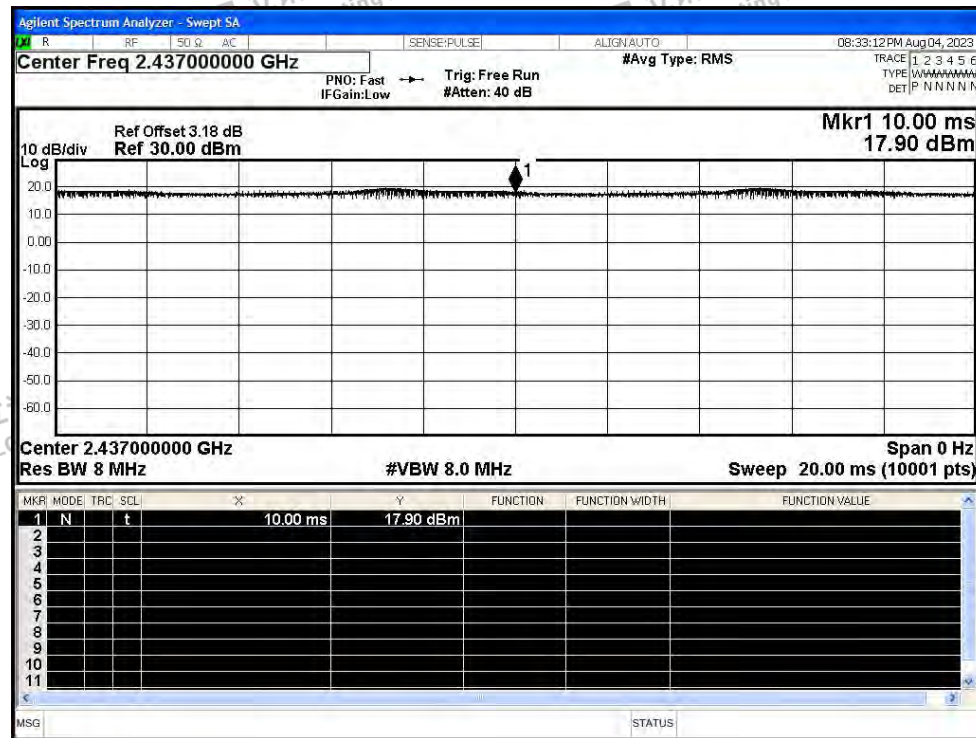




## Duty Cycle NVNT b 2462MHz Ant1

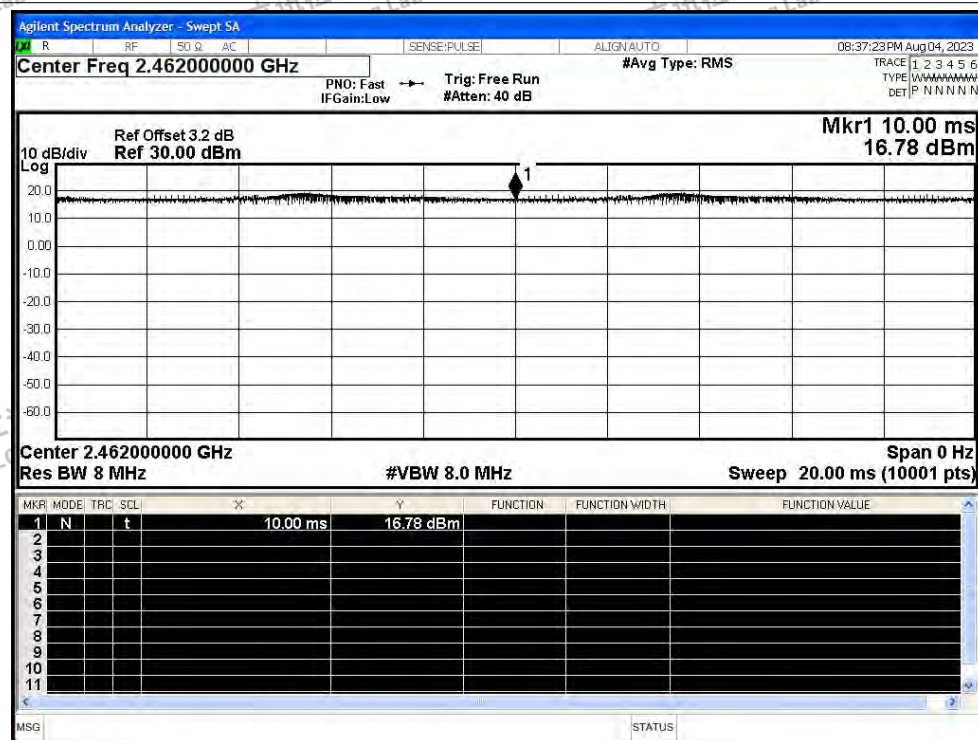


## Duty Cycle NVNT g 2412MHz Ant1

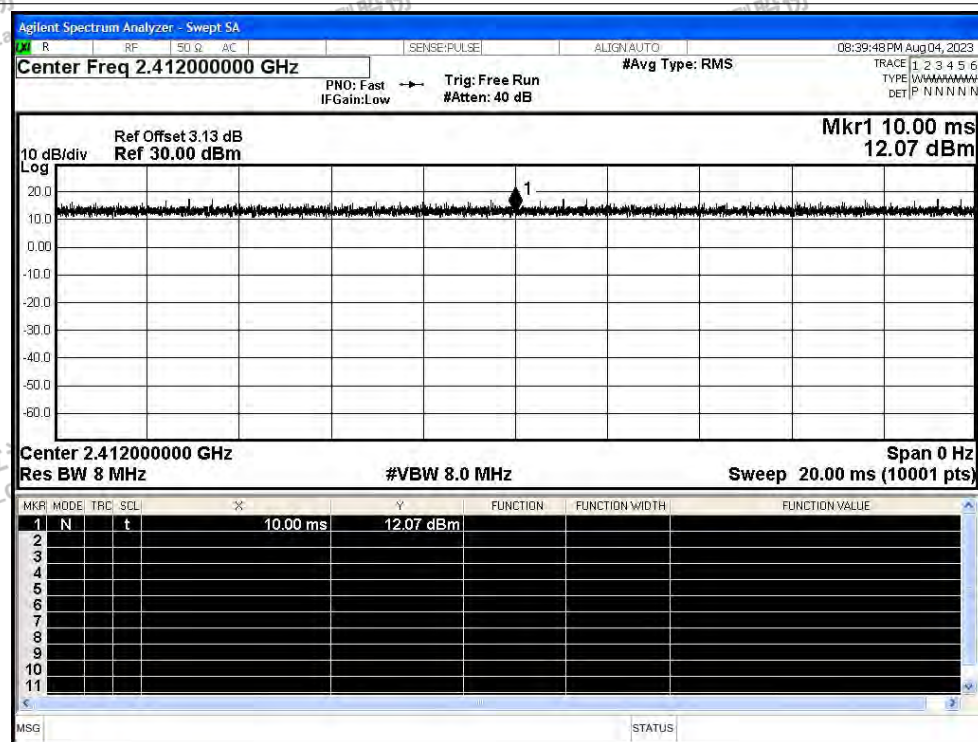




## Duty Cycle NVNT g 2437MHz Ant1

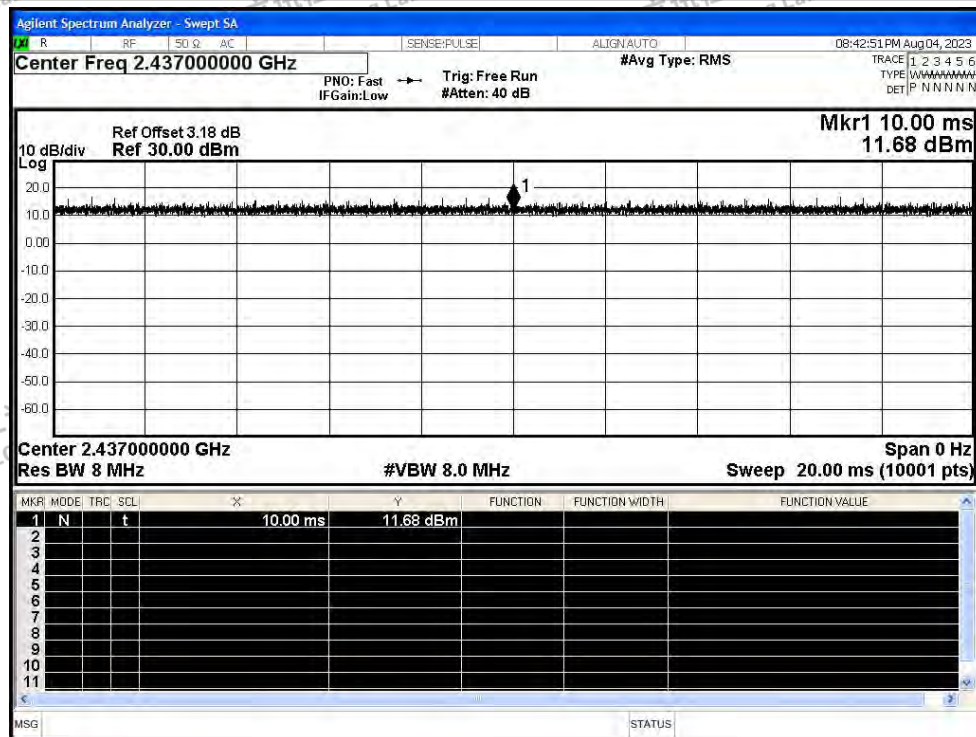


## Duty Cycle NVNT g 2462MHz Ant1

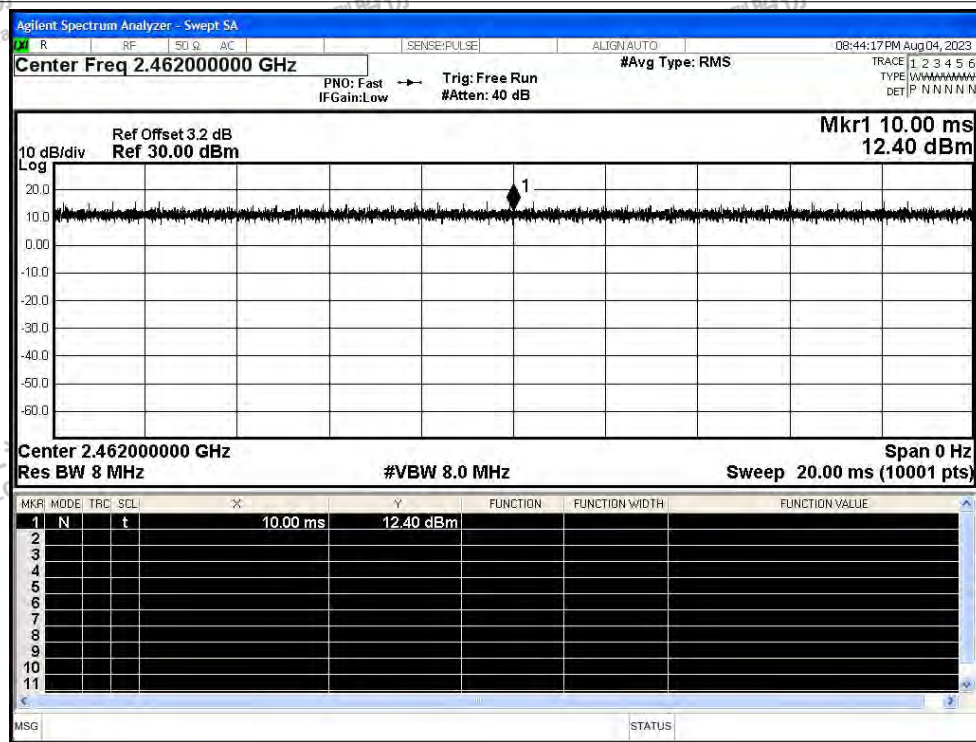





## Duty Cycle NVNT n20 2412MHz Ant1

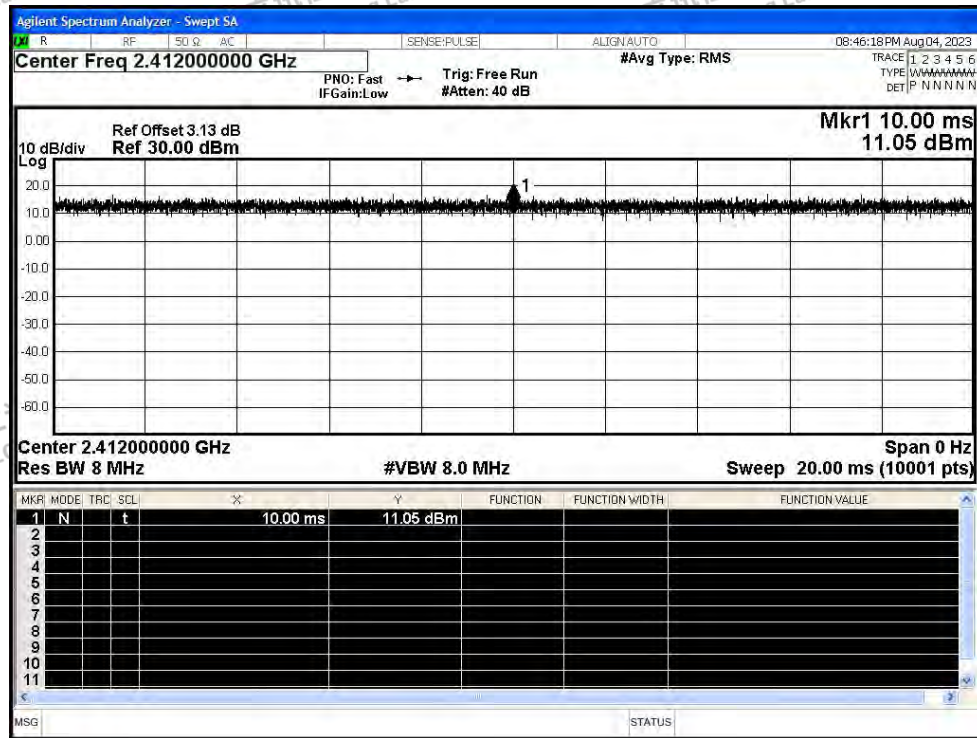

## Duty Cycle NVNT n20 2437MHz Ant1

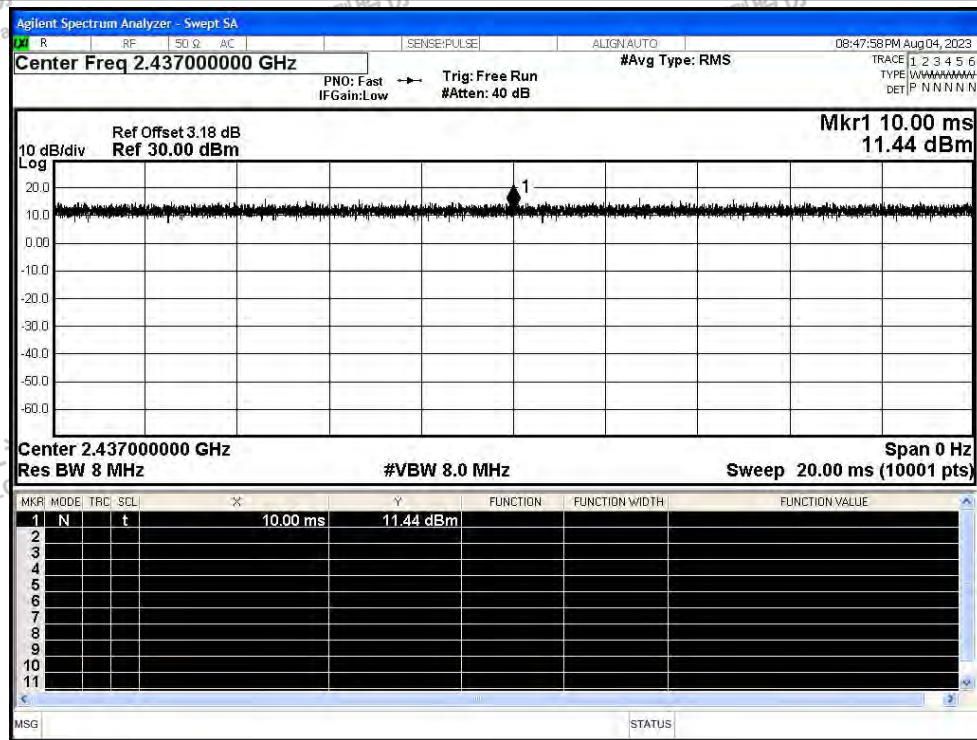

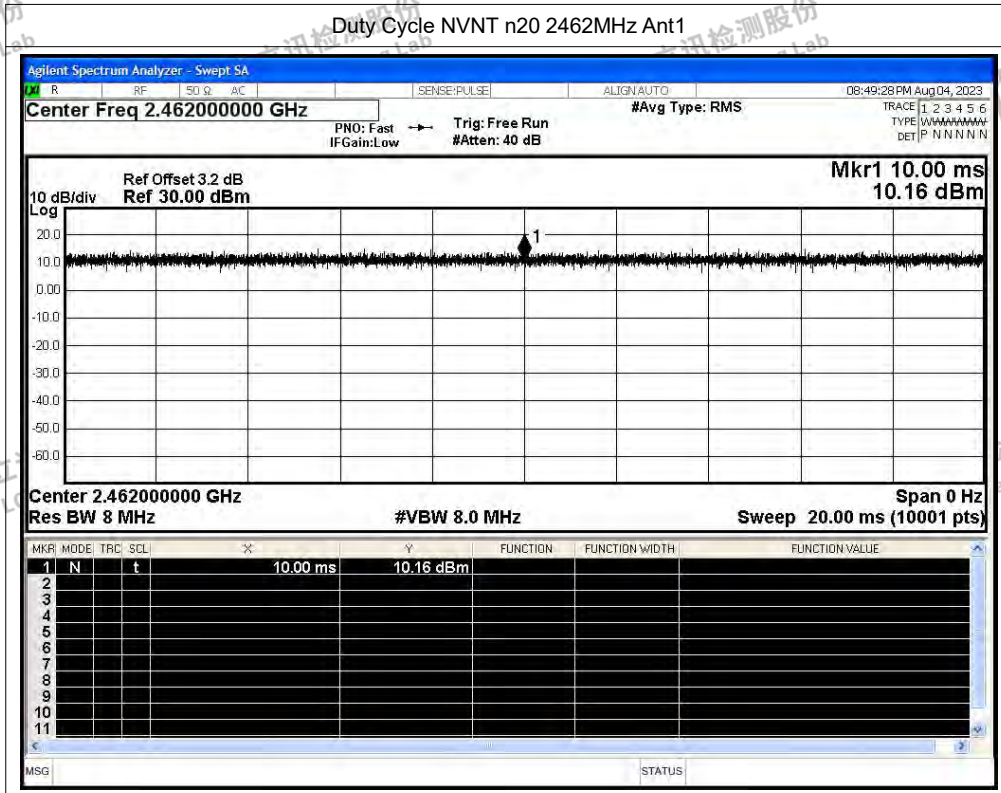



## B.7 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------|----------|----------------|---------|
| NVNT      | b    | 2412            | Ant1    | 2310            | -48.02      | 2          | 49.24      | Peak     | 74             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2310            | -54.63      | 2          | 42.63      | Average  | 54             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2386.284        | -41.29      | 2          | 55.97      | Peak     | 74             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2386.284        | -49.68      | 2          | 47.58      | Average  | 54             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2390            | -42.71      | 2          | 54.55      | Peak     | 74             | Pass    |
| NVNT      | b    | 2412            | Ant1    | 2390            | -50.97      | 2          | 46.29      | Average  | 54             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2483.5          | -43.5       | 2          | 53.76      | Peak     | 74             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2483.5          | -50.88      | 2          | 46.38      | Average  | 54             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2485.107        | -40.96      | 2          | 56.3       | Peak     | 74             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2483.517        | -50.88      | 2          | 46.38      | Average  | 54             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2500            | -43.22      | 2          | 54.04      | Peak     | 74             | Pass    |
| NVNT      | b    | 2462            | Ant1    | 2500            | -51.72      | 2          | 45.54      | Average  | 54             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2310            | -48.02      | 2          | 49.24      | Peak     | 74             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2310            | -54.28      | 2          | 42.98      | Average  | 54             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2389.677        | -38.71      | 2          | 58.55      | Peak     | 74             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2389.911        | -48.64      | 2          | 48.62      | Average  | 54             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2390            | -40.42      | 2          | 56.84      | Peak     | 74             | Pass    |
| NVNT      | g    | 2412            | Ant1    | 2390            | -48.27      | 2          | 48.99      | Average  | 54             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2483.5          | -40.76      | 2          | 56.5       | Peak     | 74             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2483.5          | -47.88      | 2          | 49.38      | Average  | 54             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2483.729        | -38.13      | 2          | 59.13      | Peak     | 74             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2483.517        | -47.88      | 2          | 49.38      | Average  | 54             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2500            | -45.15      | 2          | 52.11      | Peak     | 74             | Pass    |
| NVNT      | g    | 2462            | Ant1    | 2500            | -51.49      | 2          | 45.77      | Average  | 54             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2310            | -47.97      | 2          | 49.29      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2310            | -54.27      | 2          | 42.99      | Average  | 54             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2389.092        | -37.52      | 2          | 59.74      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2389.911        | -47.26      | 2          | 50         | Average  | 54             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2390            | -36.73      | 2          | 60.53      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2412            | Ant1    | 2390            | -47.13      | 2          | 50.13      | Average  | 54             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2483.5          | -37.13      | 2          | 60.13      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2483.5          | -46.88      | 2          | 50.38      | Average  | 54             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2483.676        | -36.29      | 2          | 60.97      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2483.517        | -46.88      | 2          | 50.38      | Average  | 54             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2500            | -44.7       | 2          | 52.56      | Peak     | 74             | Pass    |
| NVNT      | n20  | 2462            | Ant1    | 2500            | -51.48      | 2          | 45.78      | Average  | 54             | Pass    |




Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity




## Test Graphs

## Restrict Band NVNT b 2412MHz Ant1 Peak

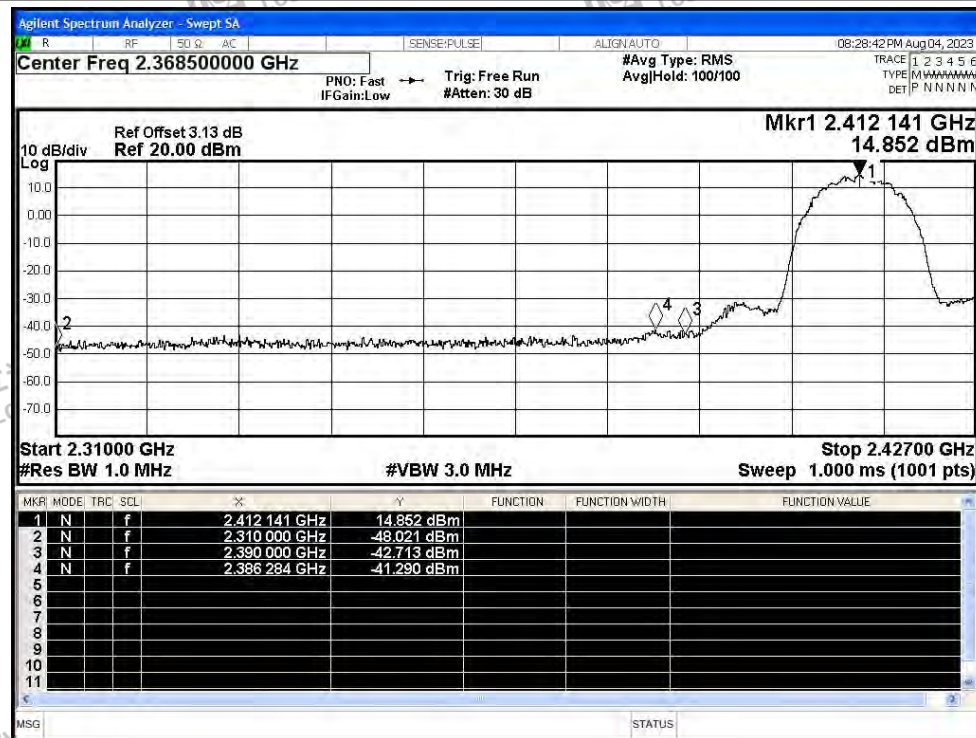

## Restrict Band NVNT b 2412MHz Ant1 Average

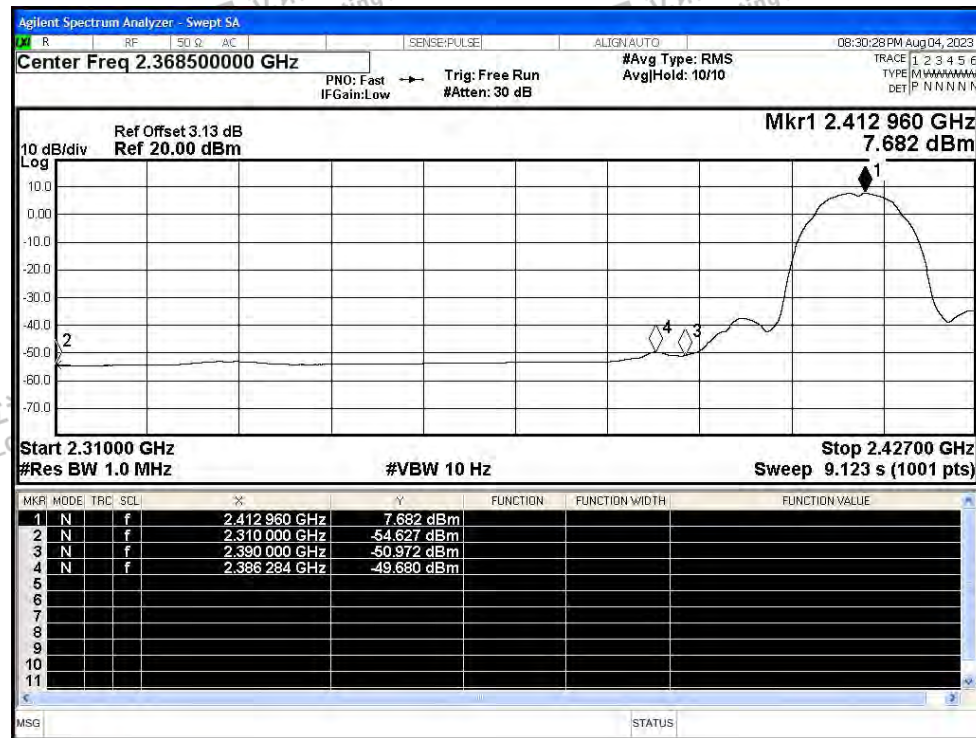

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT b 2462MHz Ant1 Peak

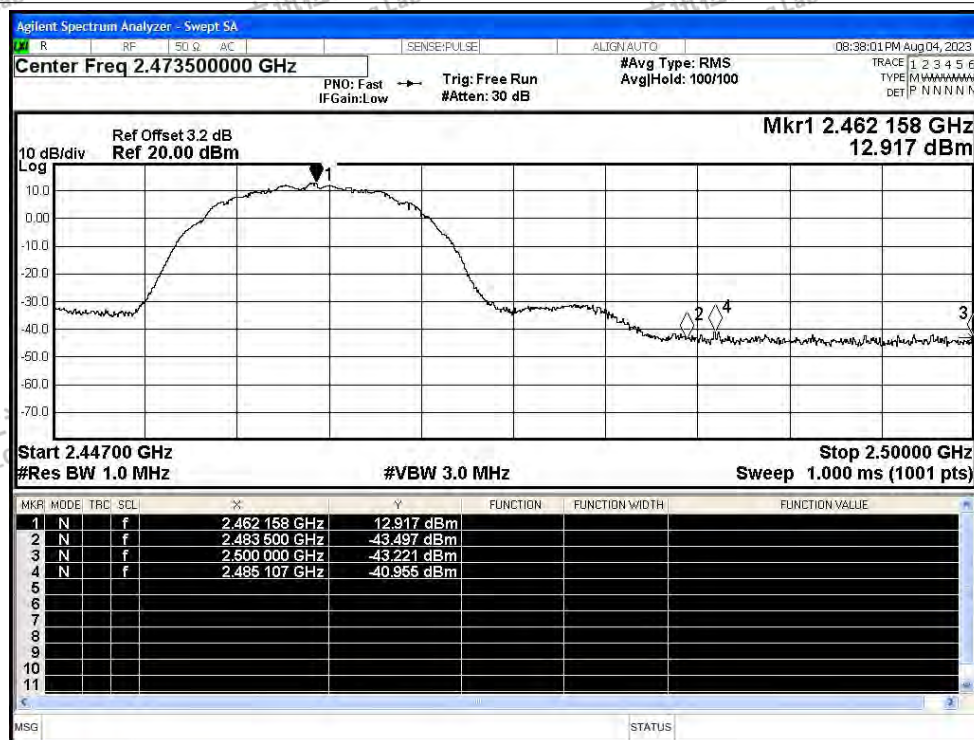


## Restrict Band NVNT b 2462MHz Ant1 Average

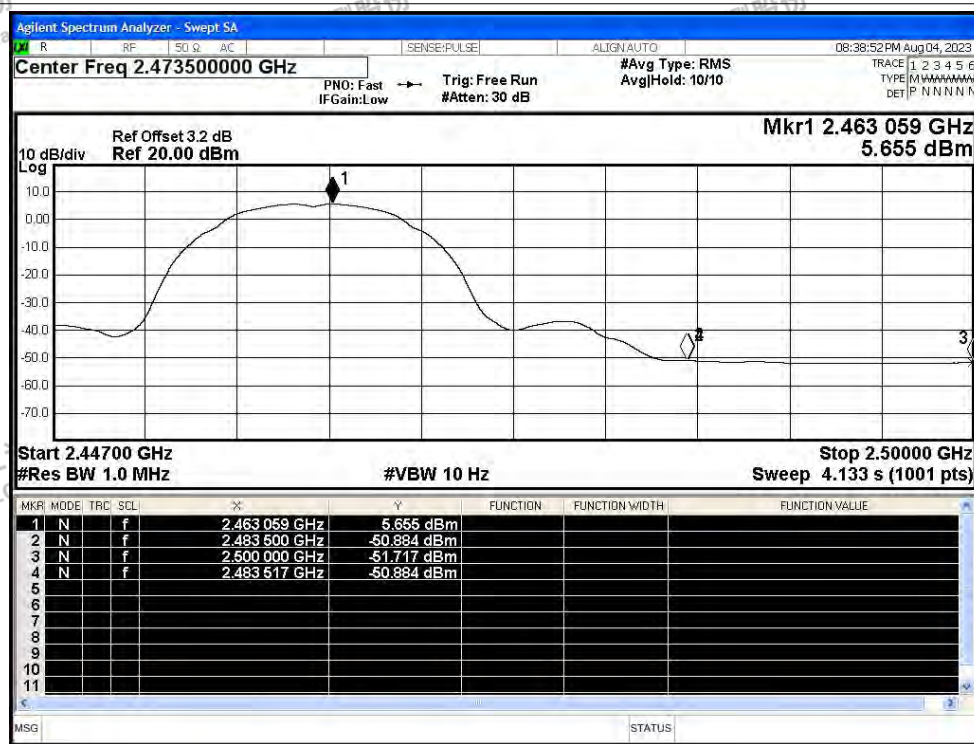




## Restrict Band NVNT g 2412MHz Ant1 Peak

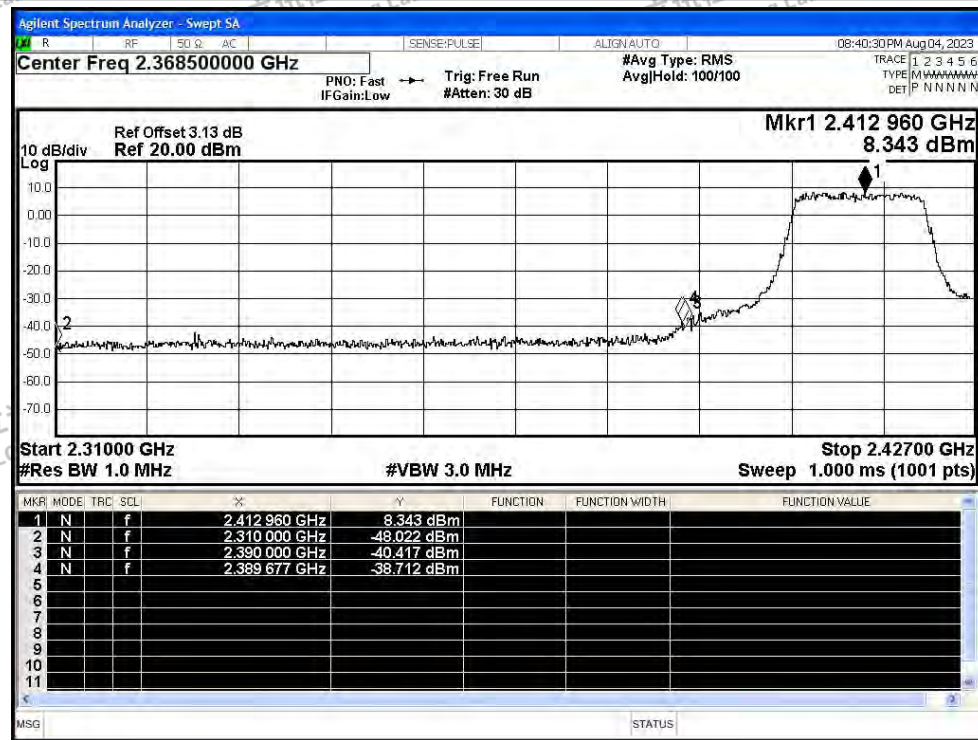


## Restrict Band NVNT g 2412MHz Ant1 Average

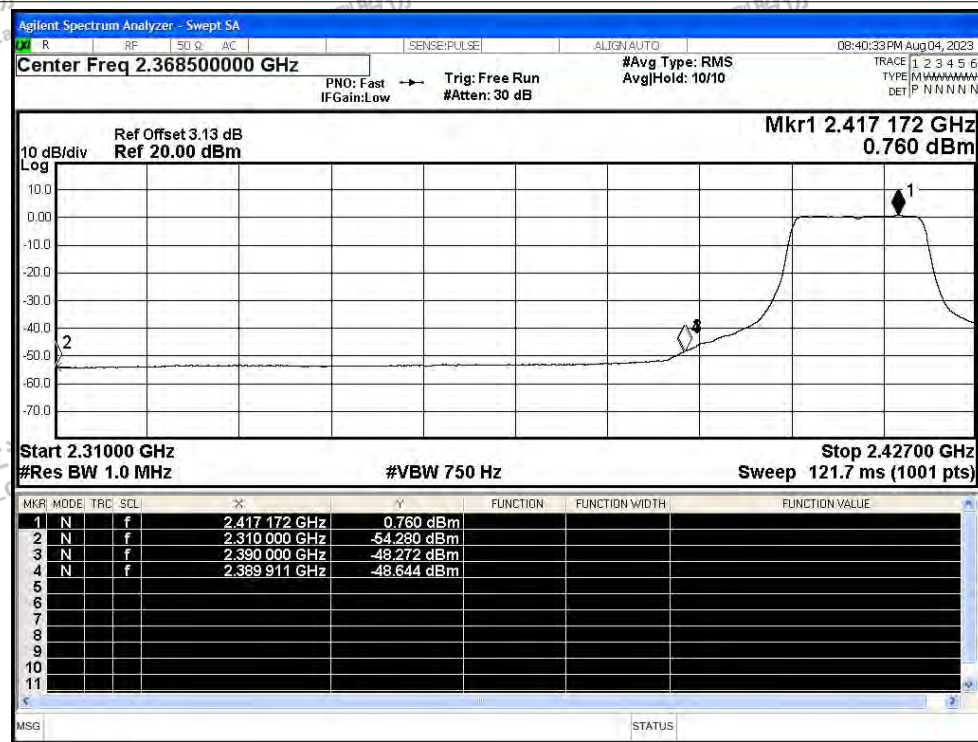




## Restrict Band NVNT g 2462MHz Ant1 Peak

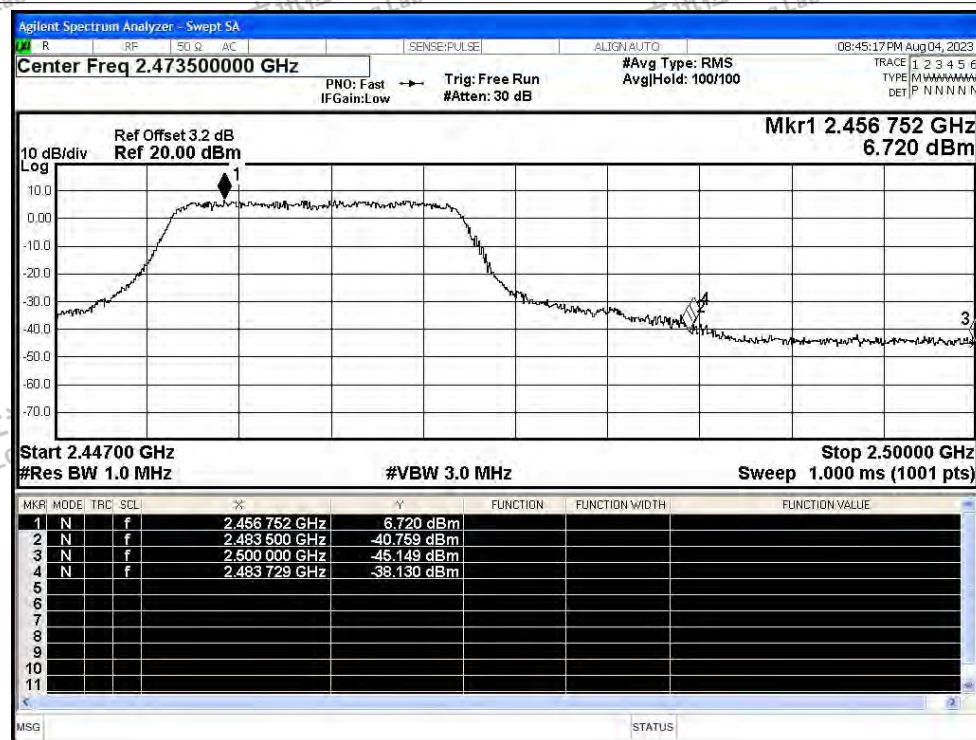


## Restrict Band NVNT g 2462MHz Ant1 Average

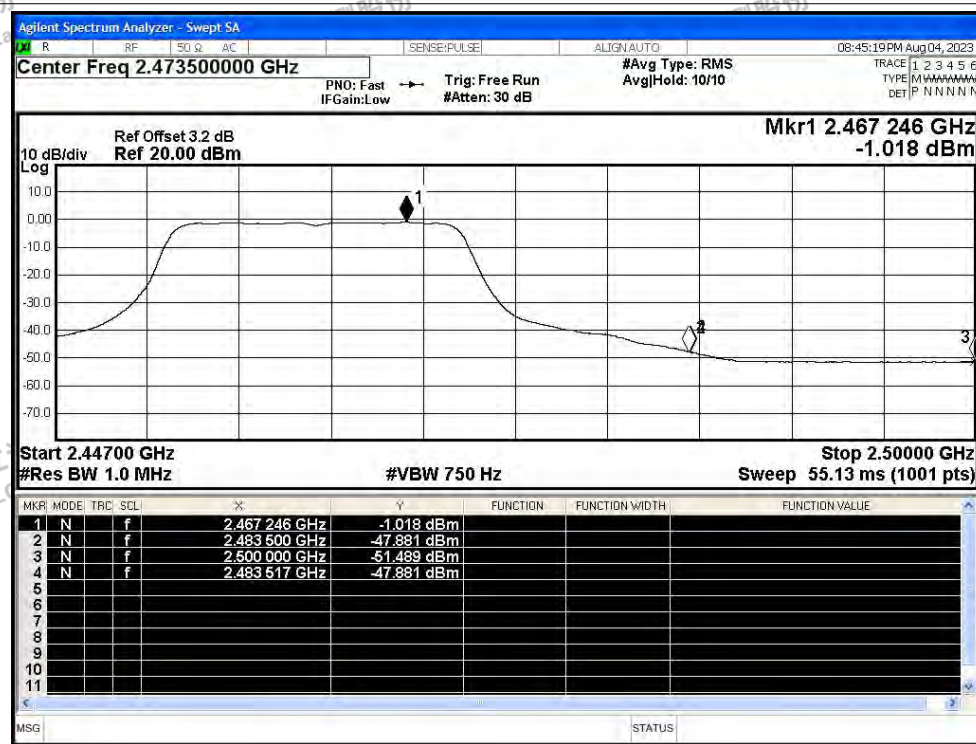




## Restrict Band NVNT n20 2412MHz Ant1 Peak

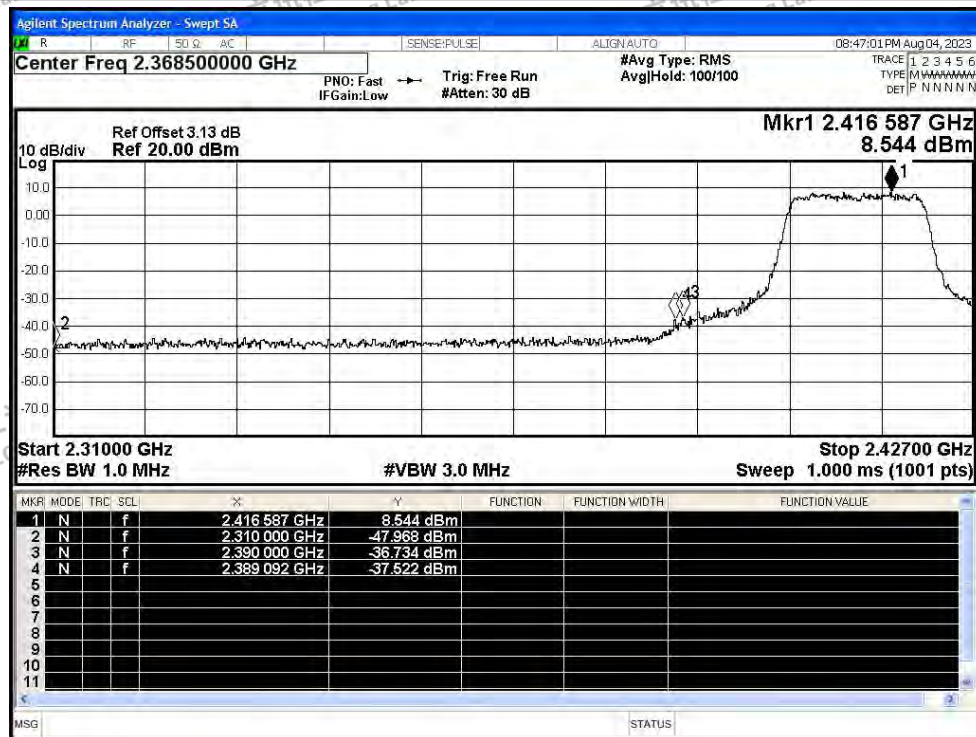

## Restrict Band NVNT n20 2412MHz Ant1 Average

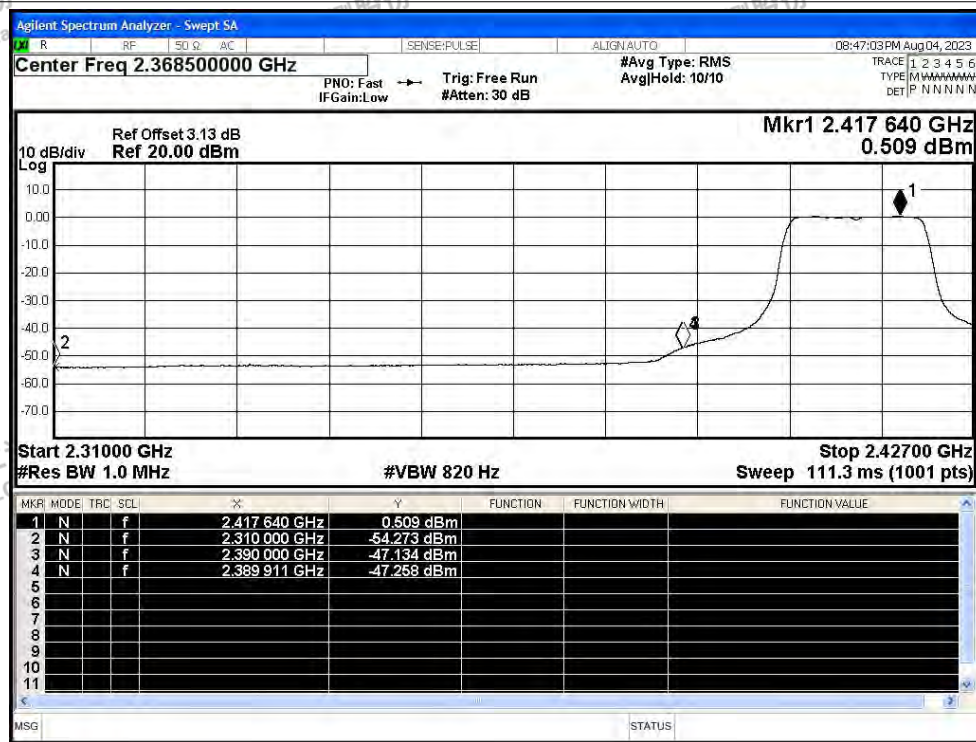

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 2462MHz Ant1 Peak

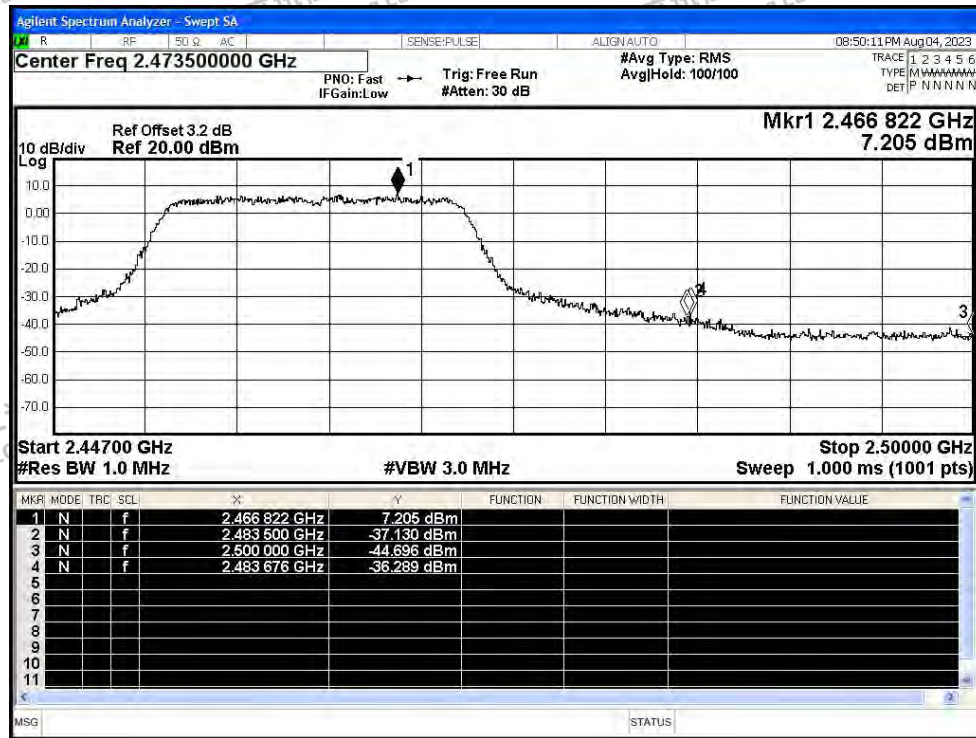

## Restrict Band NVNT n20 2462MHz Ant1 Average

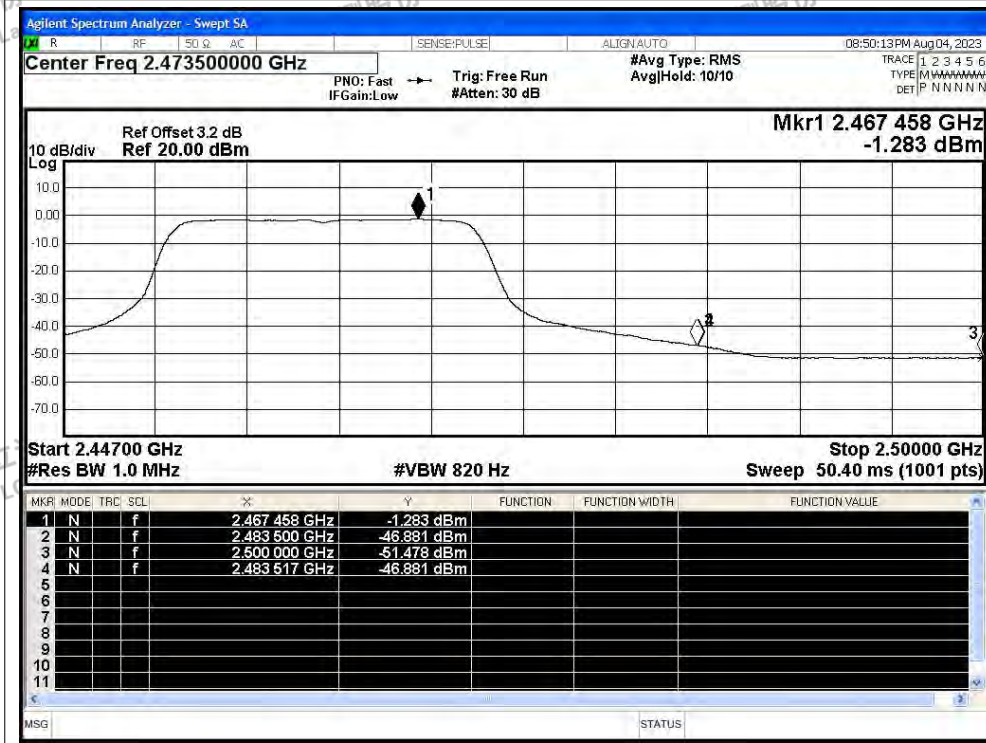

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity