

# TEST REPORT

Report No.: **BCTC2203629740E**

---

Applicant: **SHENZHEN HOBK ELECTRONIC TECHNOLOGY CO., LTD**

---

Product Name: **RFID CARD**

---

Model/Type  
reference: **HBK-C03B**

---

Tested Date: **2022-02-19 to 2022-02-23**

---

Issued Date: **2022-03-03**


---



# FCC ID: 2A4H6HBK-C03B

Product Name: RFID CARD  
Trademark: UHPPOTE  
Model /Type Ref.: HBK-C03B  
HBK-C03H, HBK-C03P, HBK-C03R, HBK-C03Y, HBK-C03GR, HBK-C03O,  
HBK-C03GA, HBK-C04  
Prepared For: SHENZHEN HOBK EIECTRONIC TECHNOLOGY CO., LTD  
Address: RM12C, BLDG6, North Area of Manhaining, Longping Community, Dalang  
Subdistrict, Longhua District, Shenzhen  
Manufacturer: SHENZHEN HOBK EIECTRONIC TECHNOLOGY CO., LTD  
Address: RM12C, BLDG6, North Area of Manhaining, Longping Community, Dalang  
Subdistrict, Longhua District, Shenzhen  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei,  
Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: 2022-02-19  
Sample tested Date: 2022-02-19 to 2022-02-23  
Issue Date: 2022-03-03  
Report No.: BCTC2202812460E  
Test Standards: FCC Part 15B  
ANSI C63.4:2014  
Test Results: PASS

Tested by:

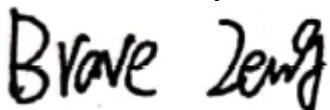

Brave Zeng/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table Of Content

	Page
Test Report Declaration	
1. Version .....	4
2. Test Summary .....	5
3. Measurement Uncertainty.....	6
4. Product Information And Test Setup.....	7
4.1 Product Information .....	7
4.2 Test Setup Configuration .....	7
4.3 Support Equipment.....	7
4.4 Test Mode.....	8
5. Test Facility And Test Instrument Used .....	9
5.1 Test Facility .....	9
5.2 Test Instrument Used .....	9
6. Radiation Emission Test .....	10
6.1 Block Diagram Of Test Setup .....	10
6.2 Limit .....	10
6.3 Test Procedure.....	11
6.4 Test Result .....	12
7. EUT Photographs .....	14
8. EUT Test Setup Photographs.....	20

(Note: N/A Means Not Applicable)

## 1. Version

Report No.	Issue Date	Description	Approved
BCTC2203629740E	2022-03-03	Original	Valid

## 2. Test Summary

The Product has been tested according to the following specifications:

Standard	Test Item	Test result
FCC 15.107	Conducted Emission	N/A
FCC 15.109	Radiated Emission	Pass

### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Value (dB)
Conducted Emission (150kHz-30MHz)	3.20
Radiated Emission(30MHz~1GHz)	4.80
Radiated Emission(1GHz~6GHz)	4.90

## 4. Product Information And Test Setup

### 4.1 Product Information

**Ratings:**

DC 12V from Adapter

**Model differences:**

All models are identical except for the appearance color, the test model is HBK-C03B and the test results are applicable to other tests.

**The highest frequency of the internal sources of the EUT is (less than 108)MHz:**

less than 1.705 MHz, the measurement shall only be made up to 30 MHz.  
 between 1.705 MHz and 108 MHz, the measurement shall only be made up to 1 GHz.  
 between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz.  
 between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz.  
 above 1 GHz, the measurement shall be made up to 5 times the highest frequency or 40GHz, whichever is less.

#### Cable of Product

No.	Cable Type	Quantity	Provider	Length (m)	Shielded	Note
1	--	--	Applicant	---	Yes/No	With a ferrite ring in mid Detachable
2	--	--	BCTC	--	Yes/No	--

### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

### 4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Adapter	N/A	BCTC001	N/A	Auxiliary
E-2	Remote Control	UHPPOTE	HOBK	HBK-R01	Auxiliary

**Notes:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Test Mode

Test item	Test Mode	Test Voltage
Radiated emission(30MHz-1GHz) Class B	Working	DC 12V from Adapter

## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.


### 5.2 Test Instrument Used

Radiated Emissions Test (966 Chamber#01)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESRP	101154	May 28, 2021	May 27, 2022
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 28, 2021	May 27, 2022
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 28, 2021	May 27, 2022
TRILOG Broadband Antenna	schwarzbeck	VULB9163	942	Jun. 01, 2021	May 31, 2022
Horn Antenna	schwarzbeck	BBHA9120D	1541	Jun. 02, 2021	Jun. 01, 2022
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

## 6. Radiation Emission Test

### 6.1 Block Diagram Of Test Setup

30MHz ~ 1GHz:

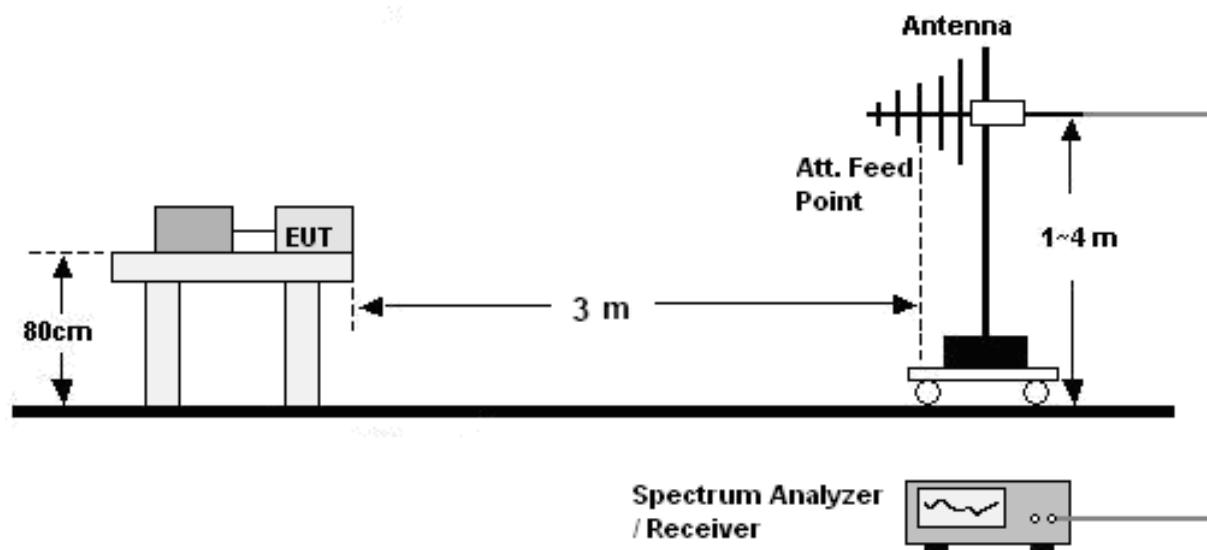

### 6.2 Limit

**Limits for Class B devices**

Frequency (MHz)	limits at 3m dB( $\mu$ V/m)		
	QP Detector	PK Detector	AV Detector
30-88	40.0	--	--
88-216	43.5	--	--
216-960	46.0	--	--
960 to 1000	54.0	--	--
Above 1000	--	74.0	54.0

**Note:** The lower limit shall apply at the transition frequencies.

### 6.3 Test Procedure

#### **30MHz ~ 1GHz:**

- a. The Product was placed on the nonconductive turntable 0.8 m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

## 6.4 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Voltage :	DC 12V from Adapter	Test Mode:	Working




### Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over+ Measurement-Limit

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dB/m	dB
1		55.2207	34.42	-15.73	18.69	40.00	-21.31 QP
2	*	84.4054	52.64	-19.64	33.00	40.00	-7.00 QP
3		187.0958	46.56	-16.49	30.07	43.50	-13.43 QP
4		235.8164	40.58	-14.88	25.70	46.00	-20.30 QP
5		434.0651	37.64	-9.98	27.66	46.00	-18.34 QP
6		900.1474	34.80	0.46	35.26	46.00	-10.74 QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Voltage :	DC 12V from Adapter	Test Mode:	Working

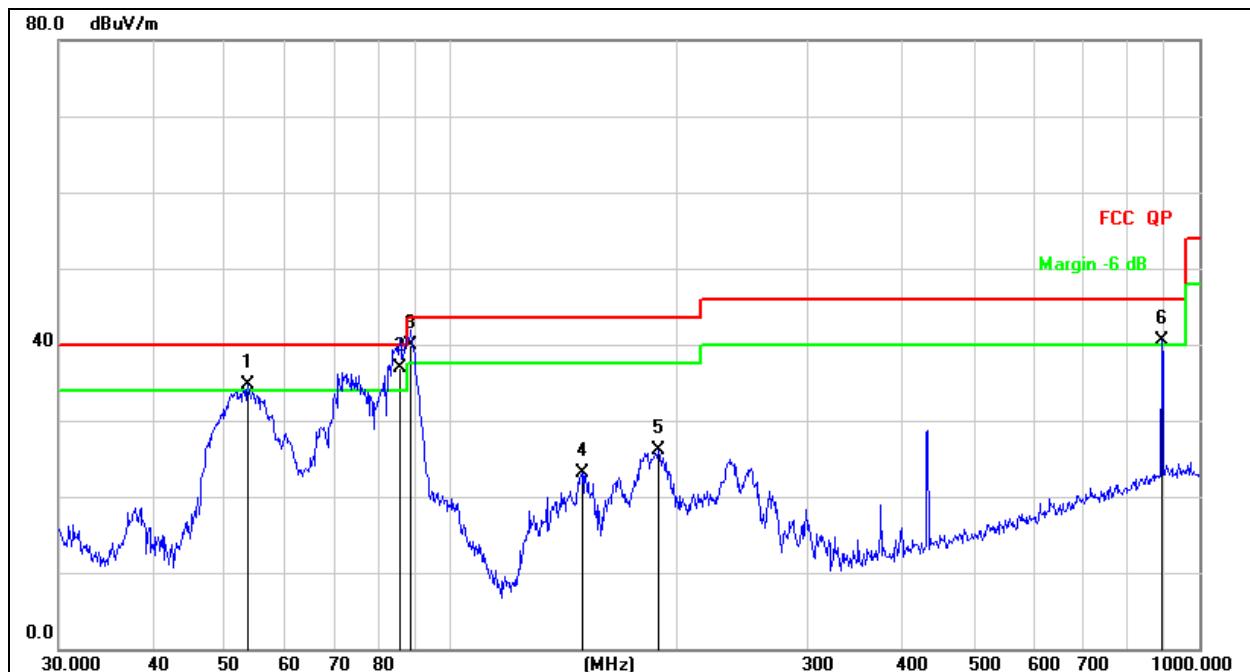
**Remark:**

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement=Reading Level+ Correct Factor
3. Over+ Measurement-Limit

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	!	53.6932	50.37	-15.64	34.73	40.00	-5.27	QP
2	*	85.5977	56.45	-19.45	37.00	40.00	-3.00	QP
3	!	88.6524	58.82	-18.96	39.86	43.50	-3.64	QP
4		150.0108	42.68	-19.49	23.19	43.50	-20.31	QP
5		189.7385	42.46	-16.28	26.18	43.50	-17.32	QP
6	!	890.7278	40.32	0.23	40.55	46.00	-5.45	QP

## 7. EUT Photographs

**EUT Photo 1**




**EUT Photo 2**



**EUT Photo 3****EUT Photo 4**

**EUT Photo 5****EUT Photo 6**


**EUT Photo 7****EUT Photo 8**

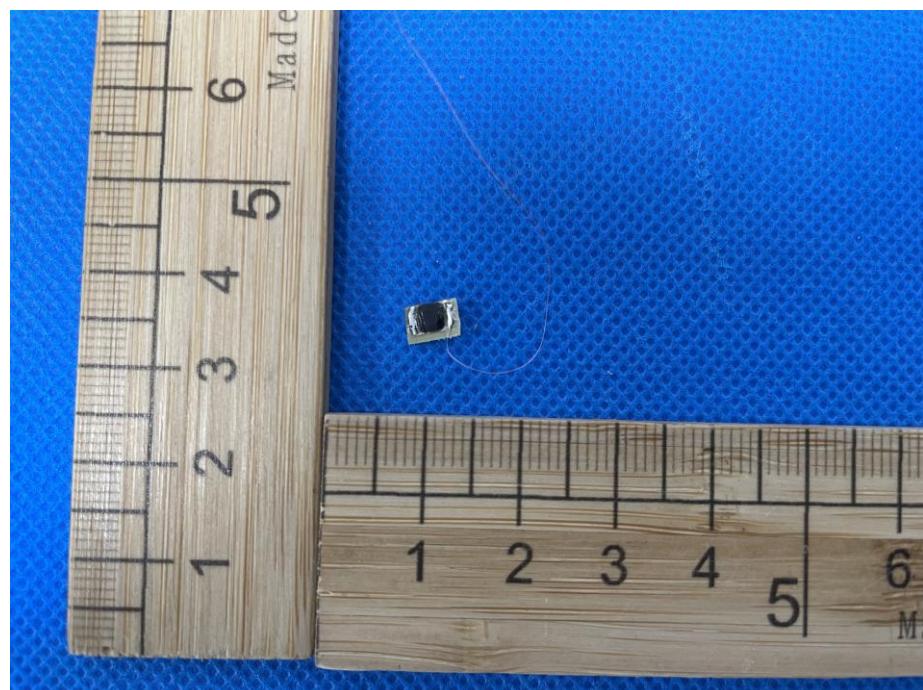**EUT Photo 9****EUT Photo 10**

**EUT Photo 11**

## 8. EUT Test Setup Photographs

### Radiated emissions

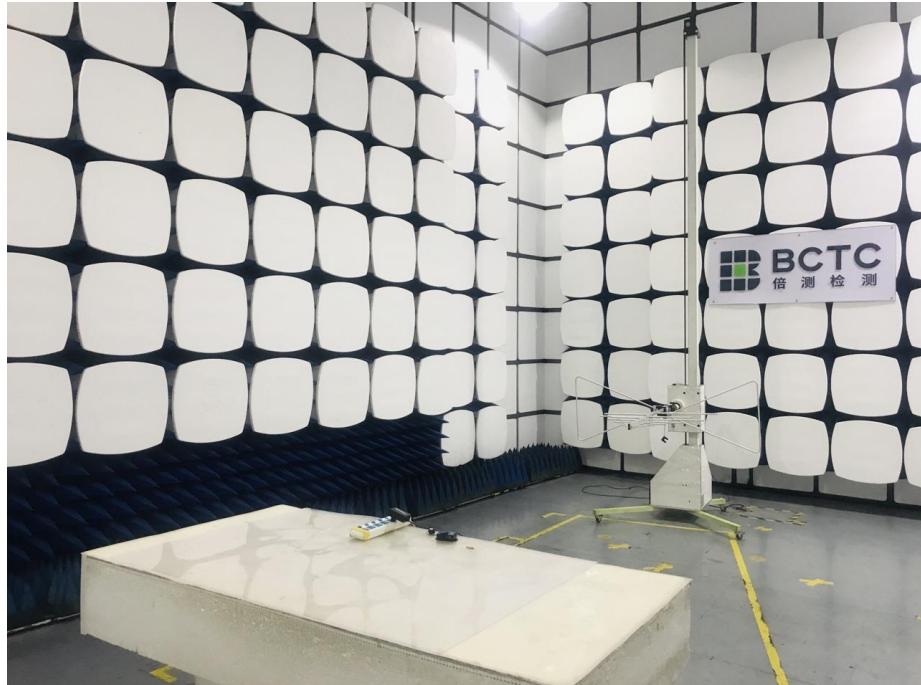

## STATEMENT

The equipment lists are traceable to the national reference standards.

The test report can not be partially copied unless prior written approval is issued from our lab.

The test report is invalid without stamp of laboratory.

The test report is invalid without signature of person(s) testing and authorizing.

The test process and test result is only related to the Unit Under Test.

The quality system of our laboratory is in accordance with ISO/IEC17025.

If there is any objection to report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

Address:

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

E-Mail: [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

\*\*\*\*\* END \*\*\*\*\*