


Appendix A. Test Result of AC Power Line Conducted Emission

<

Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
		Ant. 1		
GFSK (1 Mbps)	2402	0.72	0.50	Pass
	2440	0.72	0.50	Pass
	2480	0.71	0.50	Pass
GFSK (2 Mbps)	2402	1.16	0.50	Pass
	2440	1.16	0.50	Pass
	2480	1.16	0.50	Pass

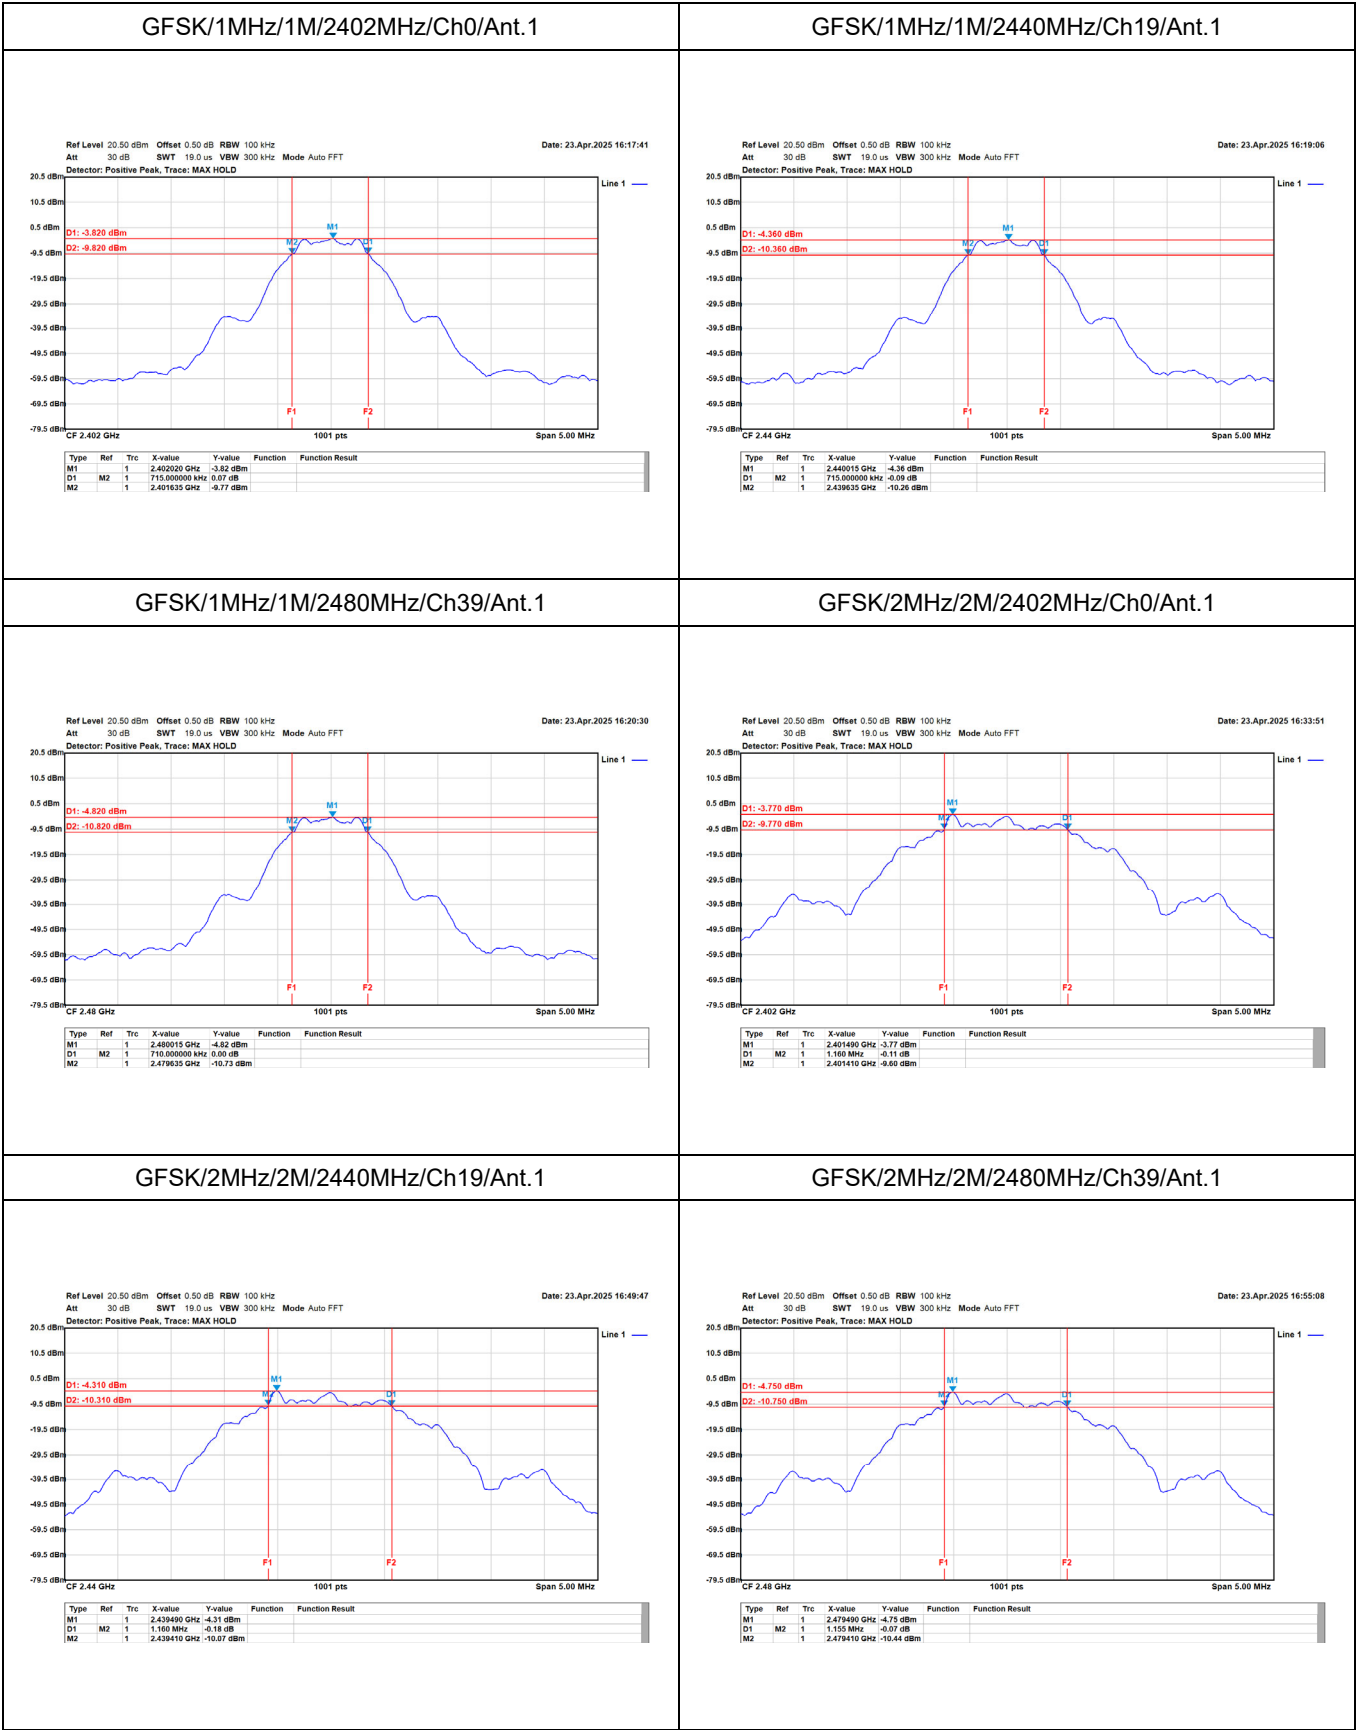


Appendix C. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
		Ant. 1		
GFSK (1 Mbps)	2402	-1.60	30.00	Pass
	2440	-1.89	30.00	Pass
	2480	-2.15	30.00	Pass
GFSK (2 Mbps)	2402	-1.50	30.00	Pass
	2440	-1.84	30.00	Pass
	2480	-2.10	30.00	Pass


Appendix D. Test Result of Power Spectral Density

Modulation	Frequency (MHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
		Ant. 1		
GFSK (1 Mbps)	2402	-19.05	8.00	Pass
	2440	-19.60	8.00	Pass
	2480	-20.09	8.00	Pass
GFSK (2 Mbps)	2402	-22.21	8.00	Pass
	2440	-22.75	8.00	Pass
	2480	-23.24	8.00	Pass

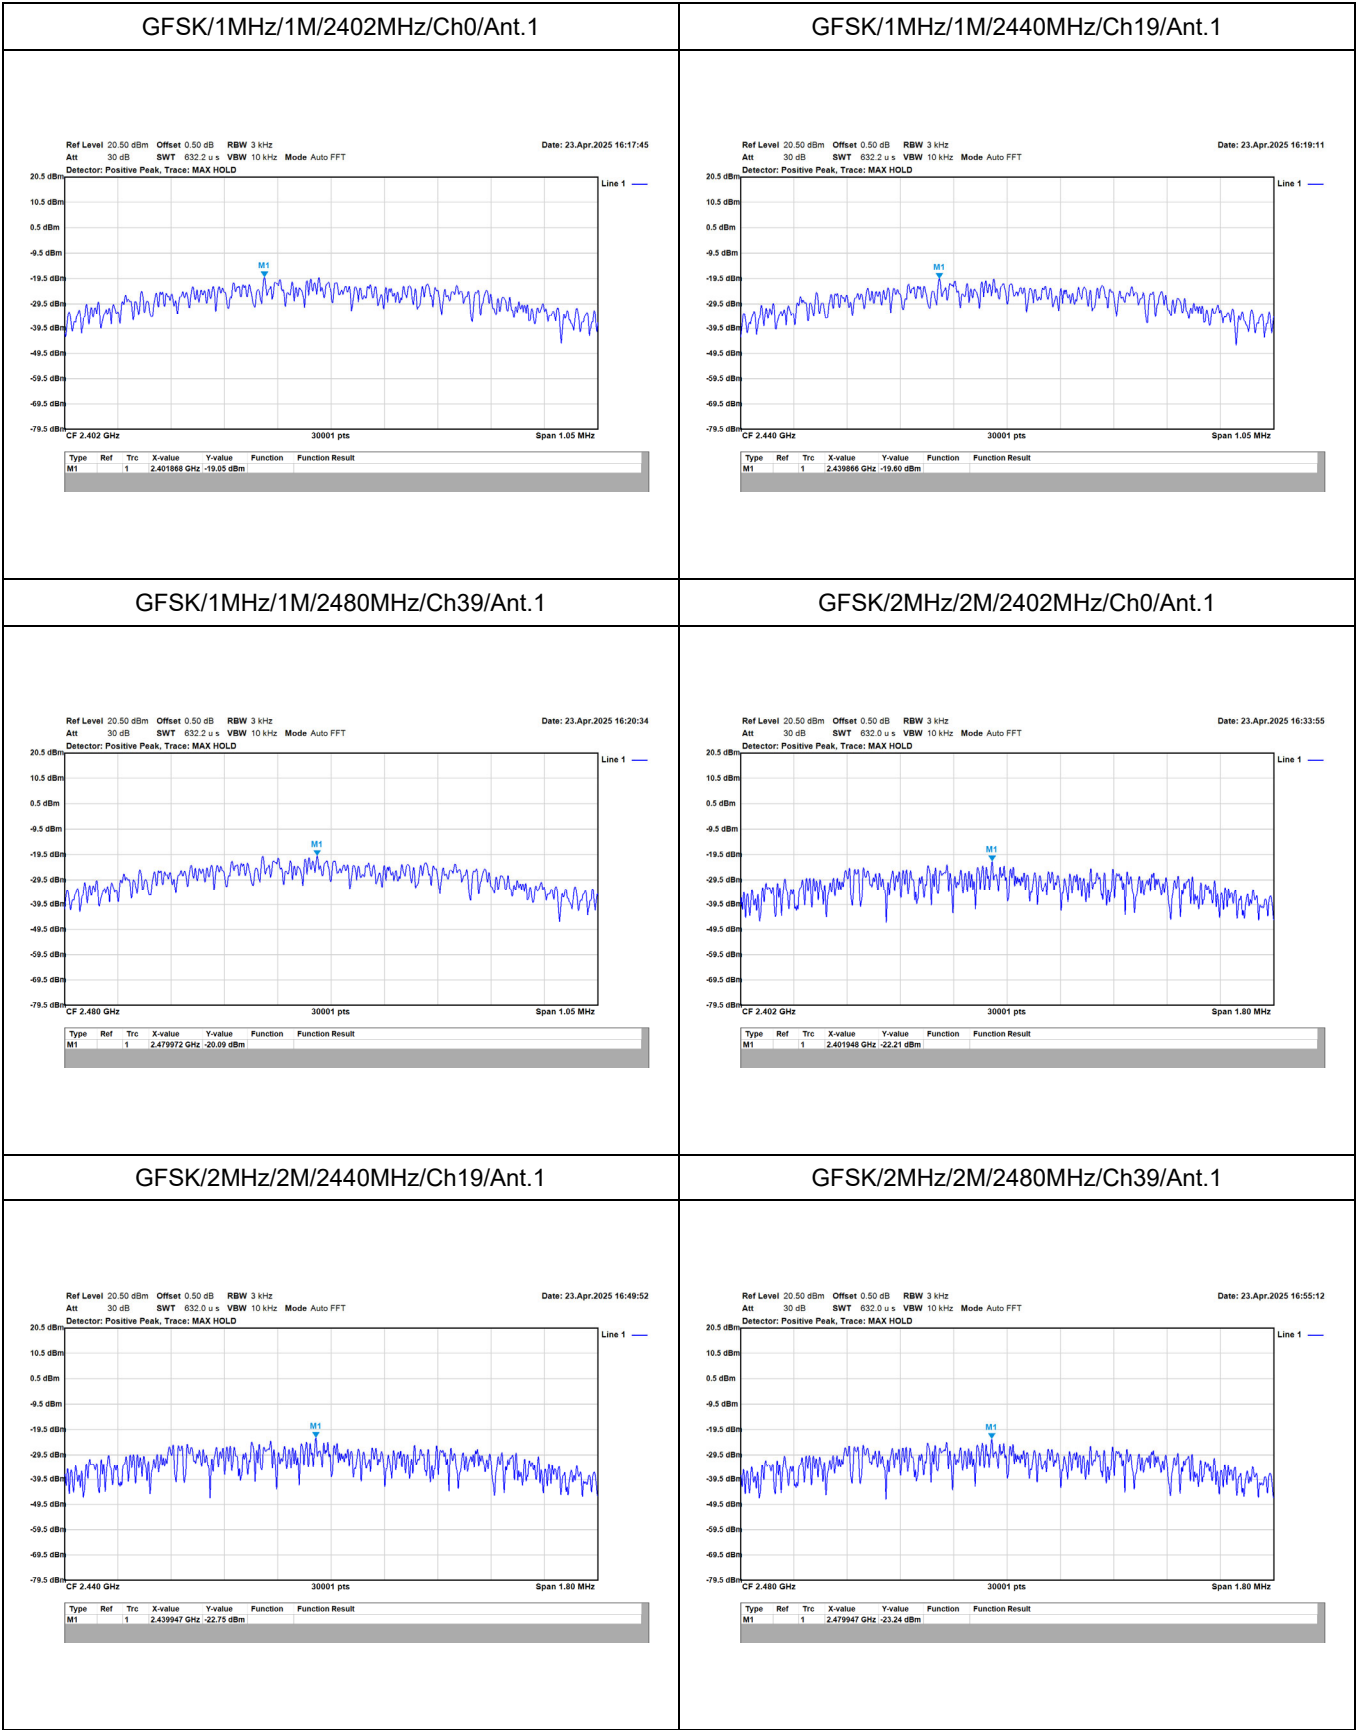


Appendix E. Test Result of Antenna Port Conducted Emission


Modulation	Measurement Level Δ (dB)	Result
GFSK (1 Mbps)	> 20	PASS
GFSK (2 Mbps)	> 20	PASS

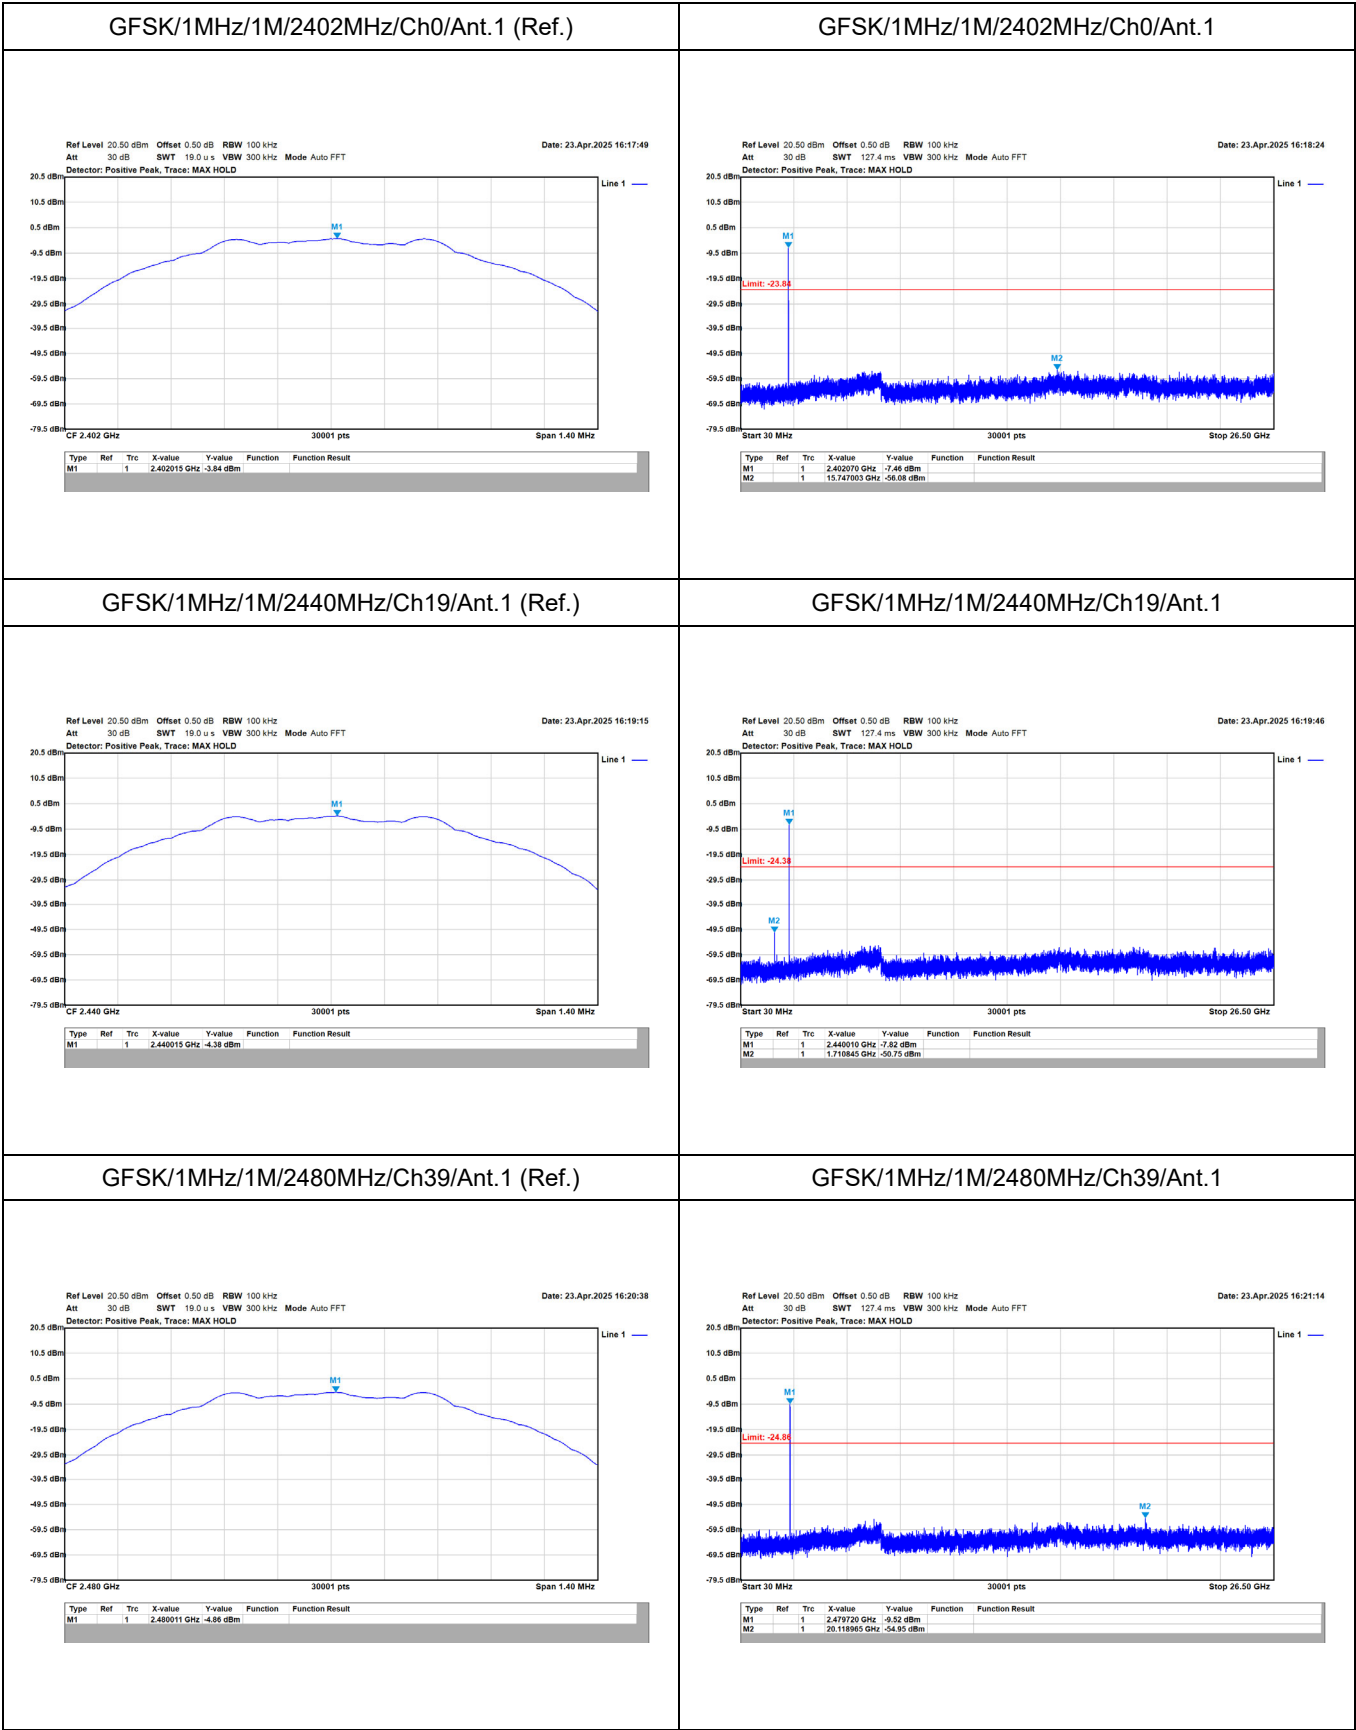


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1 (Ref.)

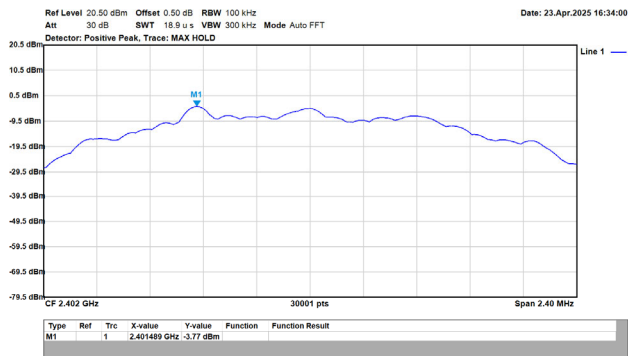


GFSK/2MHz/2M/2402MHz/Ch0/Ant.1

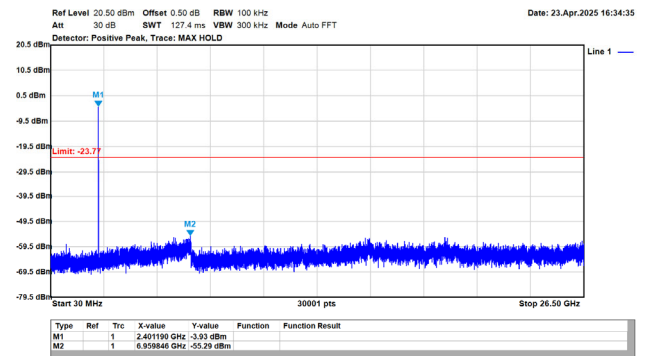


GFSK/2MHz/2M/2440MHz/Ch19/Ant.1 (Ref.)

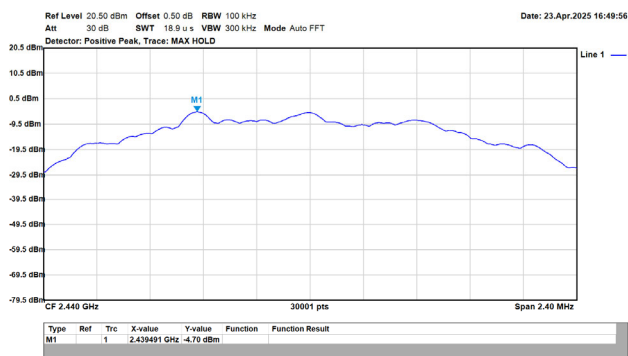


GFSK/2MHz/2M/2440MHz/Ch19/Ant.1

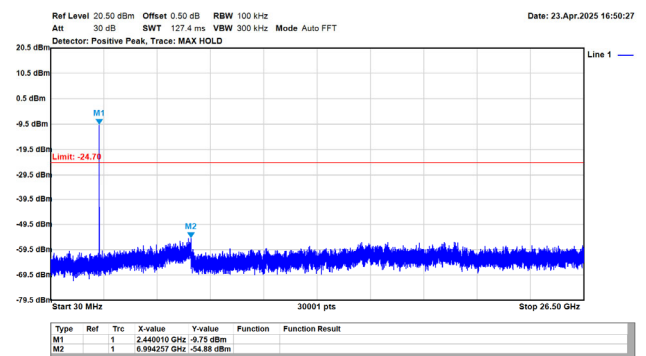


GFSK/2MHz/2M/2480MHz/Ch39/Ant.1 (Ref.)

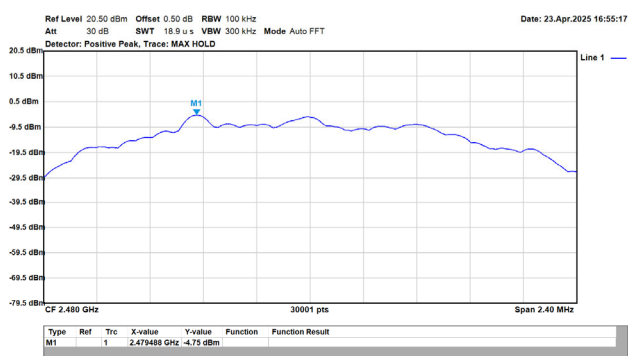


GFSK/2MHz/2M/2480MHz/Ch39/Ant.1

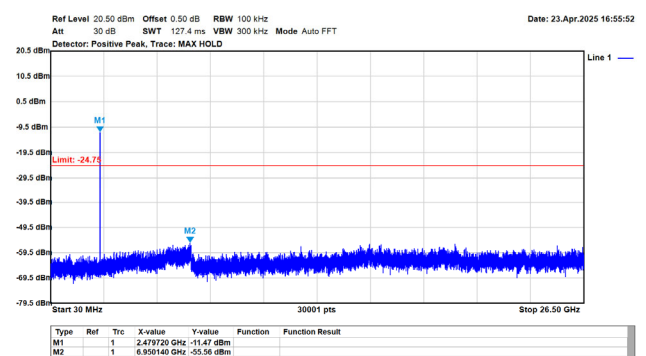


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1(Band Edge)

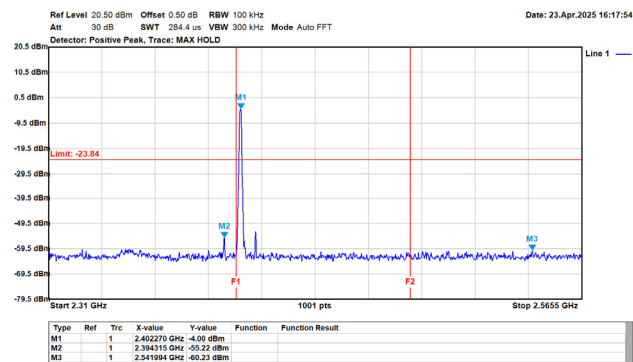


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1(Band Edge)

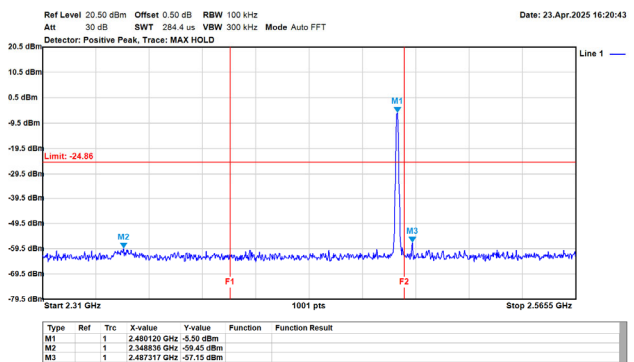





GFSK/2MHz/2M/2402MHz/Ch0/Ant.1(Band Edge)

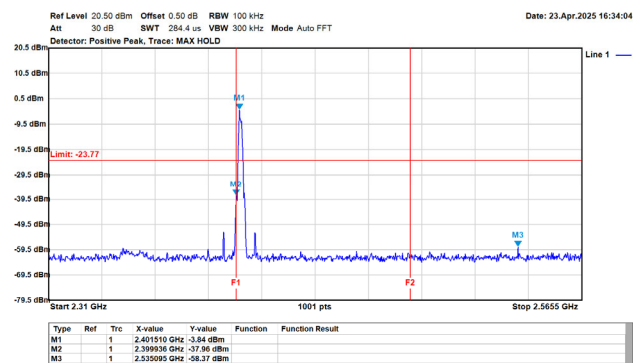

GFSK/2MHz/2M/2480MHz/Ch39/Ant.1(Band Edge)

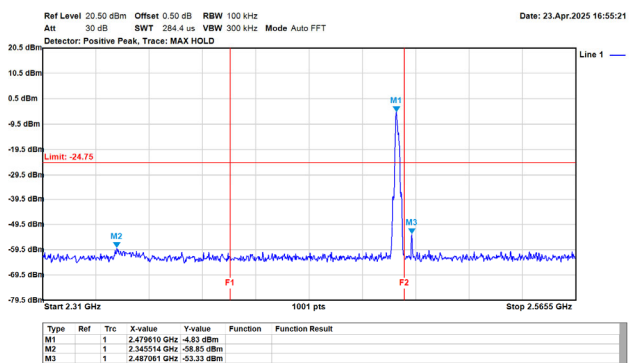


Appendix F. Test Result of Radiated Emission

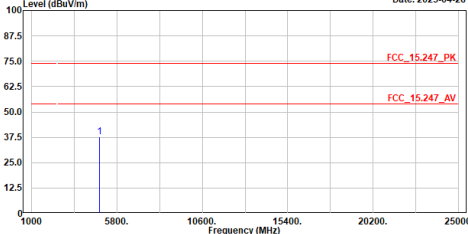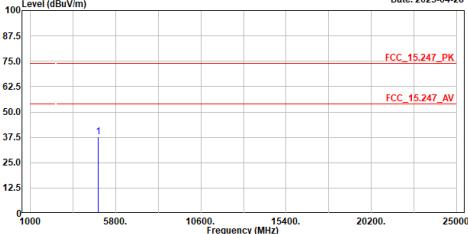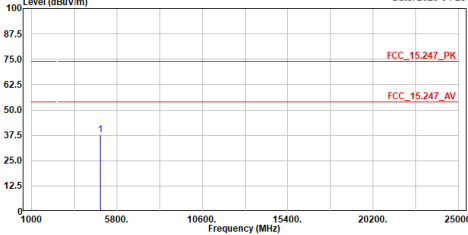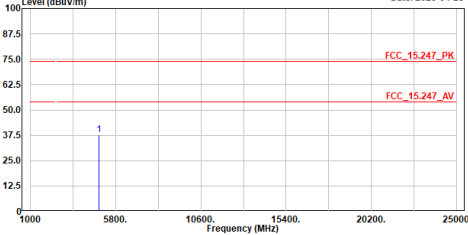TX_BLE1M_2402MHz_H	TX_BLE1M_2402MHz_V																																																
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_BLE1M_2402MHz Test BY :Bob Level (dBuV/m) Date: 2025-04-28  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4804.000</td><td>37.89</td><td>74.00</td><td>-36.11</td><td>52.84</td><td>-14.95</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4804.000	37.89	74.00	-36.11	52.84	-14.95	Peak	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_BLE1M_2402MHz Test BY :Bob Level (dBuV/m) Date: 2025-04-28  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4804.000</td><td>37.77</td><td>74.00</td><td>-36.23</td><td>52.72</td><td>-14.95</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4804.000	37.77	74.00	-36.23	52.72	-14.95	Peak
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4804.000	37.89	74.00	-36.11	52.84	-14.95	Peak																																										
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4804.000	37.77	74.00	-36.23	52.72	-14.95	Peak																																										
TX_BLE1M_2440MHz_H	TX_BLE1M_2440MHz_V																																																
Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_BLE1M_2440MHz Test BY :Bob Level (dBuV/m) Date: 2025-04-28  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4880.000</td><td>37.69</td><td>74.00</td><td>-36.31</td><td>52.28</td><td>-14.59</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4880.000	37.69	74.00	-36.31	52.28	-14.59	Peak	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_BLE1M_2440MHz Test BY :Bob Level (dBuV/m) Date: 2025-04-28  <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>4880.000</td><td>37.88</td><td>74.00</td><td>-36.12</td><td>52.47</td><td>-14.59</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.	No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	4880.000	37.88	74.00	-36.12	52.47	-14.59	Peak
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4880.000	37.69	74.00	-36.31	52.28	-14.59	Peak																																										
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																											
1	4880.000	37.88	74.00	-36.12	52.47	-14.59	Peak																																										

TX_BLE1M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Bob

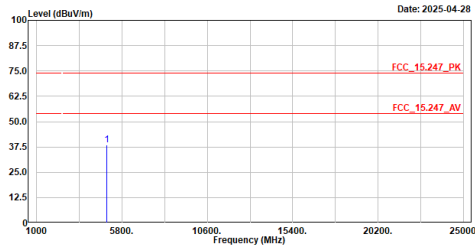


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	38.54	74.00	-35.46	52.76	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Bob

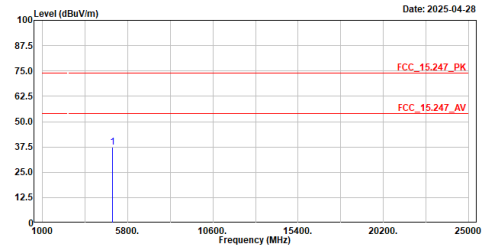


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	37.50	74.00	-36.50	51.72	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2402MHz
Test BY :Bob

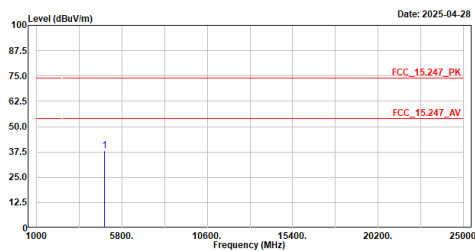


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	37.99	74.00	-36.01	52.94	-14.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2402MHz
Test BY :Bob

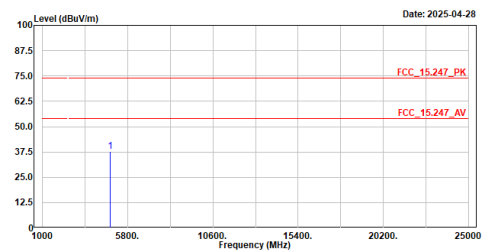


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4804.000	37.77	74.00	-36.23	52.72	-14.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Bob

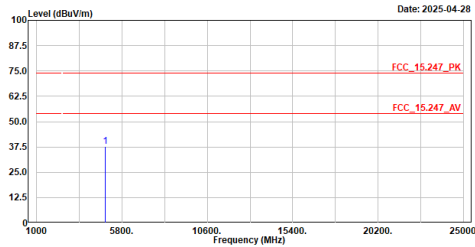


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4880.000	37.83	74.00	-36.17	52.42	-14.59	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Bob

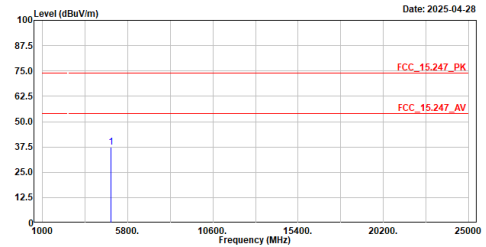


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4880.000	37.46	74.00	-36.54	52.05	-14.59	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2480MHz
Test BY :Bob

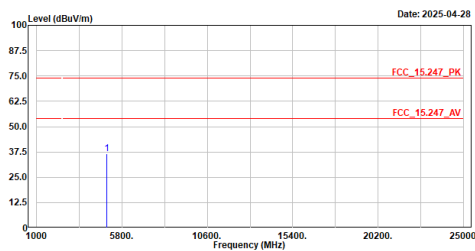


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	36.76	74.00	-37.24	50.98	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2480MHz
Test BY :Bob

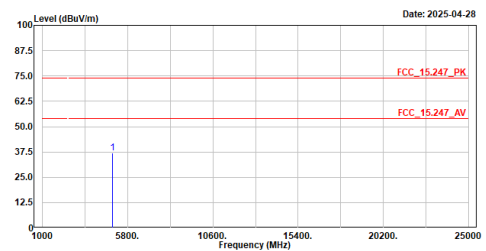


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	4960.000	36.94	74.00	-37.06	51.16	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Ashton

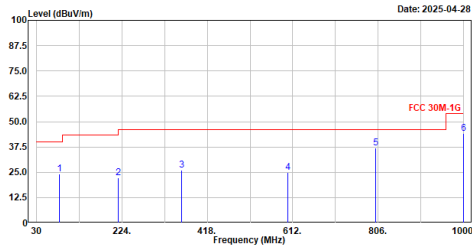


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	81.410	24.28	40.00	-15.72	53.89	-29.61	QP
2	215.270	22.32	43.50	-21.18	48.68	-26.36	QP
3	359.800	26.19	46.00	-19.81	47.98	-21.79	QP
4	600.360	24.90	46.00	-21.10	40.31	-15.41	QP
5	800.180	37.05	46.00	-8.95	49.54	-12.49	QP
6	1000.000	44.13	54.00	-9.87	54.66	-10.53	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE2M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Ashton

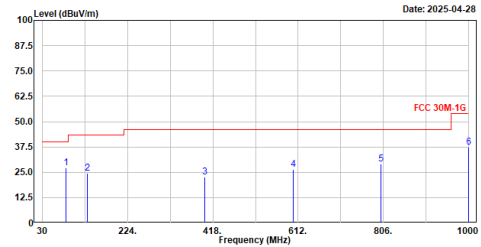


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	84.320	27.00	40.00	-13.00	56.89	-29.89	QP
2	131.850	24.38	43.50	-19.12	49.67	-25.29	QP
3	399.570	22.65	46.00	-23.35	42.90	-20.25	QP
4	600.360	26.37	46.00	-19.63	41.78	-15.41	QP
5	800.180	29.11	46.00	-16.89	41.60	-12.49	QP
6	1000.000	37.50	54.00	-16.50	48.03	-10.53	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE1M_2402MHz_H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Bob

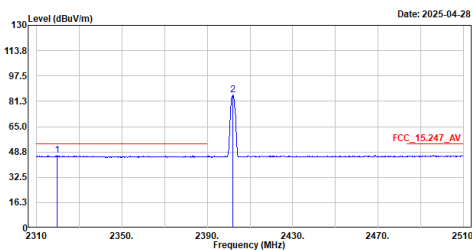


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2319.600	46.38	54.00	-7.62	15.77	30.61	Average
2	2402.000	85.22	-----	-----	54.76	30.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Bob

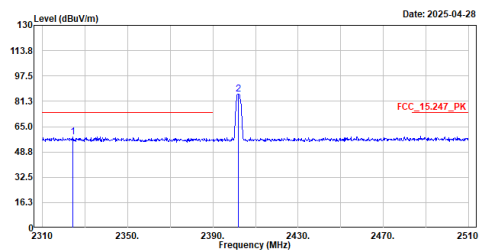


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2324.400	58.56	74.00	-15.44	27.99	30.57	Peak
2	2401.800	85.90	-----	-----	55.44	30.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Bob

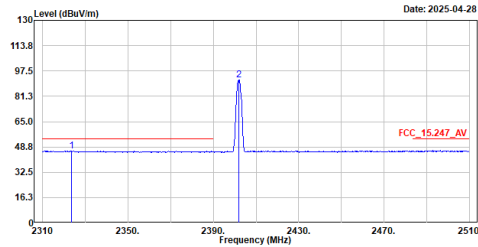


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2323.400	46.22	54.00	-7.78	15.64	30.58	Average
2	2402.000	91.85	-----	-----	61.39	30.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Bob

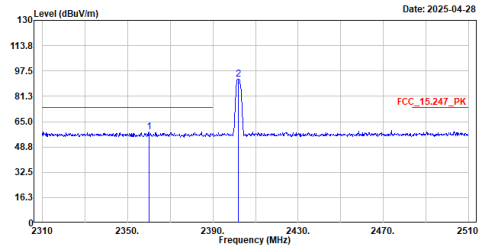


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2360.000	58.31	74.00	-15.69	27.89	30.42	Peak
2	2401.800	92.40	-----	-----	61.94	30.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Bob

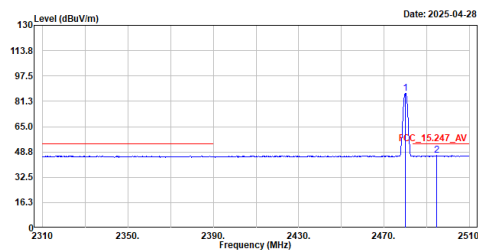


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	86.13	-----	-----	55.74	30.39	Average
2	2494.600	46.51	54.00	-7.49	16.00	30.51	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Bob

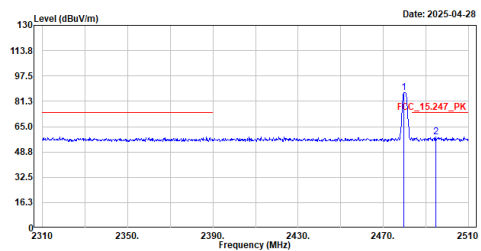


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2479.800	86.74	-----	-----	56.35	30.39	Peak
2	2494.600	58.60	74.00	-15.40	28.09	30.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Bob

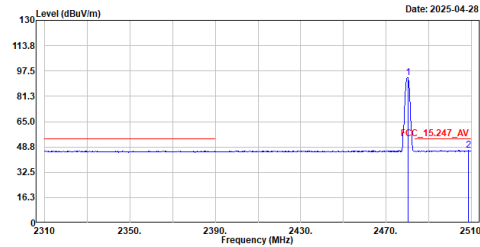


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.200	93.12	-----	-----	62.73	30.39	Average
2	2508.800	46.51	54.00	-7.49	15.99	30.52	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Bob

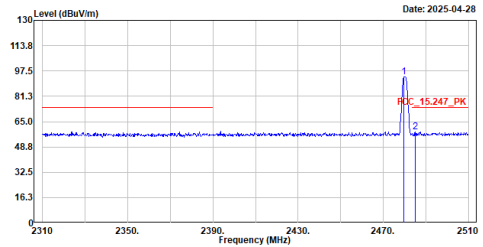


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2479.800	93.67	-----	-----	63.28	30.39	Peak
2	2485.000	58.59	74.00	-15.41	28.14	30.45	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2402MHz
Test BY :Bob

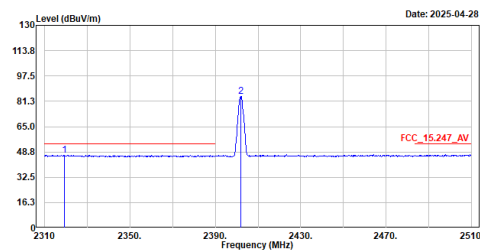


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2319.200	46.80	54.00	-7.20	16.19	30.61	Average
2	2402.000	84.31	-----	-----	53.85	30.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2402MHz
Test BY :Bob

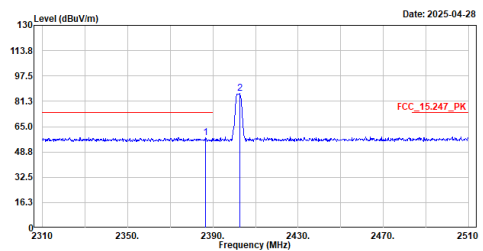


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2386.400	58.12	74.00	-15.88	27.68	30.44	Peak
2	2402.600	86.11	-----	-----	55.63	30.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2402MHz
Test BY :Bob

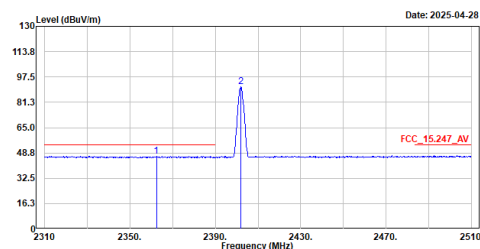


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2362.400	46.82	54.00	-7.18	16.40	30.42	Average
2	2402.000	91.10	-----	-----	60.64	30.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2402MHz
Test BY :Bob

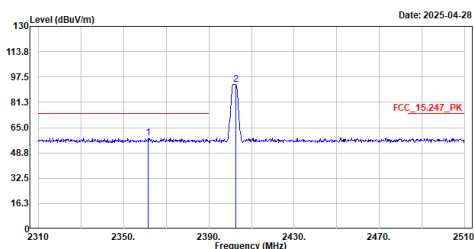


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2361.600	58.39	74.00	-15.61	27.97	30.42	Peak
2	2402.600	92.77	-----	-----	62.29	30.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2480MHz
Test BY :Bob

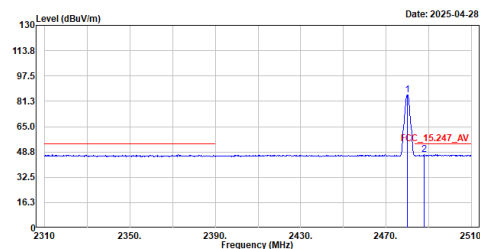


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2480.000	85.20	-----	-----	54.81	30.39	Average
2	2487.800	46.91	54.00	-7.09	16.43	30.48	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2480MHz
Test BY :Bob

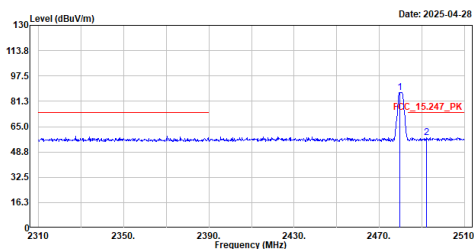

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB/m	
1	2479.600	87.01	-----	-----	56.62	30.39	Peak
2	2492.000	58.03	74.00	-15.97	27.53	30.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

