

## SPARSH VP330

Intuitive Touch-Screen IP Phone



## Quick Installation Guide

Thank you for choosing SPARSH VP330! Please read this guide first for correct installation and retain it for future reference. The information in this guide was current at the time of publication. All specifications are subject to change without notice.

This Guide is meant to help you install and connect the phone. For detailed installation instructions, refer to the ETERNITY/NAVAN System Manual.

### Copyright


All rights reserved. No part of this document may be copied or reproduced in any form or by any means without the prior written consent of Matrix Comsec Pvt. Ltd.

### Warranty

Limited Warranty. Valid only if primary protection is provided, mains supply is within limit and protected, and environment conditions maintained within product specifications. Complete warranty statement is available on our website: [www.MatrixComSec.com](http://www.MatrixComSec.com)

2.

## Know Your SPARSH VP330

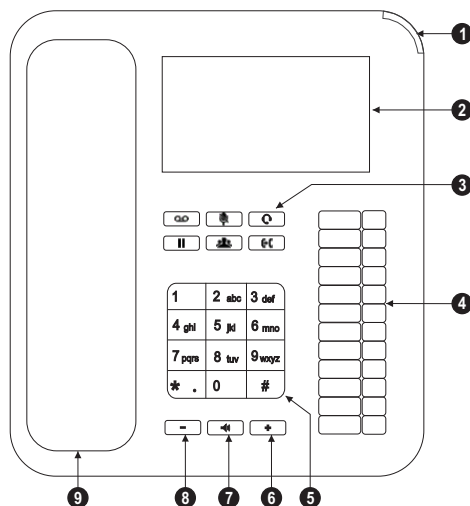

- |                       |                       |
|-----------------------|-----------------------|
| ❶ Ringer LED          | ❹ Volume increase key |
| ❷ LCD Screen          | ❺ Speaker key         |
| ❸ Fixed Function keys | ❻ Volume decrease key |
| ❹ DSS keys            | ❼ Handset             |
| ❺ Dial Pad            |                       |

## What Your Package Contains

- Phone Body with Handset
- RJ45 Cable
- Power Adapter 5V, 2.0 Amp.
- 4P4C Spring Cord
- A Foot Stand
- A Warranty Card Set
- Wall Mounting Template
- Quick Installation Guide (printed copy)

3.


## Installing SPARSH VP330

### Step 1 SELECT A LOCATION

You can mount the phone on a wall or on the desk.


### Mount SPARSH VP330 on a Wall

- Use the mounting template to drill holes of appropriate size and distance.
- Fix the screw grips in the holes you drilled.
- Fix two screws in the holes on the wall, ensuring that they are aligned with the Keyhole Slots 1 and 2 of SPARSH VP330. The screws should protrude from the wall to fit into the Keyhole Slots.

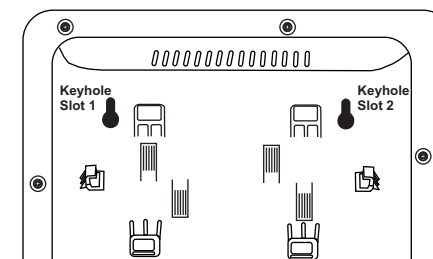


- Now, mount the phone with the screws fitting into the Keyhole Slots.

### Mount SPARSH VP330 on the Desk

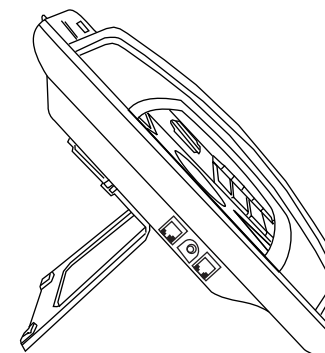


- You can attach the Foot Stand in the following ways - at an angle of 35 degrees and 50 degrees.

4.

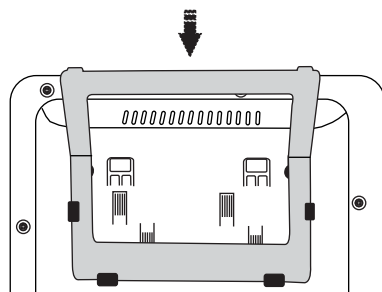


Stand attached at  
35 degree angle

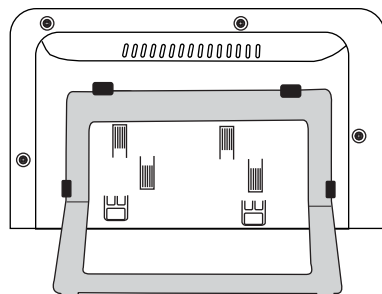

Stand attached at  
50 degree angle

## Step 2 CONNECT



### Connect the Handset

- Connect the handset of the SPARSH VP330 to the phone body using the spring cord.


### Connect the Headset (not supplied by Matrix)

If you want to use a Headset,

- Plug any standard stereo headset with 3.5mm single connector into the headset jack with the symbol on the left side panel of the phone.

5.

- You may also plug in a stereo headset with RJ9 connector into the headset port on the left side panel of the phone, marked with the symbol .

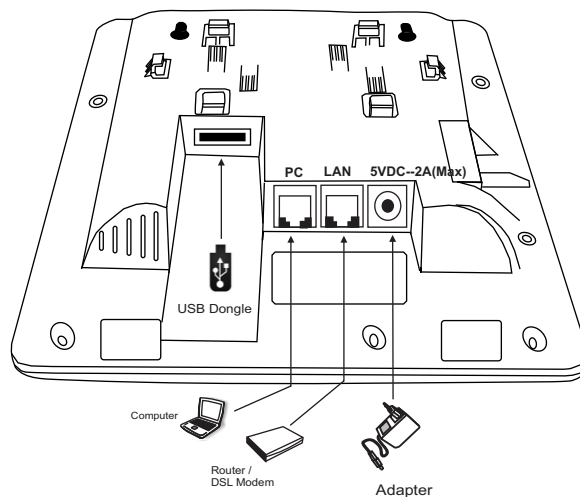

### Connect the IP Network

You can connect to the network using the Ethernet cable or Wireless USB Adapter.

- Connect the LAN Port of the phone to the IP Network — A DSL Modem / router or LAN Switch — using the Ethernet cable.

### OR

- Connect the Wireless USB Adapter into the USB port of the phone.

*Note:* You can purchase the Wireless USB Adapter as an optional peripheral device to support wireless network from Matrix.

### Connect a PC to the Phone

- Plug in the Ethernet cable into the PC Port of the phone and the other end into the LAN Port of your PC.

### Connect the Power Supply

- Plug in the connector of the Adapter provided with the phone into the power jack (DC Jack) with the label at the back of the phone.
- Plug in the Power adapter into a power outlet.

*Note:* Do not connect the Adapter, if you are powering your PoE enabled phone with a LAN Switch that supports Power over Ethernet (PoE as per IEEE 802.3af).

6.

## Step 3 STARTUP AND OPERATE

- When the IP Phone is connected to the network and supplied with power, the booting process initiates.
- After loading the application, the phone obtains the Network Settings, updates the Firmware (if required), obtains the Configuration and then attempts to register.
- To configure and register the phone as a SIP Extension, refer to the **ETERNITY/NAVAN System Manual**. For operating instructions refer to the **SPARSH VP330 User Guide**. Both the documents are available on the CD ROM provided to you with the ETERNITY/NAVAN System.



### MATRIX COMSEC

#### Head Office

394-GIDC, Makarpura, Vadodara - 390010, India  
Tel.: +91 265 2630555, Fax: +91 265 2636598  
E-mail: Info@MatrixComSec.com

#### Manufacturing Unit

19-GIDC, Waghodia - 391760, Dist. Vadodara, India  
Tel.: +91 2668 263172/73

#### Customer Care

Tel.: +91 265 2630555  
E-mail: Customer.Care@MatrixComSec.com, Support@MatrixComSec.com

[www.MatrixComSec.com](http://www.MatrixComSec.com)