

MDS-800

“ MDS-800 ”



TONE ULTRA™

MDS-800

QUICK START GUIDE



Rev 1.0 US

Easy Pairing

- With the power off, slide the power switch to the 'ON' position.
- When the headset enters pairing mode, the LED indicator will show a solid blue light. (Speech: Ready to pair)
- Using your phone, find the Bluetooth Menu and search for new devices.
- Select "MDS-800" from the list of devices and pair it with your phone.
- If you are asked for the Password/PIN code during the pairing procedure, please enter "0000" (4 Zeros).
- Once pairing has completed successfully, you will hear a beep. (Speech: Your headset paired)
- After pairing successfully, be sure to "Connect" to the LG HBS-800. (Speech: Connected)
- Some phones will ask for permission to access the phone's contact list. If you would like to use Name Alert Function, please select OK or Allow Access.



Advanced Multipoint

The HBS-800 is capable of having two devices connected to the headset at the same time. This will give you the freedom of using call waiting between calls on both of your connected phones.

Connection

- Pair the headset with one of your Bluetooth-enabled phones.
- Turn the headset off.
- With the power off, press the CALL button and slide the power switch to the 'ON' position at the same time for 2 seconds to enter Manual Pairing mode.
- Now, pair and connect the headset with your other Bluetooth-enabled phone. (This will be your primary phone).
- Once this phone is paired and connected, go back and connect the originally paired phone to the headset. This will now be your secondary phone.

Note: When the MDS-800 is connected to two phones at the same time (Multipoint), the phone calling functions will work with the primary phone.

Note: In case of failure to connect to the primary phone through Easy Pairing, the HBS-800 will enter pairing mode.


Calling function

- Voice Dialing and Last Number Redial features work with the primary phone (or handset which made the last outgoing call).

Call waiting

- While speaking on an active call, press and hold the CALL button for 1 second to switch to an incoming call.
- To switch between 2 active calls, press and hold the CALL button for 1 second.
- To end both calls, briefly press the CALL button.
- If both phones are receiving an incoming call, the headset will default to the primary device.

Parts Description

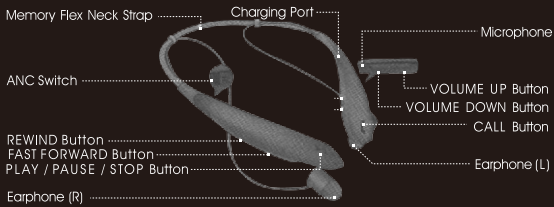

Calling

Answer a Call

- When there is an incoming call, the headset will ring and vibrate. Briefly press the VOLUME DOWN button to stop vibration. Briefly press the CALL button to answer the incoming call.

Make a Call (Last Number Redial)

- Press and hold the CALL button for one second.

Make a Call (Voice Dial)

- Briefly press the CALL button to activate your handset's voice command menu.

End a Call

- Briefly press the CALL button.

Call Waiting

- Press and hold the CALL button for one second.

Call Reject

- Press and hold the CALL button for one second when the headset rings. (Speech: Call Rejected)

Mic Mute

- Press and hold the VOLUME UP and VOLUME DOWN buttons at the same time for 1 second to mute/unmute the Mic during conversation.

Audio Streaming

Play

- Briefly press the PLAY/PAUSE/STOP Button.

Pause

- While playing music, briefly press the PLAY/PAUSE/STOP button.

Stop

- While playing music, press and hold the PLAY/PAUSE/STOP button for 1 second.

Next Song

- Briefly press the FAST FORWARD button.

Previous Song

- Briefly press the REWIND button.

Fast Forward

- Press and hold the FAST FORWARD button.


Rewind

- Press and hold the REWIND button.



Equalizer

- While playing music, press and hold the VOLUME UP and VOLUME DOWN buttons at the same time for 1 second to switch between EQ's, Bass Boost (Default) → Normal → Treble Boost.



aptX®

- MDS-800 features aptX® technology that ensures audio content transmitted over Bluetooth is instant and crystal-clear.
- aptX® is automatically enabled as long as the source device supports it.

ANC - Ambient Noise Cancelling

Ambient Noise Cancelling is new technology that reduces ambient noise in a noisy environment. It provides a better listening experience to you.

1) Performance

Ambient Noise Cancelling actively reduces more background noise than any other noise cancellation technology.

2) Activating / Deactivating

- Slide the ANC switch to the "ON" position.
- The LED indicator will show a solid violet light and you will hear "ANC On".
- Slide the ANC switch to the "OFF" position to deactivate the Ambient Noise Cancelling feature. You will hear "ANC off".
- The Ambient Noise Cancelling feature is also available when the MDS-800 is set to OFF. The solid violet light will be displayed but the voice prompt will not be played to indicate on and off.

Status	ANC On		ANC Off	
	LED Indicator	Voice Prompt	LED Indicator	Voice Prompt
Power on	Violet	"ANC On"	Blue	"ANC Off"
Power off	Violet	X	X	X

3) Precautions when using Ambient Noise Cancelling

- The Ambient Noise Cancelling feature optimizes noisy environments, such as buses, trains, and airplanes. There is no need to use this feature in a quiet environment.
- Be extra cautious while walking, bicycling, or driving. You may not hear warning signals or alarms.
- The ANC performance might vary depending on how the headset is placed into the ear.

Battery Status Alert

- To check the battery status, press and hold the VOLUME DOWN button for 1 second.
- There are 3 levels of battery status: "Battery high", "Battery medium" and "Battery low".
- MDS-800 battery status indicator will appear on the iPhone screen.



SMS Reader

The MDS-800 Bluetooth headset supports SMS reading on Android™ based devices. Search the Google Play™ Store for the LG BT Reader application and install it on your device to use this function.

* The QR code shown to the right helps you download the LG BT Reader application from the Google Play™ Store. Google Play is a trademark of Google, Inc.



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.