

TABLE OF CONTENTS

1 Conducted output power for NR FR1	2
2 Frequency stability for NR FR1	4
3 Peak-to-Average Ratio for NR FR1	6
4 Occupied bandwidth for NR FR1	46
5 Band edge for NR FR1	60
6 Out-of-band emissions for NR FR1	70

1 Conducted output power for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Conducted output power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Verdict
n66	15	5	342500	1@1	DFT_BPSK	25.36	-2.95	22.41	30	PASS
n66	15	5	342500	25@0	DFT_QPSK	24.39	-2.95	21.44	30	PASS
n66	15	5	342500	12@6	DFT_QPSK	24.94	-2.95	21.99	30	PASS
n66	15	5	342500	1@1	DFT_QPSK	25.26	-2.95	22.31	30	PASS
n66	15	5	342500	1@23	DFT_QPSK	25.10	-2.95	22.15	30	PASS
n66	15	5	342500	1@1	DFT_QAM16	24.74	-2.95	21.79	30	PASS
n66	15	5	342500	1@1	DFT_QAM64	23.21	-2.95	20.26	30	PASS
n66	15	5	342500	1@1	DFT_QAM256	21.09	-2.95	18.14	30	PASS
n66	15	5	342500	1@1	CP_QPSK	24.30	-2.95	21.35	30	PASS
n66	15	5	349000	1@1	DFT_BPSK	25.74	-2.95	22.79	30	PASS
n66	15	5	349000	25@0	DFT_QPSK	24.74	-2.95	21.79	30	PASS
n66	15	5	349000	12@6	DFT_QPSK	25.44	-2.95	22.49	30	PASS
n66	15	5	349000	1@1	DFT_QPSK	25.61	-2.95	22.66	30	PASS
n66	15	5	349000	1@23	DFT_QPSK	25.62	-2.95	22.67	30	PASS
n66	15	5	349000	1@1	DFT_QAM16	24.57	-2.95	21.62	30	PASS
n66	15	5	349000	1@1	DFT_QAM64	23.05	-2.95	20.1	30	PASS
n66	15	5	349000	1@1	DFT_QAM256	21.39	-2.95	18.44	30	PASS
n66	15	5	349000	1@1	CP_QPSK	24.43	-2.95	21.48	30	PASS
n66	15	5	355500	1@1	DFT_BPSK	24.77	-2.95	21.82	30	PASS
n66	15	5	355500	25@0	DFT_QPSK	24.33	-2.95	21.38	30	PASS
n66	15	5	355500	12@6	DFT_QPSK	24.18	-2.95	21.23	30	PASS
n66	15	5	355500	1@1	DFT_QPSK	24.70	-2.95	21.75	30	PASS
n66	15	5	355500	1@23	DFT_QPSK	24.05	-2.95	21.1	30	PASS
n66	15	5	355500	1@1	DFT_QAM16	24.43	-2.95	21.48	30	PASS
n66	15	5	355500	1@1	DFT_QAM64	22.98	-2.95	20.03	30	PASS
n66	15	5	355500	1@1	DFT_QAM256	20.79	-2.95	17.84	30	PASS
n66	15	5	355500	1@1	CP_QPSK	25.01	-2.95	22.06	30	PASS
n66	15	20	344000	1@1	DFT_BPSK	24.57	-2.95	21.62	30	PASS
n66	15	20	344000	100@0	DFT_QPSK	24.45	-2.95	21.5	30	PASS
n66	15	20	344000	50@25	DFT_QPSK	24.67	-2.95	21.72	30	PASS
n66	15	20	344000	1@1	DFT_QPSK	24.51	-2.95	21.56	30	PASS
n66	15	20	344000	1@104	DFT_QPSK	24.71	-2.95	21.76	30	PASS
n66	15	20	344000	1@1	DFT_QAM16	24.35	-2.95	21.4	30	PASS
n66	15	20	344000	1@1	DFT_QAM64	22.94	-2.95	19.99	30	PASS
n66	15	20	344000	1@1	DFT_QAM256	21.10	-2.95	18.15	30	PASS
n66	15	20	344000	1@1	CP_QPSK	23.86	-2.95	20.91	30	PASS
n66	15	20	349000	1@1	DFT_BPSK	24.96	-2.95	22.01	30	PASS

n66	15	20	349000	100@0	DFT_QPSK	24.71	-2.95	21.76	30	PASS
n66	15	20	349000	50@25	DFT_QPSK	25.29	-2.95	22.34	30	PASS
n66	15	20	349000	1@1	DFT_QPSK	25.14	-2.95	22.19	30	PASS
n66	15	20	349000	1@104	DFT_QPSK	25.38	-2.95	22.43	30	PASS
n66	15	20	349000	1@1	DFT_QAM16	24.60	-2.95	21.65	30	PASS
n66	15	20	349000	1@1	DFT_QAM64	23.27	-2.95	20.32	30	PASS
n66	15	20	349000	1@1	DFT_QAM256	21.09	-2.95	18.14	30	PASS
n66	15	20	349000	1@1	CP_QPSK	24.25	-2.95	21.3	30	PASS
n66	15	20	354000	1@1	DFT_BPSK	25.27	-2.95	22.32	30	PASS
n66	15	20	354000	100@0	DFT_QPSK	24.65	-2.95	21.7	30	PASS
n66	15	20	354000	50@25	DFT_QPSK	24.75	-2.95	21.8	30	PASS
n66	15	20	354000	1@1	DFT_QPSK	25.15	-2.95	22.2	30	PASS
n66	15	20	354000	1@104	DFT_QPSK	23.87	-2.95	20.92	30	PASS
n66	15	20	354000	1@1	DFT_QAM16	25.28	-2.95	22.33	30	PASS
n66	15	20	354000	1@1	DFT_QAM64	23.11	-2.95	20.16	30	PASS
n66	15	20	354000	1@1	DFT_QAM256	21.11	-2.95	18.16	30	PASS
n66	15	20	354000	1@1	CP_QPSK	24.13	-2.95	21.18	30	PASS
n66	15	40	346000	1@1	DFT_BPSK	24.90	-2.95	21.95	30	PASS
n66	15	40	346000	216@0	DFT_QPSK	24.56	-2.95	21.61	30	PASS
n66	15	40	346000	108@54	DFT_QPSK	24.92	-2.95	21.97	30	PASS
n66	15	40	346000	1@1	DFT_QPSK	24.71	-2.95	21.76	30	PASS
n66	15	40	346000	1@214	DFT_QPSK	25.31	-2.95	22.36	30	PASS
n66	15	40	346000	1@1	DFT_QAM16	24.56	-2.95	21.61	30	PASS
n66	15	40	346000	1@1	DFT_QAM64	22.81	-2.95	19.86	30	PASS
n66	15	40	346000	1@1	DFT_QAM256	20.71	-2.95	17.76	30	PASS
n66	15	40	346000	1@1	CP_QPSK	23.76	-2.95	20.81	30	PASS
n66	15	40	349000	1@1	DFT_BPSK	24.96	-2.95	22.01	30	PASS
n66	15	40	349000	216@0	DFT_QPSK	24.65	-2.95	21.7	30	PASS
n66	15	40	349000	108@54	DFT_QPSK	25.38	-2.95	22.43	30	PASS
n66	15	40	349000	1@1	DFT_QPSK	24.84	-2.95	21.89	30	PASS
n66	15	40	349000	1@214	DFT_QPSK	24.97	-2.95	22.02	30	PASS
n66	15	40	349000	1@1	DFT_QAM16	24.37	-2.95	21.42	30	PASS
n66	15	40	349000	1@1	DFT_QAM64	22.83	-2.95	19.88	30	PASS
n66	15	40	349000	1@1	DFT_QAM256	21.12	-2.95	18.17	30	PASS
n66	15	40	349000	1@1	CP_QPSK	24.01	-2.95	21.06	30	PASS
n66	15	40	352000	1@1	DFT_BPSK	25.50	-2.95	22.55	30	PASS
n66	15	40	352000	216@0	DFT_QPSK	24.18	-2.95	21.23	30	PASS
n66	15	40	352000	108@54	DFT_QPSK	25.15	-2.95	22.2	30	PASS
n66	15	40	352000	1@1	DFT_QPSK	25.34	-2.95	22.39	30	PASS
n66	15	40	352000	1@214	DFT_QPSK	23.80	-2.95	20.85	30	PASS
n66	15	40	352000	1@1	DFT_QAM16	24.59	-2.95	21.64	30	PASS
n66	15	40	352000	1@1	DFT_QAM64	23.13	-2.95	20.18	30	PASS
n66	15	40	352000	1@1	DFT_QAM256	21.00	-2.95	18.05	30	PASS
n66	15	40	352000	1@1	CP_QPSK	24.12	-2.95	21.17	30	PASS

2 Frequency stability for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
n66	15	5	342500	12@6	DFT_BPSK	-1.83	-0.00107	-2.5	2.5	PASS
n66	15	5	342500	1@1	DFT_BPSK	-4.52	-0.00264	-2.5	2.5	PASS
n66	15	5	342500	1@23	DFT_BPSK	-6.25	-0.00365	-2.5	2.5	PASS
n66	15	5	342500	12@6	DFT_QPSK	-5.18	-0.00302	-2.5	2.5	PASS
n66	15	5	342500	1@1	DFT_QPSK	-4.52	-0.00264	-2.5	2.5	PASS
n66	15	5	342500	1@23	DFT_QPSK	-3.38	-0.00197	-2.5	2.5	PASS
n66	15	5	349000	12@6	DFT_BPSK	-1.70	-0.00097	-2.5	2.5	PASS
n66	15	5	349000	1@1	DFT_BPSK	-4.42	-0.00253	-2.5	2.5	PASS
n66	15	5	349000	1@23	DFT_BPSK	-3.61	-0.00207	-2.5	2.5	PASS
n66	15	5	349000	12@6	DFT_QPSK	-1.14	-0.00065	-2.5	2.5	PASS
n66	15	5	349000	1@1	DFT_QPSK	-4.14	-0.00237	-2.5	2.5	PASS
n66	15	5	349000	1@23	DFT_QPSK	-1.46	-0.00084	-2.5	2.5	PASS
n66	15	5	355500	12@6	DFT_BPSK	-2.03	-0.00114	-2.5	2.5	PASS
n66	15	5	355500	1@1	DFT_BPSK	-4.02	-0.00226	-2.5	2.5	PASS
n66	15	5	355500	1@23	DFT_BPSK	-2.79	-0.00157	-2.5	2.5	PASS
n66	15	5	355500	12@6	DFT_QPSK	-5.74	-0.00323	-2.5	2.5	PASS
n66	15	5	355500	1@1	DFT_QPSK	-5.09	-0.00286	-2.5	2.5	PASS
n66	15	5	355500	1@23	DFT_QPSK	-4.68	-0.00263	-2.5	2.5	PASS
n66	15	20	344000	50@25	DFT_BPSK	-5.08	-0.00295	-2.5	2.5	PASS
n66	15	20	344000	1@1	DFT_BPSK	-6.77	-0.00394	-2.5	2.5	PASS
n66	15	20	344000	1@104	DFT_BPSK	-7.86	-0.00457	-2.5	2.5	PASS
n66	15	20	344000	50@25	DFT_QPSK	-8.57	-0.00498	-2.5	2.5	PASS
n66	15	20	344000	1@1	DFT_QPSK	-7.21	-0.00419	-2.5	2.5	PASS
n66	15	20	344000	1@104	DFT_QPSK	-9.05	-0.00526	-2.5	2.5	PASS
n66	15	20	349000	50@25	DFT_BPSK	-0.93	-0.00053	-2.5	2.5	PASS
n66	15	20	349000	1@1	DFT_BPSK	-3.06	-0.00175	-2.5	2.5	PASS
n66	15	20	349000	1@104	DFT_BPSK	-6.10	-0.00350	-2.5	2.5	PASS
n66	15	20	349000	50@25	DFT_QPSK	-2.28	-0.00131	-2.5	2.5	PASS
n66	15	20	349000	1@1	DFT_QPSK	-4.39	-0.00252	-2.5	2.5	PASS
n66	15	20	349000	1@104	DFT_QPSK	-4.06	-0.00233	-2.5	2.5	PASS
n66	15	20	354000	50@25	DFT_BPSK	-6.18	-0.00349	-2.5	2.5	PASS
n66	15	20	354000	1@1	DFT_BPSK	-8.49	-0.00480	-2.5	2.5	PASS
n66	15	20	354000	1@104	DFT_BPSK	-5.91	-0.00334	-2.5	2.5	PASS
n66	15	20	354000	50@25	DFT_QPSK	-5.62	-0.00318	-2.5	2.5	PASS
n66	15	20	354000	1@1	DFT_QPSK	-4.17	-0.00236	-2.5	2.5	PASS
n66	15	20	354000	1@104	DFT_QPSK	-6.04	-0.00341	-2.5	2.5	PASS
n66	15	40	346000	108@54	DFT_BPSK	-3.63	-0.00210	-2.5	2.5	PASS
n66	15	40	346000	1@1	DFT_BPSK	-5.10	-0.00295	-2.5	2.5	PASS
n66	15	40	346000	1@214	DFT_BPSK	-4.02	-0.00232	-2.5	2.5	PASS


n66	15	40	346000	108@54	DFT_QPSK	-0.16	-0.00009	-2.5	2.5	PASS
n66	15	40	346000	1@1	DFT_QPSK	-2.62	-0.00151	-2.5	2.5	PASS
n66	15	40	346000	1@214	DFT_QPSK	-1.39	-0.00080	-2.5	2.5	PASS
n66	15	40	349000	108@54	DFT_BPSK	-0.95	-0.00054	-2.5	2.5	PASS
n66	15	40	349000	1@1	DFT_BPSK	-3.59	-0.00206	-2.5	2.5	PASS
n66	15	40	349000	1@214	DFT_BPSK	-2.15	-0.00123	-2.5	2.5	PASS
n66	15	40	349000	108@54	DFT_QPSK	-1.32	-0.00076	-2.5	2.5	PASS
n66	15	40	349000	1@1	DFT_QPSK	-2.34	-0.00134	-2.5	2.5	PASS
n66	15	40	349000	1@214	DFT_QPSK	-4.49	-0.00257	-2.5	2.5	PASS
n66	15	40	352000	108@54	DFT_BPSK	-1.01	-0.00057	-2.5	2.5	PASS
n66	15	40	352000	1@1	DFT_BPSK	-2.74	-0.00156	-2.5	2.5	PASS
n66	15	40	352000	1@214	DFT_BPSK	-4.67	-0.00265	-2.5	2.5	PASS
n66	15	40	352000	108@54	DFT_QPSK	-2.27	-0.00129	-2.5	2.5	PASS
n66	15	40	352000	1@1	DFT_QPSK	-1.00	-0.00057	-2.5	2.5	PASS
n66	15	40	352000	1@214	DFT_QPSK	-2.83	-0.00161	-2.5	2.5	PASS

3 Peak-to-Average Ratio for NR FR1


<i>Band</i>	<i>SCS (kHz)</i>	<i>Bandwidth (MHz)</i>	<i>UL Channel</i>	<i>RB Allocation</i>	<i>Modulation</i>	<i>Result (dB)</i>	<i>high Limit (dB)</i>	<i>Verdict</i>
n66	15	5	342500	25@0	DFT_BPSK	4.11	13	PASS
n66	15	5	342500	25@0	DFT_QPSK	4.95	13	PASS
n66	15	5	342500	25@0	DFT_QAM16	5.92	13	PASS
n66	15	5	342500	25@0	DFT_QAM64	6.04	13	PASS
n66	15	5	342500	25@0	DFT_QAM256	6.26	13	PASS
n66	15	5	349000	25@0	DFT_BPSK	4.18	13	PASS
n66	15	5	349000	25@0	DFT_QPSK	5.30	13	PASS
n66	15	5	349000	25@0	DFT_QAM16	6.11	13	PASS
n66	15	5	349000	25@0	DFT_QAM64	6.54	13	PASS
n66	15	5	349000	25@0	DFT_QAM256	6.50	13	PASS
n66	15	5	355500	25@0	DFT_BPSK	4.84	13	PASS
n66	15	5	355500	25@0	DFT_QPSK	5.29	13	PASS
n66	15	5	355500	25@0	DFT_QAM16	5.90	13	PASS
n66	15	5	355500	25@0	DFT_QAM64	6.27	13	PASS
n66	15	5	355500	25@0	DFT_QAM256	6.57	13	PASS
n66	15	10	343000	50@0	DFT_BPSK	4.36	13	PASS
n66	15	10	343000	50@0	DFT_QPSK	5.11	13	PASS
n66	15	10	343000	50@0	DFT_QAM16	5.96	13	PASS
n66	15	10	343000	50@0	DFT_QAM64	6.18	13	PASS
n66	15	10	343000	50@0	DFT_QAM256	6.63	13	PASS
n66	15	10	349000	50@0	DFT_BPSK	4.35	13	PASS
n66	15	10	349000	50@0	DFT_QPSK	5.19	13	PASS
n66	15	10	349000	50@0	DFT_QAM16	6.02	13	PASS
n66	15	10	349000	50@0	DFT_QAM64	6.41	13	PASS
n66	15	10	349000	50@0	DFT_QAM256	6.49	13	PASS
n66	15	10	355000	50@0	DFT_BPSK	4.70	13	PASS
n66	15	10	355000	50@0	DFT_QPSK	5.02	13	PASS
n66	15	10	355000	50@0	DFT_QAM16	5.84	13	PASS
n66	15	10	355000	50@0	DFT_QAM64	6.15	13	PASS
n66	15	10	355000	50@0	DFT_QAM256	6.60	13	PASS
n66	15	15	343500	75@0	DFT_BPSK	4.37	13	PASS
n66	15	15	343500	75@0	DFT_QPSK	5.38	13	PASS
n66	15	15	343500	75@0	DFT_QAM16	6.25	13	PASS
n66	15	15	343500	75@0	DFT_QAM64	6.34	13	PASS
n66	15	15	343500	75@0	DFT_QAM256	6.50	13	PASS
n66	15	15	349000	75@0	DFT_BPSK	4.54	13	PASS
n66	15	15	349000	75@0	DFT_QPSK	5.26	13	PASS
n66	15	15	349000	75@0	DFT_QAM16	6.08	13	PASS
n66	15	15	349000	75@0	DFT_QAM64	6.11	13	PASS

n66	15	15	349000	75@0	DFT_QAM256	6.40	13	PASS
n66	15	15	354500	75@0	DFT_BPSK	4.44	13	PASS
n66	15	15	354500	75@0	DFT_QPSK	5.15	13	PASS
n66	15	15	354500	75@0	DFT_QAM16	6.03	13	PASS
n66	15	15	354500	75@0	DFT_QAM64	6.21	13	PASS
n66	15	15	354500	75@0	DFT_QAM256	6.53	13	PASS
n66	15	20	344000	100@0	DFT_BPSK	4.70	13	PASS
n66	15	20	344000	100@0	DFT_QPSK	5.47	13	PASS
n66	15	20	344000	100@0	DFT_QAM16	6.02	13	PASS
n66	15	20	344000	100@0	DFT_QAM64	6.39	13	PASS
n66	15	20	344000	100@0	DFT_QAM256	6.43	13	PASS
n66	15	20	349000	100@0	DFT_BPSK	4.42	13	PASS
n66	15	20	349000	100@0	DFT_QPSK	5.44	13	PASS
n66	15	20	349000	100@0	DFT_QAM16	6.20	13	PASS
n66	15	20	349000	100@0	DFT_QAM64	6.52	13	PASS
n66	15	20	349000	100@0	DFT_QAM256	6.42	13	PASS
n66	15	20	354000	100@0	DFT_BPSK	5.22	13	PASS
n66	15	20	354000	100@0	DFT_QPSK	5.76	13	PASS
n66	15	20	354000	100@0	DFT_QAM16	6.01	13	PASS
n66	15	20	354000	100@0	DFT_QAM64	6.35	13	PASS
n66	15	20	354000	100@0	DFT_QAM256	6.41	13	PASS
n66	15	40	346000	216@0	DFT_BPSK	4.89	13	PASS
n66	15	40	346000	216@0	DFT_QPSK	5.43	13	PASS
n66	15	40	346000	216@0	DFT_QAM16	6.05	13	PASS
n66	15	40	346000	216@0	DFT_QAM64	6.51	13	PASS
n66	15	40	346000	216@0	DFT_QAM256	6.53	13	PASS
n66	15	40	349000	216@0	DFT_BPSK	4.34	13	PASS
n66	15	40	349000	216@0	DFT_QPSK	5.40	13	PASS
n66	15	40	349000	216@0	DFT_QAM16	6.12	13	PASS
n66	15	40	349000	216@0	DFT_QAM64	6.40	13	PASS
n66	15	40	349000	216@0	DFT_QAM256	6.60	13	PASS
n66	15	40	352000	216@0	DFT_BPSK	4.44	13	PASS
n66	15	40	352000	216@0	DFT_QPSK	5.34	13	PASS
n66	15	40	352000	216@0	DFT_QAM16	6.10	13	PASS
n66	15	40	352000	216@0	DFT_QAM64	6.41	13	PASS
n66	15	40	352000	216@0	DFT_QAM256	6.55	13	PASS


n66 SCS=15kHz DFT_BPSK BW=10MHz Channel=343000 RB=50@0

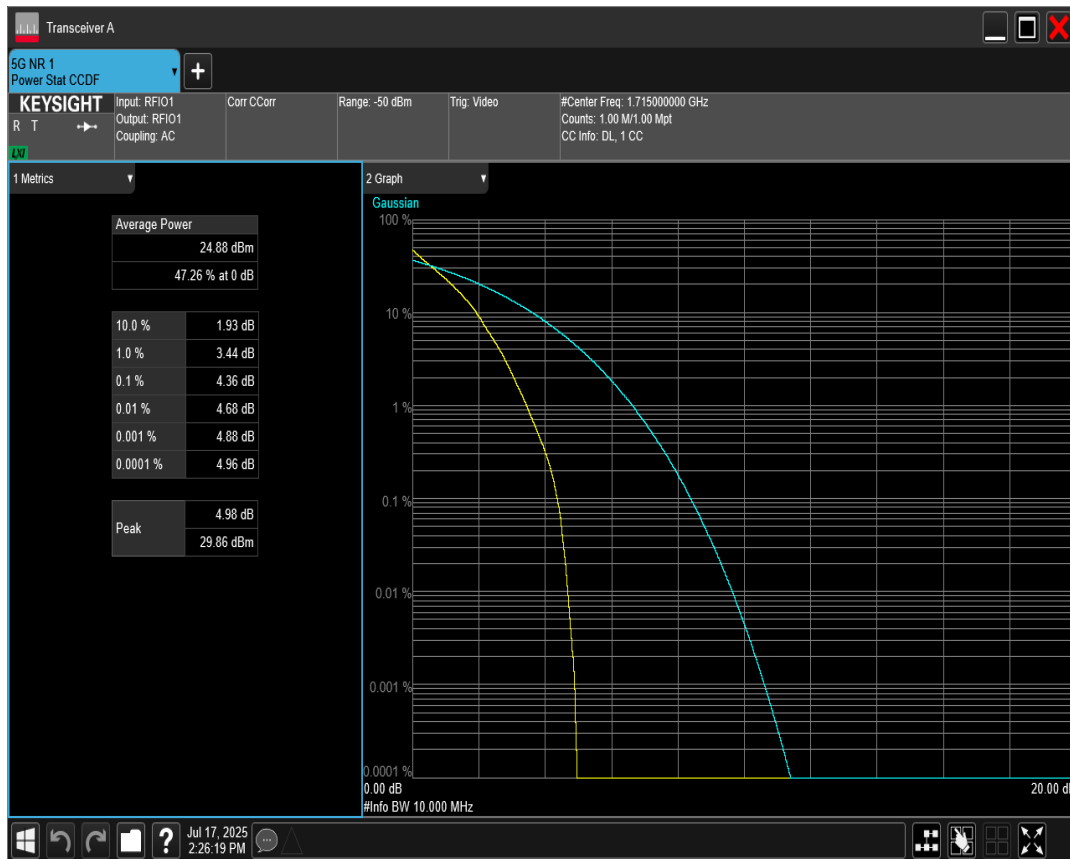


n66 SCS=15kHz DFT_BPSK BW=10MHz Channel=355000 RB=50@0

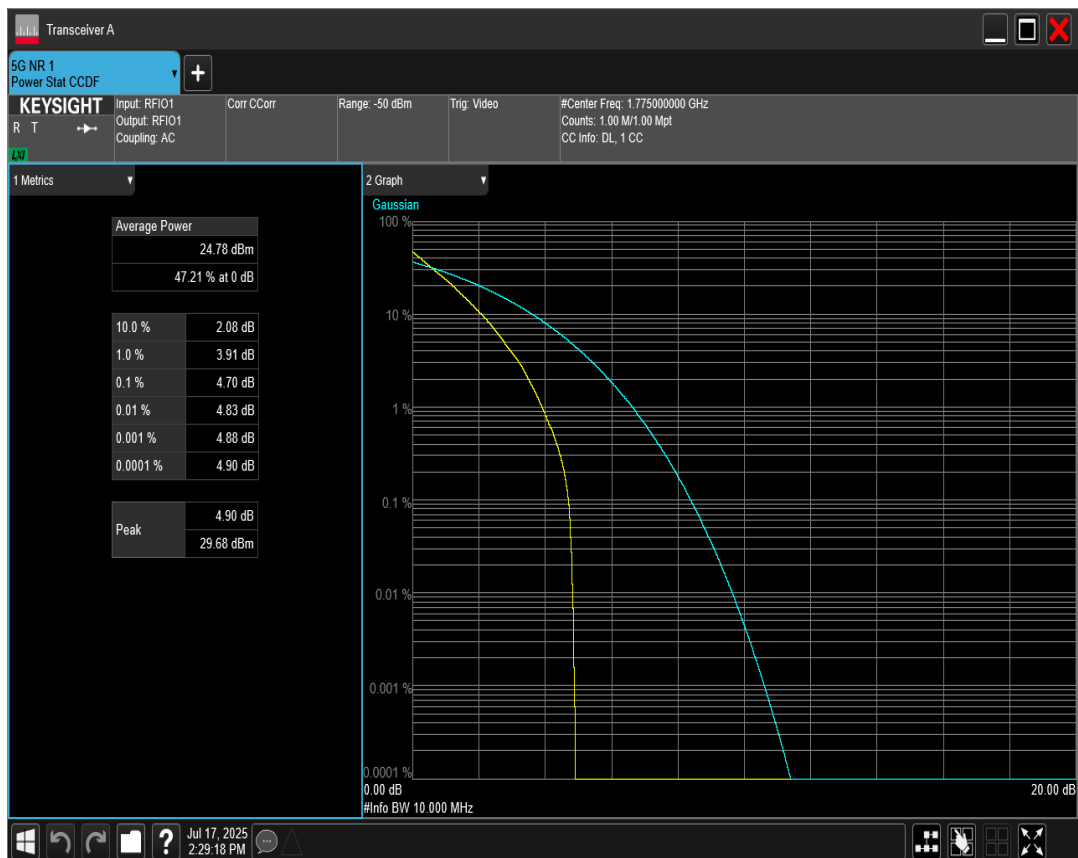


n66 SCS=15kHz DFT_BPSK BW=10MHz Channel=349000 RB=50@0

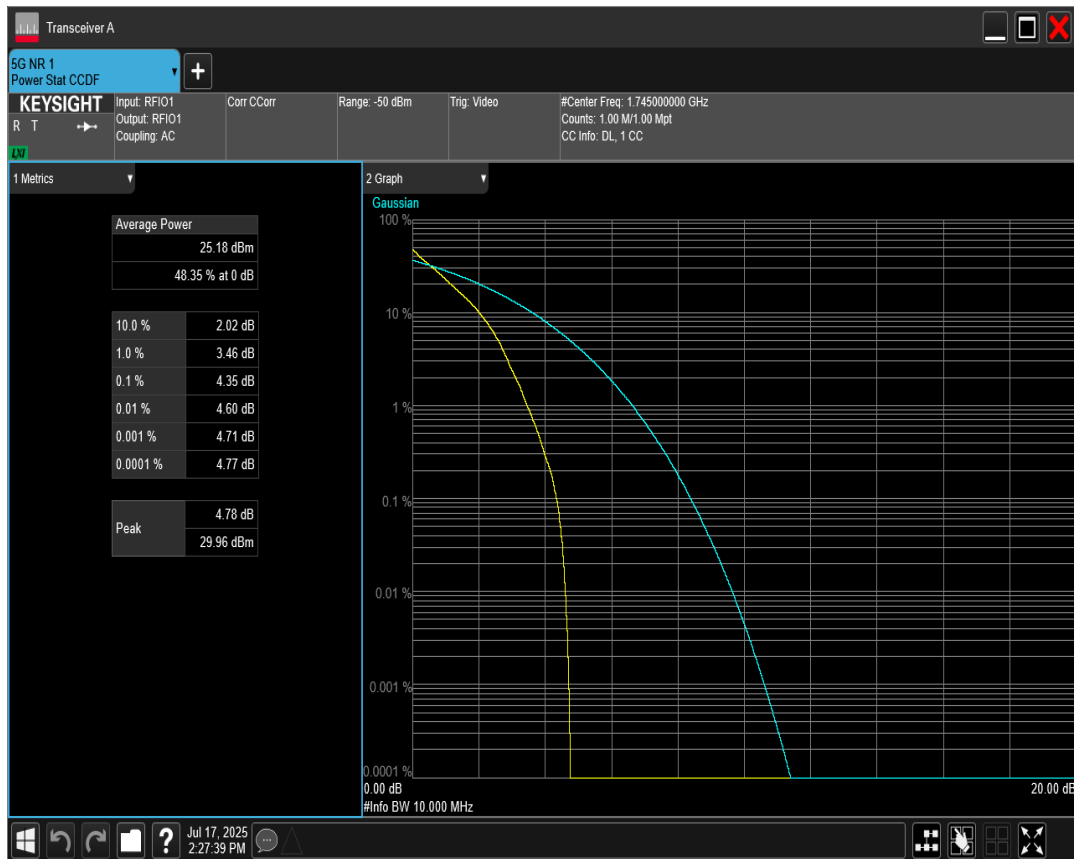


n66 SCS=15kHz DFT_BPSK BW=15MHz Channel=354500 RB=75@0

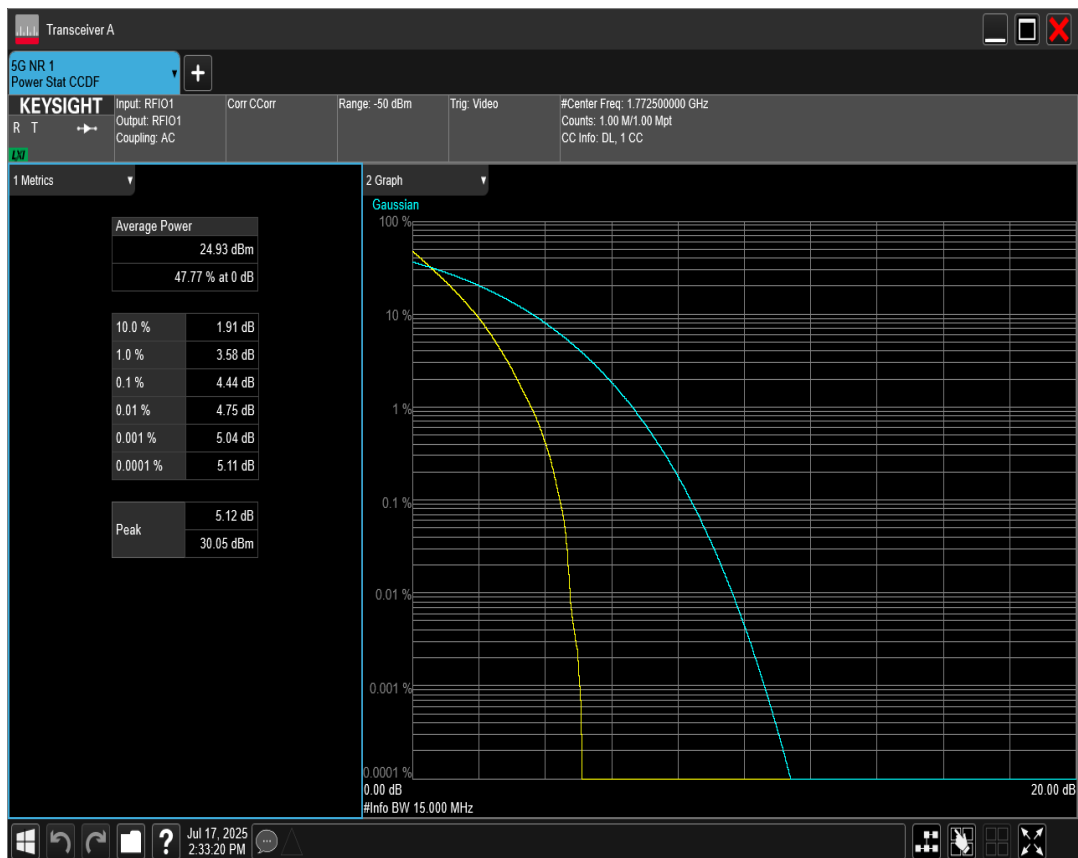


n66 SCS=15kHz DFT_BPSK BW=15MHz Channel=349000 RB=75@0

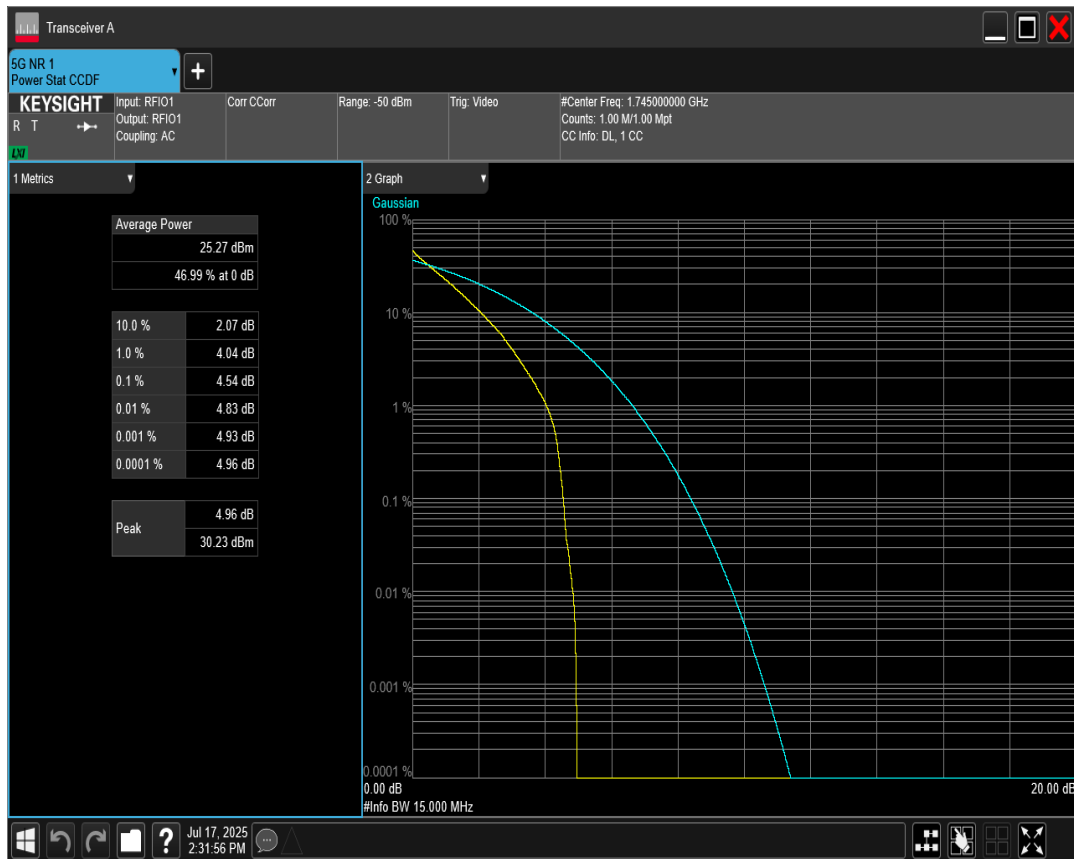


n66 SCS=15kHz DFT_BPSK BW=15MHz Channel=343500 RB=75@0

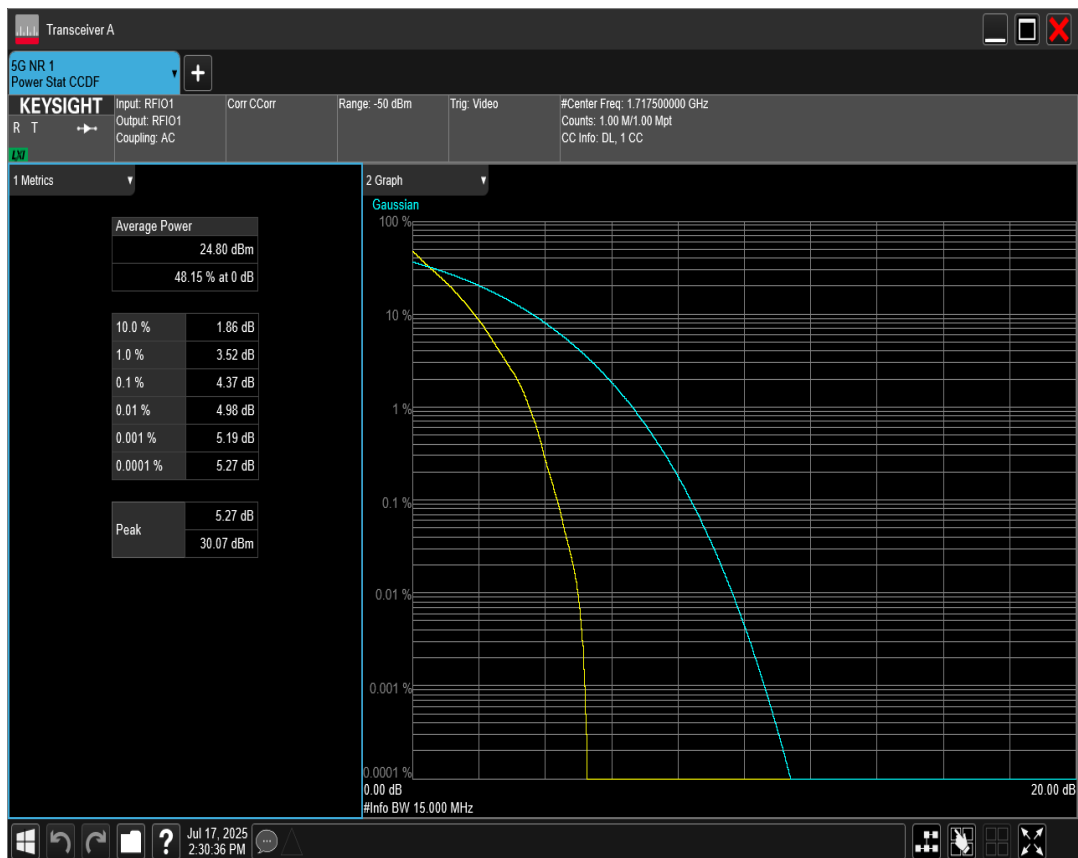


n66 SCS=15kHz DFT_BPSK BW=20MHz Channel=354000 RB=100@0

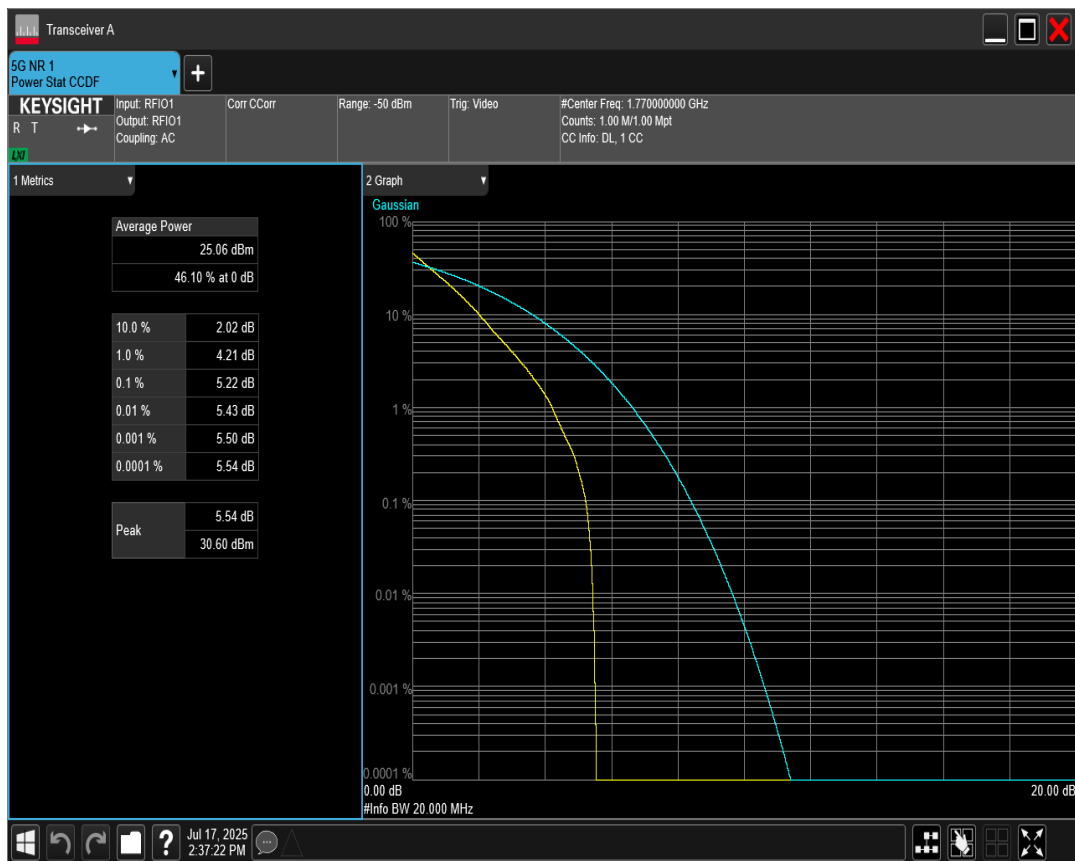


n66 SCS=15kHz DFT_BPSK BW=20MHz Channel=349000 RB=100@0

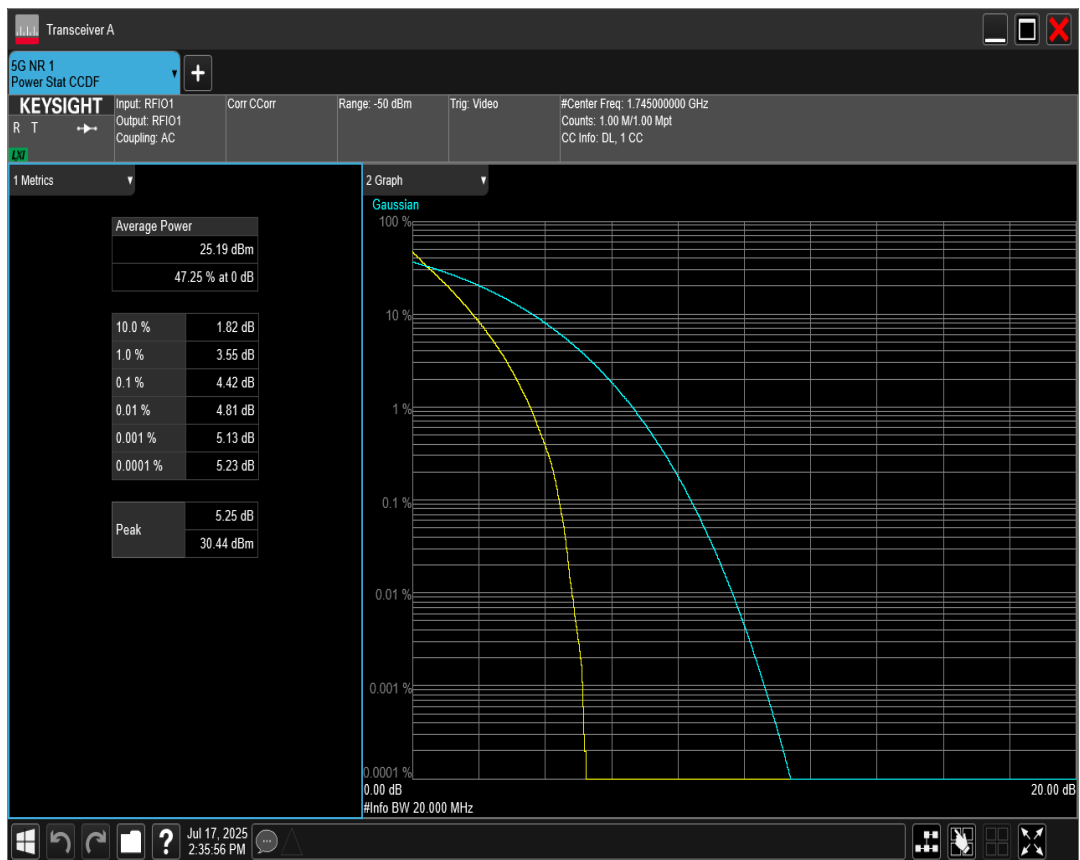


n66 SCS=15kHz DFT_BPSK BW=20MHz Channel=344000 RB=100@0

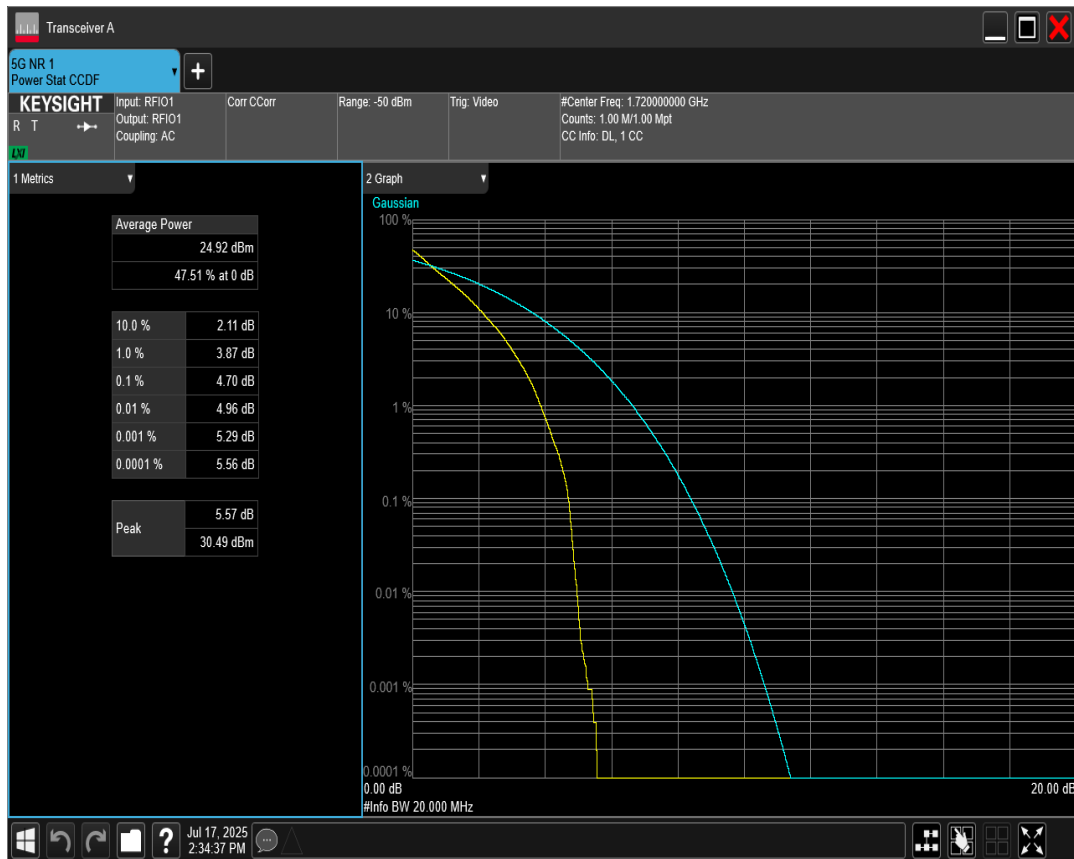


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=352000 RB=216@0

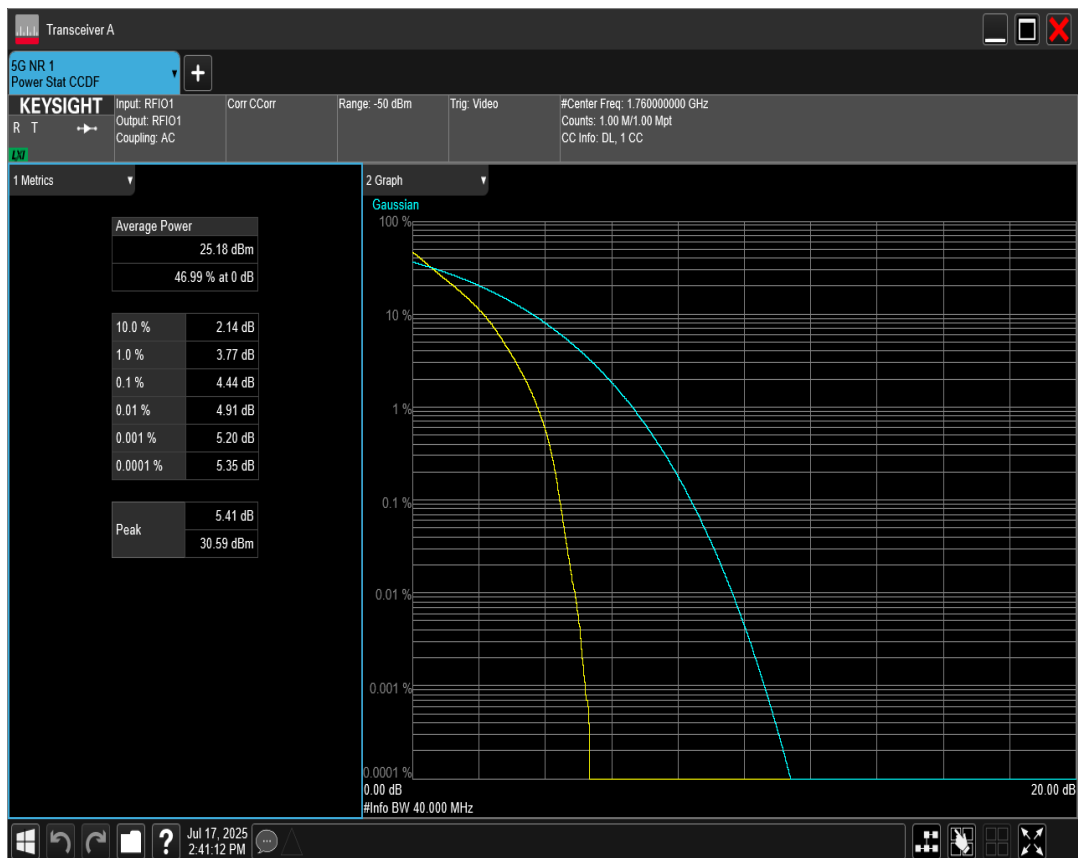


n66 SCS=15kHz DFT_BPSK BW=5MHz Channel=342500 RB=25@0

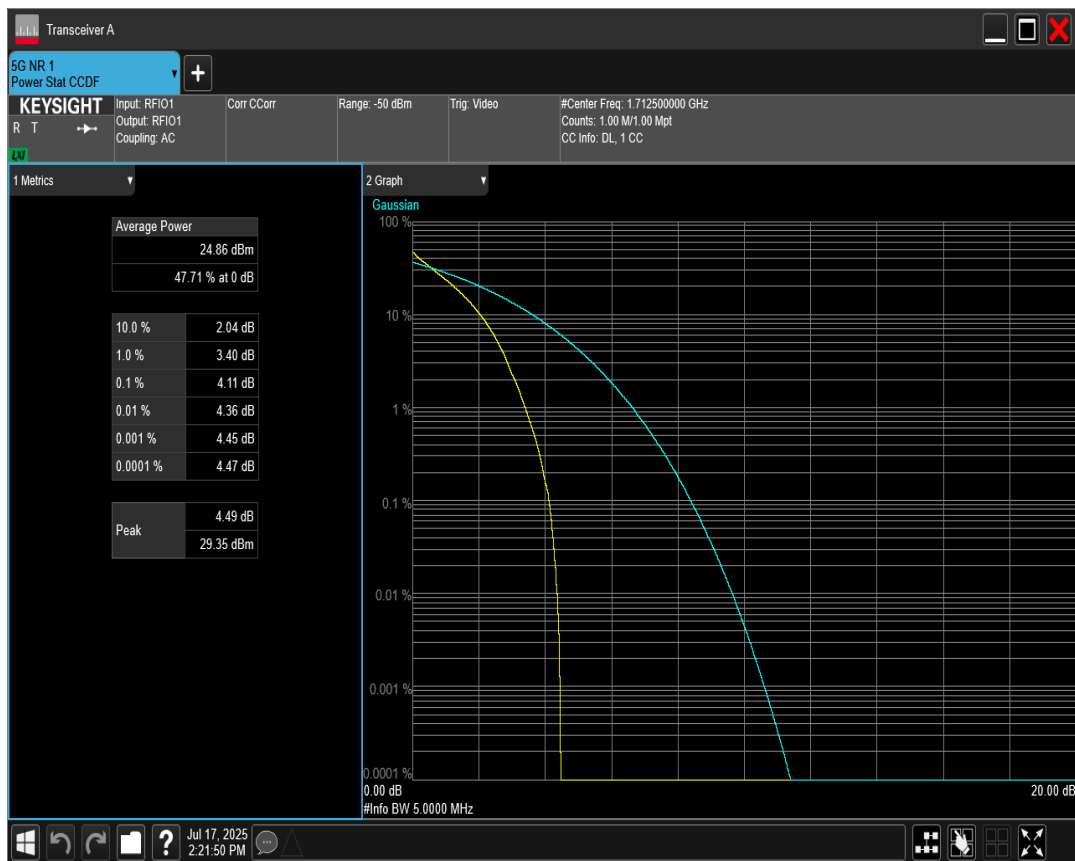


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=346000 RB=216@0

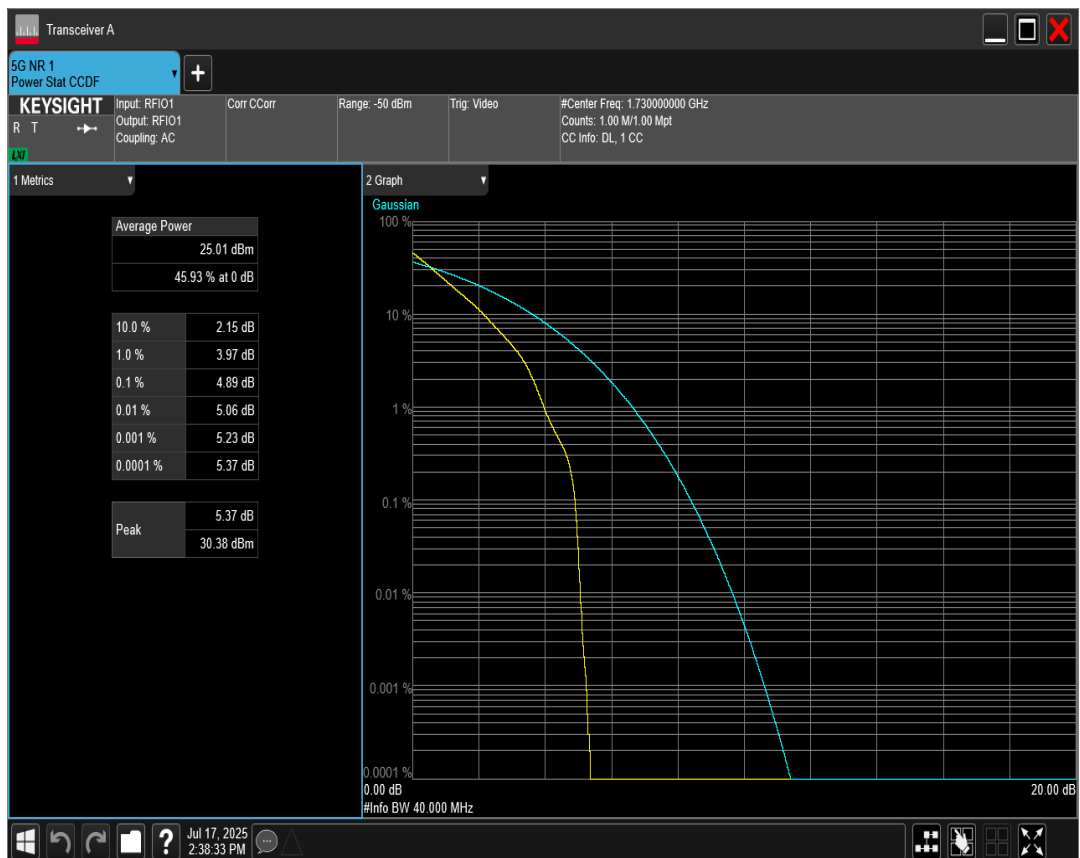


n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=349000 RB=216@0

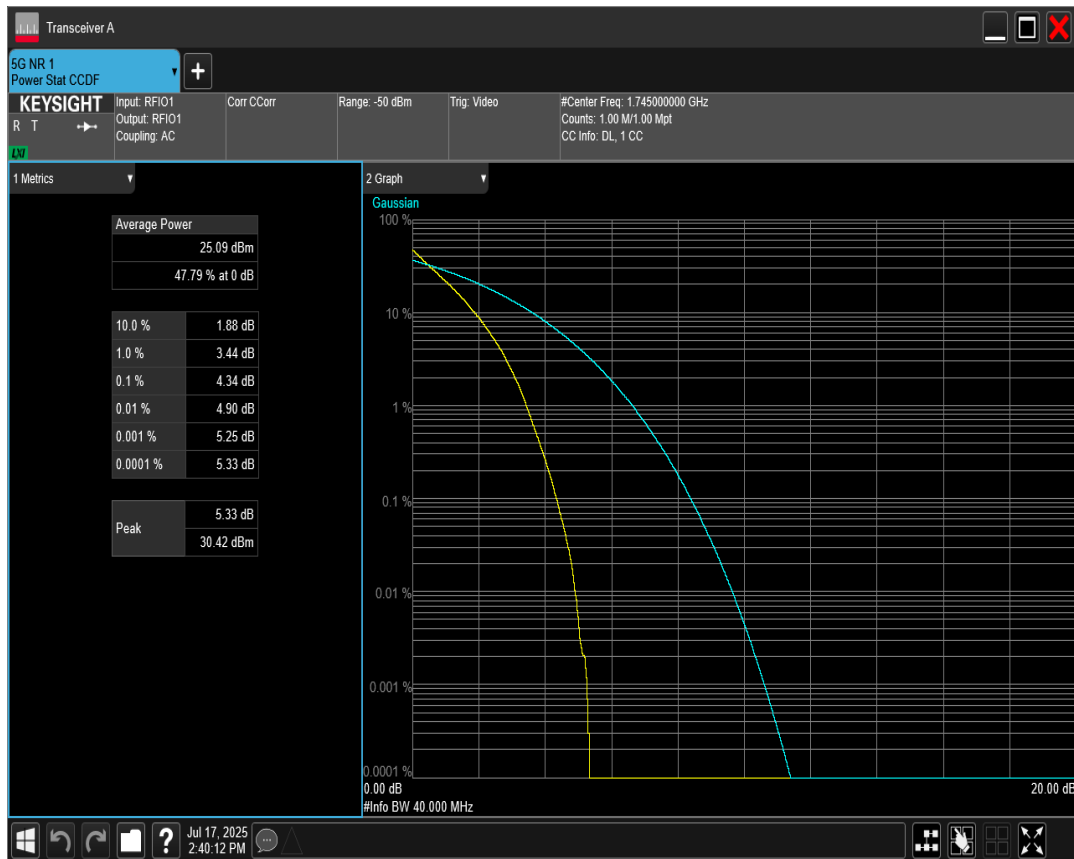


n66 SCS=15kHz DFT_BPSK BW=5MHz Channel=355500 RB=25@0

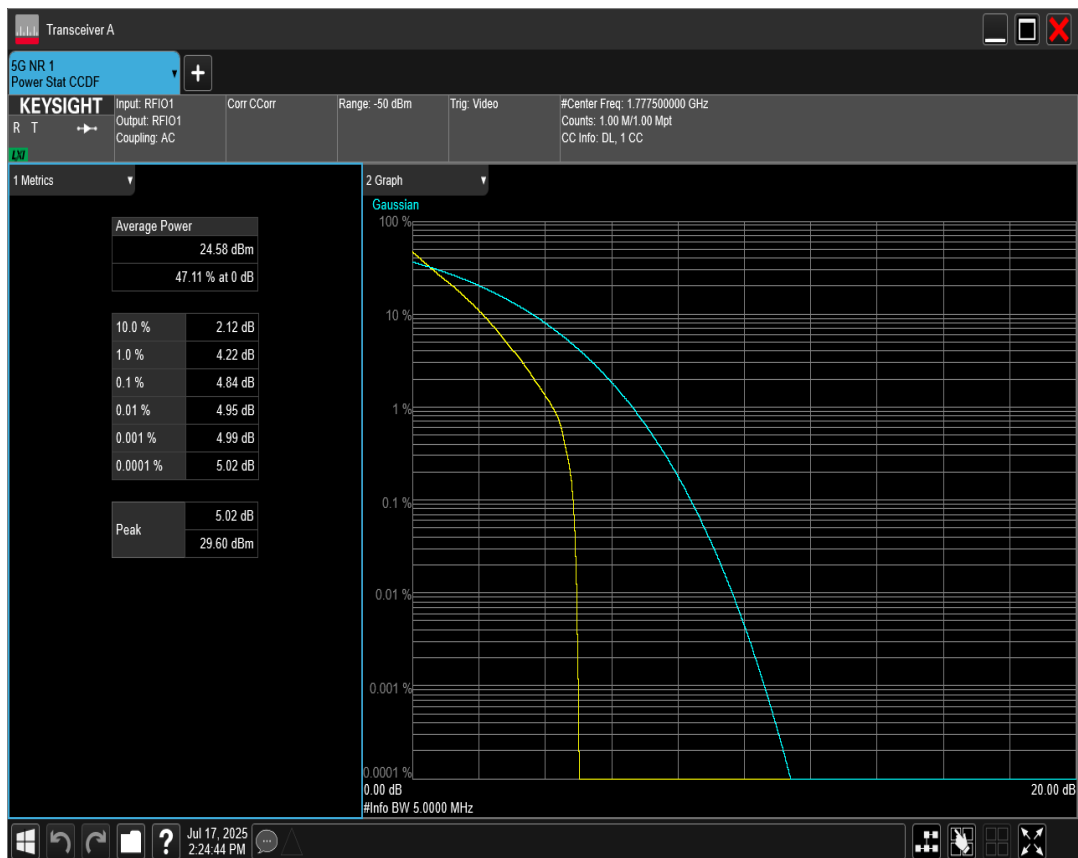


n66 SCS=15kHz DFT_BPSK BW=5MHz Channel=349000 RB=25@0

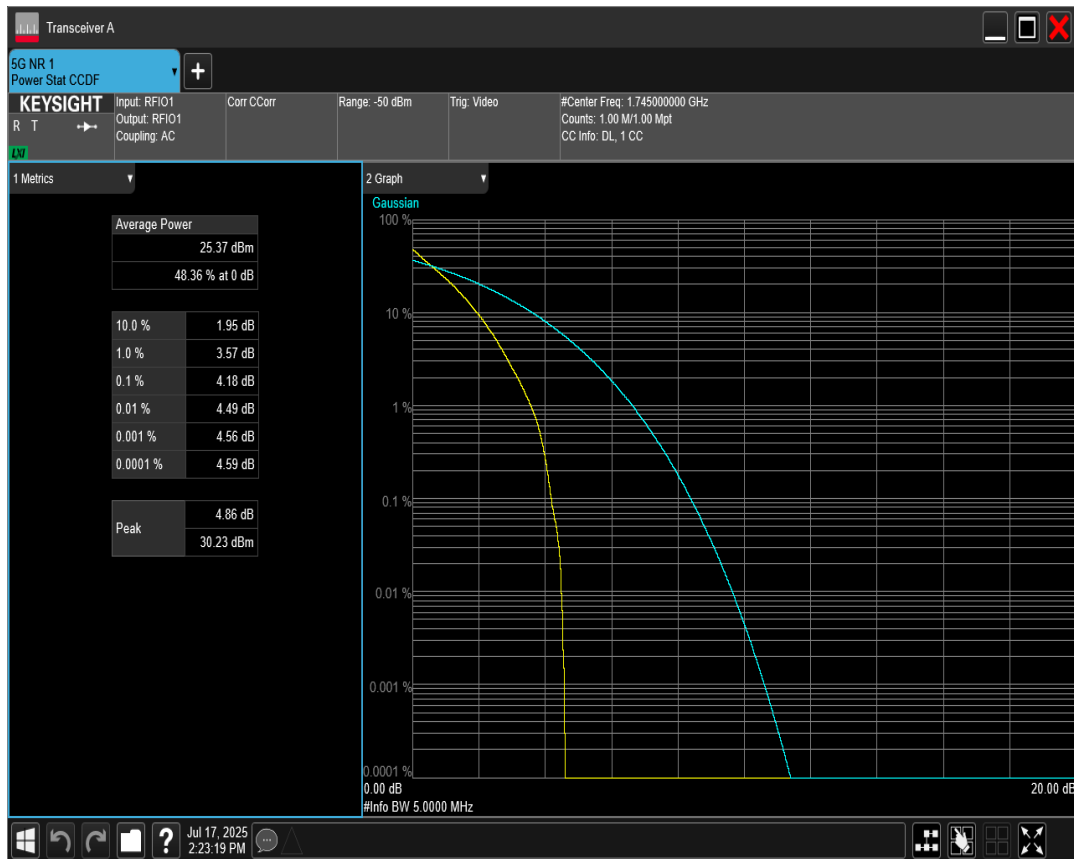


n66 SCS=15kHz DFT_QAM16 BW=15MHz Channel=343500 RB=75@0

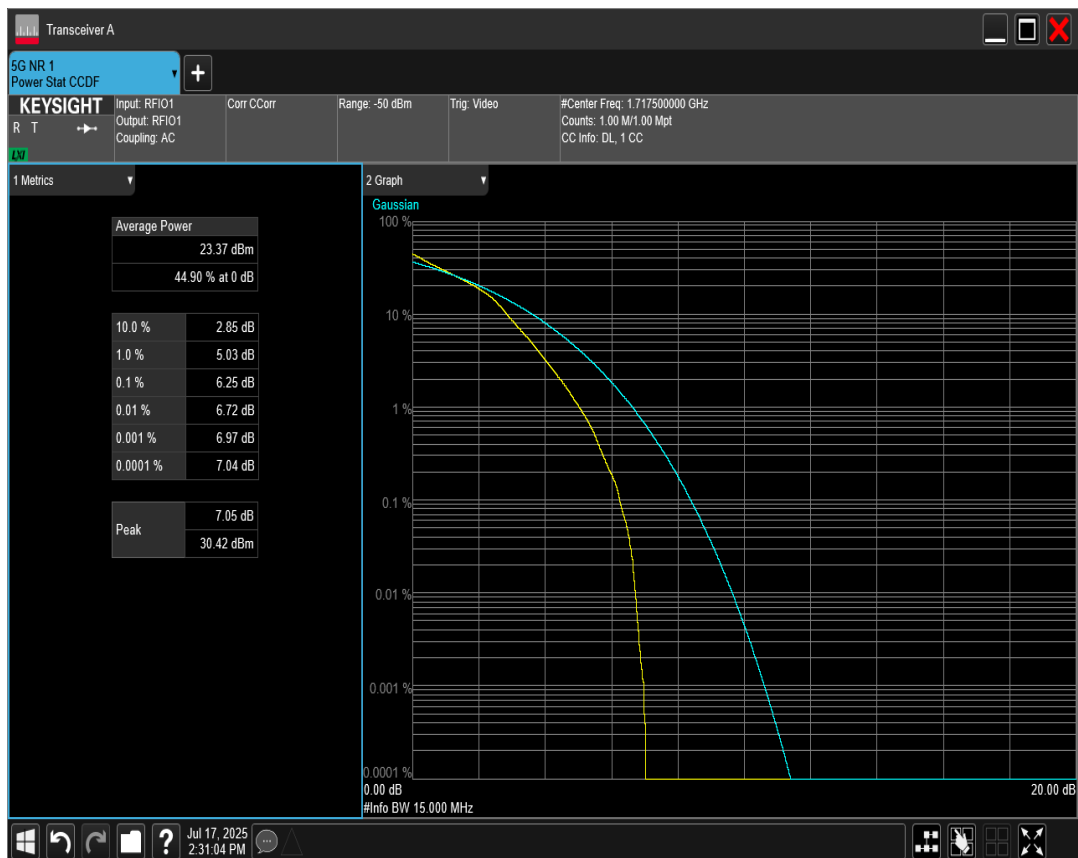


n66 SCS=15kHz DFT_QAM16 BW=15MHz Channel=349000 RB=75@0

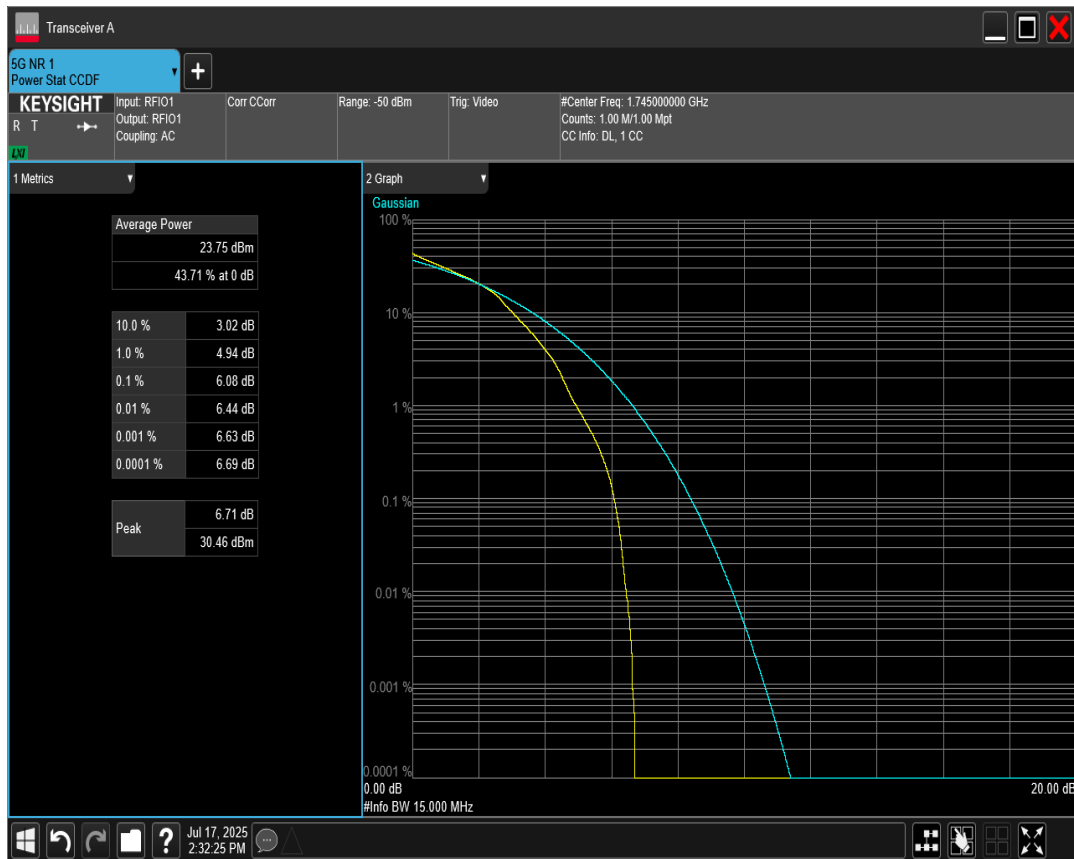


n66 SCS=15kHz DFT_QAM16 BW=10MHz Channel=355000 RB=50@0

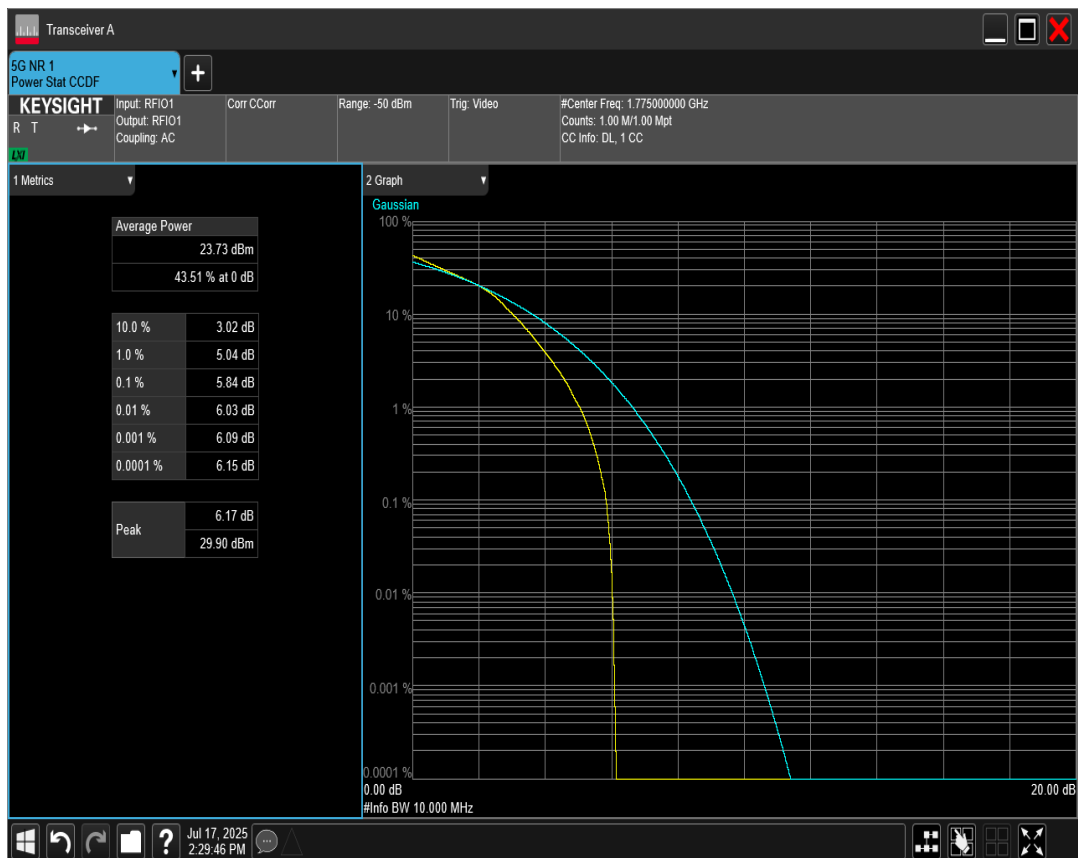


n66 SCS=15kHz DFT_QAM16 BW=10MHz Channel=343000 RB=50@0

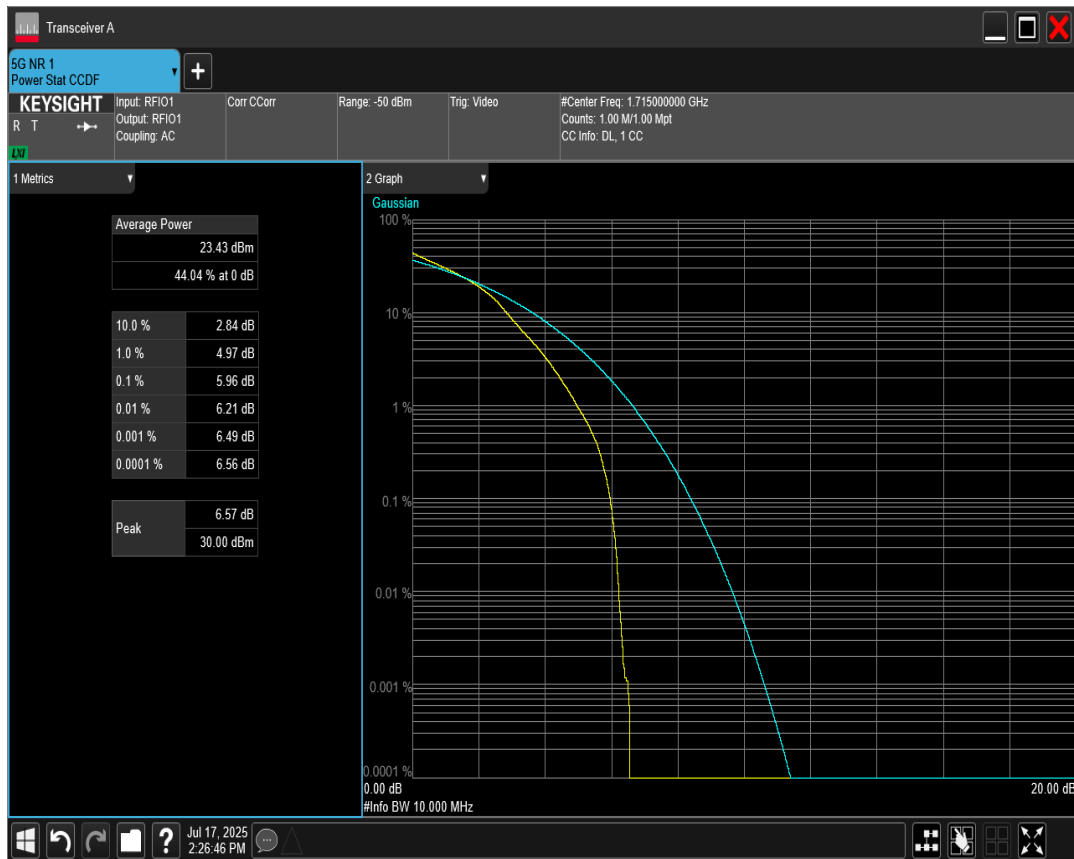


n66 SCS=15kHz DFT_QAM16 BW=10MHz Channel=349000 RB=50@0

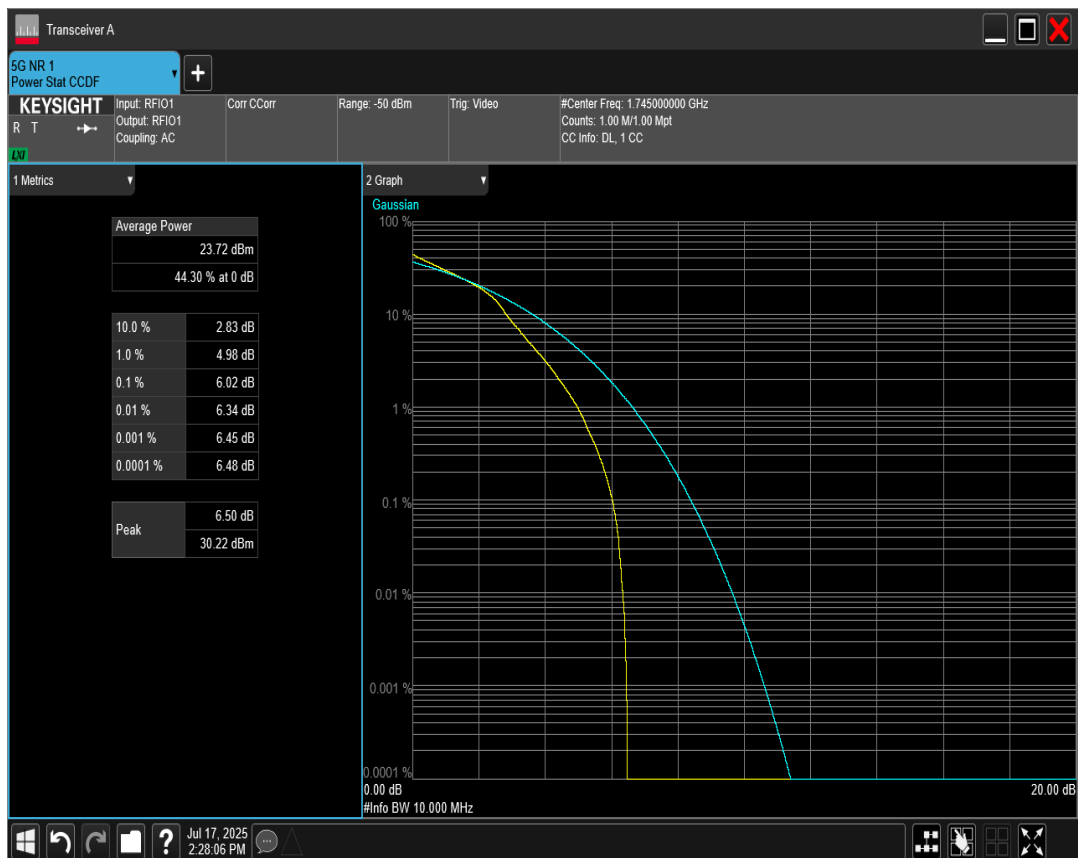


n66 SCS=15kHz DFT_QAM16 BW=20MHz Channel=349000 RB=100@0

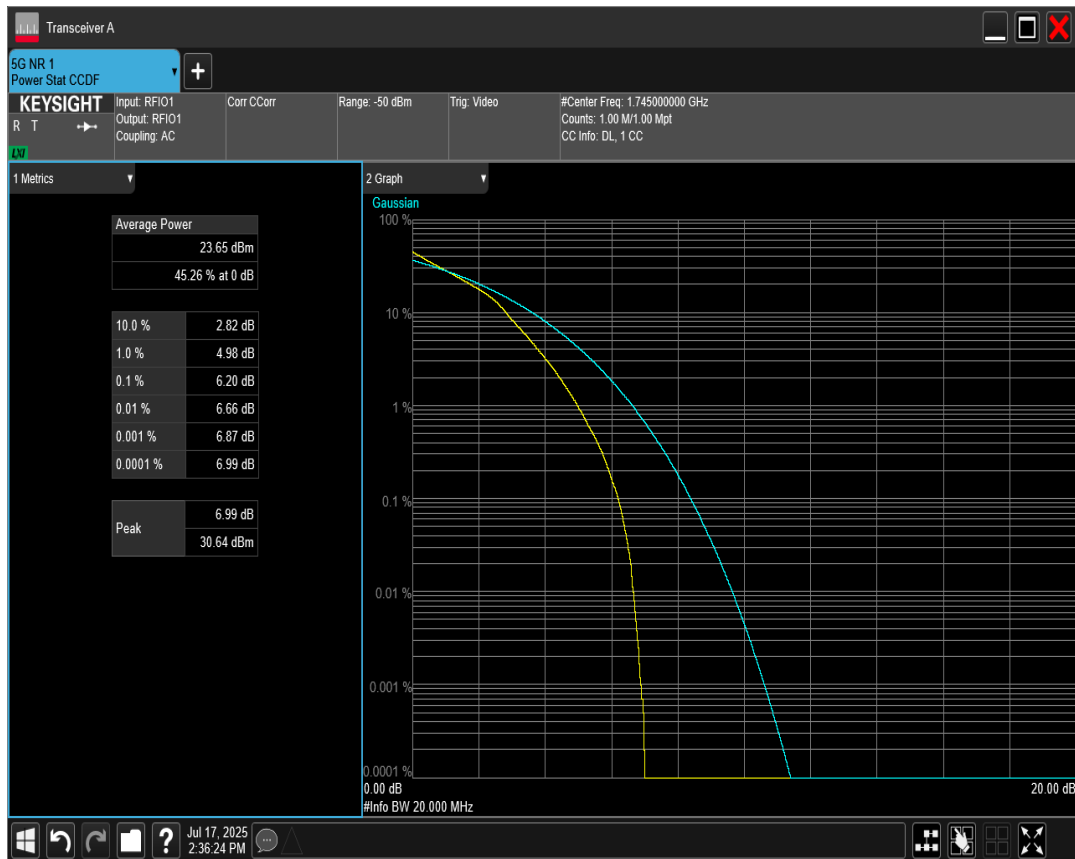


n66 SCS=15kHz DFT_QAM16 BW=20MHz Channel=354000 RB=100@0

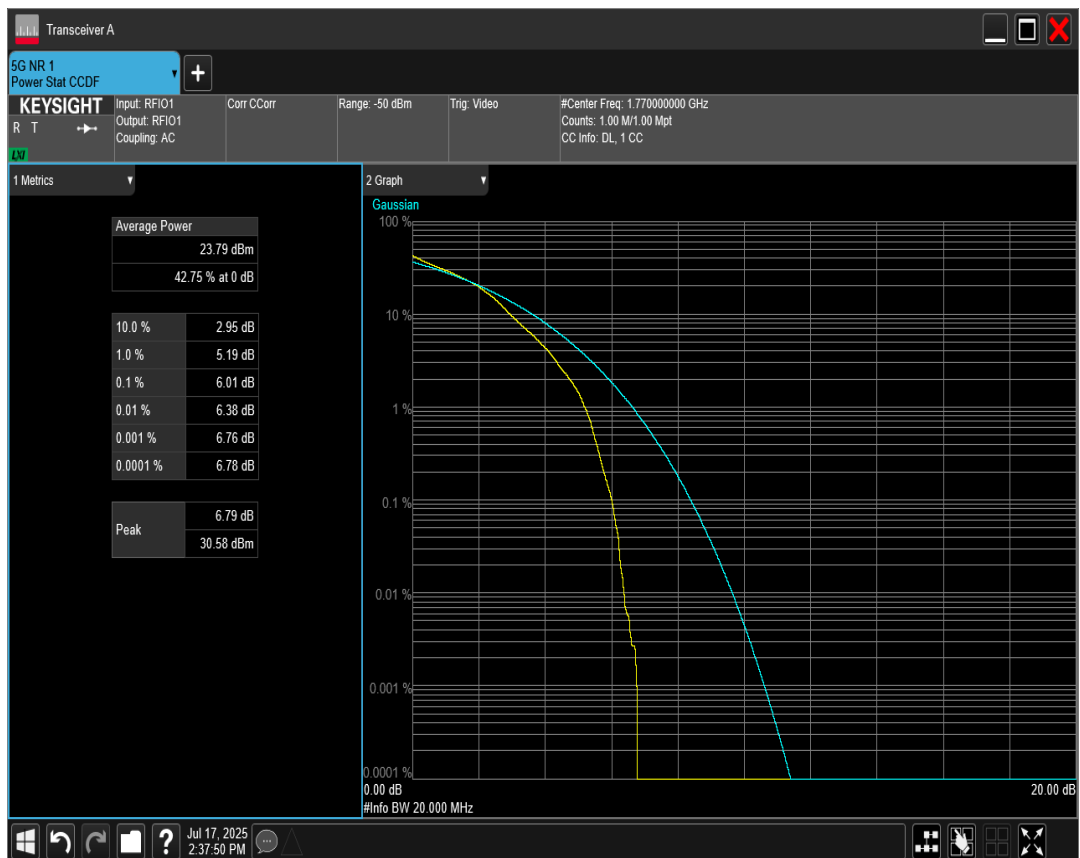


n66 SCS=15kHz DFT_QAM16 BW=15MHz Channel=354500 RB=75@0

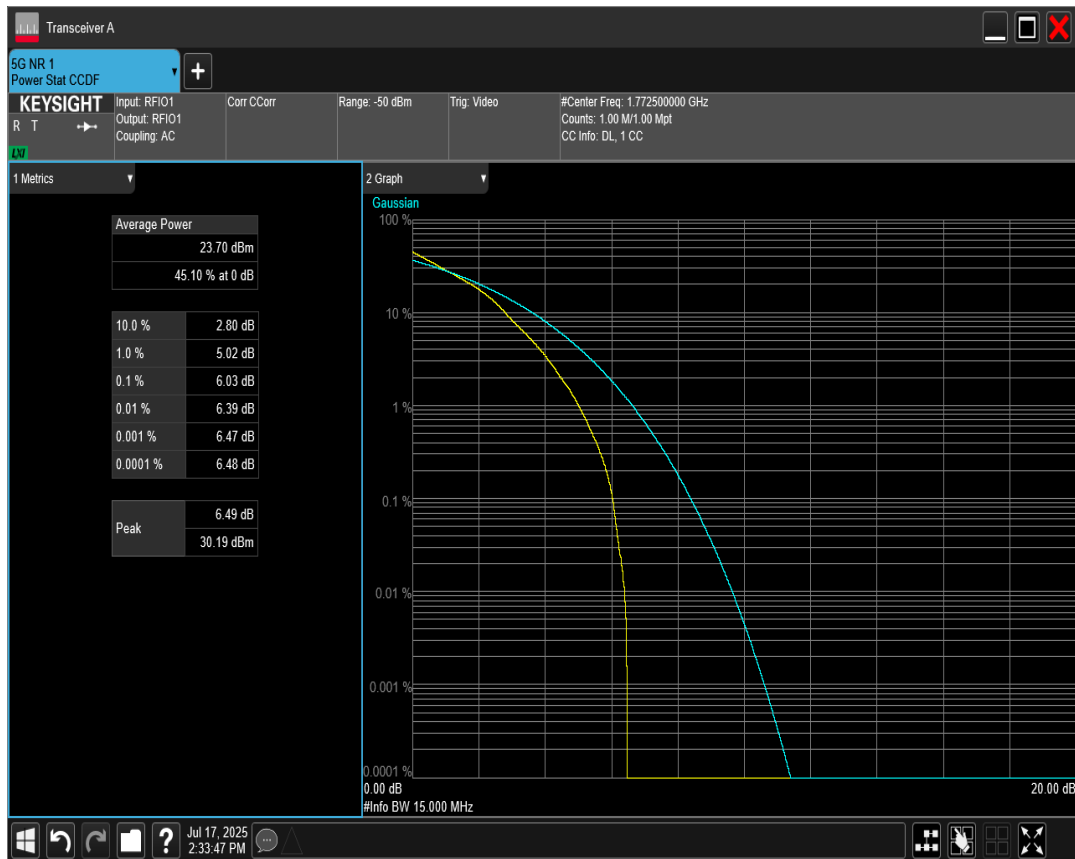


n66 SCS=15kHz DFT_QAM16 BW=20MHz Channel=344000 RB=100@0

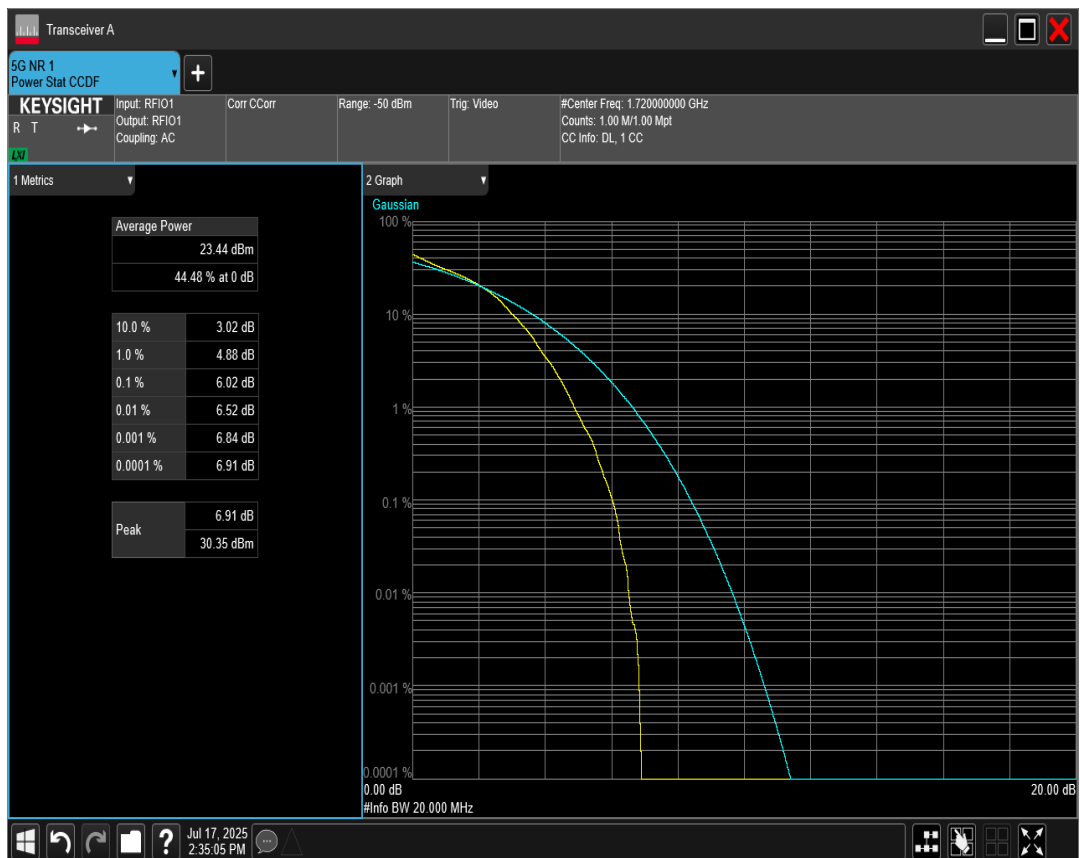


n66 SCS=15kHz DFT_QAM16 BW=5MHz Channel=342500 RB=25@0

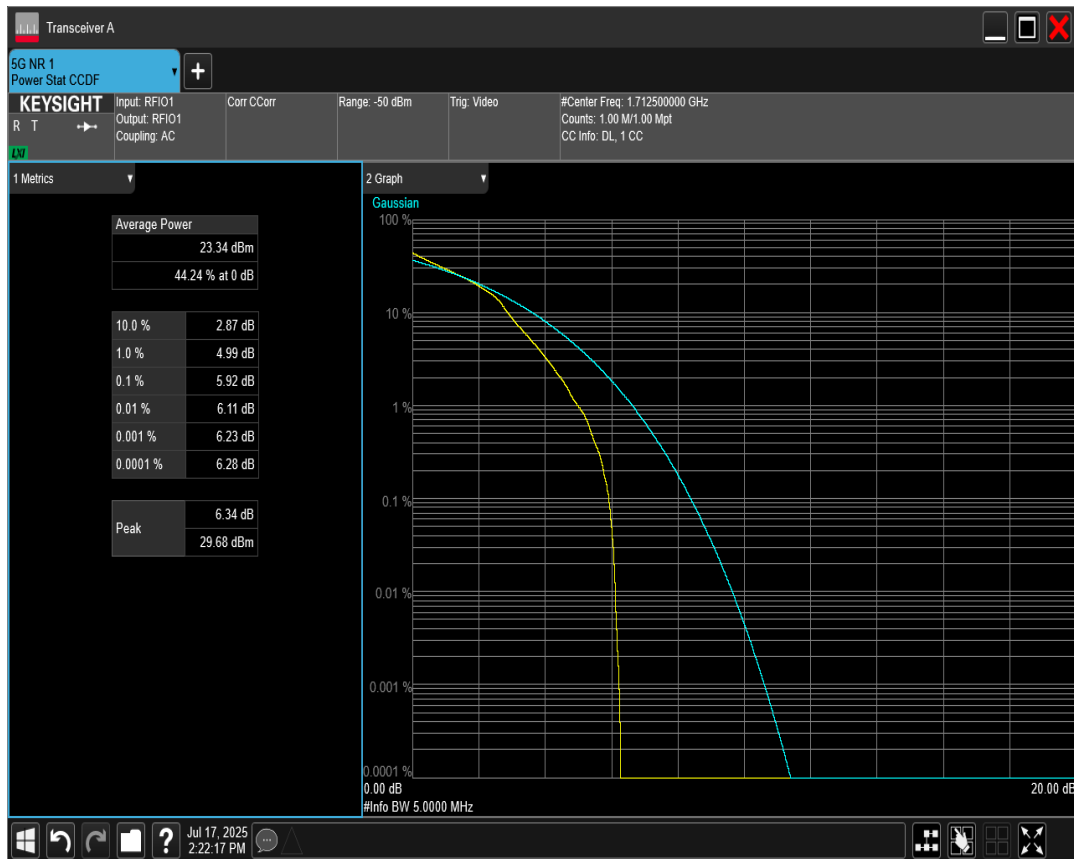


n66 SCS=15kHz DFT_QAM16 BW=5MHz Channel=349000 RB=25@0

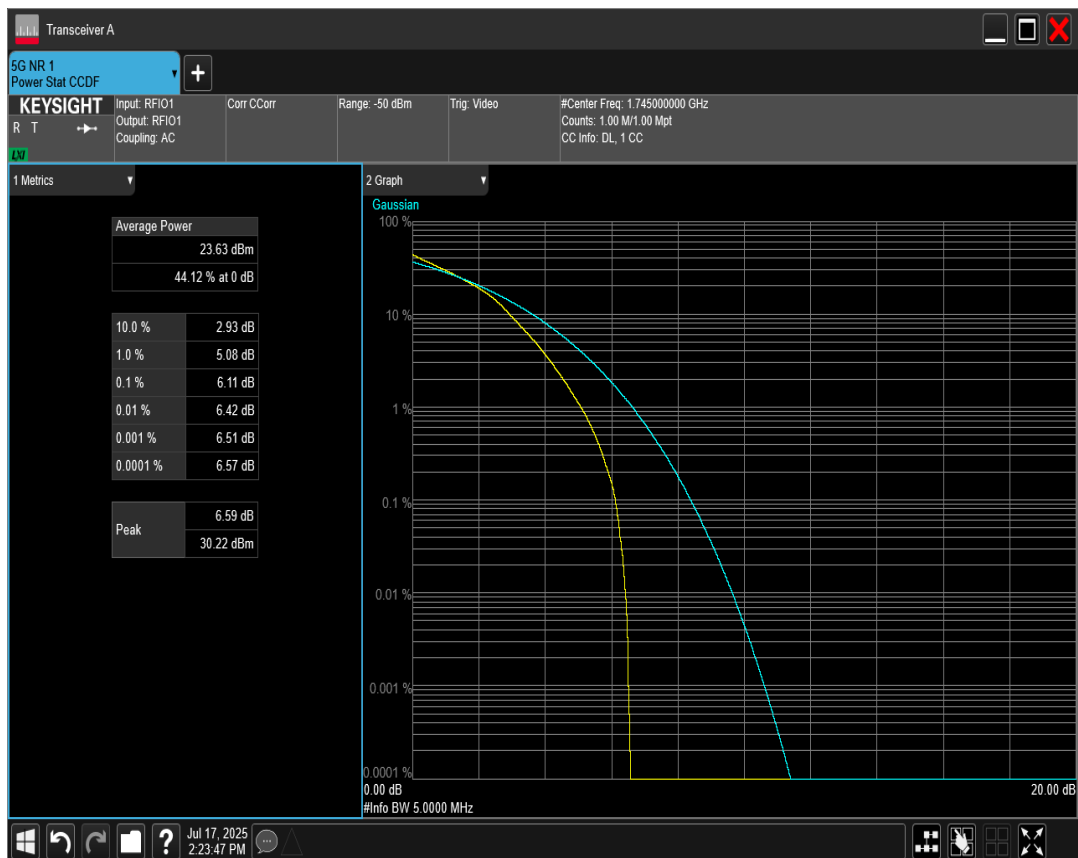


n66 SCS=15kHz DFT_QAM16 BW=40MHz Channel=352000 RB=216@0

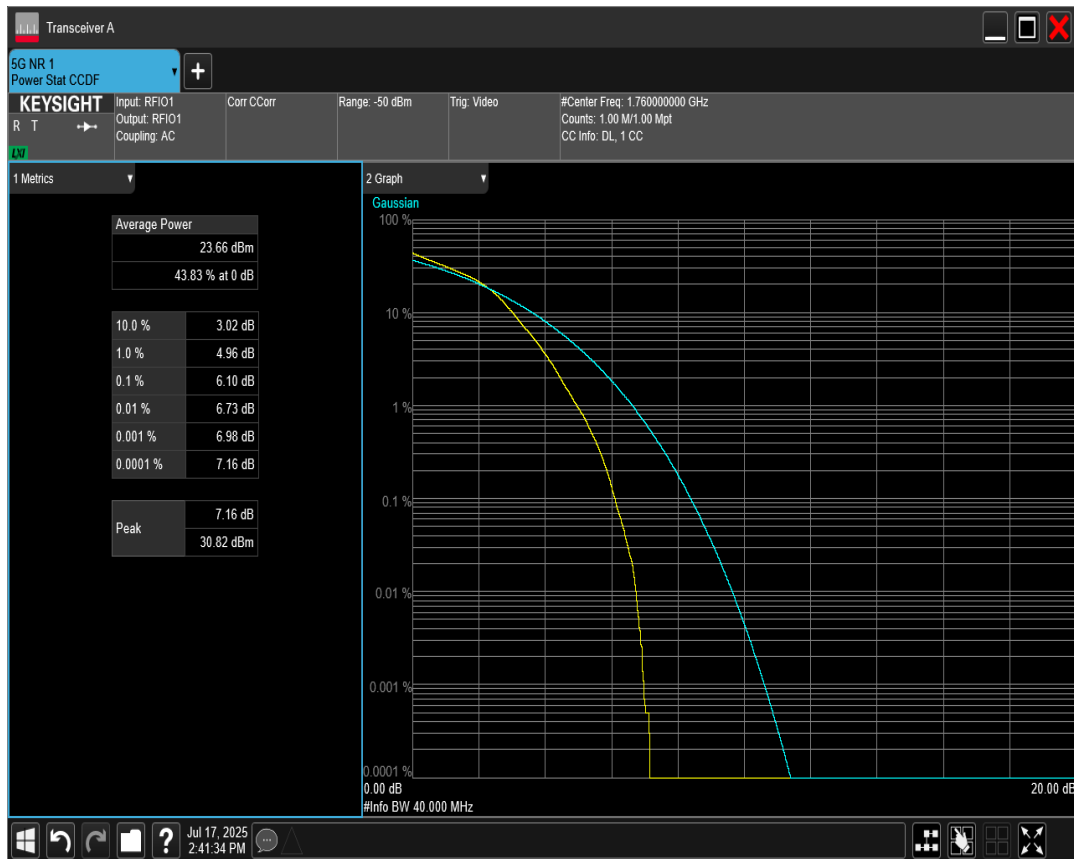


n66 SCS=15kHz DFT_QAM16 BW=40MHz Channel=346000 RB=216@0

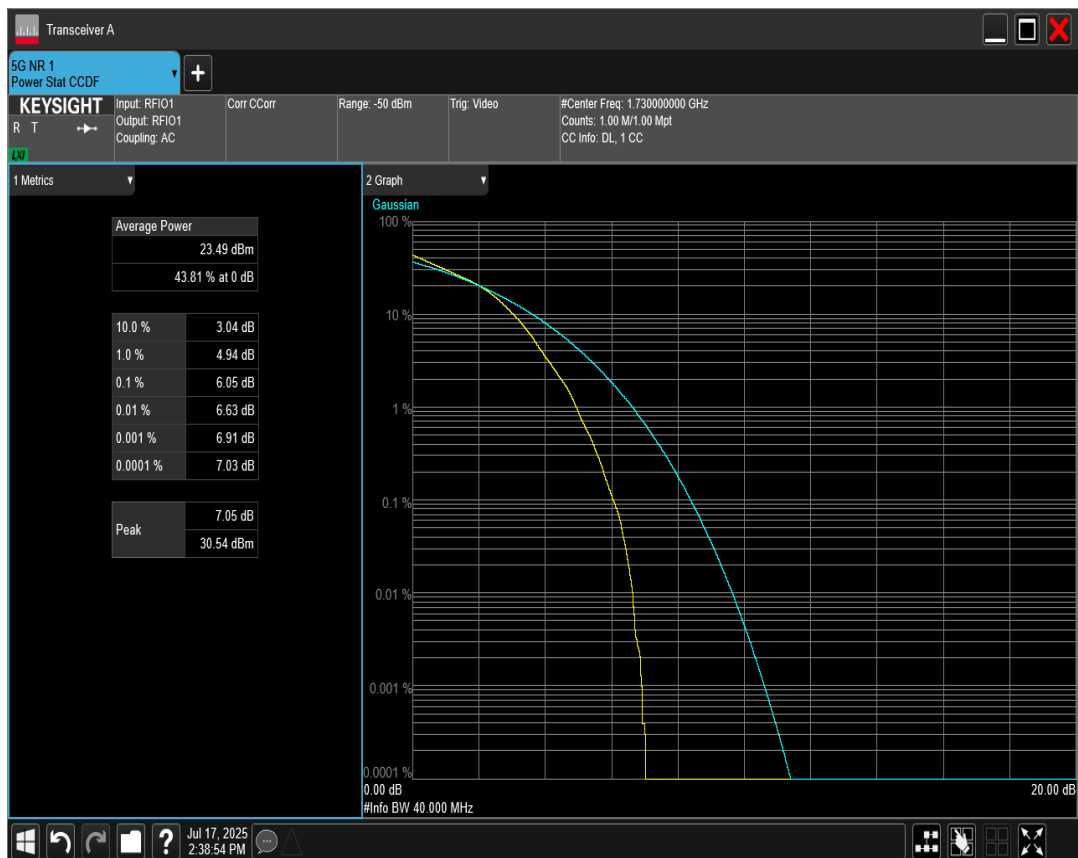


n66 SCS=15kHz DFT_QAM16 BW=40MHz Channel=349000 RB=216@0

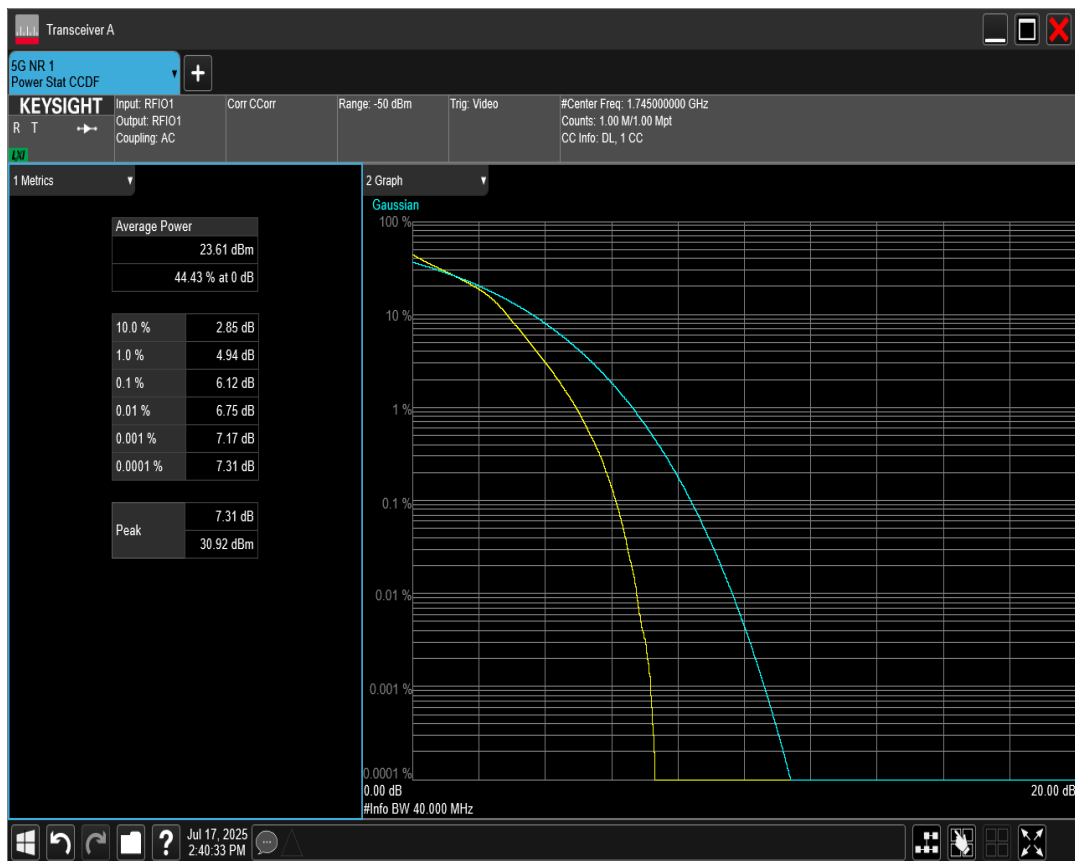


n66 SCS=15kHz DFT_QAM256 BW=10MHz Channel=349000 RB=50@0

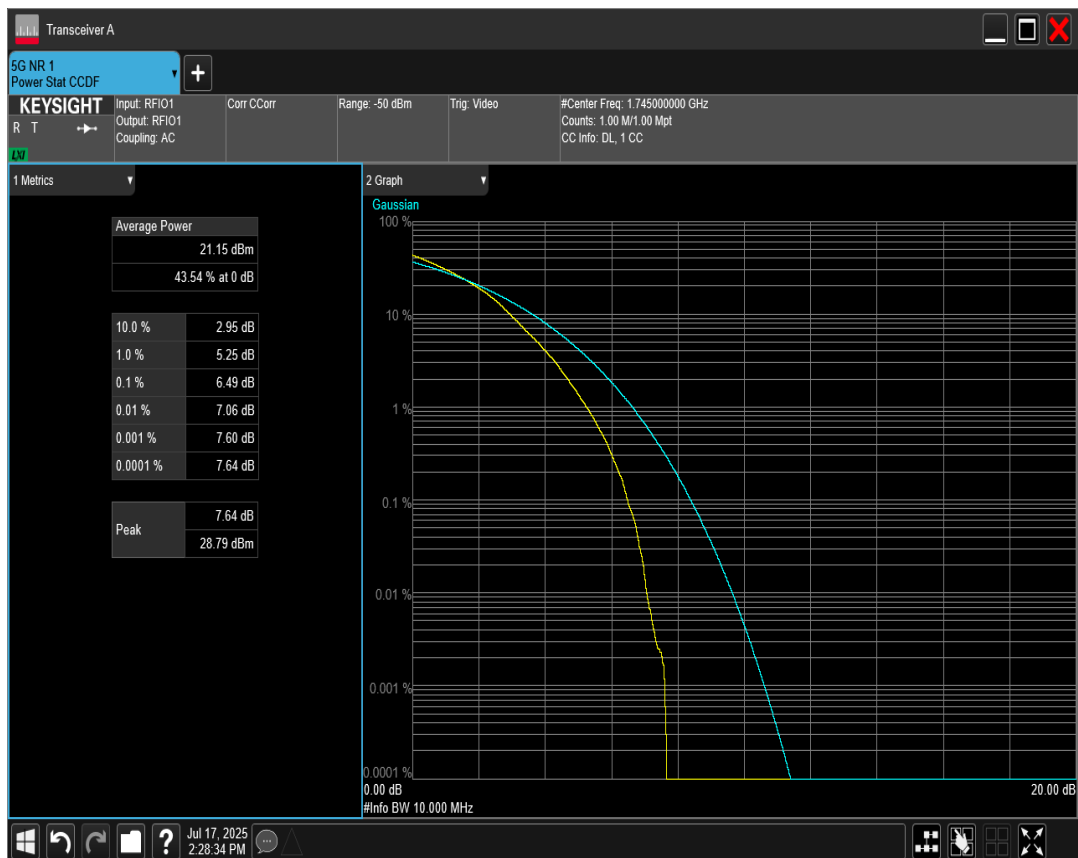


n66 SCS=15kHz DFT_QAM256 BW=10MHz Channel=355000 RB=50@0

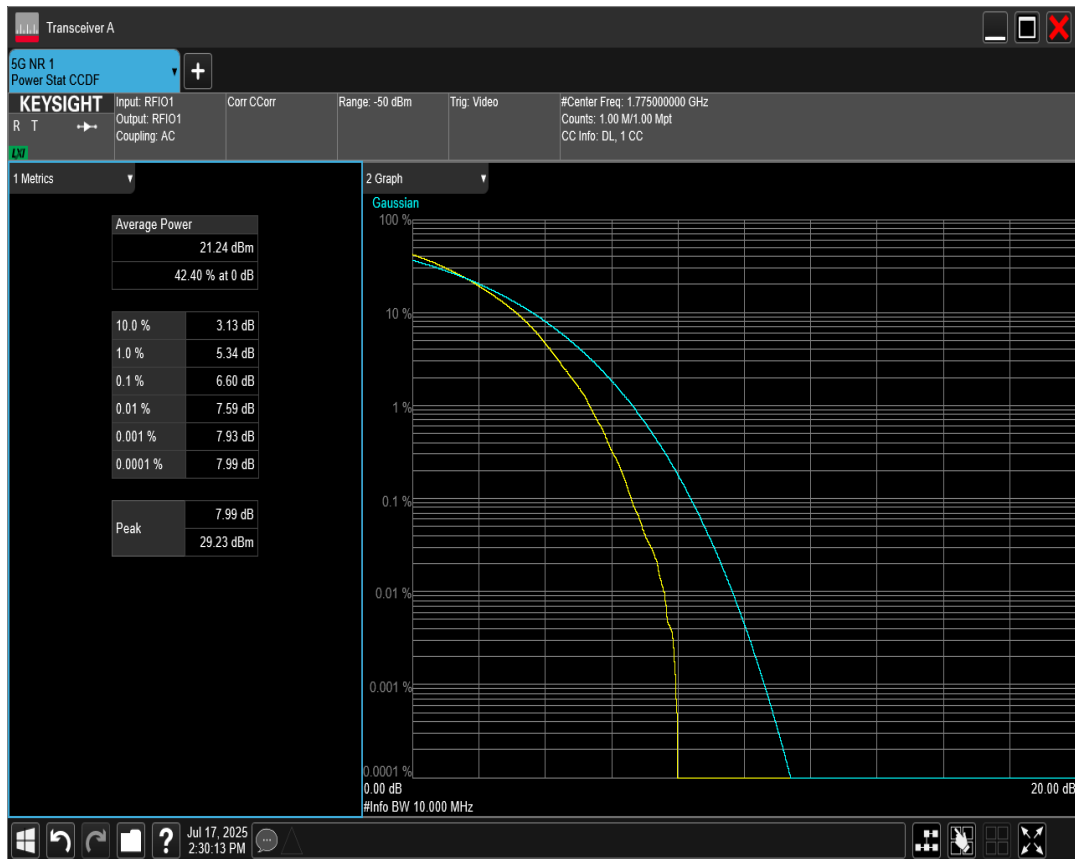


n66 SCS=15kHz DFT_QAM16 BW=5MHz Channel=355500 RB=25@0

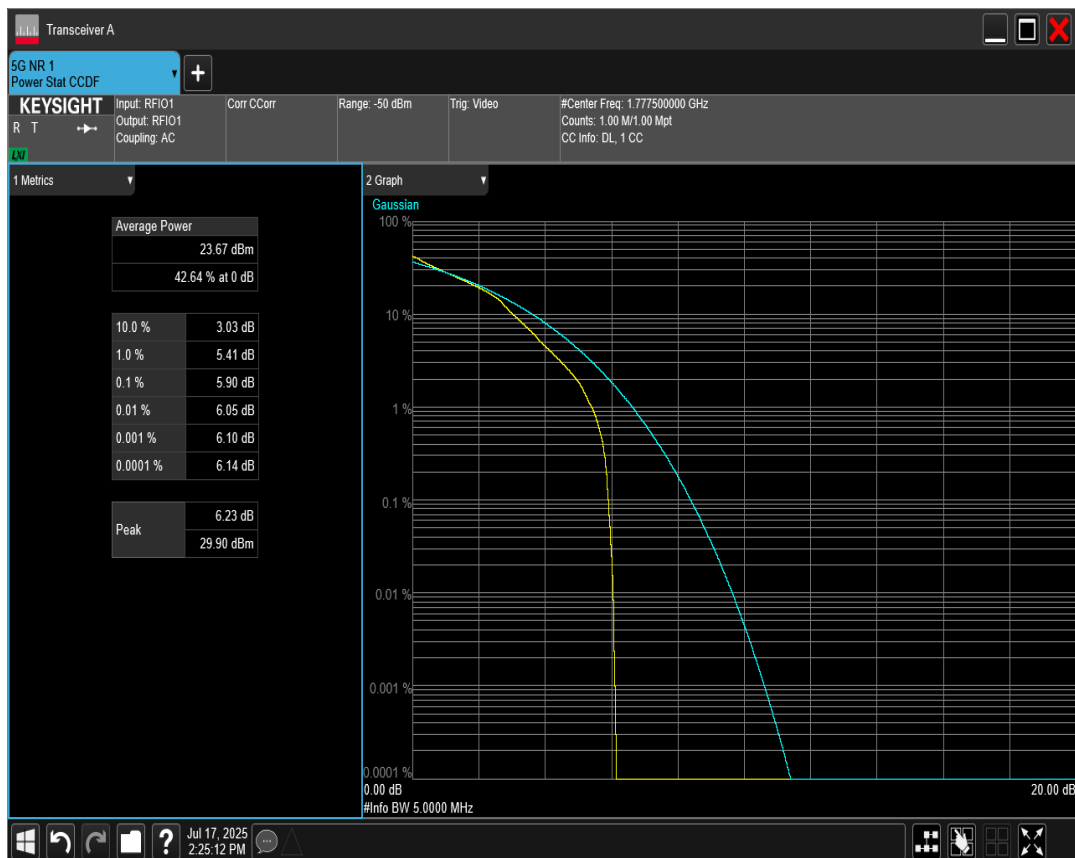


n66 SCS=15kHz DFT_QAM256 BW=10MHz Channel=343000 RB=50@0

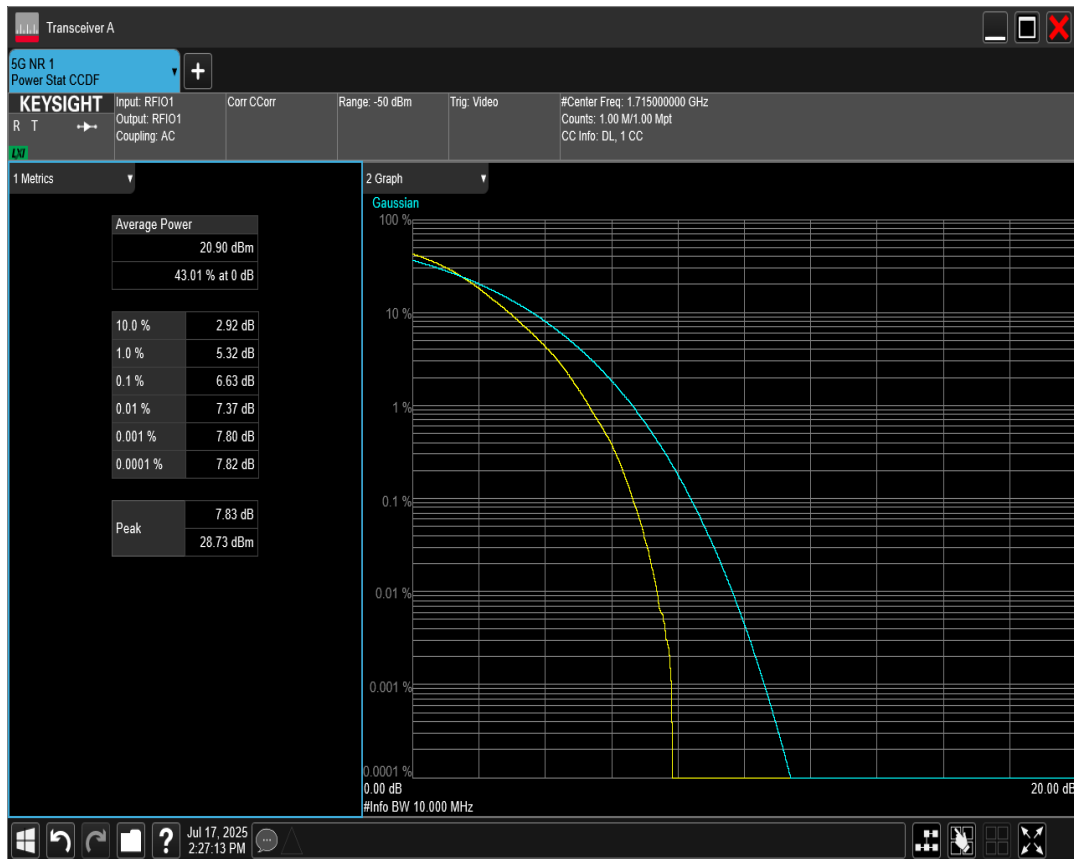


n66 SCS=15kHz DFT_QAM256 BW=20MHz Channel=344000 RB=100@0

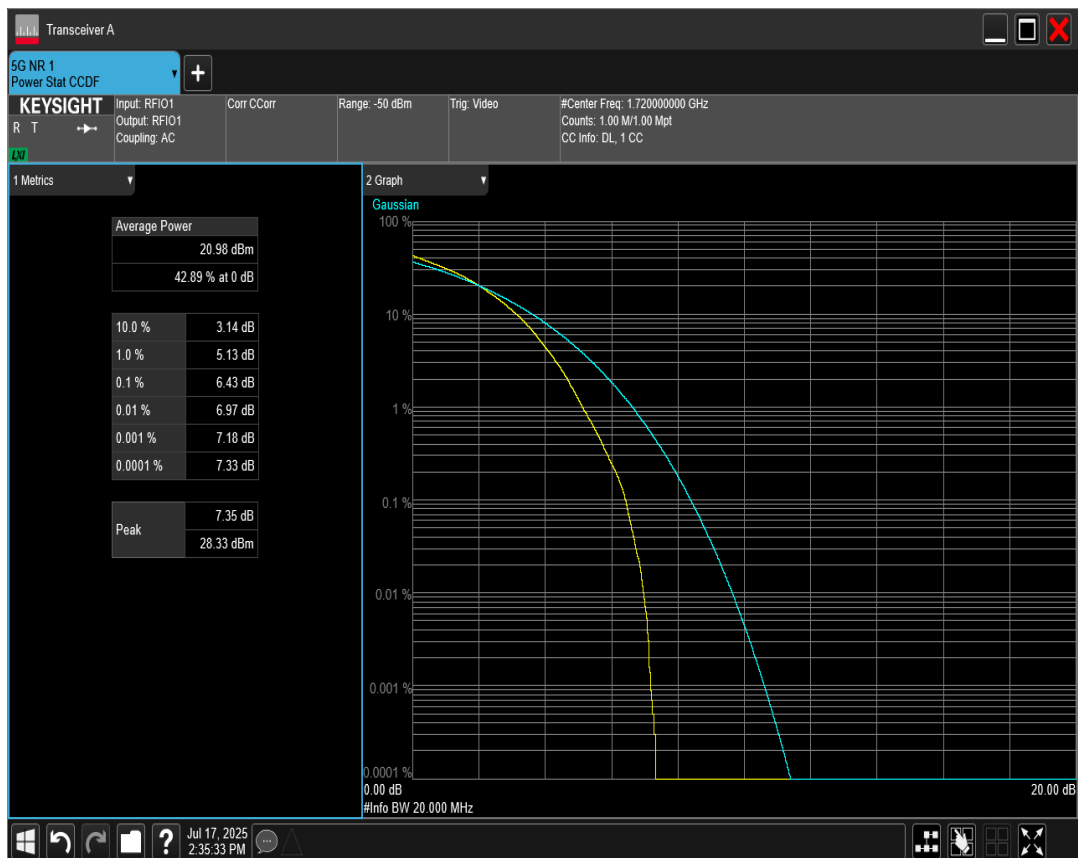


n66 SCS=15kHz DFT_QAM256 BW=20MHz Channel=349000 RB=100@0

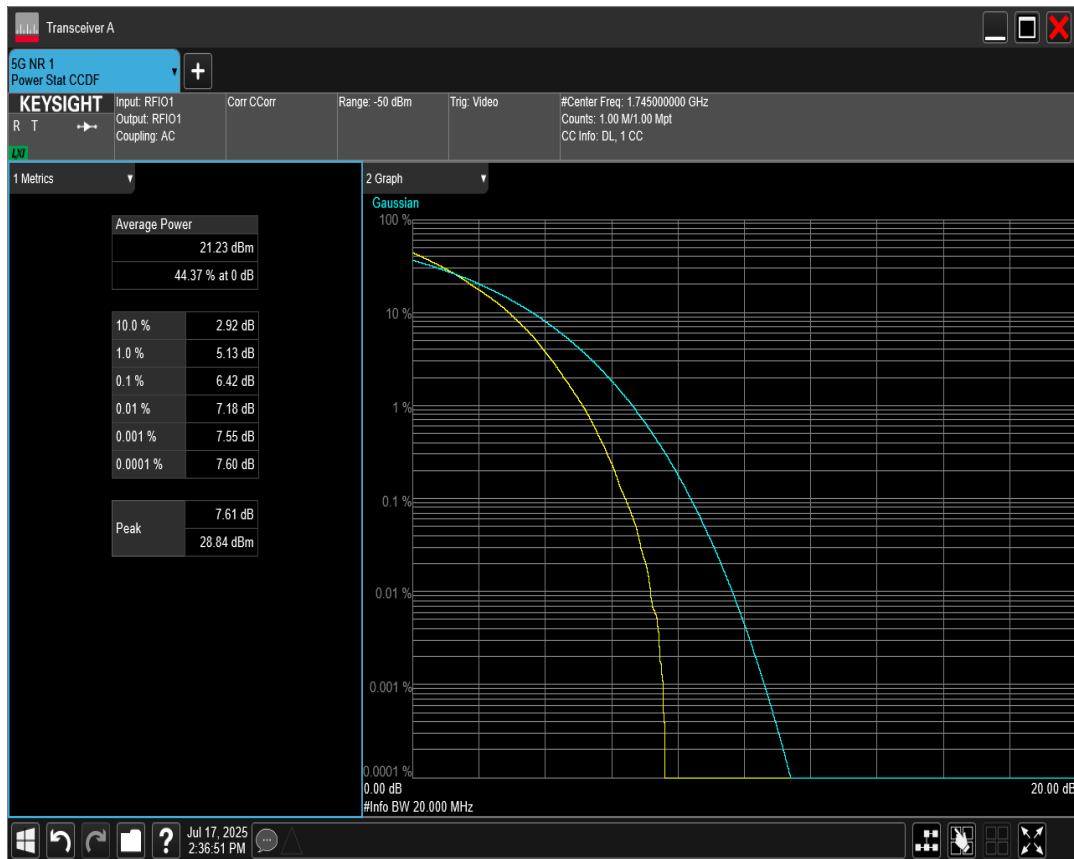


n66 SCS=15kHz DFT_QAM256 BW=20MHz Channel=354000 RB=100@0

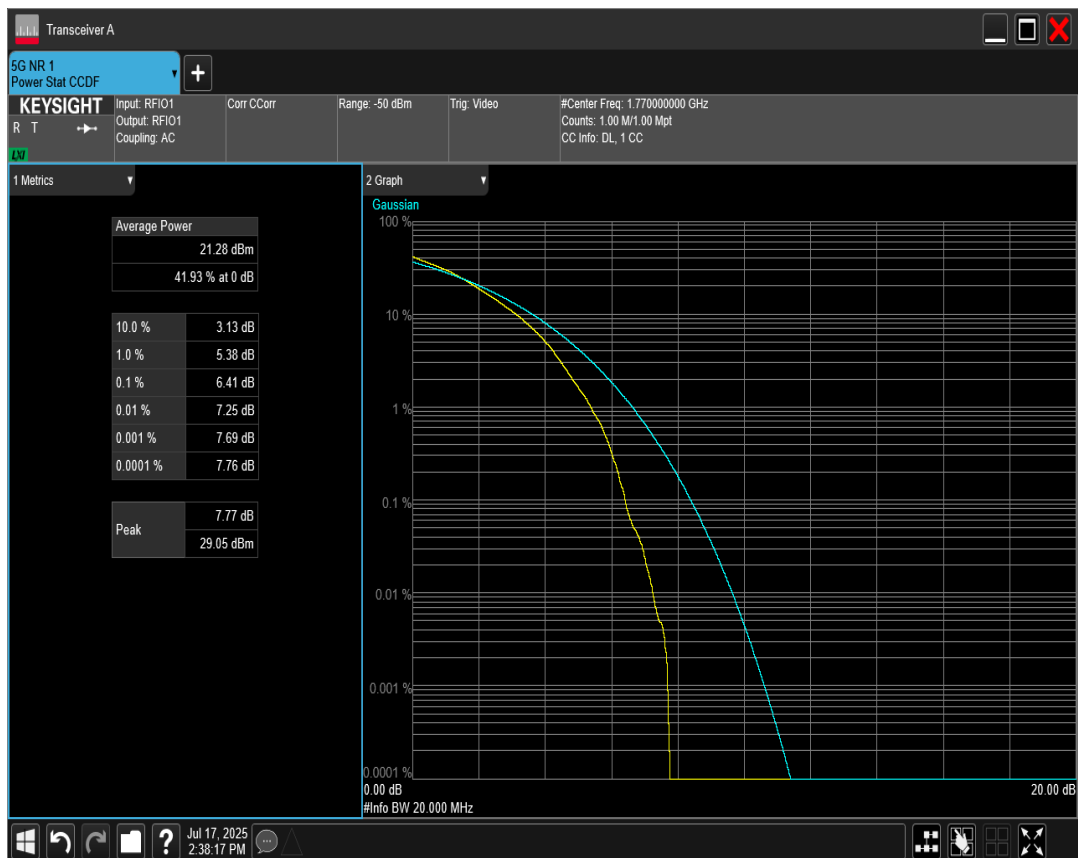


n66 SCS=15kHz DFT_QAM256 BW=15MHz Channel=343500 RB=75@0

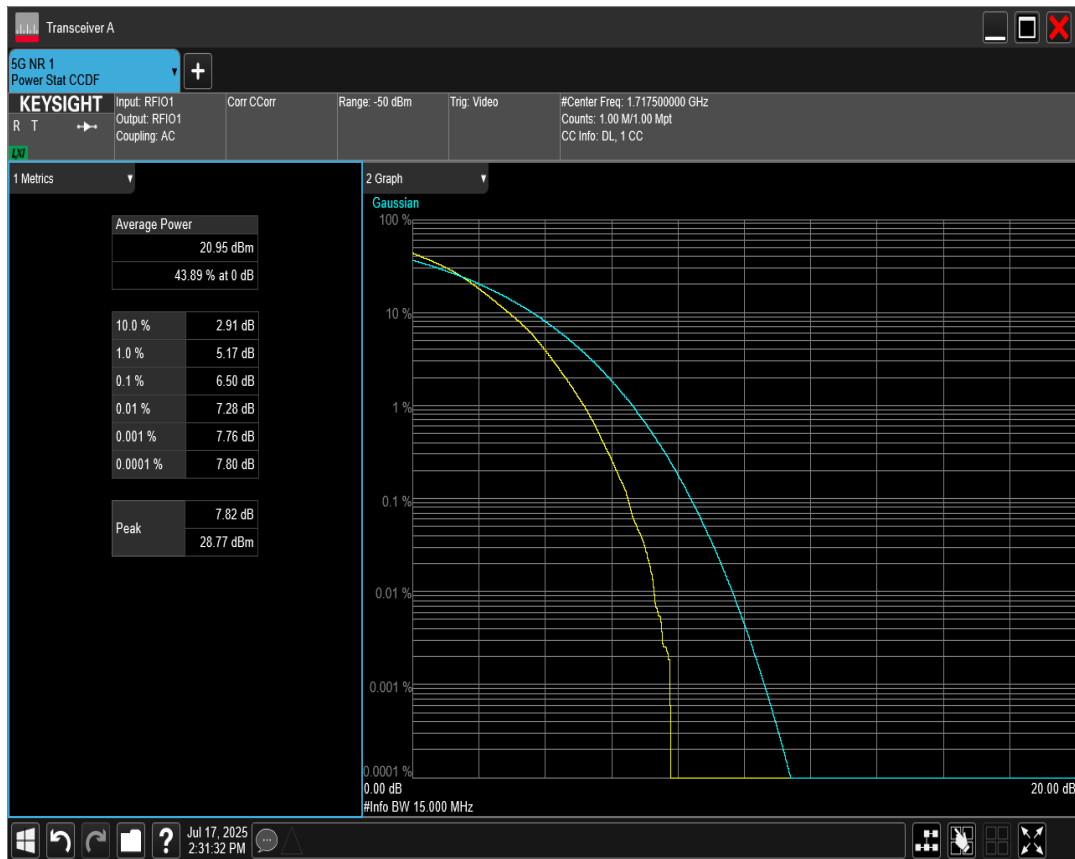


n66 SCS=15kHz DFT_QAM256 BW=15MHz Channel=349000 RB=75@0

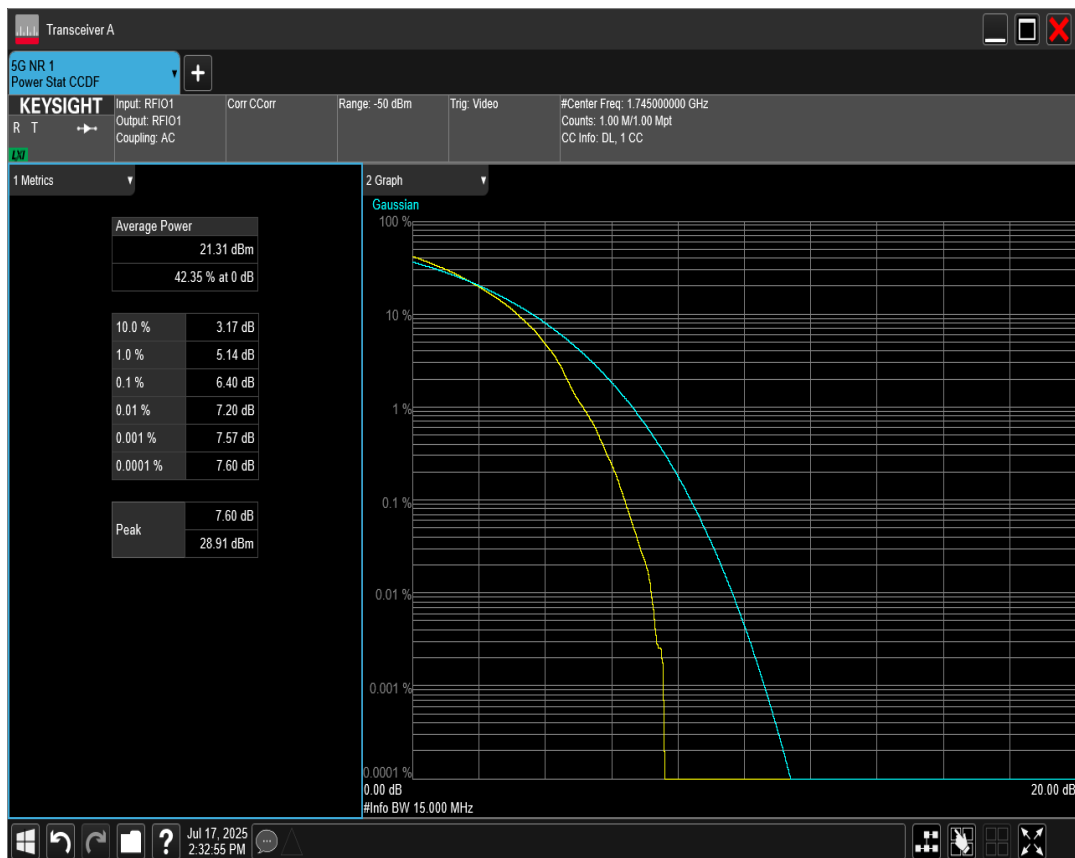


n66 SCS=15kHz DFT_QAM256 BW=15MHz Channel=354500 RB=75@0

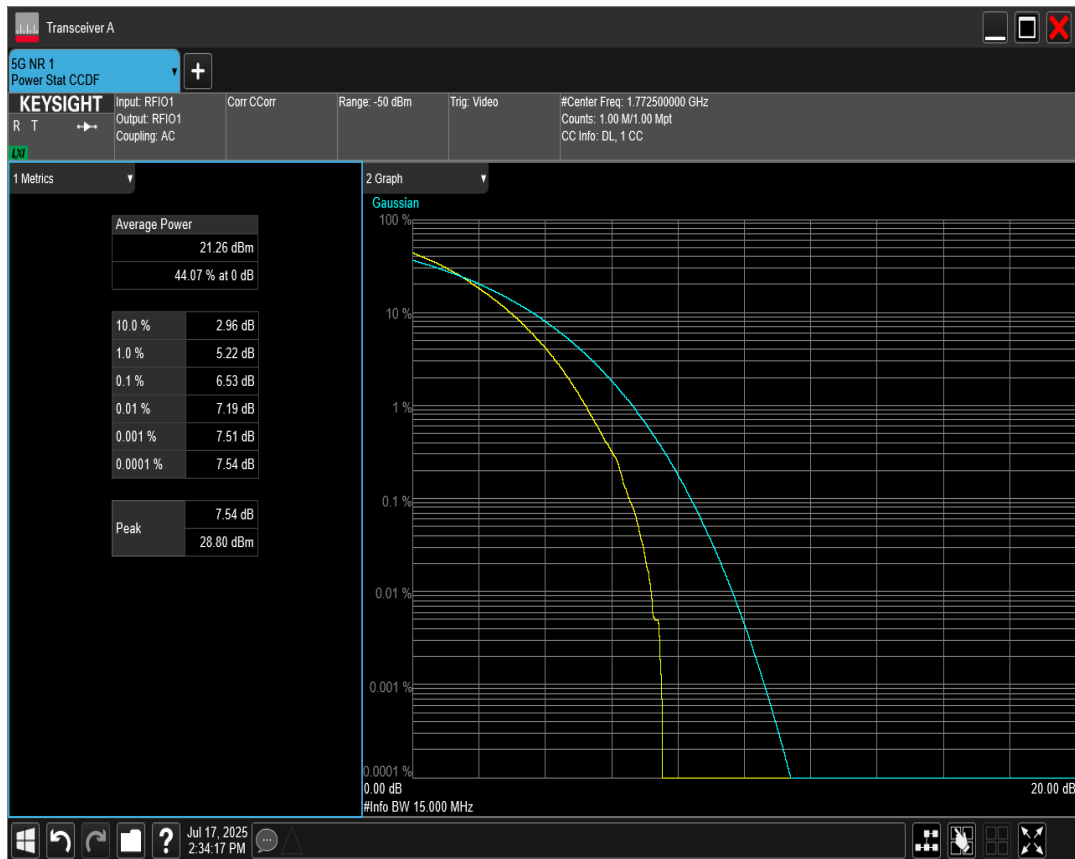


n66 SCS=15kHz DFT_QAM256 BW=40MHz Channel=352000 RB=216@0

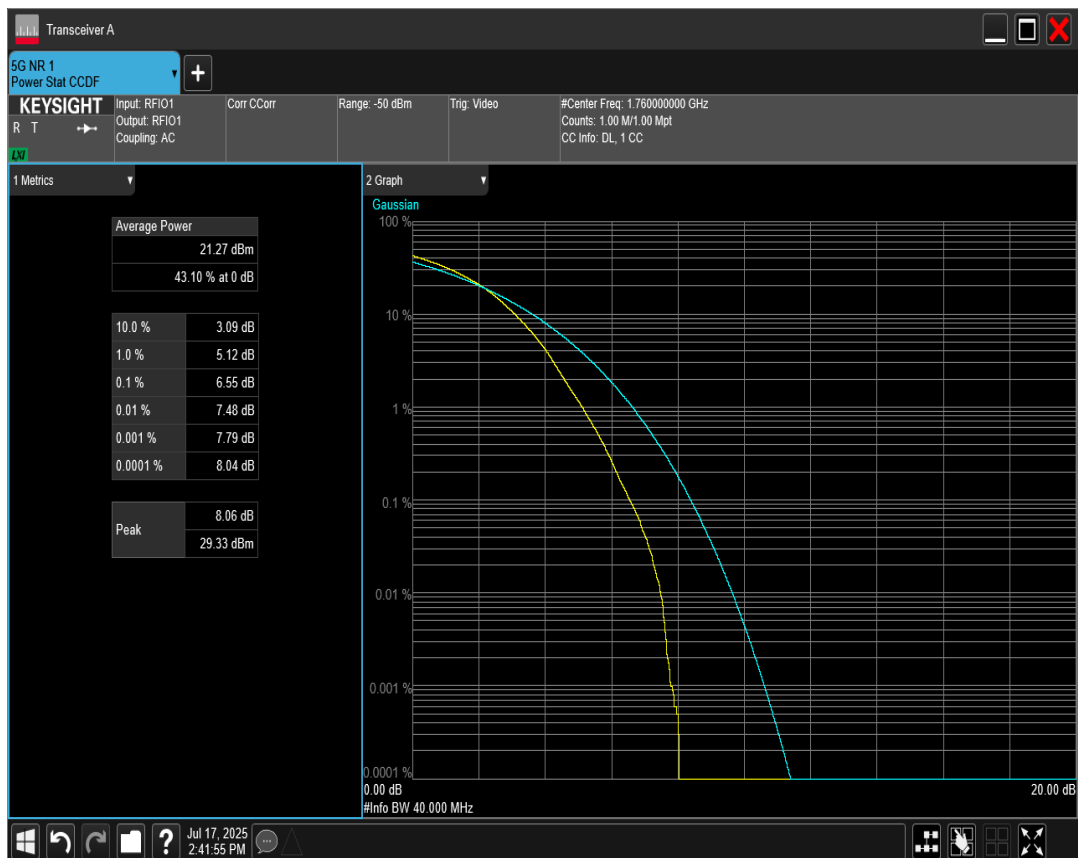


n66 SCS=15kHz DFT_QAM256 BW=5MHz Channel=342500 RB=25@0

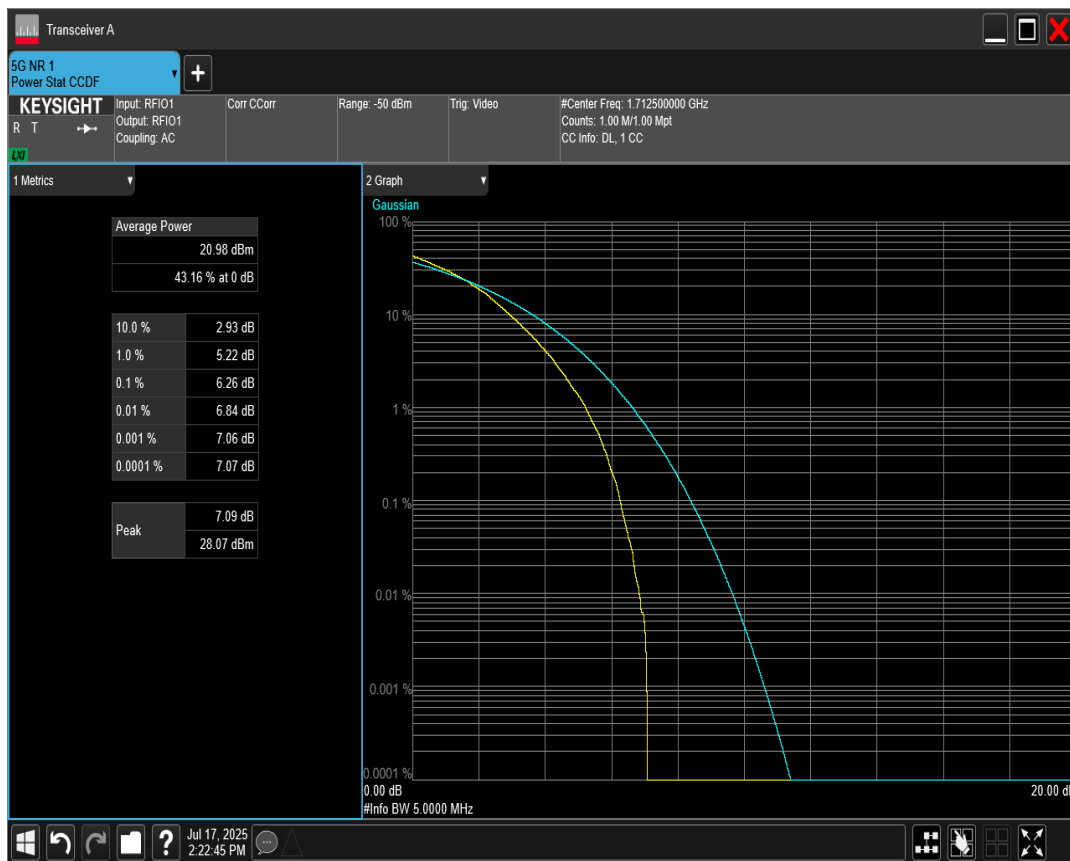


n66 SCS=15kHz DFT_QAM256 BW=40MHz Channel=346000 RB=216@0

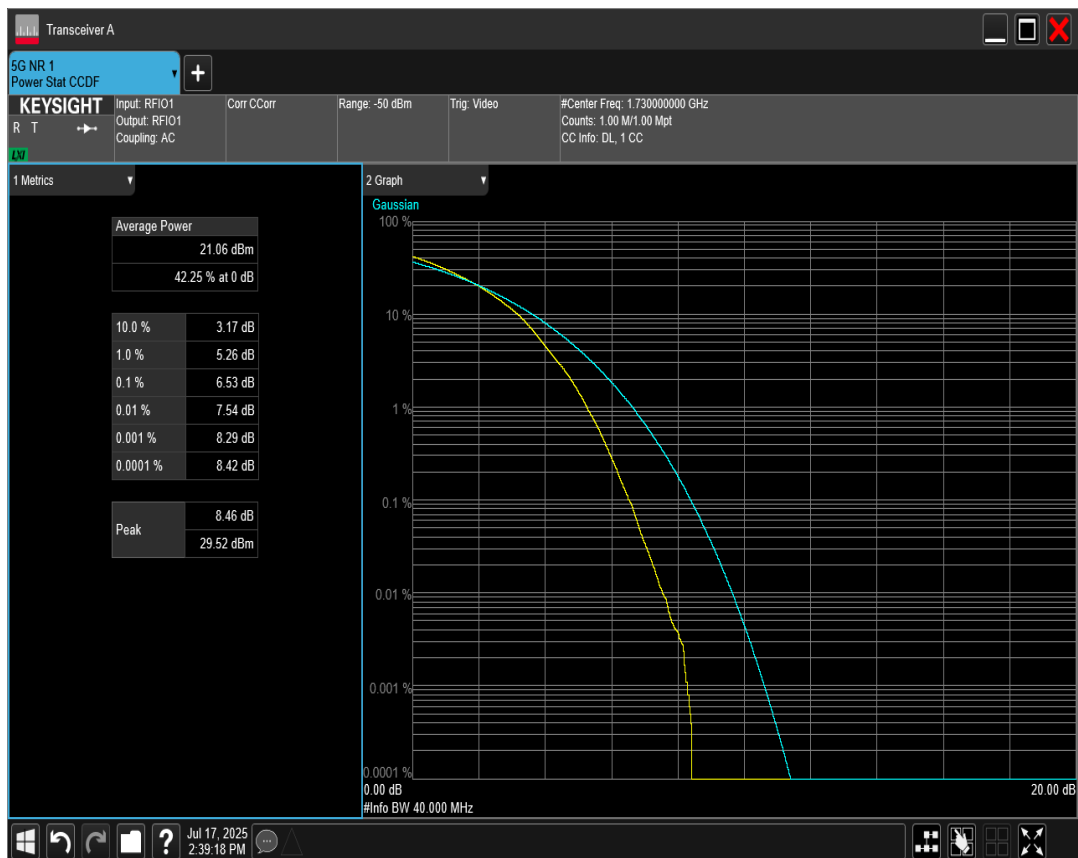


n66 SCS=15kHz DFT_QAM256 BW=40MHz Channel=349000 RB=216@0

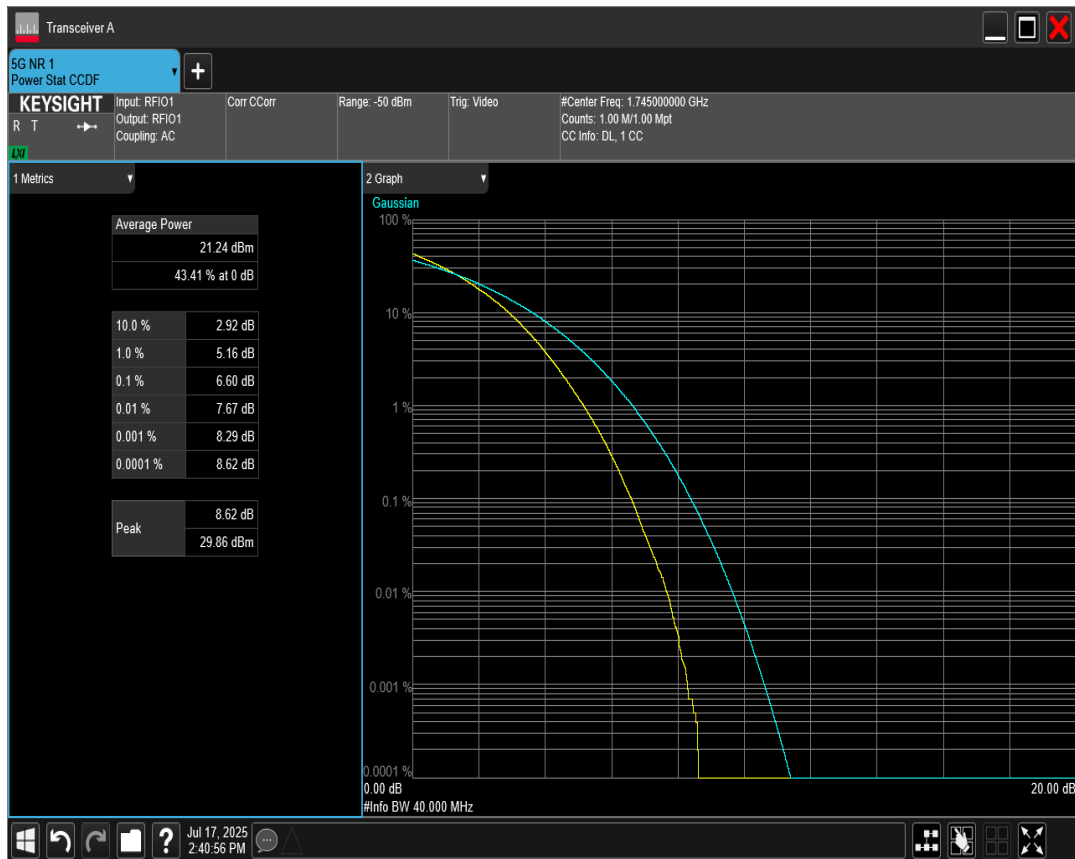


n66 SCS=15kHz DFT_QAM64 BW=10MHz Channel=349000 RB=50@0

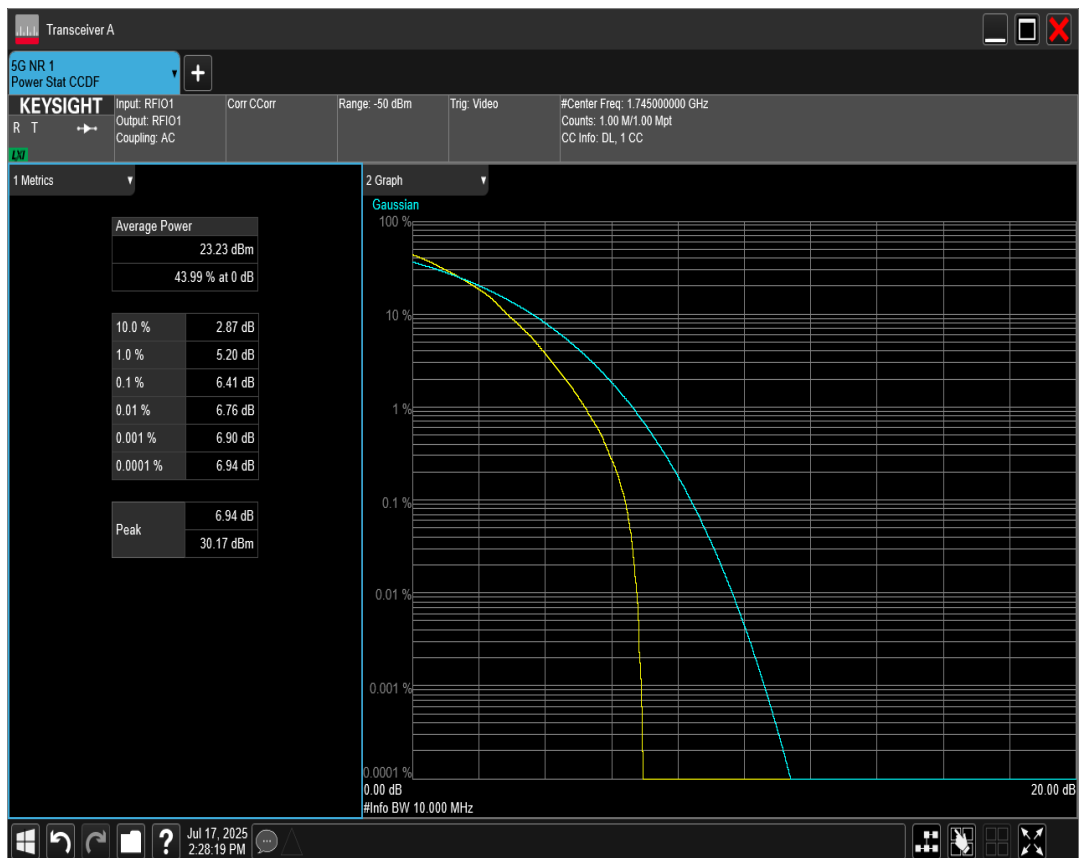


n66 SCS=15kHz DFT_QAM64 BW=10MHz Channel=355000 RB=50@0

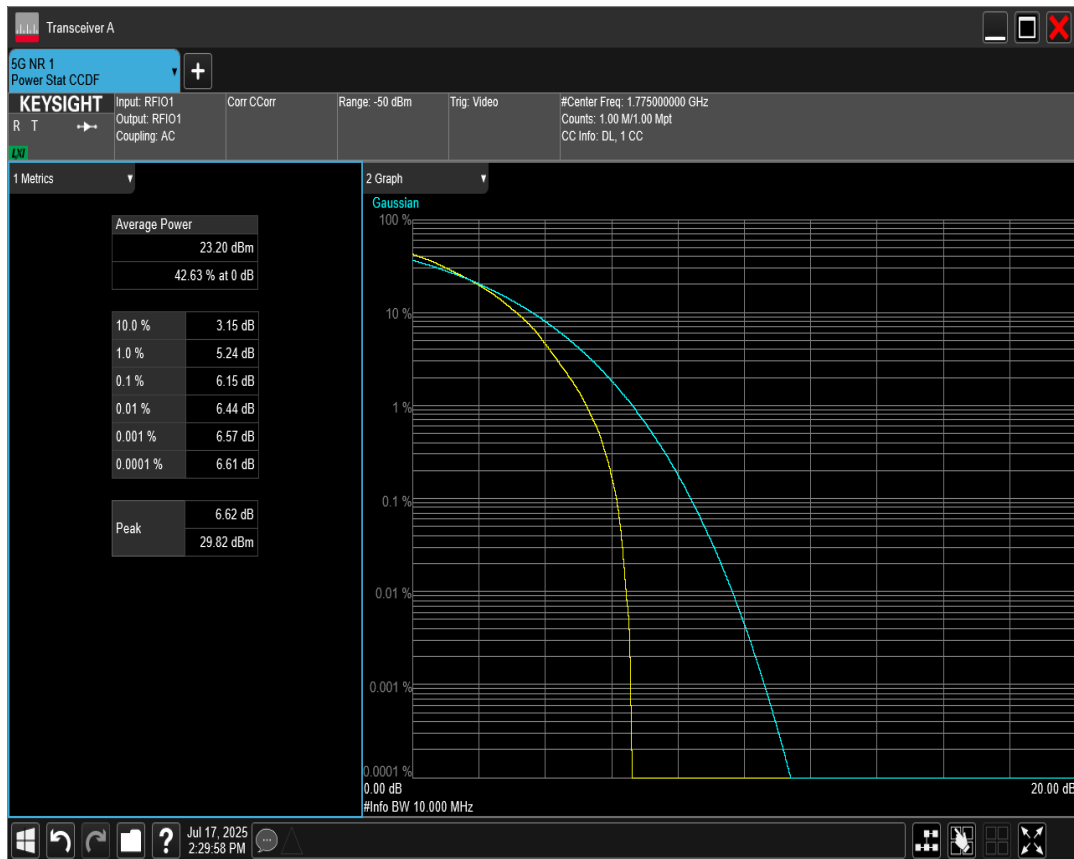


n66 SCS=15kHz DFT_QAM64 BW=10MHz Channel=343000 RB=50@0

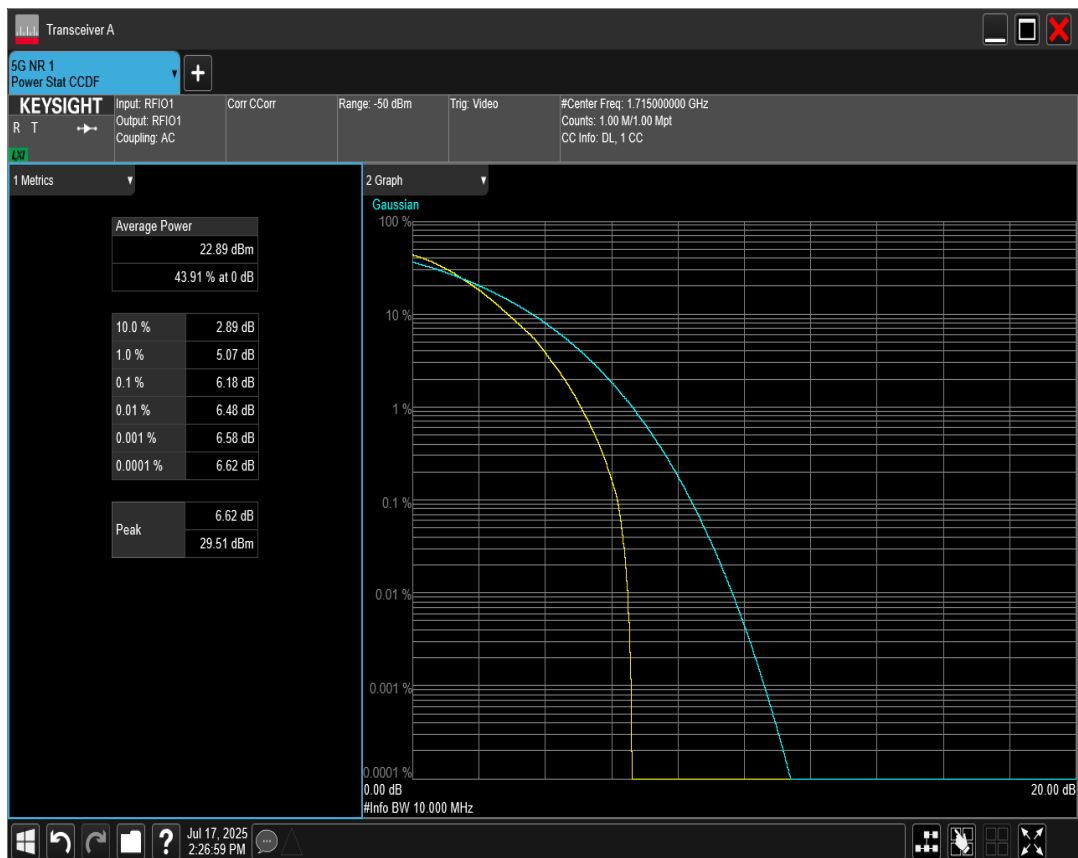


n66 SCS=15kHz DFT_QAM256 BW=5MHz Channel=349000 RB=25@0

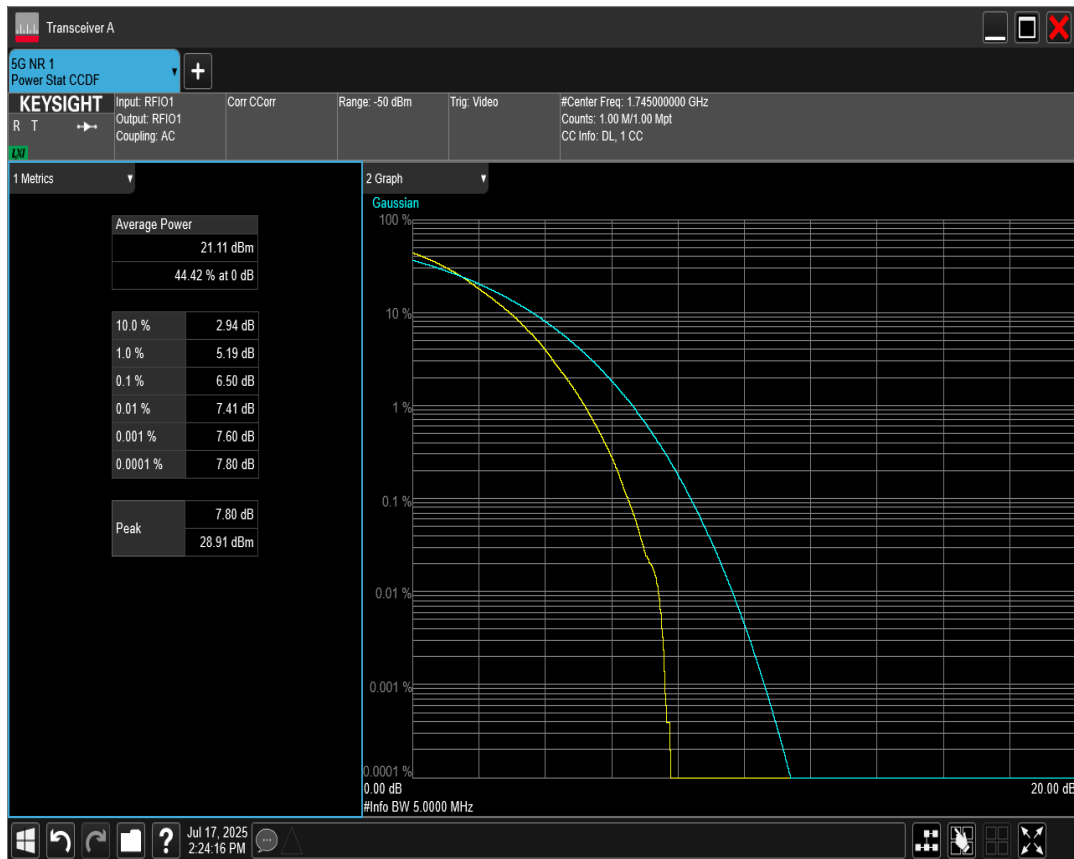

n66 SCS=15kHz DFT_QAM256 BW=5MHz Channel=355500 RB=25@0

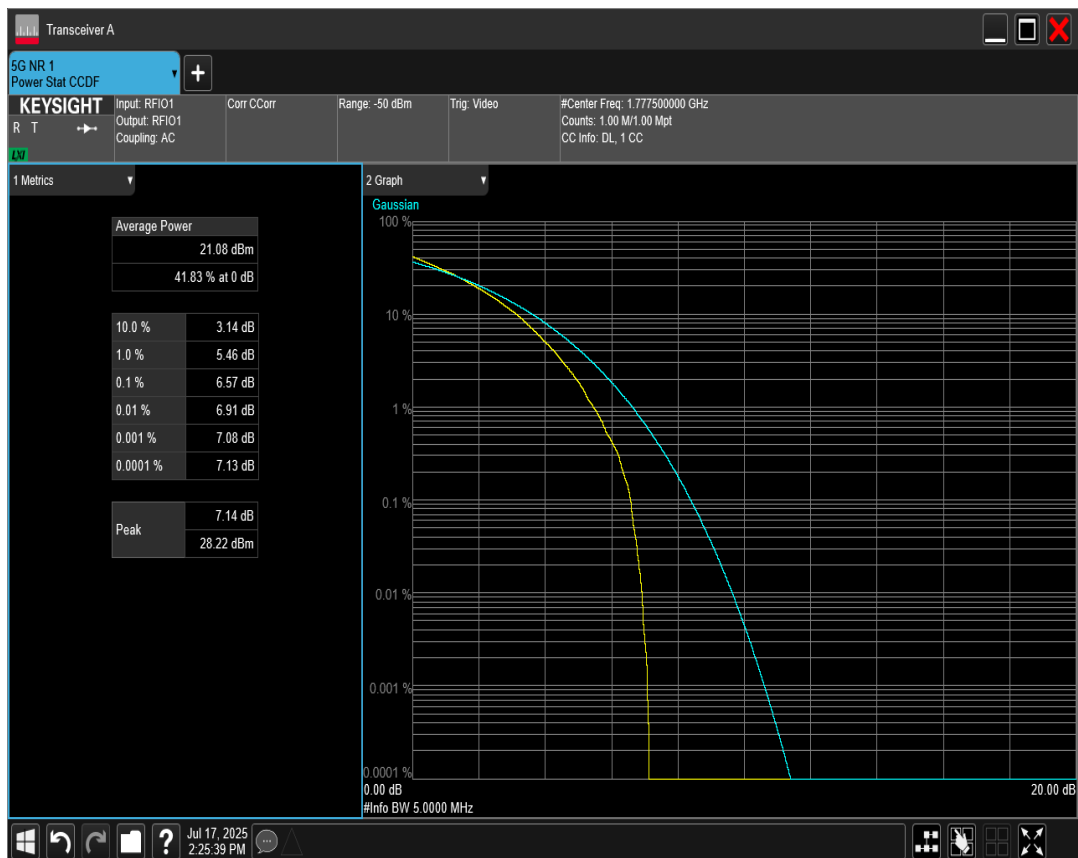


n66 SCS=15kHz DFT_QAM64 BW=20MHz Channel=344000 RB=100@0

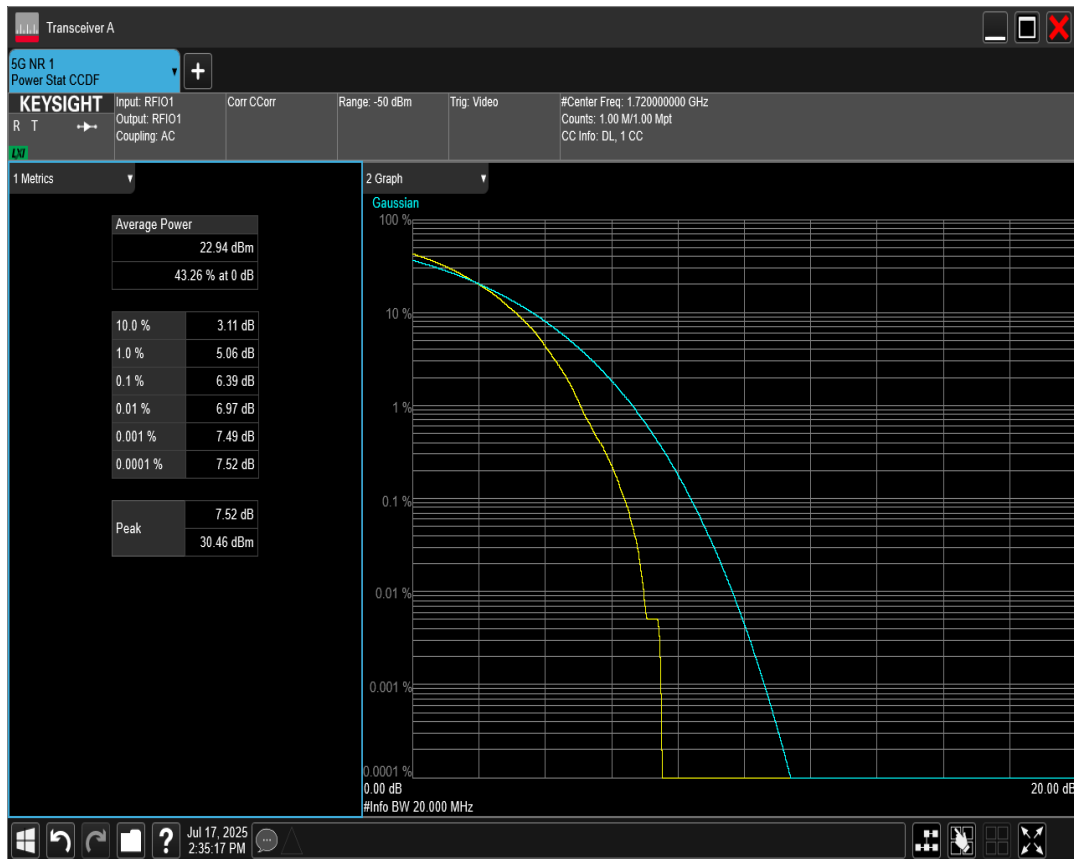


n66 SCS=15kHz DFT_QAM64 BW=20MHz Channel=349000 RB=100@0




n66 SCS=15kHz DFT_QAM64 BW=20MHz Channel=354000 RB=100@0

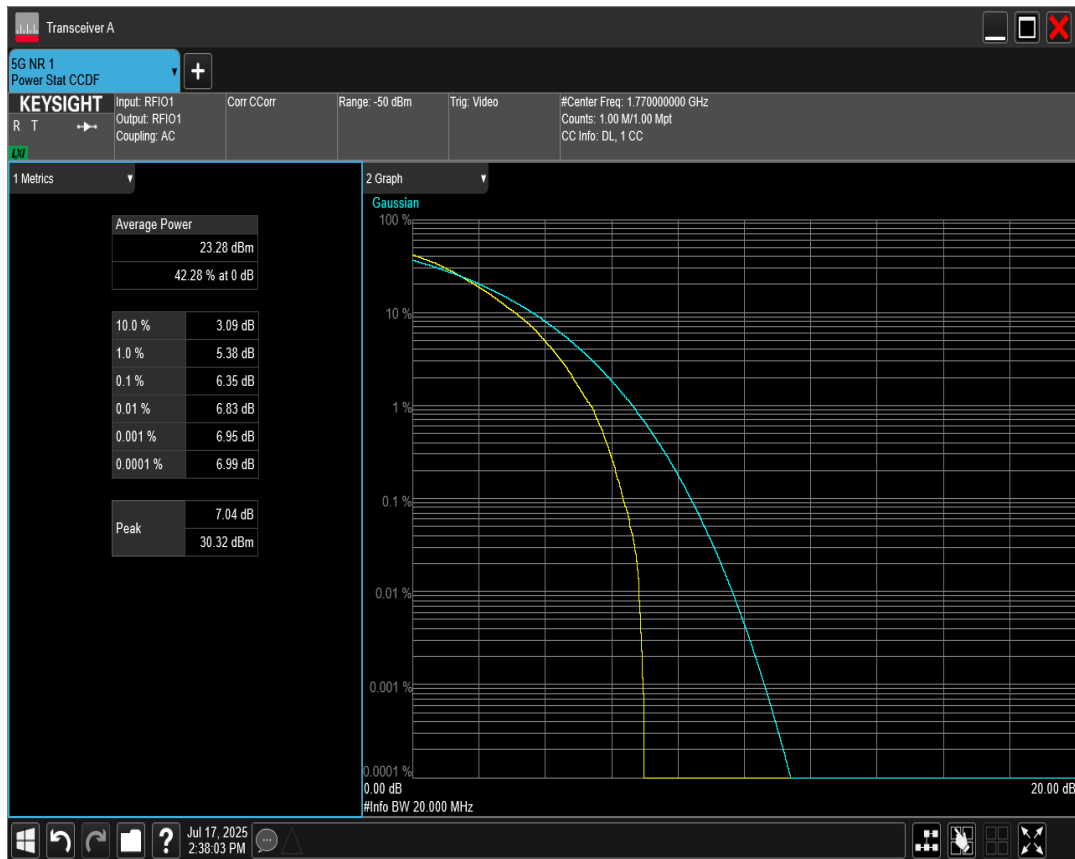


n66 SCS=15kHz DFT_QAM64 BW=15MHz Channel=343500 RB=75@0

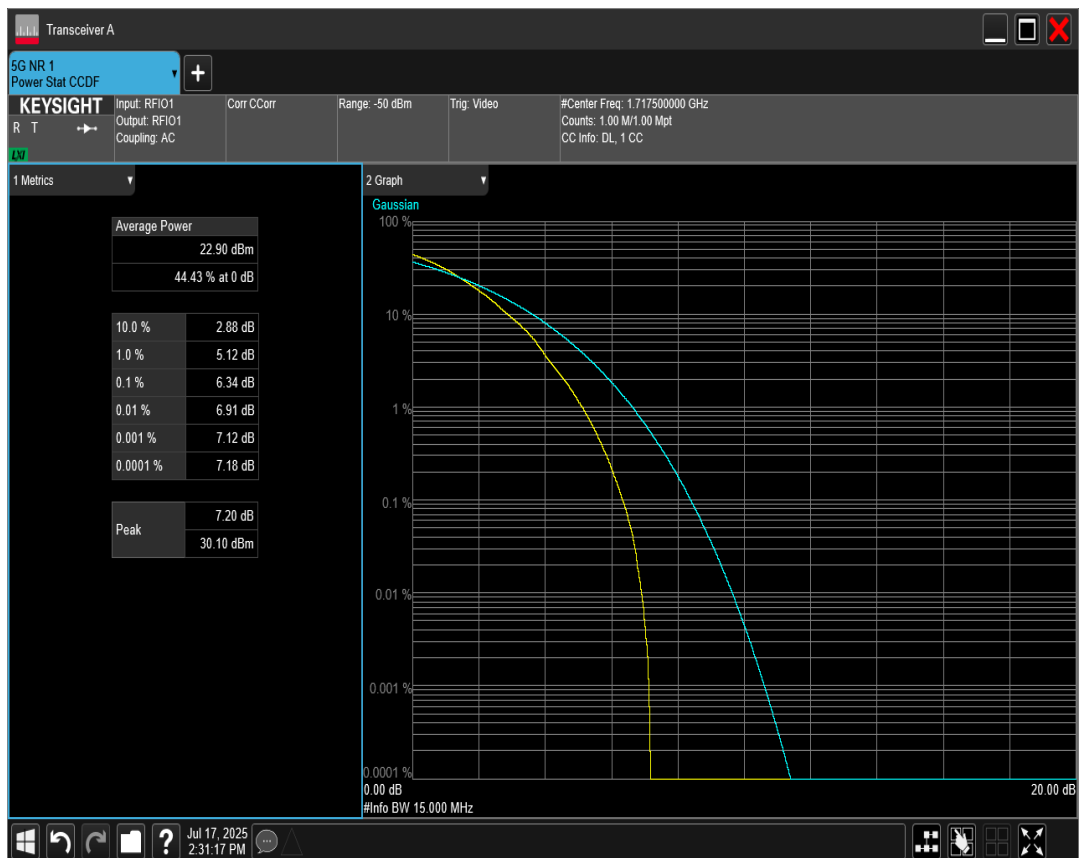


n66 SCS=15kHz DFT_QAM64 BW=15MHz Channel=349000 RB=75@0

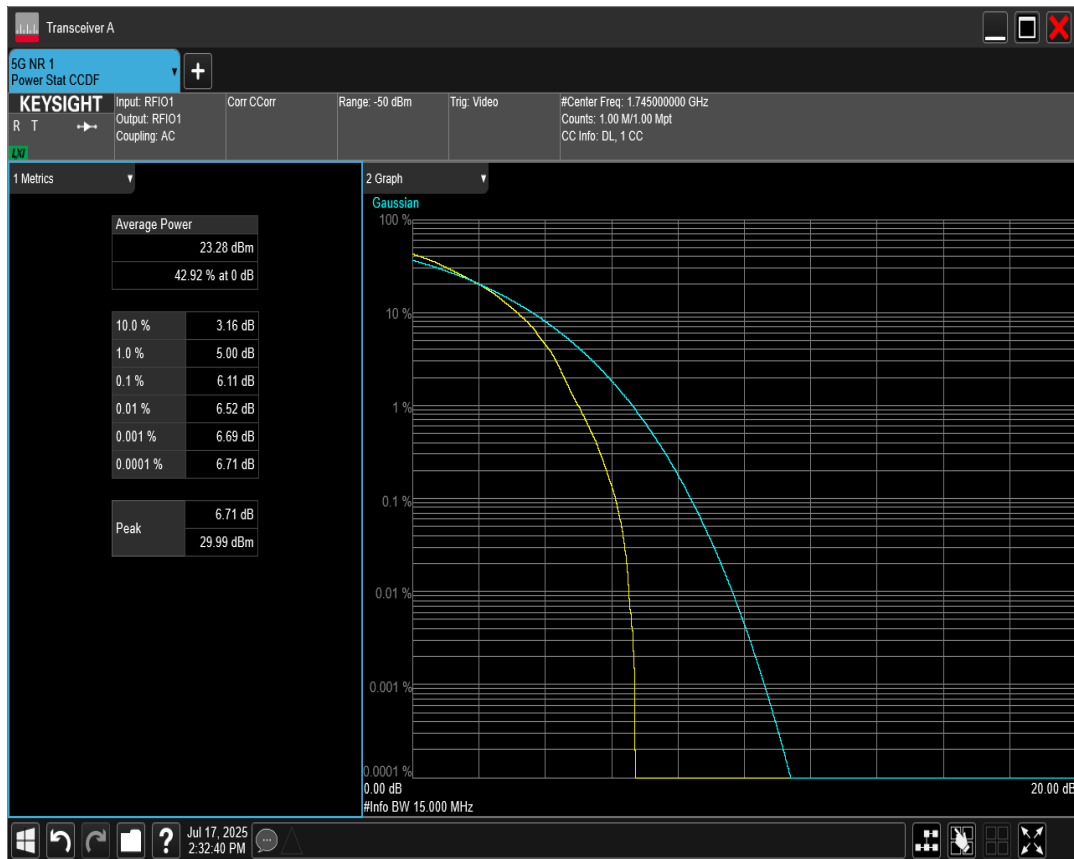


n66 SCS=15kHz DFT_QAM64 BW=15MHz Channel=354500 RB=75@0

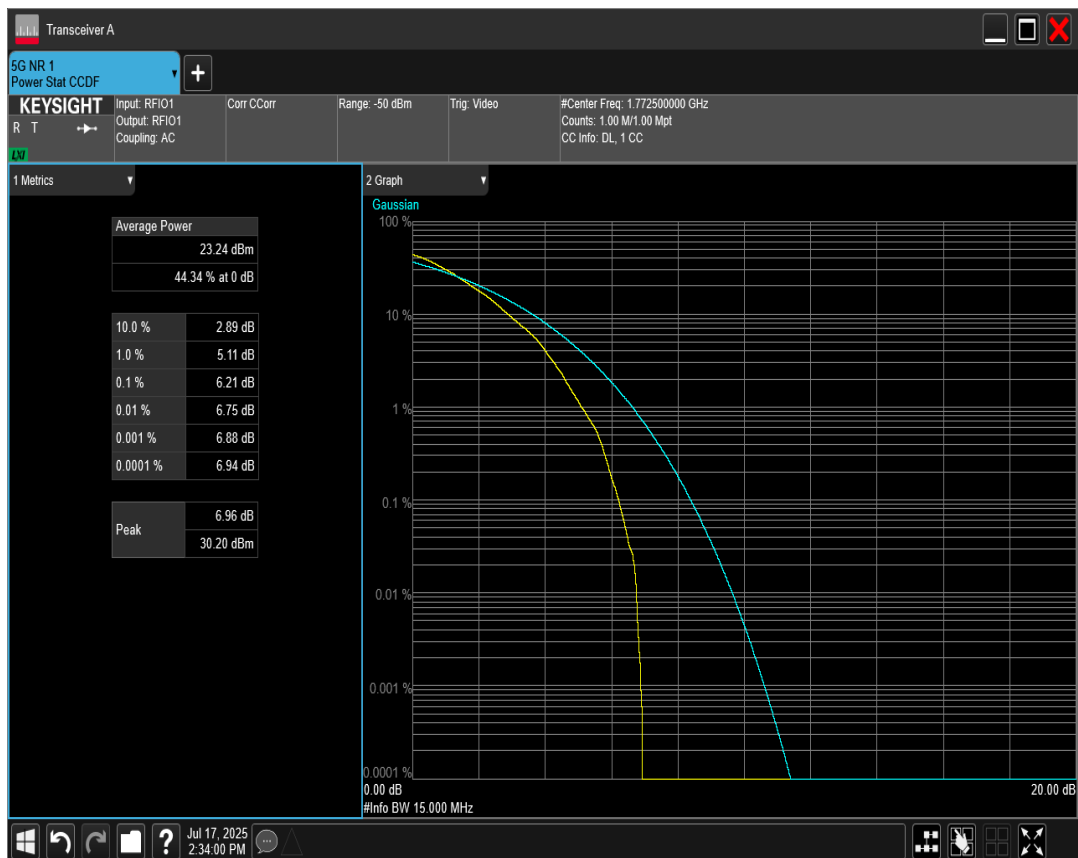


n66 SCS=15kHz DFT_QAM64 BW=5MHz Channel=349000 RB=25@0

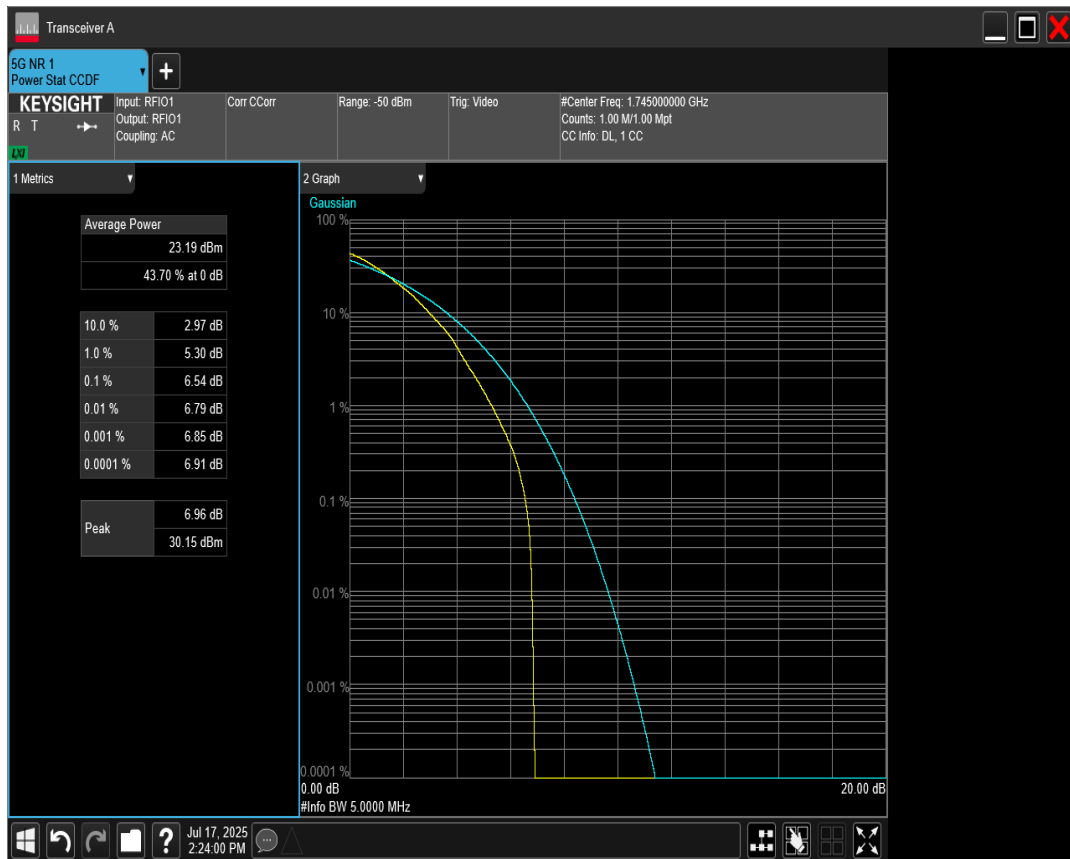


n66 SCS=15kHz DFT_QAM64 BW=5MHz Channel=355500 RB=25@0

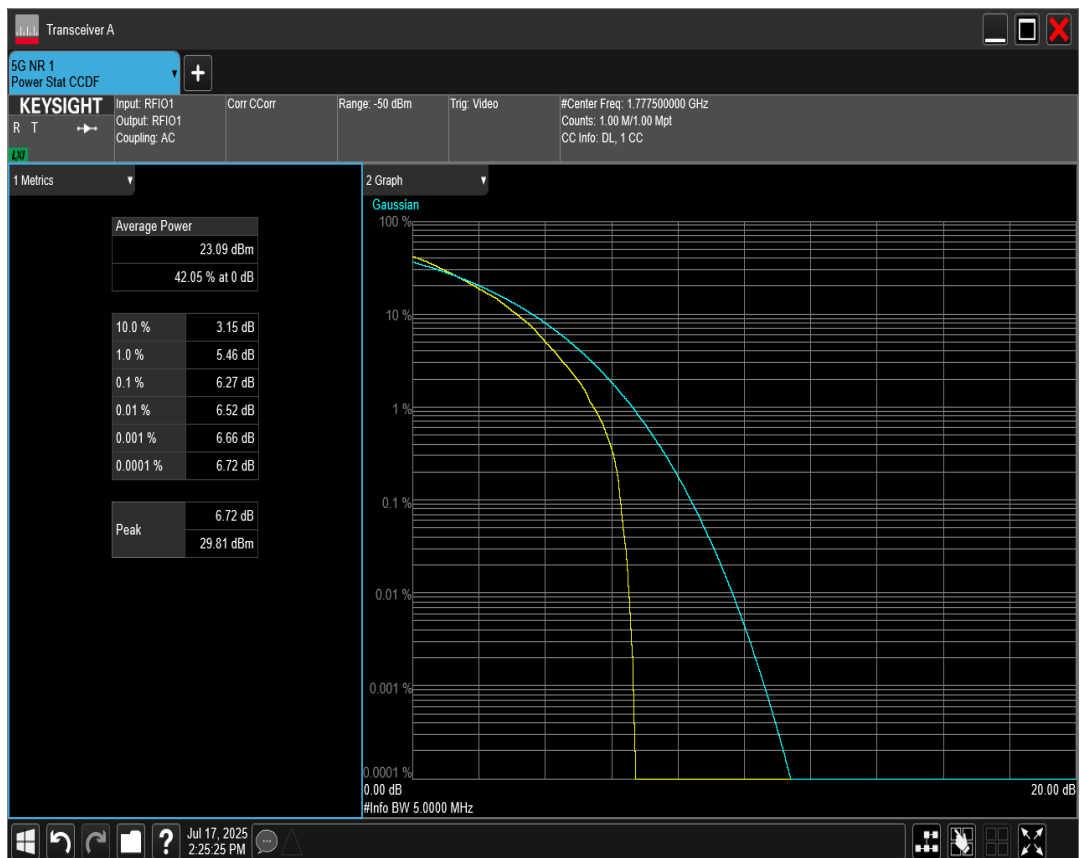


n66 SCS=15kHz DFT_QPSK BW=10MHz Channel=343000 RB=50@0

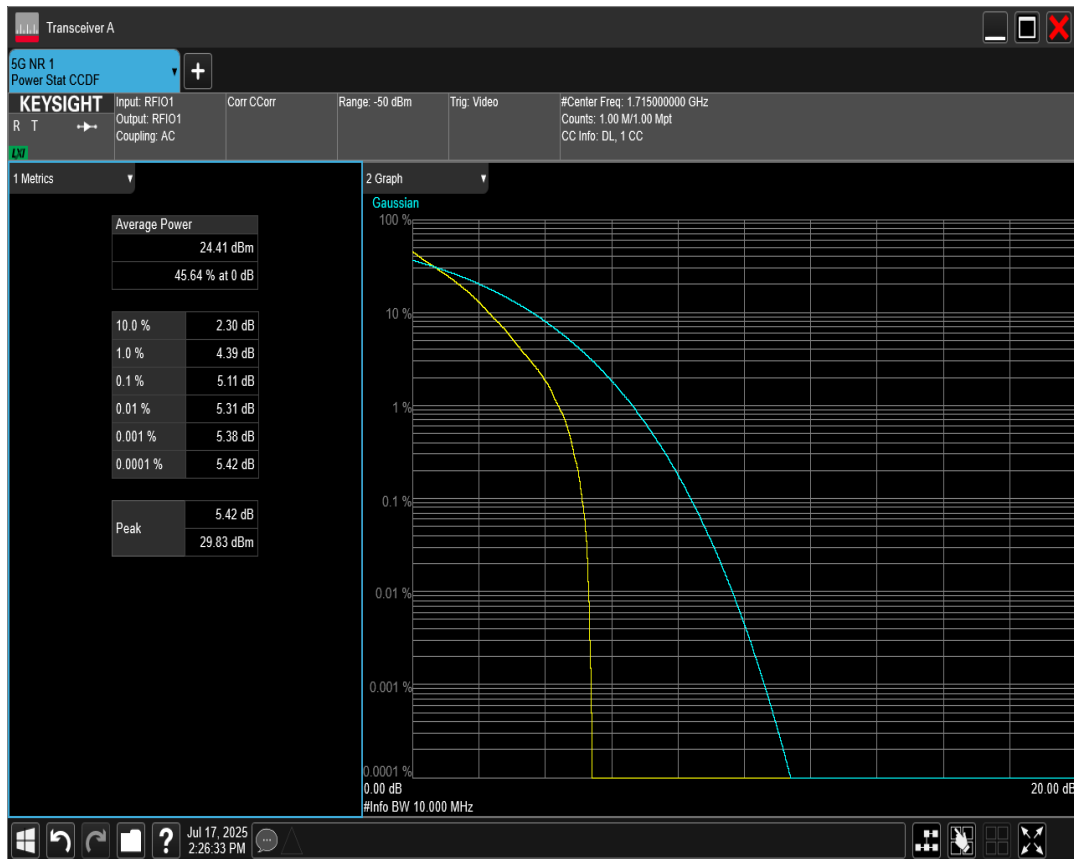


n66 SCS=15kHz DFT_QAM64 BW=5MHz Channel=342500 RB=25@0

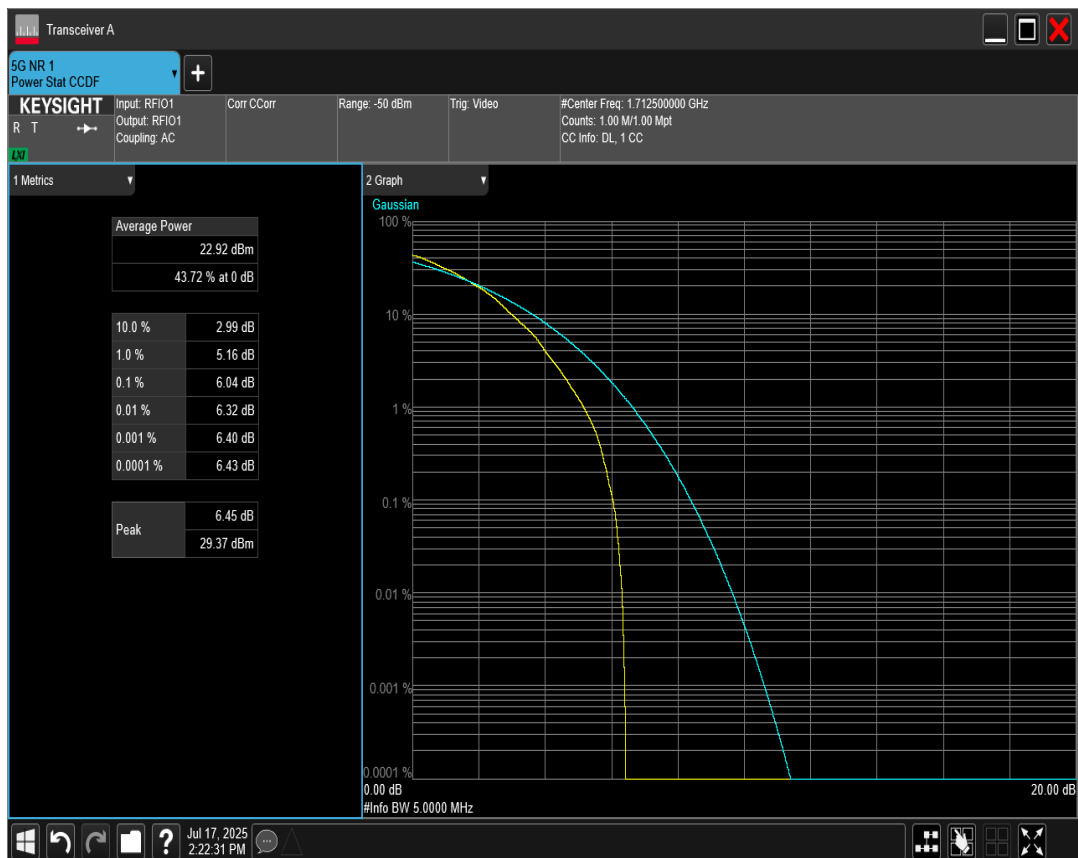


n66 SCS=15kHz DFT_QAM64 BW=40MHz Channel=346000 RB=216@0

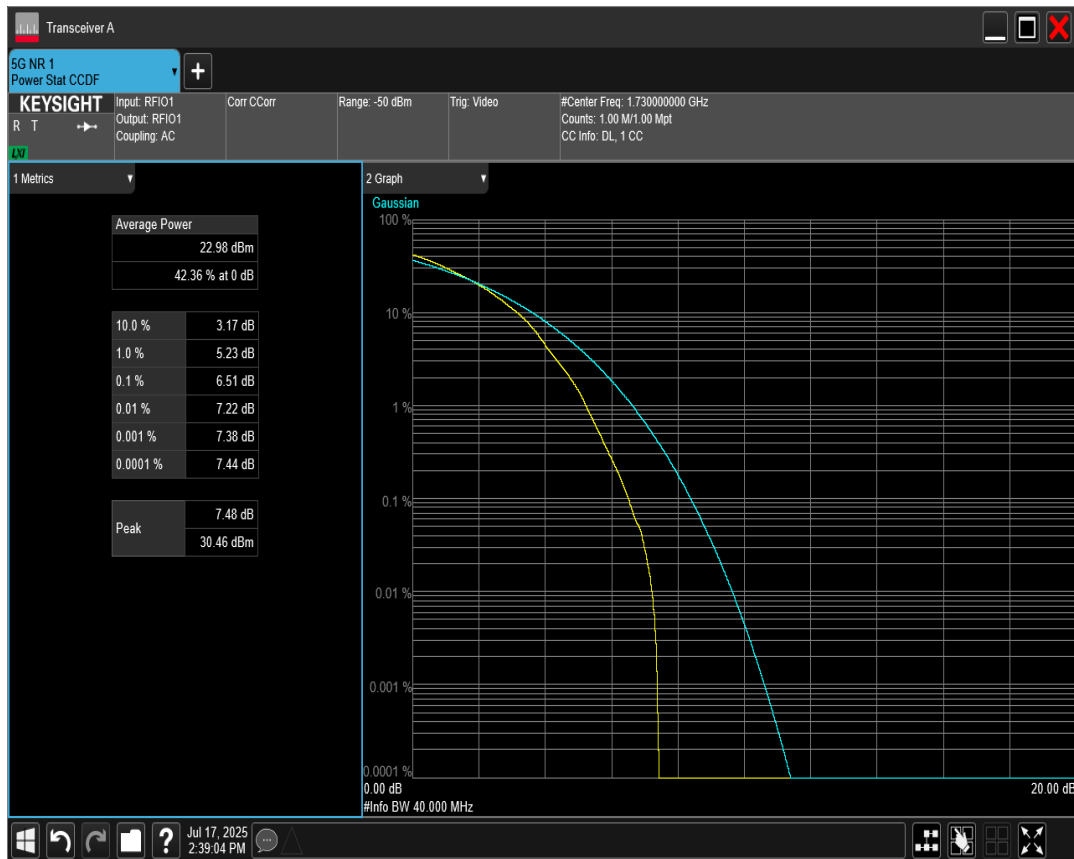


n66 SCS=15kHz DFT_QAM64 BW=40MHz Channel=349000 RB=216@0

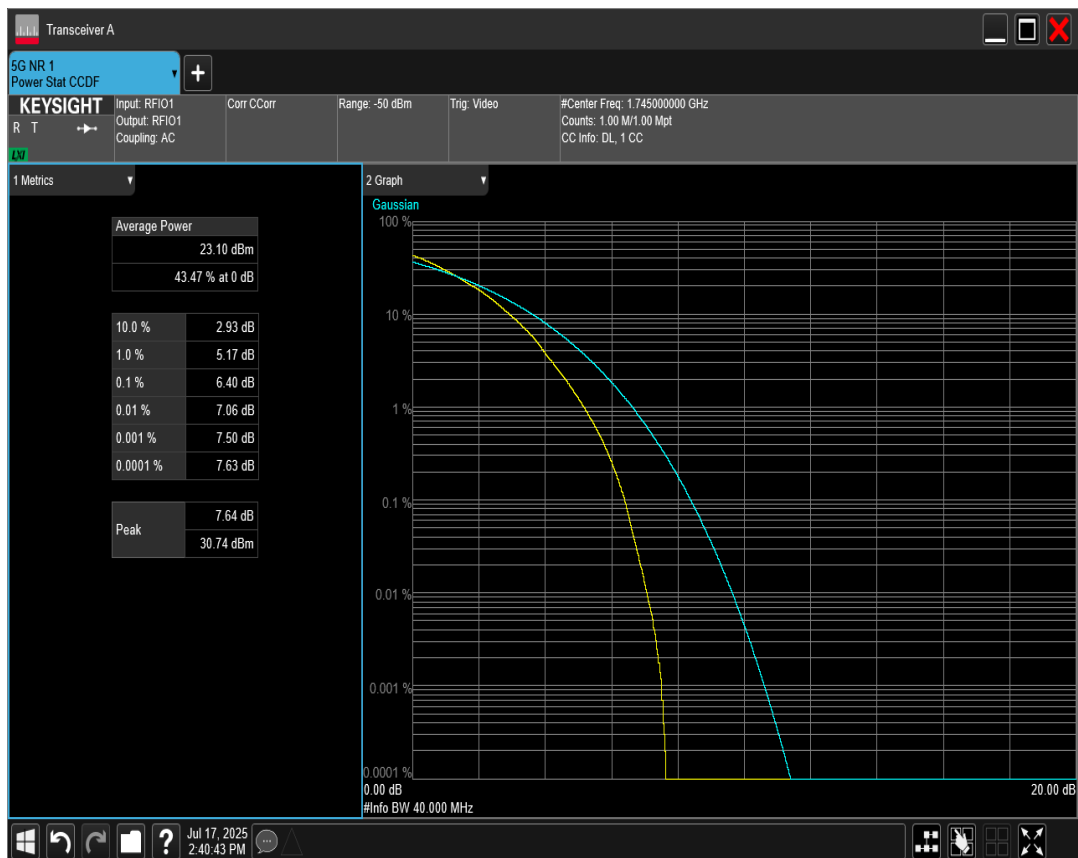


n66 SCS=15kHz DFT_QAM64 BW=40MHz Channel=352000 RB=216@0

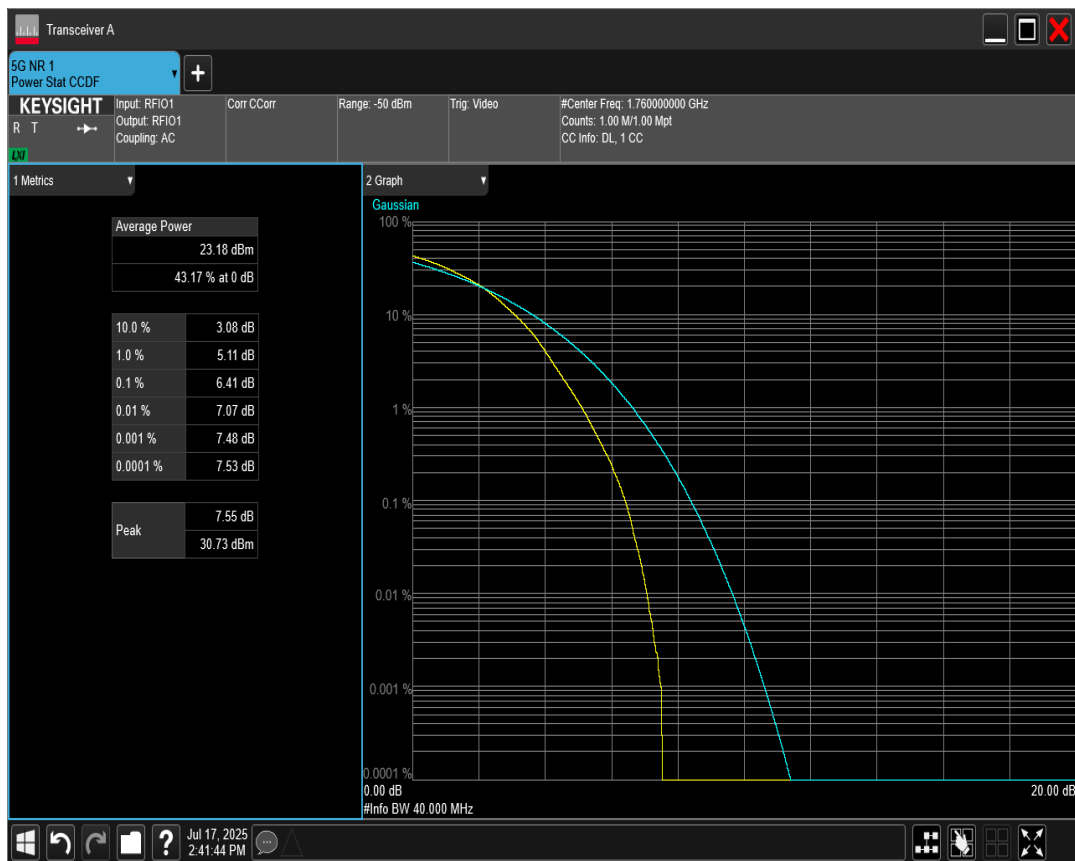


n66 SCS=15kHz DFT_QPSK BW=15MHz Channel=349000 RB=75@0

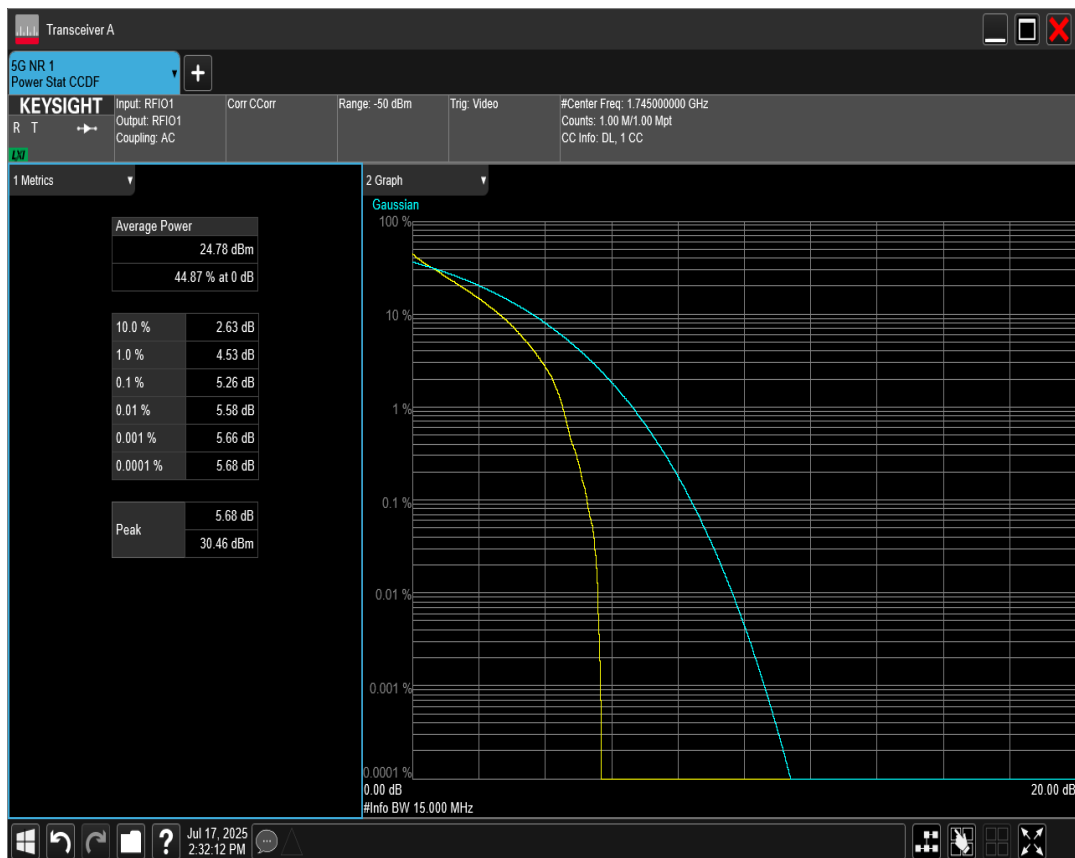


n66 SCS=15kHz DFT_QPSK BW=15MHz Channel=354500 RB=75@0

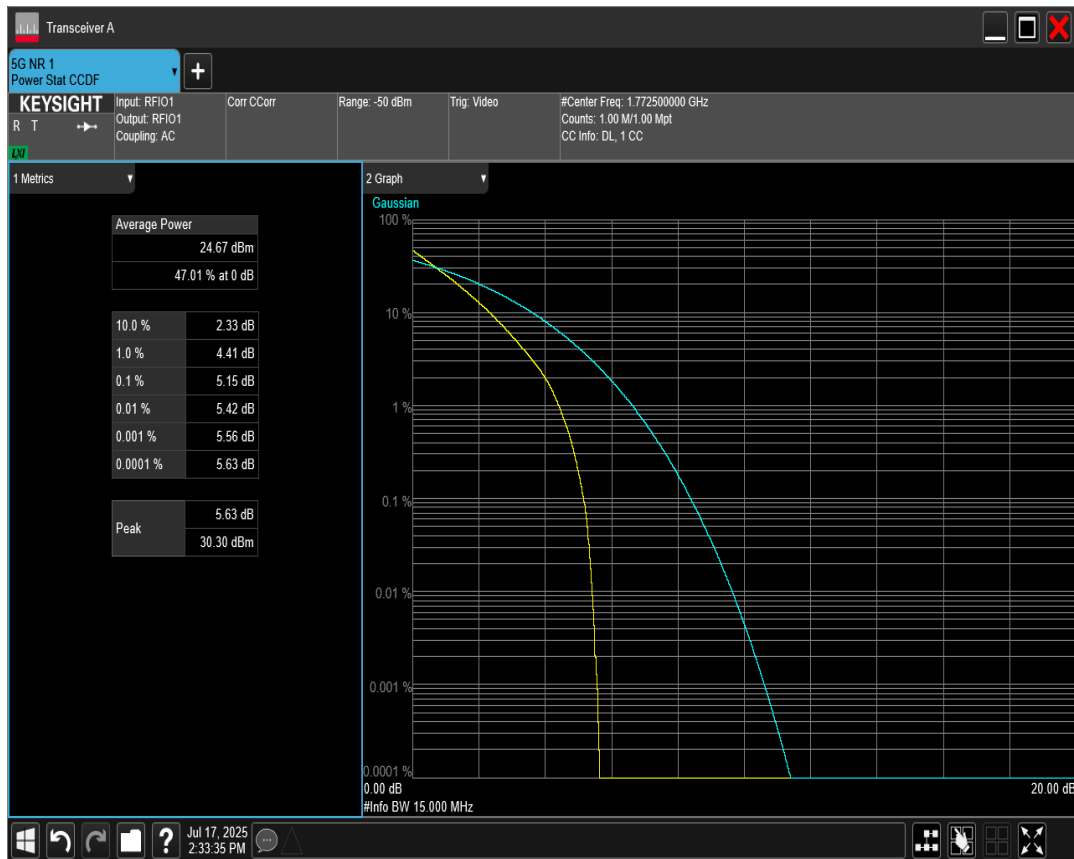


n66 SCS=15kHz DFT_QPSK BW=15MHz Channel=343500 RB=75@0

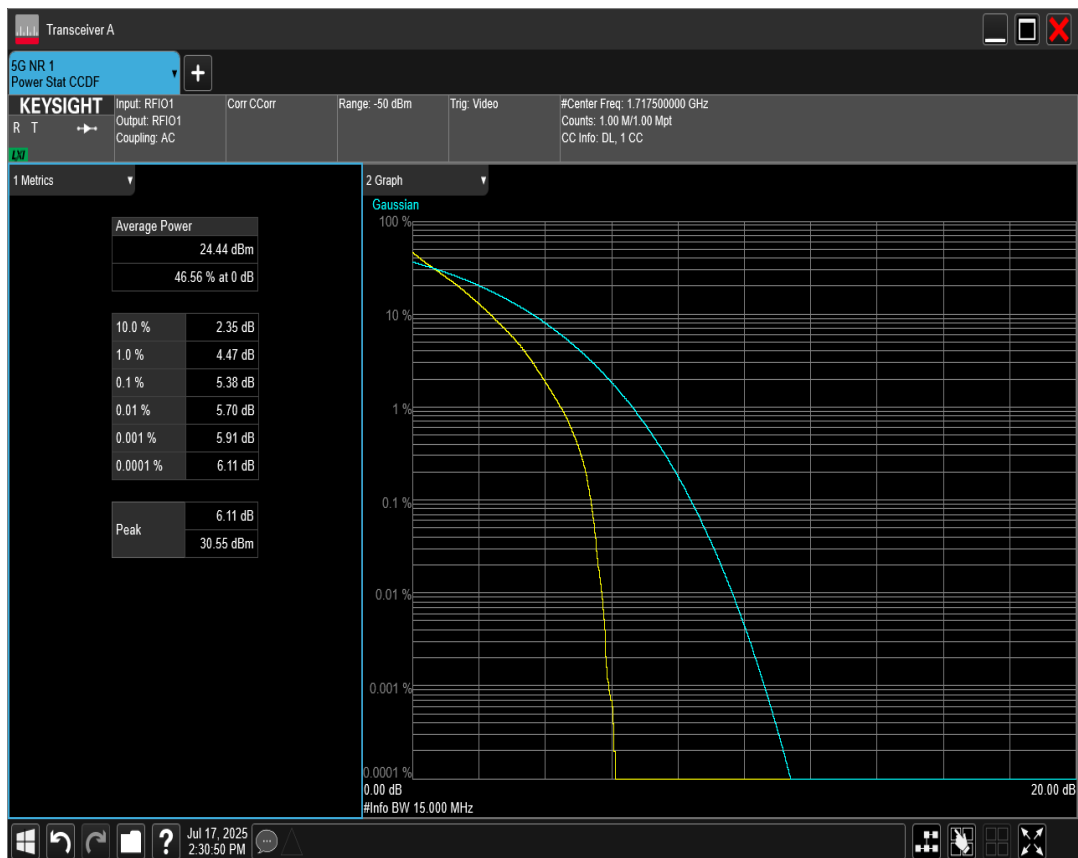


n66 SCS=15kHz DFT_QPSK BW=10MHz Channel=349000 RB=50@0

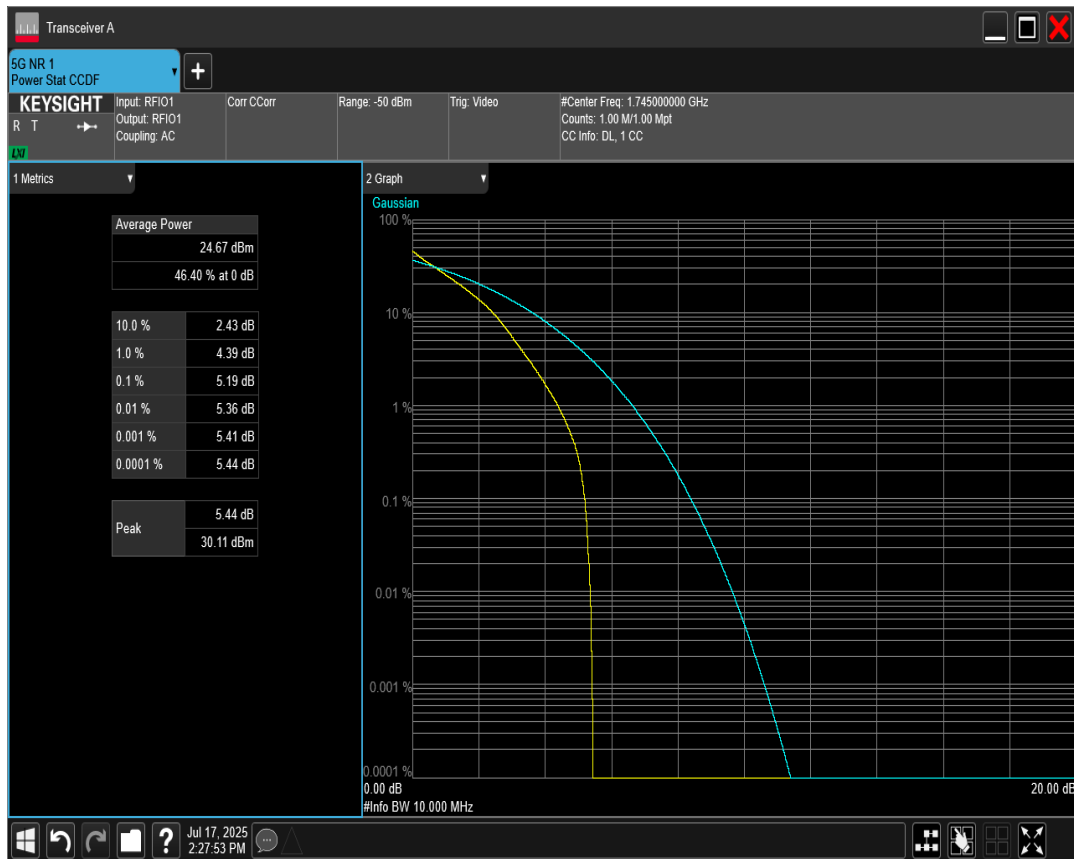


n66 SCS=15kHz DFT_QPSK BW=10MHz Channel=355000 RB=50@0

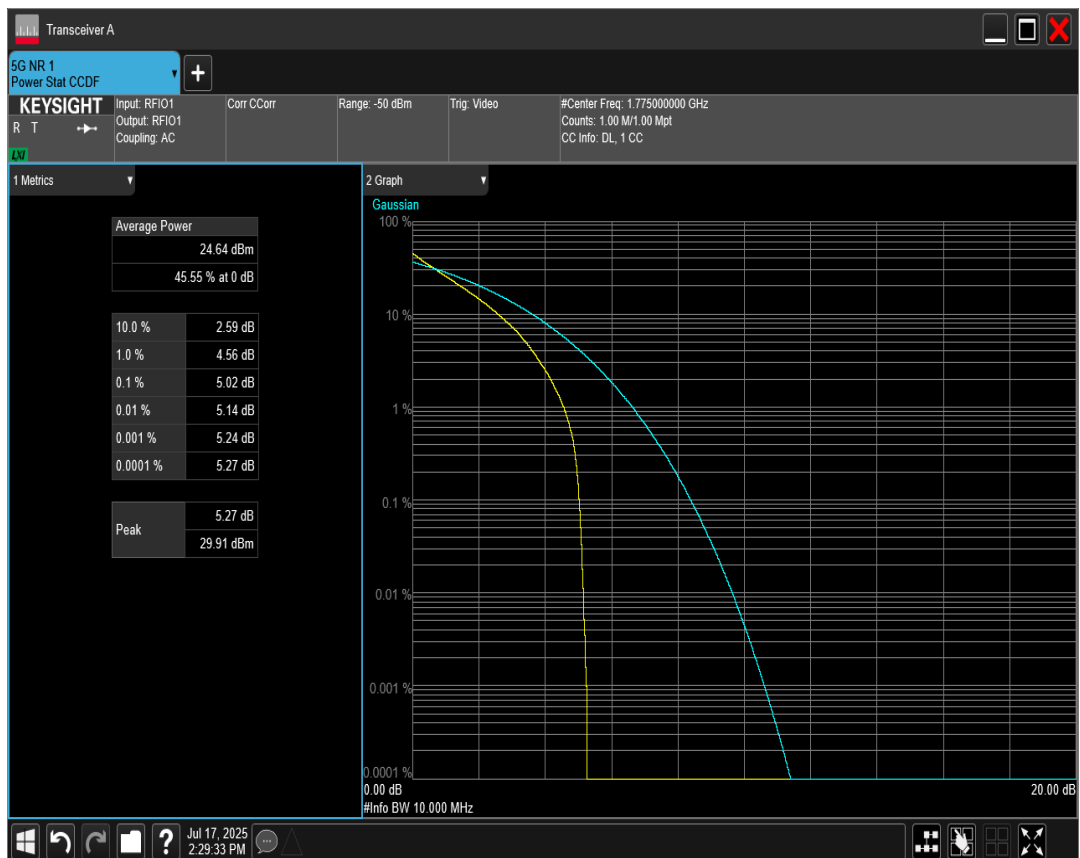


n66 SCS=15kHz DFT_QPSK BW=20MHz Channel=349000 RB=100@0

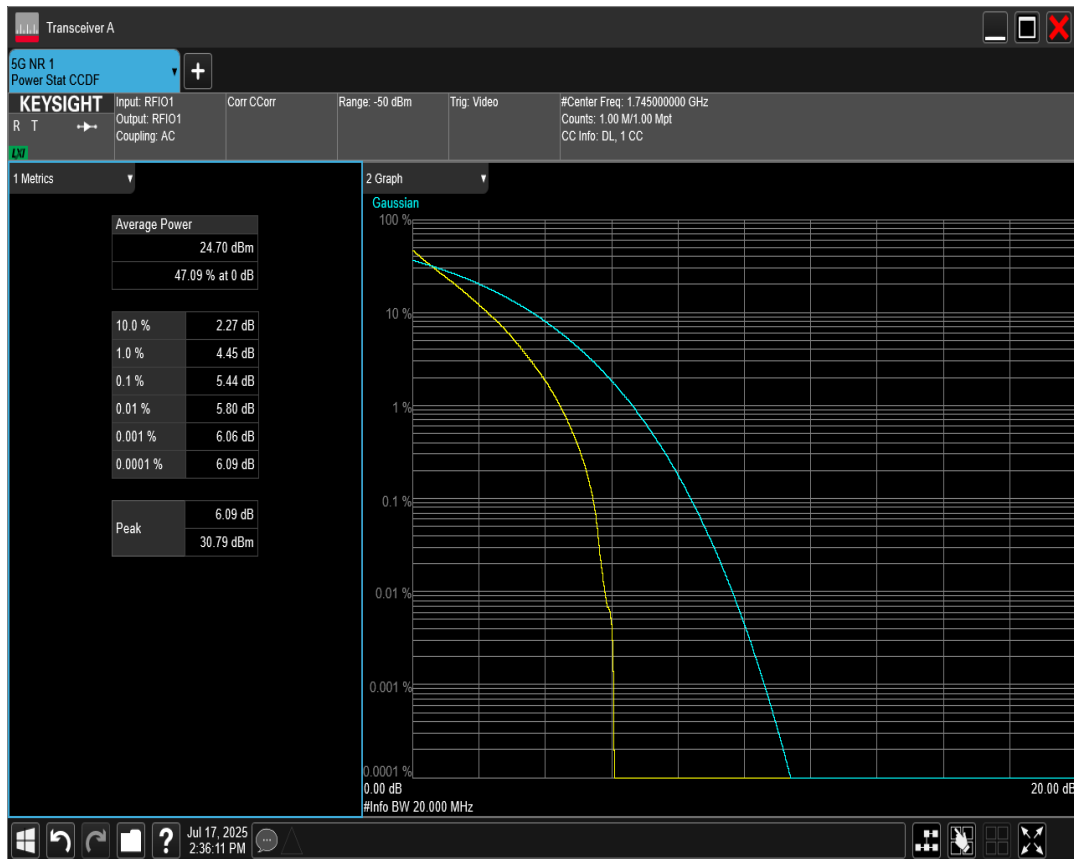


n66 SCS=15kHz DFT_QPSK BW=20MHz Channel=344000 RB=100@0

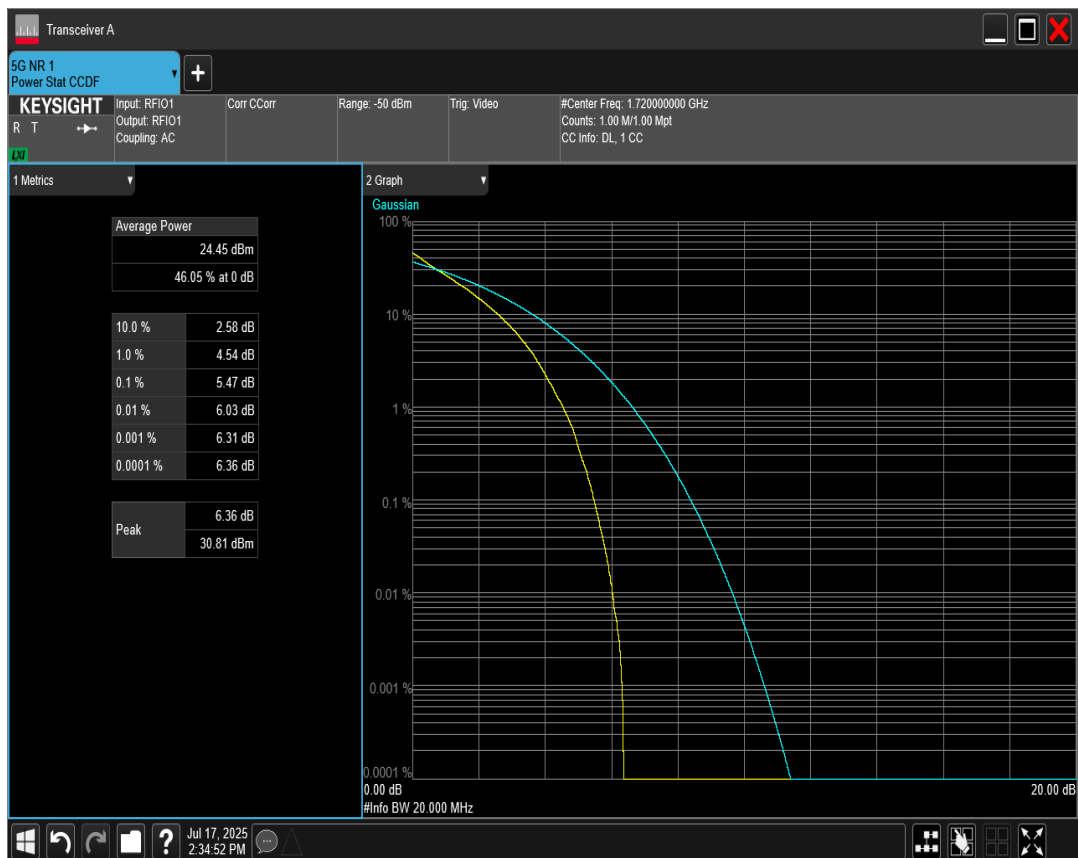


n66 SCS=15kHz DFT_QPSK BW=40MHz Channel=349000 RB=216@0

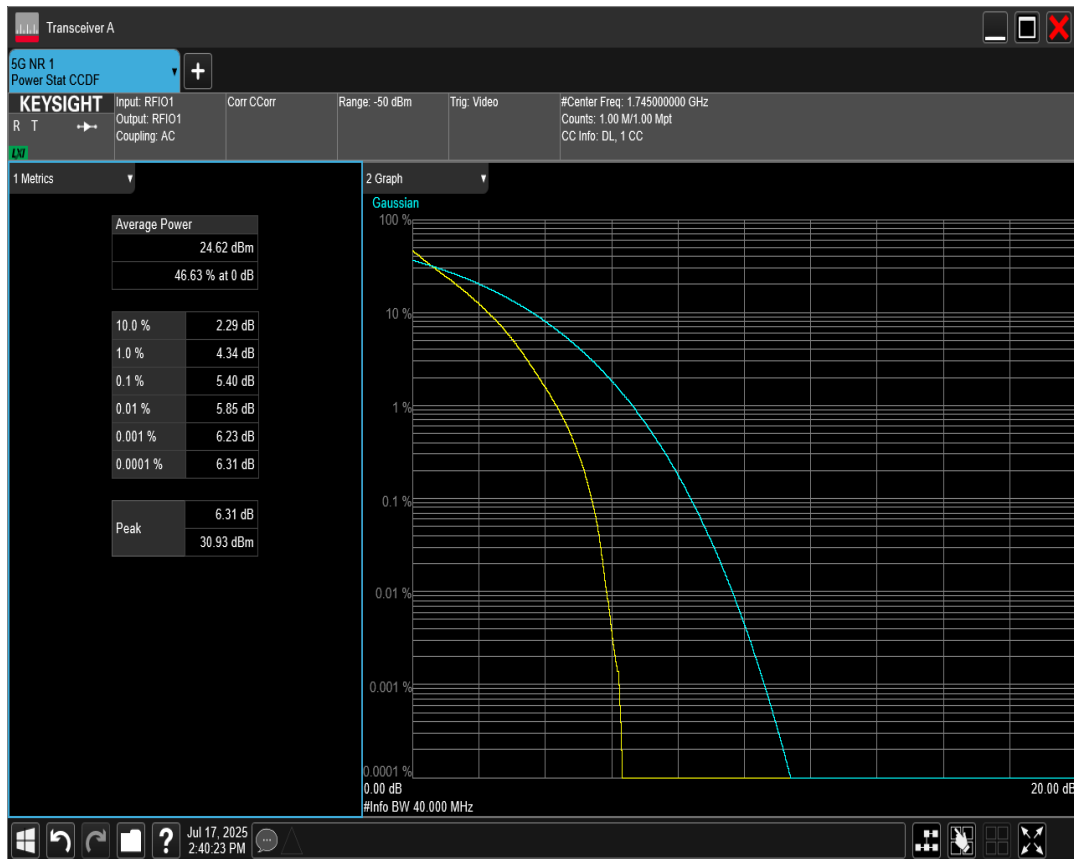


n66 SCS=15kHz DFT_QPSK BW=40MHz Channel=346000 RB=216@0

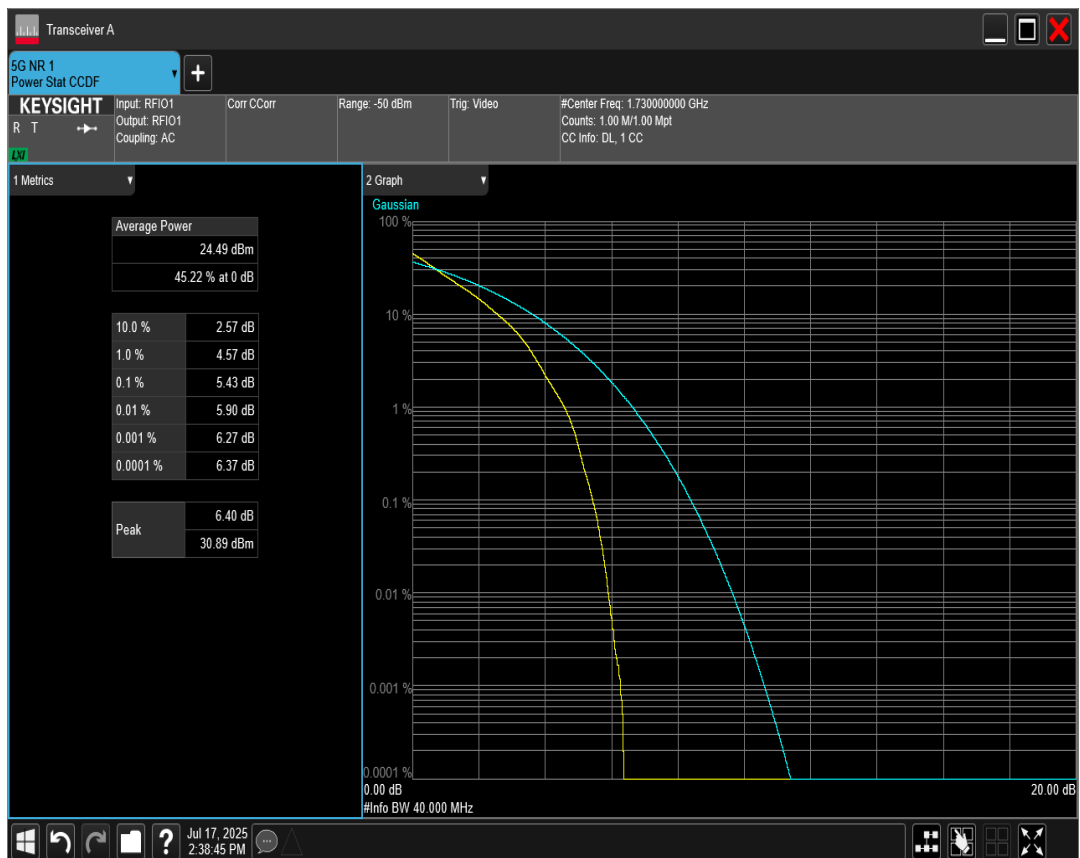


n66 SCS=15kHz DFT_QPSK BW=20MHz Channel=354000 RB=100@0

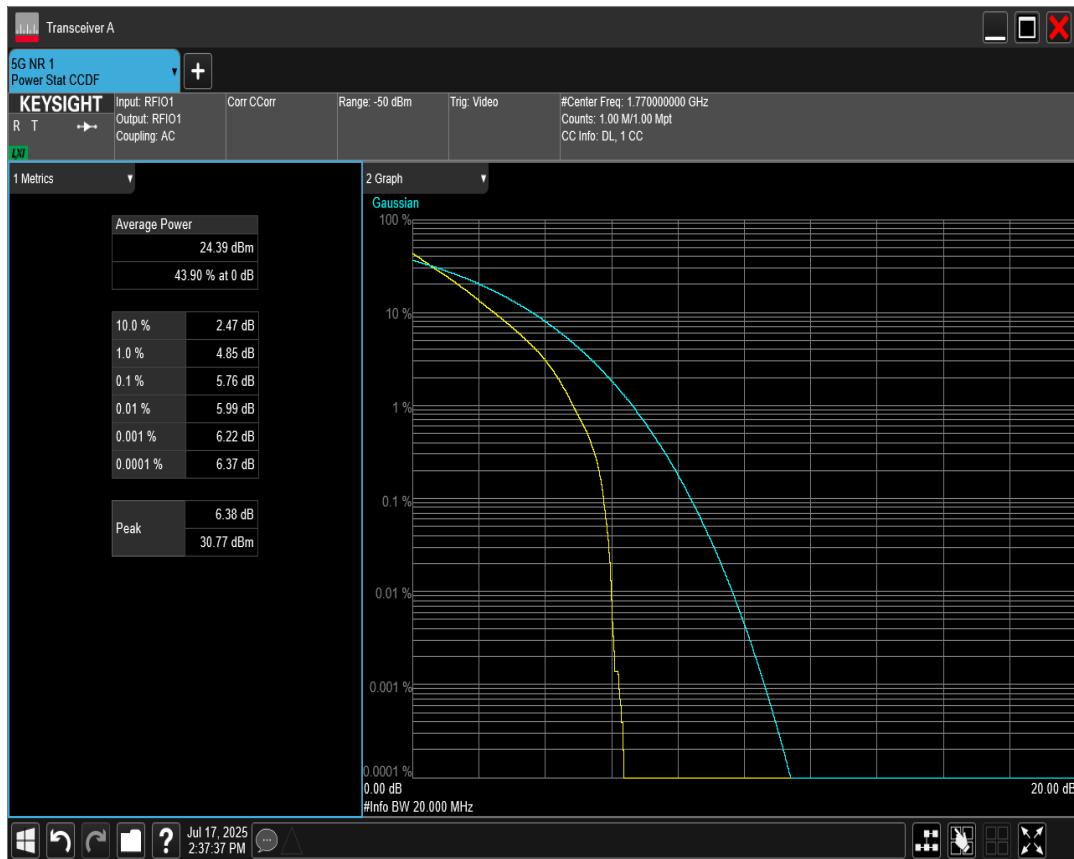


n66 SCS=15kHz DFT_QPSK BW=5MHz Channel=349000 RB=25@0

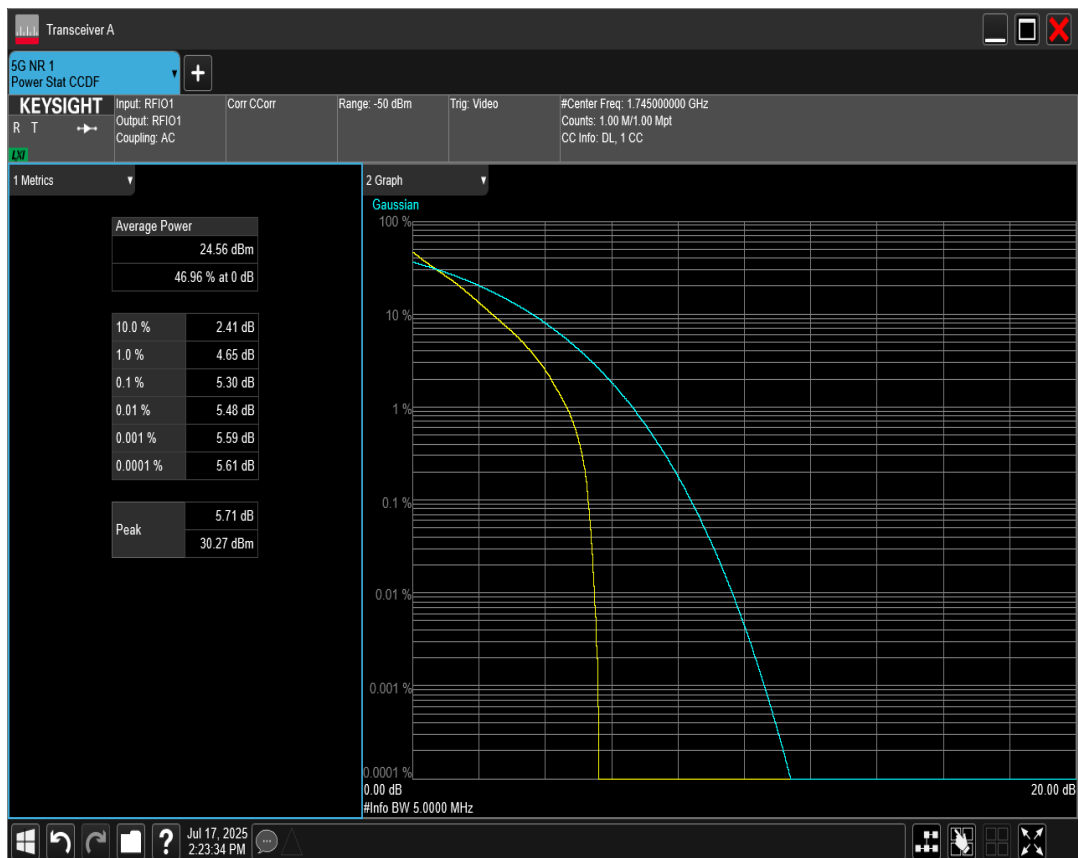


n66 SCS=15kHz DFT_QPSK BW=5MHz Channel=355500 RB=25@0

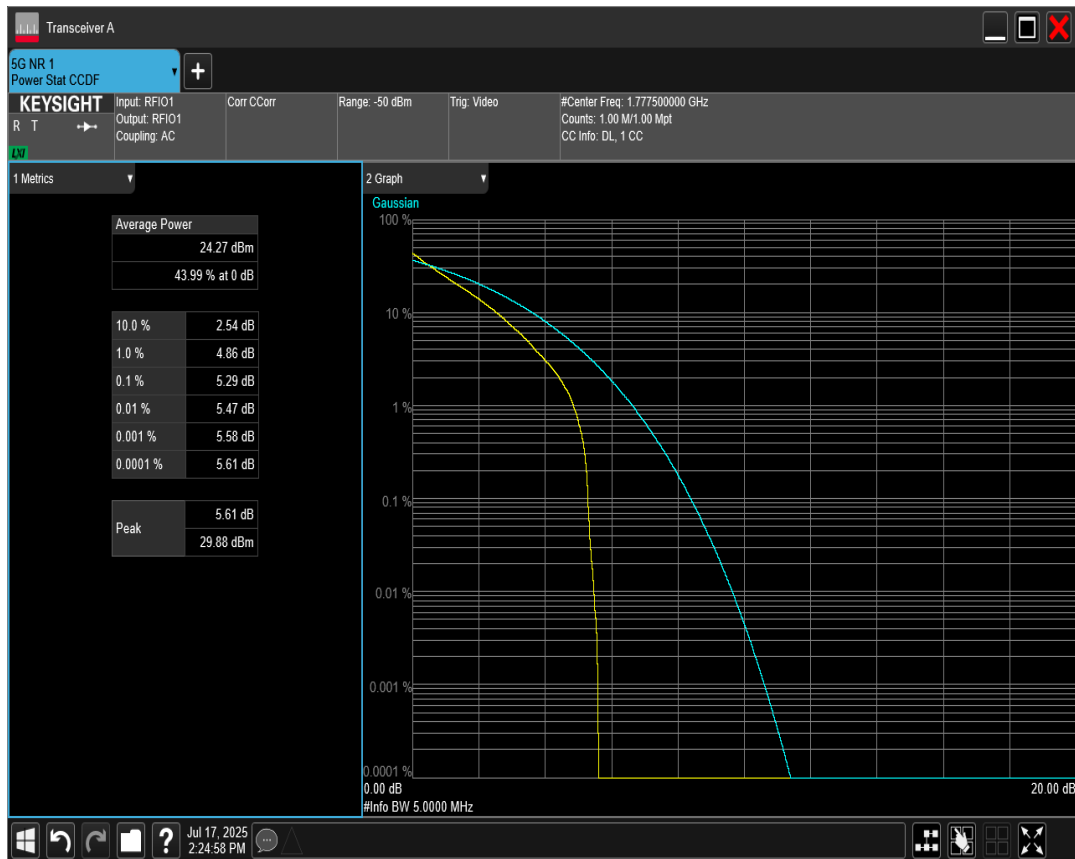

n66 SCS=15kHz DFT_QPSK BW=40MHz Channel=352000 RB=216@0

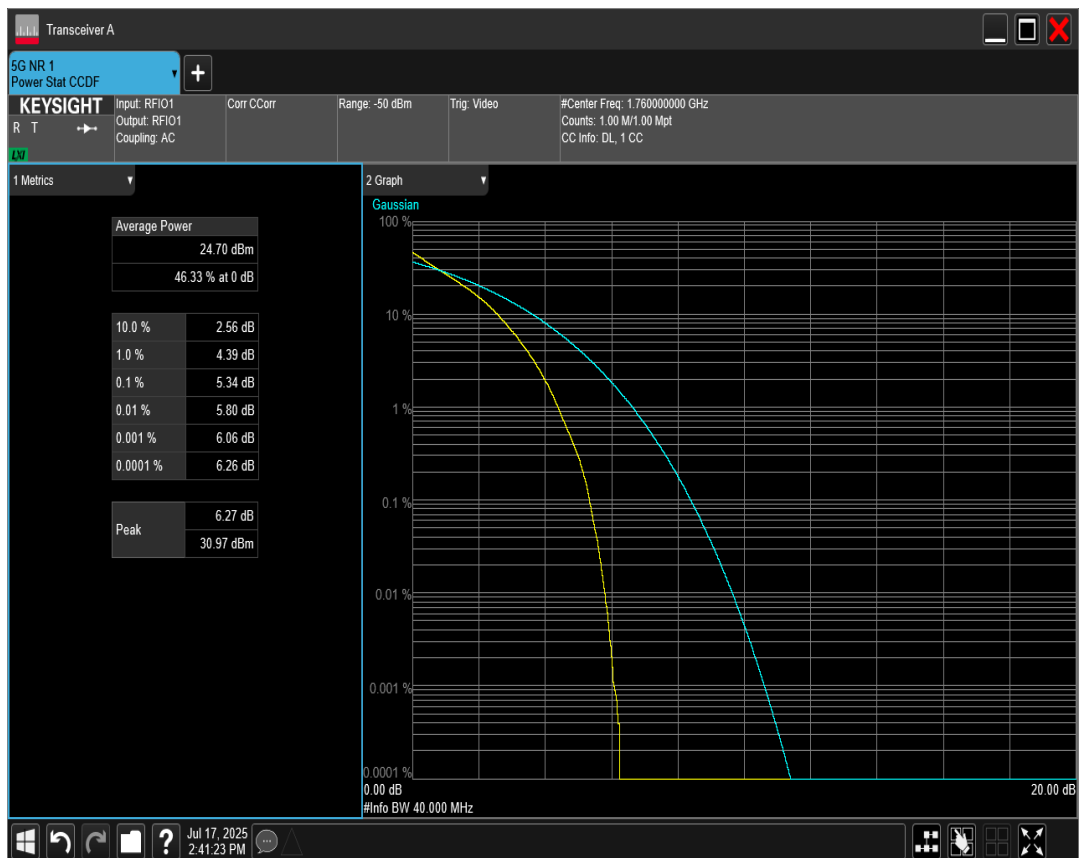

n66 SCS=15kHz DFT_QPSK BW=5MHz Channel=342500 RB=25@0

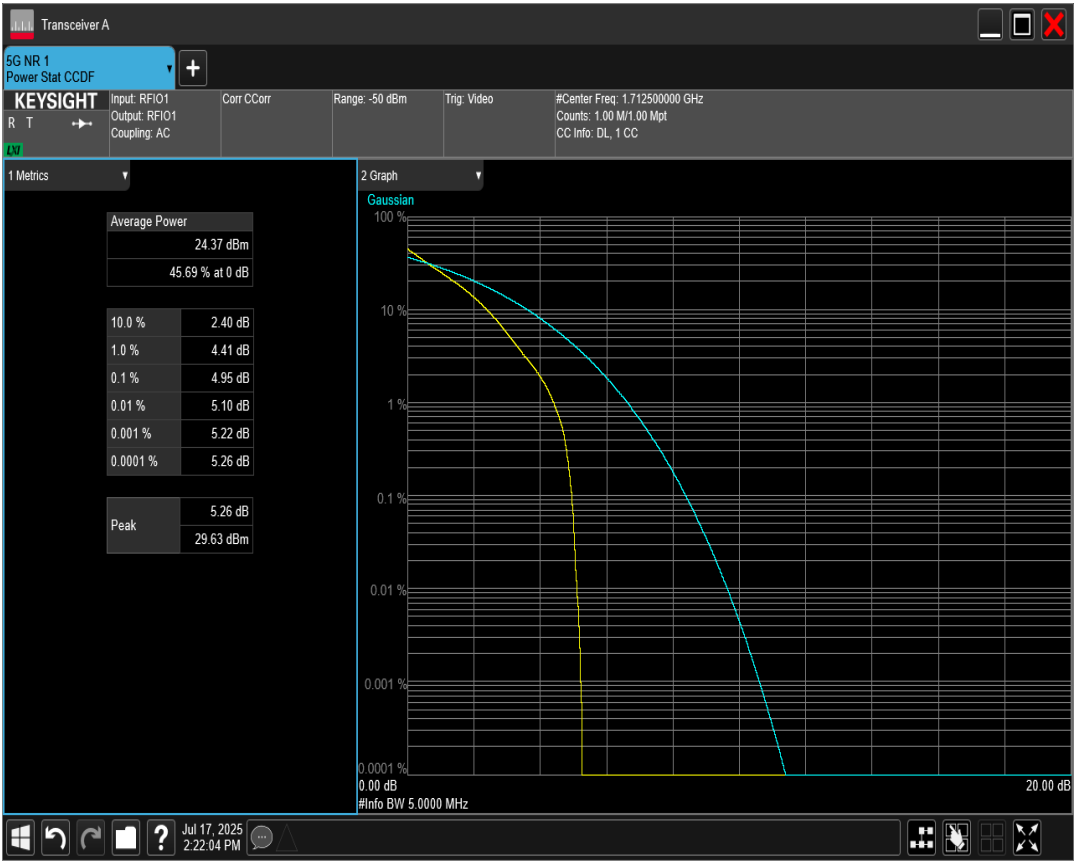

4 Occupied bandwidth for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	99% OBW (MHz)	-26dB EBW (MHz)	Verdict
n66	15	5	349000	25@0	DFT_BPSK	4.470	4.620	PASS
n66	15	5	349000	25@0	DFT_QPSK	4.460	4.710	PASS
n66	15	5	349000	25@0	DFT_QAM16	4.460	4.610	PASS
n66	15	5	349000	25@0	DFT_QAM64	4.470	4.630	PASS
n66	15	5	349000	25@0	DFT_QAM256	4.460	4.620	PASS
n66	15	10	349000	50@0	DFT_BPSK	9.230	9.100	PASS
n66	15	10	349000	50@0	DFT_QPSK	9.190	9.120	PASS
n66	15	10	349000	50@0	DFT_QAM16	9.260	9.120	PASS
n66	15	10	349000	50@0	DFT_QAM64	9.190	9.090	PASS
n66	15	10	349000	50@0	DFT_QAM256	9.160	9.140	PASS
n66	15	15	349000	75@0	DFT_BPSK	13.970	13.660	PASS
n66	15	15	349000	75@0	DFT_QPSK	14.010	13.600	PASS
n66	15	15	349000	75@0	DFT_QAM16	13.930	13.680	PASS
n66	15	15	349000	75@0	DFT_QAM64	13.980	13.600	PASS
n66	15	15	349000	75@0	DFT_QAM256	13.900	13.610	PASS
n66	15	20	349000	100@0	DFT_BPSK	18.780	18.140	PASS
n66	15	20	349000	100@0	DFT_QPSK	18.670	18.160	PASS
n66	15	20	349000	100@0	DFT_QAM16	18.640	18.130	PASS
n66	15	20	349000	100@0	DFT_QAM64	18.720	18.120	PASS
n66	15	20	349000	100@0	DFT_QAM256	18.670	18.100	PASS
n66	15	40	349000	216@0	DFT_BPSK	38.510	39.020	PASS
n66	15	40	349000	216@0	DFT_QPSK	38.510	39.000	PASS
n66	15	40	349000	216@0	DFT_QAM16	38.480	39.010	PASS
n66	15	40	349000	216@0	DFT_QAM64	38.480	39.030	PASS
n66	15	40	349000	216@0	DFT_QAM256	38.520	39.040	PASS

n66 SCS=15kHz DFT_BPSK BW=10MHz Channel=349000 RB=50@0



n66 SCS=15kHz DFT_BPSK BW=20MHz Channel=349000 RB=100@0



n66 SCS=15kHz DFT_BPSK BW=15MHz Channel=349000 RB=75@0



n66 SCS=15kHz DFT_BPSK BW=40MHz Channel=349000 RB=216@0



n66 SCS=15kHz DFT_QAM16 BW=15MHz Channel=349000 RB=75@0



n66 SCS=15kHz DFT_QAM16 BW=20MHz Channel=349000 RB=100@0



n66 SCS=15kHz DFT_BPSK BW=5MHz Channel=349000 RB=25@0



n66 SCS=15kHz DFT_QAM16 BW=10MHz Channel=349000 RB=50@0



n66 SCS=15kHz DFT_QAM256 BW=10MHz Channel=349000 RB=50@0



n66 SCS=15kHz DFT_QAM16 BW=5MHz Channel=349000 RB=25@0



n66 SCS=15kHz DFT_QAM16 BW=40MHz Channel=349000 RB=216@0



n66 SCS=15kHz DFT_QAM256 BW=40MHz Channel=349000 RB=216@0



n66 SCS=15kHz DFT_QAM256 BW=20MHz Channel=349000 RB=100@0