

TABLE OF CONTENTS

1 Conducted output power for NR FR12

2 Frequency stability for NR FR14

3 Peak-to-Average Ratio for NR FR16

4 Occupied bandwidth for NR FR188

5 Band edge for NR FR1 117

6 Out-of-band emissions for NR FR1125

1 Conducted output power for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Power (dBm)	Low Limit (dBm)	high Limit (dBm)	Verdict	
n78(3700-3800)	30	10	647000	1@1	DFT_BPSK	22.57	-1.84	20.73	30.00	Pass
n78(3700-3800)	30	10	647000	24@0	DFT_QPSK	21.67	-1.84	19.83	30.00	Pass
n78(3700-3800)	30	10	647000	12@6	DFT_QPSK	22.82	-1.84	20.98	30.00	Pass
n78(3700-3800)	30	10	647000	1@1	DFT_QPSK	22.82	-1.84	20.98	30.00	Pass
n78(3700-3800)	30	10	647000	1@22	DFT_QPSK	22.94	-1.84	21.10	30.00	Pass
n78(3700-3800)	30	10	647000	1@1	DFT_QAM16	21.83	-1.84	19.99	30.00	Pass
n78(3700-3800)	30	10	647000	1@1	DFT_QAM64	20.45	-1.84	18.61	30.00	Pass
n78(3700-3800)	30	10	647000	1@1	DFT_QAM256	18.12	-1.84	16.28	30.00	Pass
n78(3700-3800)	30	10	647000	1@1	CP_QPSK	21.15	-1.84	19.31	30.00	Pass
n78(3700-3800)	30	10	650000	1@1	DFT_BPSK	23.10	-1.84	21.26	30.00	Pass
n78(3700-3800)	30	10	650000	24@0	DFT_QPSK	22.05	-1.84	20.21	30.00	Pass
n78(3700-3800)	30	10	650000	12@6	DFT_QPSK	23.10	-1.84	21.26	30.00	Pass
n78(3700-3800)	30	10	650000	1@1	DFT_QPSK	23.10	-1.84	21.26	30.00	Pass
n78(3700-3800)	30	10	650000	1@22	DFT_QPSK	23.11	-1.84	21.27	30.00	Pass
n78(3700-3800)	30	10	650000	1@1	DFT_QAM16	22.46	-1.84	20.62	30.00	Pass
n78(3700-3800)	30	10	650000	1@1	DFT_QAM64	20.17	-1.84	18.33	30.00	Pass
n78(3700-3800)	30	10	650000	1@1	DFT_QAM256	18.81	-1.84	16.97	30.00	Pass
n78(3700-3800)	30	10	650000	1@1	CP_QPSK	21.70	-1.84	19.86	30.00	Pass
n78(3700-3800)	30	10	653000	1@1	DFT_BPSK	23.11	-1.84	21.27	30.00	Pass
n78(3700-3800)	30	10	653000	24@0	DFT_QPSK	21.91	-1.84	20.07	30.00	Pass
n78(3700-3800)	30	10	653000	12@6	DFT_QPSK	22.95	-1.84	21.11	30.00	Pass
n78(3700-3800)	30	10	653000	1@1	DFT_QPSK	22.95	-1.84	21.11	30.00	Pass
n78(3700-3800)	30	10	653000	1@22	DFT_QPSK	22.90	-1.84	21.06	30.00	Pass
n78(3700-3800)	30	10	653000	1@1	DFT_QAM16	22.03	-1.84	20.19	30.00	Pass
n78(3700-3800)	30	10	653000	1@1	DFT_QAM64	20.46	-1.84	18.62	30.00	Pass
n78(3700-3800)	30	10	653000	1@1	DFT_QAM256	18.40	-1.84	16.56	30.00	Pass
n78(3700-3800)	30	10	653000	1@1	CP_QPSK	21.57	-1.84	19.73	30.00	Pass
n78(3700-3800)	30	50	648334	1@1	DFT_BPSK	22.65	-1.84	20.81	30.00	Pass
n78(3700-3800)	30	50	648334	128@0	DFT_QPSK	22.08	-1.84	20.24	30.00	Pass
n78(3700-3800)	30	50	648334	64@32	DFT_QPSK	23.09	-1.84	21.25	30.00	Pass
n78(3700-3800)	30	50	648334	1@1	DFT_QPSK	22.65	-1.84	20.81	30.00	Pass
n78(3700-3800)	30	50	648334	1@131	DFT_QPSK	23.07	-1.84	21.23	30.00	Pass
n78(3700-3800)	30	50	648334	1@1	DFT_QAM16	21.67	-1.84	19.83	30.00	Pass
n78(3700-3800)	30	50	648334	1@1	DFT_QAM64	20.04	-1.84	18.20	30.00	Pass
n78(3700-3800)	30	50	648334	1@1	DFT_QAM256	18.13	-1.84	16.29	30.00	Pass
n78(3700-3800)	30	50	648334	1@1	CP_QPSK	21.16	-1.84	19.32	30.00	Pass
n78(3700-3800)	30	50	650000	1@1	DFT_BPSK	22.90	-1.84	21.06	30.00	Pass
n78(3700-3800)	30	50	650000	128@0	DFT_QPSK	22.10	-1.84	20.26	30.00	Pass

n78(3700-3800)	30	50	650000	64@32	DFT_QPSK	23.29	-1.84	21.45	30.00	Pass
n78(3700-3800)	30	50	650000	1@1	DFT_QPSK	22.89	-1.84	21.05	30.00	Pass
n78(3700-3800)	30	50	650000	1@131	DFT_QPSK	23.03	-1.84	21.19	30.00	Pass
n78(3700-3800)	30	50	650000	1@1	DFT_QAM16	21.77	-1.84	19.93	30.00	Pass
n78(3700-3800)	30	50	650000	1@1	DFT_QAM64	20.26	-1.84	18.42	30.00	Pass
n78(3700-3800)	30	50	650000	1@1	DFT_QAM256	-32.50	-1.84	-34.34	30.00	Pass
n78(3700-3800)	30	50	650000	1@1	CP_QPSK	21.20	-1.84	19.36	30.00	Pass
n78(3700-3800)	30	50	651666	1@1	DFT_BPSK	23.01	-1.84	21.17	30.00	Pass
n78(3700-3800)	30	50	651666	128@0	DFT_QPSK	22.06	-1.84	20.22	30.00	Pass
n78(3700-3800)	30	50	651666	64@32	DFT_QPSK	23.06	-1.84	21.22	30.00	Pass
n78(3700-3800)	30	50	651666	1@1	DFT_QPSK	22.93	-1.84	21.09	30.00	Pass
n78(3700-3800)	30	50	651666	1@131	DFT_QPSK	22.81	-1.84	20.97	30.00	Pass
n78(3700-3800)	30	50	651666	1@1	DFT_QAM16	22.17	-1.84	20.33	30.00	Pass
n78(3700-3800)	30	50	651666	1@1	DFT_QAM64	20.27	-1.84	18.43	30.00	Pass
n78(3700-3800)	30	50	651666	1@1	DFT_QAM256	18.42	-1.84	16.58	30.00	Pass
n78(3700-3800)	30	50	651666	1@1	CP_QPSK	21.29	-1.84	19.45	30.00	Pass
n78(3700-3800)	30	100	650000	1@1	DFT_BPSK	22.42	-1.84	20.58	30.00	Pass
n78(3700-3800)	30	100	650000	270@0	DFT_QPSK	21.93	-1.84	20.09	30.00	Pass
n78(3700-3800)	30	100	650000	135@67	DFT_QPSK	22.99	-1.84	21.15	30.00	Pass
n78(3700-3800)	30	100	650000	1@1	DFT_QPSK	22.45	-1.84	20.61	30.00	Pass
n78(3700-3800)	30	100	650000	1@271	DFT_QPSK	22.78	-1.84	20.94	30.00	Pass
n78(3700-3800)	30	100	650000	1@1	DFT_QAM16	21.24	-1.84	19.40	30.00	Pass
n78(3700-3800)	30	100	650000	1@1	DFT_QAM64	19.72	-1.84	17.88	30.00	Pass
n78(3700-3800)	30	100	650000	1@1	DFT_QAM256	17.76	-1.84	15.92	30.00	Pass
n78(3700-3800)	30	100	650000	1@1	CP_QPSK	20.93	-1.84	19.09	30.00	Pass

2 Frequency stability for NR FR1

Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result(Hz)	Result (ppm)	Low Limit (ppm)	high Limit (ppm)	Verdict
n78(3700-3800)	30	10	647000	12@6	DFT_BPSK	-19.89	-0.00537	-2.5	2.5	PASS
n78(3700-3800)	30	10	647000	1@1	DFT_BPSK	-24.09	-0.00650	-2.5	2.5	PASS
n78(3700-3800)	30	10	647000	1@22	DFT_BPSK	-28.81	-0.00778	-2.5	2.5	PASS
n78(3700-3800)	30	10	647000	12@6	DFT_QPSK	-9.32	-0.00252	-2.5	2.5	PASS
n78(3700-3800)	30	10	647000	1@1	DFT_QPSK	-18.55	-0.00501	-2.5	2.5	PASS
n78(3700-3800)	30	10	647000	1@22	DFT_QPSK	-1.46	-0.00039	-2.5	2.5	PASS
n78(3700-3800)	30	10	650000	12@6	DFT_BPSK	-10.95	-0.00292	-2.5	2.5	PASS
n78(3700-3800)	30	10	650000	1@1	DFT_BPSK	-15.37	-0.00410	-2.5	2.5	PASS
n78(3700-3800)	30	10	650000	1@22	DFT_BPSK	-9.71	-0.00259	-2.5	2.5	PASS
n78(3700-3800)	30	10	650000	12@6	DFT_QPSK	4.68	0.00125	-2.5	2.5	PASS
n78(3700-3800)	30	10	650000	1@1	DFT_QPSK	-0.03	-0.00001	-2.5	2.5	PASS
n78(3700-3800)	30	10	650000	1@22	DFT_QPSK	-2.82	-0.00075	-2.5	2.5	PASS
n78(3700-3800)	30	10	653000	12@6	DFT_BPSK	-10.94	-0.00288	-2.5	2.5	PASS
n78(3700-3800)	30	10	653000	1@1	DFT_BPSK	-24.69	-0.00651	-2.5	2.5	PASS
n78(3700-3800)	30	10	653000	1@22	DFT_BPSK	-3.83	-0.00101	-2.5	2.5	PASS
n78(3700-3800)	30	10	653000	12@6	DFT_QPSK	-5.84	-0.00154	-2.5	2.5	PASS
n78(3700-3800)	30	10	653000	1@1	DFT_QPSK	1.18	0.00031	-2.5	2.5	PASS
n78(3700-3800)	30	10	653000	1@22	DFT_QPSK	0.31	0.00008	-2.5	2.5	PASS
n78(3700-3800)	30	50	648334	64@32	DFT_BPSK	-0.22	-0.00006	-2.5	2.5	PASS
n78(3700-3800)	30	50	648334	1@1	DFT_BPSK	-9.15	-0.00246	-2.5	2.5	PASS
n78(3700-3800)	30	50	648334	1@131	DFT_BPSK	-20.23	-0.00543	-2.5	2.5	PASS
n78(3700-3800)	30	50	648334	64@32	DFT_QPSK	-16.03	-0.00430	-2.5	2.5	PASS
n78(3700-3800)	30	50	648334	1@1	DFT_QPSK	-14.70	-0.00395	-2.5	2.5	PASS
n78(3700-3800)	30	50	648334	1@131	DFT_QPSK	0.71	0.00019	-2.5	2.5	PASS
n78(3700-3800)	30	50	650000	64@32	DFT_BPSK	-9.71	-0.00259	-2.5	2.5	PASS
n78(3700-3800)	30	50	650000	1@1	DFT_BPSK	-2.78	-0.00074	-2.5	2.5	PASS
n78(3700-3800)	30	50	650000	1@131	DFT_BPSK	-17.06	-0.00455	-2.5	2.5	PASS
n78(3700-3800)	30	50	650000	64@32	DFT_QPSK	-4.10	-0.00109	-2.5	2.5	PASS
n78(3700-3800)	30	50	650000	1@1	DFT_QPSK	1.62	0.00043	-2.5	2.5	PASS
n78(3700-3800)	30	50	650000	1@131	DFT_QPSK	-1.60	-0.00043	-2.5	2.5	PASS
n78(3700-3800)	30	50	651666	64@32	DFT_BPSK	-5.38	-0.00143	-2.5	2.5	PASS
n78(3700-3800)	30	50	651666	1@1	DFT_BPSK	-1.27	-0.00034	-2.5	2.5	PASS
n78(3700-3800)	30	50	651666	1@131	DFT_BPSK	-9.22	-0.00244	-2.5	2.5	PASS
n78(3700-3800)	30	50	651666	64@32	DFT_QPSK	-2.94	-0.00078	-2.5	2.5	PASS
n78(3700-3800)	30	50	651666	1@1	DFT_QPSK	4.98	0.00132	-2.5	2.5	PASS
n78(3700-3800)	30	50	651666	1@131	DFT_QPSK	-1.96	-0.00052	-2.5	2.5	PASS
n78(3700-3800)	30	100	650000	135@67	DFT_BPSK	2.67	0.00071	-2.5	2.5	PASS
n78(3700-3800)	30	100	650000	1@1	DFT_BPSK	-6.77	-0.00181	-2.5	2.5	PASS
n78(3700-3800)	30	100	650000	1@271	DFT_BPSK	-12.31	-0.00328	-2.5	2.5	PASS

n78(3700-3800)	30	100	650000	135@67	DFT_QPSK	-7.63	-0.00203	-2.5	2.5	PASS
n78(3700-3800)	30	100	650000	1@1	DFT_QPSK	-5.76	-0.00154	-2.5	2.5	PASS
n78(3700-3800)	30	100	650000	1@271	DFT_QPSK	-13.95	-0.00372	-2.5	2.5	PASS

Note: (Voltage: 3.92V, Temperature: 25°C) only reflect the worst mode.

3 Peak-to-Average Ratio for NR FR1


Band	SCS (kHz)	Bandwidth (MHz)	UL Channel	RB Allocation	Modulation	Result (dB)	high Limit (dB)	Verdict
n78(3700-3800)	30	10	647000	24@0	DFT_BPSK	4.46	13	PASS
n78(3700-3800)	30	10	647000	24@0	DFT_QPSK	5.48	13	PASS
n78(3700-3800)	30	10	647000	24@0	DFT_QAM16	5.96	13	PASS
n78(3700-3800)	30	10	647000	24@0	DFT_QAM64	6.21	13	PASS
n78(3700-3800)	30	10	647000	24@0	DFT_QAM256	6.41	13	PASS
n78(3700-3800)	30	10	650000	24@0	DFT_BPSK	4.07	13	PASS
n78(3700-3800)	30	10	650000	24@0	DFT_QPSK	5.17	13	PASS
n78(3700-3800)	30	10	650000	24@0	DFT_QAM16	6.11	13	PASS
n78(3700-3800)	30	10	650000	24@0	DFT_QAM64	6.30	13	PASS
n78(3700-3800)	30	10	650000	24@0	DFT_QAM256	6.48	13	PASS
n78(3700-3800)	30	10	653000	24@0	DFT_BPSK	4.12	13	PASS
n78(3700-3800)	30	10	653000	24@0	DFT_QPSK	5.39	13	PASS
n78(3700-3800)	30	10	653000	24@0	DFT_QAM16	6.17	13	PASS
n78(3700-3800)	30	10	653000	24@0	DFT_QAM64	6.43	13	PASS
n78(3700-3800)	30	10	653000	24@0	DFT_QAM256	6.55	13	PASS
n78(3700-3800)	30	15	647168	36@0	DFT_BPSK	3.98	13	PASS
n78(3700-3800)	30	15	647168	36@0	DFT_QPSK	5.32	13	PASS
n78(3700-3800)	30	15	647168	36@0	DFT_QAM16	5.88	13	PASS
n78(3700-3800)	30	15	647168	36@0	DFT_QAM64	6.04	13	PASS
n78(3700-3800)	30	15	647168	36@0	DFT_QAM256	6.80	13	PASS
n78(3700-3800)	30	15	650000	36@0	DFT_BPSK	3.95	13	PASS
n78(3700-3800)	30	15	650000	36@0	DFT_QPSK	5.17	13	PASS
n78(3700-3800)	30	15	650000	36@0	DFT_QAM16	6.12	13	PASS
n78(3700-3800)	30	15	650000	36@0	DFT_QAM64	6.15	13	PASS
n78(3700-3800)	30	15	650000	36@0	DFT_QAM256	6.75	13	PASS
n78(3700-3800)	30	15	652832	36@0	DFT_BPSK	4.02	13	PASS
n78(3700-3800)	30	15	652832	36@0	DFT_QPSK	5.31	13	PASS
n78(3700-3800)	30	15	652832	36@0	DFT_QAM16	6.15	13	PASS
n78(3700-3800)	30	15	652832	36@0	DFT_QAM64	6.06	13	PASS
n78(3700-3800)	30	15	652832	36@0	DFT_QAM256	6.53	13	PASS
n78(3700-3800)	30	20	647334	50@0	DFT_BPSK	4.40	13	PASS
n78(3700-3800)	30	20	647334	50@0	DFT_QPSK	5.38	13	PASS
n78(3700-3800)	30	20	647334	50@0	DFT_QAM16	5.89	13	PASS
n78(3700-3800)	30	20	647334	50@0	DFT_QAM64	6.34	13	PASS
n78(3700-3800)	30	20	647334	50@0	DFT_QAM256	6.72	13	PASS
n78(3700-3800)	30	20	650000	50@0	DFT_BPSK	4.42	13	PASS
n78(3700-3800)	30	20	650000	50@0	DFT_QPSK	5.37	13	PASS
n78(3700-3800)	30	20	650000	50@0	DFT_QAM16	5.99	13	PASS
n78(3700-3800)	30	20	650000	50@0	DFT_QAM64	6.35	13	PASS

n78(3700-3800)	30	20	650000	50@0	DFT_QAM256	6.72	13	PASS
n78(3700-3800)	30	20	652666	50@0	DFT_BPSK	4.03	13	PASS
n78(3700-3800)	30	20	652666	50@0	DFT_QPSK	5.31	13	PASS
n78(3700-3800)	30	20	652666	50@0	DFT_QAM16	5.89	13	PASS
n78(3700-3800)	30	20	652666	50@0	DFT_QAM64	6.28	13	PASS
n78(3700-3800)	30	20	652666	50@0	DFT_QAM256	6.46	13	PASS
n78(3700-3800)	30	30	647668	75@0	DFT_BPSK	4.09	13	PASS
n78(3700-3800)	30	30	647668	75@0	DFT_QPSK	5.46	13	PASS
n78(3700-3800)	30	30	647668	75@0	DFT_QAM16	6.09	13	PASS
n78(3700-3800)	30	30	647668	75@0	DFT_QAM64	6.24	13	PASS
n78(3700-3800)	30	30	647668	75@0	DFT_QAM256	6.43	13	PASS
n78(3700-3800)	30	30	650000	75@0	DFT_BPSK	4.33	13	PASS
n78(3700-3800)	30	30	650000	75@0	DFT_QPSK	5.22	13	PASS
n78(3700-3800)	30	30	650000	75@0	DFT_QAM16	5.98	13	PASS
n78(3700-3800)	30	30	650000	75@0	DFT_QAM64	6.48	13	PASS
n78(3700-3800)	30	30	650000	75@0	DFT_QAM256	6.84	13	PASS
n78(3700-3800)	30	30	652332	75@0	DFT_BPSK	4.00	13	PASS
n78(3700-3800)	30	30	652332	75@0	DFT_QPSK	5.20	13	PASS
n78(3700-3800)	30	30	652332	75@0	DFT_QAM16	6.21	13	PASS
n78(3700-3800)	30	30	652332	75@0	DFT_QAM64	6.29	13	PASS
n78(3700-3800)	30	30	652332	75@0	DFT_QAM256	6.63	13	PASS
n78(3700-3800)	30	40	648000	100@0	DFT_BPSK	4.78	13	PASS
n78(3700-3800)	30	40	648000	100@0	DFT_QPSK	5.45	13	PASS
n78(3700-3800)	30	40	648000	100@0	DFT_QAM16	6.23	13	PASS
n78(3700-3800)	30	40	648000	100@0	DFT_QAM64	6.33	13	PASS
n78(3700-3800)	30	40	648000	100@0	DFT_QAM256	6.66	13	PASS
n78(3700-3800)	30	40	650000	100@0	DFT_BPSK	4.02	13	PASS
n78(3700-3800)	30	40	650000	100@0	DFT_QPSK	5.34	13	PASS
n78(3700-3800)	30	40	650000	100@0	DFT_QAM16	6.38	13	PASS
n78(3700-3800)	30	40	650000	100@0	DFT_QAM64	6.06	13	PASS
n78(3700-3800)	30	40	650000	100@0	DFT_QAM256	6.90	13	PASS
n78(3700-3800)	30	40	652000	100@0	DFT_BPSK	4.37	13	PASS
n78(3700-3800)	30	40	652000	100@0	DFT_QPSK	5.49	13	PASS
n78(3700-3800)	30	40	652000	100@0	DFT_QAM16	6.07	13	PASS
n78(3700-3800)	30	40	652000	100@0	DFT_QAM64	6.29	13	PASS
n78(3700-3800)	30	40	652000	100@0	DFT_QAM256	6.71	13	PASS
n78(3700-3800)	30	50	648334	128@0	DFT_BPSK	4.04	13	PASS
n78(3700-3800)	30	50	648334	128@0	DFT_QPSK	5.55	13	PASS
n78(3700-3800)	30	50	648334	128@0	DFT_QAM16	6.12	13	PASS
n78(3700-3800)	30	50	648334	128@0	DFT_QAM64	6.20	13	PASS
n78(3700-3800)	30	50	648334	128@0	DFT_QAM256	6.65	13	PASS
n78(3700-3800)	30	50	650000	128@0	DFT_BPSK	4.05	13	PASS
n78(3700-3800)	30	50	650000	128@0	DFT_QPSK	5.44	13	PASS
n78(3700-3800)	30	50	650000	128@0	DFT_QAM16	6.19	13	PASS


n78(3700-3800)	30	50	650000	128@0	DFT_QAM64	6.41	13	PASS
n78(3700-3800)	30	50	650000	128@0	DFT_QAM256	6.54	13	PASS
n78(3700-3800)	30	50	651666	128@0	DFT_BPSK	4.08	13	PASS
n78(3700-3800)	30	50	651666	128@0	DFT_QPSK	5.23	13	PASS
n78(3700-3800)	30	50	651666	128@0	DFT_QAM16	6.21	13	PASS
n78(3700-3800)	30	50	651666	128@0	DFT_QAM64	6.40	13	PASS
n78(3700-3800)	30	50	651666	128@0	DFT_QAM256	6.53	13	PASS
n78(3700-3800)	30	60	648668	162@0	DFT_BPSK	3.98	13	PASS
n78(3700-3800)	30	60	648668	162@0	DFT_QPSK	5.45	13	PASS
n78(3700-3800)	30	60	648668	162@0	DFT_QAM16	6.20	13	PASS
n78(3700-3800)	30	60	648668	162@0	DFT_QAM64	6.47	13	PASS
n78(3700-3800)	30	60	648668	162@0	DFT_QAM256	6.47	13	PASS
n78(3700-3800)	30	60	650000	162@0	DFT_BPSK	4.67	13	PASS
n78(3700-3800)	30	60	650000	162@0	DFT_QPSK	5.29	13	PASS
n78(3700-3800)	30	60	650000	162@0	DFT_QAM16	6.33	13	PASS
n78(3700-3800)	30	60	650000	162@0	DFT_QAM64	6.39	13	PASS
n78(3700-3800)	30	60	650000	162@0	DFT_QAM256	6.45	13	PASS
n78(3700-3800)	30	60	651332	162@0	DFT_BPSK	3.95	13	PASS
n78(3700-3800)	30	60	651332	162@0	DFT_QPSK	5.42	13	PASS
n78(3700-3800)	30	60	651332	162@0	DFT_QAM16	6.35	13	PASS
n78(3700-3800)	30	60	651332	162@0	DFT_QAM64	6.08	13	PASS
n78(3700-3800)	30	60	651332	162@0	DFT_QAM256	6.96	13	PASS
n78(3700-3800)	30	70	649000	180@0	DFT_BPSK	4.95	13	PASS
n78(3700-3800)	30	70	649000	180@0	DFT_QPSK	6.00	13	PASS
n78(3700-3800)	30	70	649000	180@0	DFT_QAM16	6.05	13	PASS
n78(3700-3800)	30	70	649000	180@0	DFT_QAM64	6.34	13	PASS
n78(3700-3800)	30	70	649000	180@0	DFT_QAM256	6.82	13	PASS
n78(3700-3800)	30	70	650000	180@0	DFT_BPSK	4.11	13	PASS
n78(3700-3800)	30	70	650000	180@0	DFT_QPSK	6.10	13	PASS
n78(3700-3800)	30	70	650000	180@0	DFT_QAM16	6.30	13	PASS
n78(3700-3800)	30	70	650000	180@0	DFT_QAM64	6.53	13	PASS
n78(3700-3800)	30	70	650000	180@0	DFT_QAM256	6.40	13	PASS
n78(3700-3800)	30	70	651000	180@0	DFT_BPSK	4.32	13	PASS
n78(3700-3800)	30	70	651000	180@0	DFT_QPSK	5.71	13	PASS
n78(3700-3800)	30	70	651000	180@0	DFT_QAM16	6.11	13	PASS
n78(3700-3800)	30	70	651000	180@0	DFT_QAM64	6.39	13	PASS
n78(3700-3800)	30	70	651000	180@0	DFT_QAM256	6.49	13	PASS
n78(3700-3800)	30	80	649334	216@0	DFT_BPSK	4.15	13	PASS
n78(3700-3800)	30	80	649334	216@0	DFT_QPSK	5.49	13	PASS
n78(3700-3800)	30	80	649334	216@0	DFT_QAM16	6.63	13	PASS
n78(3700-3800)	30	80	649334	216@0	DFT_QAM64	6.75	13	PASS
n78(3700-3800)	30	80	649334	216@0	DFT_QAM256	7.54	13	PASS
n78(3700-3800)	30	80	650000	216@0	DFT_BPSK	3.89	13	PASS
n78(3700-3800)	30	80	650000	216@0	DFT_QPSK	5.19	13	PASS

n78(3700-3800)	30	80	650000	216@0	DFT_QAM16	5.99	13	PASS
n78(3700-3800)	30	80	650000	216@0	DFT_QAM64	6.36	13	PASS
n78(3700-3800)	30	80	650000	216@0	DFT_QAM256	6.94	13	PASS
n78(3700-3800)	30	80	650666	216@0	DFT_BPSK	3.86	13	PASS
n78(3700-3800)	30	80	650666	216@0	DFT_QPSK	6.13	13	PASS
n78(3700-3800)	30	80	650666	216@0	DFT_QAM16	6.04	13	PASS
n78(3700-3800)	30	80	650666	216@0	DFT_QAM64	6.81	13	PASS
n78(3700-3800)	30	80	650666	216@0	DFT_QAM256	6.62	13	PASS
n78(3700-3800)	30	90	649668	240@0	DFT_BPSK	4.25	13	PASS
n78(3700-3800)	30	90	649668	240@0	DFT_QPSK	5.43	13	PASS
n78(3700-3800)	30	90	649668	240@0	DFT_QAM16	6.17	13	PASS
n78(3700-3800)	30	90	649668	240@0	DFT_QAM64	6.32	13	PASS
n78(3700-3800)	30	90	649668	240@0	DFT_QAM256	6.70	13	PASS
n78(3700-3800)	30	90	650000	240@0	DFT_BPSK	4.68	13	PASS
n78(3700-3800)	30	90	650000	240@0	DFT_QPSK	6.35	13	PASS
n78(3700-3800)	30	90	650000	240@0	DFT_QAM16	5.94	13	PASS
n78(3700-3800)	30	90	650000	240@0	DFT_QAM64	6.52	13	PASS
n78(3700-3800)	30	90	650000	240@0	DFT_QAM256	6.63	13	PASS
n78(3700-3800)	30	90	650332	240@0	DFT_BPSK	4.02	13	PASS
n78(3700-3800)	30	90	650332	240@0	DFT_QPSK	5.38	13	PASS
n78(3700-3800)	30	90	650332	240@0	DFT_QAM16	5.94	13	PASS
n78(3700-3800)	30	90	650332	240@0	DFT_QAM64	6.36	13	PASS
n78(3700-3800)	30	90	650332	240@0	DFT_QAM256	6.61	13	PASS
n78(3700-3800)	30	100	650000	270@0	DFT_BPSK	4.43	13	PASS
n78(3700-3800)	30	100	650000	270@0	DFT_QPSK	5.68	13	PASS
n78(3700-3800)	30	100	650000	270@0	DFT_QAM16	6.11	13	PASS
n78(3700-3800)	30	100	650000	270@0	DFT_QAM64	6.76	13	PASS
n78(3700-3800)	30	100	650000	270@0	DFT_QAM256	6.86	13	PASS


n78(3700-3800) SCS=30kHz DFT_BPSK BW=100MHz Channel=650000 RB=270@0

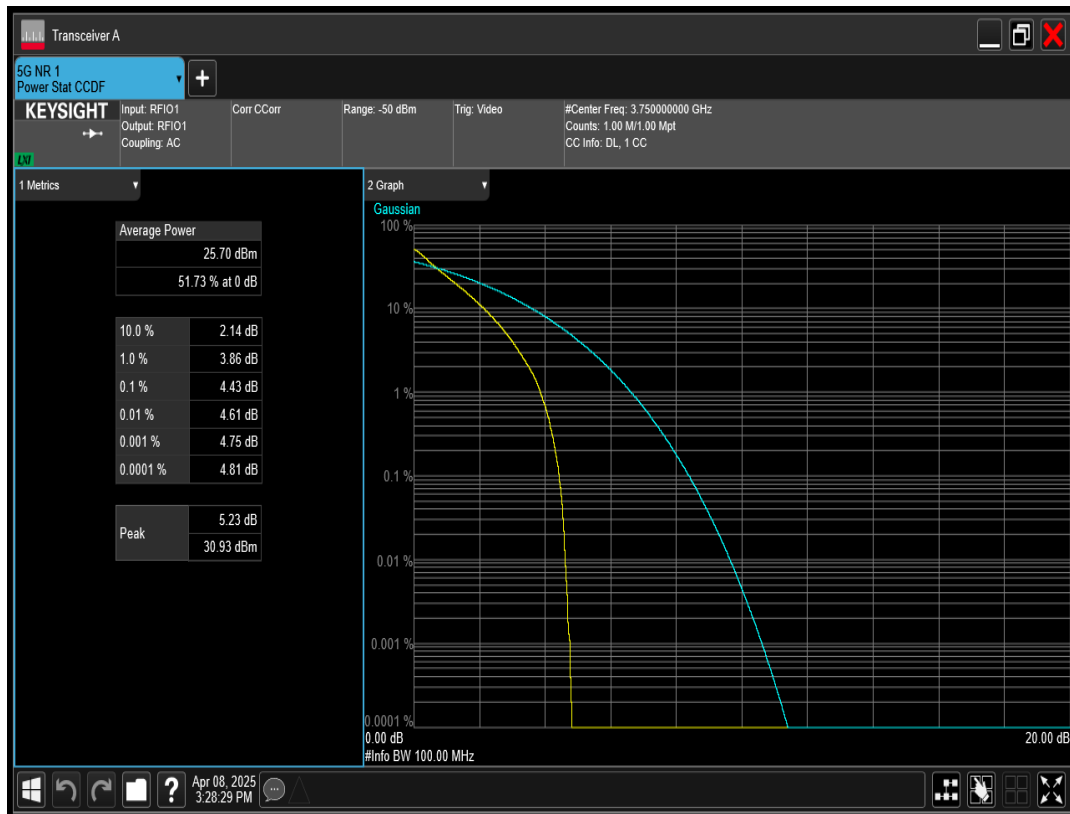


n78(3700-3800) SCS=30kHz DFT_BPSK BW=10MHz Channel=647000 RB=24@0

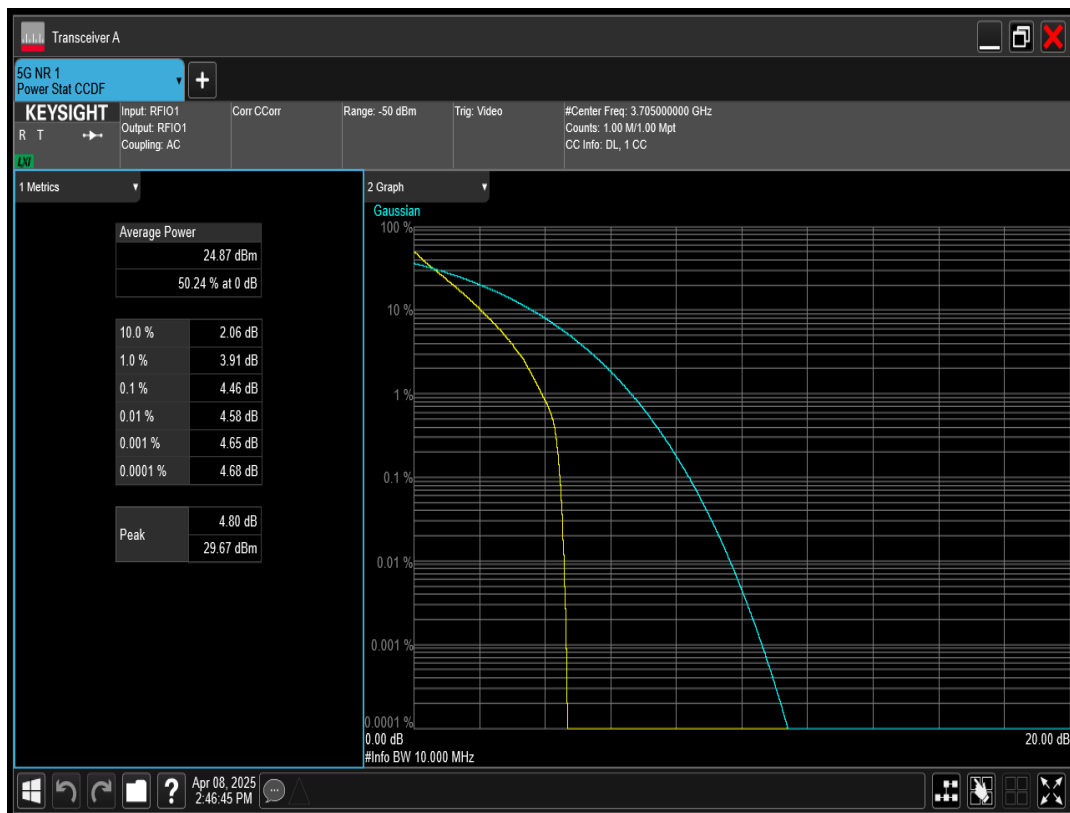


n78(3700-3800) SCS=30kHz DFT_BPSK BW=10MHz Channel=650000 RB=24@0

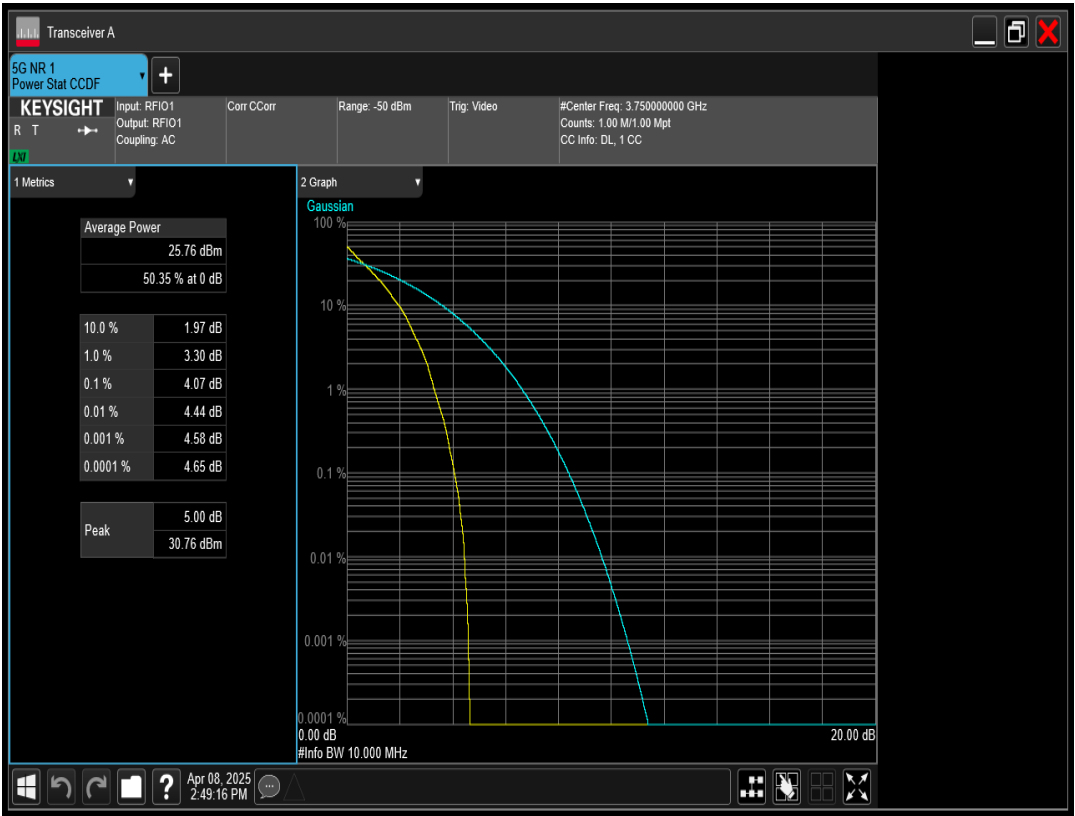


n78(3700-3800) SCS=30kHz DFT_BPSK BW=10MHz Channel=653000 RB=24@0

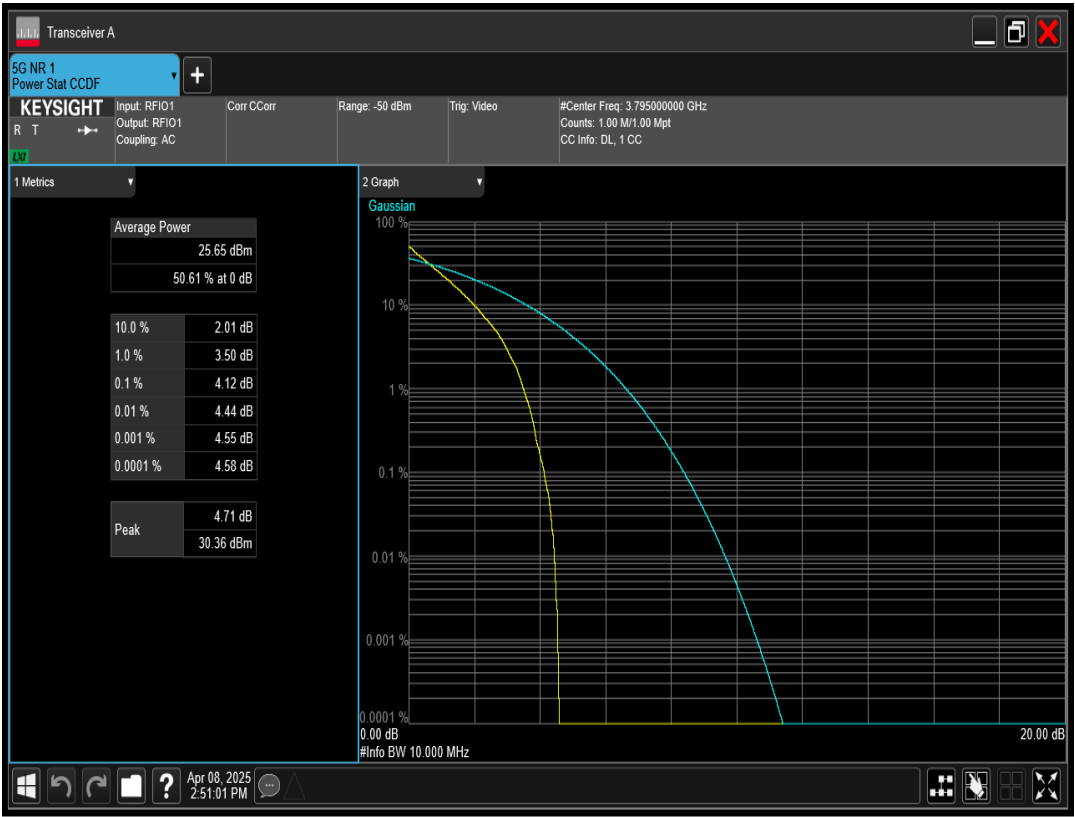


n78(3700-3800) SCS=30kHz DFT_BPSK BW=15MHz Channel=647168 RB=36@0

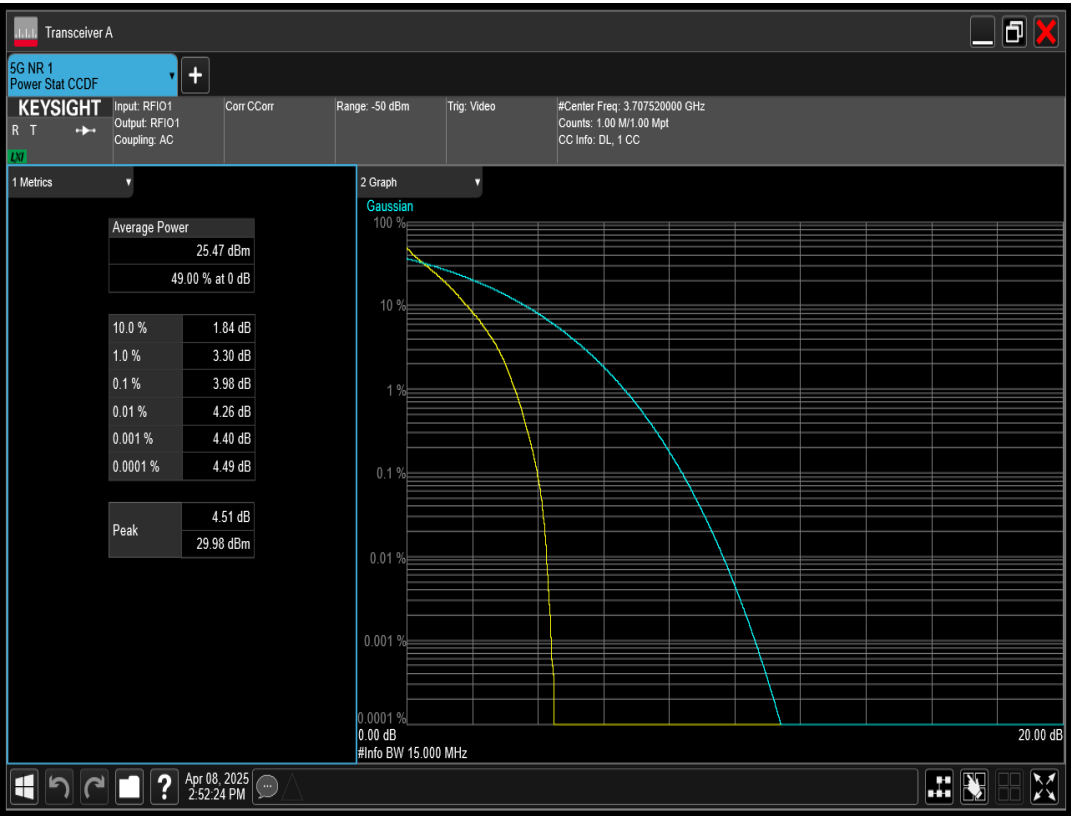


n78(3700-3800) SCS=30kHz DFT_BPSK BW=15MHz Channel=652832 RB=36@0

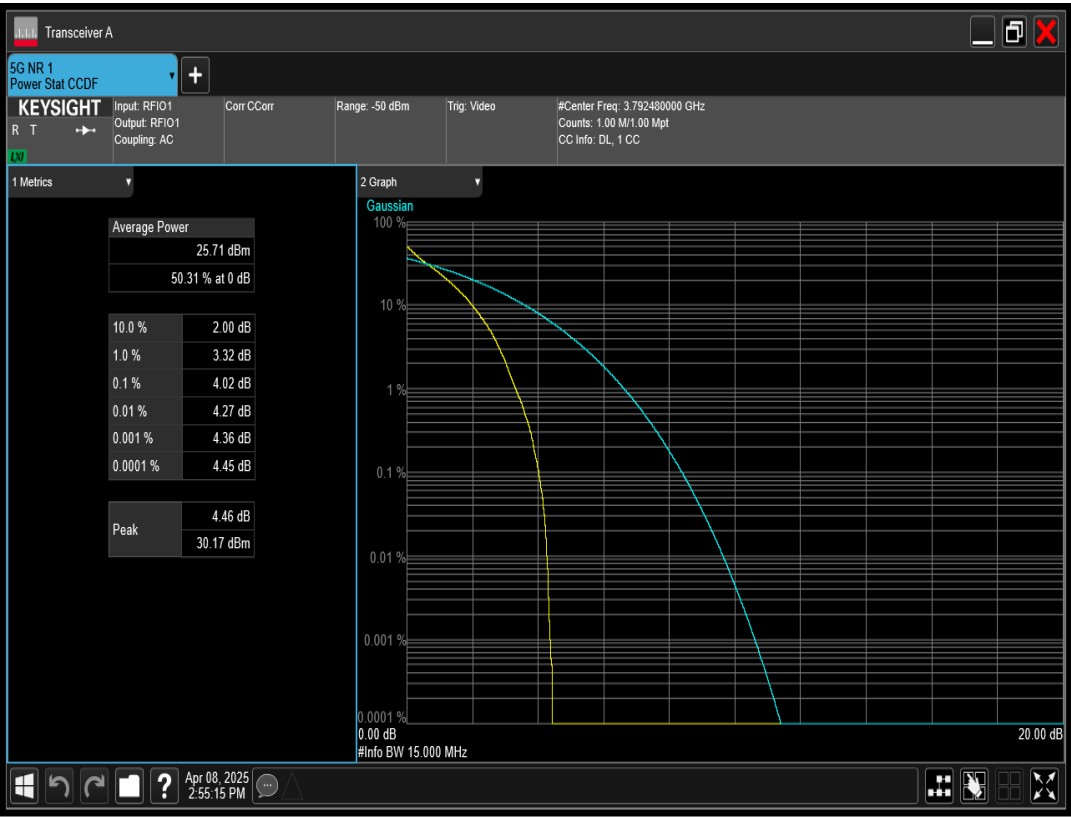


n78(3700-3800) SCS=30kHz DFT_BPSK BW=15MHz Channel=650000 RB=36@0

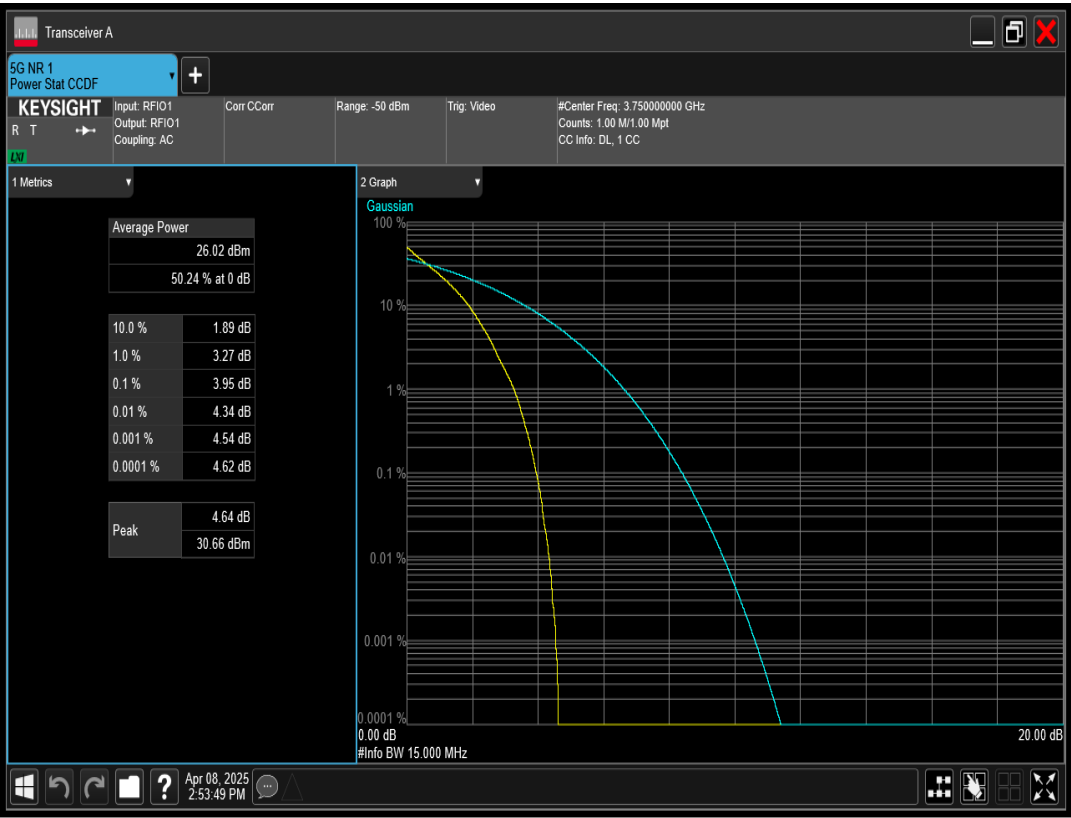


n78(3700-3800) SCS=30kHz DFT_BPSK BW=20MHz Channel=647334 RB=50@0

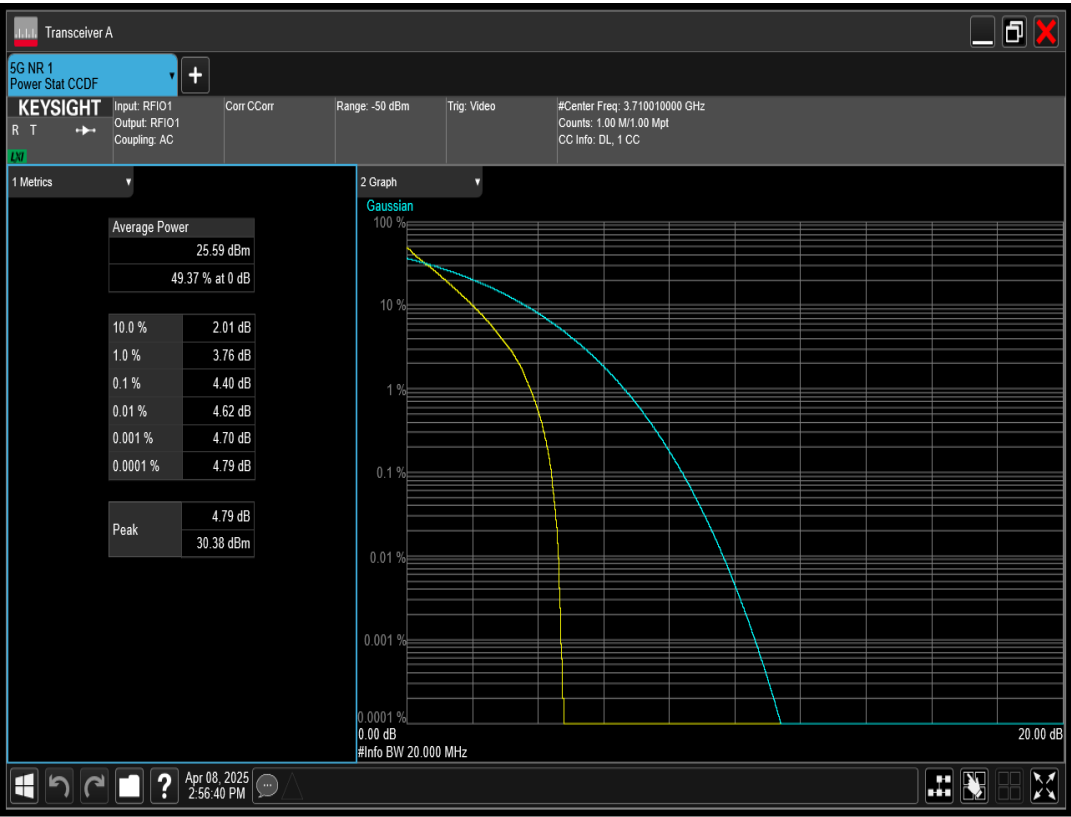


n78(3700-3800) SCS=30kHz DFT_BPSK BW=20MHz Channel=650000 RB=50@0

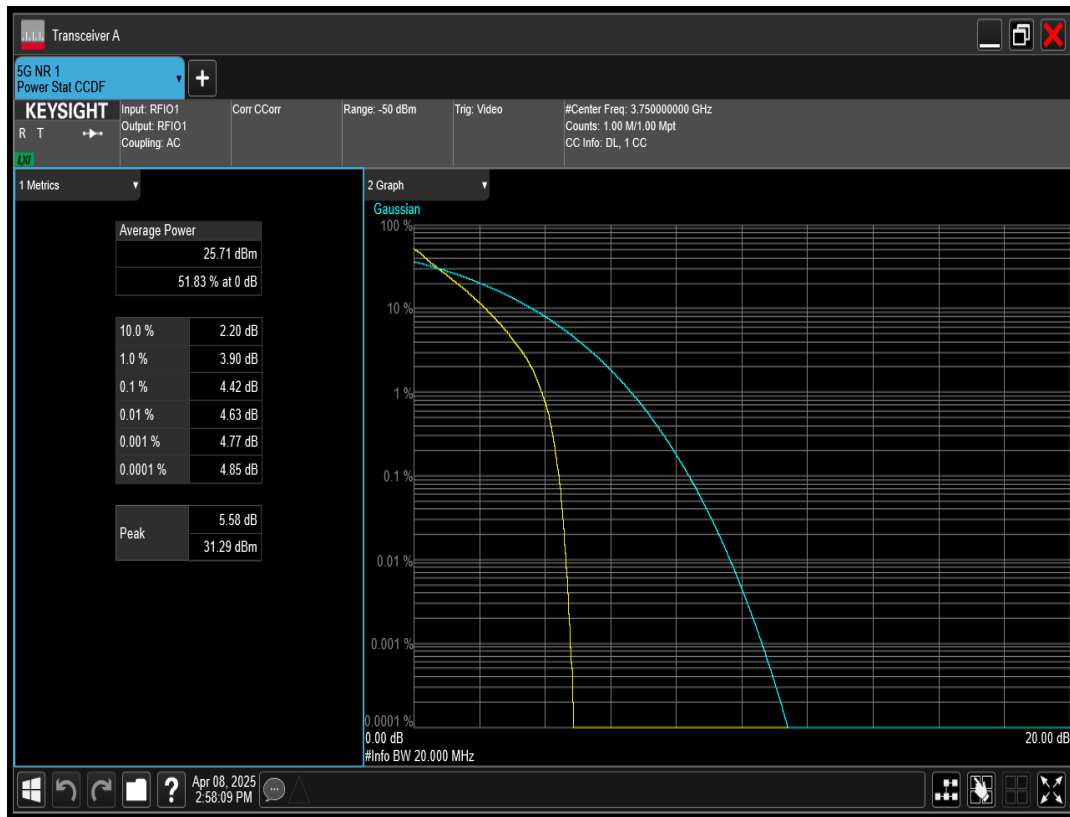


n78(3700-3800) SCS=30kHz DFT_BPSK BW=30MHz Channel=647668 RB=75@0

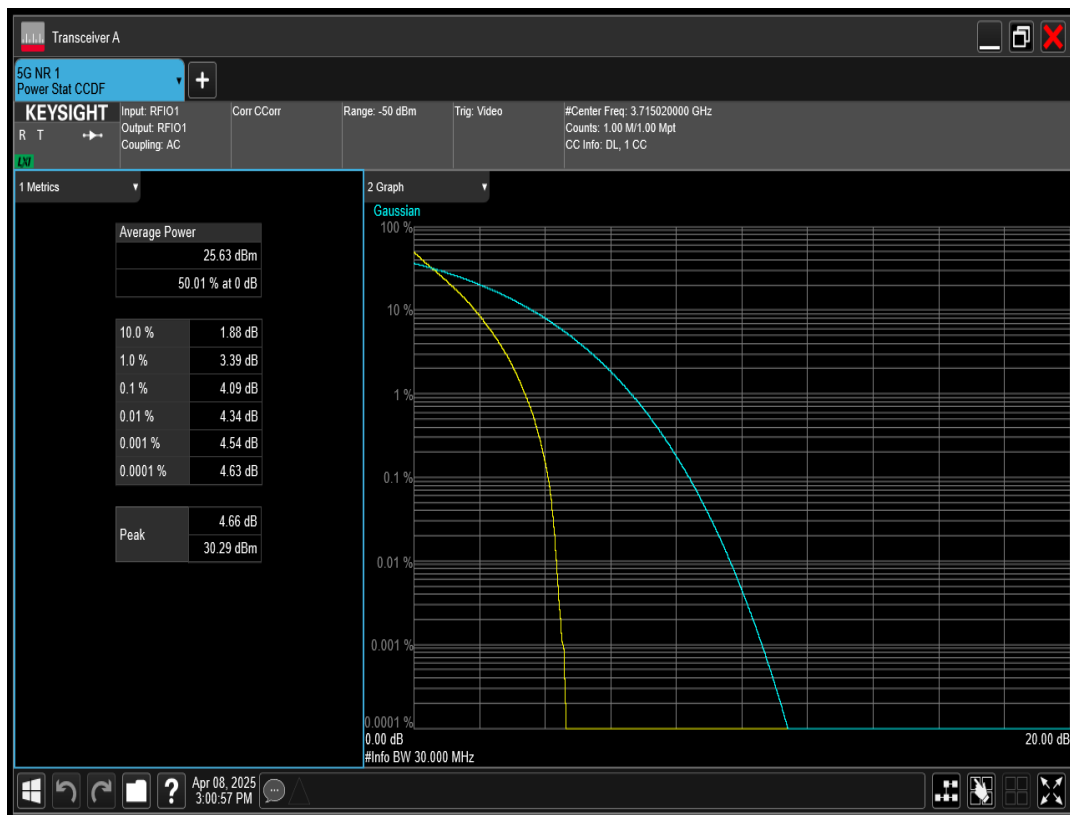


n78(3700-3800) SCS=30kHz DFT_BPSK BW=20MHz Channel=652666 RB=50@0

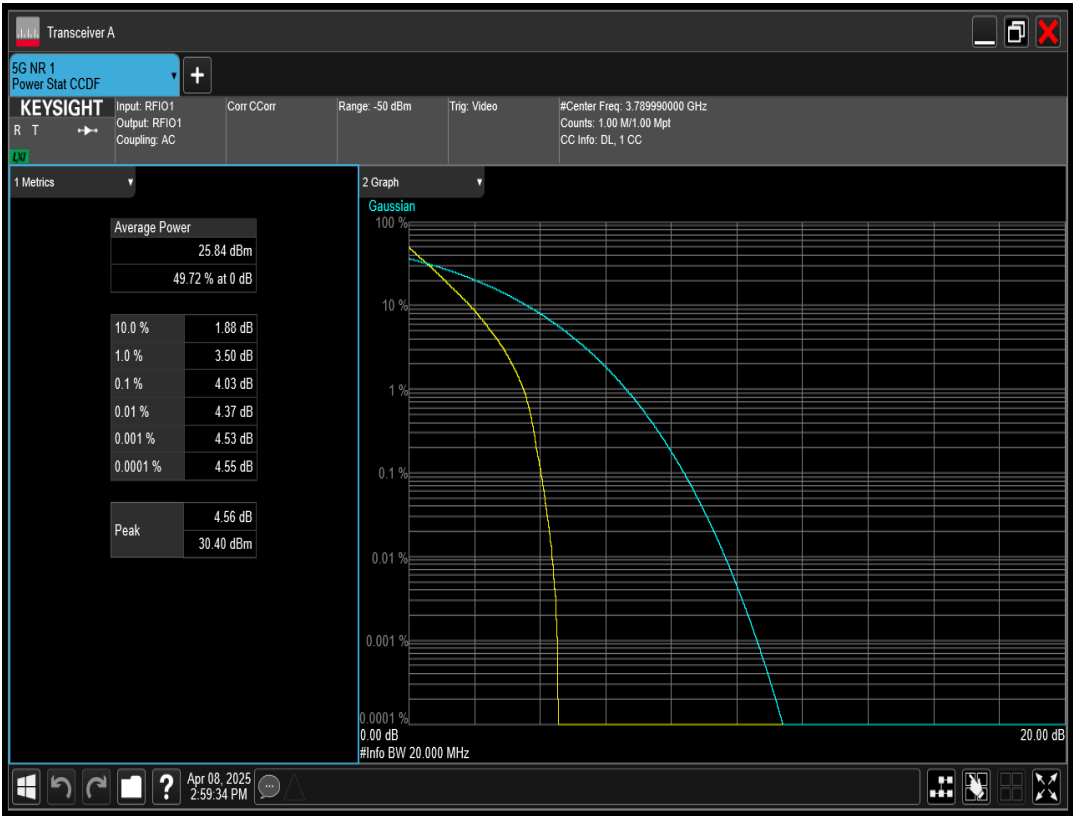


n78(3700-3800) SCS=30kHz DFT_BPSK BW=30MHz Channel=650000 RB=75@0

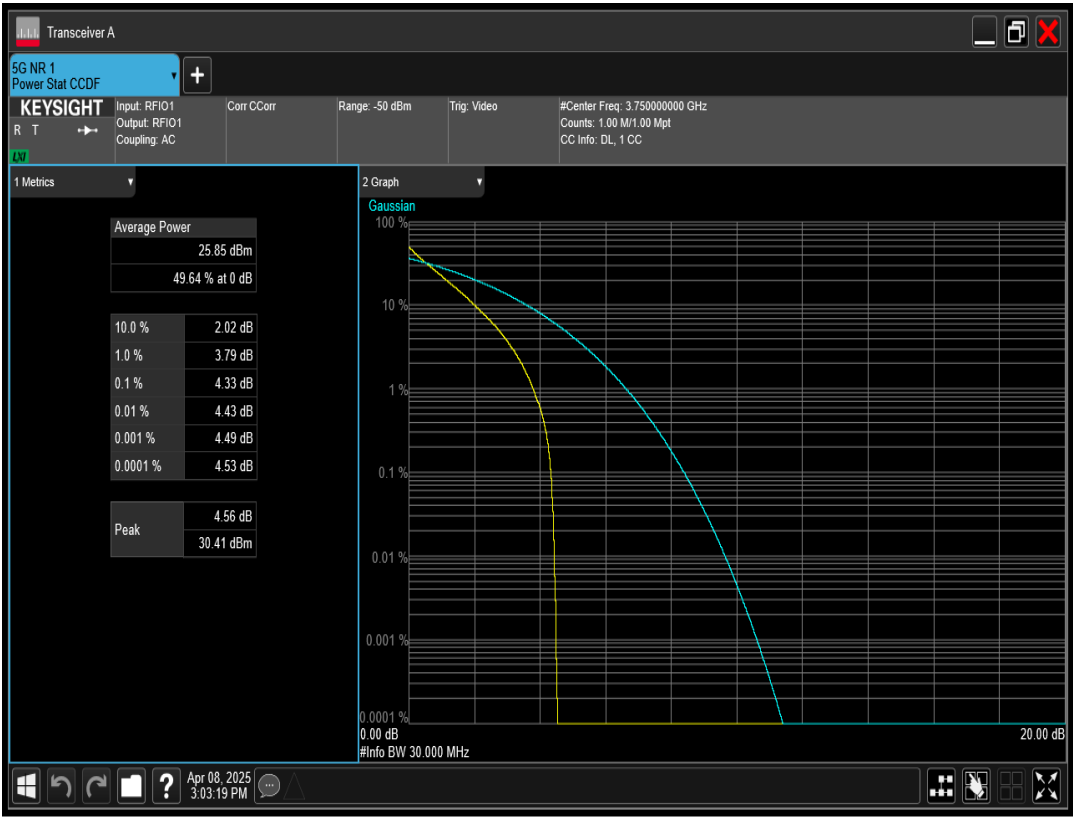


n78(3700-3800) SCS=30kHz DFT_BPSK BW=30MHz Channel=652332 RB=75@0

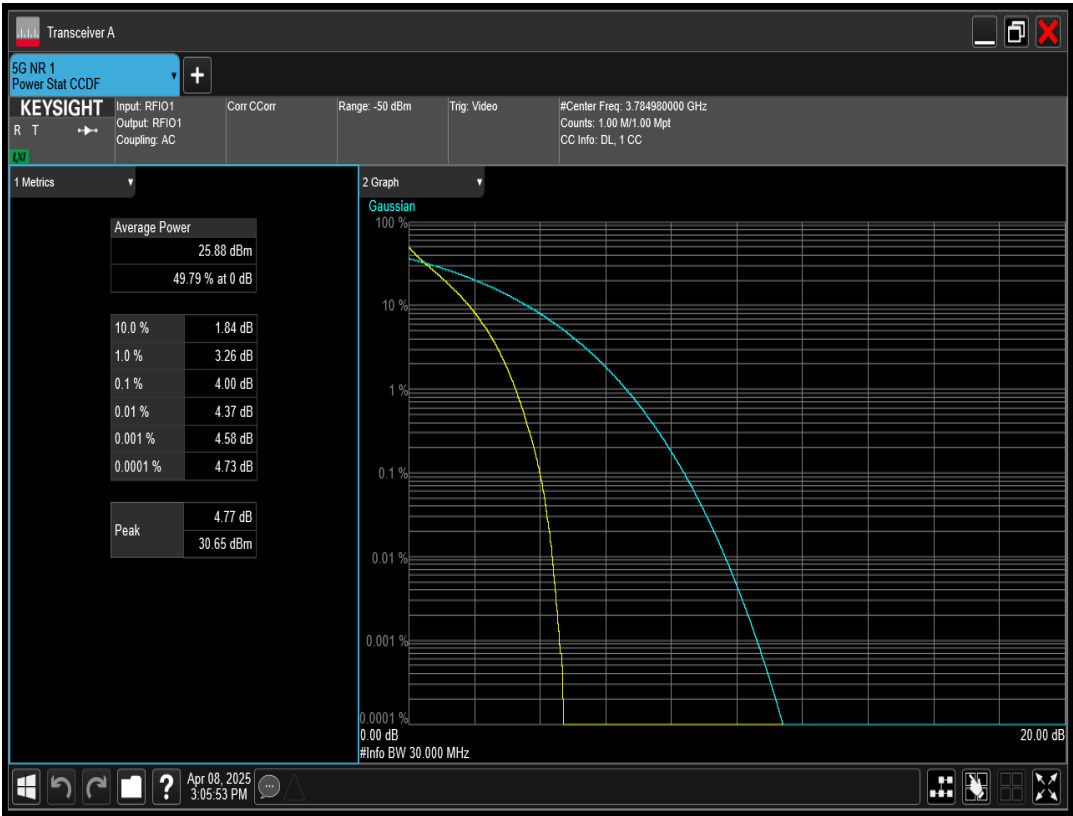


n78(3700-3800) SCS=30kHz DFT_BPSK BW=40MHz Channel=648000 RB=100@0

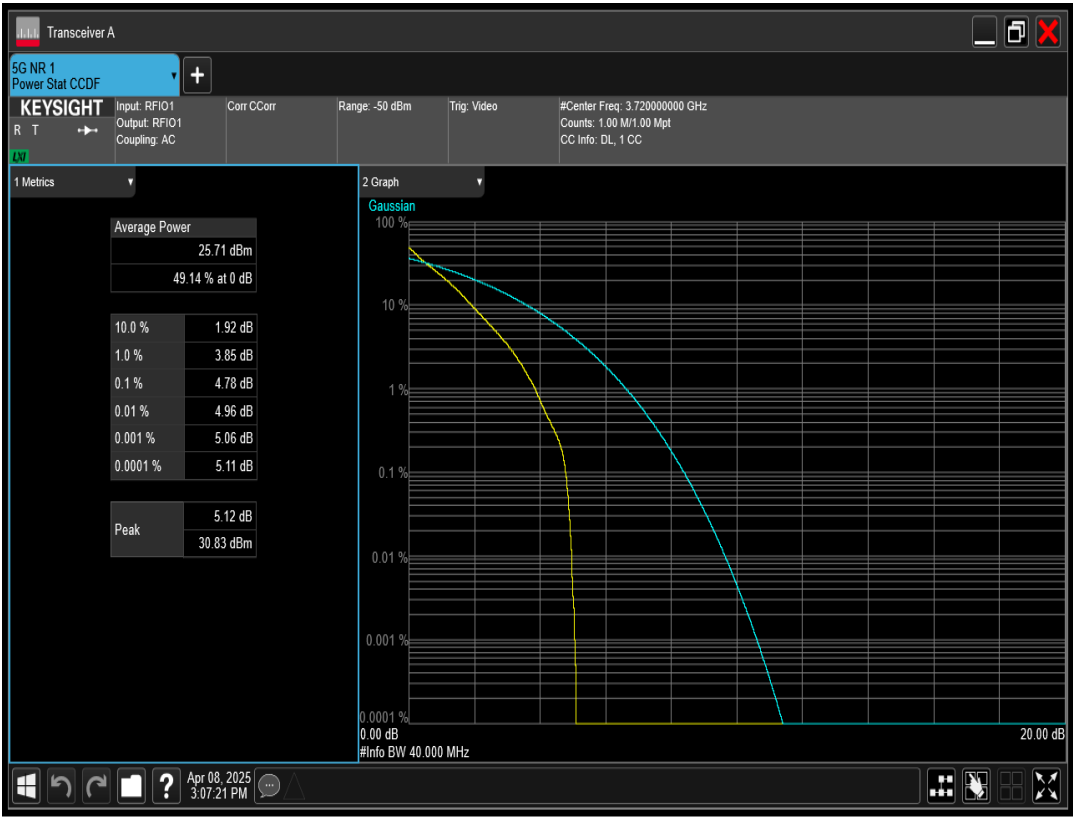


n78(3700-3800) SCS=30kHz DFT_BPSK BW=40MHz Channel=650000 RB=100@0

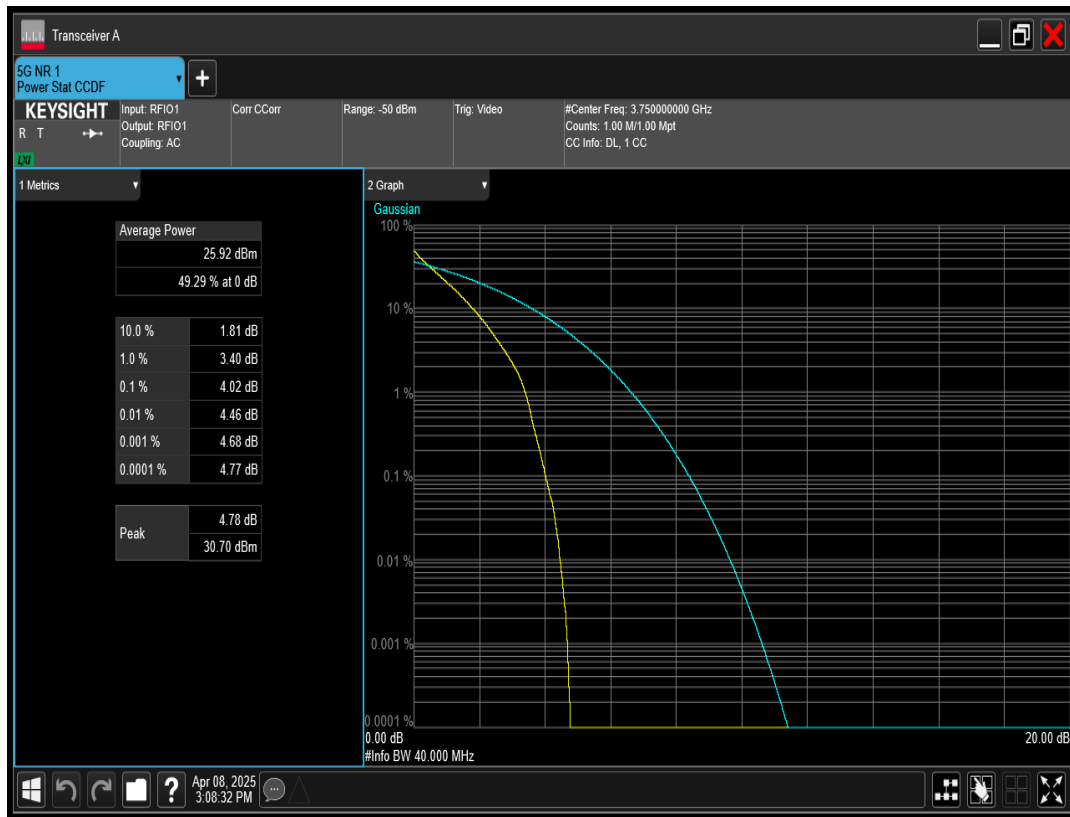


n78(3700-3800) SCS=30kHz DFT_BPSK BW=40MHz Channel=652000 RB=100@0

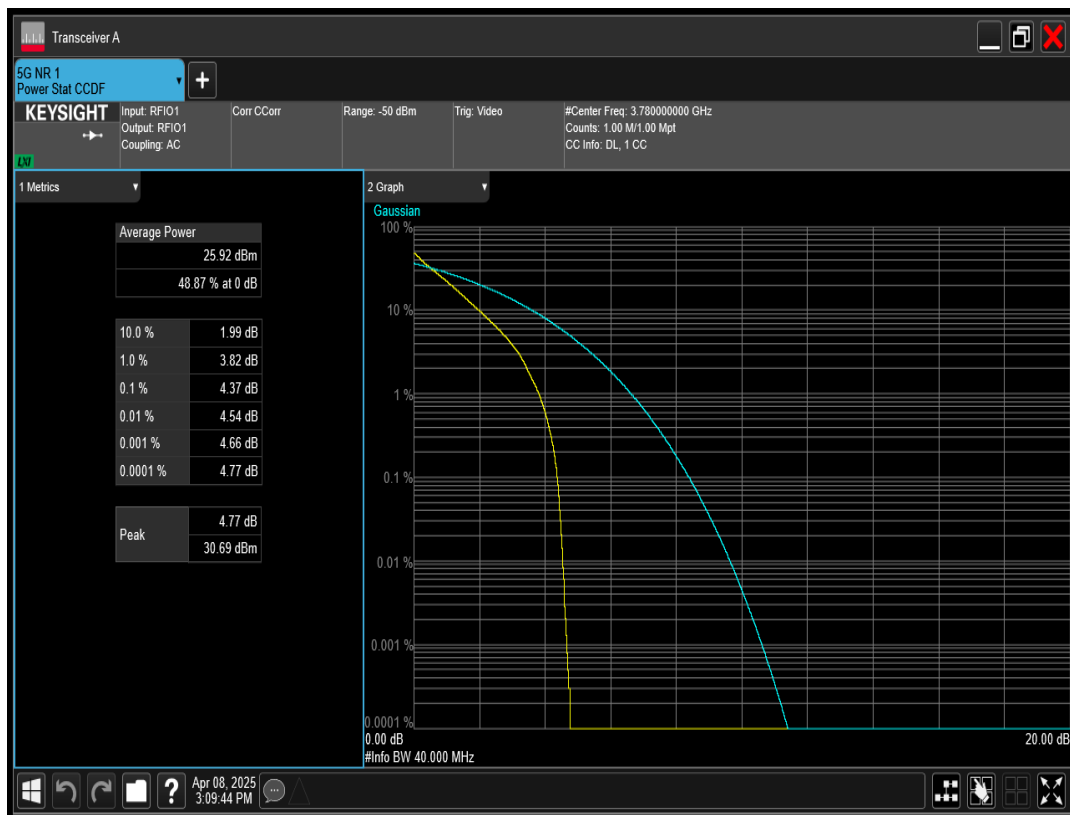


n78(3700-3800) SCS=30kHz DFT_BPSK BW=50MHz Channel=650000 RB=128@0

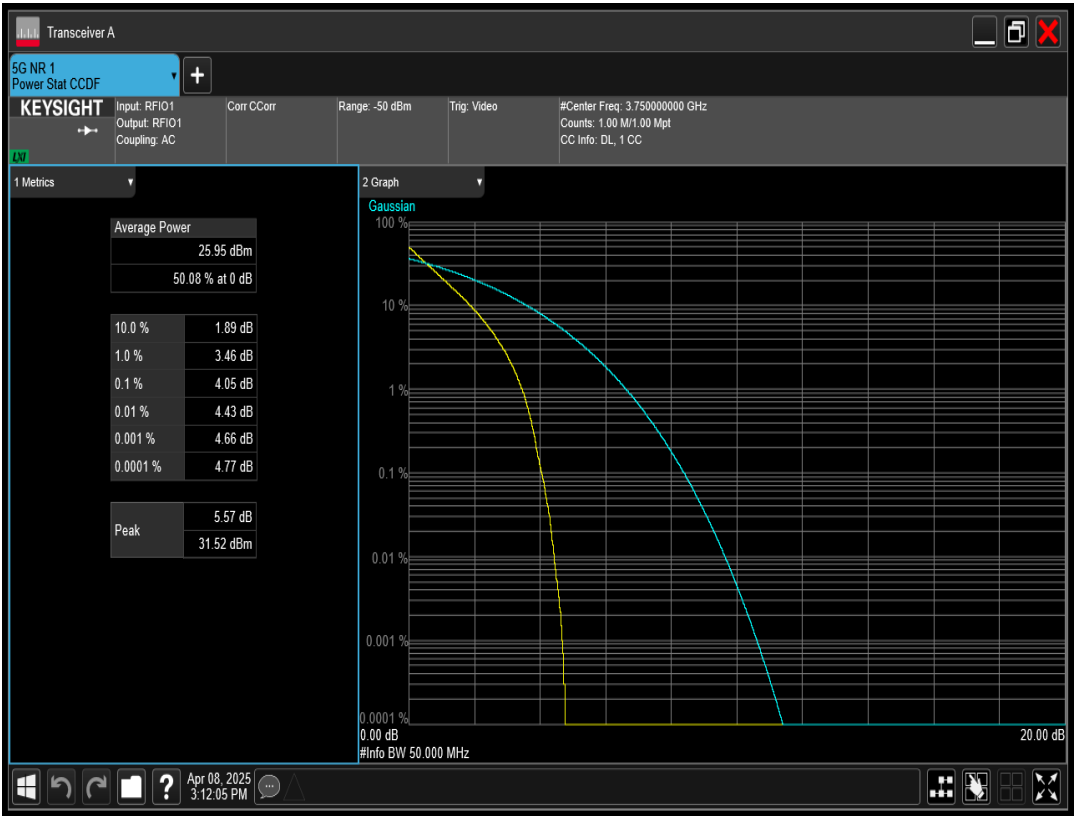


n78(3700-3800) SCS=30kHz DFT_BPSK BW=50MHz Channel=648334 RB=128@0

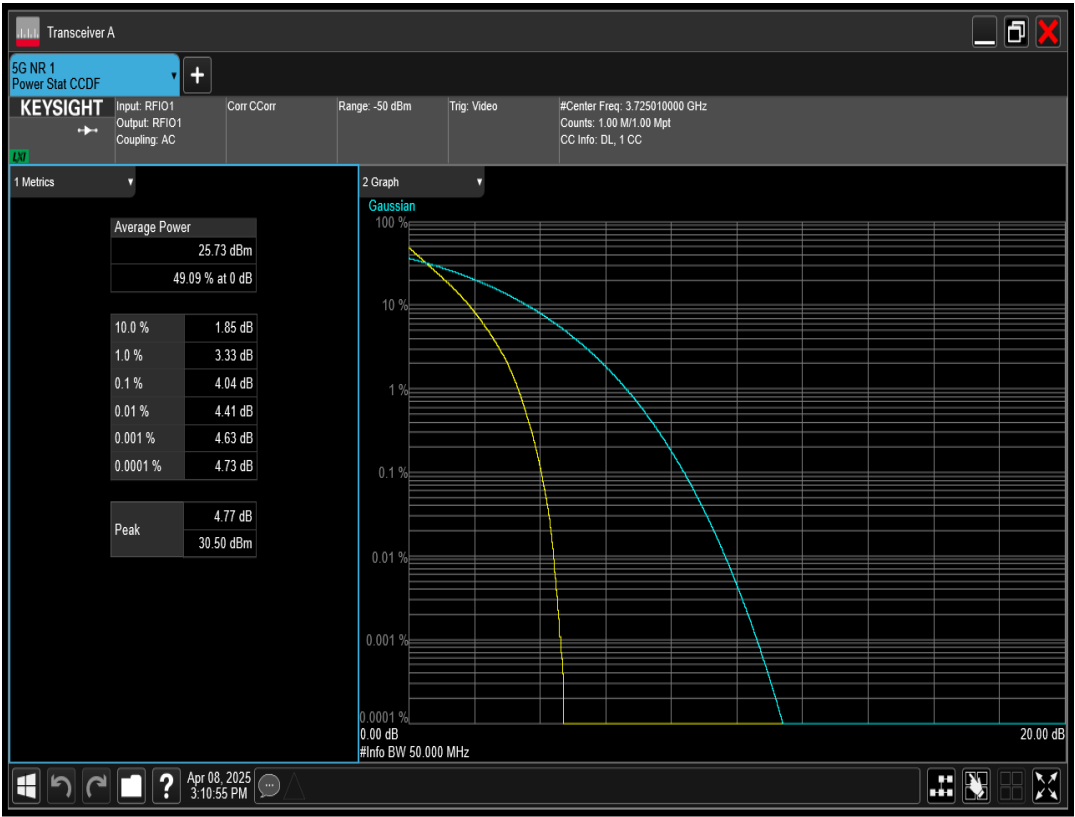


n78(3700-3800) SCS=30kHz DFT_BPSK BW=60MHz Channel=648668 RB=162@0

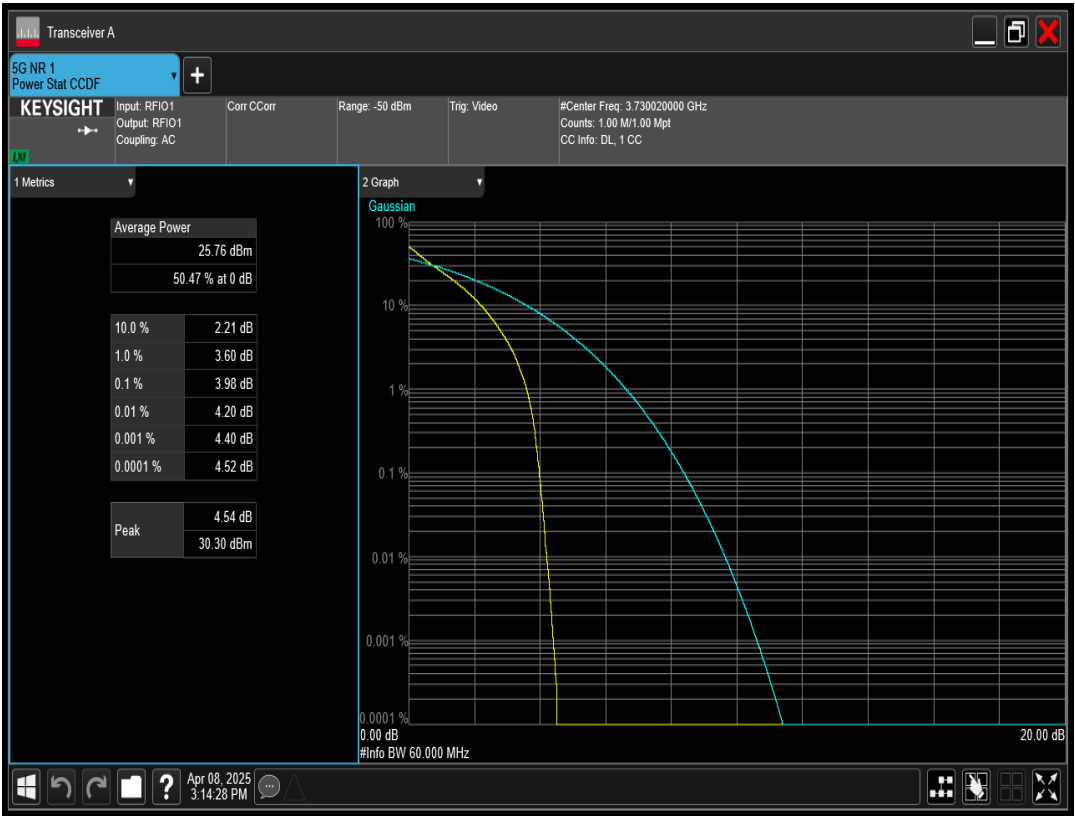


n78(3700-3800) SCS=30kHz DFT_BPSK BW=50MHz Channel=651666 RB=128@0

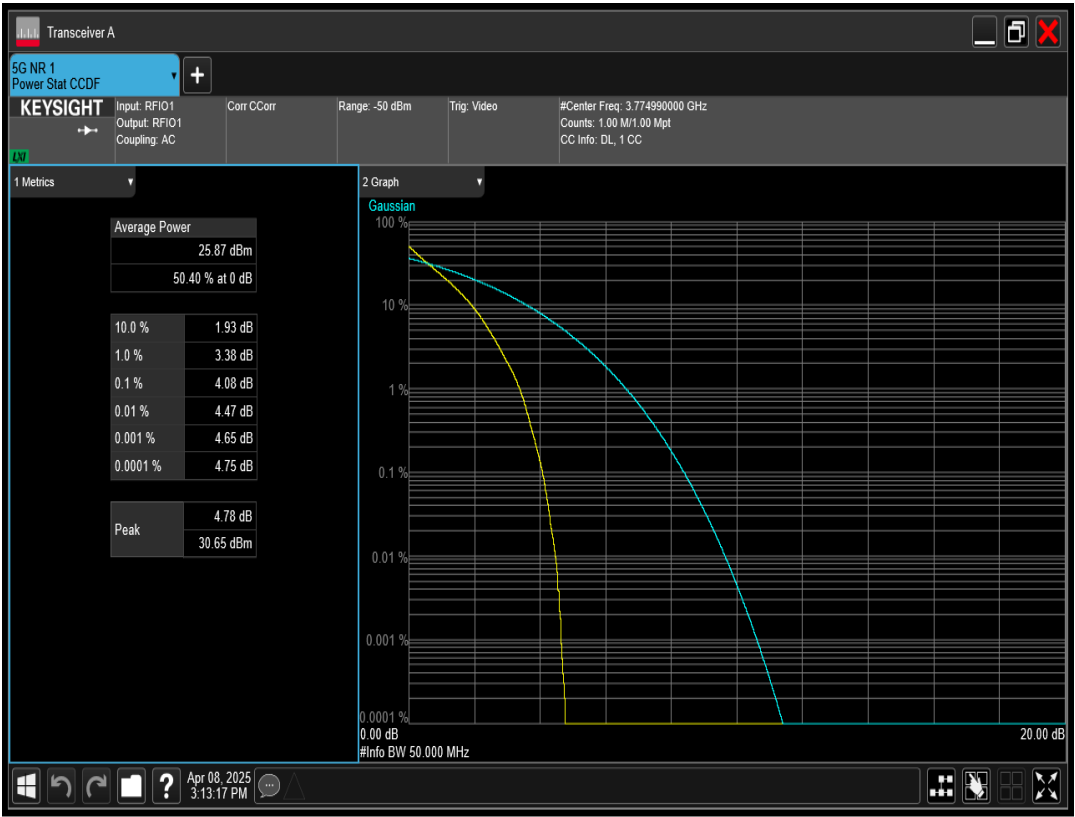


n78(3700-3800) SCS=30kHz DFT_BPSK BW=60MHz Channel=650000 RB=162@0

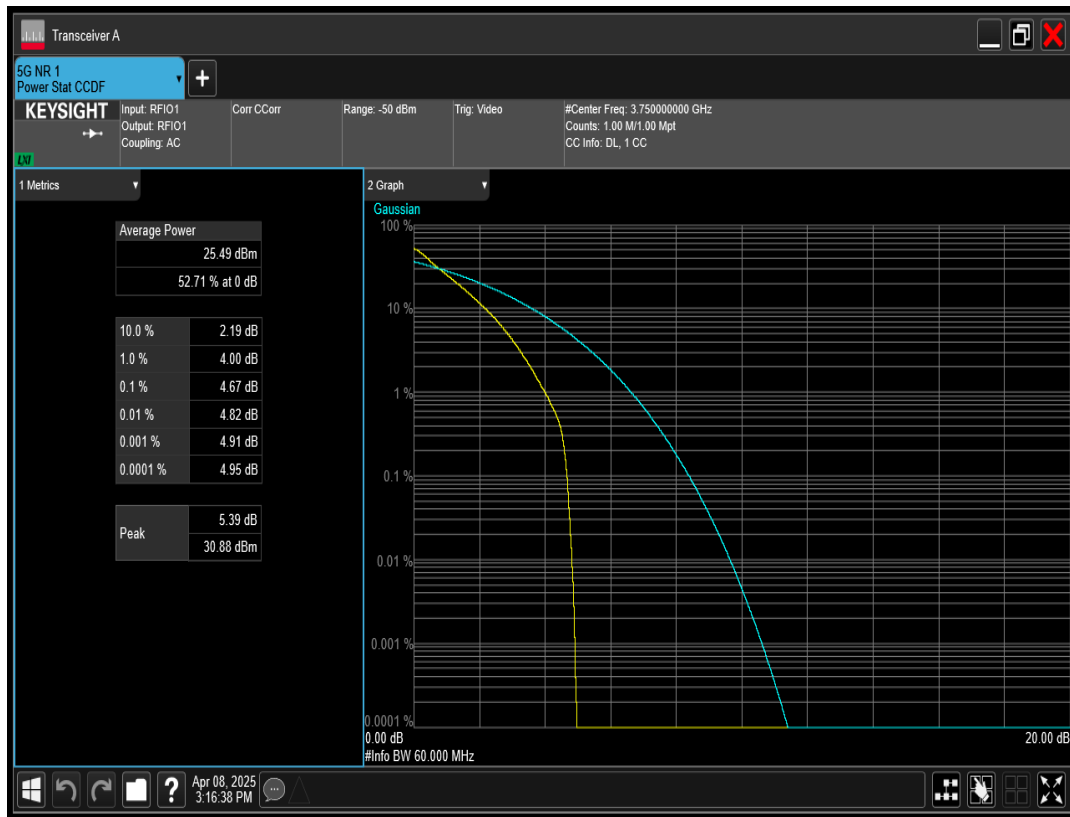


n78(3700-3800) SCS=30kHz DFT_BPSK BW=70MHz Channel=649000 RB=180@0

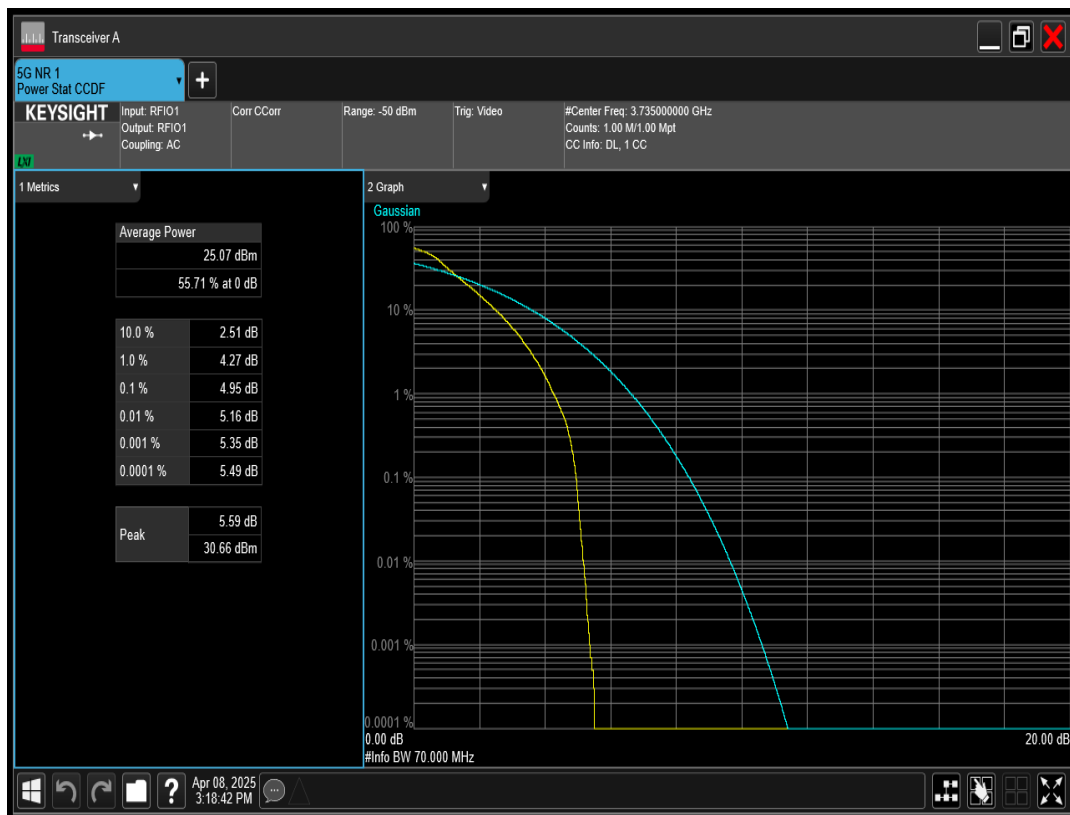


n78(3700-3800) SCS=30kHz DFT_BPSK BW=60MHz Channel=651332 RB=162@0

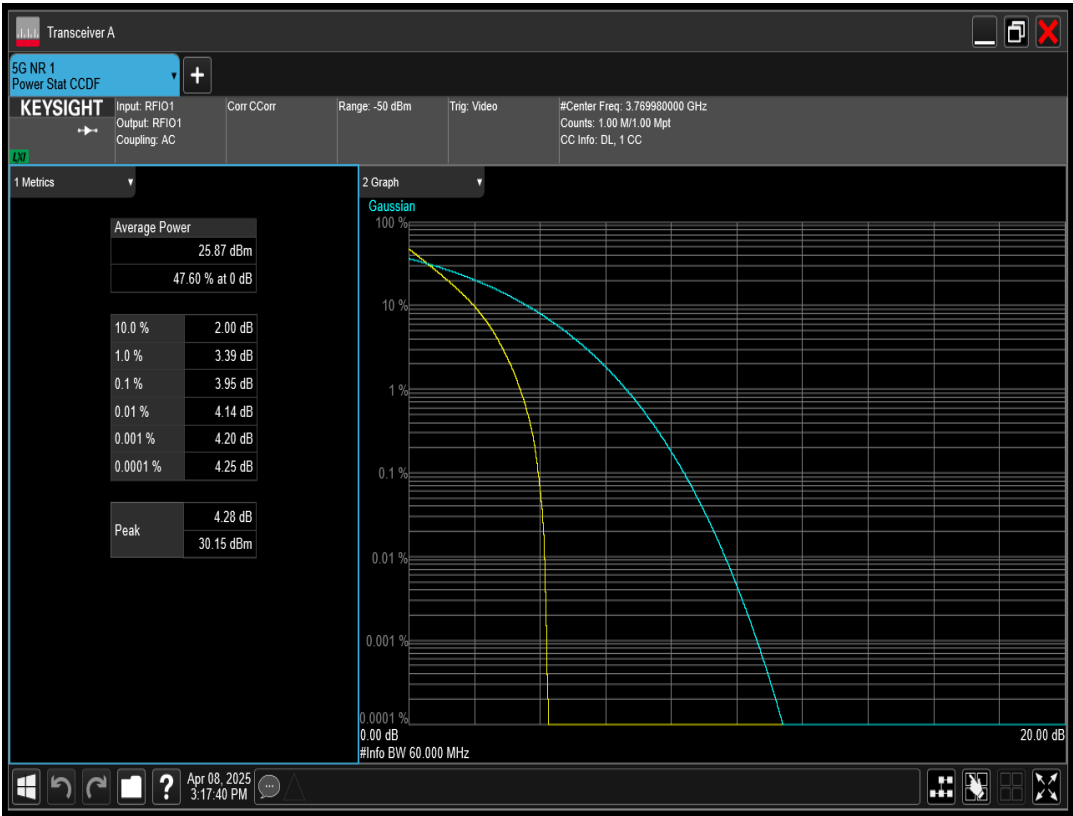


n78(3700-3800) SCS=30kHz DFT_BPSK BW=70MHz Channel=650000 RB=180@0

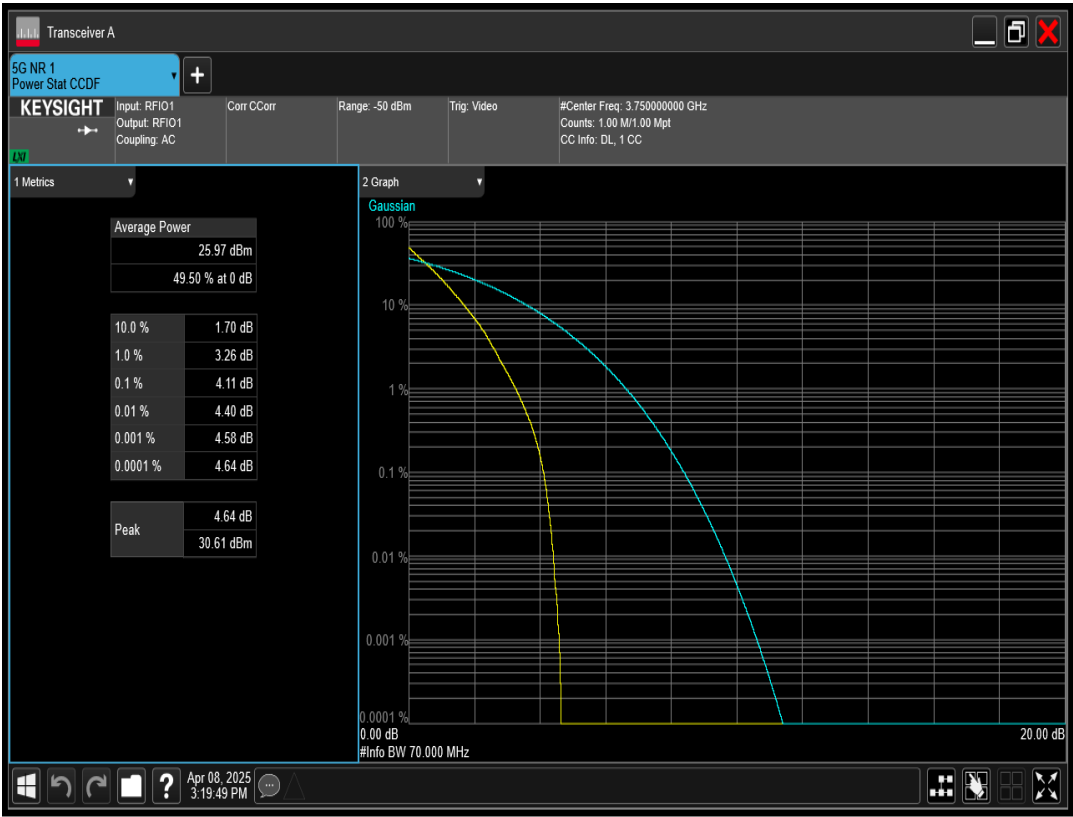


n78(3700-3800) SCS=30kHz DFT_BPSK BW=70MHz Channel=651000 RB=180@0

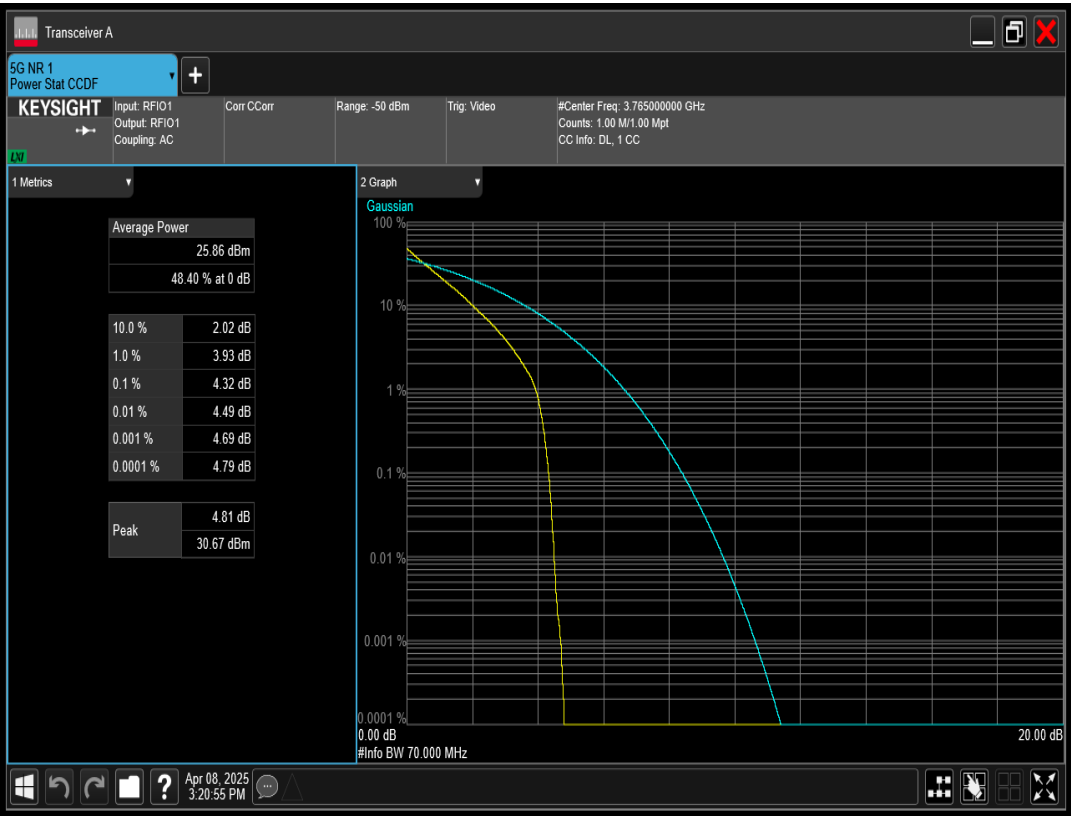


n78(3700-3800) SCS=30kHz DFT_BPSK BW=80MHz Channel=649334 RB=216@0

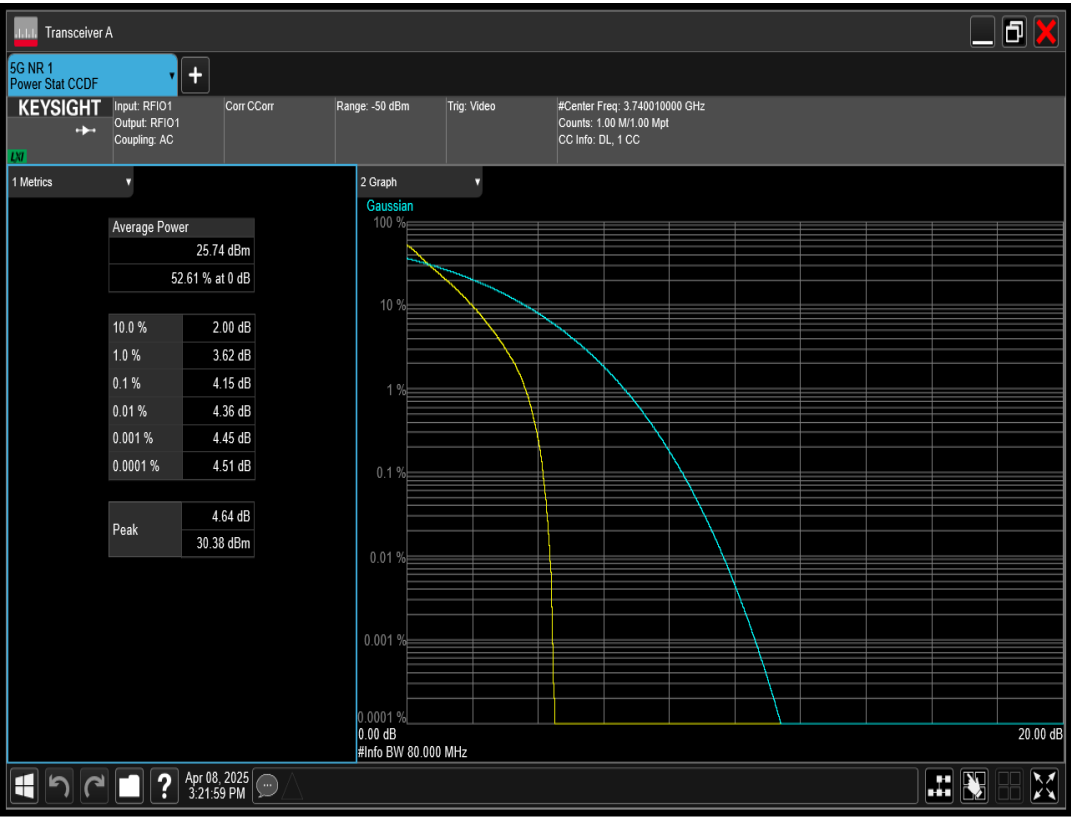


n78(3700-3800) SCS=30kHz DFT_BPSK BW=80MHz Channel=650000 RB=216@0

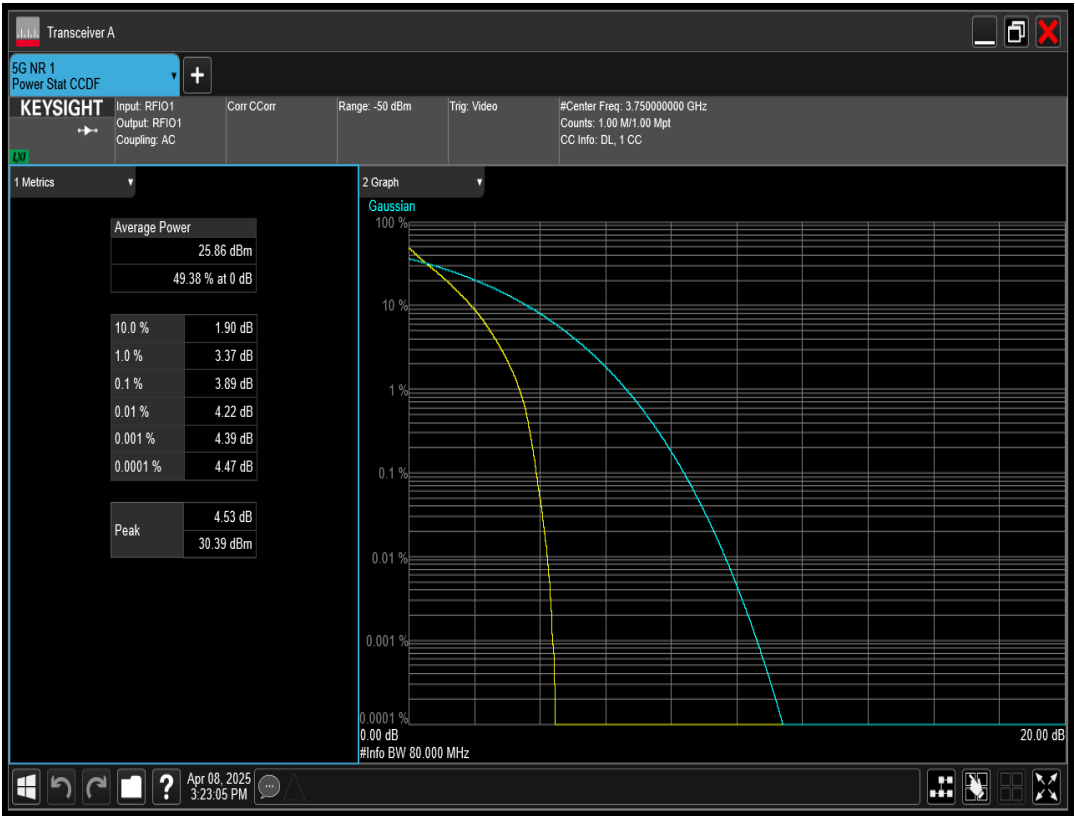


n78(3700-3800) SCS=30kHz DFT_BPSK BW=80MHz Channel=650666 RB=216@0

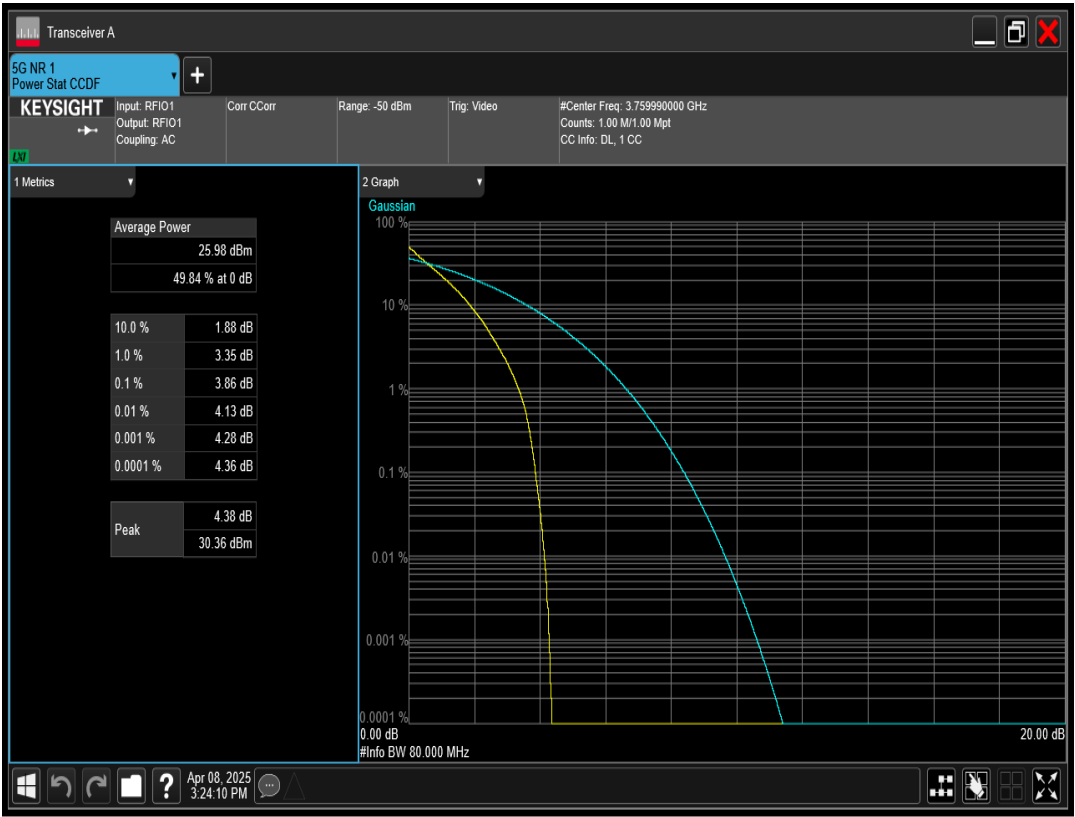


n78(3700-3800) SCS=30kHz DFT_BPSK BW=90MHz Channel=649668 RB=240@0

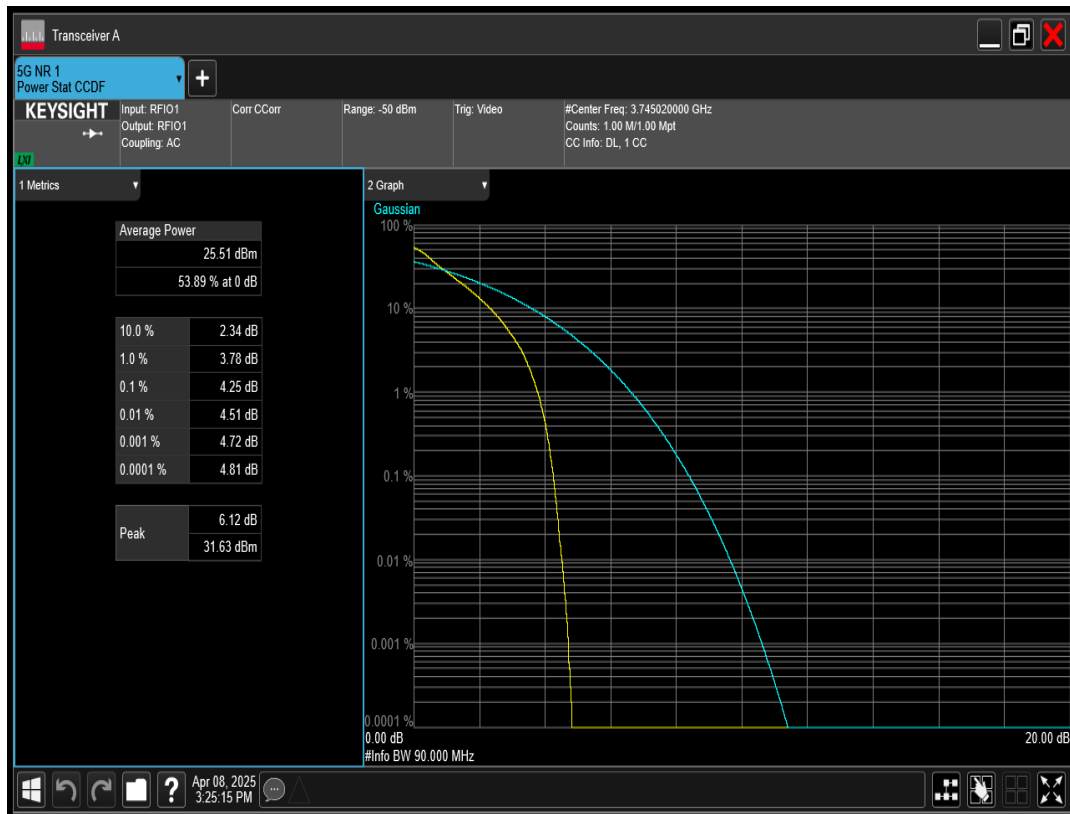


n78(3700-3800) SCS=30kHz DFT_BPSK BW=90MHz Channel=650000 RB=240@0

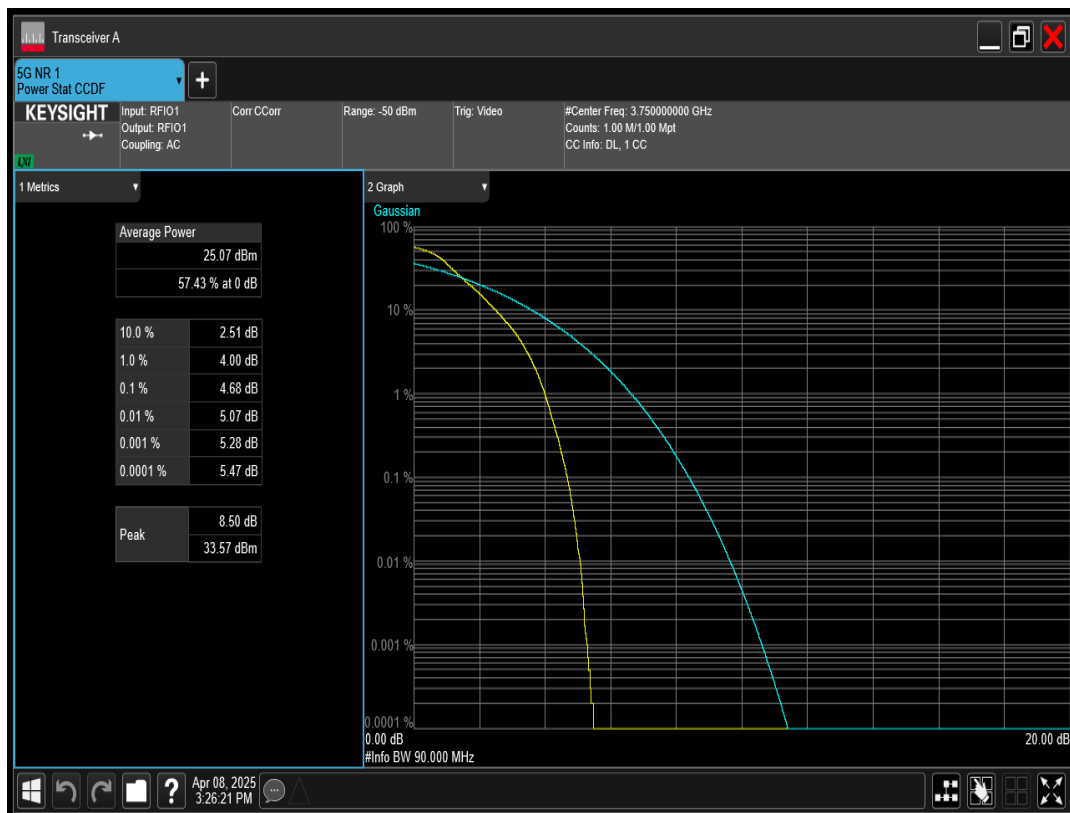


n78(3700-3800) SCS=30kHz DFT_BPSK BW=90MHz Channel=650332 RB=240@0

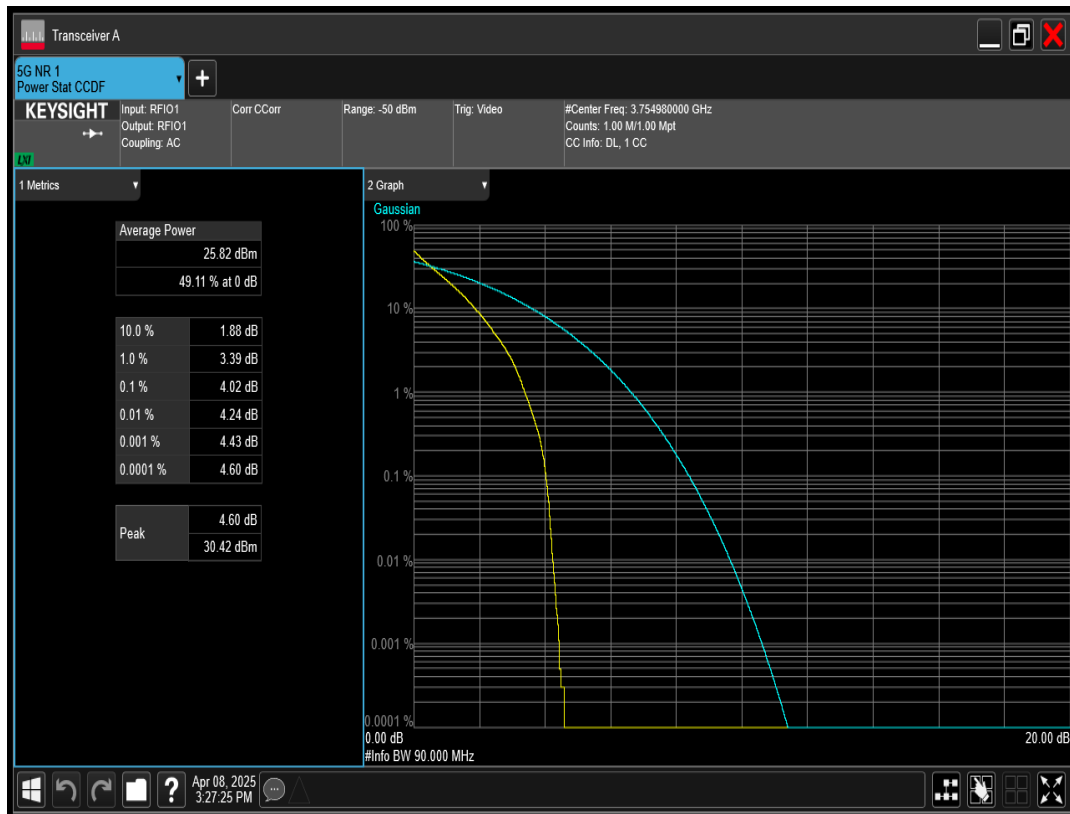


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=10MHz Channel=650000 RB=24@0

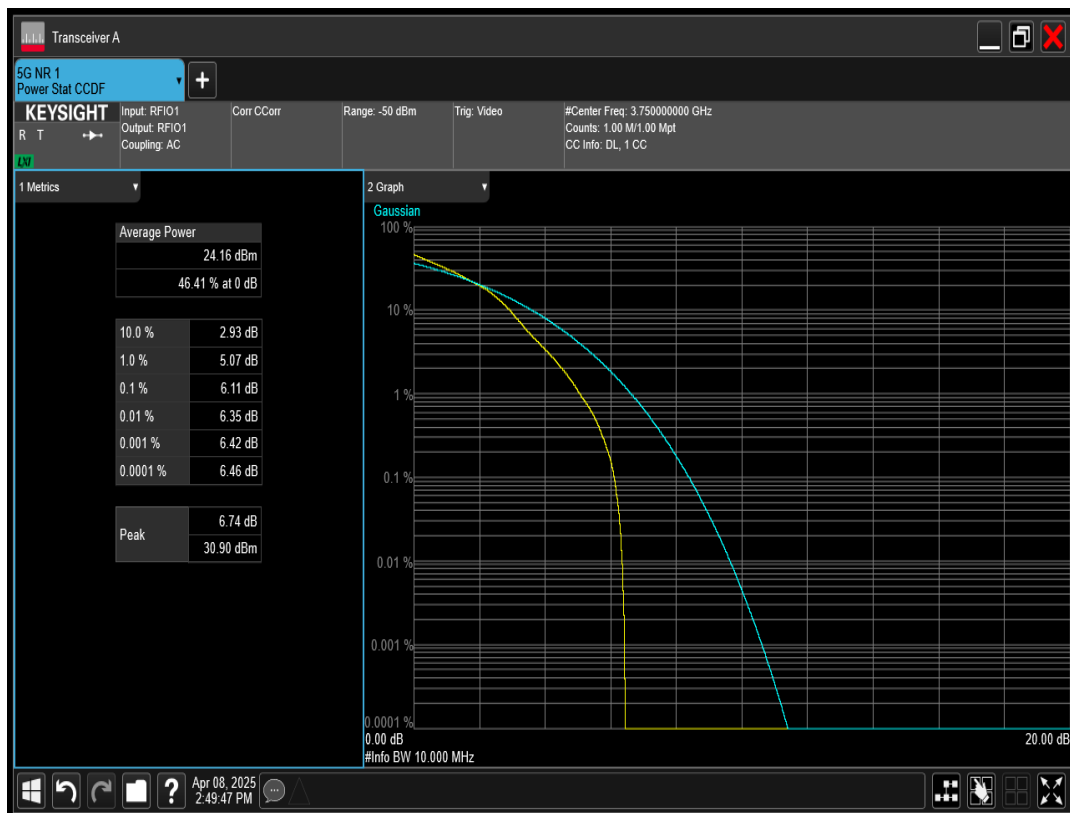


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=10MHz Channel=653000 RB=24@0

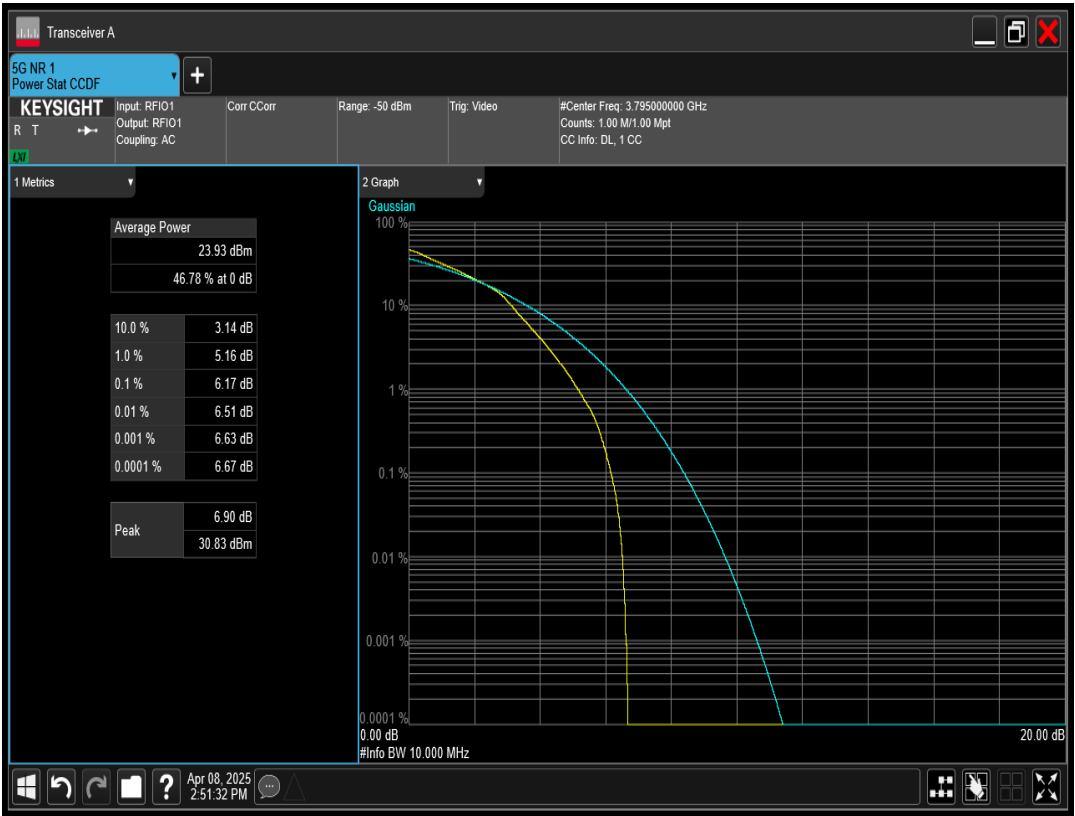


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=100MHz Channel=650000 RB=270@0

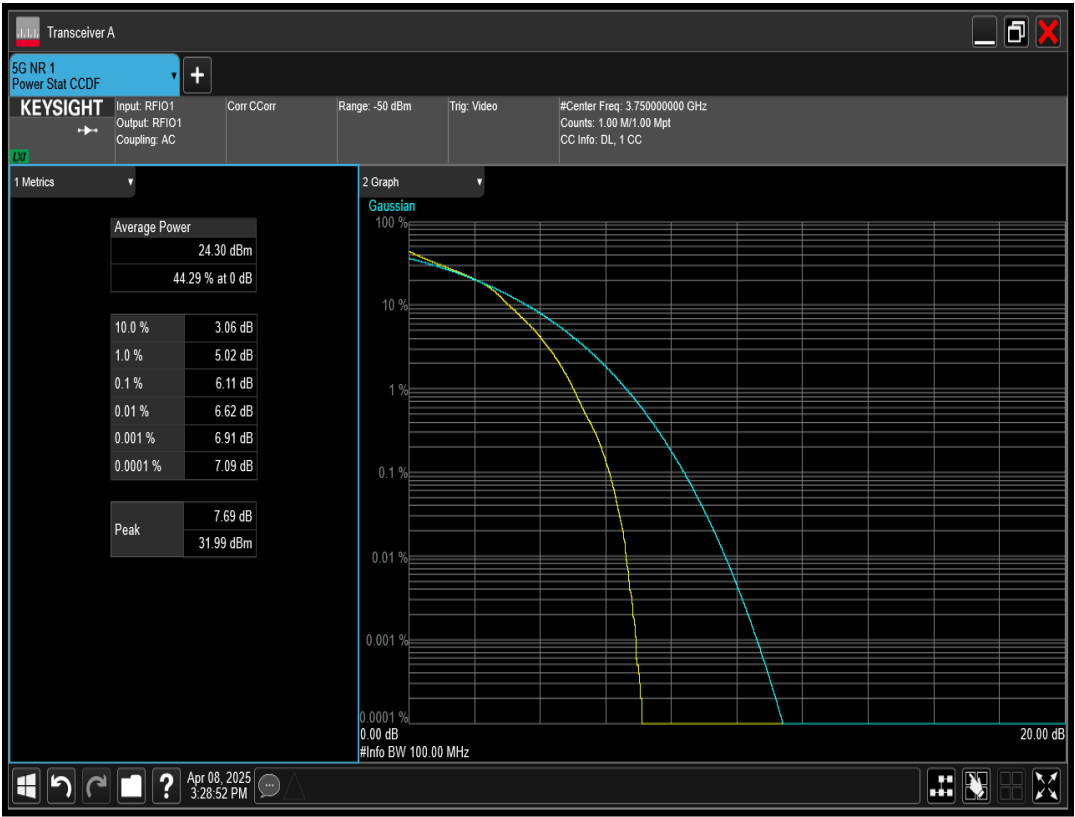


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=10MHz Channel=647000 RB=24@0

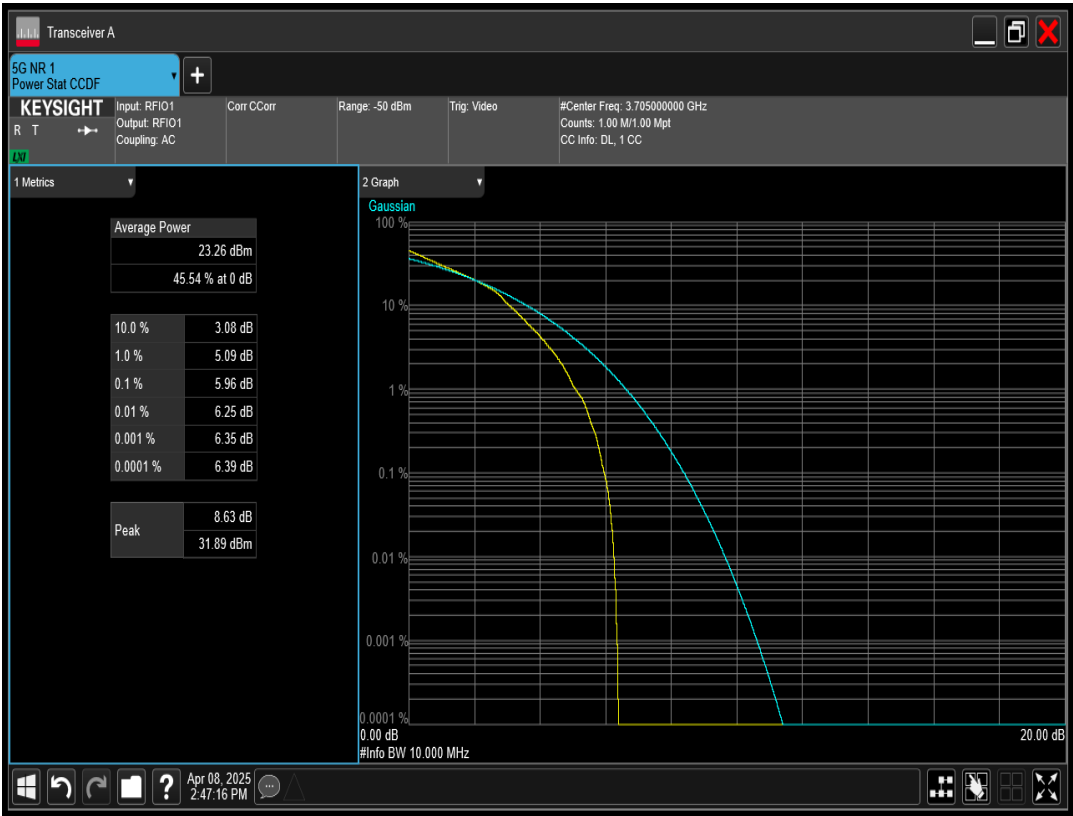


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=15MHz Channel=652832 RB=36@0

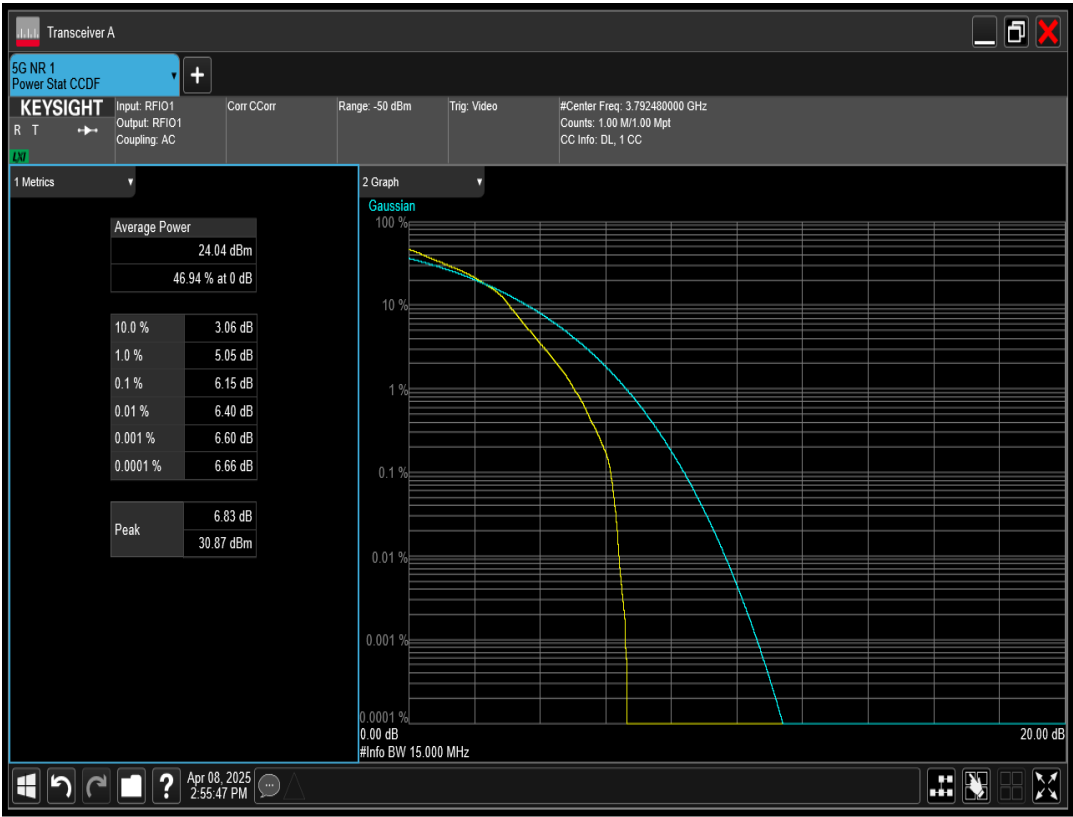


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=20MHz Channel=647334 RB=50@0

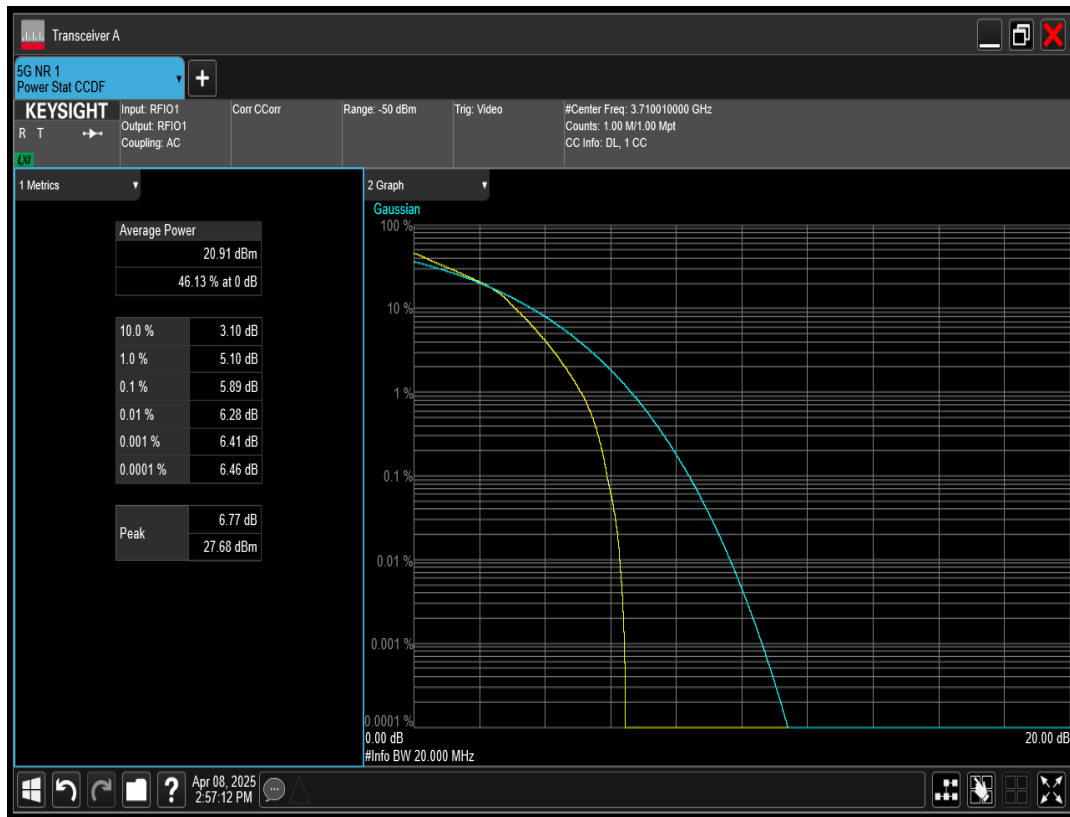


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=15MHz Channel=647168 RB=36@0

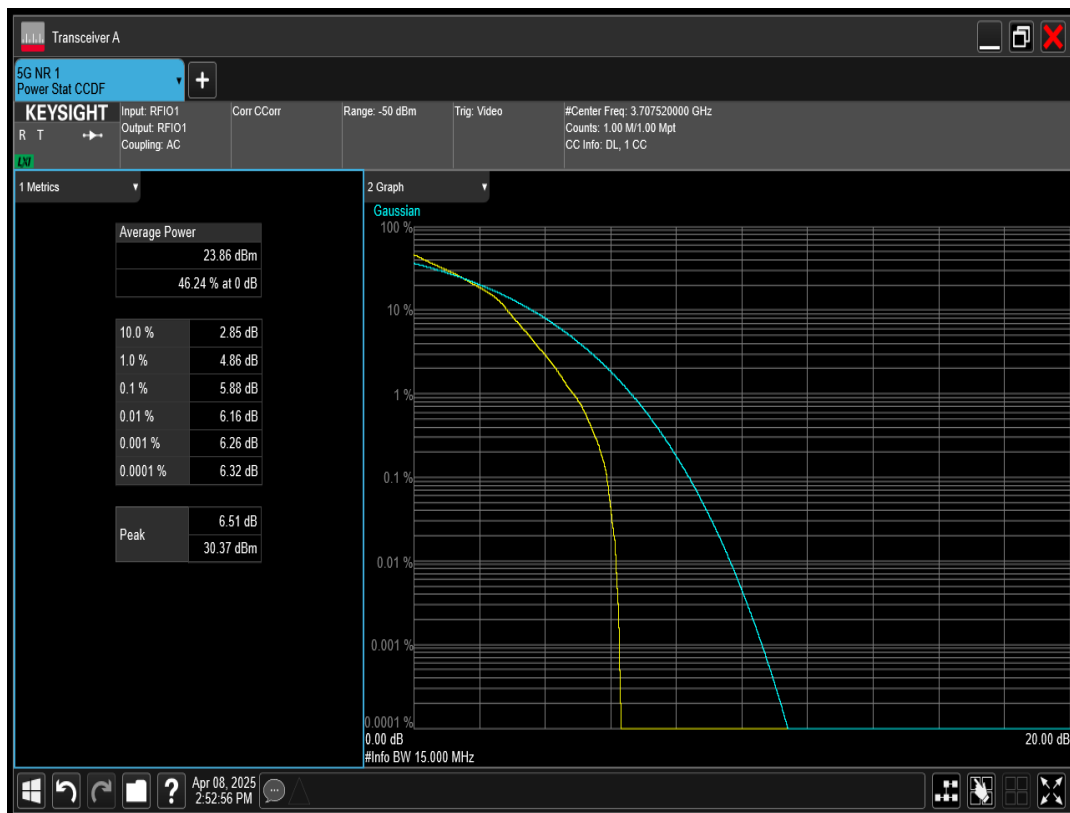


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=15MHz Channel=650000 RB=36@0

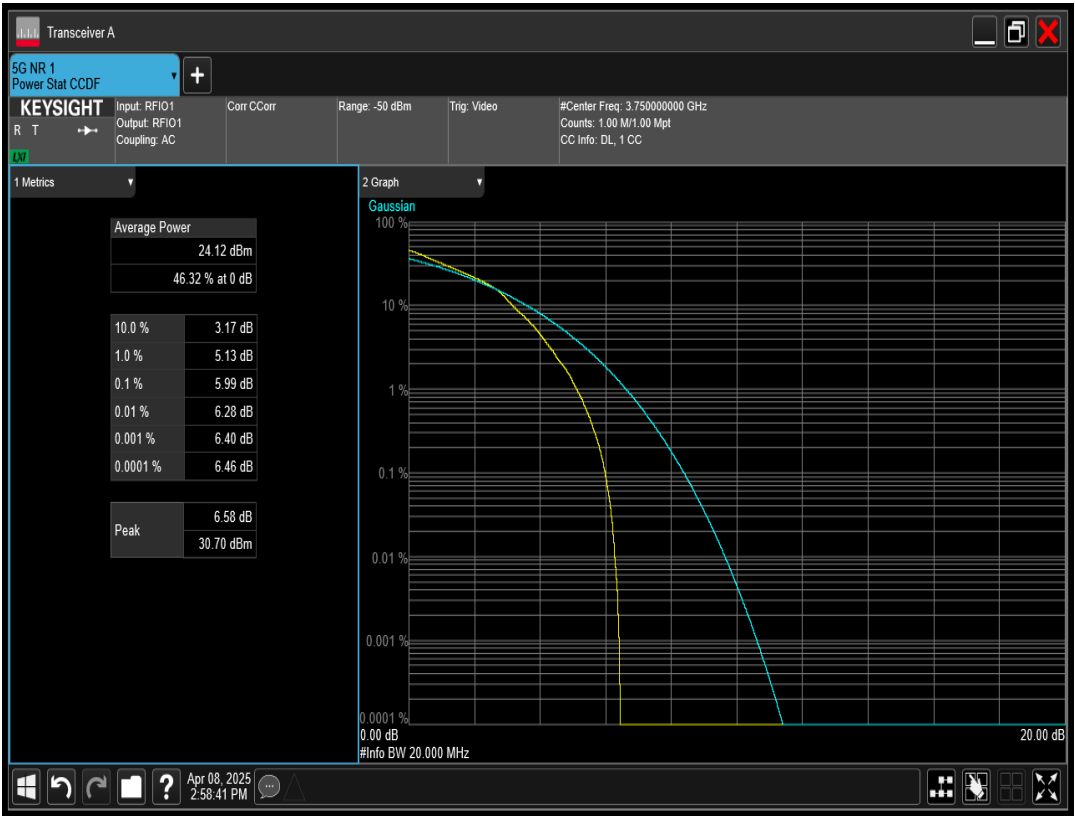


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=30MHz Channel=647668 RB=75@0

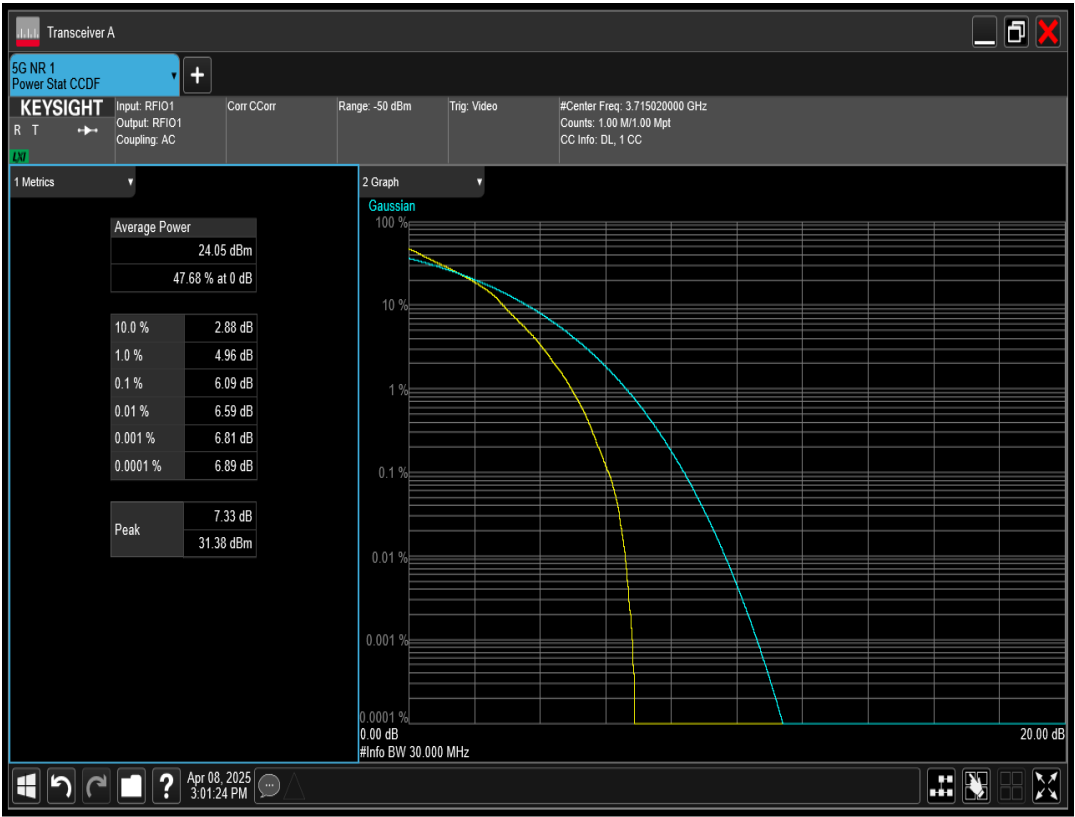


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=30MHz Channel=652332 RB=75@0

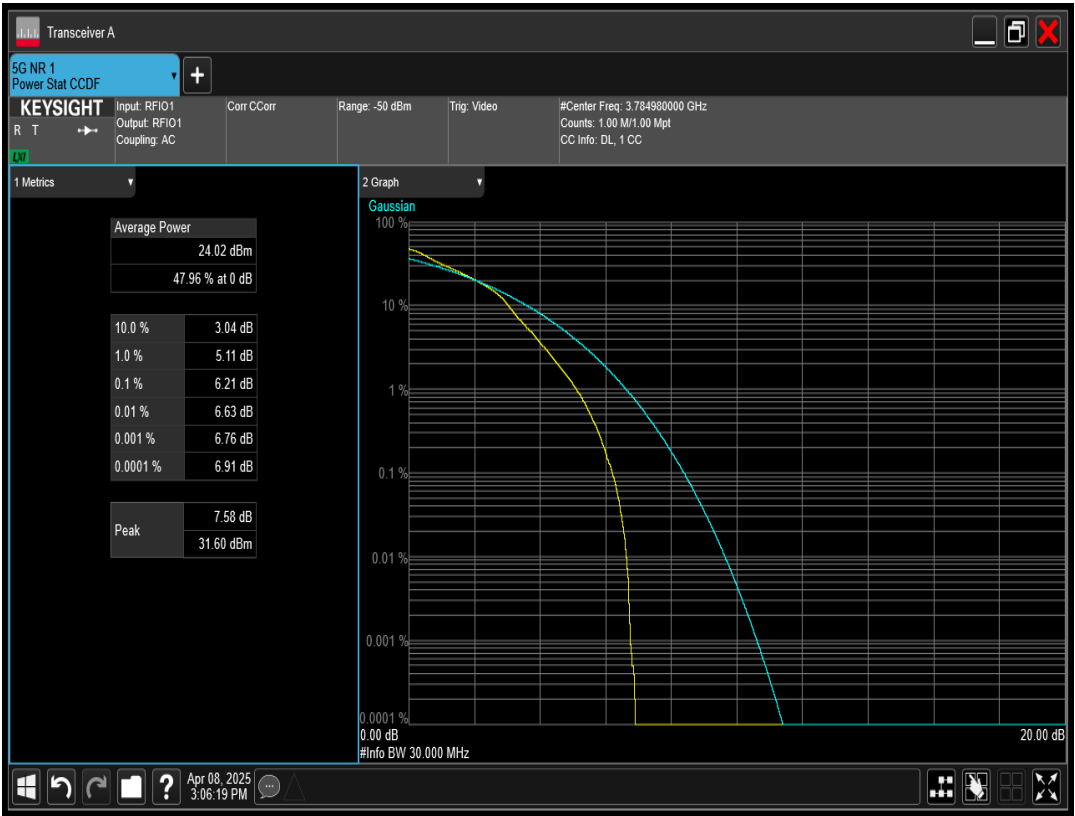


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=30MHz Channel=650000 RB=75@0

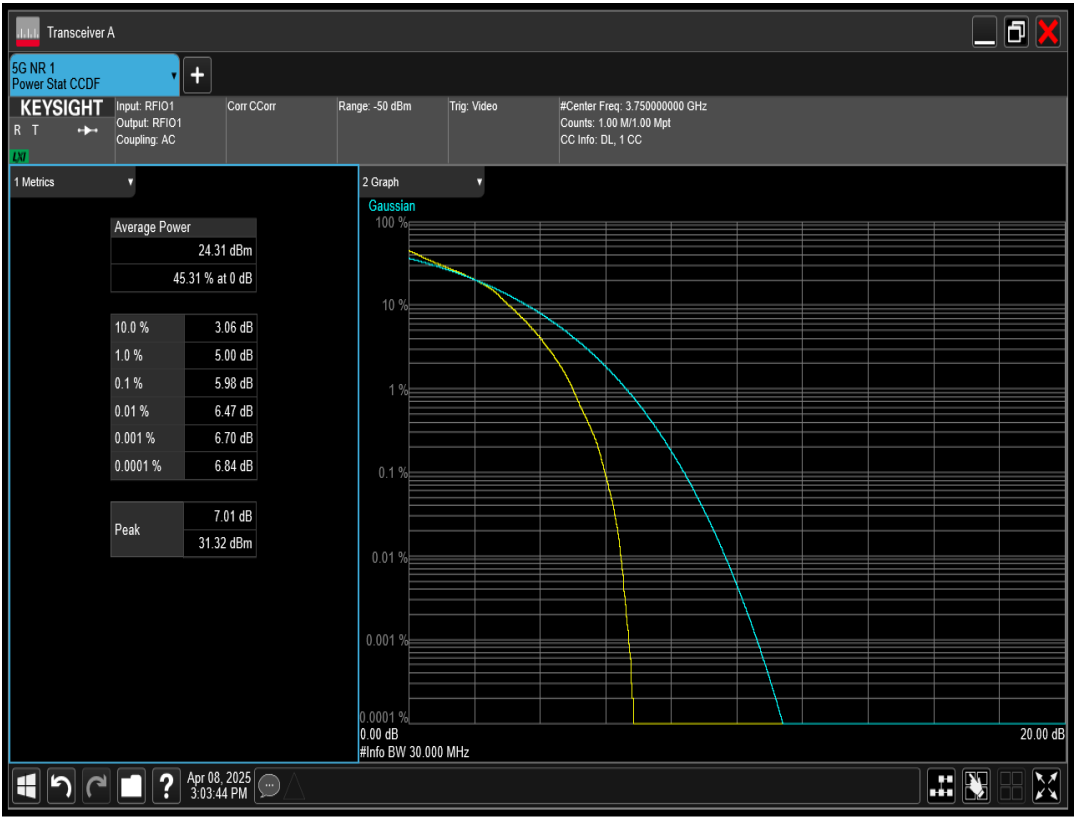


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=40MHz Channel=648000 RB=100@0

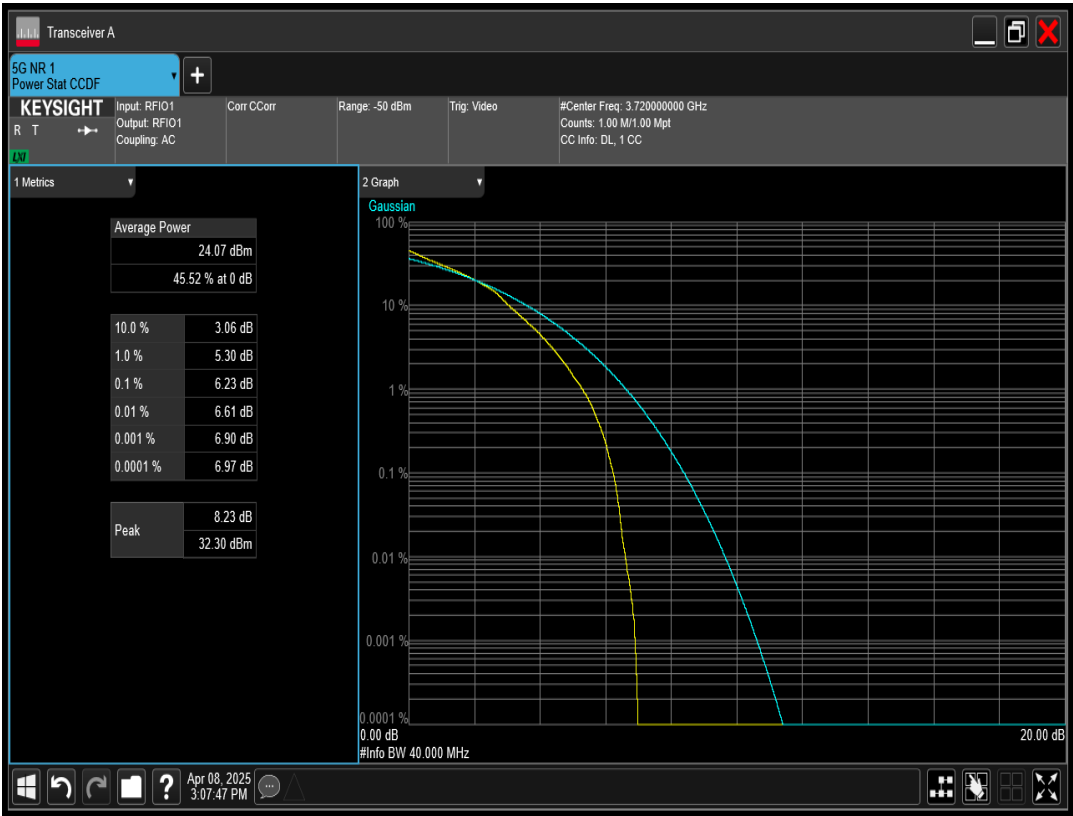


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=50MHz Channel=648334 RB=128@0

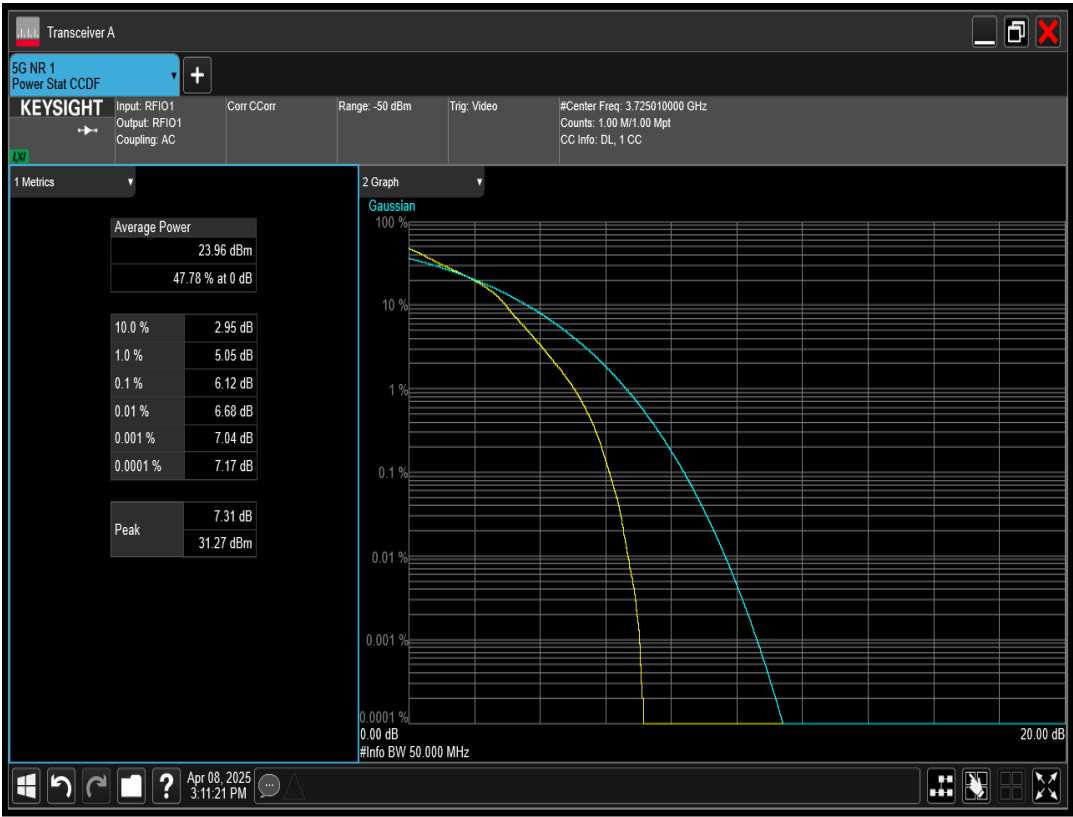


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=40MHz Channel=652000 RB=100@0

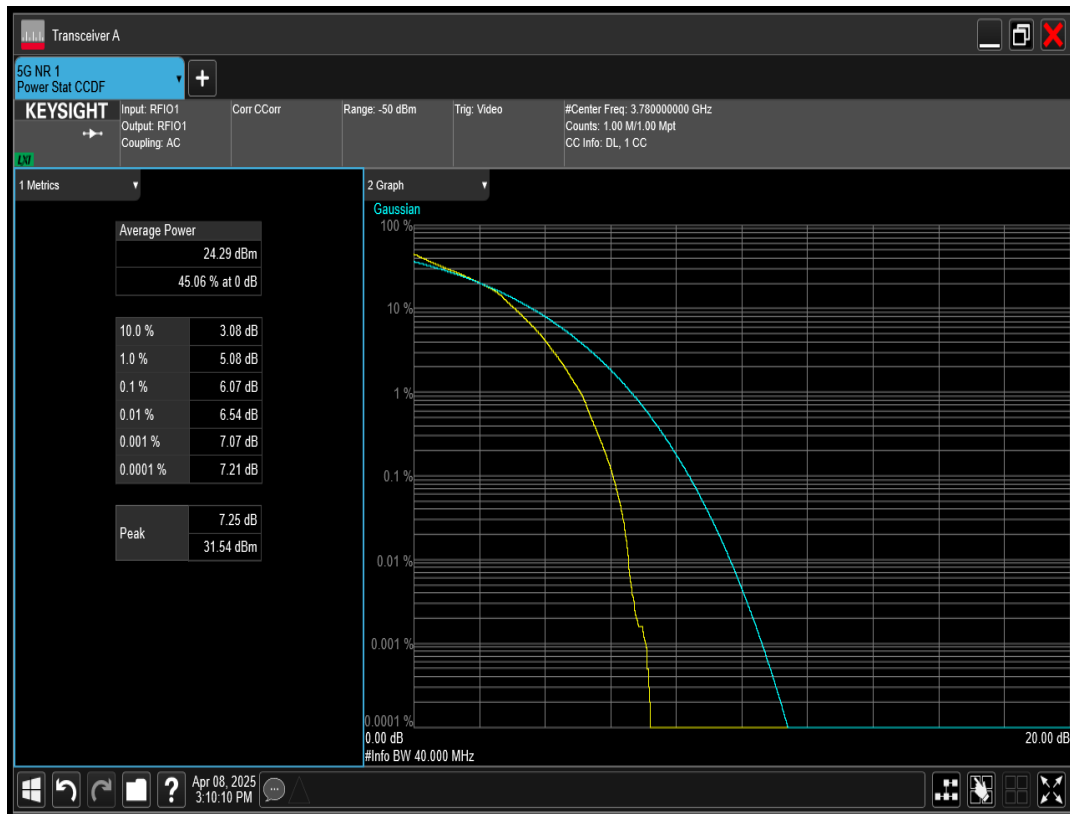


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=40MHz Channel=650000 RB=100@0

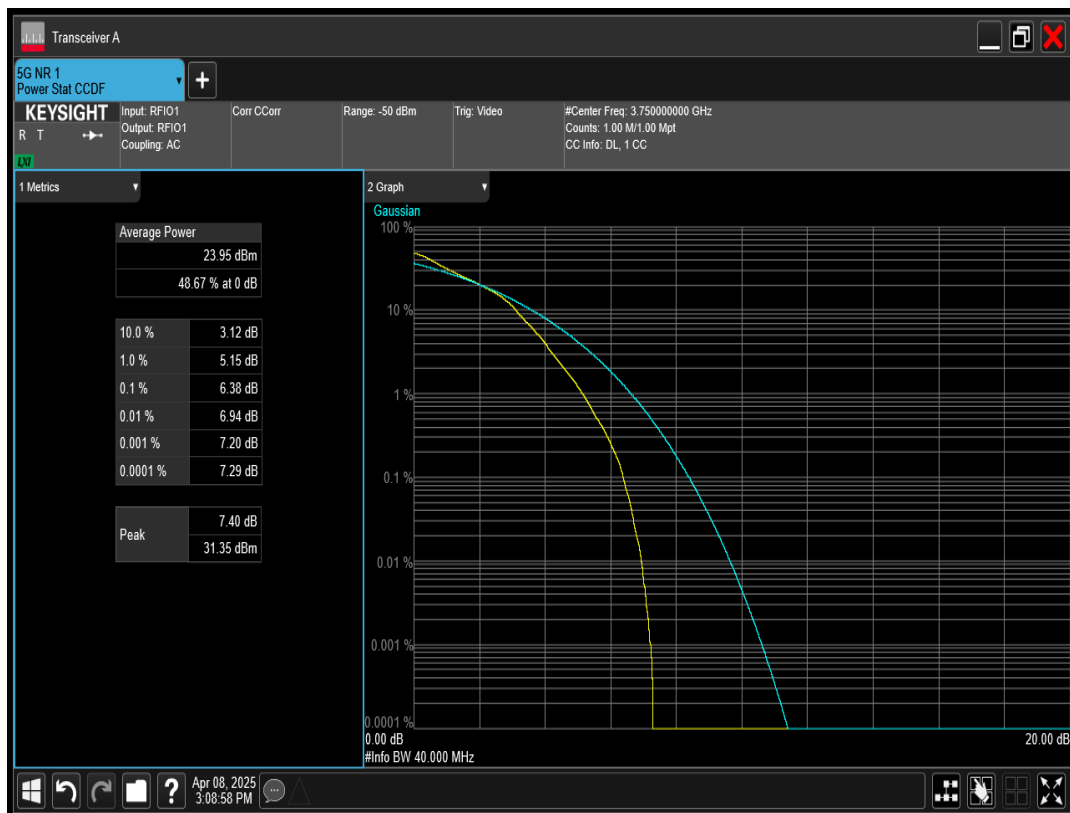


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=50MHz Channel=650000 RB=128@0

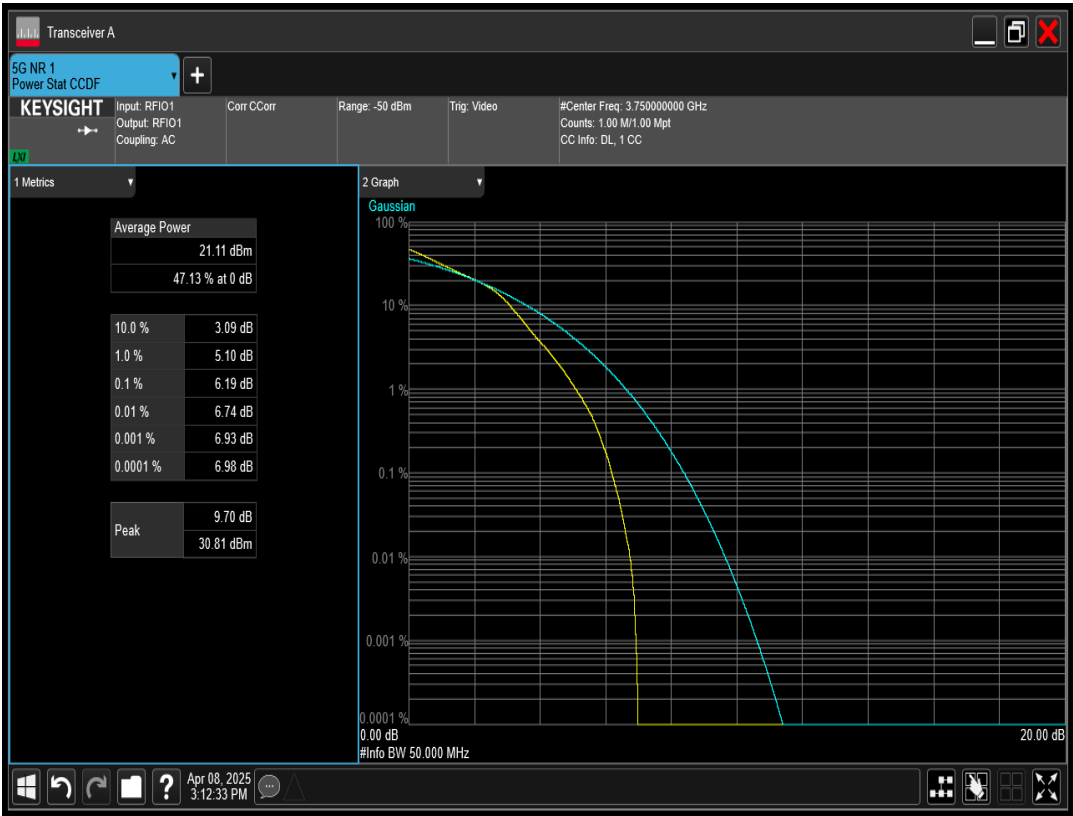


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=60MHz Channel=648668 RB=162@0

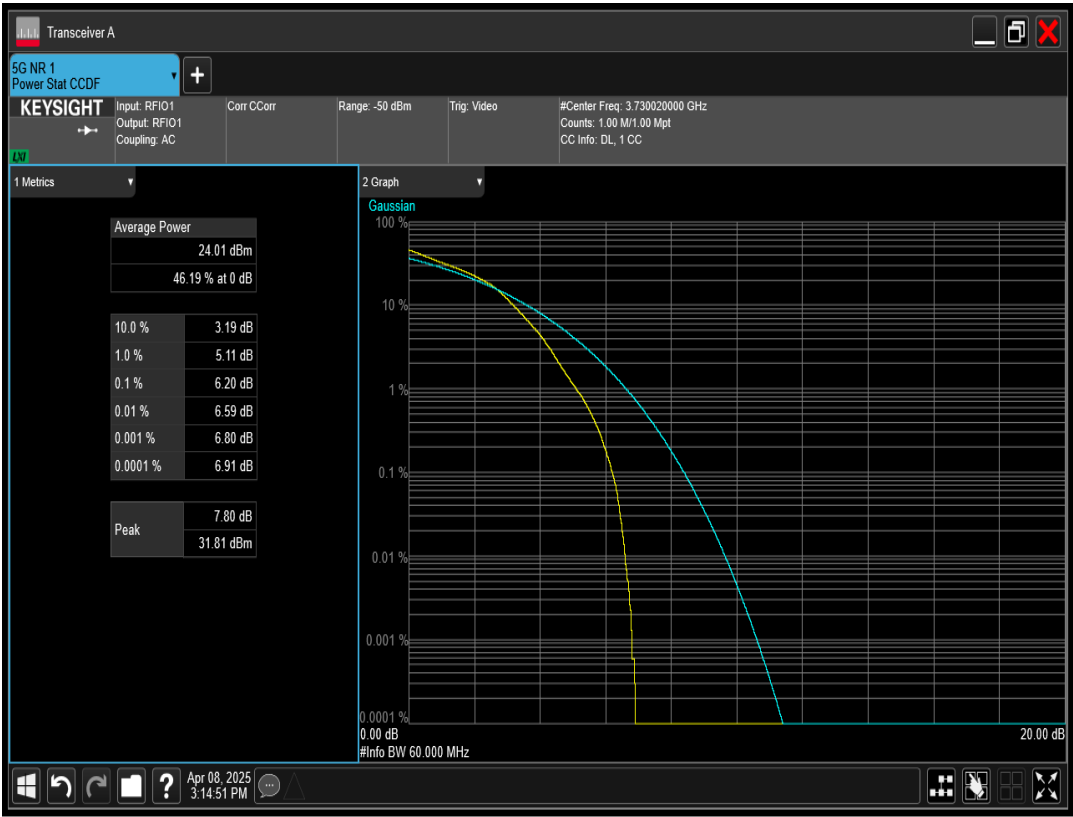


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=50MHz Channel=651666 RB=128@0

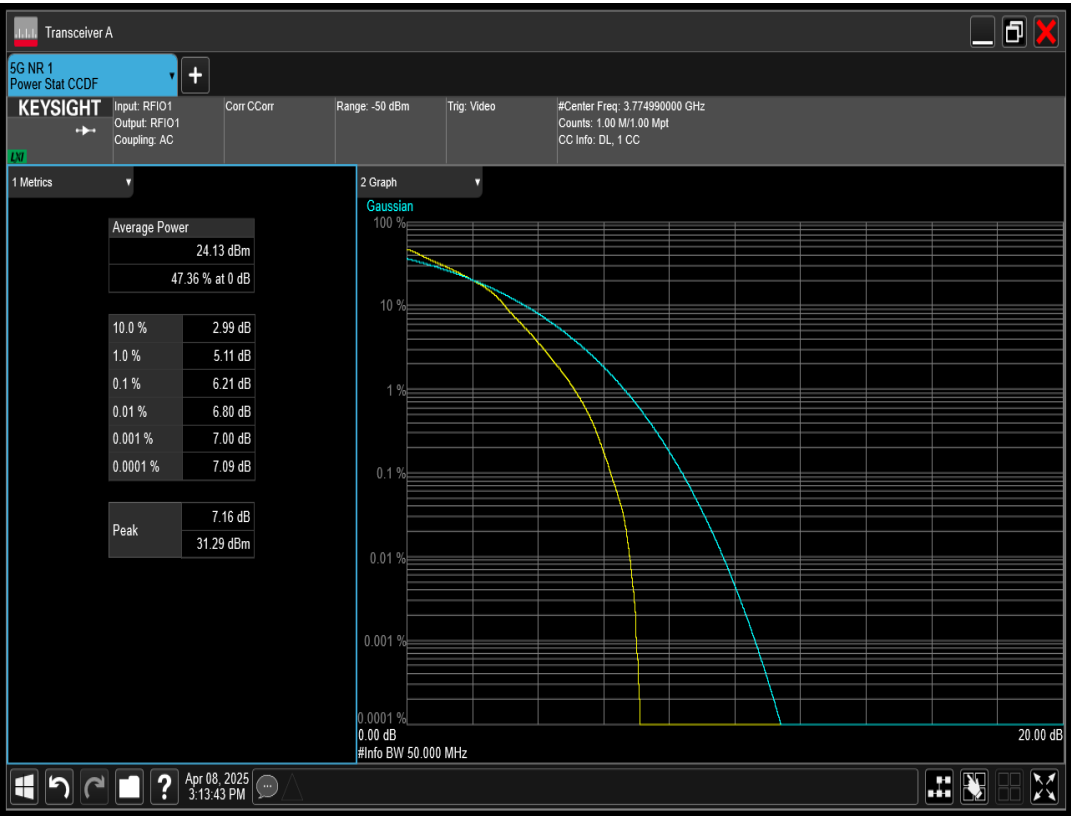


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=60MHz Channel=651332 RB=162@0

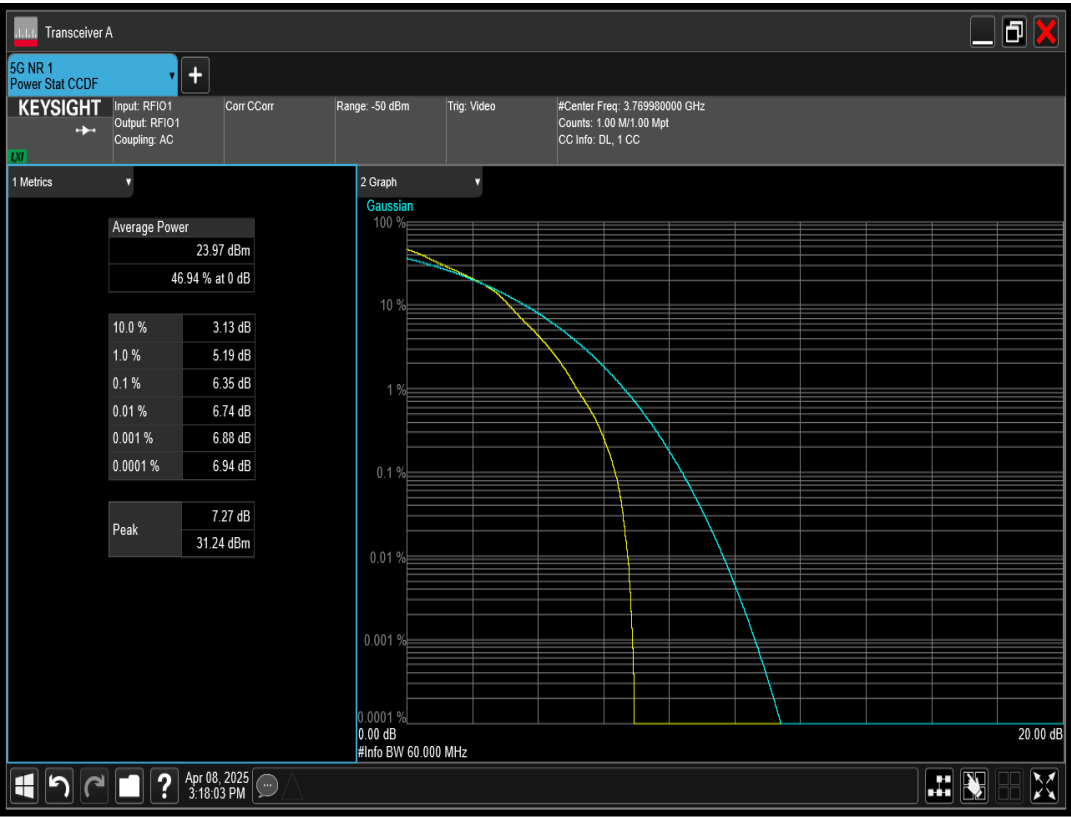


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=60MHz Channel=650000 RB=162@0

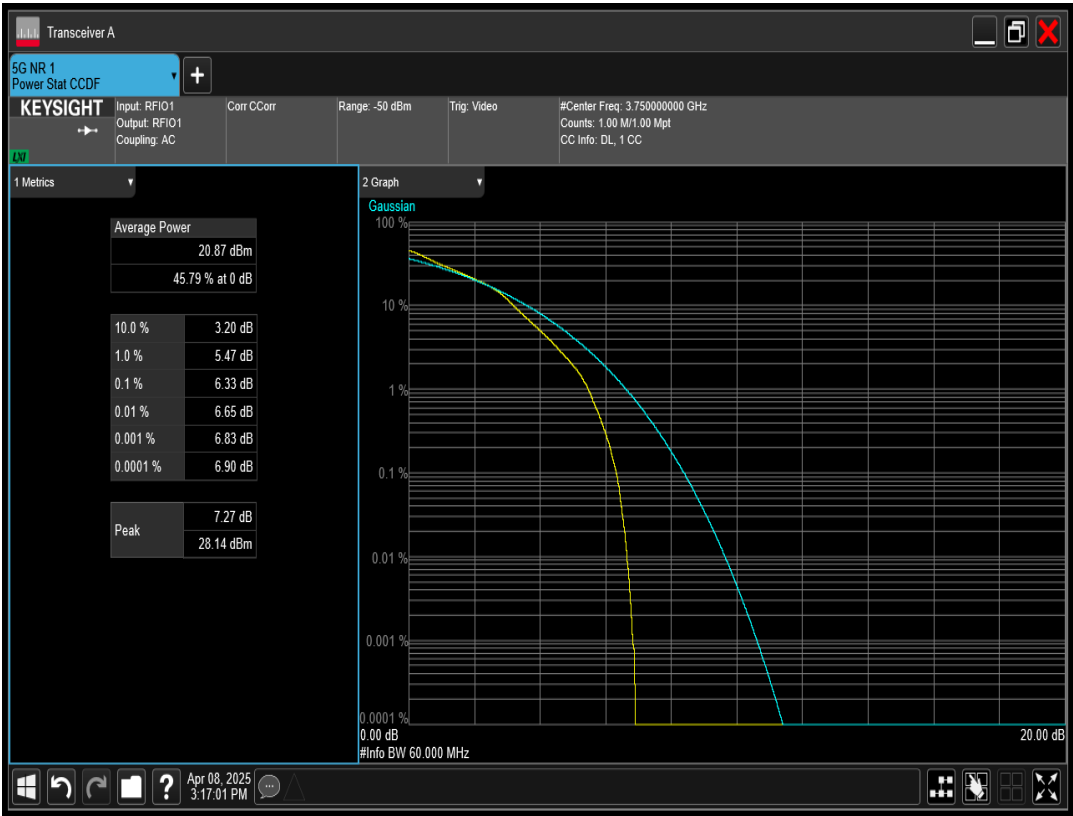


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=70MHz Channel=649000 RB=180@0

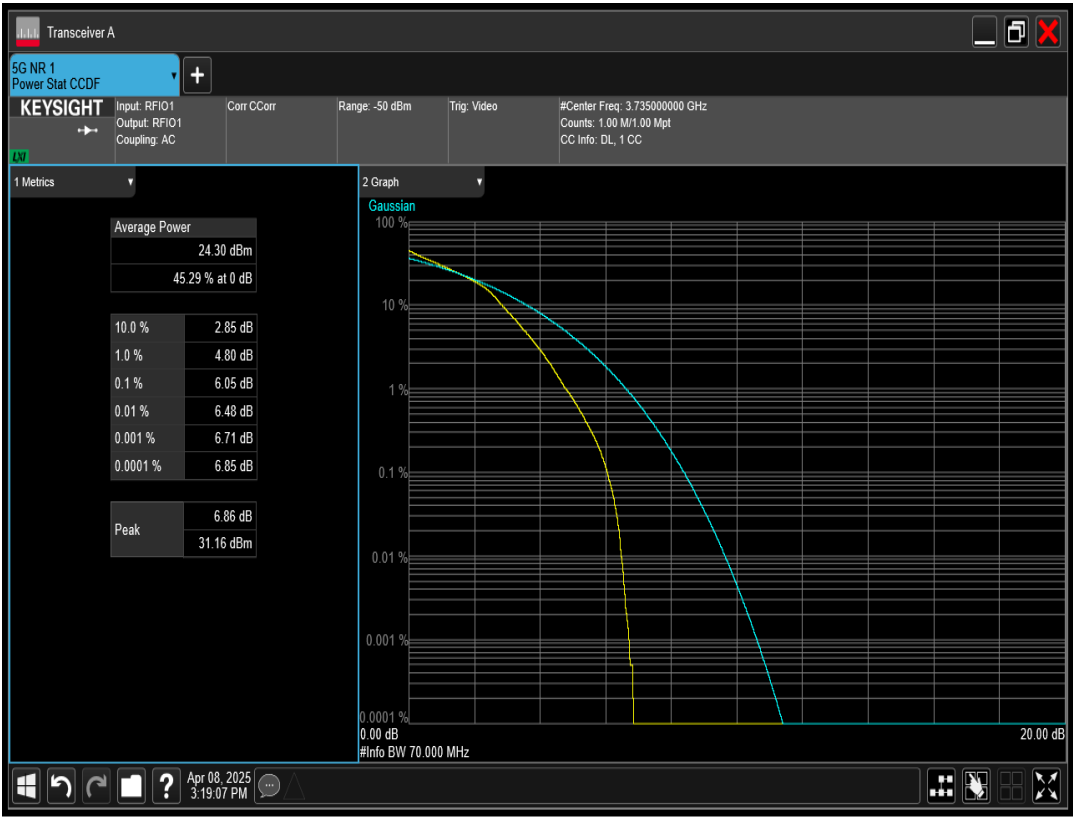

n78(3700-3800) SCS=30kHz DFT_QAM16 BW=70MHz Channel=650000 RB=180@0

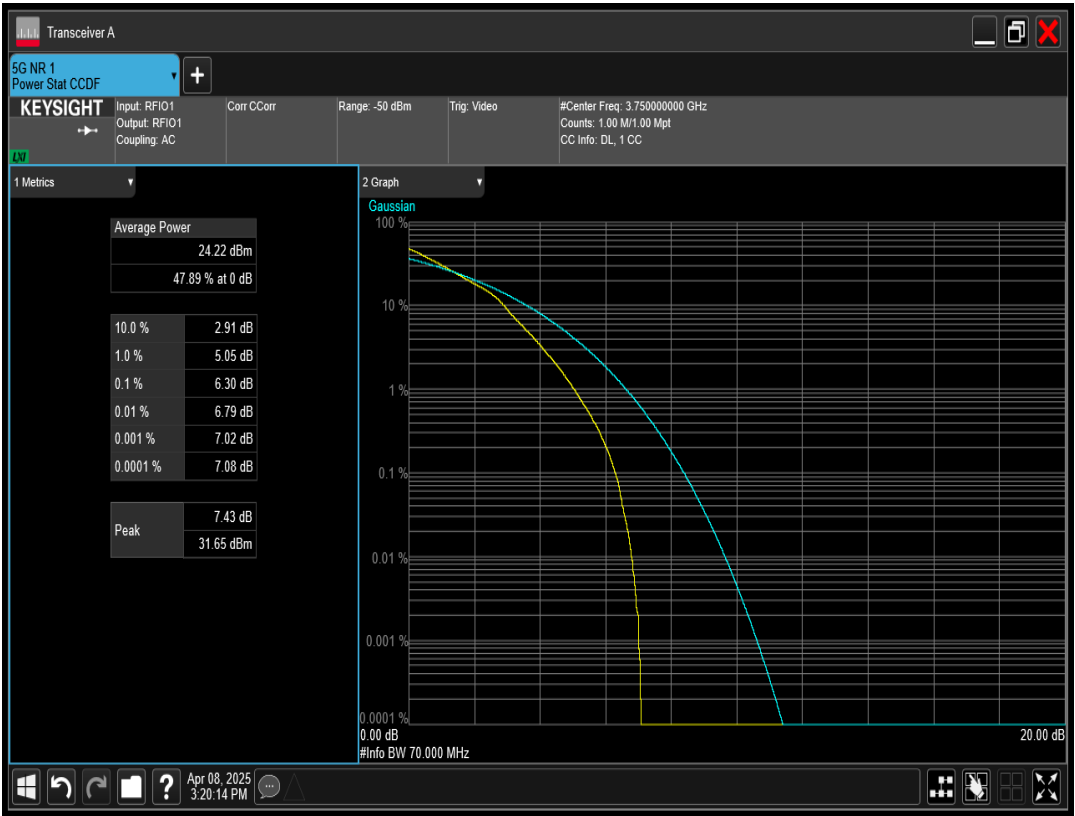


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=80MHz Channel=649334 RB=216@0

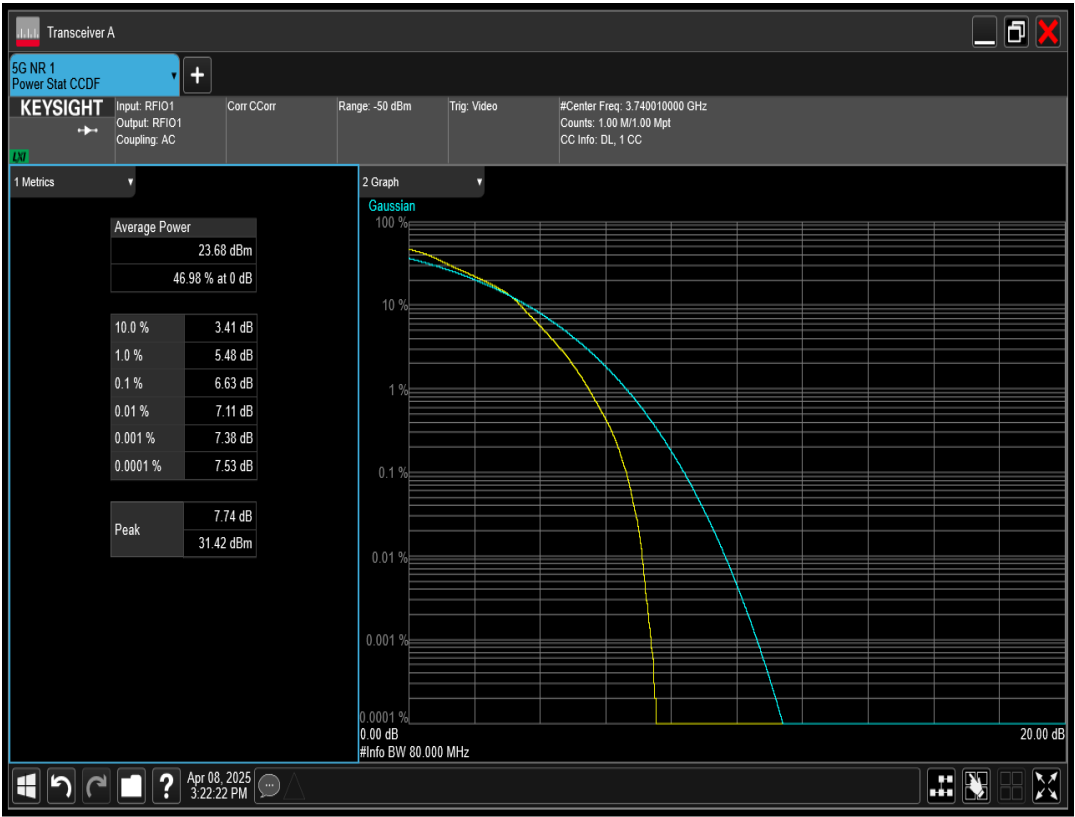


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=70MHz Channel=651000 RB=180@0




n78(3700-3800) SCS=30kHz DFT_QAM16 BW=80MHz Channel=650000 RB=216@0

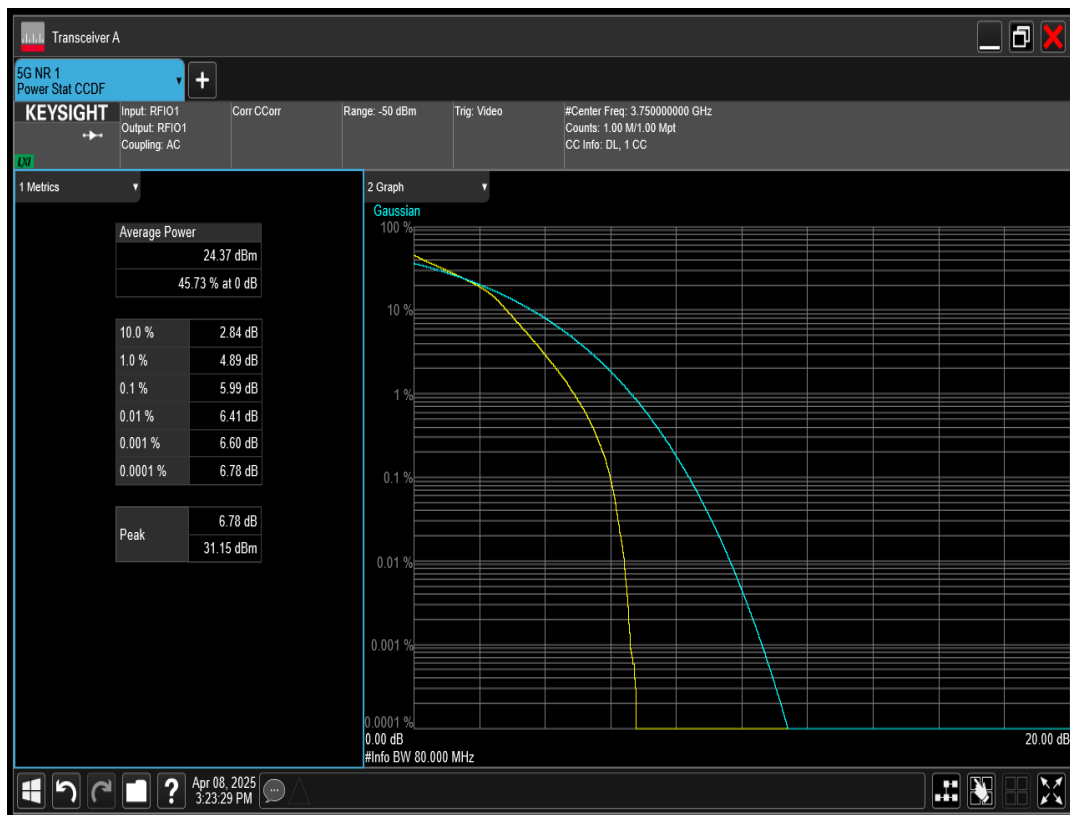


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=80MHz Channel=650666 RB=216@0

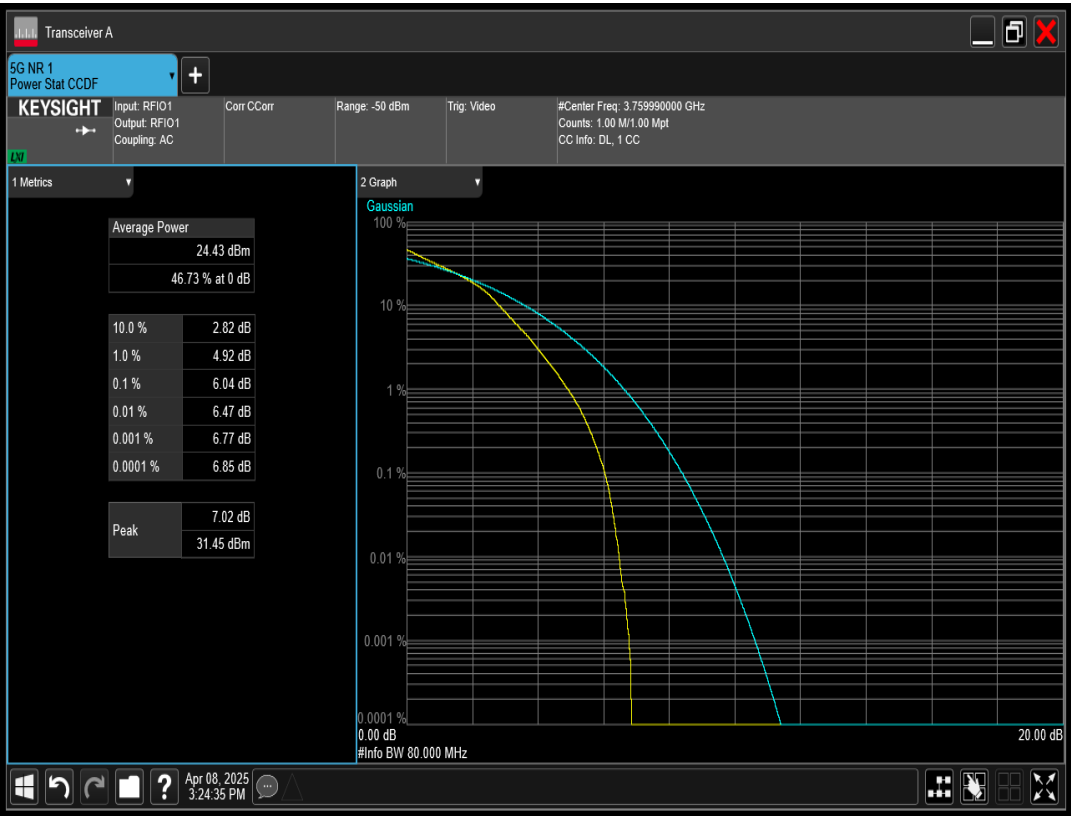


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=90MHz Channel=649668 RB=240@0

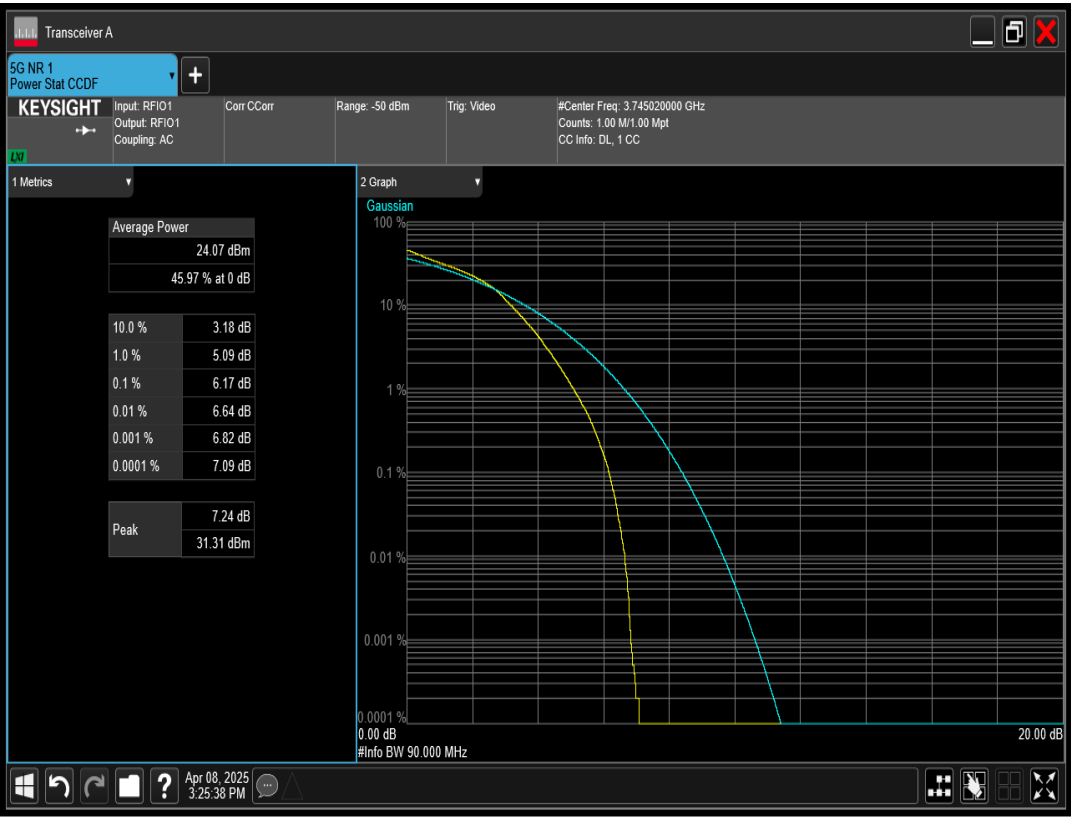


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=90MHz Channel=650000 RB=240@0

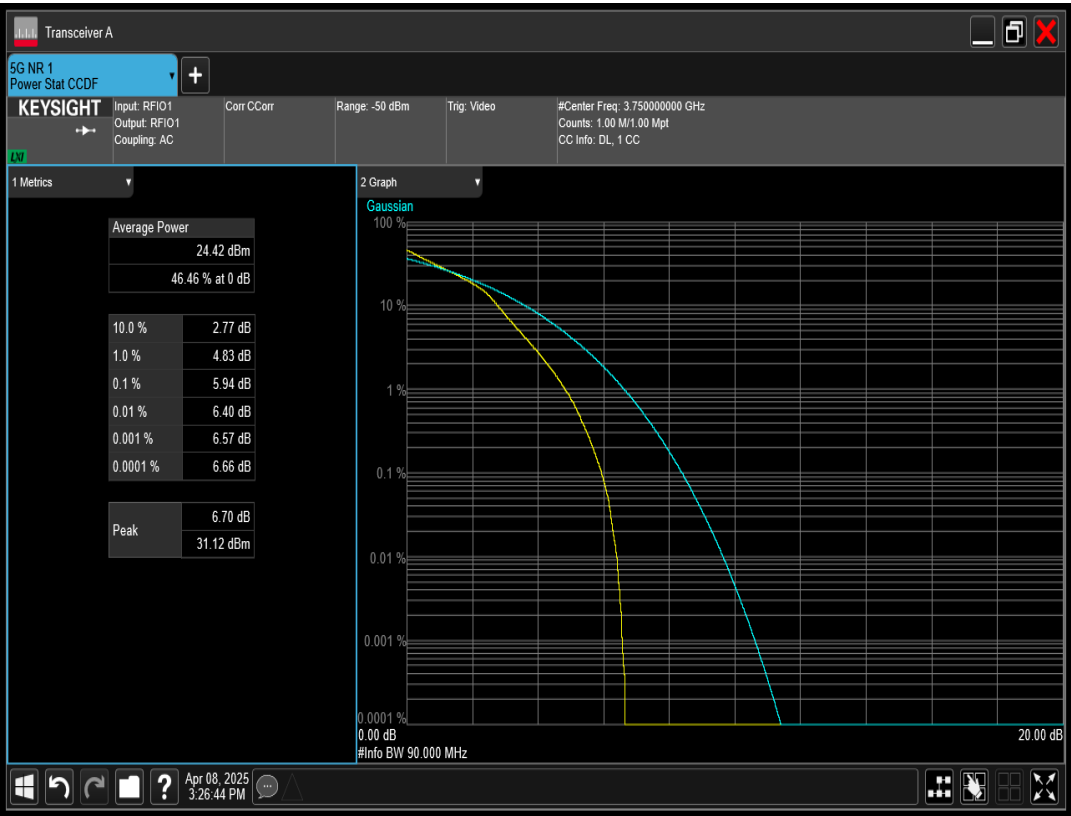


n78(3700-3800) SCS=30kHz DFT_QAM16 BW=90MHz Channel=650332 RB=240@0

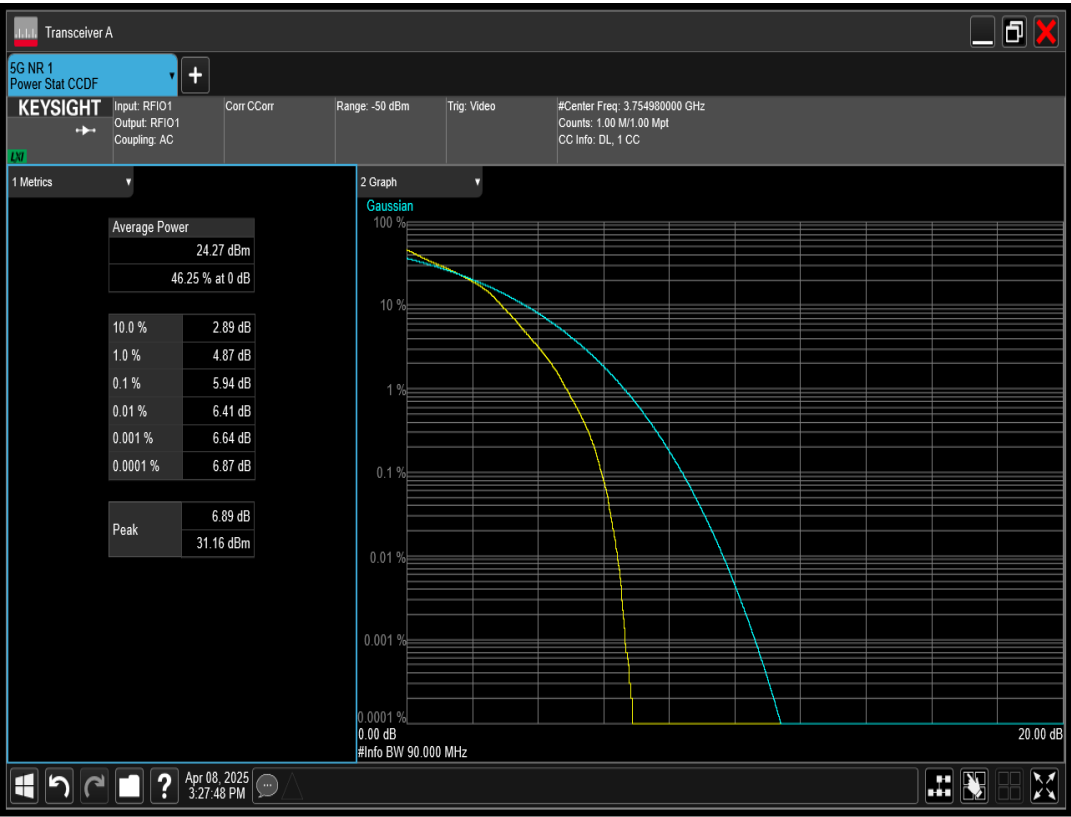


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=100MHz Channel=650000 RB=270@0

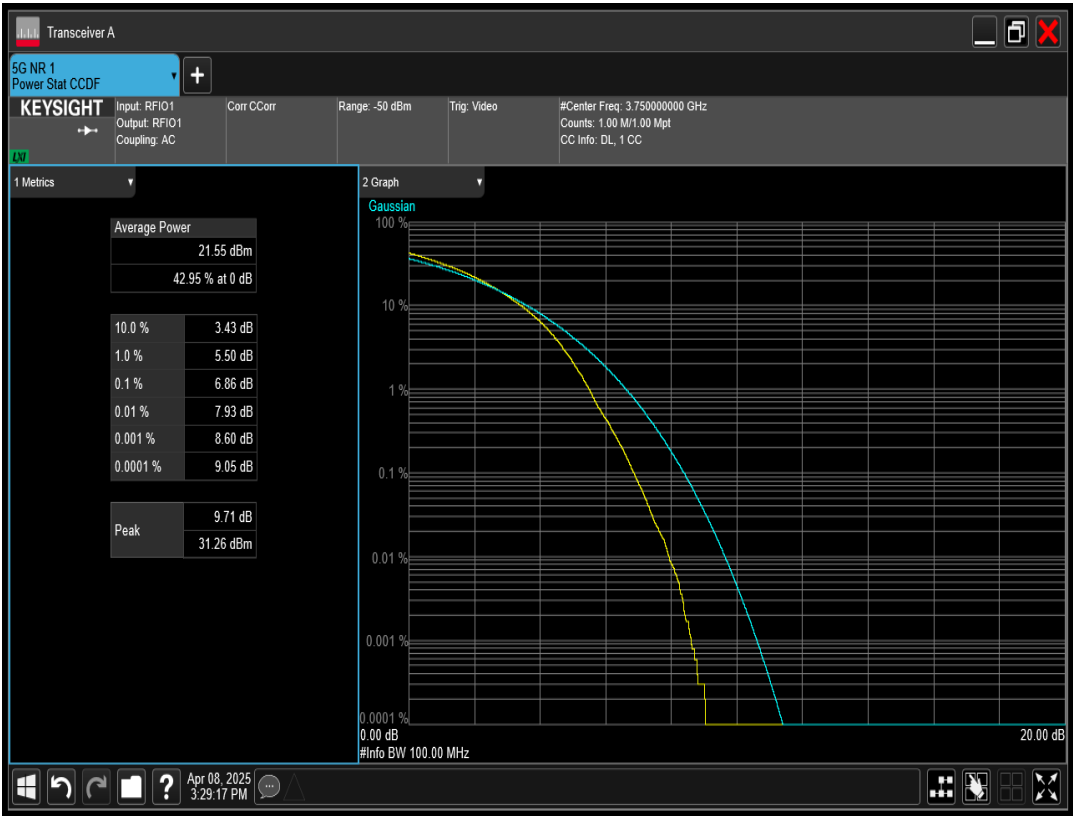


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=10MHz Channel=647000 RB=24@0

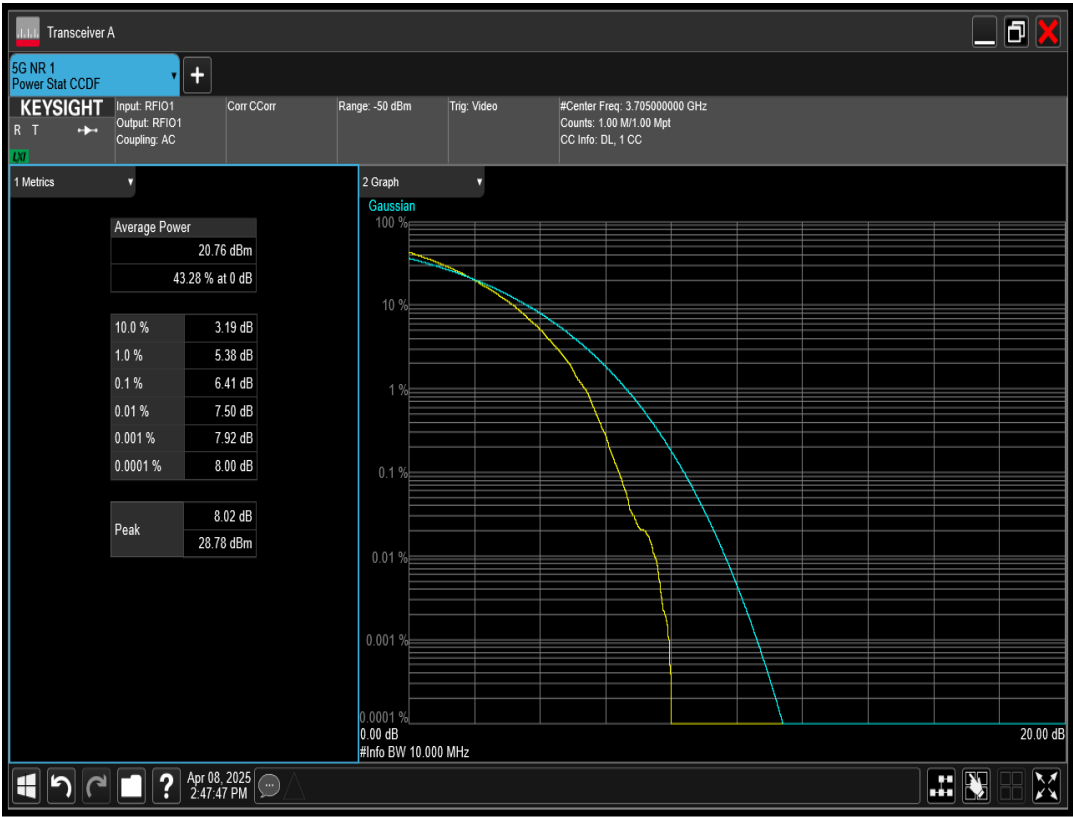


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=15MHz Channel=647168 RB=36@0

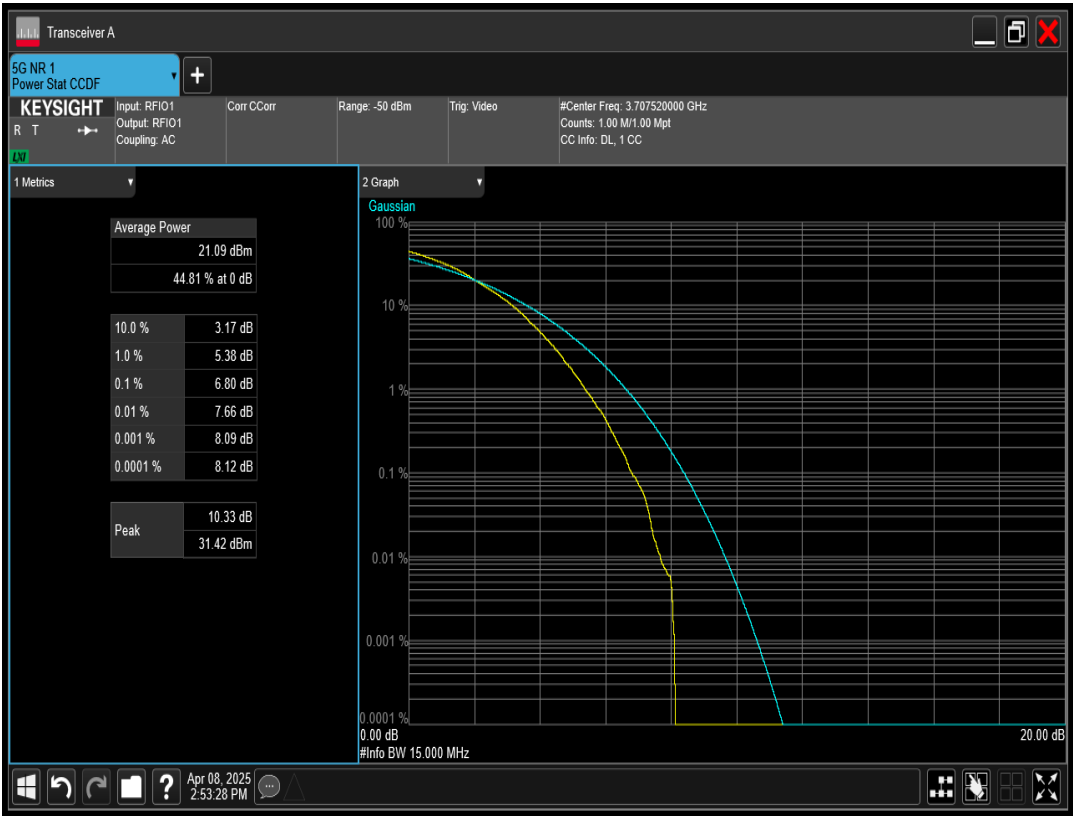


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=15MHz Channel=650000 RB=36@0

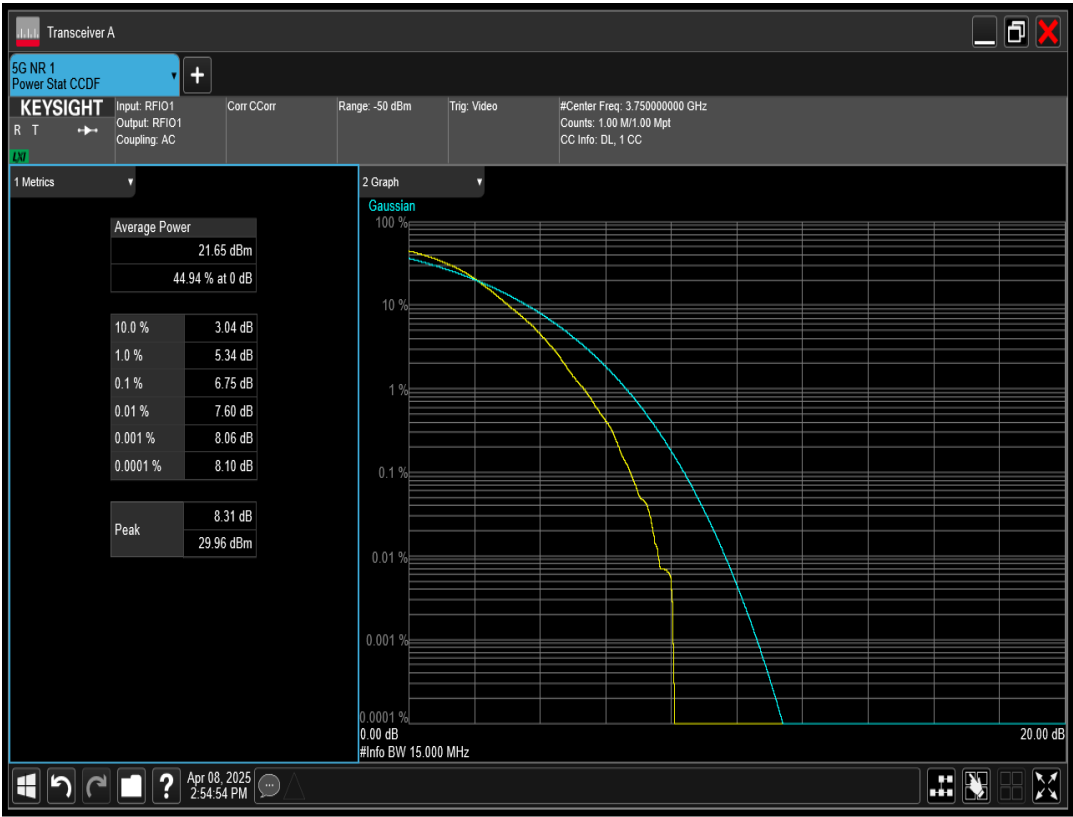


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=10MHz Channel=650000 RB=24@0

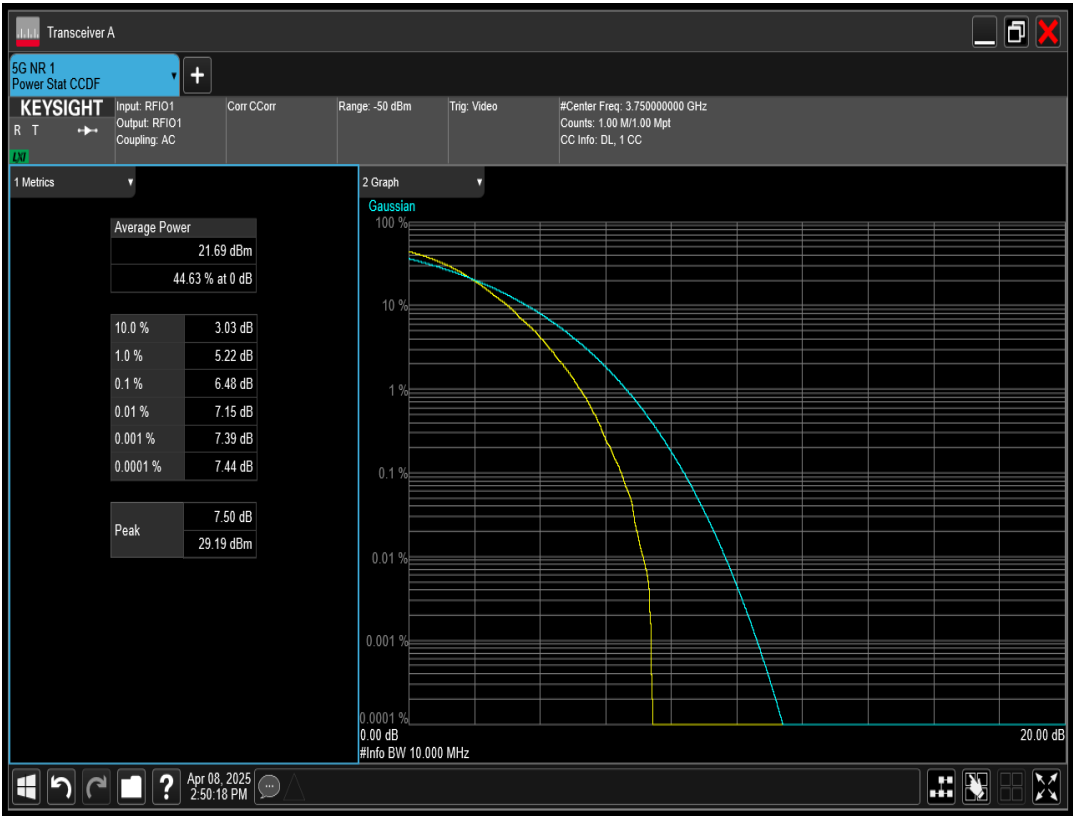


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=10MHz Channel=653000 RB=24@0

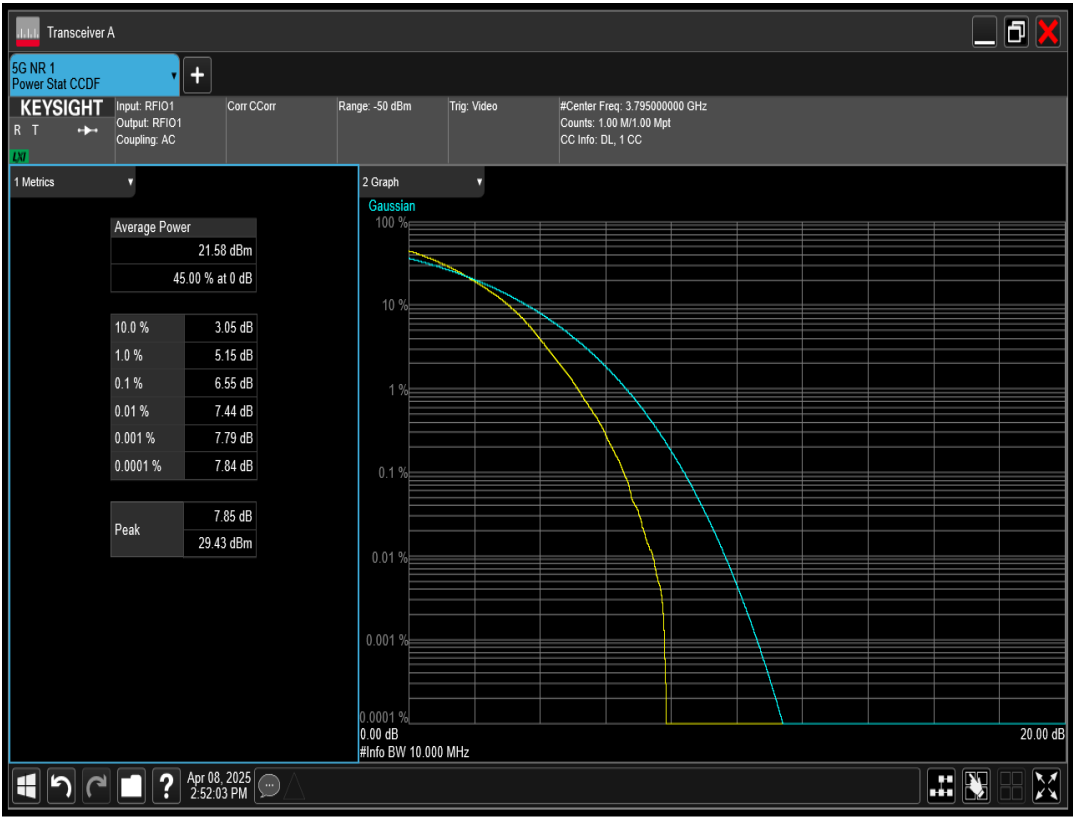


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=15MHz Channel=652832 RB=36@0

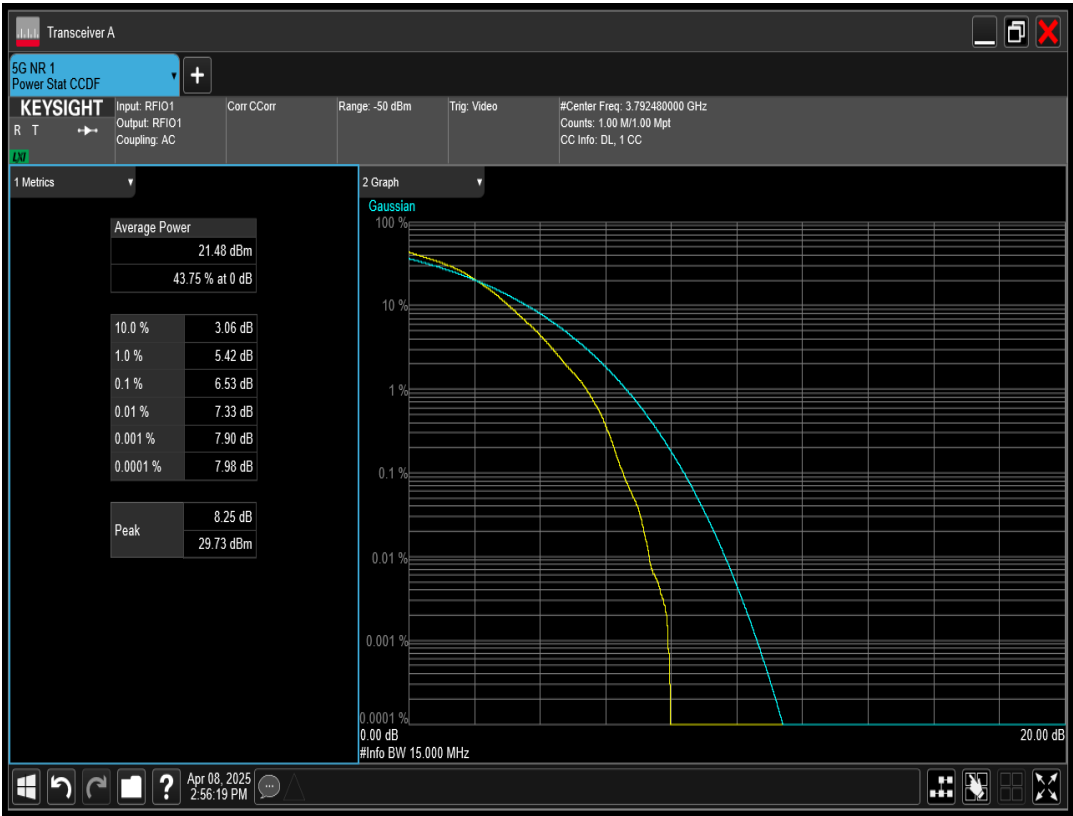


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=20MHz Channel=647334 RB=50@0

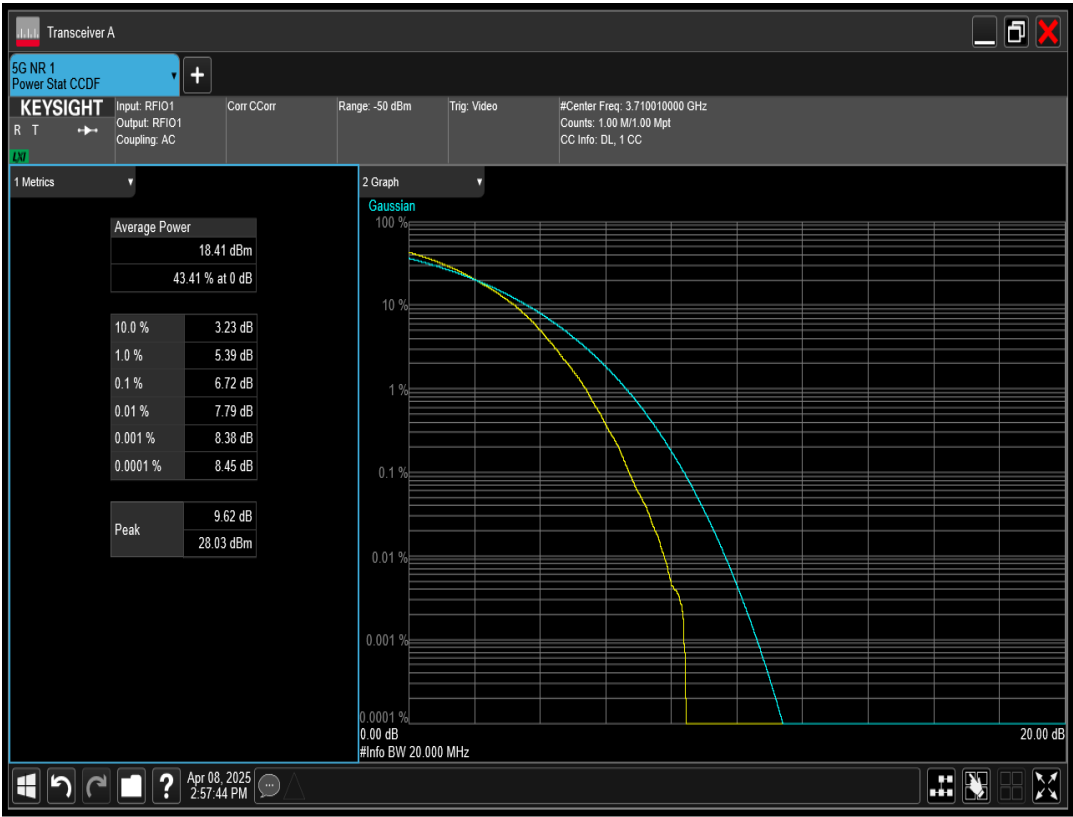


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=20MHz Channel=650000 RB=50@0

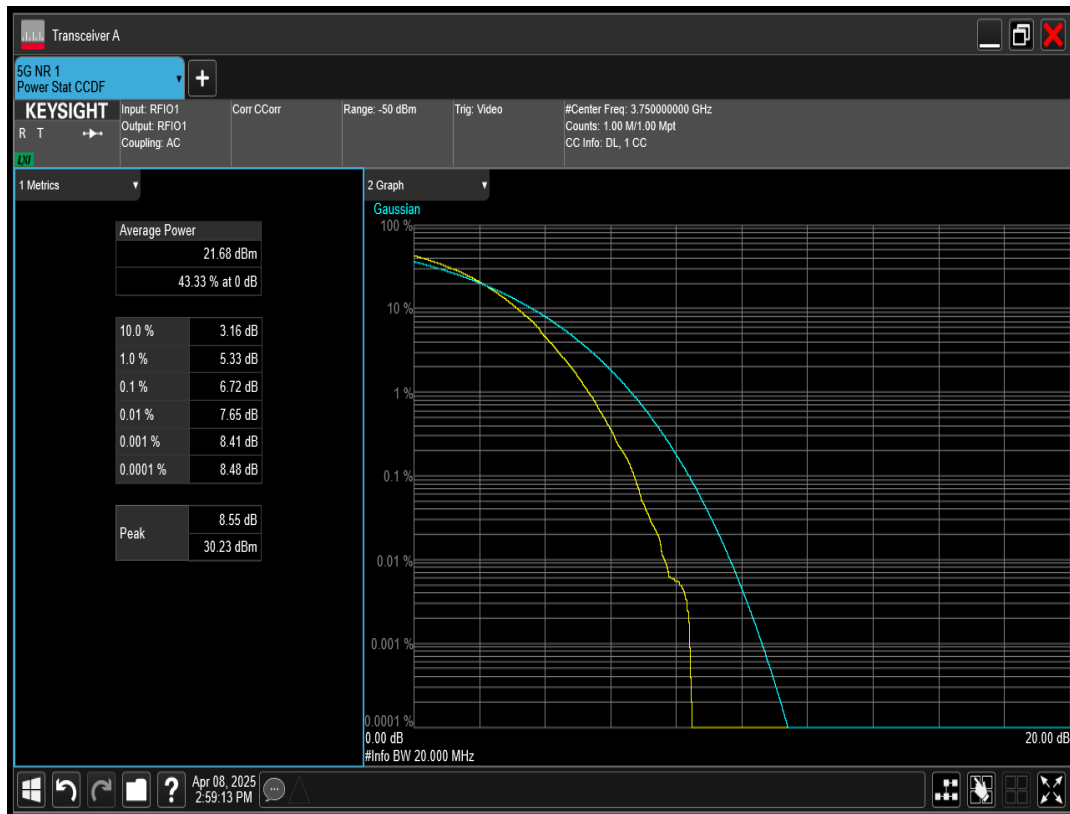


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=20MHz Channel=652666 RB=50@0

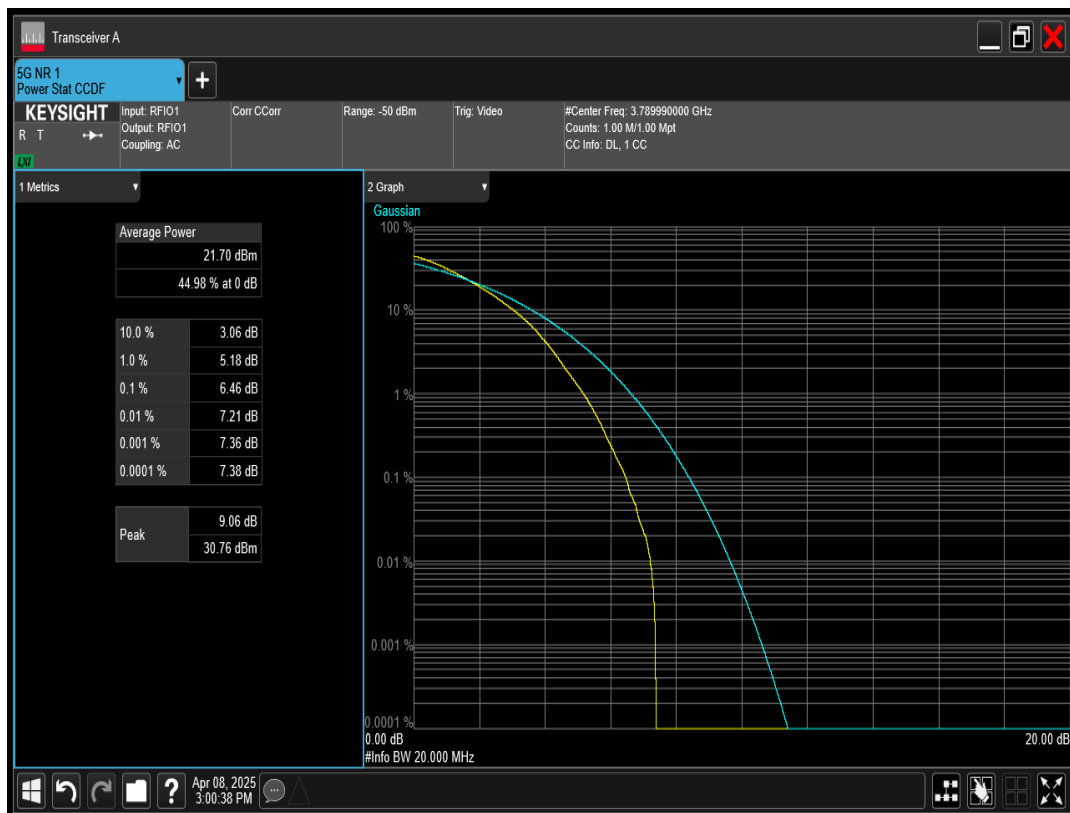


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=30MHz Channel=650000 RB=75@0

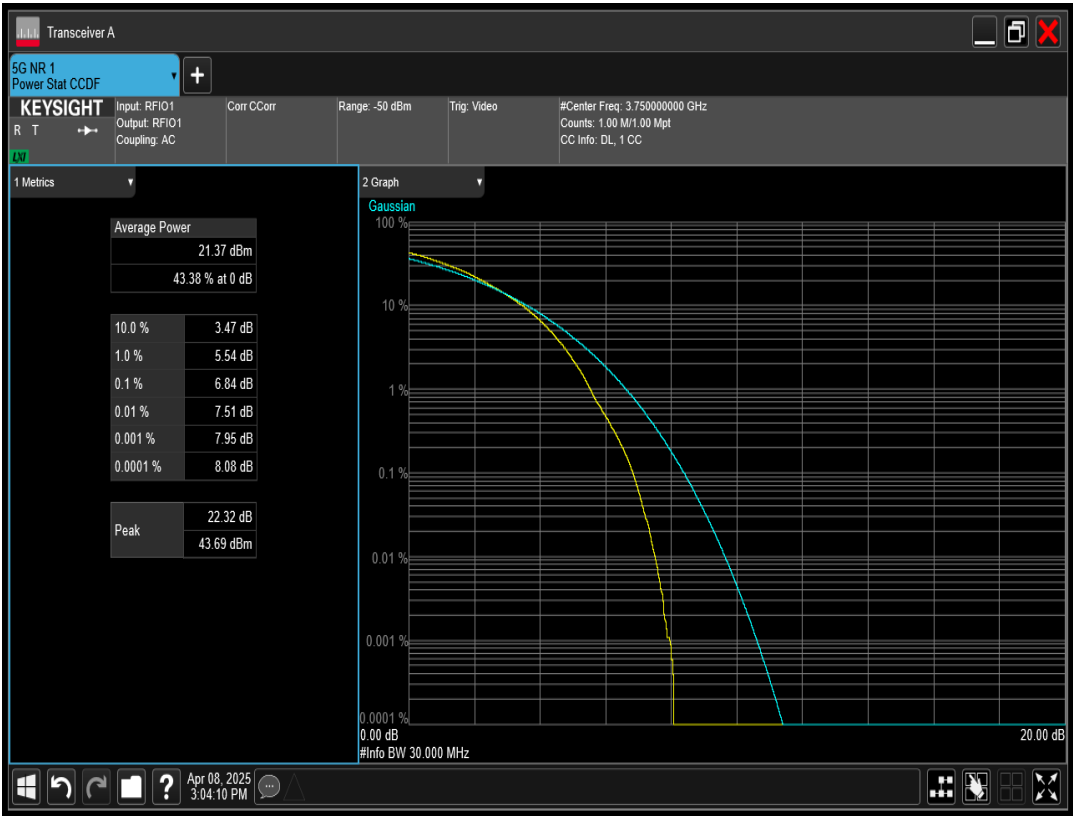


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=30MHz Channel=647668 RB=75@0

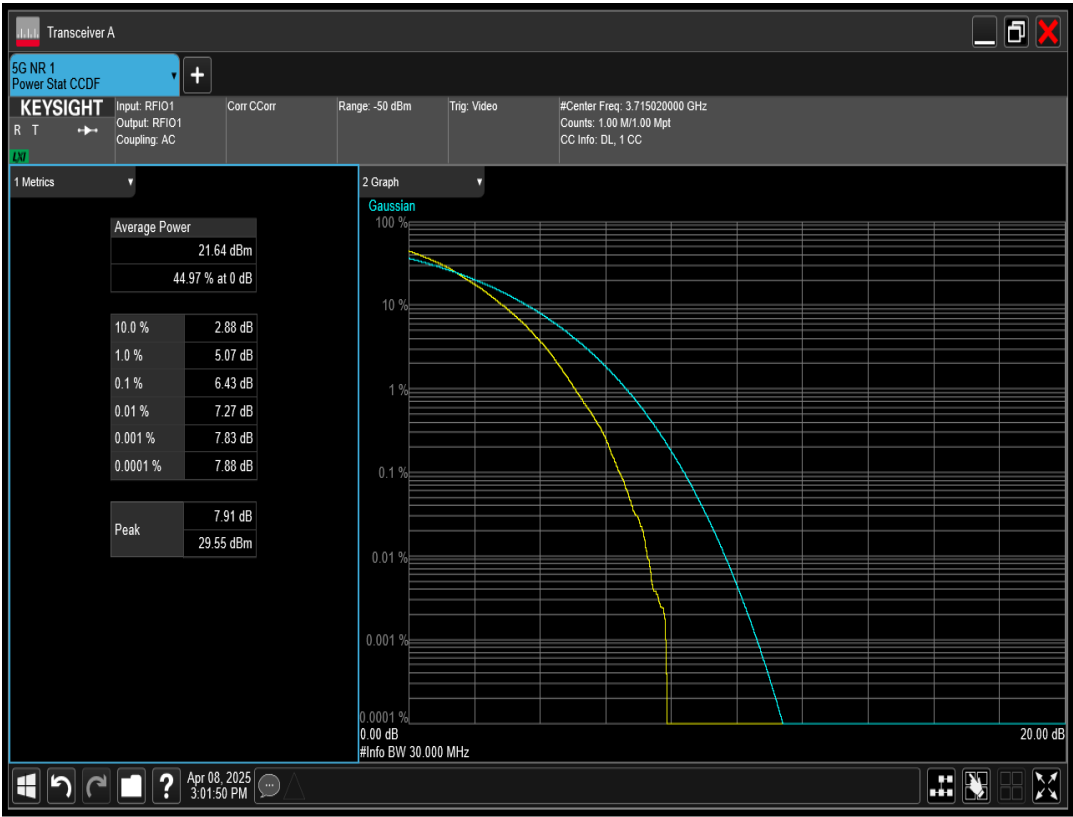


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=40MHz Channel=648000 RB=100@0

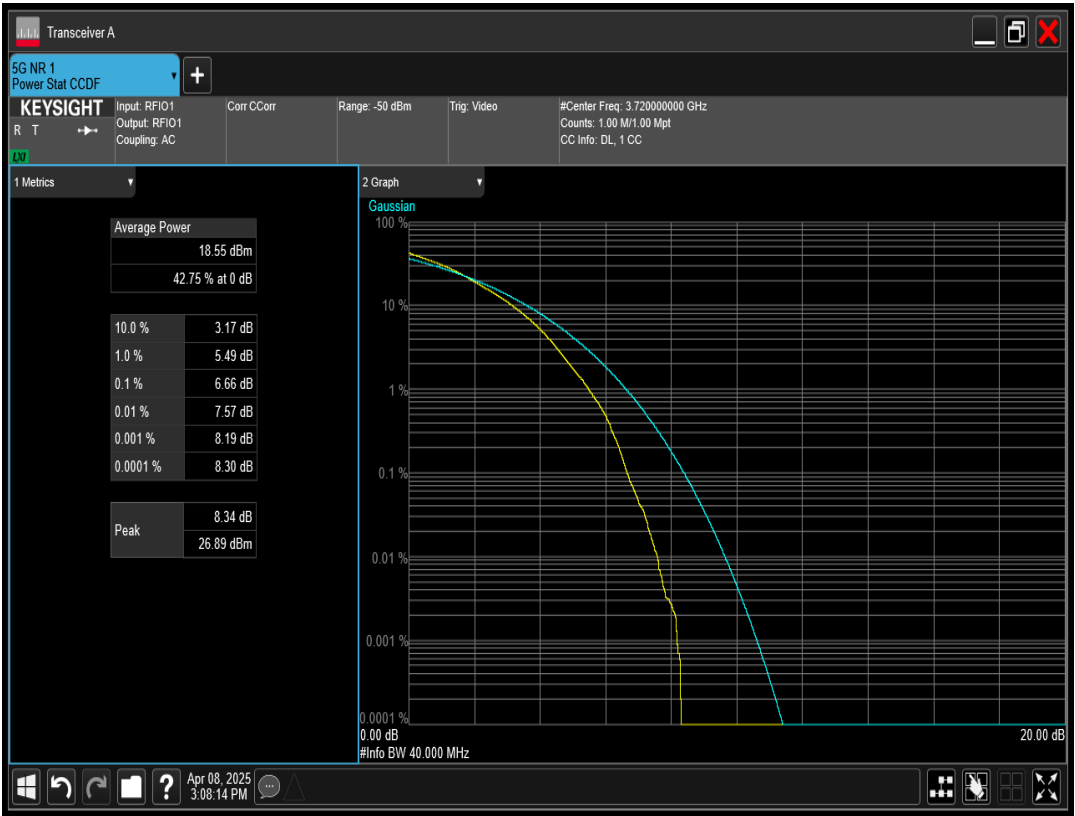


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=30MHz Channel=652332 RB=75@0

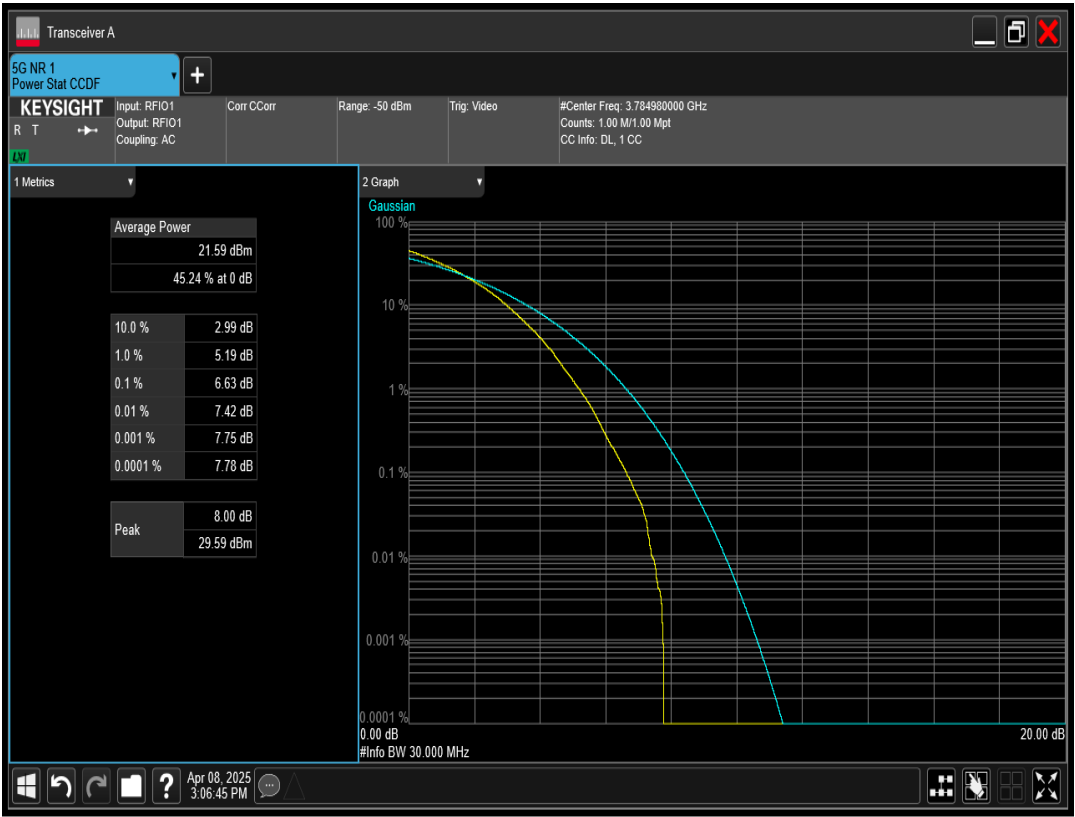


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=40MHz Channel=652000 RB=100@0

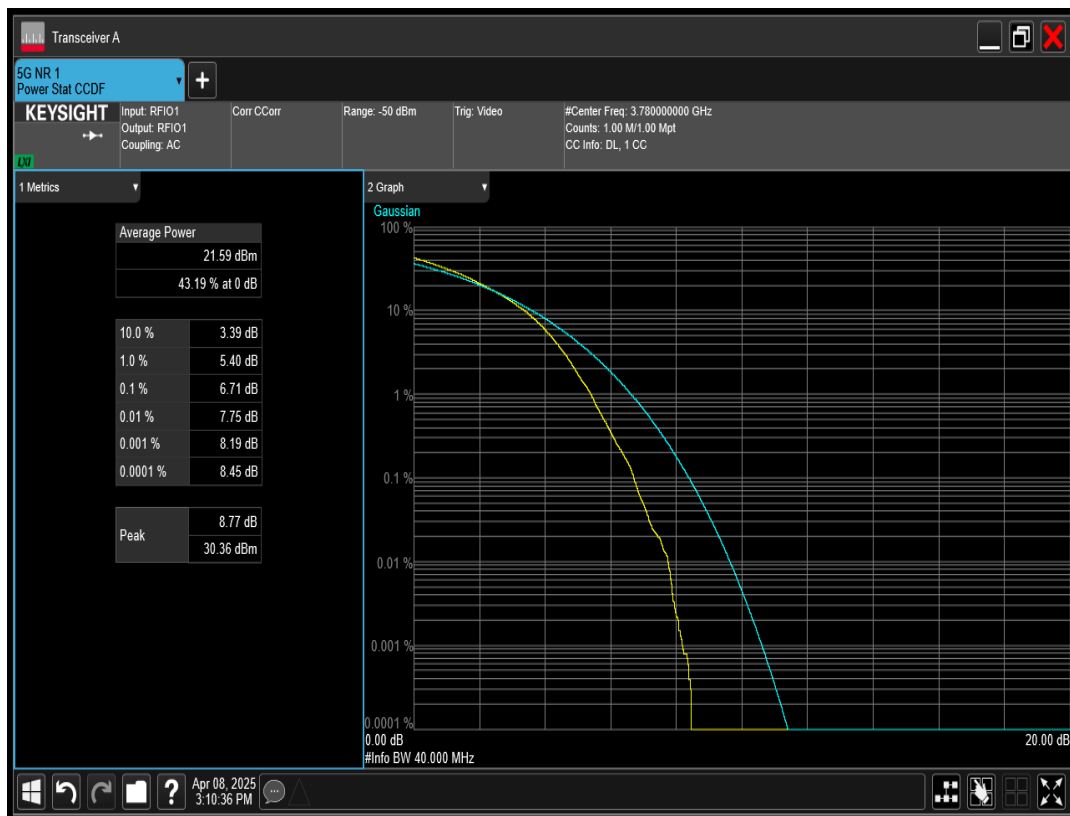


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=40MHz Channel=650000 RB=100@0

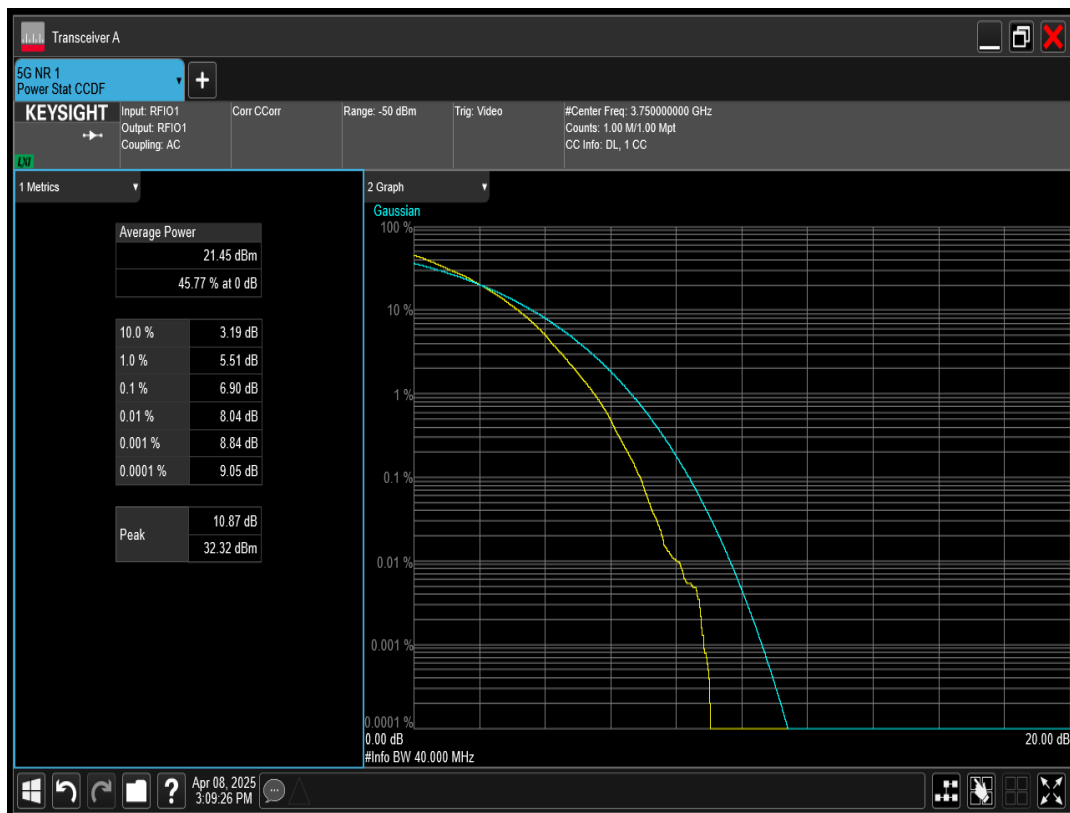


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=50MHz Channel=648334 RB=128@0

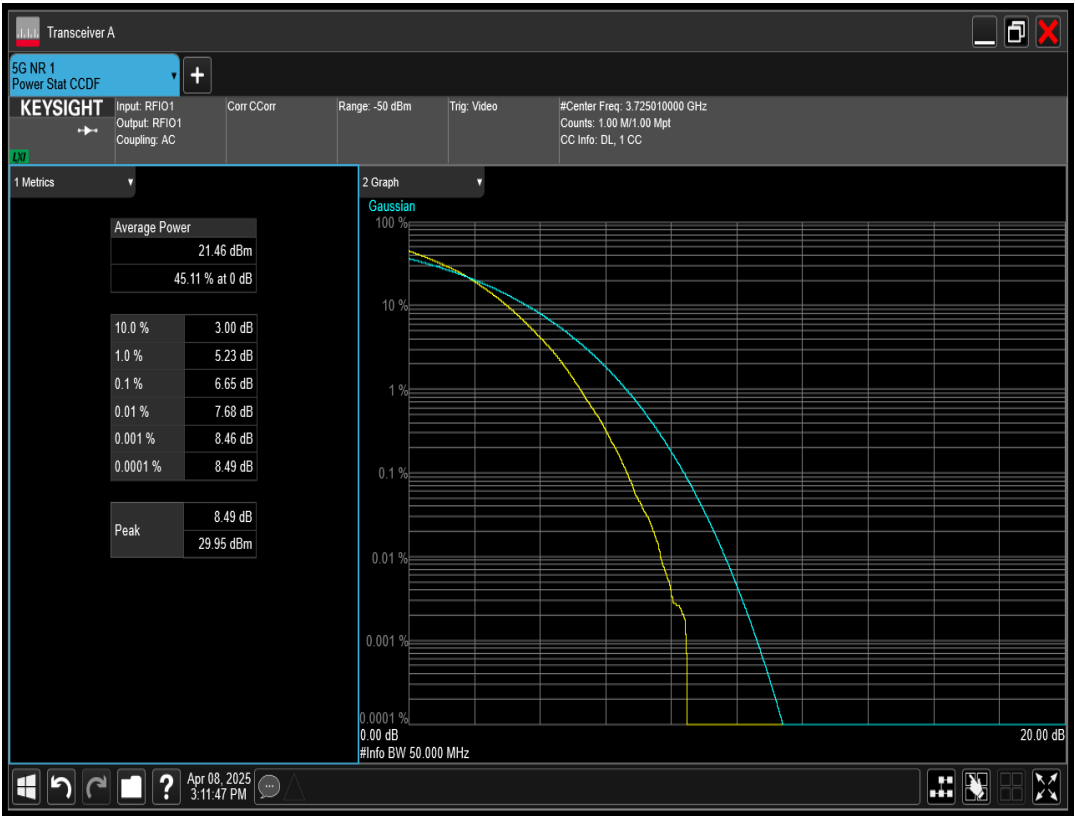


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=50MHz Channel=650000 RB=128@0

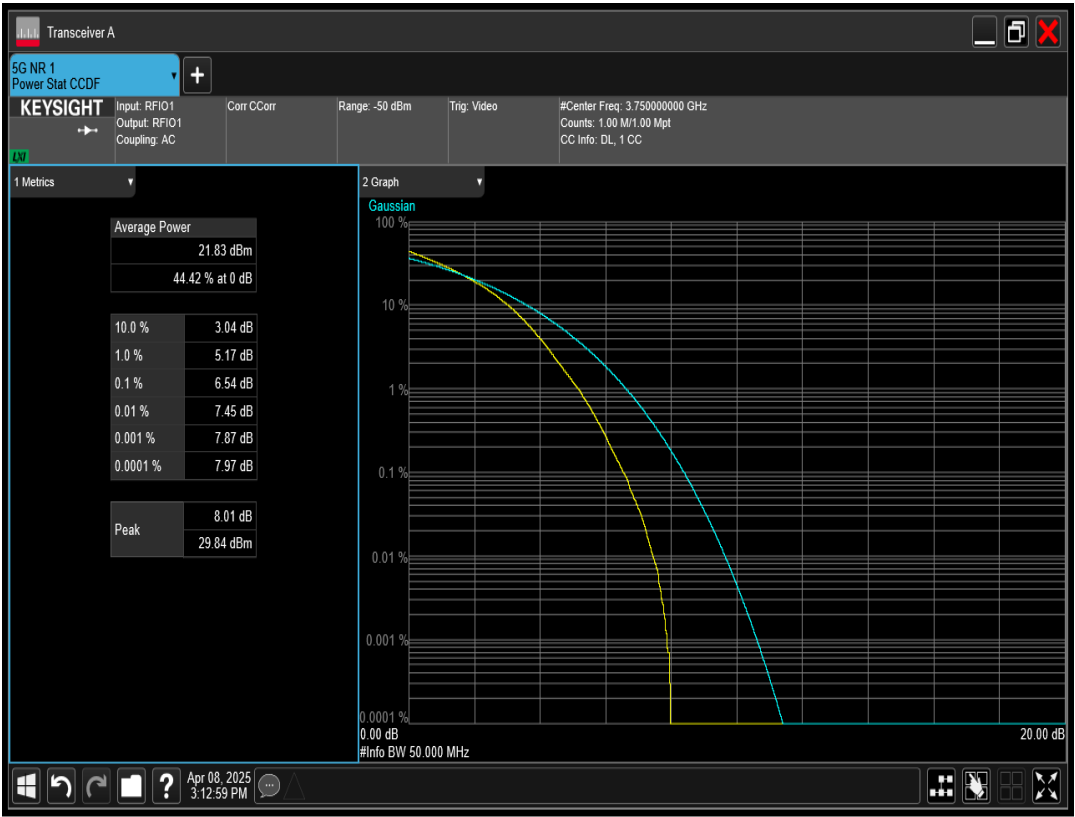


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=60MHz Channel=650000 RB=162@0

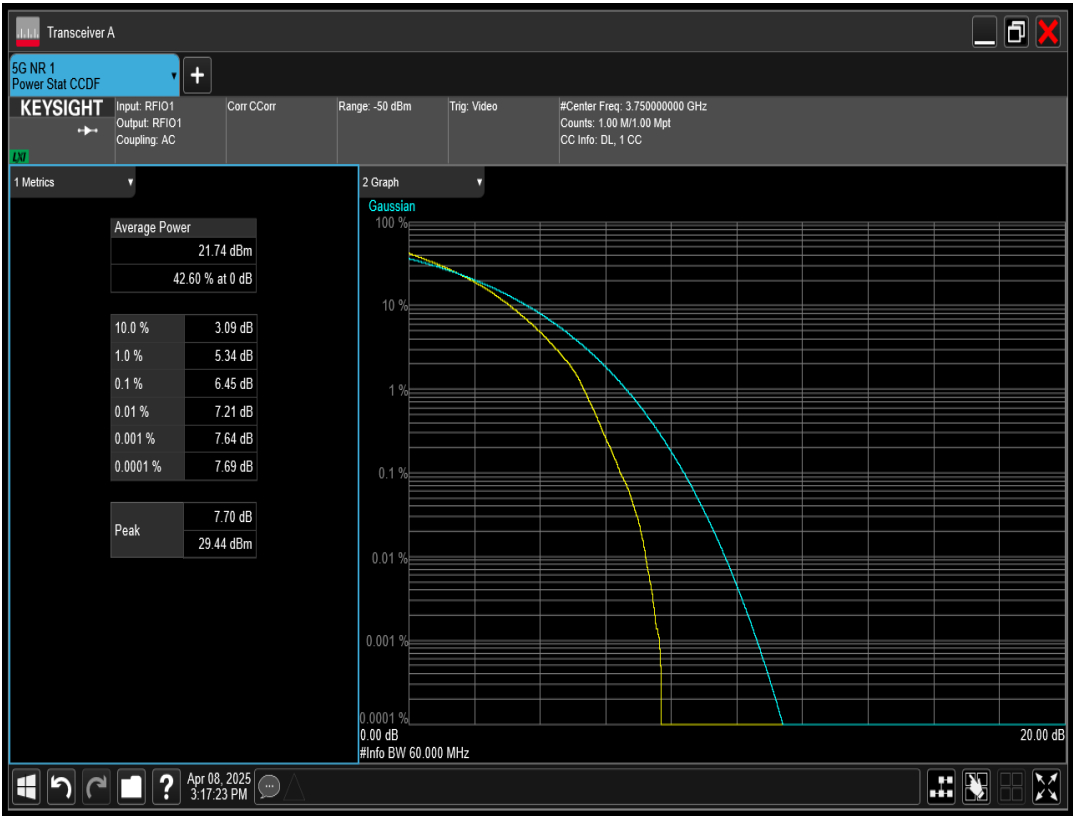


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=60MHz Channel=648668 RB=162@0

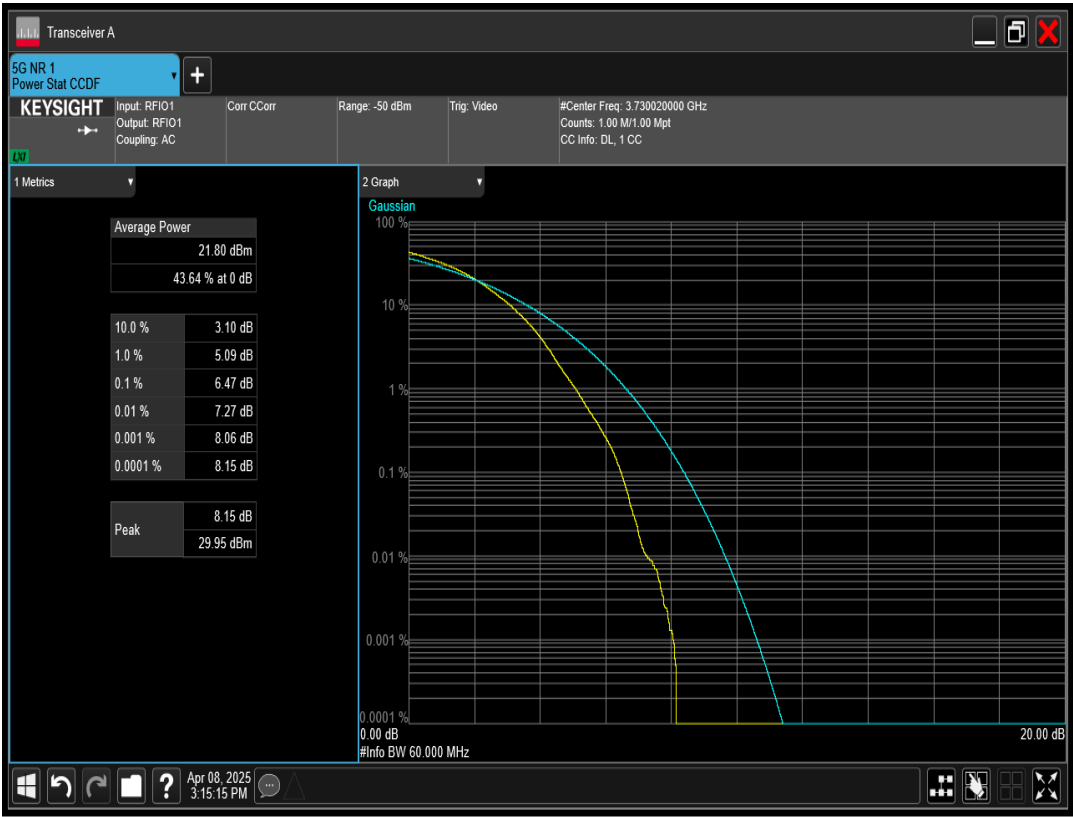


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=50MHz Channel=651666 RB=128@0

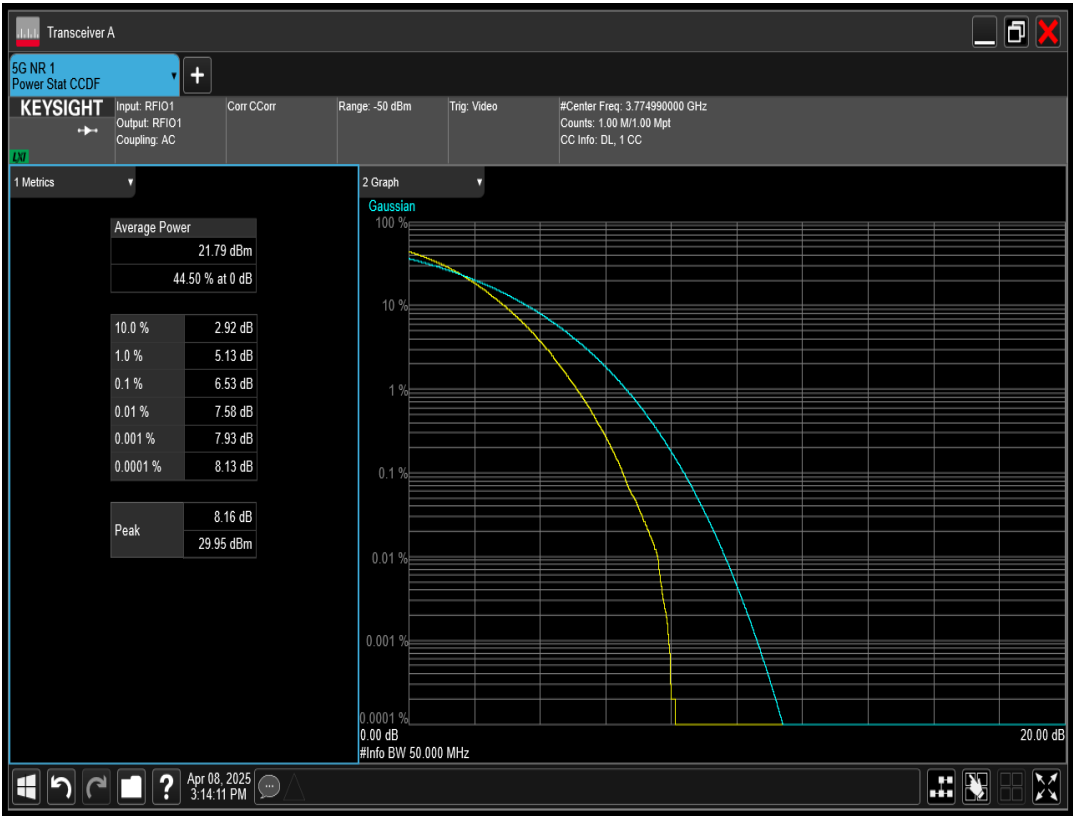


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=60MHz Channel=651332 RB=162@0

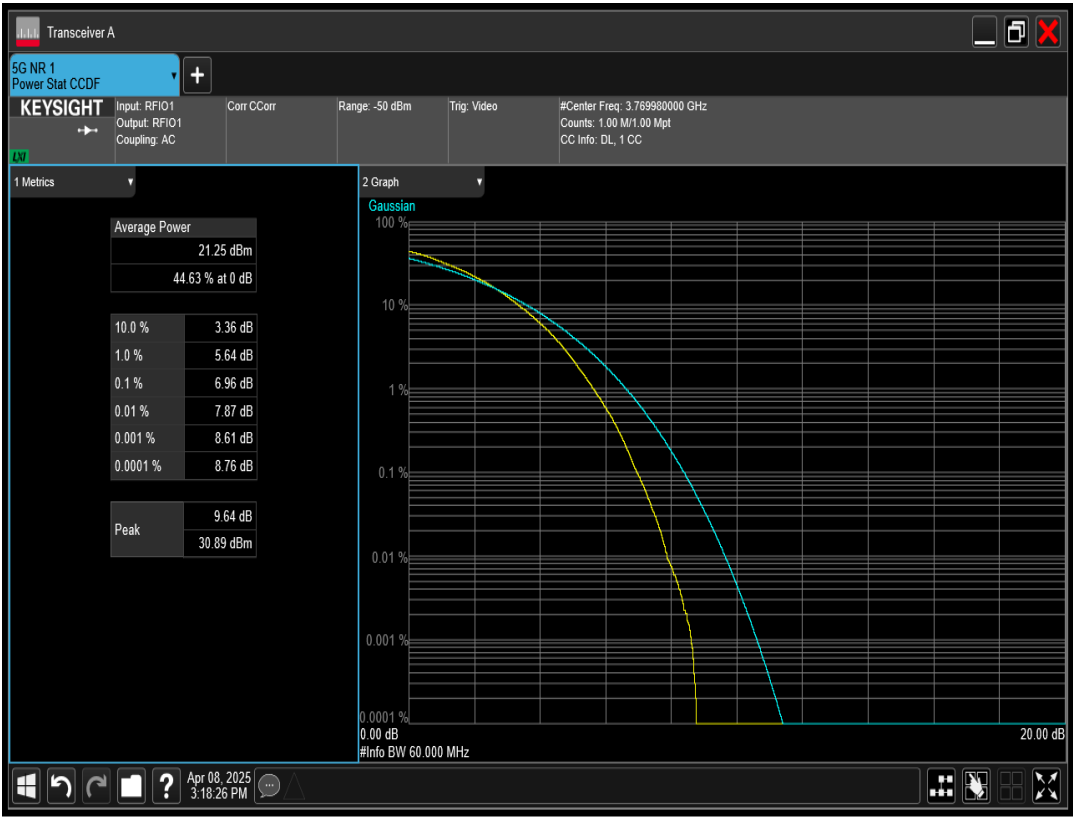


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=70MHz Channel=650000 RB=180@0

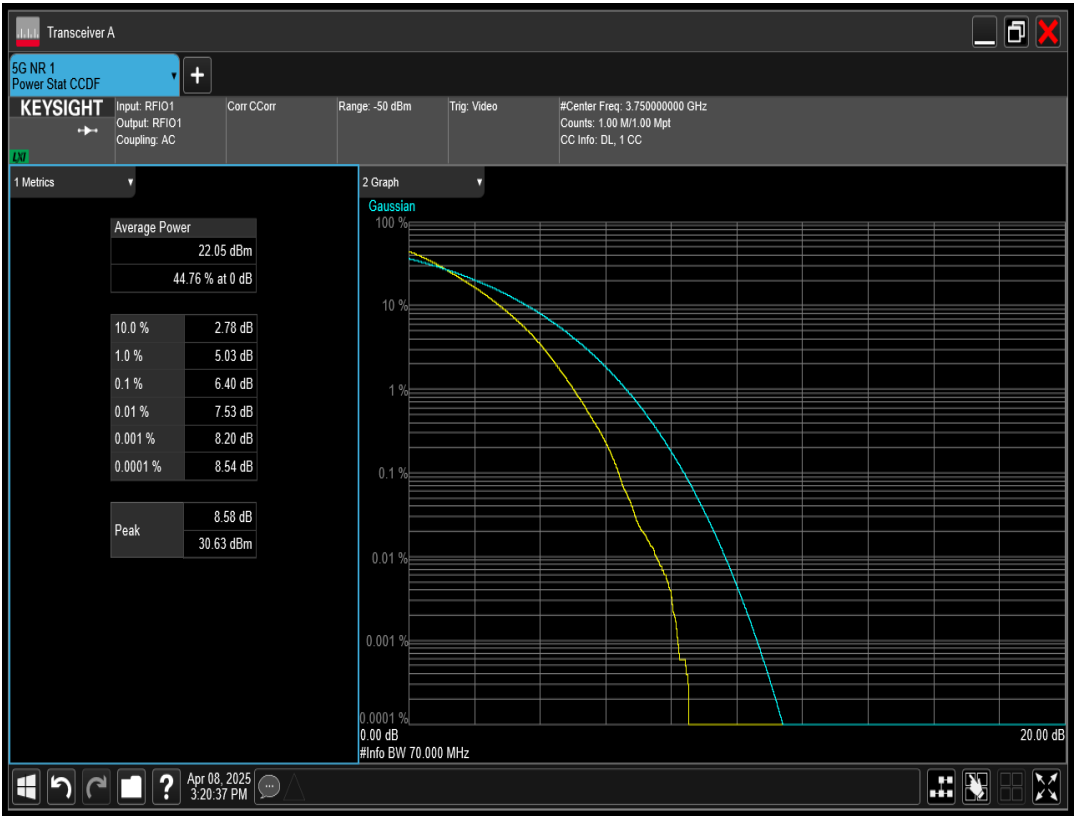


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=70MHz Channel=649000 RB=180@0

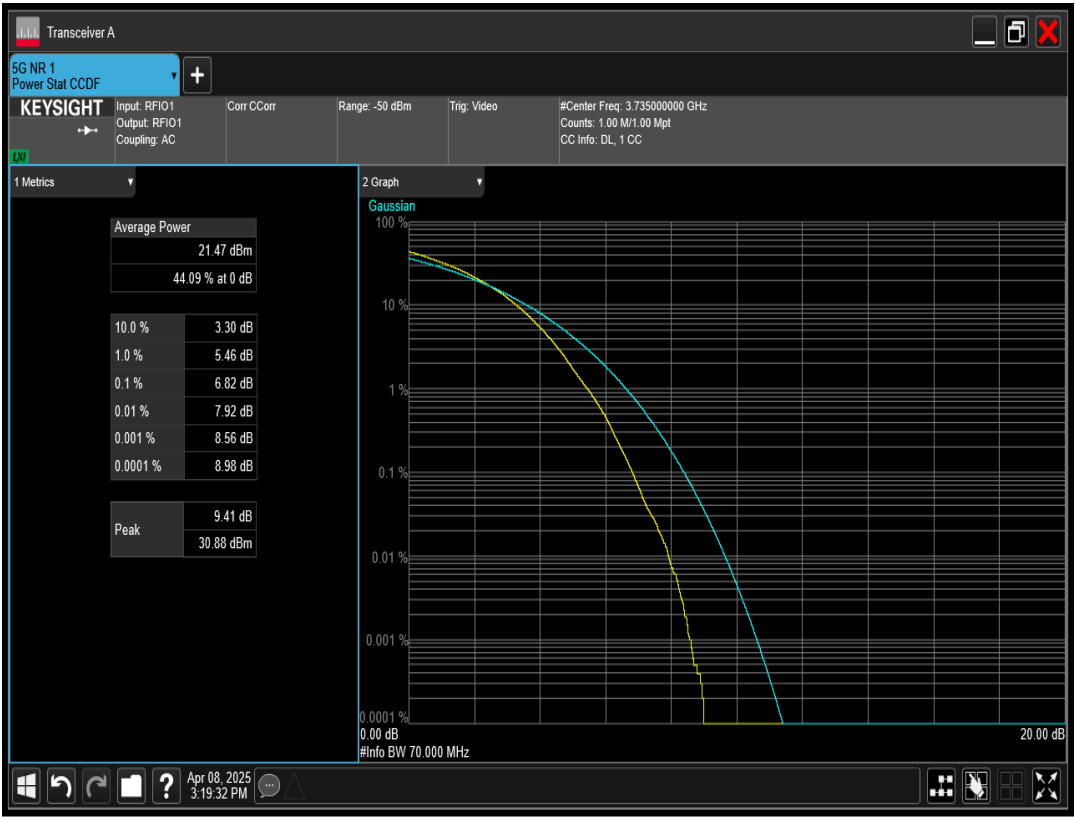


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=80MHz Channel=649334 RB=216@0

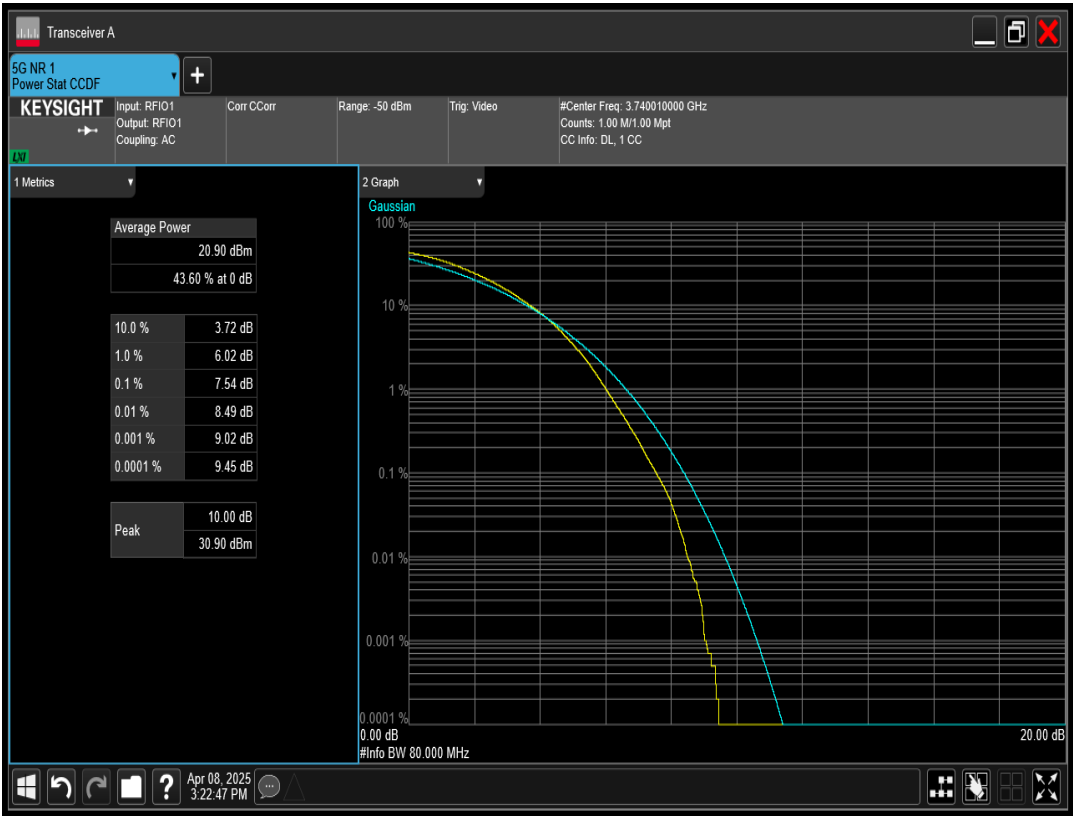


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=70MHz Channel=651000 RB=180@0

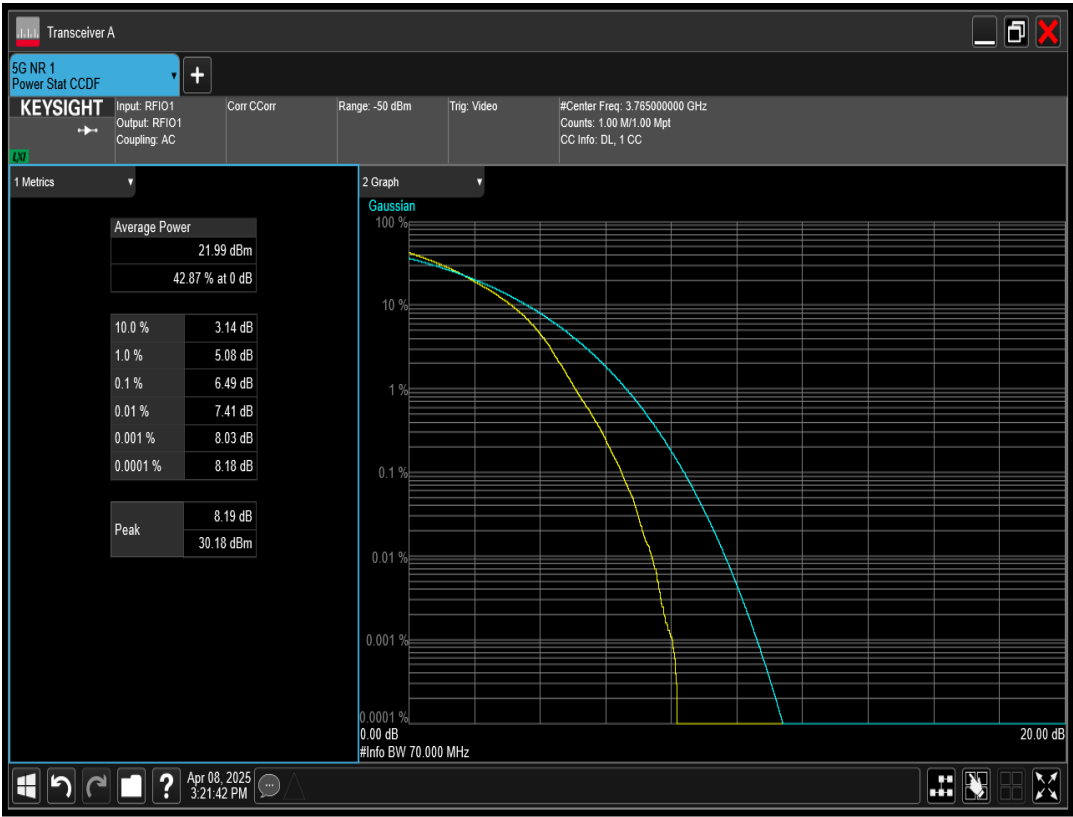


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=80MHz Channel=650000 RB=216@0

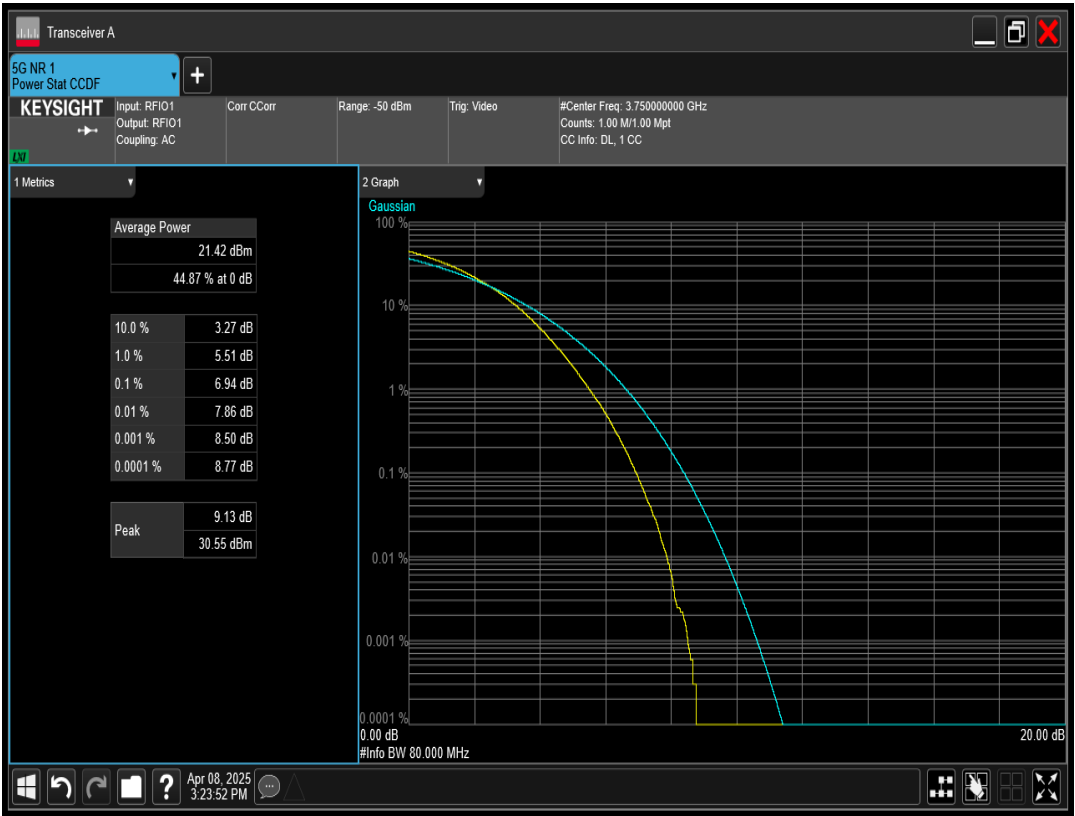


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=90MHz Channel=650000 RB=240@0

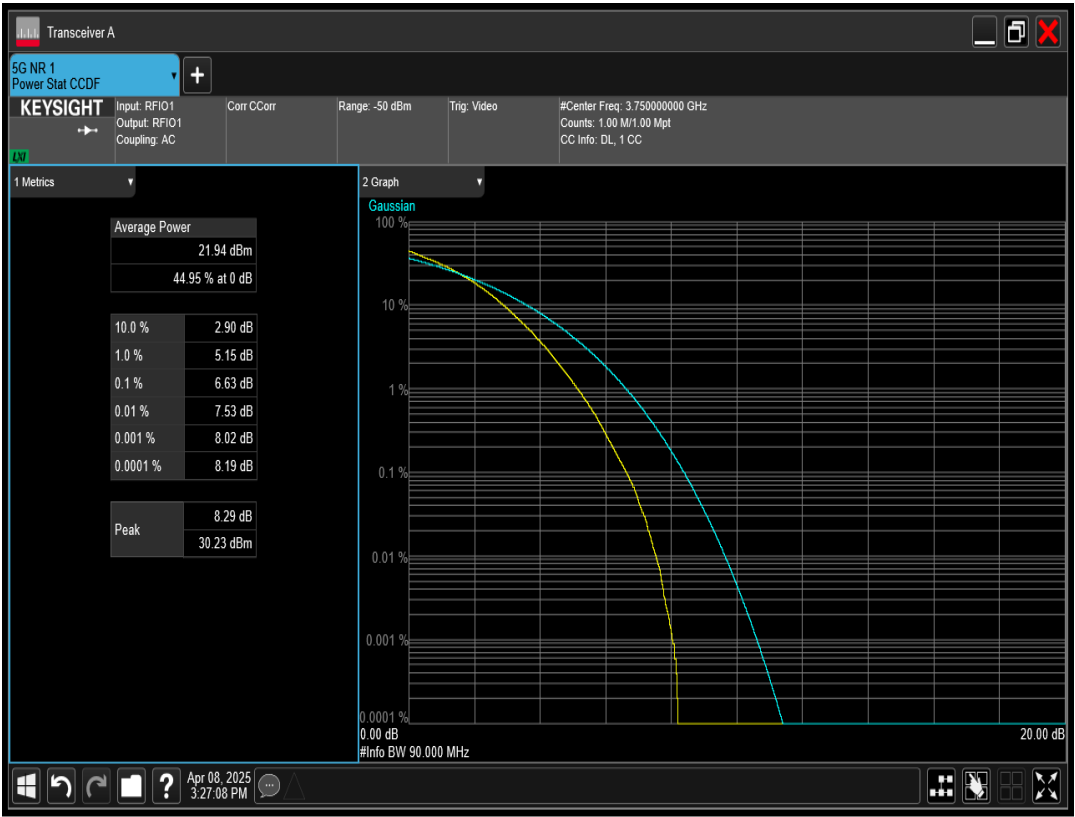


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=90MHz Channel=649668 RB=240@0

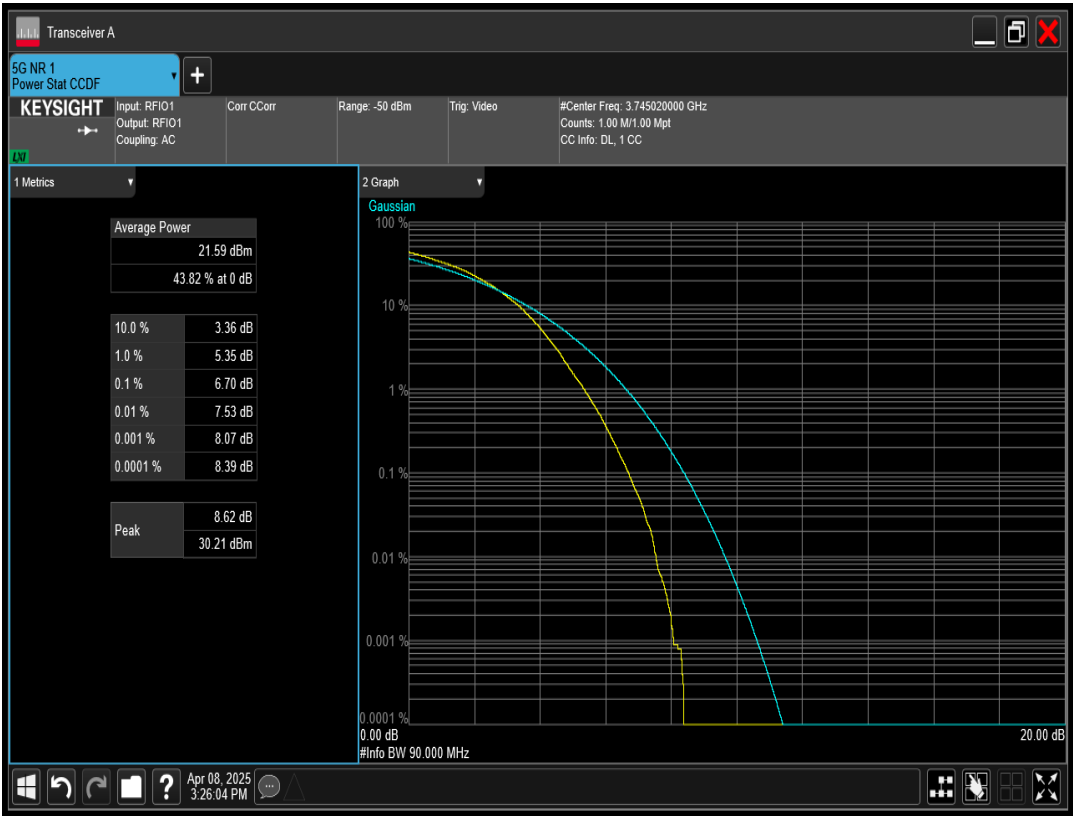


n78(3700-3800) SCS=30kHz DFT_QAM256 BW=80MHz Channel=650666 RB=216@0

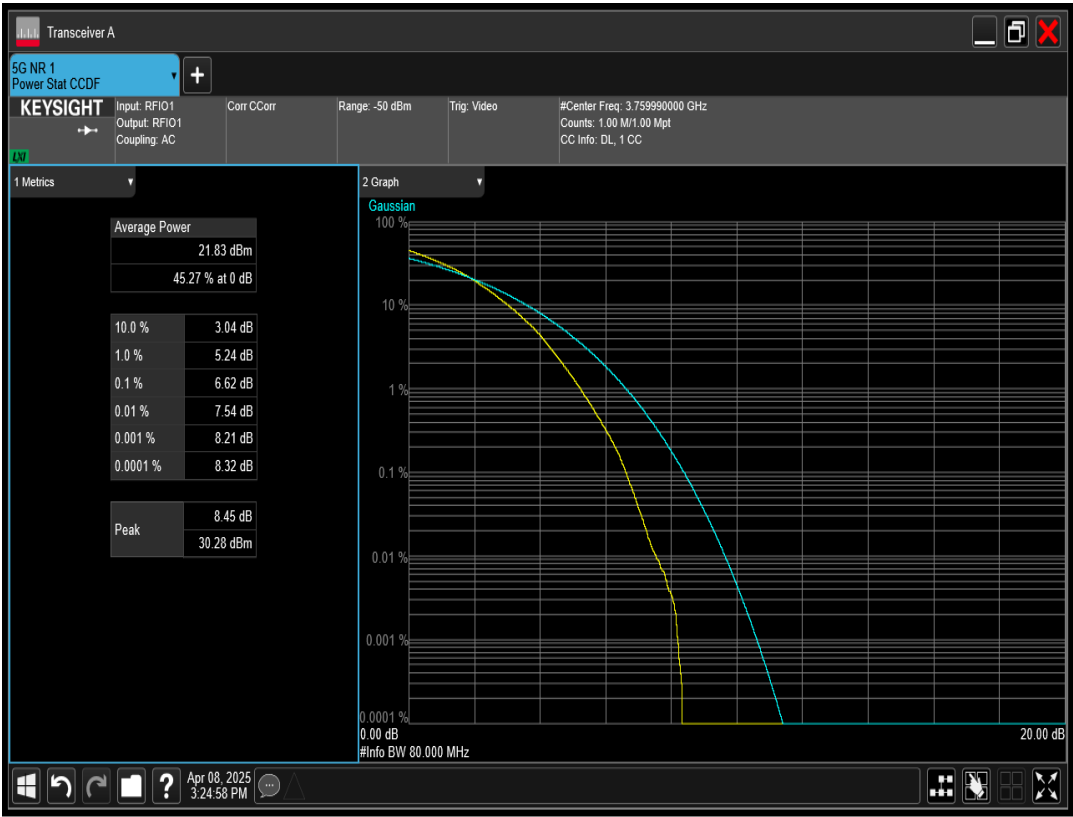


n78(3700-3800) SCS=30kHz DFT_QAM64 BW=10MHz Channel=647000 RB=24@0

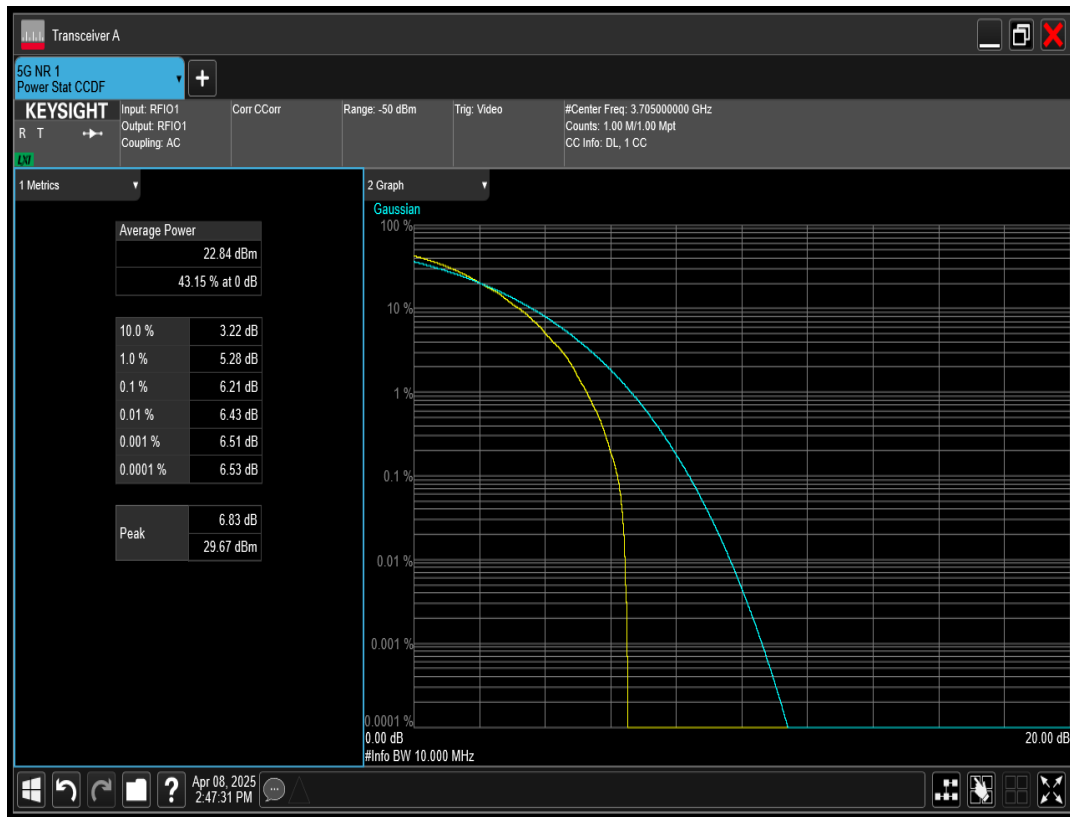


n78(3700-3800) SCS=30kHz DFT_QAM64 BW=100MHz Channel=650000 RB=270@0

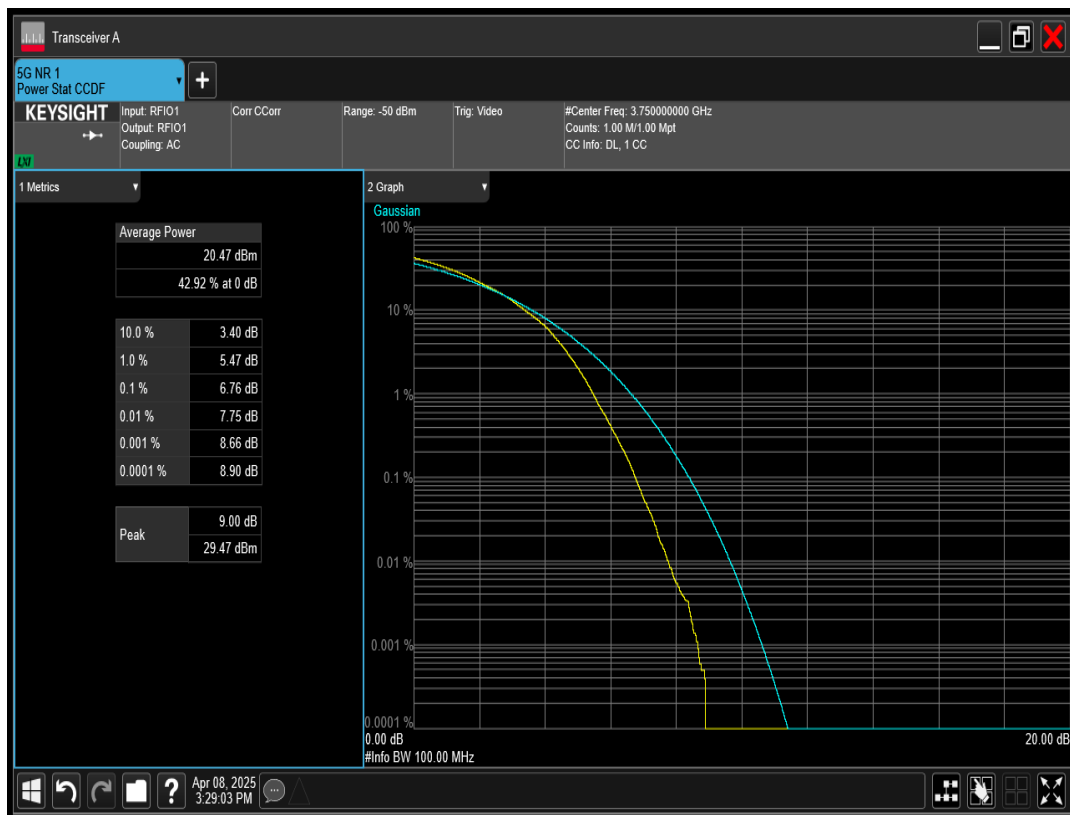

n78(3700-3800) SCS=30kHz DFT_QAM256 BW=90MHz Channel=650332 RB=240@0

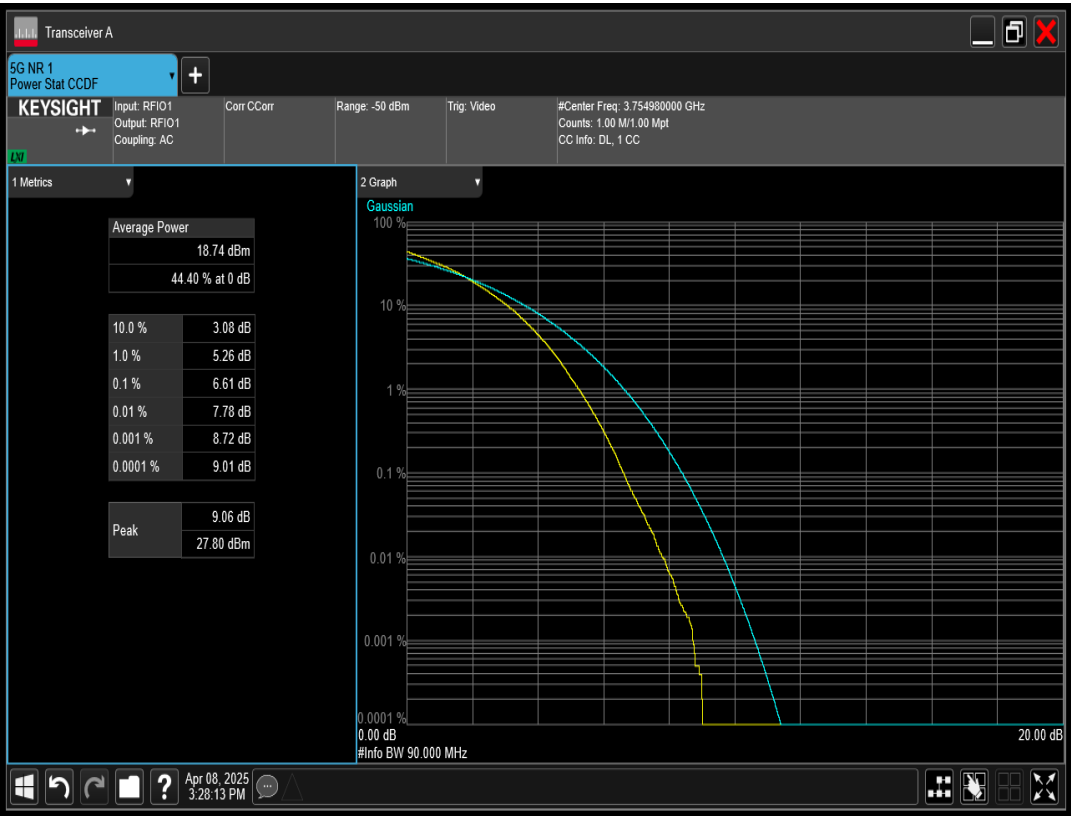

n78(3700-3800) SCS=30kHz DFT_QAM64 BW=10MHz Channel=650000 RB=24@0

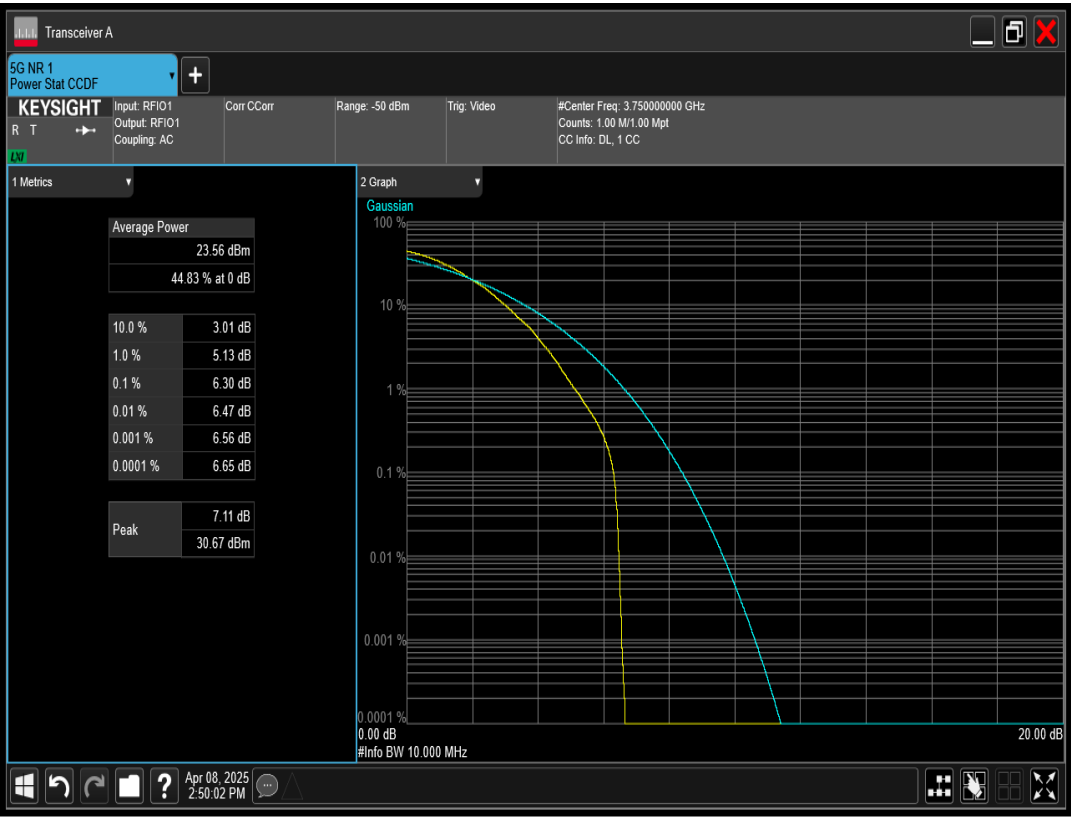

n78(3700-3800) SCS=30kHz DFT_QAM64 BW=15MHz Channel=650000 RB=36@0