


User Manual

In the box

Before use, please make sure that the following items are included. If any are missing, contact your retailer or the ERATO customer service team.

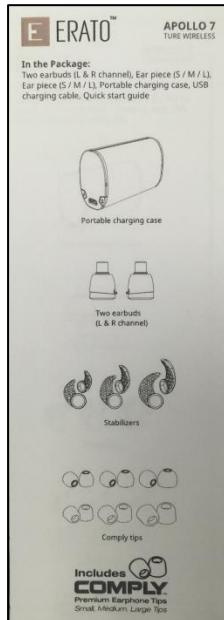


- Apollo 7 True Wireless Earphone (right and left earbuds) x 1
- Aluminum Charging Case x 1
- Silicone ear tips (large/medium/small) x 3 sets of two tips
- Comply T-600 premium foam ear tips (large/medium/small) x 3 sets of two tips
- Silicone earphone stabilizer (large/medium/small) x 3 sets of two stabilizers
- Micro USB 2.0 cable x 1
- User manual x 1

Specifications

Bluetooth version	4.1
Bluetooth profiles	A2DP 1.2, AVRCP 1.4, HFP 1.6, HSP 1.2
Audio codecs	aptX/AAC/SBC
Wireless range (from paired device)	10 meters (30 feet)
Battery capacity	Earphone (50mAh) Charging case (Li-Ion rechargeable, 300mAh)
Driver size	Ø 5.8mm Micro Driver
Sensitivity	100dB/mW
Frequency	20Hz-20KHz
Impedance @ 1kHz	16ohm
MEMS omnidirectional microphone input sensitivity	-42dB (+/- 2dB)
Water proof	Nano coating technology
Dimensions	Earphone: 15.4mm (D) x 22.2mm (L) Charging case: 62.5mm (L) x 40mm (D) x 25.5mm (H)
Weight	Earphone: 4g x 2pcs / Charging case: 52g

ERATO

Getting started

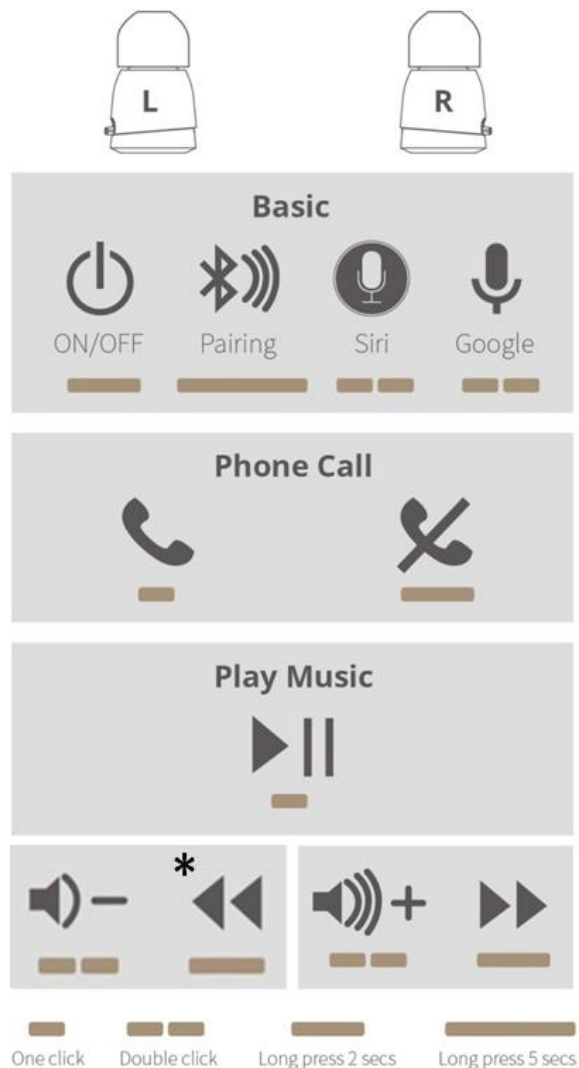

1. Pairing Apollo 7 with a Bluetooth-enabled device for the first time

Insert either earbud in your ear, then press and hold its button. Keep holding the button until you hear "Power On", followed by "Pairing", and release the button. Next, insert the second earbud and press/hold its button until you hear "Power On". Release the button, and you will hear "Headset Connected". This means the two earbuds are in sync.

You can wirelessly connect earbuds with any Bluetooth-enabled device such as a smartphone, notebook, tablet, smart TV, Bluetooth-capable desktop, and more. On your paired device, tap "Apollo 7-L" and "Apollo 7-R" in the Bluetooth device list and you will hear "Phone Connected". Congratulations, you are now in paired mode!

** Although earbuds can be paired individually, we suggest pairing both with the same device so you can answer calls or activate Siri/Google voice assistance

*** You don't need to pair devices each time you use Apollo 7. After pairing, earbuds remember the paired device and connect automatically until paired with a different device

ERATO

2. Turning earbuds on and off

Press and hold the button until you hear “Power On” to turn on each earbud.

Successful connection and sync between the two earbuds is confirmed when you hear “Headset Connected”. Pairing with a device is confirmed when you hear “Phone Connected”.

Hold the button on either earbud for 2 seconds and the two units will turn off.

Both earbuds also auto power off when placed inside the charging case.

3. Activating Siri/Google voice assistance

You can engage Siri or Google voice assistance from earbuds when music is not playing.

Double tap (two short presses) the earbud button to activate/turn off Siri or Google voice assistance.

4. Playing music

When in standby mode, press the button on either earbud once to play music.

Press it again to pause and return to standby.

5. Volume control while playing music

Double tap the right earbud button for volume up, double tap the left earbud button for volume down.

6. Track selection

Press and hold the right earbud button for 2 seconds until you hear a beep to skip to the next song. Press and hold the left earbud button for 2 seconds until you hear a beep to restart the current song. Press and hold the left earbud button again within 3 seconds until you hear a beep to skip to the previous song.

7. Answering an incoming call


Simply press (tap) the button on either earbud to take a phone call. Long press either button for 2 seconds to reject a call.

**** Water proof notes**

The earphone offers protection against water and sweat and can continue working even after becoming wet if the following steps are taken. Please avoid turning on the earbuds immediately after any significant exposure to liquid. Use a hair dryer if available at approx. 40°C (104°F) for 20 minutes or place the earbuds in a cool and dry container for approx. 24 hours before resuming use. Once properly dry, the earphone can be operated normally.

ERATO

Earphone stabilizer


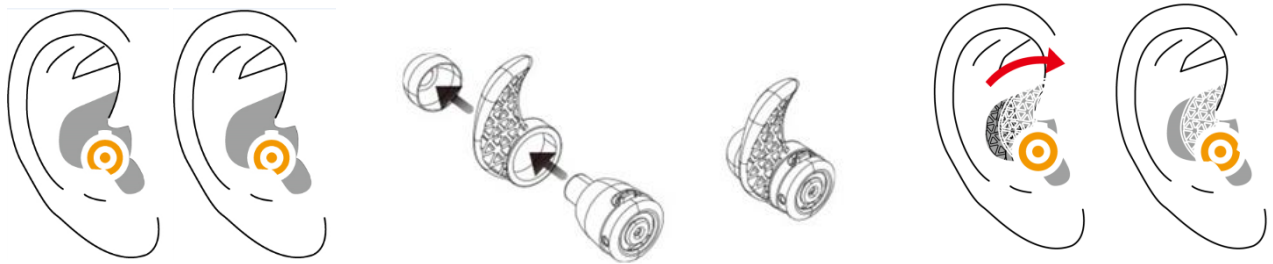


*Due to directional antenna, in order to get better connectivity, please keep the button upright.

Charging the earphone


Charging Case

Patent pending 360° placement:
You can place earbuds in any angle. Make sure they click into place to begin charging.

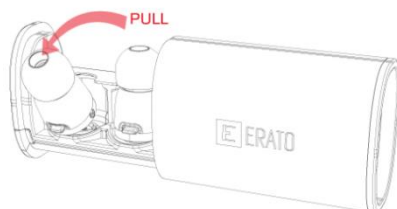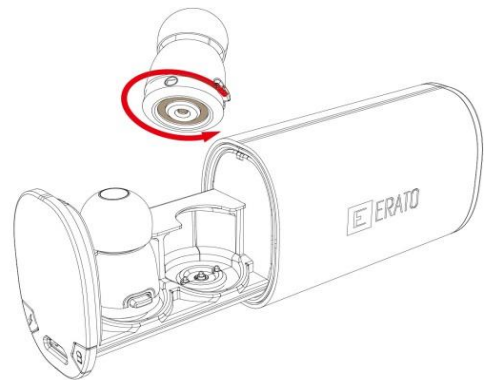

Easy one-pull removal

Earbuds auto turn off after being placed in the charging case.
Charging auto stops when batteries are full.

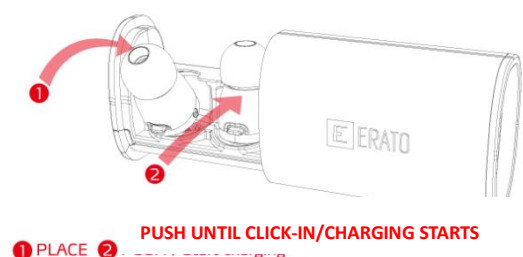

Charging times

Earbuds can be fully charged by placing them in the charging case for 2.5 hours. The charging case itself acts as a portable power bank and can be fully recharged by simply connecting it to a power source using a Micro USB cable.

Operating time

Typical 3 hours for music and 4 hours for talk (tested on iPhone)

****Earphone light indicators and notices**

ERATO

Power on – earbud LED shows blue for 1 second

Power off – earbud LED shows red for 1 second

Standby mode when paired – slowly flickering blue LED

Standby mode without pairing – rapidly flickering blue LED

Pairing mode (connecting to device) – LED alternates red and blue

Pairing successful – LED flashes blue and red 3 times

Incoming call – rapidly flickering blue LED

Inserted in charging case - red LED goes on for 3 seconds

Low battery – constant red LED

****Charging case light indicators and notices**

With both earbuds inserted: charging case LED turns on, then off when earphone is fully charged

With 1 earbud inserted: charging case LED flickers and turns off after single earbud is fully charged

If charging case battery is lower than 30% (with earbuds inserted) the LED flickers as a reminder to connect the charging case to a power source

If earbud battery charge is 5% or less you will hear a “Low Battery” reminder every 30 seconds

Caution

ERATO

1. Use the Micro USB cable to recharge the charging case. The cable is for charging only, not for data transfer
2. Do not leave this product inside a parked vehicle. Direct exposure to heat and sunlight may damage the charging case
3. Do not expose the charging case to high temperatures or humid environments
4. Do not insert metal or other foreign objects into the product, so as to avoid short-circuit and physical damage
5. Do not disassemble, damage, jolt, or burn the product. Do not place any heavy weight on it
6. Do not discard this product with household waste. As it contains batteries, recycle it in accordance with local laws and regulations
7. If not used long term, recharge the earphone and charging case every three months to maintain battery lifespan and prevent premature performance degradation
8. Do not leave the charging case fully out of power for prolonged periods (LED indicator remains dim) to prevent battery damage. Make sure the charging case is at least 30% charged at all times
9. Output current varies based on input charge



Federal Communications Commission (FCC) Statement

15.21

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

15.105(b)

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Industry Canada license-exempt RSS standard(s). This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC RF Radiation Exposure Statement:

"For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with an accessory that contains no metal and that positions the device a minimum of 0mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines."

Industry Canada (IC) Statement

Canada, Industry Canada (IC)

This Class B digital apparatus complies with Canadian ICES-003 and RSS-247.

ERATO

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

IC RF Radiation Exposure Statement:

For body worn operation, this device has been tested and meets RF exposure guidelines when used with an accessory that contains no metal and that positions the device a minimum of 0mm from the body. Use of other accessories may not ensure compliance with RF exposure guidelines.

Cet appareil numérique de classe B est conforme à la norme NMB-003 et RSS-247

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Déclaration de l'exposition aux radiations RF:

Pour le fonctionnement du corps, cet appareil a été testé et répond aux directives d'exposition RF lorsqu'il est utilisé avec un accessoire qui ne contient pas de métal et qui place le combiné d'un minimum de 0mm du corps. Utilisation d'autres accessoires peut ne pas assurer le respect des directives d'exposition RF.

NCC Statement

根據 NCC 低功率電波輻射性電機管理辦法 規定:	
第十二條	經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。
第十四條	低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。 低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

Este equipamento opera em caráter secundário, isto é, não tem direito a proteção contra interferência prejudicial, mesmo de estações do mesmo tipo, e não pode causar interferência a sistemas operando em caráter primário.

FCC ID : 2AHD9-ANAP070000

IC : 21132-ANAP070000