



TEST REPORT

Product Name: 32 INCH DLED TV
FCC ID: 2AHU2JTV3225DCS
Trademark: JENSEN
Model Number: JTV3225DCS
Prepared For: ASA Electronics Shenzhen Limited
Address: Room 503, 5/F., Unit A, Skyworth Building, Gaoxin Avenue.1.S., Nanshan District, Shen Zhen 518057, China
Manufacturer: ASA Electronics Shenzhen Limited
Address: Room 503, 5/F., Unit A, Skyworth Building, Gaoxin Avenue.1.S., Nanshan District, Shen Zhen 518057, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jun. 10, 2025
Sample tested Date: Jun. 10, 2025 to Jul. 04, 2025
Issue Date: Jul. 04, 2025
Report No.: CTB25061003001RF01
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2020
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu

Bin Mei

Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	40
8.1 Block Diagram Of Test Setup	40
8.2 Limit	40
8.3 Test procedure	40
8.4 Test Result	41
9. CONDUCTED OUTPUT POWER	57
9.1 Block Diagram Of Test Setup	57
9.2 Limit	57
9.3 Test procedure	57
9.4 Test Result	57
10. 6DB OCCUPIED BANDWIDTH	58
10.1 Block Diagram Of Test Setup	58
10.2 Limit	58
10.3 Test procedure	58

10.4	Test Result.....	59
11.	POWER SPECTRAL DENSITY	69
11.1	Block Diagram Of Test Setup	69
11.2	Limit.....	69
11.3	Test procedure.....	69
11.4	Test Result.....	70
12.	ANTENNA REQUIREMENT	79
13.	EUT TEST SETUP PHOTOGRAPHS	80
(NOTE: N/A MEANS NOT APPLICABLE)		



1. VERSION

Report No.	Issue Date	Description	Approved
CTB25061003001RF01	Jul. 04, 2025	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2020	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2020	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2020/ KDB 558074 D05v02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2020.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m camber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m camber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(18GHz-40GHz)	U=±3.4dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	JTV3225DCS
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 16.764dBm
Type of Modulation:	WiFi (2.4G): DSSS, OFDM
Antenna installation:	WiFi (2.4G): Internal antenna
Antenna Gain:	WiFi (2.4G): Ant1: 0.62dBi Ant2: 0.62dBi
Ratings:	DC 12V 3.75A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Laptop	DELL	Vostro 5490	N/A	AE
2.	Keyboard	DELL	KB216t	N/A	AE
3.	Mouse	DELL	MS116c	N/A	AE
4.	PC	DELL	Inspiron 3670	N/A	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	/	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 0.62dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 3.63dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 0.62dBi

NOTE: Duty cycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	12V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483. 5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024/10/31	2025/10/30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22

18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1


Continuous disturbance							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/5/22	2026/5/21
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/5/22	2026/5/21
4	Coaxial cable	ZDECL	Z302S	18091904	/	2025/5/22	2026/5/21
5	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/18	2026/6/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2024/10/26	2025/10/25
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2025/5/24	2026/5/23
9	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

Radiated emission(No.1 Chamber)							
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/23	2027/6/22
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2

5	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/5/23	2026/5/22
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
9	Coaxial cable	ETS	RFC-SNS-100-NMS-80	/	/	2025/5/24	2026/5/23
10	Coaxial cable	ETS	RFC-SN-100-NMS-20	/	/	2025/5/24	2026/5/23
11	Coaxial cable	ETS	RFC-SNS-100-SMS-20	/	/	2025/5/24	2026/5/23
12	Coaxial cable	ETS	RFC-NNS-100-NMS-300	/	/	2025/5/24	2026/5/23
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/	/
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

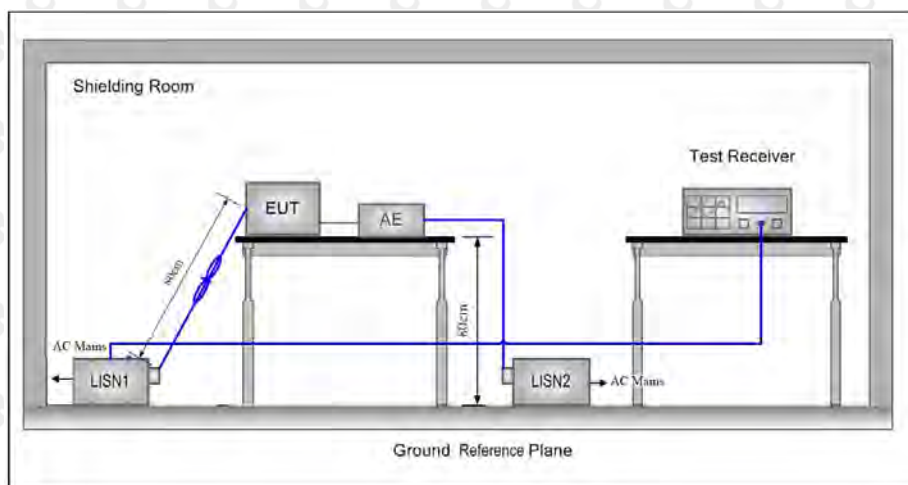

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.


- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.

6.4 Test Result

Test Specification: Line

AC 120V 60Hz

the worst: 802.11b (low channel)

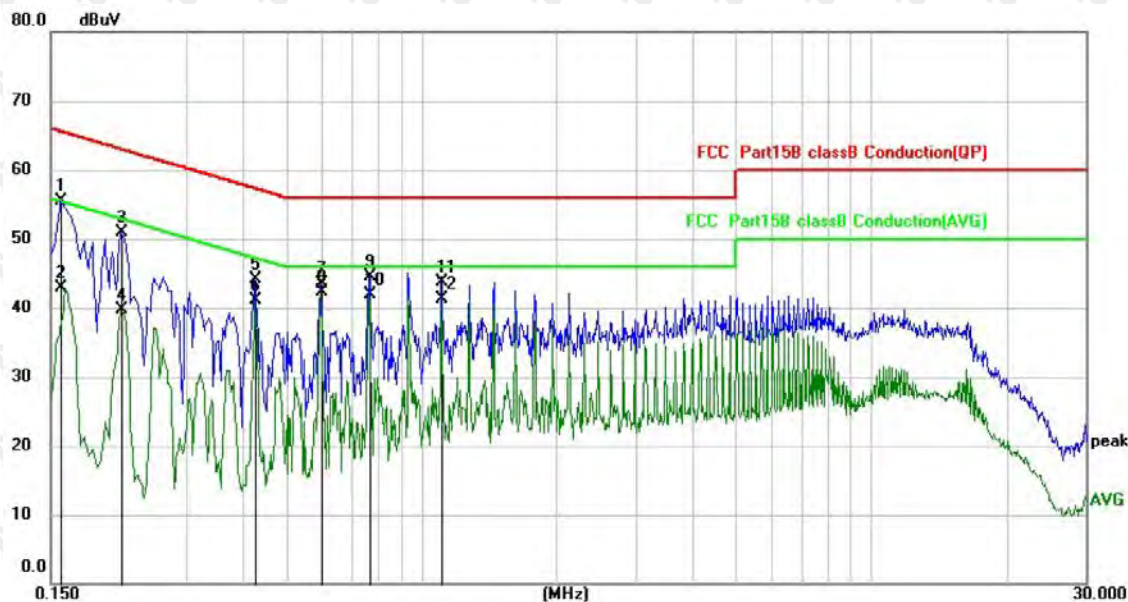


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1580	45.54	10.03	55.57	65.57	-10.00	QP
2		0.1580	32.83	10.03	42.86	55.57	-12.71	AVG
3		0.2140	40.94	10.03	50.97	63.05	-12.08	QP
4		0.2140	29.70	10.03	39.73	53.05	-13.32	AVG
5		0.4260	34.02	10.03	44.05	57.33	-13.28	QP
6		0.4260	31.15	10.03	41.18	47.33	-6.15	AVG
7		0.5980	33.55	10.04	43.59	56.00	-12.41	QP
8	*	0.5980	32.18	10.04	42.22	46.00	-3.78	AVG
9		0.7660	34.40	10.05	44.45	56.00	-11.55	QP
10		0.7660	31.94	10.05	41.99	46.00	-4.01	AVG
11		1.1100	33.59	10.05	43.64	56.00	-12.36	QP
12		1.1100	31.20	10.05	41.25	46.00	-4.75	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz
the worst: 802.11b (low channel)

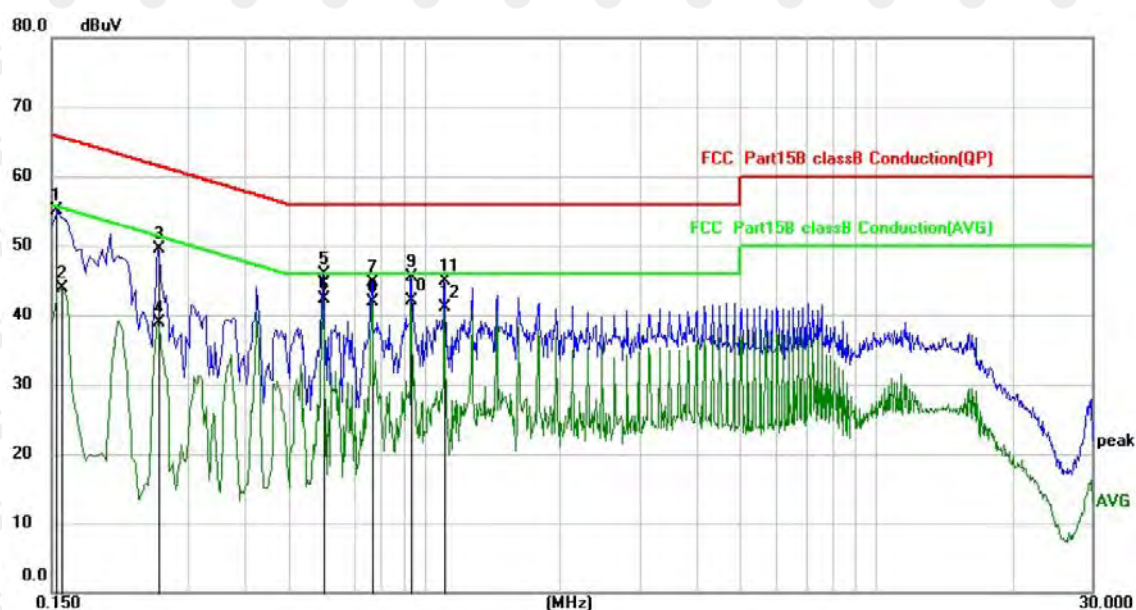

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1539	44.98	10.03	55.01	65.79	-10.78	QP
2		0.1580	33.91	10.03	43.94	55.57	-11.63	AVG
3		0.2580	39.55	10.03	49.58	61.50	-11.92	QP
4		0.2580	28.93	10.03	38.96	51.50	-12.54	AVG
5		0.5980	35.79	10.04	45.83	56.00	-10.17	QP
6	*	0.5980	32.32	10.04	42.36	46.00	-3.64	AVG
7		0.7660	34.59	10.05	44.64	56.00	-11.36	QP
8		0.7660	31.91	10.05	41.96	46.00	-4.04	AVG
9		0.9380	35.43	10.05	45.48	56.00	-10.52	QP
10		0.9380	32.08	10.05	42.13	46.00	-3.87	AVG
11		1.1100	34.80	10.05	44.85	56.00	-11.15	QP
12		1.1100	31.01	10.05	41.06	46.00	-4.94	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

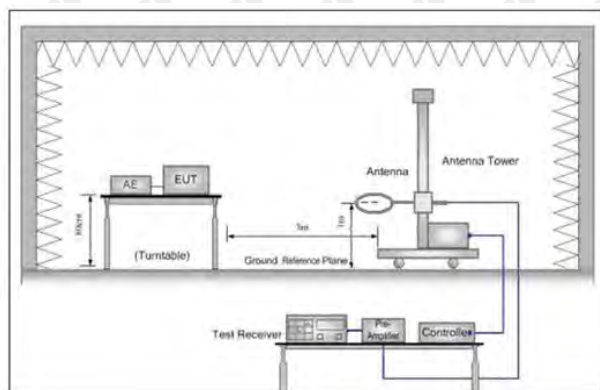


Figure 1. Below 30MHz

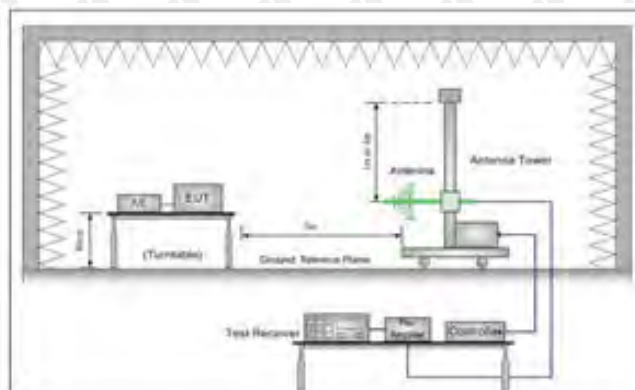


Figure 2. 30MHz to 1GHz

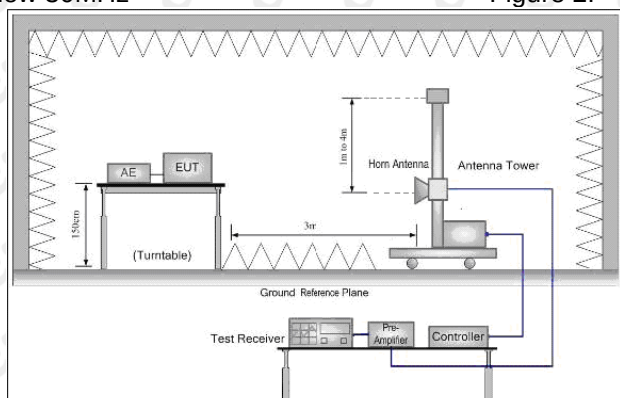


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:

Antenna polarity: H



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		147.9214	39.19	-3.41	35.78	43.50	-7.72	QP
2		241.6761	41.66	-4.22	37.44	46.00	-8.56	QP
3	*	306.2162	43.40	-3.09	40.31	46.00	-5.69	QP
4		531.9633	37.40	2.20	39.60	46.00	-6.40	QP
5		762.0384	32.04	7.66	39.70	46.00	-6.30	QP
6		982.6200	34.27	8.83	43.10	54.00	-10.90	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	!	43.7351	43.36	-7.28	36.08	40.00	-3.92	QP
2	*	150.5377	42.62	-2.99	39.63	43.50	-3.87	QP
3		223.3414	43.67	-4.59	39.08	46.00	-6.92	QP
4		408.9459	38.38	-0.85	37.53	46.00	-8.47	QP
5	!	531.9634	39.02	2.20	41.22	46.00	-4.78	QP
6	!	908.0731	31.54	9.08	40.62	46.00	-5.38	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included. Test Mode: 802.11b low channel (the worst)
2. All modes have been tested, and the test results show that b-mode data is the worst, only b-mode test chart is put. Test Mode: 802.11b low channel (the worst)
3. After pre-scanning three directions, the report recorded the worst case Test Mode: 802.11b low channel (the worst)

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.49	-3.64	62.85	74	-11.15	peak
4824	48.58	-3.64	44.94	54	-9.06	AVG
7236	57.53	-0.95	56.58	74	-17.42	peak
7236	44.73	-0.95	43.78	54	-10.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.96	-3.64	62.32	74	-11.68	peak
4824	48.65	-3.64	45.01	54	-8.99	AVG
7236	58.83	-0.95	57.88	74	-16.12	peak
7236	45.50	-0.95	44.55	54	-9.45	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	65.75	-3.51	62.24	74	-11.76	peak
4874	50.48	-3.51	46.97	54	-7.03	AVG
7311	58.64	-0.82	57.82	74	-16.18	peak
7311	45.18	-0.82	44.36	54	-9.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	63.69	-3.51	60.18	74	-13.82	peak
4874	49.24	-3.51	45.73	54	-8.27	AVG
7311	58.69	-0.82	57.87	74	-16.13	peak
7311	42.46	-0.82	41.64	54	-12.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.13	-3.43	60.70	74	-13.30	peak
4924	46.18	-3.43	42.75	54	-11.25	AVG
7386	57.87	-0.75	57.12	74	-16.88	peak
7386	44.11	-0.75	43.36	54	-10.64	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.97	-3.43	60.54	74	-13.46	peak
4924	46.87	-3.43	43.44	54	-10.56	AVG
7386	57.18	-0.75	56.43	74	-17.57	peak
7386	43.95	-0.75	43.20	54	-10.80	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.80	-3.64	62.16	74	-11.84	peak
4824	48.36	-3.64	44.72	54	-9.28	AVG
7236	58.03	-0.95	57.08	74	-16.92	peak
7236	46.19	-0.95	45.24	54	-8.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.03	-3.64	61.39	74	-12.61	peak
4824	48.58	-3.64	44.94	54	-9.06	AVG
7236	58.18	-0.95	57.23	74	-16.77	peak
7236	43.92	-0.95	42.97	54	-11.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	64.45	-3.51	60.94	74	-13.06	peak
4874	50.46	-3.51	46.95	54	-7.05	AVG
7311	58.44	-0.82	57.62	74	-16.38	peak
7311	43.49	-0.82	42.67	54	-11.33	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	64.77	-3.51	61.26	74	-12.74	peak
4874	47.49	-3.51	43.98	54	-10.02	AVG
7311	60.23	-0.82	59.41	74	-14.59	peak
7311	44.83	-0.82	44.01	54	-9.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.38	-3.43	60.95	74	-13.05	peak
4924	47.79	-3.43	44.36	54	-9.64	AVG
7386	59.58	-0.75	58.83	74	-15.17	peak
7386	43.67	-0.75	42.92	54	-11.08	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.27	-3.43	61.84	74	-12.16	peak
4924	46.49	-3.43	43.06	54	-10.94	AVG
7386	56.83	-0.75	56.08	74	-17.92	peak
7386	41.82	-0.75	41.07	54	-12.93	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.83	-3.64	61.19	74	-12.81	peak
4824	50.78	-3.64	47.14	54	-6.86	AVG
7236	57.38	-0.95	56.43	74	-17.57	peak
7236	44.22	-0.95	43.27	54	-10.73	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.75	-3.64	62.11	74	-11.89	peak
4824	47.27	-3.64	43.63	54	-10.37	AVG
7236	56.09	-0.95	55.14	74	-18.86	peak
7236	44.57	-0.95	43.62	54	-10.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	65.75	-3.51	62.24	74	-11.76	peak
4874	50.53	-3.51	47.02	54	-6.98	AVG
7311	59.46	-0.82	58.64	74	-15.36	peak
7311	43.01	-0.82	42.19	54	-11.81	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	64.33	-3.51	60.82	74	-13.18	peak
4874	47.79	-3.51	44.28	54	-9.72	AVG
7311	57.77	-0.82	56.95	74	-17.05	peak
7311	42.75	-0.82	41.93	54	-12.07	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.64	-3.43	60.21	74	-13.79	peak
4924	48.70	-3.43	45.27	54	-8.73	AVG
7386	57.18	-0.75	56.43	74	-17.57	peak
7386	42.49	-0.75	41.74	54	-12.26	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.68	-3.43	60.25	74	-13.75	peak
4924	47.12	-3.43	43.69	54	-10.31	AVG
7386	56.61	-0.75	55.86	74	-18.14	peak
7386	42.74	-0.75	41.99	54	-12.01	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.04	-3.63	61.41	74	-12.59	peak
4844	49.65	-3.63	46.02	54	-7.98	AVG
7266	58.09	-0.94	57.15	74	-16.85	peak
7266	46.82	-0.94	45.88	54	-8.12	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	64.83	-3.63	61.20	74	-12.80	peak
4844	49.08	-3.63	45.45	54	-8.55	AVG
7266	58.04	-0.94	57.10	74	-16.90	peak
7266	44.59	-0.94	43.65	54	-10.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	65.27	-3.51	61.76	74	-12.24	peak
4874	49.06	-3.51	45.55	54	-8.45	AVG
7311	60.87	-0.82	60.05	74	-13.95	peak
7311	44.98	-0.82	44.16	54	-9.84	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.33	-3.51	58.82	74	-15.18	peak
4874	46.51	-3.51	43.00	54	-11.00	AVG
7311	56.65	-0.82	55.83	74	-18.17	peak
7311	43.38	-0.82	42.56	54	-11.44	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	62.87	-3.43	59.44	74	-14.56	peak
4904	47.15	-3.43	43.72	54	-10.28	AVG
7356	58.25	-0.75	57.50	74	-16.50	peak
7356	42.02	-0.75	41.27	54	-12.73	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4904	63.47	-3.43	60.04	74	-13.96	peak
4904	45.69	-3.43	42.26	54	-11.74	AVG
7356	57.79	-0.75	57.04	74	-16.96	peak
7356	43.26	-0.75	42.51	54	-11.49	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.17	-5.81	51.36	74	-22.64	peak
2390	/	-5.81	/	54	/	AVG
2399	64.65	-5.84	58.81	74	-15.19	peak
2399	48.96	-5.84	43.12	54	-10.88	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.51	-5.81	51.70	74	-22.30	peak
2390	/	-5.81	/	54	/	AVG
2399	62.30	-5.84	56.46	74	-17.54	peak
2399	47.61	-5.84	41.77	54	-12.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.52	-5.65	50.87	74	-23.13	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.16	-5.65	50.51	74	-23.49	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.94	-5.81	53.13	74	-20.87	peak
2390	/	-5.81	/	54	/	AVG
2399	62.16	-5.84	56.32	74	-17.68	peak
2399	47.52	-5.84	41.68	54	-12.32	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.64	-5.81	50.83	74	-23.17	peak
2390	/	-5.81	/	54	/	AVG
2399	61.86	-5.84	56.02	74	-17.98	peak
2399	45.99	-5.84	40.15	54	-13.85	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.61	-5.65	50.96	74	-23.04	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.50	-5.65	50.85	74	-23.15	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.38	-5.81	50.57	74	-23.43	peak
2390	/	-5.81	/	54	/	AVG
2399	62.09	-5.84	56.25	74	-17.75	peak
2399	47.01	-5.84	41.17	54	-12.83	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.32	-5.81	51.51	74	-22.49	peak
2390	/	-5.81	/	54	/	AVG
2399	60.06	-5.84	54.22	74	-19.78	peak
2399	47.37	-5.84	41.53	54	-12.47	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.90	-5.65	50.25	74	-23.75	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.66	-5.65	50.01	74	-23.99	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.32	-5.81	52.51	74	-21.49	peak
2390	/	-5.81	/	54	/	AVG
2399	63.90	-5.84	58.06	74	-15.94	peak
2399	47.34	-5.84	41.50	54	-12.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.94	-5.81	53.13	74	-20.87	peak
2390	/	-5.81	/	54	/	AVG
2399	60.41	-5.84	54.57	74	-19.43	peak
2399	47.00	-5.84	41.16	54	-12.84	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.20	-5.65	52.55	74	-21.45	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.23	-5.65	49.58	74	-24.42	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

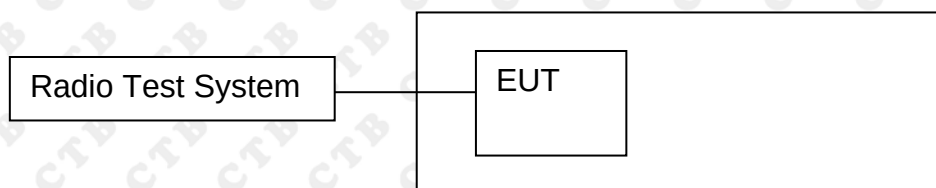

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold

8.4 Test Result


ANT1:

BAND EDGE Graphs



802.11b/LCH

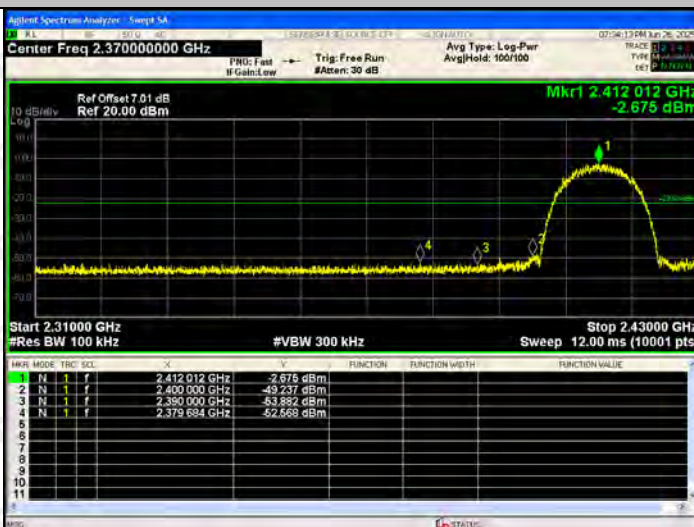



802.11b/HCH

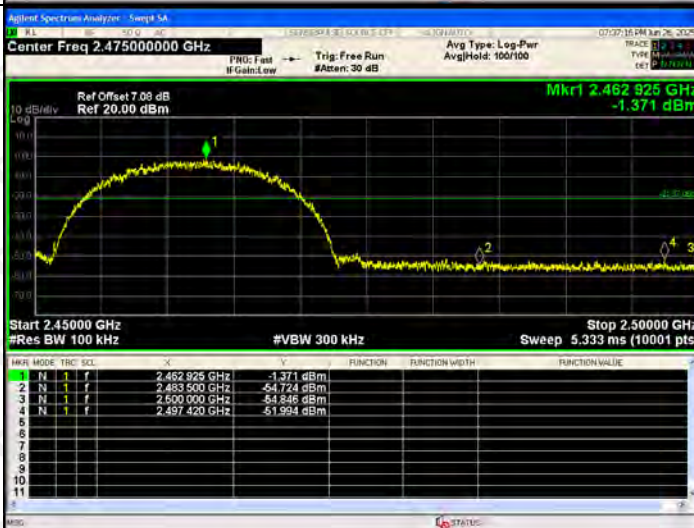

802.11g/LCH

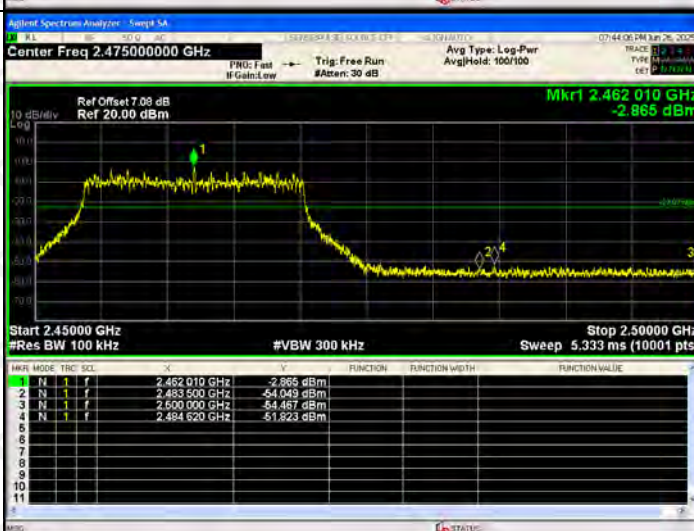


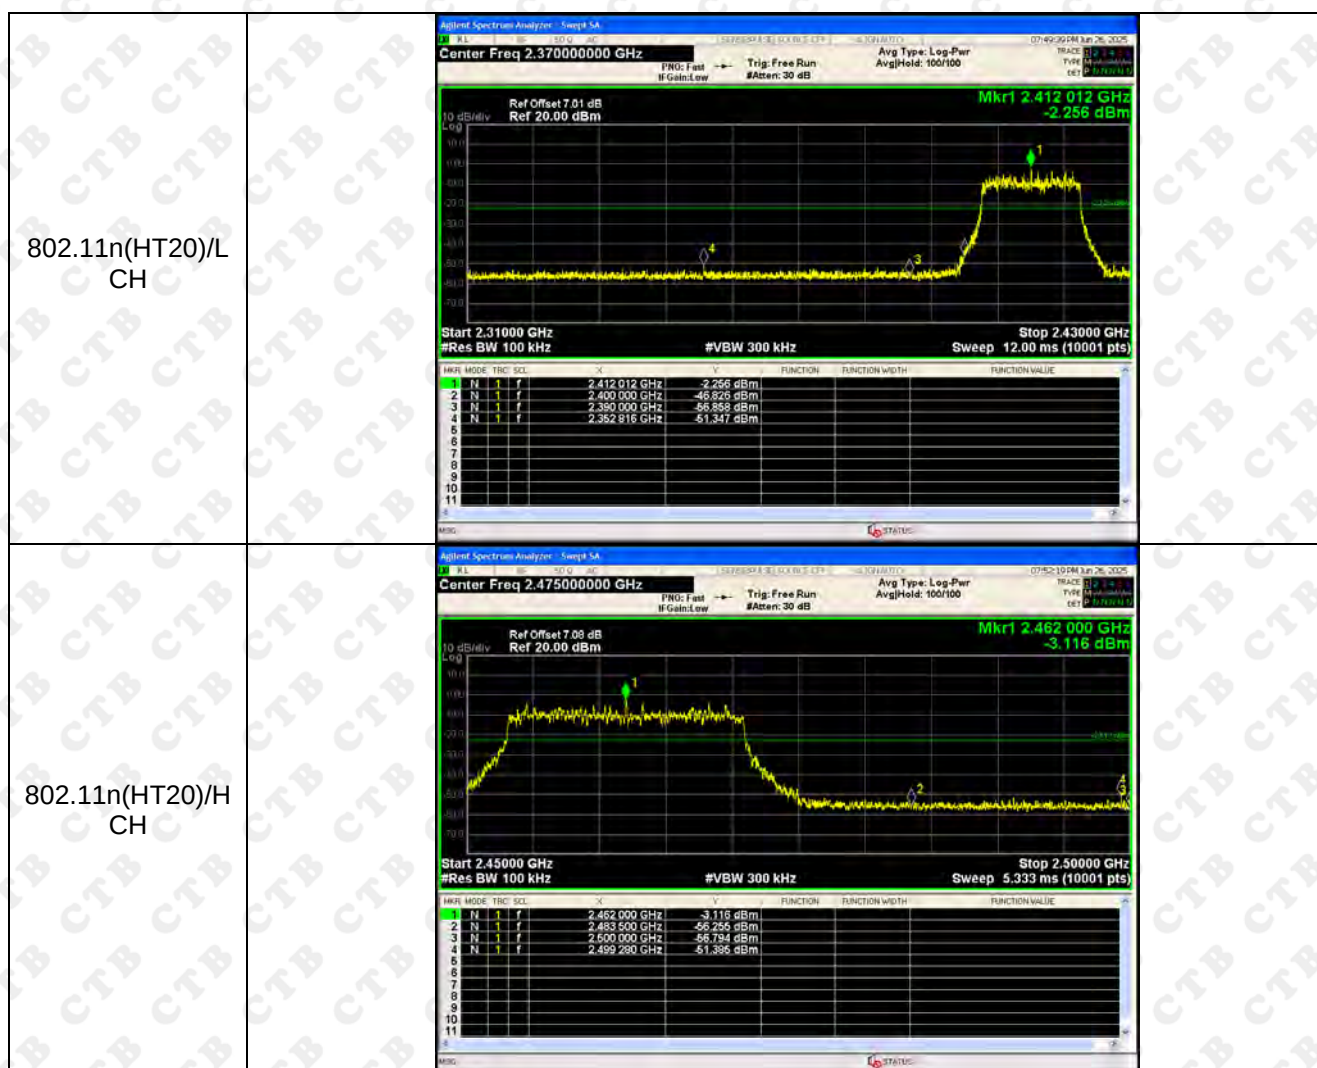

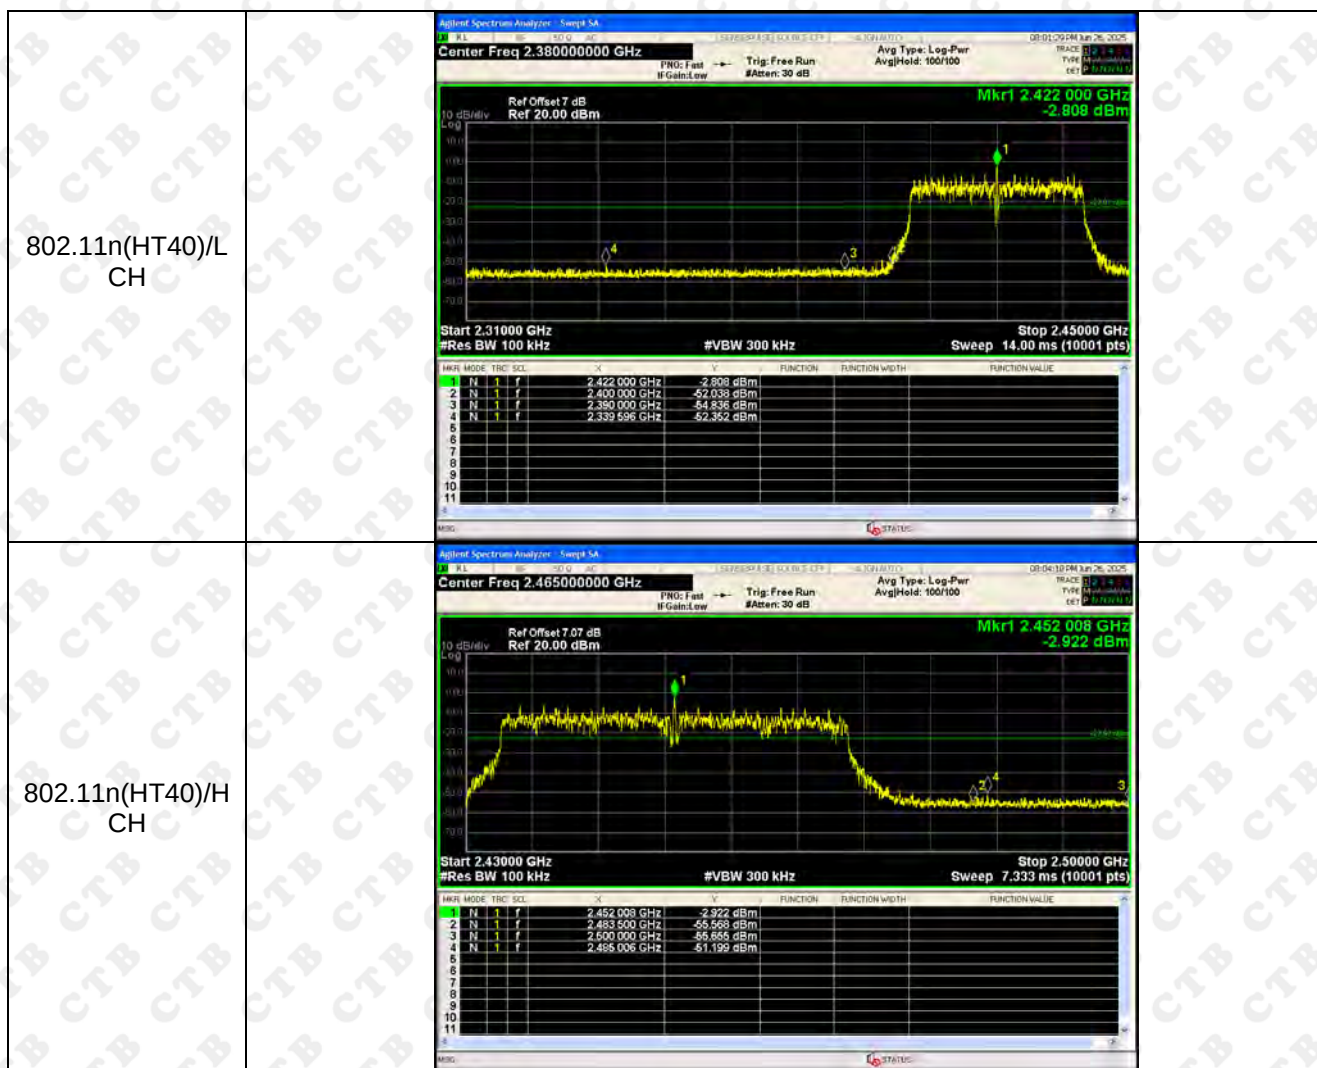


RF Conducted Spurious Emissions Graphs


802.11b/LCH

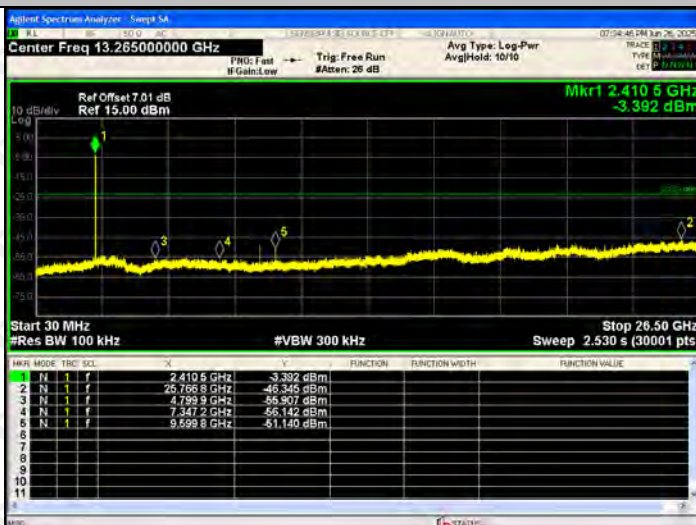

802.11b/MCH

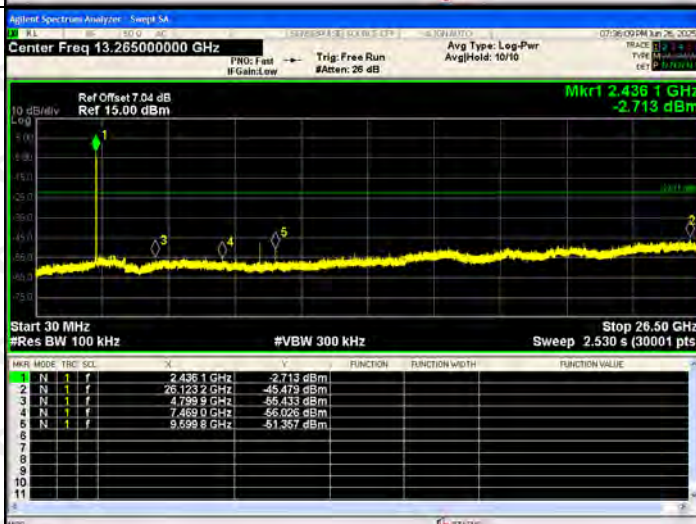


802.11b/HCH

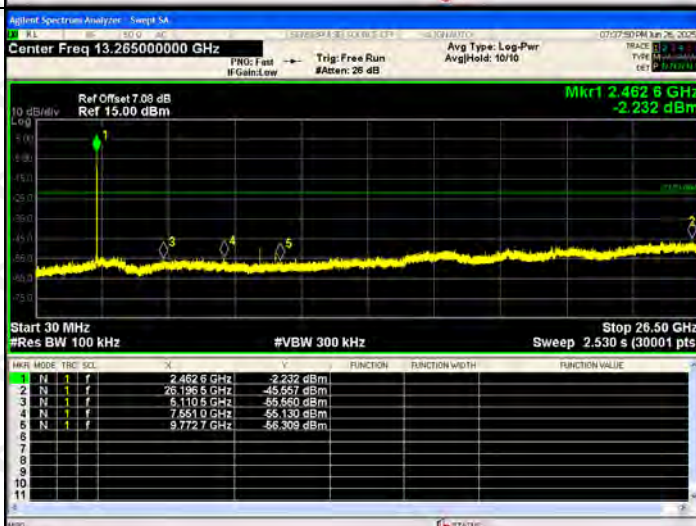

RF Conducted Spurious Emissions Graphs


802.11g/LCH

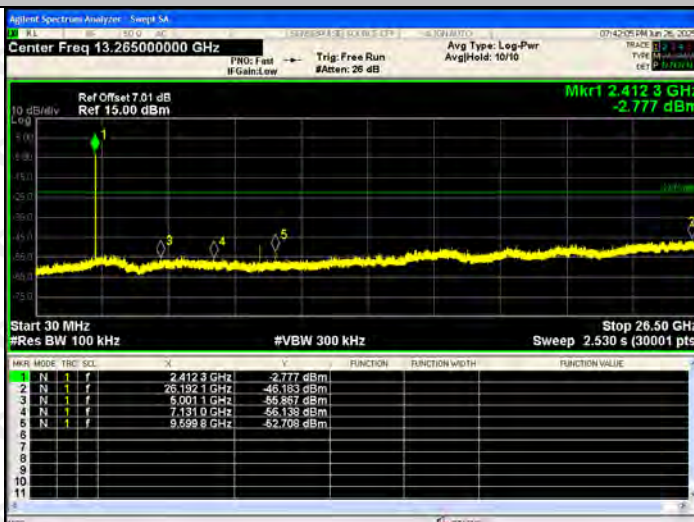

802.11g/MCH




802.11g/HCH

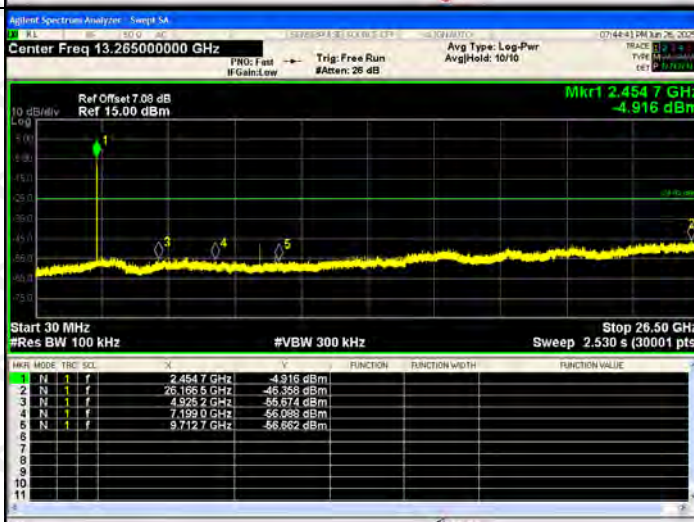


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH



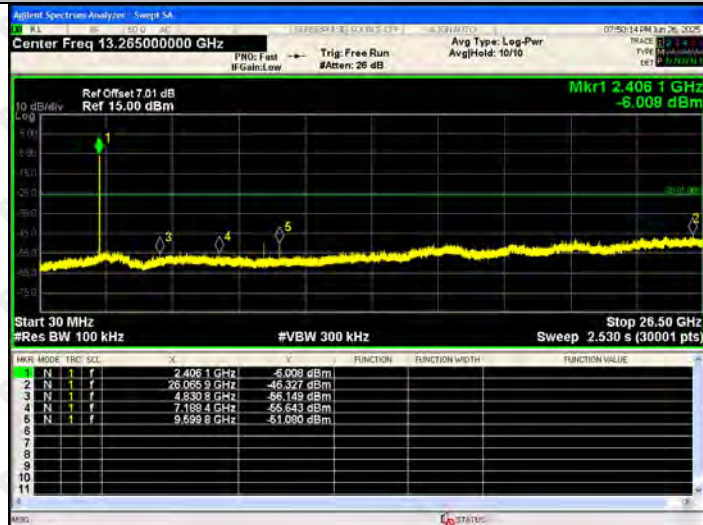


802.11 n(HT20)/MCH

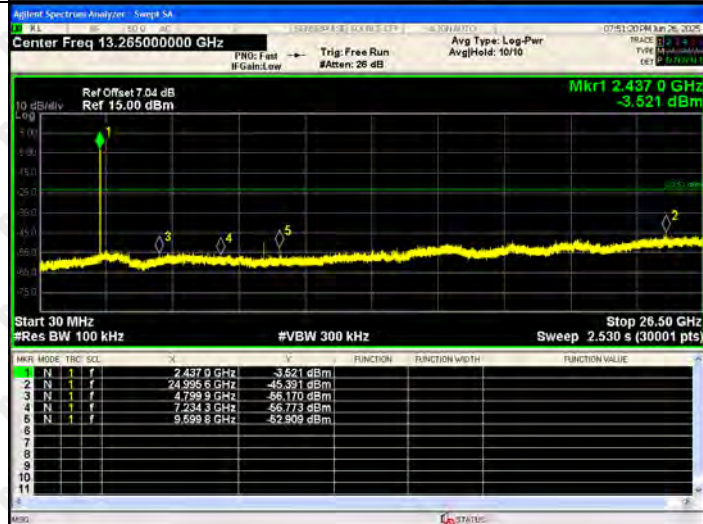

802.11 n(HT20)/HCH

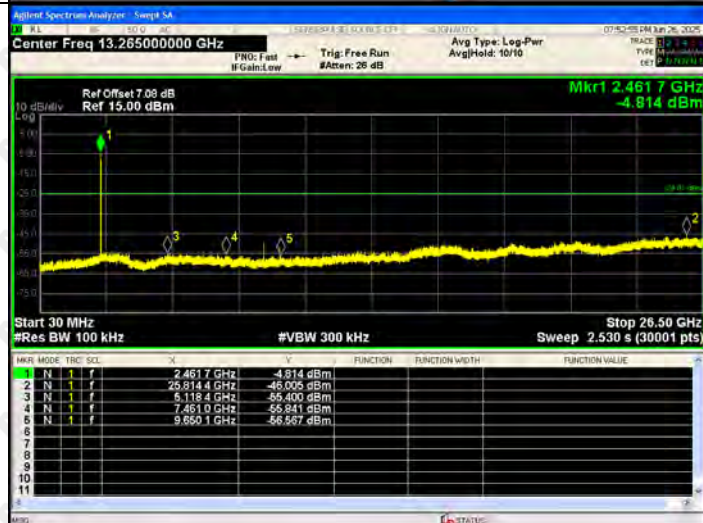


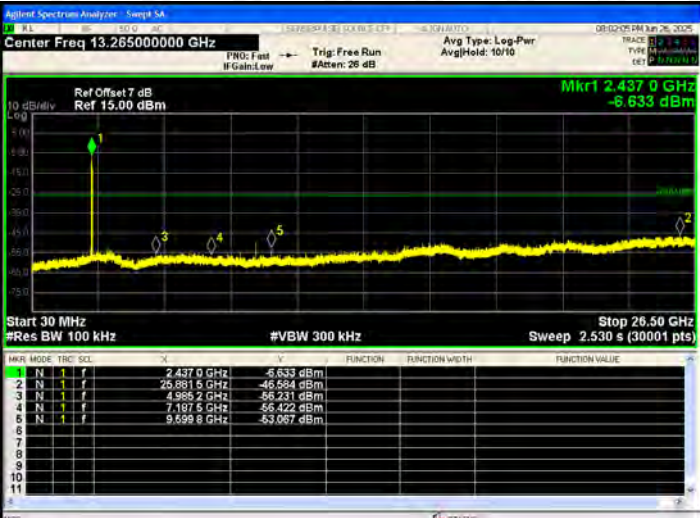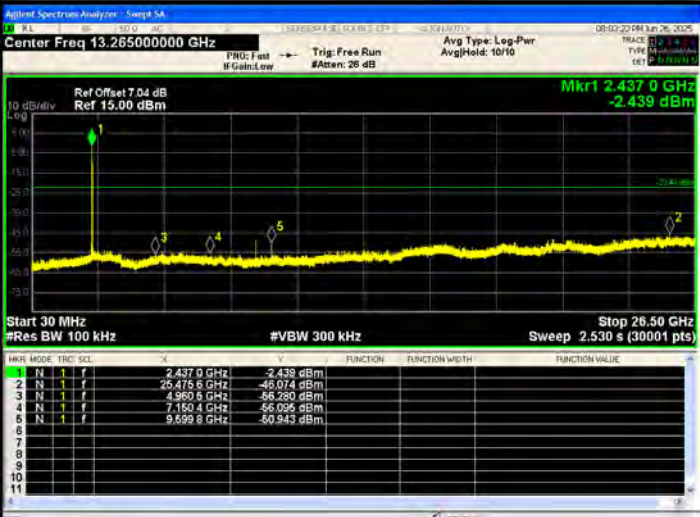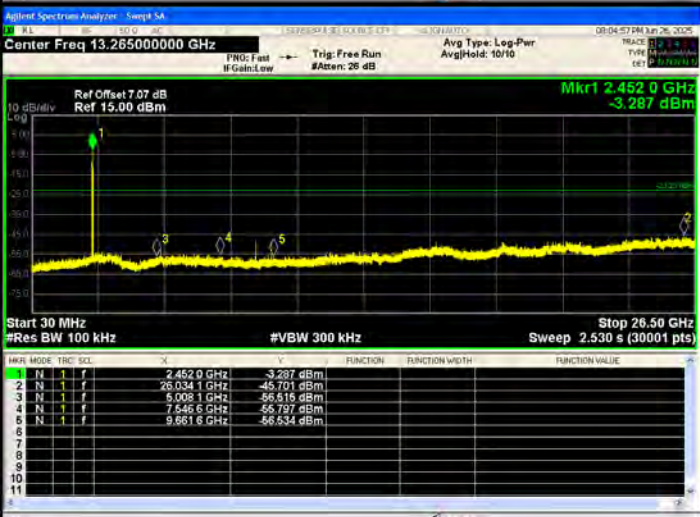802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7 dB Ref 15.00 dBm Mkr1 2.437 0 GHz -6.633 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.437 0 GHz</td><td></td><td></td><td>-6.633 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.881 0 GHz</td><td></td><td></td><td>-46.584 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.985 2 GHz</td><td></td><td></td><td>-56.231 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.197 5 GHz</td><td></td><td></td><td>-56.422 dBm</td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.699 8 GHz</td><td></td><td></td><td>-53.067 dBm</td></tr></table>	MNR	MODE	TRIG	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 0 GHz			-6.633 dBm	2	N	1	f	25.881 0 GHz			-46.584 dBm	3	N	1	f	4.985 2 GHz			-56.231 dBm	4	N	1	f	7.197 5 GHz			-56.422 dBm	5	N	1	f	9.699 8 GHz			-53.067 dBm
MNR	MODE	TRIG	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.437 0 GHz			-6.633 dBm																																										
2	N	1	f	25.881 0 GHz			-46.584 dBm																																										
3	N	1	f	4.985 2 GHz			-56.231 dBm																																										
4	N	1	f	7.197 5 GHz			-56.422 dBm																																										
5	N	1	f	9.699 8 GHz			-53.067 dBm																																										
802.11 n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.04 dB Ref 15.00 dBm Mkr1 2.437 0 GHz -2.439 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.437 0 GHz</td><td></td><td></td><td>-2.439 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.881 0 GHz</td><td></td><td></td><td>-46.584 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.960 8 GHz</td><td></td><td></td><td>-56.280 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.150 4 GHz</td><td></td><td></td><td>-56.095 dBm</td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.699 8 GHz</td><td></td><td></td><td>-50.943 dBm</td></tr></table>	MNR	MODE	TRIG	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 0 GHz			-2.439 dBm	2	N	1	f	25.881 0 GHz			-46.584 dBm	3	N	1	f	4.960 8 GHz			-56.280 dBm	4	N	1	f	7.150 4 GHz			-56.095 dBm	5	N	1	f	9.699 8 GHz			-50.943 dBm
MNR	MODE	TRIG	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.437 0 GHz			-2.439 dBm																																										
2	N	1	f	25.881 0 GHz			-46.584 dBm																																										
3	N	1	f	4.960 8 GHz			-56.280 dBm																																										
4	N	1	f	7.150 4 GHz			-56.095 dBm																																										
5	N	1	f	9.699 8 GHz			-50.943 dBm																																										
802.11 n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.07 dB Ref 15.00 dBm Mkr1 2.452 0 GHz -3.287 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.452 0 GHz</td><td></td><td></td><td>-3.287 dBm</td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>26.034 1 GHz</td><td></td><td></td><td>-45.701 dBm</td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.008 1 GHz</td><td></td><td></td><td>-56.515 dBm</td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.546 6 GHz</td><td></td><td></td><td>-56.797 dBm</td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.661 6 GHz</td><td></td><td></td><td>-56.534 dBm</td></tr></table>	MNR	MODE	TRIG	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.452 0 GHz			-3.287 dBm	2	N	1	f	26.034 1 GHz			-45.701 dBm	3	N	1	f	5.008 1 GHz			-56.515 dBm	4	N	1	f	7.546 6 GHz			-56.797 dBm	5	N	1	f	9.661 6 GHz			-56.534 dBm
MNR	MODE	TRIG	SCL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.452 0 GHz			-3.287 dBm																																										
2	N	1	f	26.034 1 GHz			-45.701 dBm																																										
3	N	1	f	5.008 1 GHz			-56.515 dBm																																										
4	N	1	f	7.546 6 GHz			-56.797 dBm																																										
5	N	1	f	9.661 6 GHz			-56.534 dBm																																										


ANT2:

BAND EDGE Graphs



802.11b/LCH

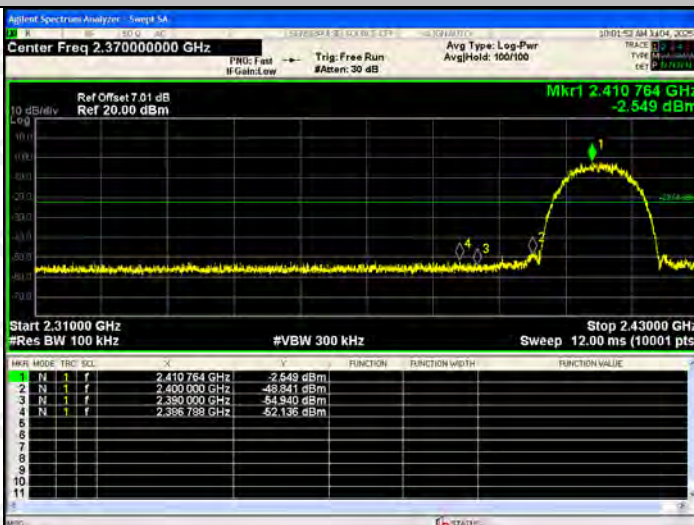


802.11b/HCH

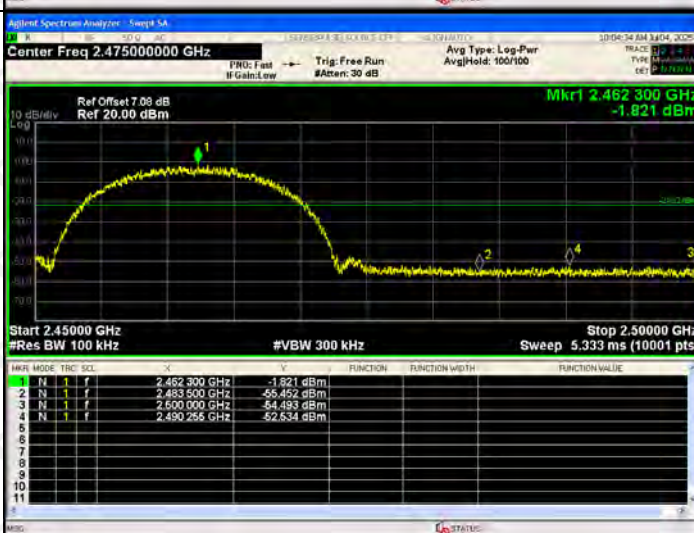

802.11g/LCH

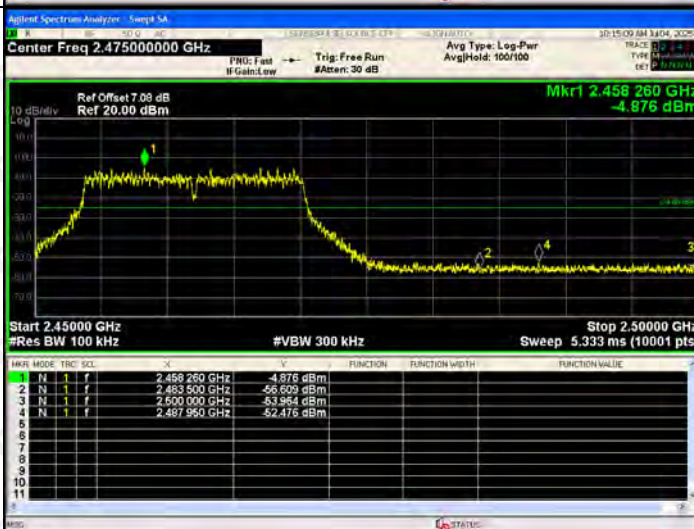


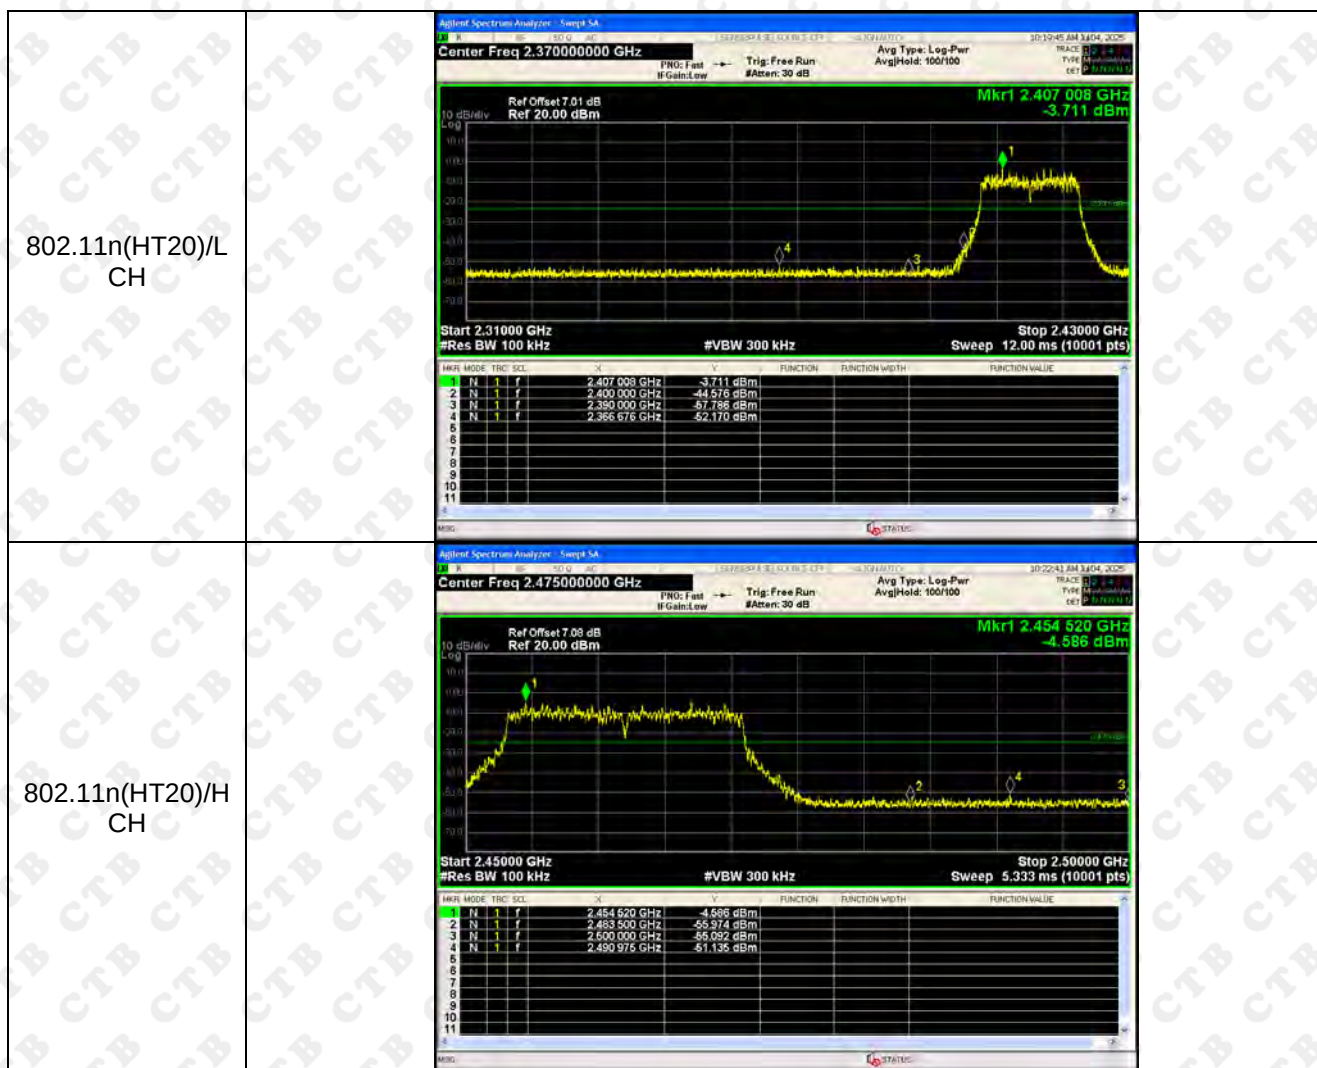




RF Conducted Spurious Emissions Graphs


802.11b/LCH

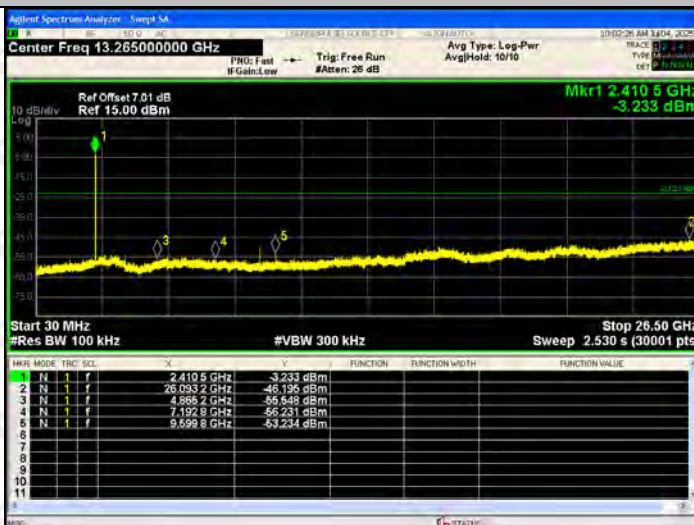

802.11b/MCH

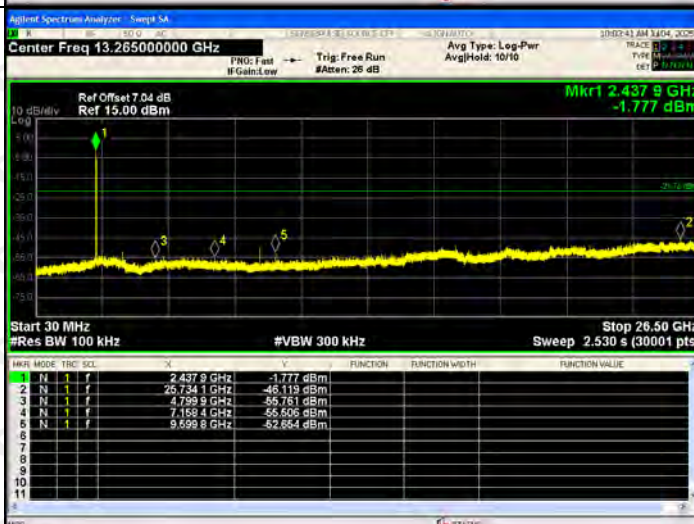


802.11b/HCH

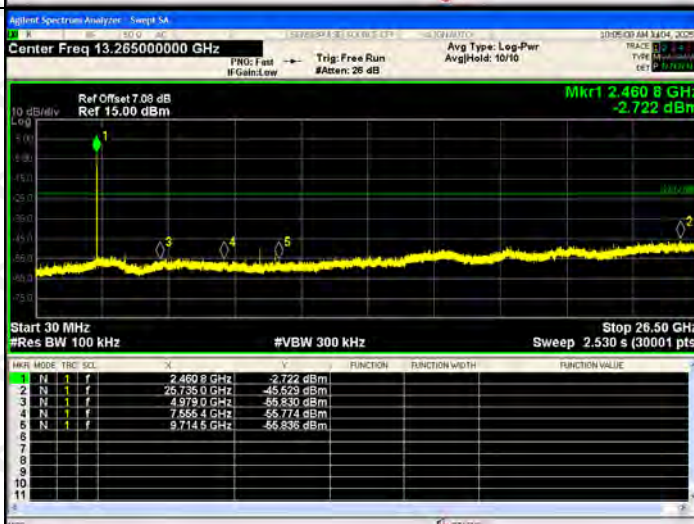


RF Conducted Spurious Emissions Graphs


802.11g/LCH

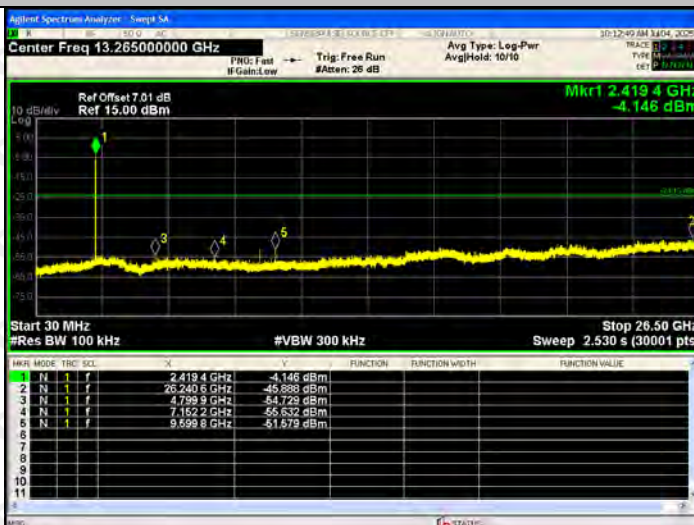

802.11g/MCH

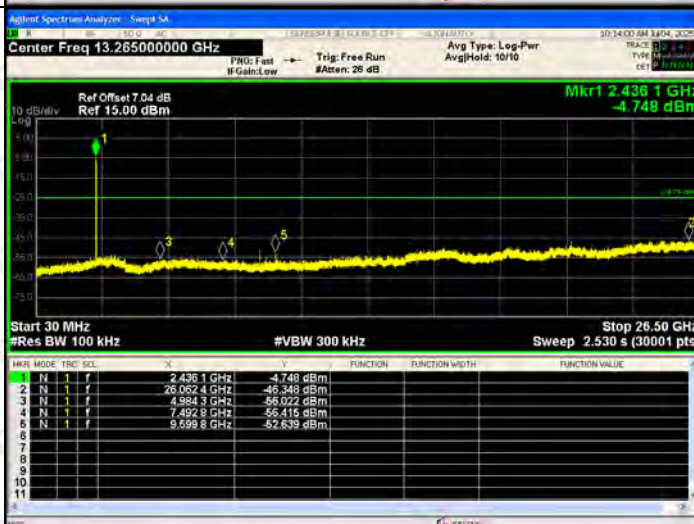


802.11g/HCH

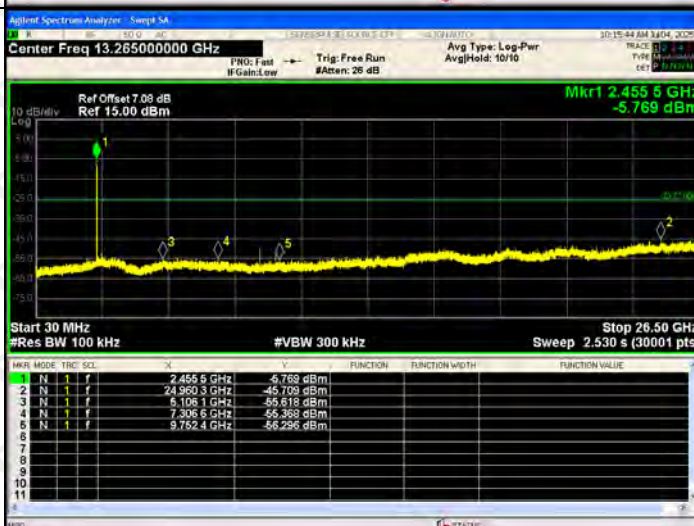


RF Conducted Spurious Emissions Graphs


802.11n(HT20)/LCH



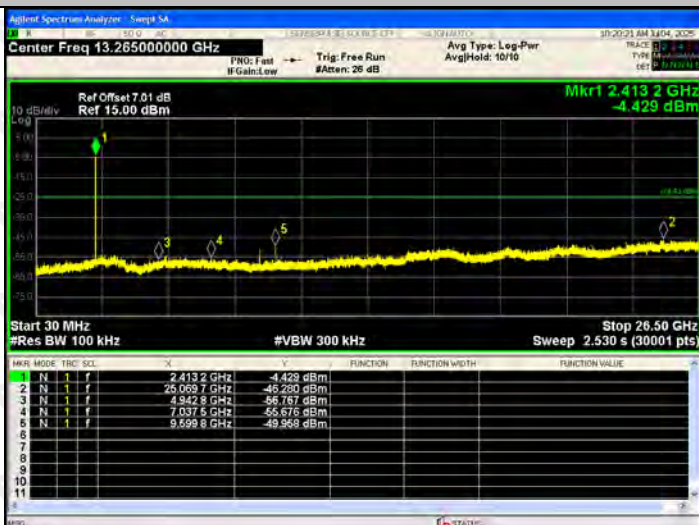


802.11 n(HT20)/MCH

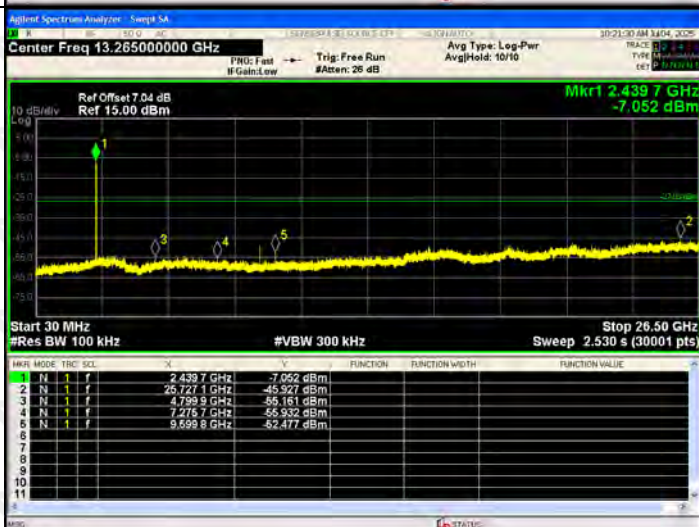

802.11 n(HT20)/HCH

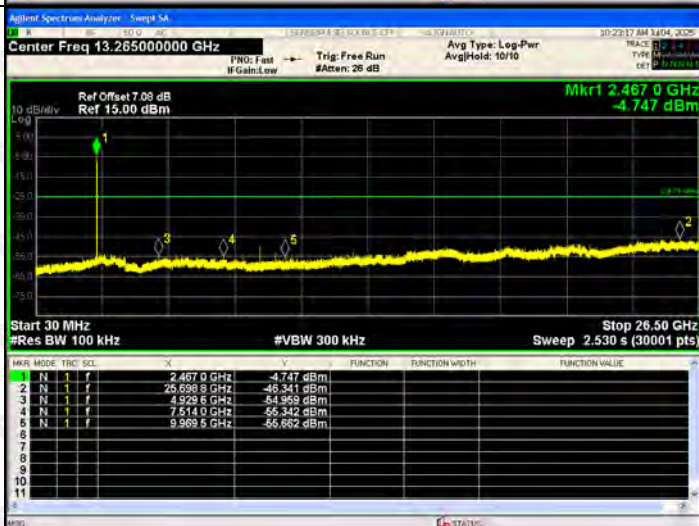

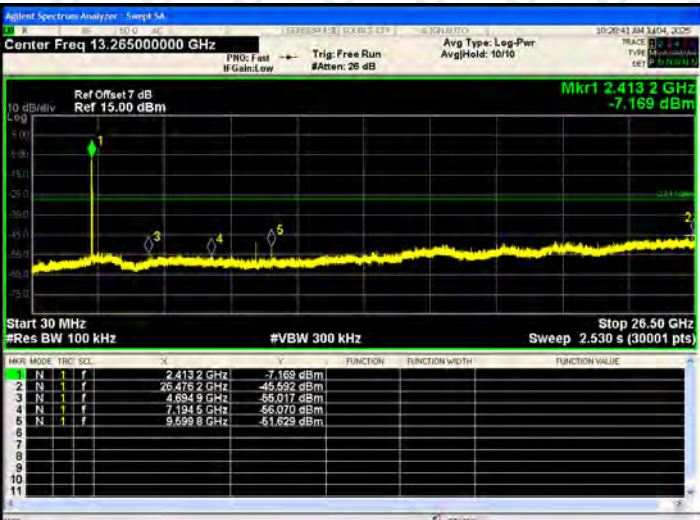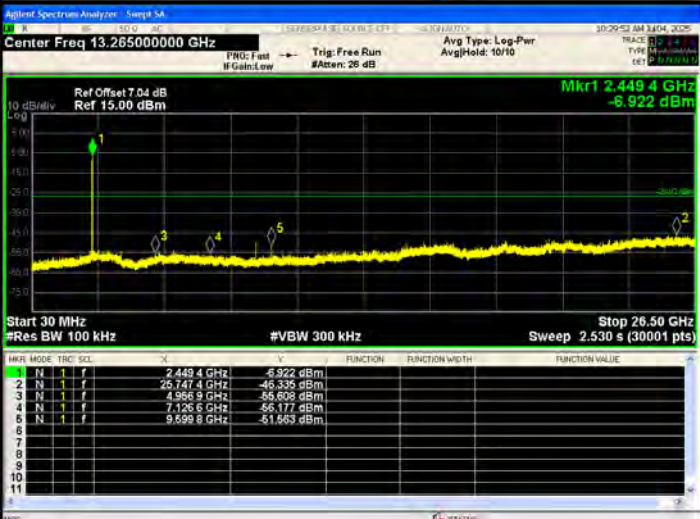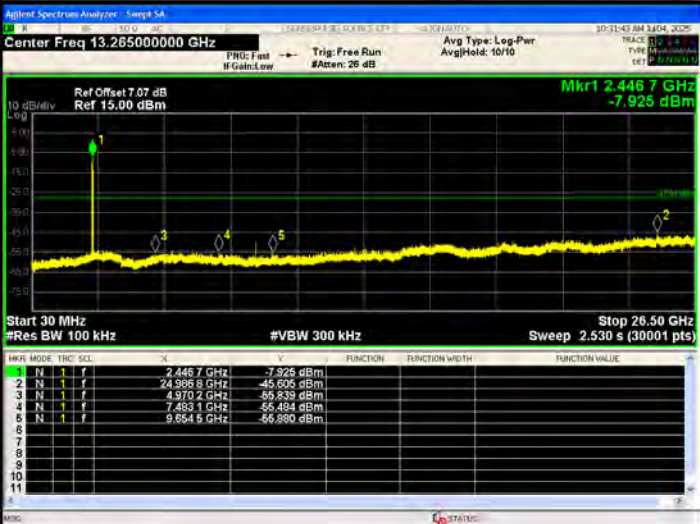802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7 dB Ref 15.00 dBm Mkr1 2.413 2 GHz -7.169 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.413 2 GHz</td><td>-7.169 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.476 2 GHz</td><td>-45.592 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.694 9 GHz</td><td>-55.017 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.194 5 GHz</td><td>-56.070 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.599 8 GHz</td><td>-51.629 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRIG	SCL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.413 2 GHz	-7.169 dBm				2	N	1	f	2.476 2 GHz	-45.592 dBm				3	N	1	f	4.694 9 GHz	-55.017 dBm				4	N	1	f	7.194 5 GHz	-56.070 dBm				5	N	1	f	9.599 8 GHz	-51.629 dBm			
MNR	MODE	TRIG	SCL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.413 2 GHz	-7.169 dBm																																																		
2	N	1	f	2.476 2 GHz	-45.592 dBm																																																		
3	N	1	f	4.694 9 GHz	-55.017 dBm																																																		
4	N	1	f	7.194 5 GHz	-56.070 dBm																																																		
5	N	1	f	9.599 8 GHz	-51.629 dBm																																																		
802.11 n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.04 dB Ref 15.00 dBm Mkr1 2.449 4 GHz -6.922 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.449 4 GHz</td><td>-6.922 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.474 4 GHz</td><td>-46.335 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.986 9 GHz</td><td>-55.808 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.126 6 GHz</td><td>-56.177 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.599 8 GHz</td><td>-51.553 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRIG	SCL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.449 4 GHz	-6.922 dBm				2	N	1	f	2.474 4 GHz	-46.335 dBm				3	N	1	f	4.986 9 GHz	-55.808 dBm				4	N	1	f	7.126 6 GHz	-56.177 dBm				5	N	1	f	9.599 8 GHz	-51.553 dBm			
MNR	MODE	TRIG	SCL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.449 4 GHz	-6.922 dBm																																																		
2	N	1	f	2.474 4 GHz	-46.335 dBm																																																		
3	N	1	f	4.986 9 GHz	-55.808 dBm																																																		
4	N	1	f	7.126 6 GHz	-56.177 dBm																																																		
5	N	1	f	9.599 8 GHz	-51.553 dBm																																																		
802.11 n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.07 dB Ref 15.00 dBm Mkr1 2.446 7 GHz -7.925 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.446 7 GHz</td><td>-7.925 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.496 8 GHz</td><td>-45.905 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.970 2 GHz</td><td>-55.939 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.493 1 GHz</td><td>-55.494 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.594 5 GHz</td><td>-55.890 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRIG	SCL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.446 7 GHz	-7.925 dBm				2	N	1	f	2.496 8 GHz	-45.905 dBm				3	N	1	f	4.970 2 GHz	-55.939 dBm				4	N	1	f	7.493 1 GHz	-55.494 dBm				5	N	1	f	9.594 5 GHz	-55.890 dBm			
MNR	MODE	TRIG	SCL	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.446 7 GHz	-7.925 dBm																																																		
2	N	1	f	2.496 8 GHz	-45.905 dBm																																																		
3	N	1	f	4.970 2 GHz	-55.939 dBm																																																		
4	N	1	f	7.493 1 GHz	-55.494 dBm																																																		
5	N	1	f	9.594 5 GHz	-55.890 dBm																																																		

9. CONDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	13.277	13.346	/	30
	MCH	14.147	13.837	/	30
	HCH	14.165	13.776	/	30
802.11g	LCH	13.954	13.495	/	30
	MCH	13.978	13.81	/	30
	HCH	12.994	12.826	/	30
802.11n(HT20)	LCH	13.572	13.347	16.471	30
	MCH	13.929	13.571	16.764	30
	HCH	13.649	12.682	16.203	30
802.11n(HT40)	LCH	13.561	13.169	16.380	30
	MCH	13.459	13.065	16.277	30
	HCH	13.052	12.717	15.898	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

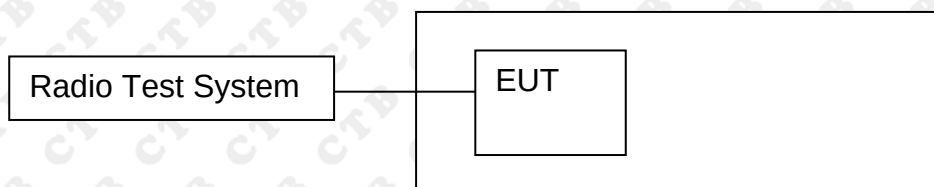

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{kHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.72	500	PASS
	MCH	9.714	500	PASS
	HCH	9.94	500	PASS
802.11g	LCH	15.967	500	PASS
	MCH	15.815	500	PASS
	HCH	15.972	500	PASS
802.11n(HT20)	LCH	16.878	500	PASS
	MCH	15.996	500	PASS
	HCH	16.558	500	PASS
802.11n(HT40)	LCH	33.851	500	PASS
	MCH	31.208	500	PASS
	HCH	32.598	500	PASS

ANT2:


Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.8	500	PASS
	MCH	10.503	500	PASS
	HCH	10.493	500	PASS
802.11g	LCH	16.368	500	PASS
	MCH	16.296	500	PASS
	HCH	16.352	500	PASS
802.11n(HT20)	LCH	17.168	500	PASS
	MCH	17.274	500	PASS
	HCH	16.846	500	PASS
802.11n(HT40)	LCH	35.547	500	PASS
	MCH	35.395	500	PASS
	HCH	35.433	500	PASS

ANT1:


Test Graph:

Graphs	
802.11b /LCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.416853 GHz -8.0416 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.746 MHz Total Power 14.7 dBm Transmit Freq Error -6.806 kHz OBW Power 99.00 % x dB Bandwidth 9.720 MHz x dB -6.00 dB
802.11b /MCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.441878 GHz -7.6032 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.737 MHz Total Power 15.5 dBm Transmit Freq Error 20.716 kHz OBW Power 99.00 % x dB Bandwidth 9.714 MHz x dB -6.00 dB
802.11b/HCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 7.06 dB Ref 27.08 dBm Mkr3 2.466936 GHz -8.1608 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.677 MHz Total Power 15.7 dBm Transmit Freq Error -34.304 kHz OBW Power 99.00 % x dB Bandwidth 9.940 MHz x dB -6.00 dB


802.11g/LCH



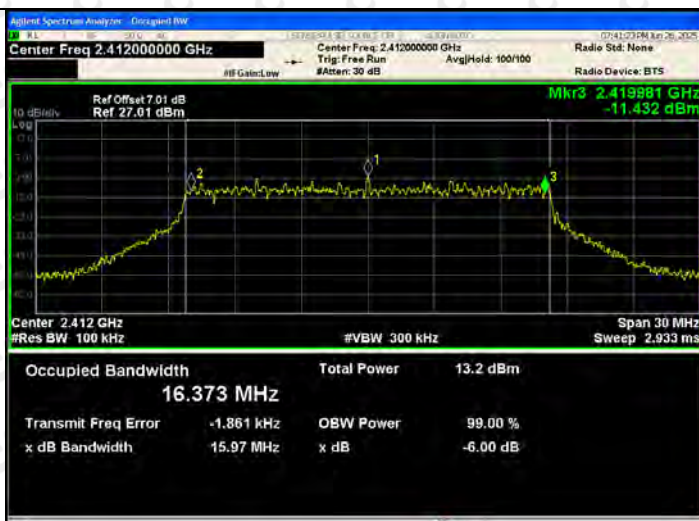




802.11g/MCH

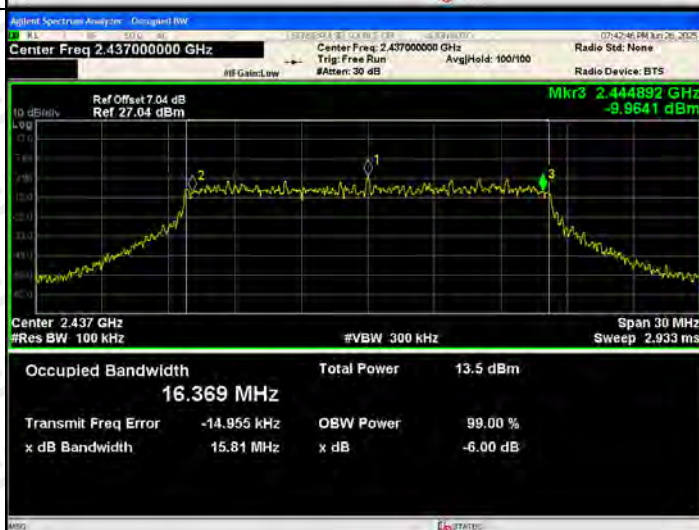

802.11g/HCH

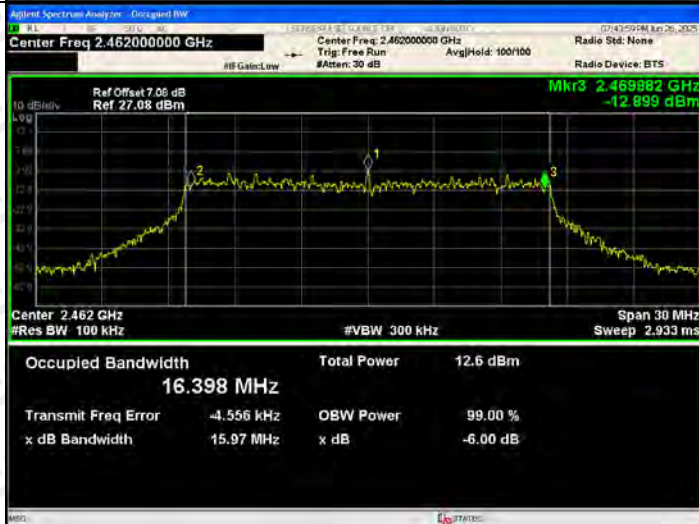

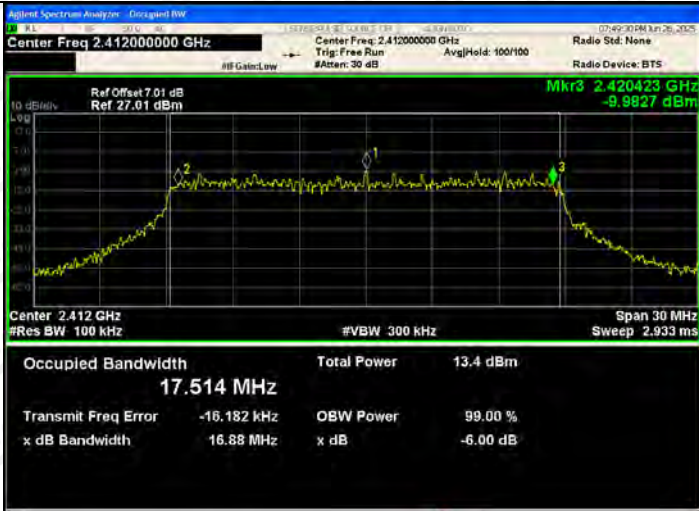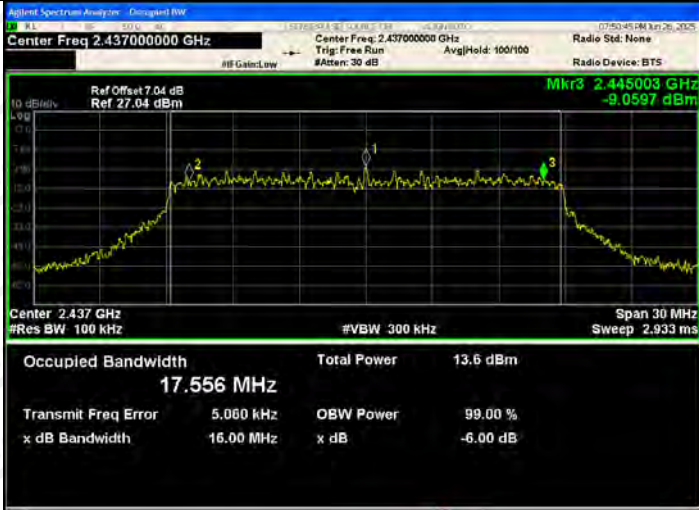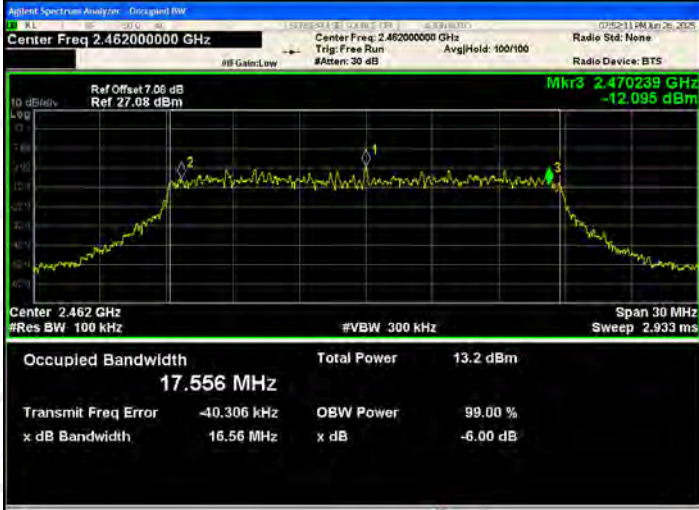802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.420423 GHz -9.9827 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.514 MHz Total Power 13.4 dBm Transmit Freq Error -16.182 kHz OBW Power 99.00 % x dB Bandwidth 16.88 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.445003 GHz -9.0597 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.556 MHz Total Power 13.6 dBm Transmit Freq Error 5.060 kHz OBW Power 99.00 % x dB Bandwidth 16.00 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Ref Offset 7.06 dB Ref 27.06 dBm Mkr3 2.470239 GHz -12.095 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.556 MHz Total Power 13.2 dBm Transmit Freq Error -40.306 kHz OBW Power 99.00 % x dB Bandwidth 16.56 MHz x dB -6.00 dB

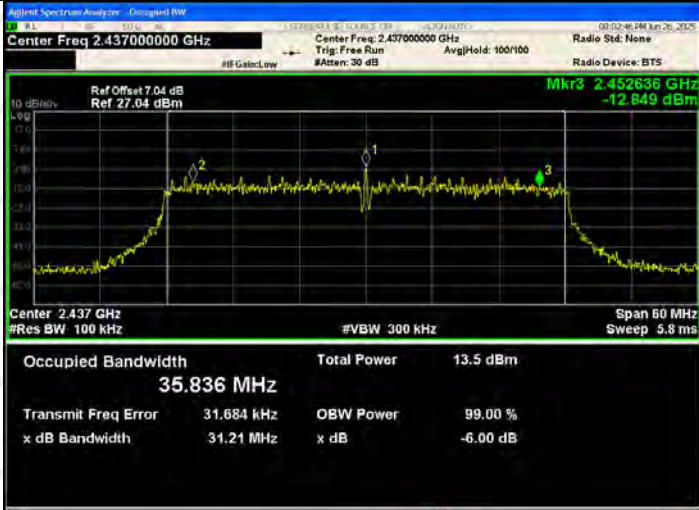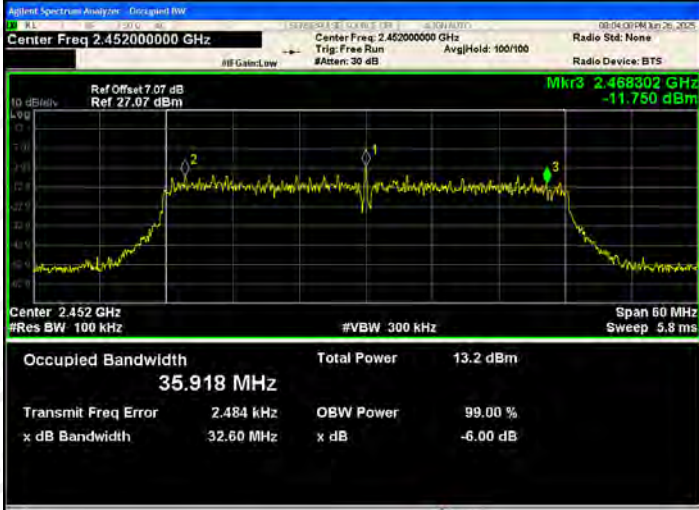
802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Ref Offset 7 dB Ref 27.00 dBm Mkr3 2.438927 GHz -14.141 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.809 MHz Total Power 13.5 dBm Transmit Freq Error 1.485 kHz OBW Power 99.00 % x dB Bandwidth 33.85 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.452636 GHz -12.849 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.836 MHz Total Power 13.5 dBm Transmit Freq Error 31.684 kHz OBW Power 99.00 % x dB Bandwidth 31.21 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Ref Offset 7.07 dB Ref 27.07 dBm Mkr3 2.468302 GHz -11.750 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.918 MHz Total Power 13.2 dBm Transmit Freq Error 2.484 kHz OBW Power 99.00 % x dB Bandwidth 32.60 MHz x dB -6.00 dB

ANT2:

Test Graph:

Graphs	
802.11b /LCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.417379 GHz -8.3084 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.711 MHz Total Power 15.0 dBm Transmit Freq Error -20.850 kHz OBW Power 99.00 % x dB Bandwidth 10.80 MHz x dB -6.00 dB
802.11b /MCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.442276 GHz -11.413 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.756 MHz Total Power 15.6 dBm Transmit Freq Error 24.575 kHz OBW Power 99.00 % x dB Bandwidth 10.50 MHz x dB -6.00 dB
802.11b/HCH	Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.06 dB Ref 27.08 dBm Mkr3 2.467208 GHz -9.4744 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 14.967 MHz Total Power 15.4 dBm Transmit Freq Error -38.270 kHz OBW Power 99.00 % x dB Bandwidth 10.49 MHz x dB -6.00 dB


802.11g/LCH



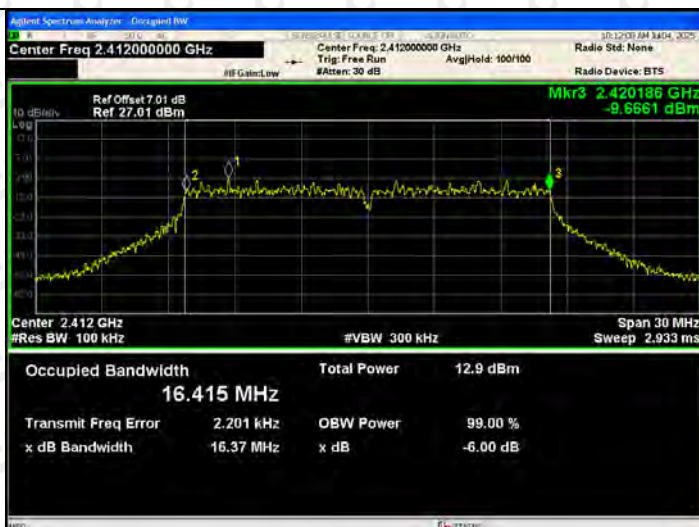




802.11g/MCH



802.11g/HCH

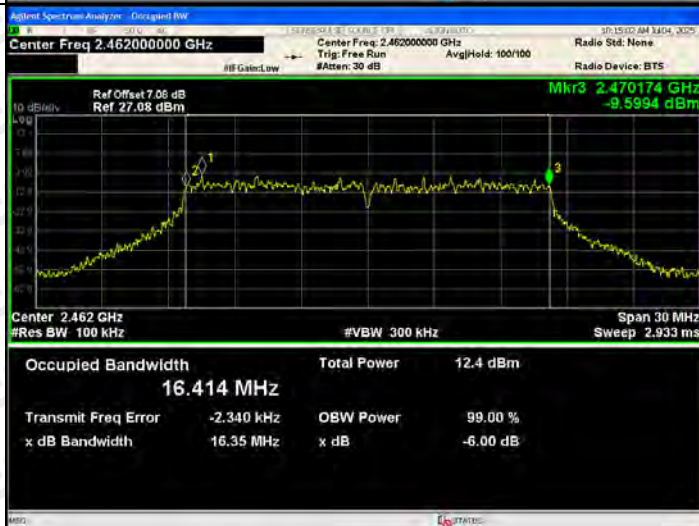


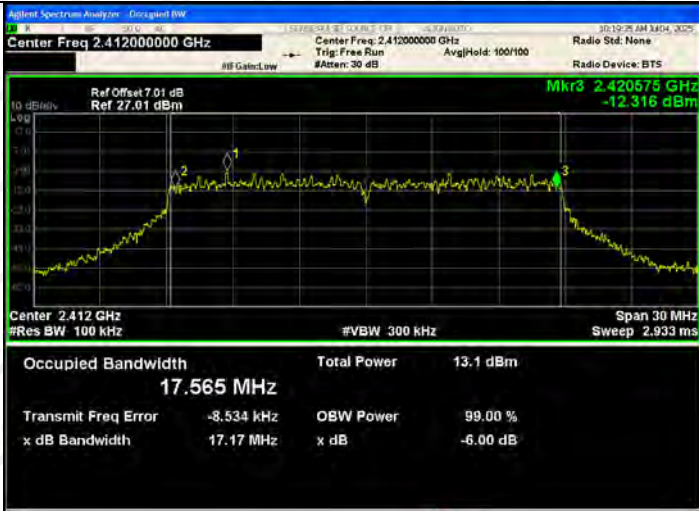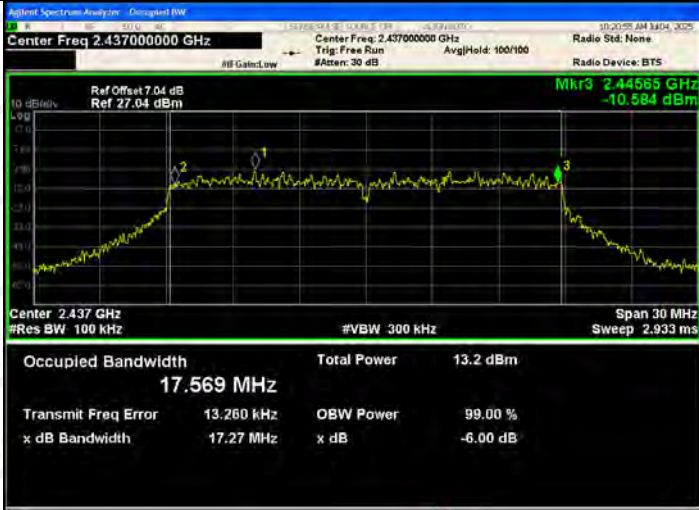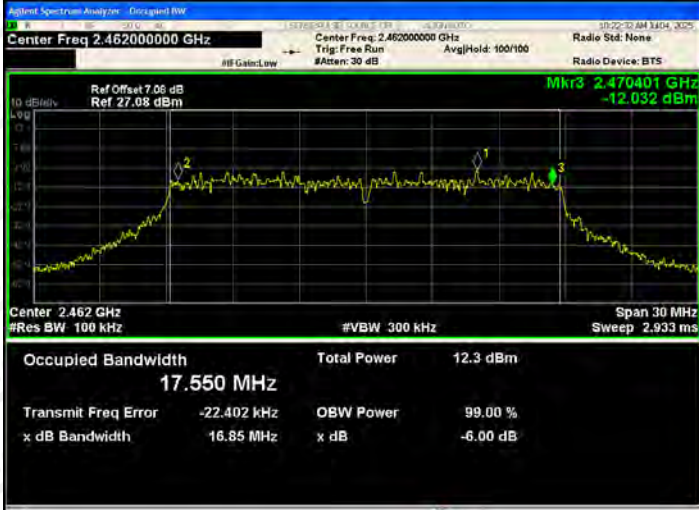802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.412000000 GHz Center Freq: 2.412000000 GHz Trig: Free Run #Span: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.420575 GHz -12.316 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.565 MHz Total Power 13.1 dBm Transmit Freq Error -8.534 kHz OBW Power 99.00 % x dB Bandwidth 17.17 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run #Span: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.44585 GHz -10.684 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.569 MHz Total Power 13.2 dBm Transmit Freq Error 13.260 kHz OBW Power 99.00 % x dB Bandwidth 17.27 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.462000000 GHz Center Freq: 2.462000000 GHz Trig: Free Run #Span: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.06 dB Ref 27.06 dBm Mkr3 2.470401 GHz -12.032 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.550 MHz Total Power 12.3 dBm Transmit Freq Error -22.402 kHz OBW Power 99.00 % x dB Bandwidth 16.85 MHz x dB -6.00 dB

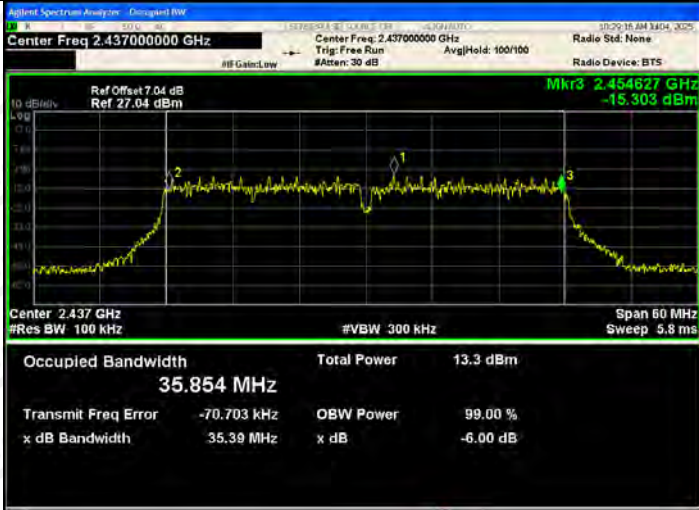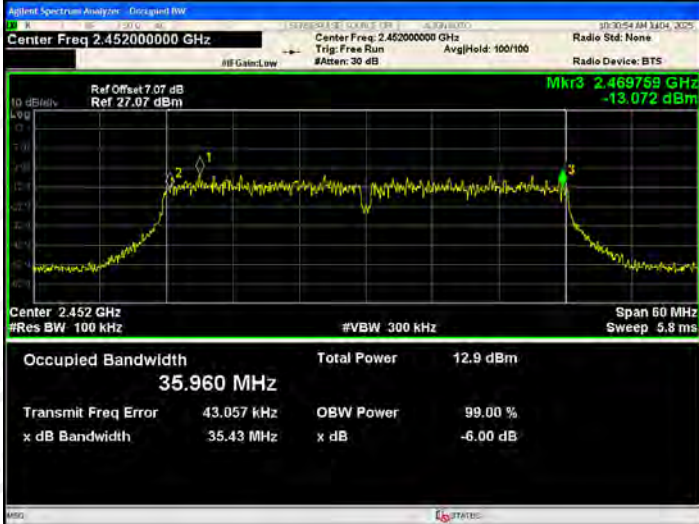802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.422000000 GHz Center Freq: 2.422000000 GHz Trig: Free Run #Aver: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7 dB Ref 27.00 dBm Mkr3 2.439817 GHz -12.833 dBm Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 36.072 MHz Total Power 13.2 dBm Transmit Freq Error 43.006 kHz OBW Power 99.00 % x dB Bandwidth 35.55 MHz x dB -6.00 dB
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.437000000 GHz Center Freq: 2.437000000 GHz Trig: Free Run #Aver: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.454627 GHz -15.303 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.854 MHz Total Power 13.3 dBm Transmit Freq Error -70.703 kHz OBW Power 99.00 % x dB Bandwidth 35.39 MHz x dB -6.00 dB
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.452000000 GHz Center Freq: 2.452000000 GHz Trig: Free Run #Aver: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 7.07 dB Ref 27.07 dBm Mkr3 2.469759 GHz -13.072 dBm Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms Occupied Bandwidth 35.960 MHz Total Power 12.9 dBm Transmit Freq Error 43.057 kHz OBW Power 99.00 % x dB Bandwidth 35.43 MHz x dB -6.00 dB

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

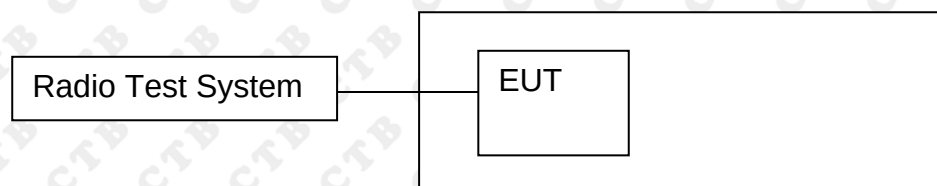

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = PEAK.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3kHz] ANT 1	Power Spectral Density [dBm /3kHz] ANT 2	Power Spectral Density [dBm /3kHz] Total	Limit(dBm)
802.11b	LCH	-11.82	-15.093	/	8
	MCH	-11.329	-14.687	/	8
	HCH	-14.215	-14.845	/	8
802.11g	LCH	-8.86	-20.518	/	8
	MCH	-7.542	-20.02	/	8
	HCH	-7.216	-20.475	/	8
802.11n(H T20)	LCH	-6.949	-19.26	-6.701	8
	MCH	-12.416	-19.326	-11.611	8
	HCH	-7.647	-20.218	-7.413	8
802.11n(H T40)	LCH	-11.049	-23.541	-10.811	8
	MCH	-10.419	-23.12	-10.192	8
	HCH	-10.709	-23.509	-10.487	8

ANT1: Test Graph

Graphs


802.11b /LCH





802.11b /MCH




802.11b/HCH

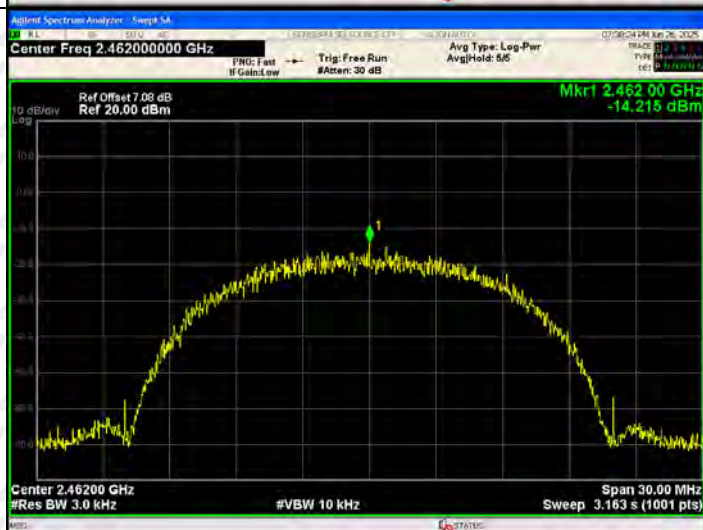

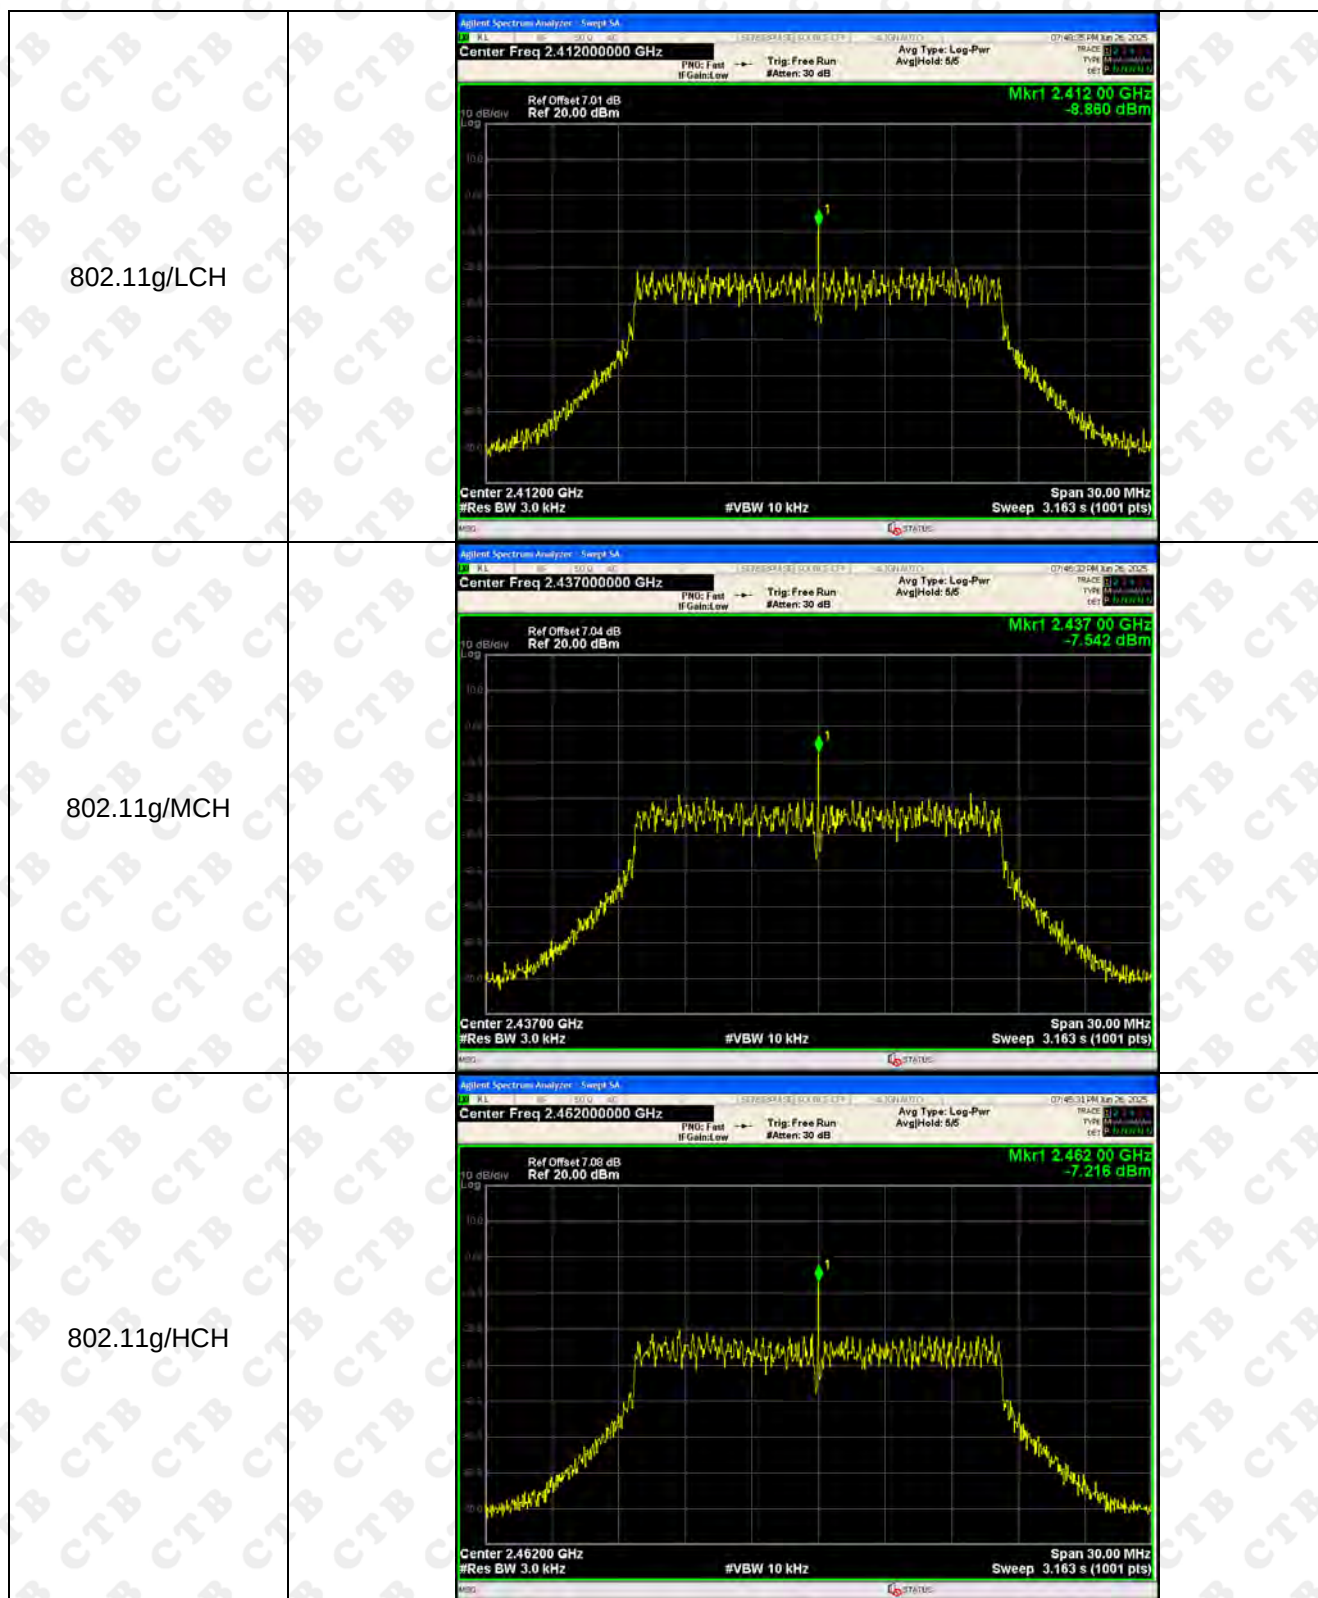

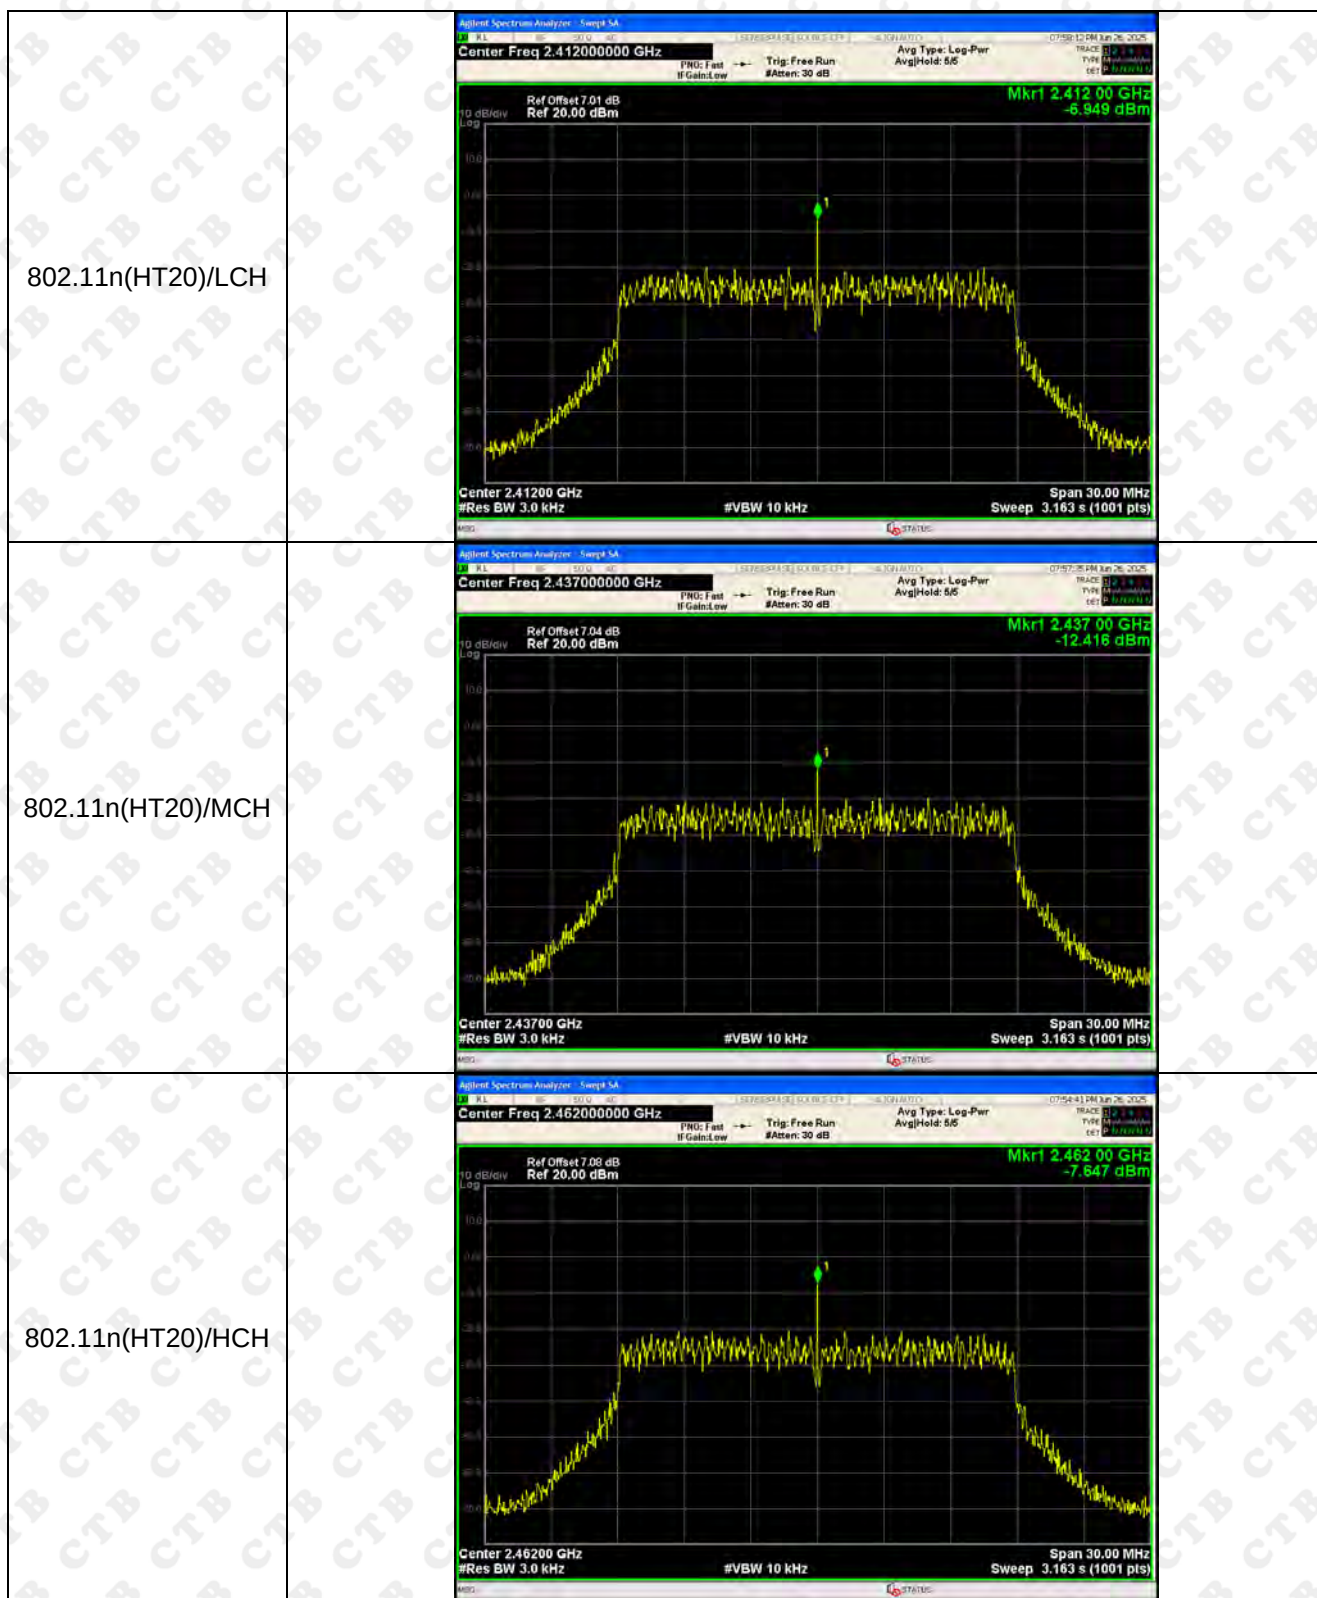

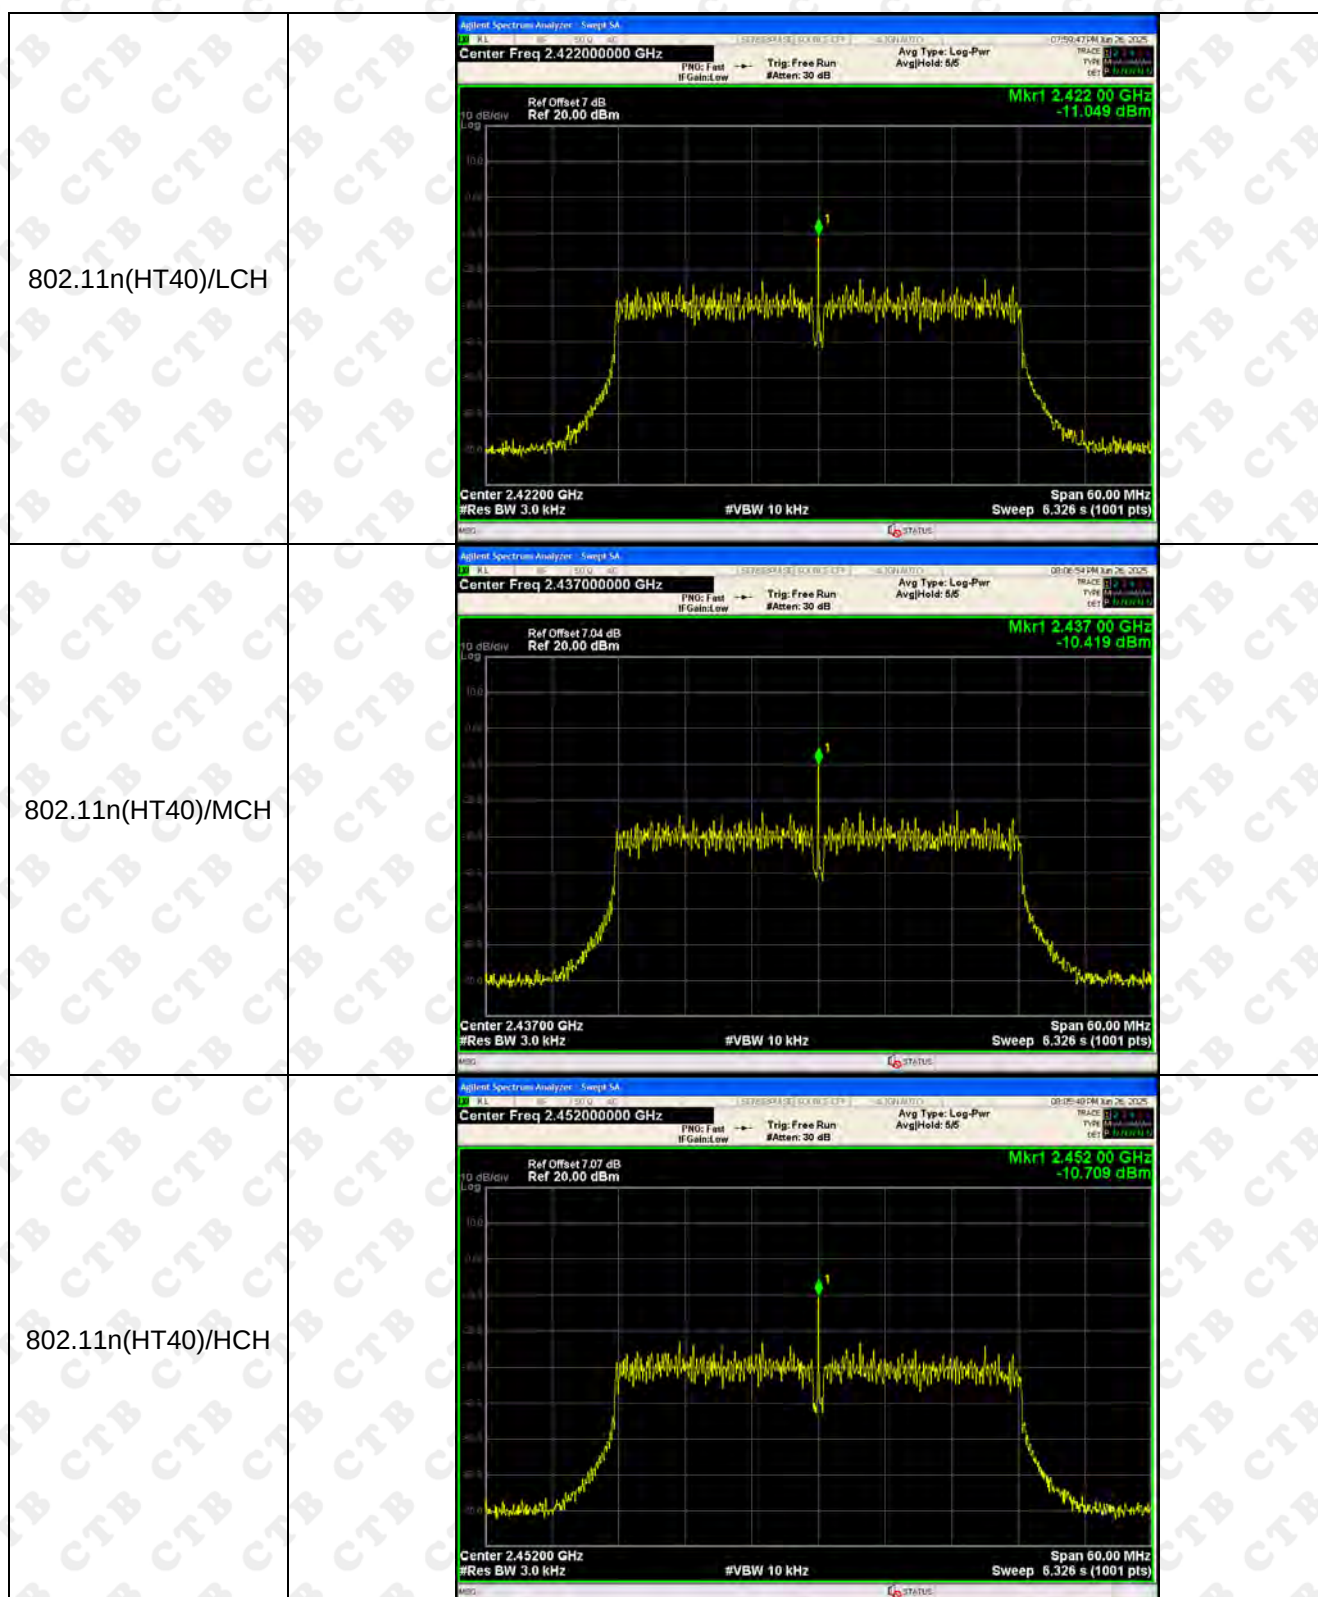

ANT2: Test Graph

Graphs

802.11b /LCH





802.11b /MCH




802.11b/HCH



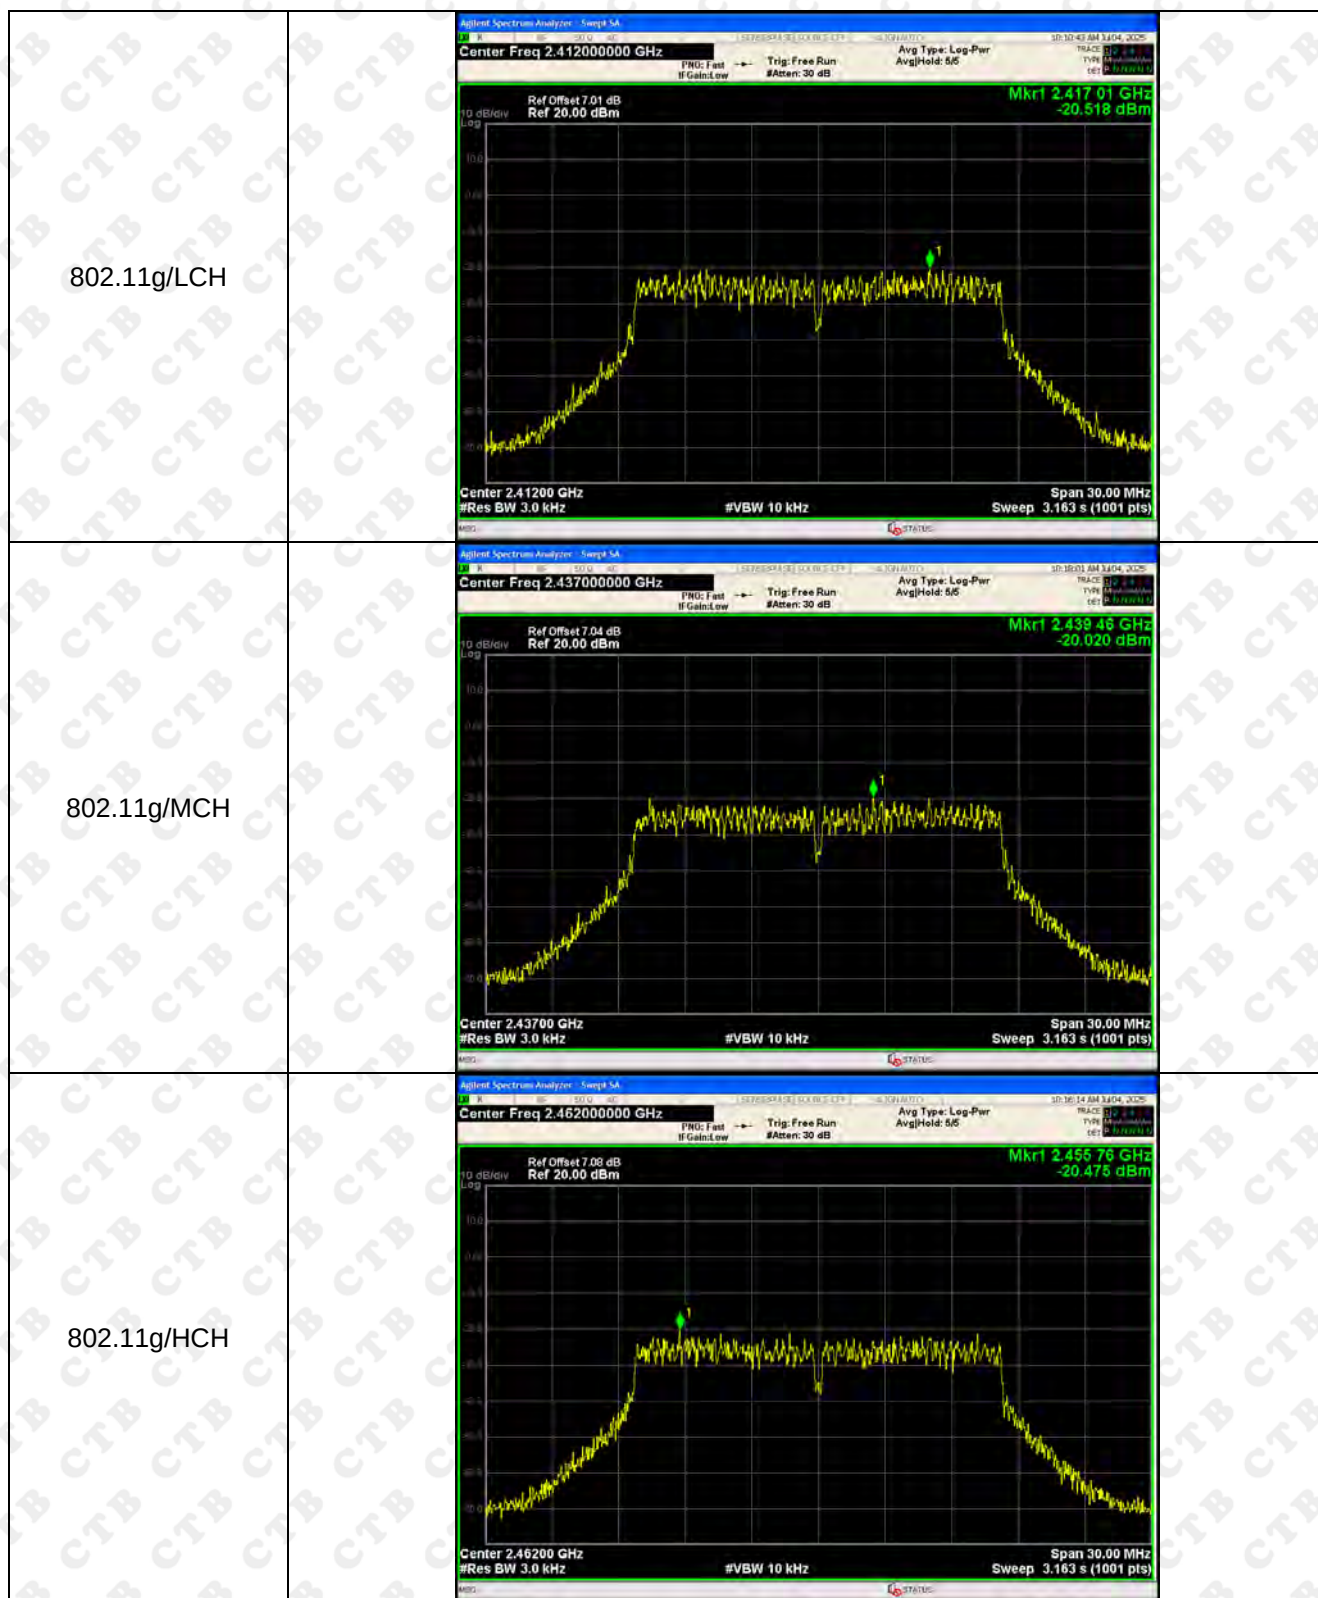

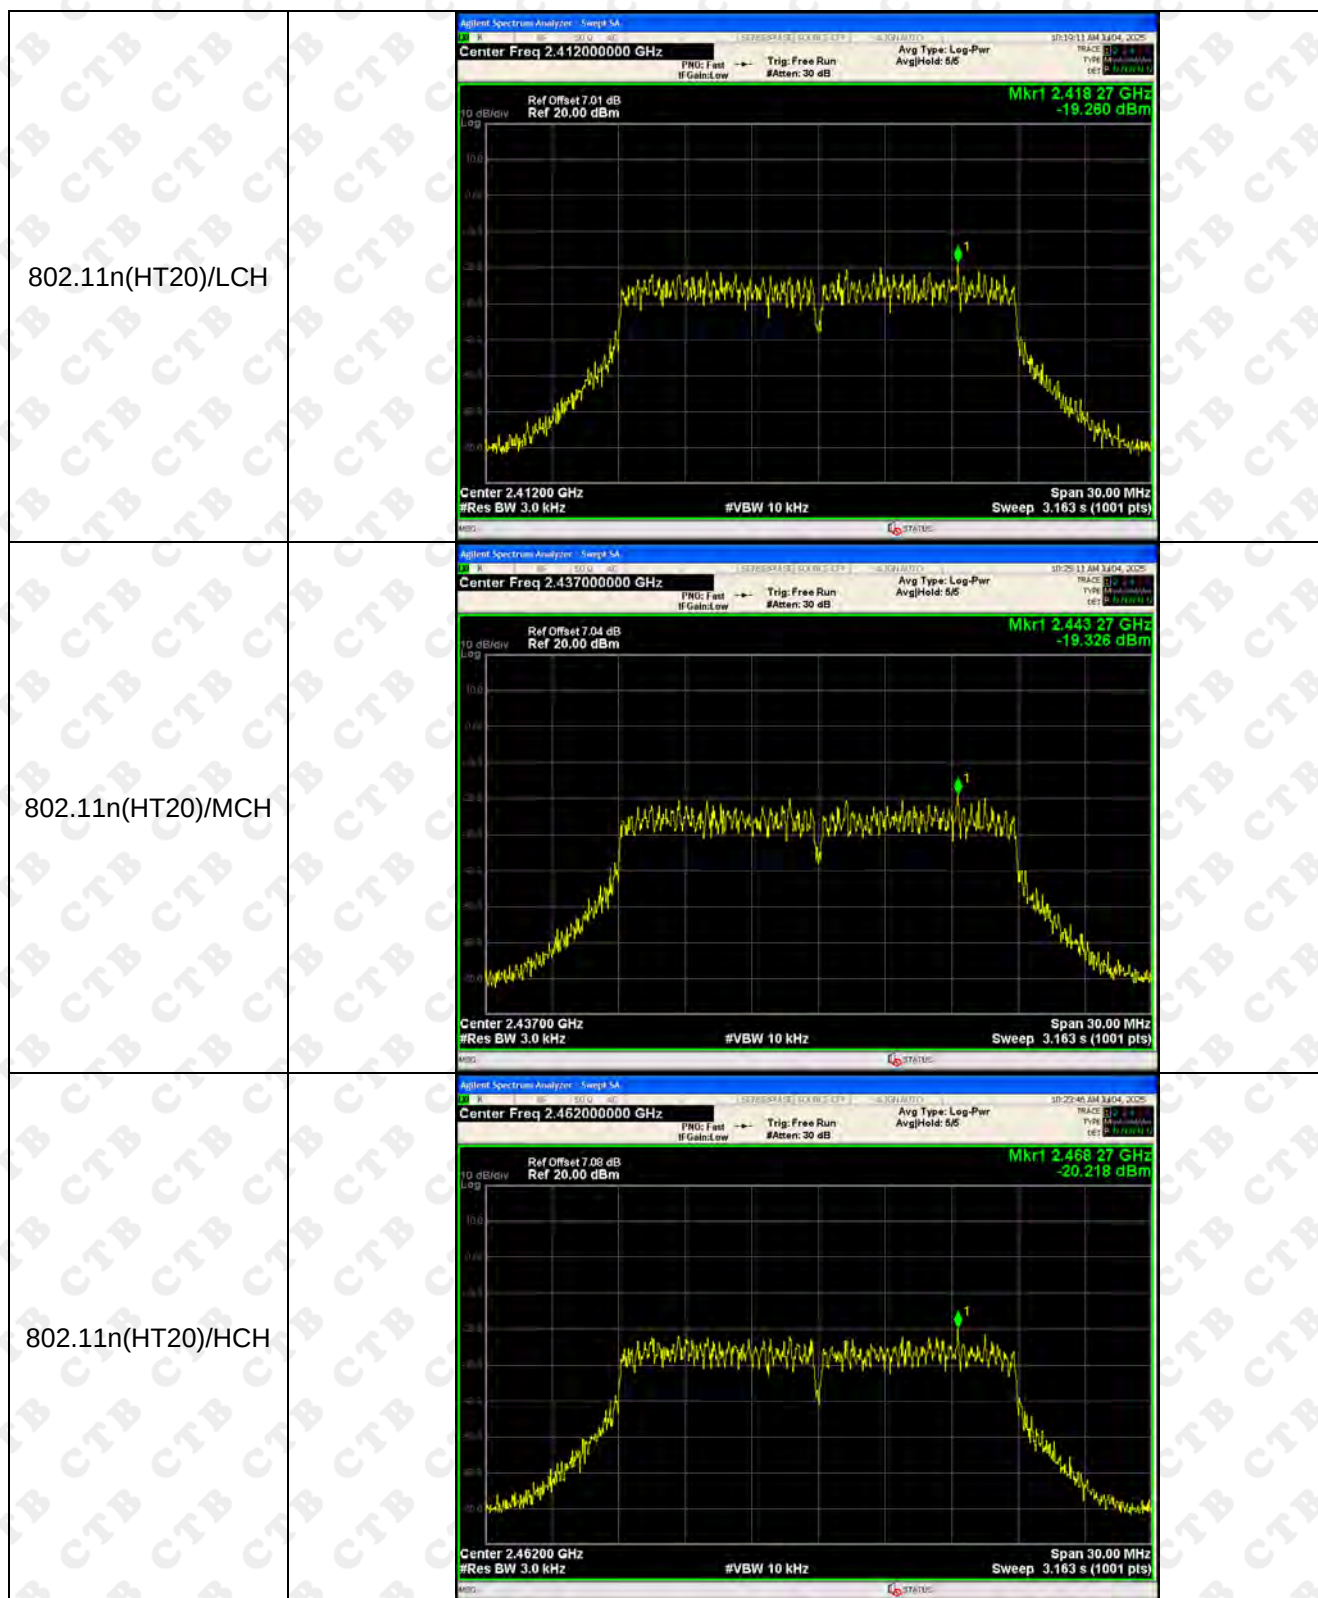

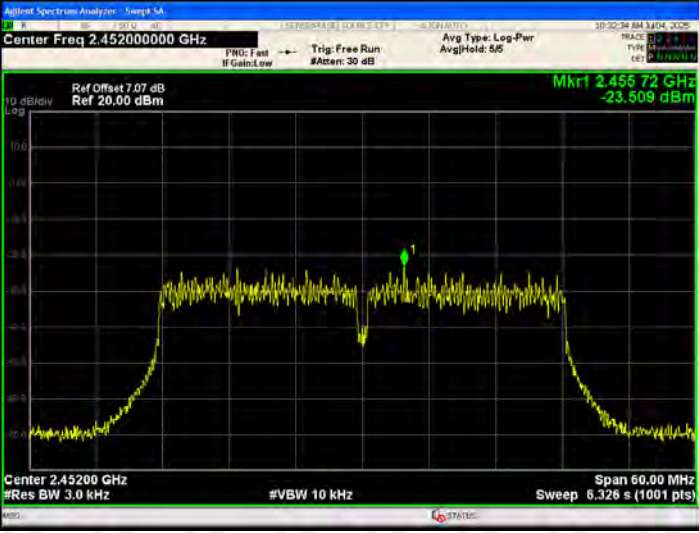802.11n(HT40)/LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.422000000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.410 72 GHz -23.541 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.437000000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.424 52 GHz -23.120 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 2.452000000 GHz Ref Offset 7.07 dB Ref 20.00 dBm Mkr1 2.455 72 GHz -23.509 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is internal antenna and no consideration of replacement. The best case gain of the antenna is Ant1: 0.62dBi, Ant2: 0.62dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G

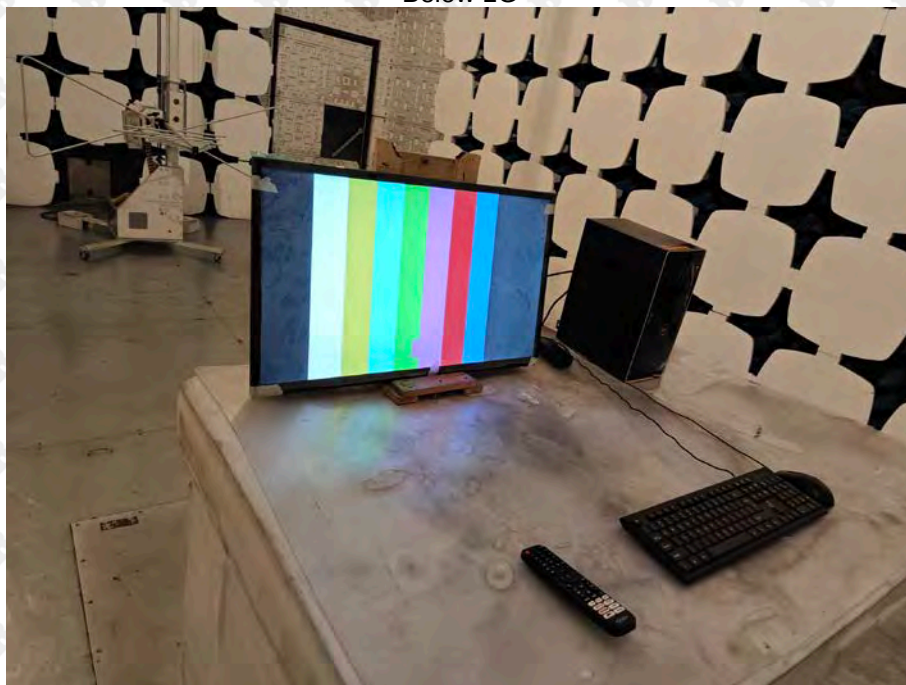

Above 1G



Conducted Emission

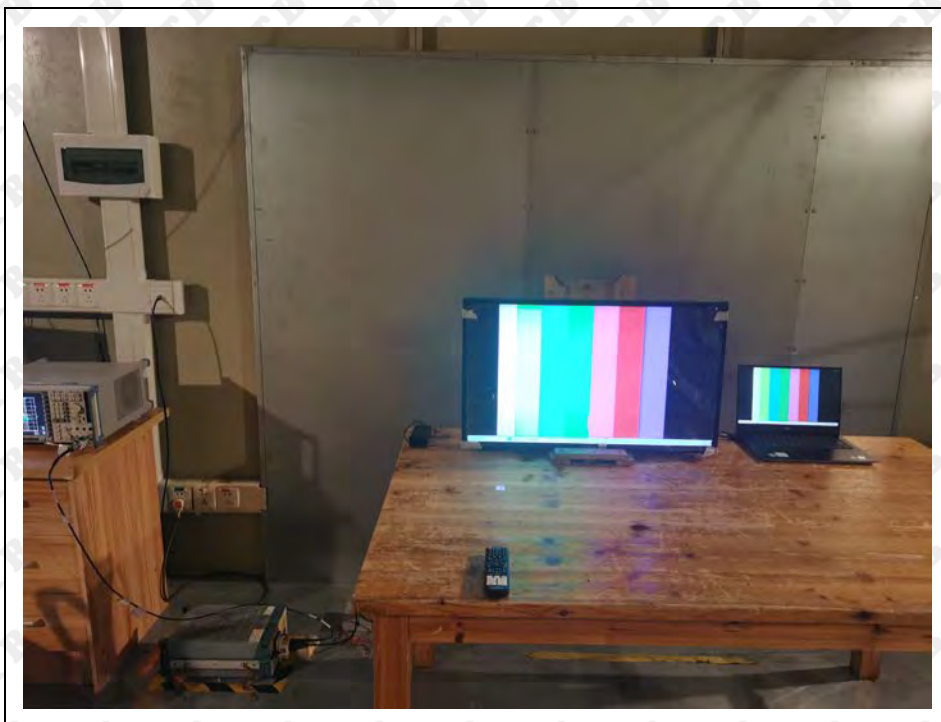

※※※※※ END OF REPORT ※※※※※