

TEST REPORT

Product Name: 40 INCH DLED TV
FCC ID: 2AHU2JTV4023DCS
Trademark: JENSEN
Model Number: JTV4023DCS
Prepared For: ASA Electronics Shenzhen Limited
Address: Room 503, 5/F., Unit A, Skyworth Building, Gaoxin Avenue.1.S., Nanshan District, Shen Zhen 518057, China
Manufacturer: ASA Electronics Shenzhen Limited
Address: Room 503, 5/F., Unit A, Skyworth Building, Gaoxin Avenue.1.S., Nanshan District, Shen Zhen 518057, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Mar. 25, 2024
Sample tested Date: Mar. 25, 2024 to Apr. 10, 2024
Issue Date: Apr. 10, 2024
Report No.: CTB240328041RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	10
6.1 Block Diagram Of Test Setup	10
6.2 Limit	10
6.3 Test procedure	10
6.4 Test Result	12
7. RADIATED SPURIOUS EMISSION	14
7.1 Block Diagram Of Test Setup	14
7.2 Limit	14
7.3 Test procedure	15
7.4 Test Result	16
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	38
8.1 Block Diagram Of Test Setup	38
8.2 Limit	38
8.3 Test procedure	38
9. CONDUCTED OUTPUT POWER	55
9.1 Block Diagram Of Test Setup	55
9.2 Limit	55
9.3 Test procedure	55
9.4 Test Result	56
10. 6DB OCCUPIED BANDWIDTH	57
10.1 Block Diagram Of Test Setup	57
10.2 Limit	57
10.3 Test procedure	57
10.4 Test Result	58
11. POWER SPECTRAL DENSITY	68
11.1 Block Diagram Of Test Setup	68
11.2 Limit	68
11.3 Test procedure	68
11.4 Test Result	69
12. ANTENNA REQUIREMENT	78
13. EUT TEST SETUP PHOTOGRAPHS	79

(Note: N/A means not applicable)

1. **VERSION**

Report No.	Issue Date	Description	Approved
CTB240328041RFX	Apr. 10, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	JTV4023DCS
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 16.434dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal antenna
Antenna Gain:	WiFi (2.4G): Ant1: 0.92dBi Ant2:0.92dBi
Ratings:	DC 12V=5.5A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/TypeNo.	SeriesNo.	Note
1.	Keyboard	DELL	KB216t	N/A	N/A
2.	Mouse	DELL	MS116c	N/A	N/A
3.	Battery	JUXIANG	6-QW-45(430)-C	/	/
4.	PC	DELL	Inspiron 3670	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 0.92dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 3.93dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 0.92dBi

NOTE: Dutycycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11n20	65M
802.11n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	12V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747	/	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2024.07.08

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	/	2024.07.05
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2024.07.05

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	/	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	/	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
4	Amplifier	HP	8447E	2945A02747	/	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	/	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	/	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	/	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

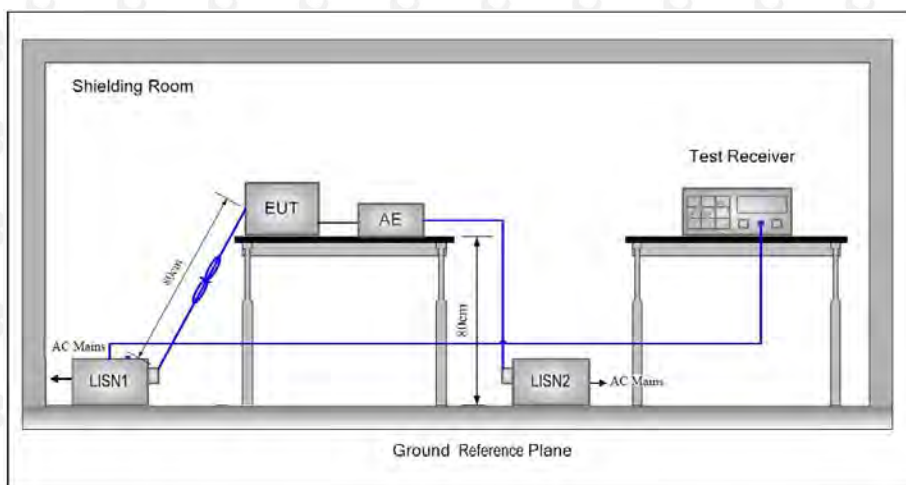

6.2 Limit

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.


- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Test Specification: Line

AC 120V 60Hz


the worst: 802.11b (low channel)

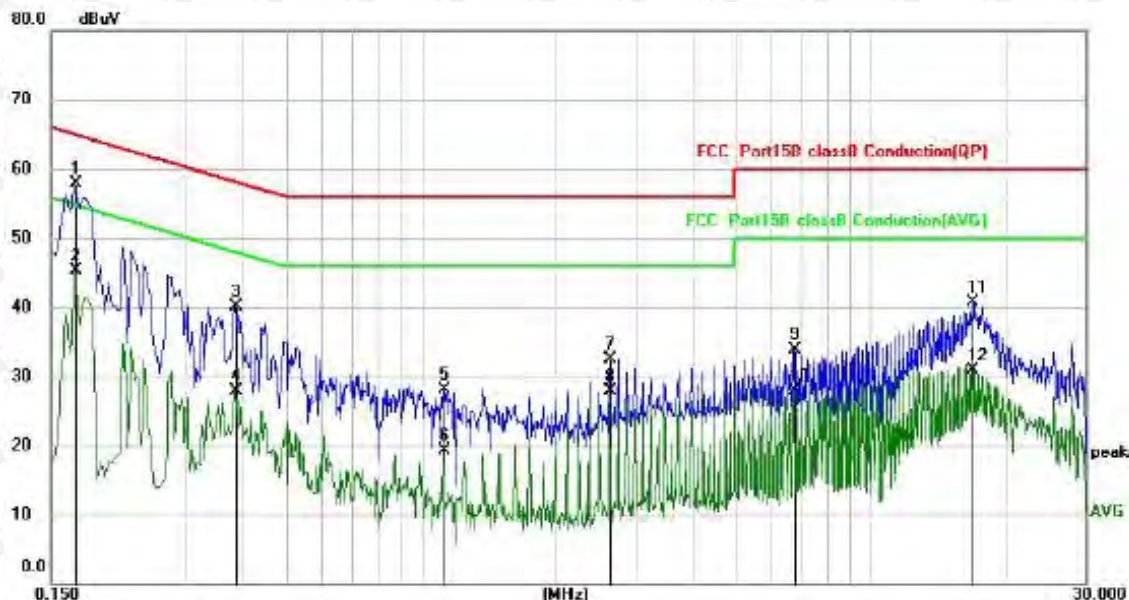


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1700	48.00	9.95	57.95	64.96	-7.01	QP
2		0.1700	35.32	9.95	45.27	54.96	-9.69	AVG
3		0.3860	30.14	9.97	40.11	58.15	-18.04	QP
4		0.3860	17.94	9.97	27.91	48.15	-20.24	AVG
5		1.1220	18.05	10.02	28.07	56.00	-27.93	QP
6		1.1220	9.36	10.02	19.38	46.00	-26.62	AVG
7		2.6180	22.28	10.15	32.43	56.00	-23.57	QP
8		2.6180	17.79	10.15	27.94	46.00	-18.06	AVG
9		6.7340	23.32	10.50	33.82	60.00	-26.18	QP
10		6.7340	17.46	10.50	27.96	50.00	-22.04	AVG
11		16.8260	29.85	10.76	40.61	60.00	-19.39	QP
12		16.8260	20.15	10.76	30.91	50.00	-19.09	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit



Test Specification: Neutral
AC 120V 60Hz
the worst: 802.11b (low channel)

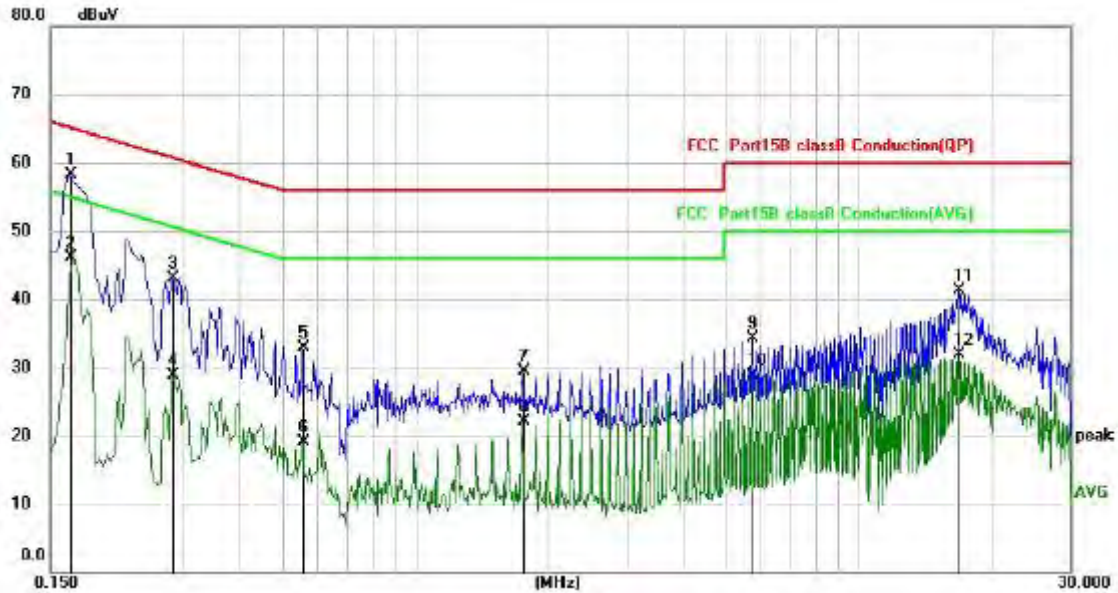

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1	*	0.1660	48.33	9.95	58.28	65.16	-6.88	QP
2		0.1660	36.16	9.95	46.11	55.16	-9.05	AVG
3		0.2819	33.11	9.96	43.07	60.76	-17.69	QP
4		0.2819	18.90	9.96	28.86	50.76	-21.90	AVG
5		0.5580	22.88	10.00	32.88	56.00	-23.12	QP
6		0.5580	9.15	10.00	19.15	46.00	-26.85	AVG
7		1.7460	19.41	10.07	29.48	56.00	-26.52	QP
8		1.7460	12.04	10.07	22.11	46.00	-23.89	AVG
9		5.7340	23.93	10.43	34.36	60.00	-25.64	QP
10		5.7340	18.55	10.43	28.98	50.00	-21.02	AVG
11		16.8260	30.63	10.76	41.39	60.00	-18.61	QP
12		16.8260	21.10	10.76	31.86	50.00	-18.14	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

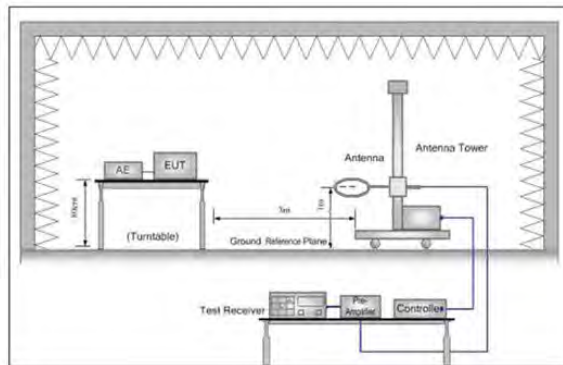


Figure 1. Below 30MHz

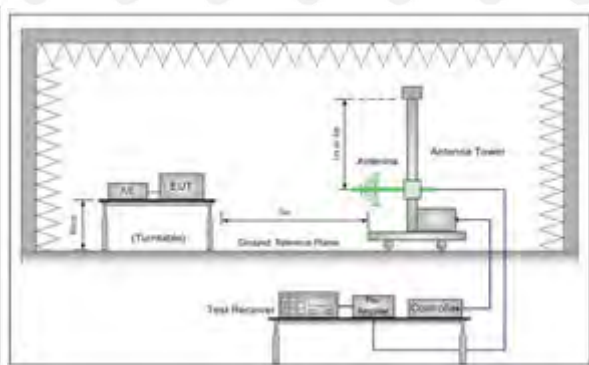


Figure 2. 30MHz to 1GHz

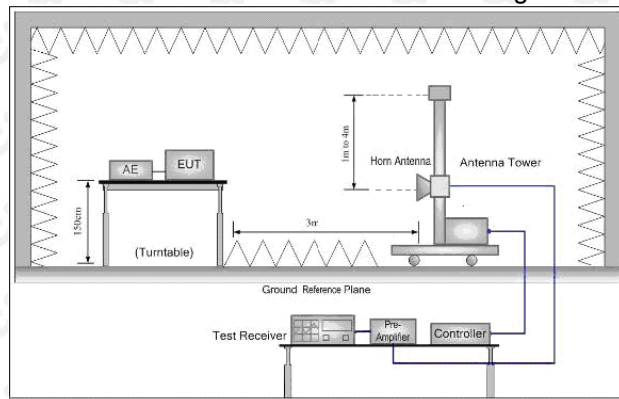


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:


Antenna polarity: H

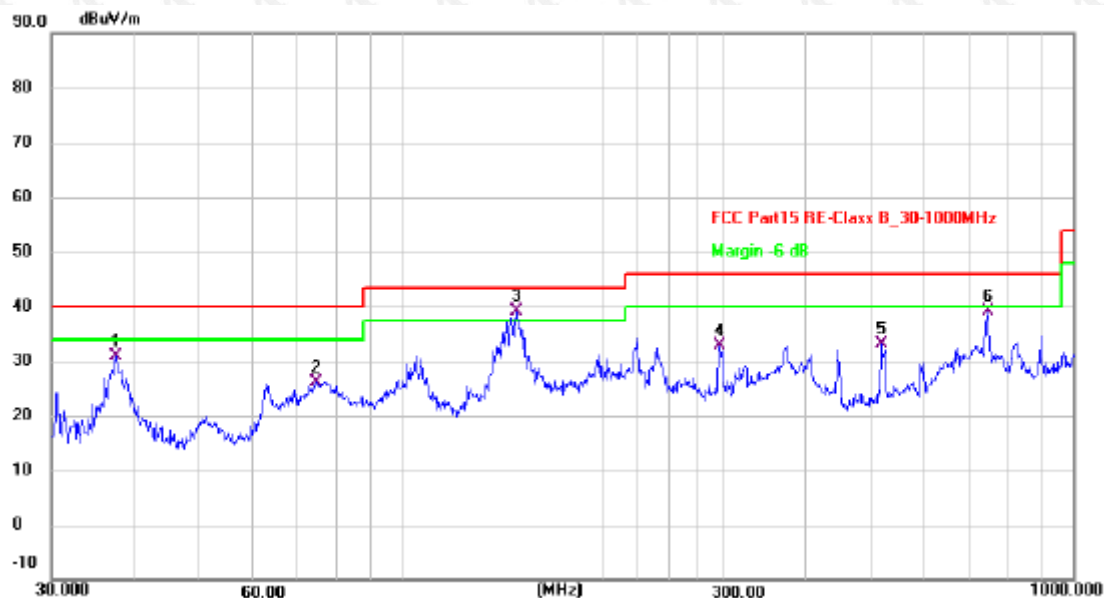

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.4164	44.71	-13.89	30.82	40.00	-9.18	QP
2	74.3955	44.53	-18.36	26.17	40.00	-13.83	QP
3 *	147.9214	51.90	-12.80	39.10	43.50	-4.40	QP
4	297.2240	46.11	-13.15	32.96	46.00	-13.04	QP
5	517.2480	40.95	-7.76	33.19	46.00	-12.81	QP
6	744.8660	41.86	-2.83	39.03	46.00	-6.97	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

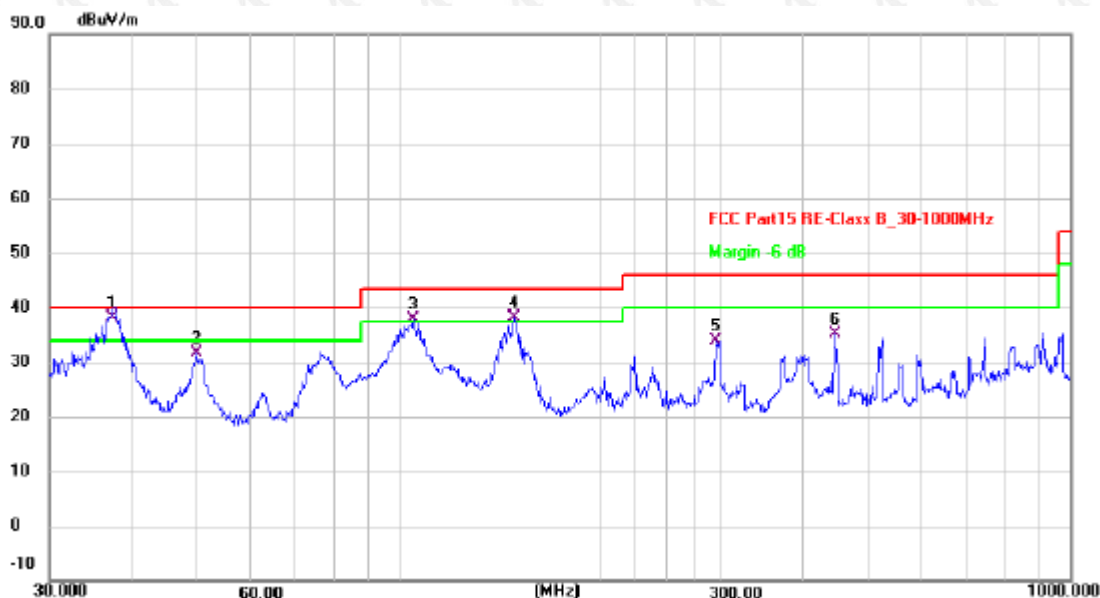

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	37.3579	52.07	-13.90	38.17	40.00	-1.83	QP
2	49.7066	46.84	-15.32	31.52	40.00	-8.48	QP
3 !	104.5361	54.94	-17.09	37.85	43.50	-5.65	QP
4 !	147.9214	50.93	-12.80	38.13	43.50	-5.37	QP
5	295.1468	47.20	-13.26	33.94	46.00	-12.06	QP
6	446.4140	45.09	-10.00	35.09	46.00	-10.91	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.

2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.30	-3.64	62.66	74	-11.34	peak
4824	50.27	-3.64	46.63	54	-7.37	AVG
7236	58.61	-0.95	57.66	74	-16.34	peak
7236	46.54	-0.95	45.59	54	-8.41	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.55	-3.64	60.91	74	-13.09	peak
4824	48.56	-3.64	44.92	54	-9.08	AVG
7236	56.88	-0.95	55.93	74	-18.07	peak
7236	44.67	-0.95	43.72	54	-10.28	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	63.46	-3.51	59.95	74	-14.05	peak
4874	48.37	-3.51	44.86	54	-9.14	AVG
7311	59.02	-0.82	58.20	74	-15.80	peak
7311	43.56	-0.82	42.74	54	-11.26	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	63.60	-3.51	60.09	74	-13.91	peak
4874	48.15	-3.51	44.64	54	-9.36	AVG
7311	57.72	-0.82	56.90	74	-17.10	peak
7311	43.88	-0.82	43.06	54	-10.94	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4924	62.18	-3.43	58.75	74	-15.25	peak
4924	48.56	-3.43	45.13	54	-8.87	AVG
7386	59.00	-0.75	58.25	74	-15.75	peak
7386	43.75	-0.75	43.00	54	-11.00	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4924	64.78	-3.43	61.35	74	-12.65	peak
4924	46.47	-3.43	43.04	54	-10.96	AVG
7386	59.15	-0.75	58.40	74	-15.60	peak
7386	44.05	-0.75	43.30	54	-10.70	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.91	-3.64	61.27	74	-12.73	peak
4824	48.47	-3.64	44.83	54	-9.17	AVG
7236	59.44	-0.95	58.49	74	-15.51	peak
7236	46.73	-0.95	45.78	54	-8.22	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	67.17	-3.64	63.53	74	-10.47	peak
4824	47.05	-3.64	43.41	54	-10.59	AVG
7236	59.00	-0.95	58.05	74	-15.95	peak
7236	44.57	-0.95	43.62	54	-10.38	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	64.63	-3.51	61.12	74	-12.88	peak
4874	50.58	-3.51	47.07	54	-6.93	AVG
7311	59.46	-0.82	58.64	74	-15.36	peak
7311	44.87	-0.82	44.05	54	-9.95	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detection Type
4874	63.61	-3.51	60.10	74	-13.90	peak
4874	48.05	-3.51	44.54	54	-9.46	AVG
7311	59.14	-0.82	58.32	74	-15.68	peak
7311	42.40	-0.82	41.58	54	-12.42	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector Type
4924	64.15	-3.43	60.72	74	-13.28	peak
4924	46.56	-3.43	43.13	54	-10.87	AVG
7386	58.19	-0.75	57.44	74	-16.56	peak
7386	44.24	-0.75	43.49	54	-10.51	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector Type
4924	63.04	-3.43	59.61	74	-14.39	peak
4924	46.66	-3.43	43.23	54	-10.77	AVG
7386	58.64	-0.75	57.89	74	-16.11	peak
7386	42.23	-0.75	41.48	54	-12.52	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	63.85	-3.64	60.21	74	-13.79	peak
4824	48.18	-3.64	44.54	54	-9.46	AVG
7236	57.97	-0.95	57.02	74	-16.98	peak
7236	44.96	-0.95	44.01	54	-9.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	64.47	-3.64	60.83	74	-13.17	peak
4824	49.43	-3.64	45.79	54	-8.21	AVG
7236	58.43	-0.95	57.48	74	-16.52	peak
7236	42.94	-0.95	41.99	54	-12.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874	65.78	-3.51	62.27	74	-11.73	peak
4874	49.42	-3.51	45.91	54	-8.09	AVG
7311	57.83	-0.82	57.01	74	-16.99	peak
7311	43.63	-0.82	42.81	54	-11.19	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detect Type
4874	62.82	-3.51	59.31	74	-14.69	peak
4874	49.33	-3.51	45.82	54	-8.18	AVG
7311	58.15	-0.82	57.33	74	-16.67	peak
7311	44.94	-0.82	44.12	54	-9.88	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detection Type
4924	62.34	-3.43	58.91	74	-15.09	peak
4924	47.96	-3.43	44.53	54	-9.47	AVG
7386	59.79	-0.75	59.04	74	-14.96	peak
7386	42.52	-0.75	41.77	54	-12.23	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Correction Factor (dB)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detection Type
4924	63.43	-3.43	60.00	74	-14.00	peak
4924	48.45	-3.43	45.02	54	-8.98	AVG
7386	57.52	-0.75	56.77	74	-17.23	peak
7386	41.29	-0.75	40.54	54	-13.46	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "—" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.28	-3.63	61.65	74	-12.35	peak
4844	49.15	-3.63	45.52	54	-8.48	AVG
7266	57.55	-0.94	56.61	74	-17.39	peak
7266	46.59	-0.94	45.65	54	-8.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Meter Reading + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.69	-3.63	62.06	74	-11.94	peak
4844	48.47	-3.63	44.84	54	-9.16	AVG
7266	59.21	-0.94	58.27	74	-15.73	peak
7266	45.21	-0.94	44.27	54	-9.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	65.25	-3.51	61.74	74	-12.26	peak
4874	48.22	-3.51	44.71	54	-9.29	AVG
7311	59.95	-0.82	59.13	74	-14.87	peak
7311	45.67	-0.82	44.85	54	-9.15	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.31	-3.51	58.80	74	-15.20	peak
4874	46.50	-3.51	42.99	54	-11.01	AVG
7311	56.69	-0.82	55.87	74	-18.13	peak
7311	43.29	-0.82	42.47	54	-11.53	AVG
Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits						

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.22	-3.43	58.79	74	-15.21	peak
4904	48.97	-3.43	45.54	54	-8.46	AVG
7356	57.37	-0.75	56.62	74	-17.38	peak
7356	41.88	-0.75	41.13	54	-12.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.52	-3.43	59.09	74	-14.91	peak
4904	47.36	-3.43	43.93	54	-10.07	AVG
7356	57.24	-0.75	56.49	74	-17.51	peak
7356	44.18	-0.75	43.43	54	-10.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level
Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.18	-5.81	51.37	74	-22.63	peak
2390	/	-5.81	/	54	/	AVG
2399	64.55	-5.84	58.71	74	-15.29	peak
2399	49.63	-5.84	43.79	54	-10.21	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.52	-5.81	51.71	74	-22.29	peak
2390	/	-5.81	/	54	/	AVG
2399	62.77	-5.84	56.93	74	-17.07	peak
2399	46.84	-5.84	41.00	54	-13.00	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.74	-5.65	52.09	74	-21.91	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.15	-5.65	51.50	74	-22.50	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.51	-5.81	53.70	74	-20.30	peak
2390	/	-5.81	/	54	/	AVG
2399	62.96	-5.84	57.12	74	-16.88	peak
2399	46.13	-5.84	40.29	54	-13.71	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.20	-5.81	51.39	74	-22.61	peak
2390	/	-5.81	/	54	/	AVG
2399	62.35	-5.84	56.51	74	-17.49	peak
2399	45.50	-5.84	39.66	54	-14.34	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.75	-5.65	51.10	74	-22.90	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.13	-5.65	52.48	74	-21.52	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.32	-5.81	50.51	74	-23.49	peak
2390	/	-5.81	/	54	/	AVG
2399	63.97	-5.84	58.13	74	-15.87	peak
2399	47.84	-5.84	42.00	54	-12.00	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	55.82	-5.81	50.01	74	-23.99	peak
2390	/	-5.81	/	54	/	AVG
2399	61.07	-5.84	55.23	74	-18.77	peak
2399	47.42	-5.84	41.58	54	-12.42	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.20	-5.65	50.55	74	-23.45	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.42	-5.65	49.77	74	-24.23	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.56	-5.81	51.75	74	-22.25	peak
2390	/	-5.81	/	54	/	AVG
2399	63.20	-5.84	57.36	74	-16.64	peak
2399	45.83	-5.84	39.99	54	-14.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.66	-5.81	52.85	74	-21.15	peak
2390	/	-5.81	/	54	/	AVG
2399	61.56	-5.84	55.72	74	-18.28	peak
2399	45.75	-5.84	39.91	54	-14.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.83	-5.65	52.18	74	-21.82	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.35	-5.65	51.70	74	-22.30	peak
2483.5	/	-5.65	/	54	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

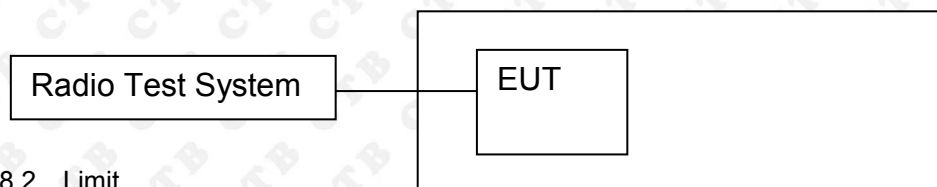

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
Below 30MHz:
RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold
Above 30MHz:
RBW = 100KHz, VBW = 300KHz, Sweep = auto
Detector function = peak, Trace = max hold


8.4 Test Result

ANT1:



BAND EDGE Graphs

802.11g/LCH

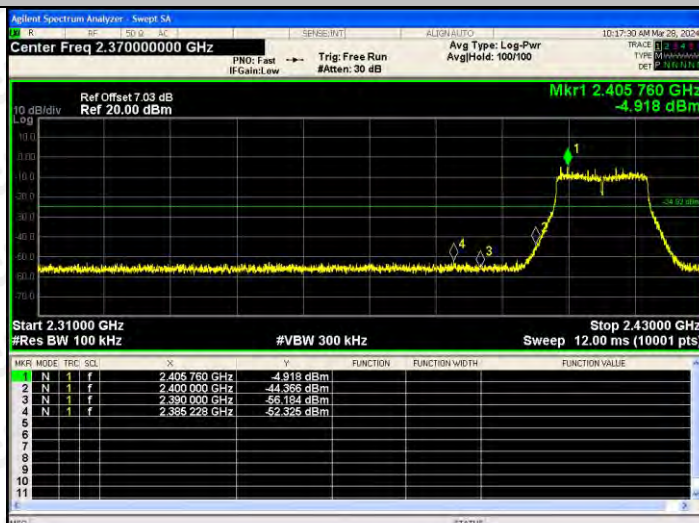


802.11g/HCH




BAND EDGE Graphs

802.11n(HT20)/L
CH

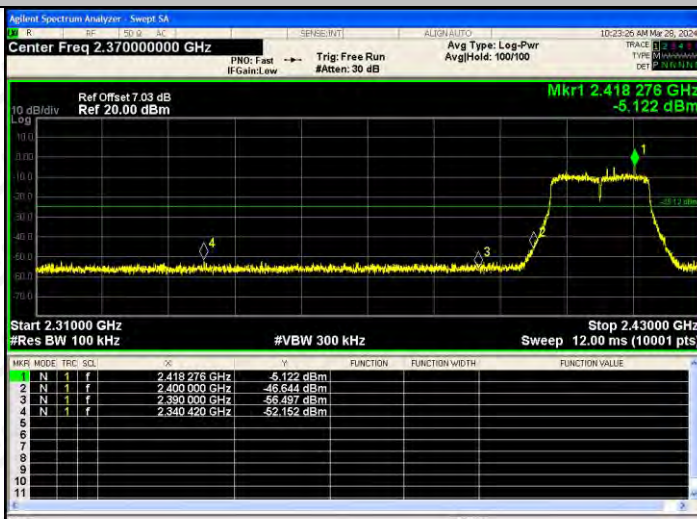


802.11n(HT20)/H
CH

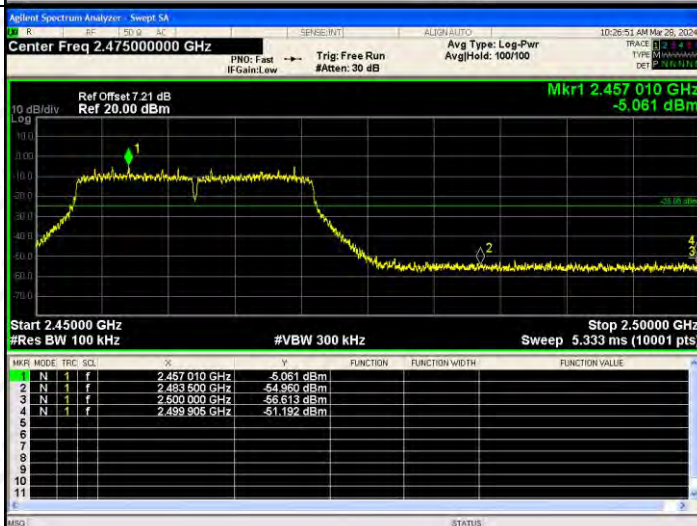

BAND EDGE Graphs

802.11n(HT40)/L
CH

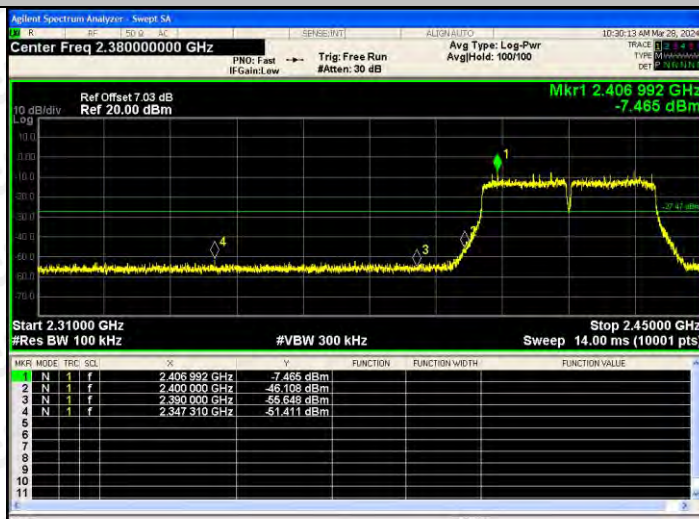




802.11n(HT40)/H
CH






RF Conducted Spurious Emissions Graphs




802.11b /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.4114 GHz -0.717 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MFR</th><th>MODE</th><th>TRG</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4114 GHz</td><td>-0.717 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.0618 GHz</td><td>-40.852 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.8943 GHz</td><td>-54.816 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.0634 GHz</td><td>-53.934 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5301 GHz</td><td>-54.174 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	MFR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4114 GHz	-0.717 dBm				2	N	1	f	25.0618 GHz	-40.852 dBm				3	N	1	f	4.8943 GHz	-54.816 dBm				4	N	1	f	7.0634 GHz	-53.934 dBm				5	N	1	f	9.5301 GHz	-54.174 dBm				6									7									8									9									10									11								
MFR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.4114 GHz	-0.717 dBm																																																																																																								
2	N	1	f	25.0618 GHz	-40.852 dBm																																																																																																								
3	N	1	f	4.8943 GHz	-54.816 dBm																																																																																																								
4	N	1	f	7.0634 GHz	-53.934 dBm																																																																																																								
5	N	1	f	9.5301 GHz	-54.174 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
802.11b /MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.4405 GHz -1.511 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MFR</th><th>MODE</th><th>TRG</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4405 GHz</td><td>-1.511 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>25.0847 GHz</td><td>-40.933 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0593 GHz</td><td>-54.218 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.1672 GHz</td><td>-54.120 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5245 GHz</td><td>-54.338 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	MFR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4405 GHz	-1.511 dBm				2	N	1	f	25.0847 GHz	-40.933 dBm				3	N	1	f	5.0593 GHz	-54.218 dBm				4	N	1	f	7.1672 GHz	-54.120 dBm				5	N	1	f	9.5245 GHz	-54.338 dBm				6									7									8									9									10									11								
MFR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.4405 GHz	-1.511 dBm																																																																																																								
2	N	1	f	25.0847 GHz	-40.933 dBm																																																																																																								
3	N	1	f	5.0593 GHz	-54.218 dBm																																																																																																								
4	N	1	f	7.1672 GHz	-54.120 dBm																																																																																																								
5	N	1	f	9.5245 GHz	-54.338 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
802.11b /HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.21 dB Ref 15.00 dBm Mkr1 2.4599 GHz -1.649 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MFR</th><th>MODE</th><th>TRG</th><th>SCN</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4599 GHz</td><td>-1.649 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.5999 GHz</td><td>-40.451 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.0214 GHz</td><td>-54.896 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.4091 GHz</td><td>-53.826 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.5599 GHz</td><td>-55.077 dBm</td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	MFR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4599 GHz	-1.649 dBm				2	N	1	f	24.5999 GHz	-40.451 dBm				3	N	1	f	5.0214 GHz	-54.896 dBm				4	N	1	f	7.4091 GHz	-53.826 dBm				5	N	1	f	9.5599 GHz	-55.077 dBm				6									7									8									9									10									11								
MFR	MODE	TRG	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	f	2.4599 GHz	-1.649 dBm																																																																																																								
2	N	1	f	24.5999 GHz	-40.451 dBm																																																																																																								
3	N	1	f	5.0214 GHz	-54.896 dBm																																																																																																								
4	N	1	f	7.4091 GHz	-53.826 dBm																																																																																																								
5	N	1	f	9.5599 GHz	-55.077 dBm																																																																																																								
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

RF Conducted Spurious Emissions Graphs

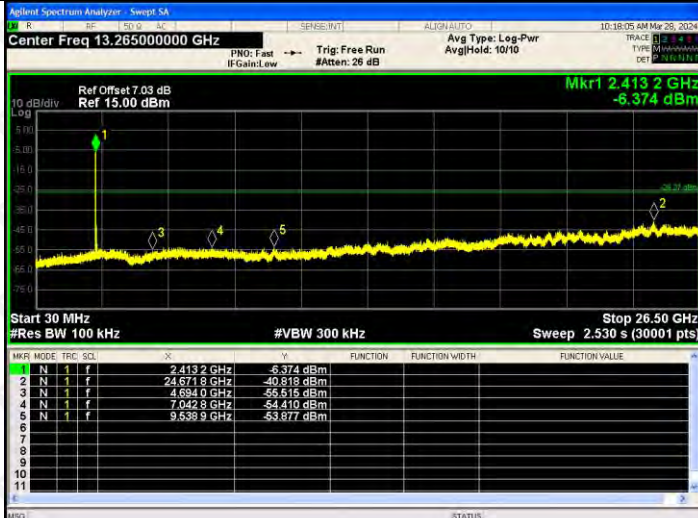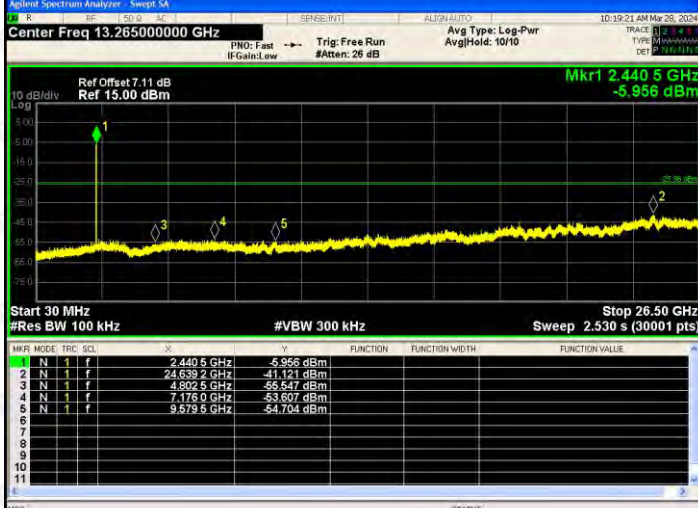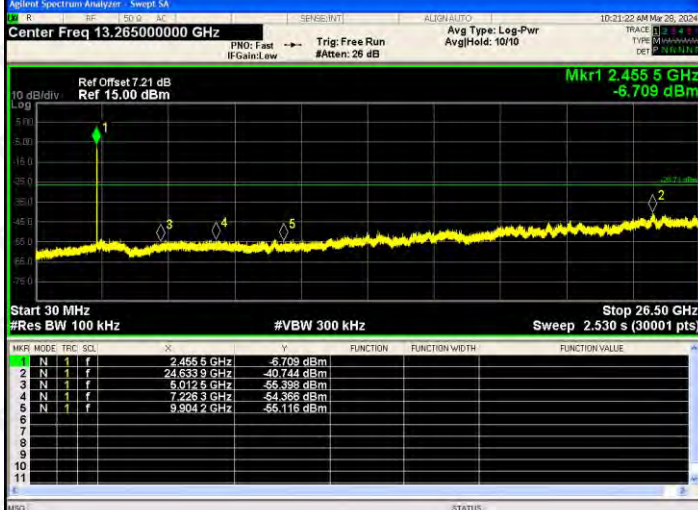
802.11g /LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 10:18:05 AM Mar 26, 2024 Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.413 2 GHz -6.374 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.413 2 GHz</td><td>-6.374 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.671 8 GHz</td><td>-40.818 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.694 0 GHz</td><td>-55.515 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.042 8 GHz</td><td>-54.410 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.538 9 GHz</td><td>-53.877 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.413 2 GHz	-6.374 dBm				2	N	1	f	24.671 8 GHz	-40.818 dBm				3	N	1	f	4.694 0 GHz	-55.515 dBm				4	N	1	f	7.042 8 GHz	-54.410 dBm				5	N	1	f	9.538 9 GHz	-53.877 dBm				
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.413 2 GHz	-6.374 dBm																																																			
2	N	1	f	24.671 8 GHz	-40.818 dBm																																																			
3	N	1	f	4.694 0 GHz	-55.515 dBm																																																			
4	N	1	f	7.042 8 GHz	-54.410 dBm																																																			
5	N	1	f	9.538 9 GHz	-53.877 dBm																																																			
802.11g /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 10:19:21 AM Mar 26, 2024 Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.440 5 GHz -5.956 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440 5 GHz</td><td>-5.956 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.639 2 GHz</td><td>-41.121 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.802 5 GHz</td><td>-55.547 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.176 0 GHz</td><td>-53.807 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.573 5 GHz</td><td>-54.704 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 5 GHz	-5.956 dBm				2	N	1	f	24.639 2 GHz	-41.121 dBm				3	N	1	f	4.802 5 GHz	-55.547 dBm				4	N	1	f	7.176 0 GHz	-53.807 dBm				5	N	1	f	9.573 5 GHz	-54.704 dBm				
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.440 5 GHz	-5.956 dBm																																																			
2	N	1	f	24.639 2 GHz	-41.121 dBm																																																			
3	N	1	f	4.802 5 GHz	-55.547 dBm																																																			
4	N	1	f	7.176 0 GHz	-53.807 dBm																																																			
5	N	1	f	9.573 5 GHz	-54.704 dBm																																																			
802.11g /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 10:21:22 AM Mar 26, 2024 Ref Offset 7.21 dB Ref 15.00 dBm Mkr1 2.455 5 GHz -6.709 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.455 5 GHz</td><td>-6.709 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.633 9 GHz</td><td>-40.744 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.012 5 GHz</td><td>-56.398 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.228 3 GHz</td><td>-54.356 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.504 2 GHz</td><td>-55.116 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.455 5 GHz	-6.709 dBm				2	N	1	f	24.633 9 GHz	-40.744 dBm				3	N	1	f	5.012 5 GHz	-56.398 dBm				4	N	1	f	7.228 3 GHz	-54.356 dBm				5	N	1	f	9.504 2 GHz	-55.116 dBm				
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.455 5 GHz	-6.709 dBm																																																			
2	N	1	f	24.633 9 GHz	-40.744 dBm																																																			
3	N	1	f	5.012 5 GHz	-56.398 dBm																																																			
4	N	1	f	7.228 3 GHz	-54.356 dBm																																																			
5	N	1	f	9.504 2 GHz	-55.116 dBm																																																			

RF Conducted Spurious Emissions Graphs

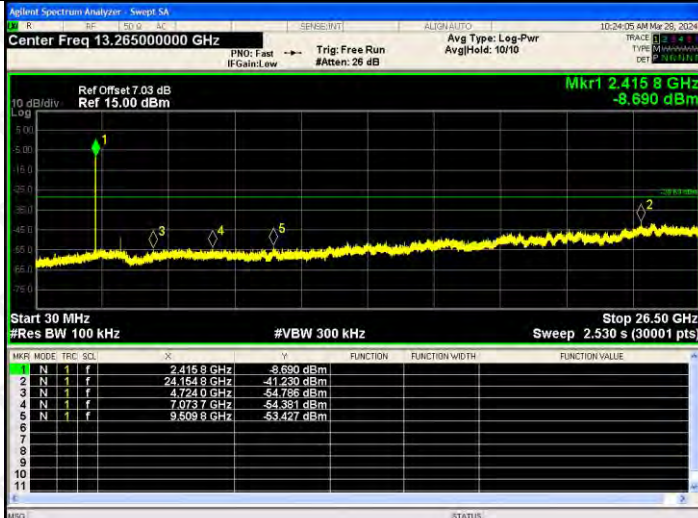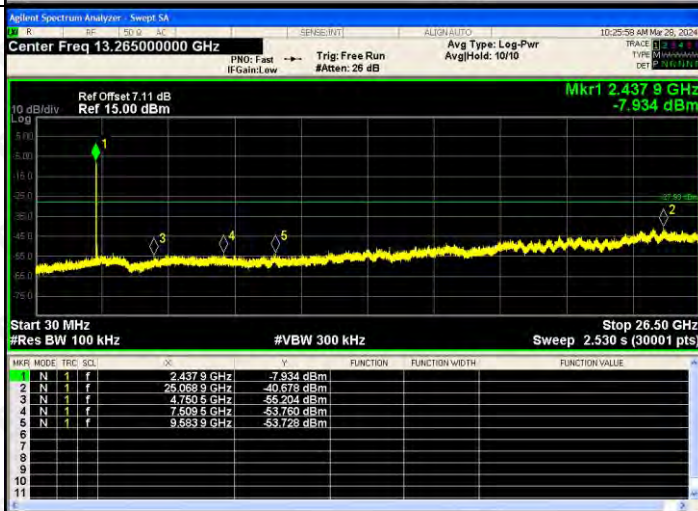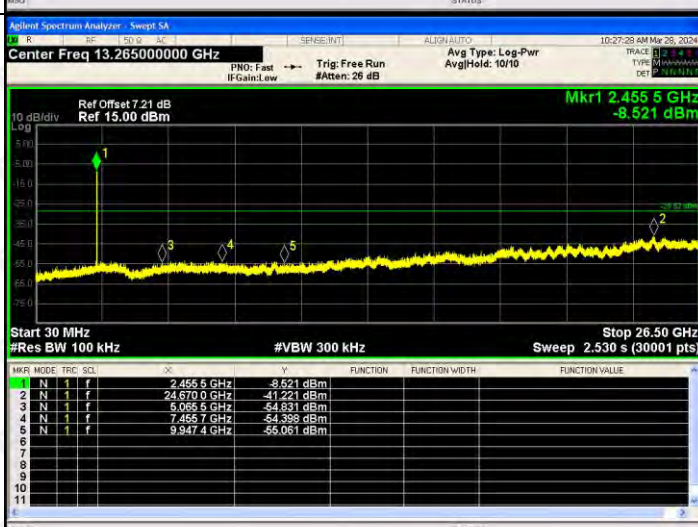802.11n (HT20)/ LCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4158 GHz</td><td>-8.690 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.1548 GHz</td><td>-41.230 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.7240 GHz</td><td>-54.796 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.0737 GHz</td><td>-54.381 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.5099 GHz</td><td>-53.127 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4158 GHz	-8.690 dBm				2	N	24.1548 GHz	-41.230 dBm				3	N	4.7240 GHz	-54.796 dBm				4	N	7.0737 GHz	-54.381 dBm				5	N	9.5099 GHz	-53.127 dBm				
MNR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	2.4158 GHz	-8.690 dBm																																									
2	N	24.1548 GHz	-41.230 dBm																																									
3	N	4.7240 GHz	-54.796 dBm																																									
4	N	7.0737 GHz	-54.381 dBm																																									
5	N	9.5099 GHz	-53.127 dBm																																									
802.11 n(HT20) /MCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4379 GHz</td><td>-7.934 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>25.0689 GHz</td><td>-40.678 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.7505 GHz</td><td>-55.204 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.5095 GHz</td><td>-53.750 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.5539 GHz</td><td>-53.728 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4379 GHz	-7.934 dBm				2	N	25.0689 GHz	-40.678 dBm				3	N	4.7505 GHz	-55.204 dBm				4	N	7.5095 GHz	-53.750 dBm				5	N	9.5539 GHz	-53.728 dBm				
MNR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	2.4379 GHz	-7.934 dBm																																									
2	N	25.0689 GHz	-40.678 dBm																																									
3	N	4.7505 GHz	-55.204 dBm																																									
4	N	7.5095 GHz	-53.750 dBm																																									
5	N	9.5539 GHz	-53.728 dBm																																									
802.11 n(HT20) /HCH	 <table><tr><th>MNR</th><th>MODE</th><th>FREQ</th><th>POWER</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>2.4555 GHz</td><td>-8.521 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>24.6700 GHz</td><td>-41.224 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>5.0555 GHz</td><td>-54.831 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.4557 GHz</td><td>-54.398 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.9474 GHz</td><td>-55.021 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	2.4555 GHz	-8.521 dBm				2	N	24.6700 GHz	-41.224 dBm				3	N	5.0555 GHz	-54.831 dBm				4	N	7.4557 GHz	-54.398 dBm				5	N	9.9474 GHz	-55.021 dBm				
MNR	MODE	FREQ	POWER	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	2.4555 GHz	-8.521 dBm																																									
2	N	24.6700 GHz	-41.224 dBm																																									
3	N	5.0555 GHz	-54.831 dBm																																									
4	N	7.4557 GHz	-54.398 dBm																																									
5	N	9.9474 GHz	-55.021 dBm																																									

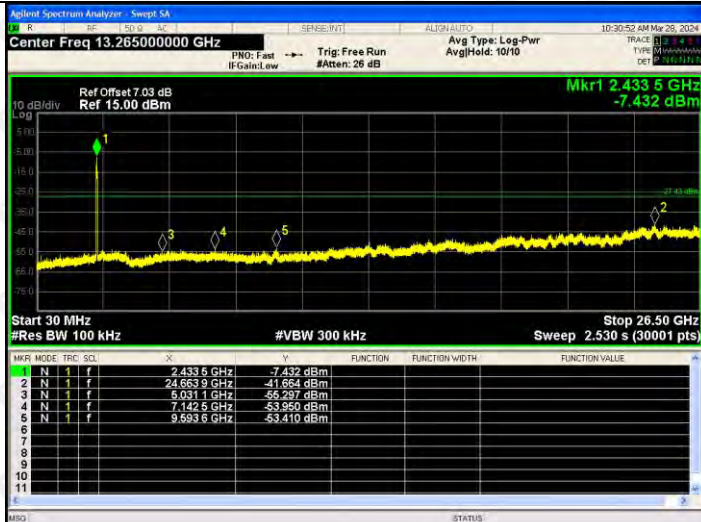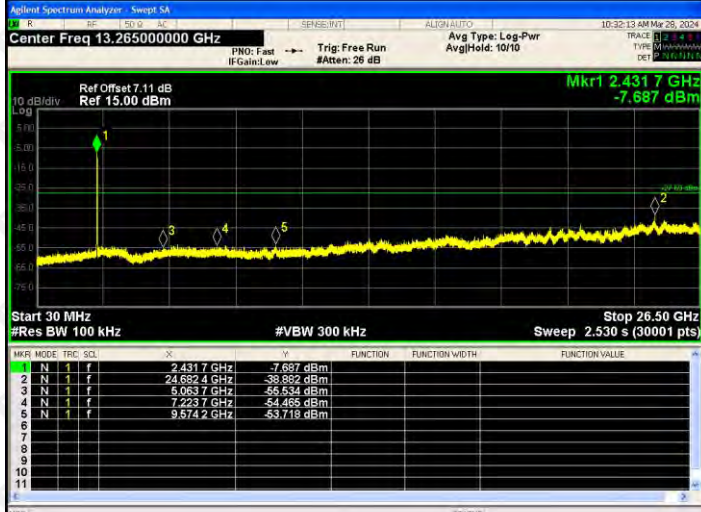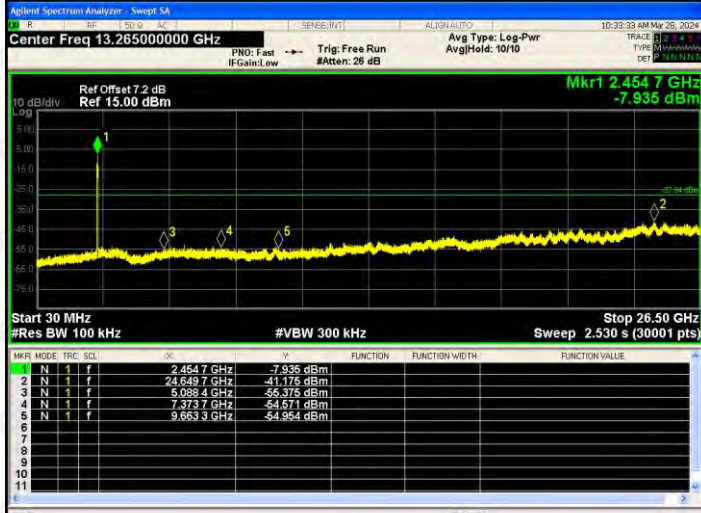
802.11n (HT40)/ LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.433 5 GHz -7.432 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.433 5 GHz</td><td>-7.432 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.663 9 GHz</td><td>-41.684 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.031 1 GHz</td><td>-55.297 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.142 5 GHz</td><td>-53.950 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.693 6 GHz</td><td>-53.410 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.433 5 GHz	-7.432 dBm				2	N	1	f	24.663 9 GHz	-41.684 dBm				3	N	1	f	5.031 1 GHz	-55.297 dBm				4	N	1	f	7.142 5 GHz	-53.950 dBm				5	N	1	f	9.693 6 GHz	-53.410 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.433 5 GHz	-7.432 dBm																																																		
2	N	1	f	24.663 9 GHz	-41.684 dBm																																																		
3	N	1	f	5.031 1 GHz	-55.297 dBm																																																		
4	N	1	f	7.142 5 GHz	-53.950 dBm																																																		
5	N	1	f	9.693 6 GHz	-53.410 dBm																																																		
802.11 n(HT40) /MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.431 7 GHz -7.687 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.431 7 GHz</td><td>-7.687 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.682 4 GHz</td><td>-38.882 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.063 7 GHz</td><td>-55.534 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.223 7 GHz</td><td>-54.455 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.574 2 GHz</td><td>-53.718 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.431 7 GHz	-7.687 dBm				2	N	1	f	24.682 4 GHz	-38.882 dBm				3	N	1	f	5.063 7 GHz	-55.534 dBm				4	N	1	f	7.223 7 GHz	-54.455 dBm				5	N	1	f	9.574 2 GHz	-53.718 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.431 7 GHz	-7.687 dBm																																																		
2	N	1	f	24.682 4 GHz	-38.882 dBm																																																		
3	N	1	f	5.063 7 GHz	-55.534 dBm																																																		
4	N	1	f	7.223 7 GHz	-54.455 dBm																																																		
5	N	1	f	9.574 2 GHz	-53.718 dBm																																																		
802.11 n(HT40) /HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz Ref Offset 7.2 dB Ref 15.00 dBm Mkr1 2.454 7 GHz -7.935 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.454 7 GHz</td><td>-7.935 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.649 7 GHz</td><td>-41.175 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.088 4 GHz</td><td>-55.375 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.373 7 GHz</td><td>-54.674 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.663 3 GHz</td><td>-54.954 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.454 7 GHz	-7.935 dBm				2	N	1	f	24.649 7 GHz	-41.175 dBm				3	N	1	f	5.088 4 GHz	-55.375 dBm				4	N	1	f	7.373 7 GHz	-54.674 dBm				5	N	1	f	9.663 3 GHz	-54.954 dBm			
MKR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.454 7 GHz	-7.935 dBm																																																		
2	N	1	f	24.649 7 GHz	-41.175 dBm																																																		
3	N	1	f	5.088 4 GHz	-55.375 dBm																																																		
4	N	1	f	7.373 7 GHz	-54.674 dBm																																																		
5	N	1	f	9.663 3 GHz	-54.954 dBm																																																		

ANT2:

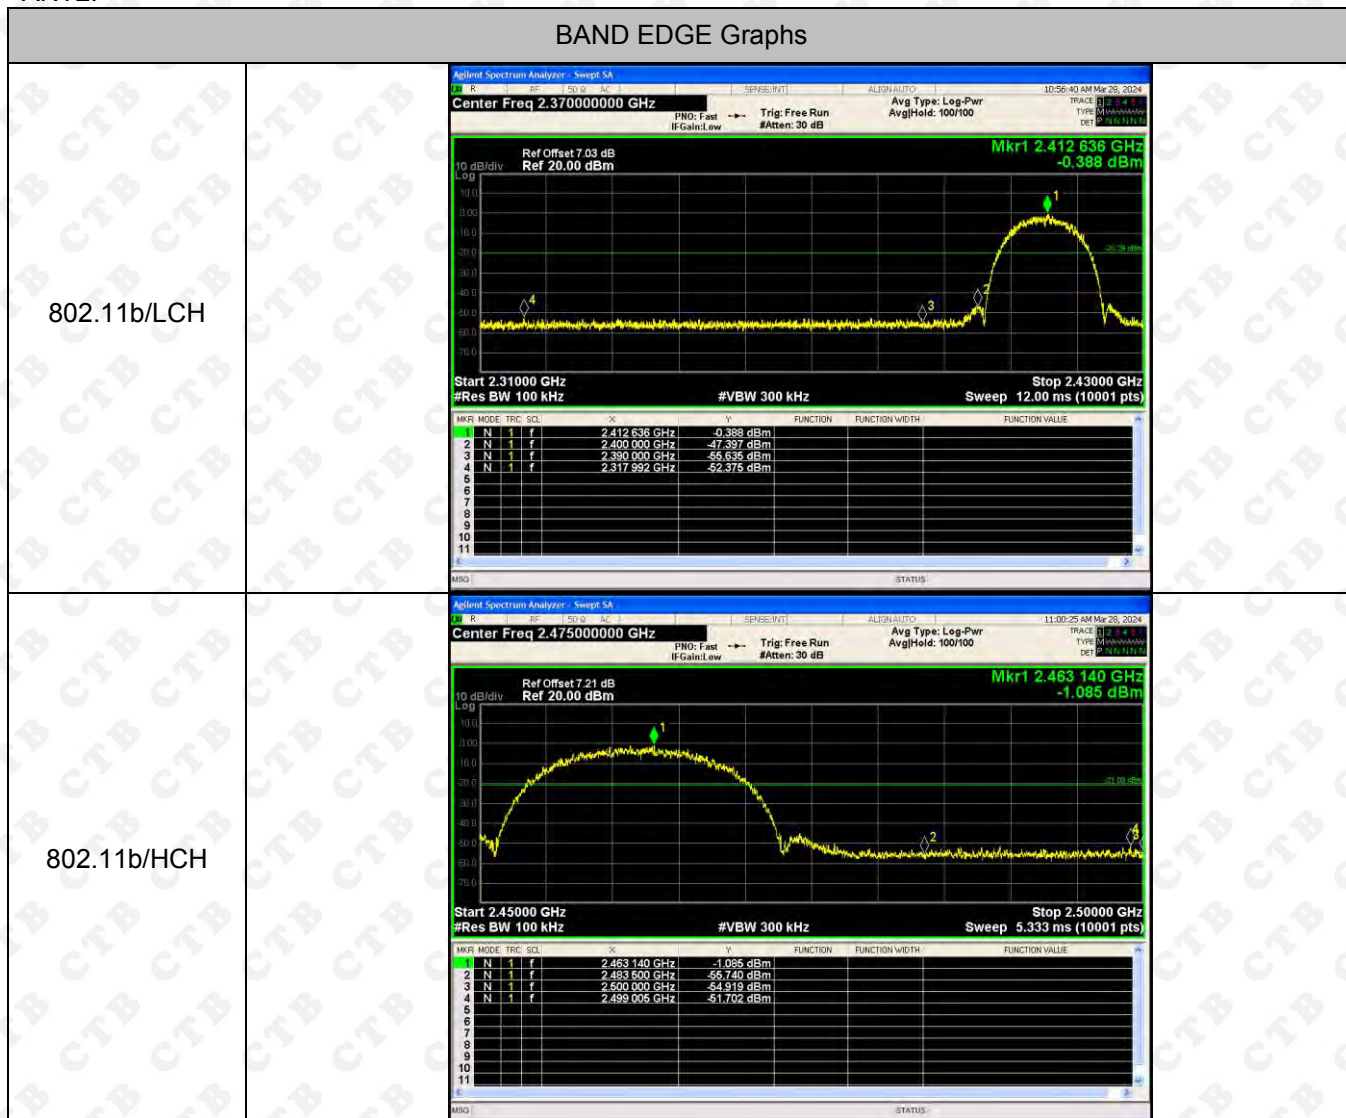


BAND EDGE Graphs

802.11g/LCH

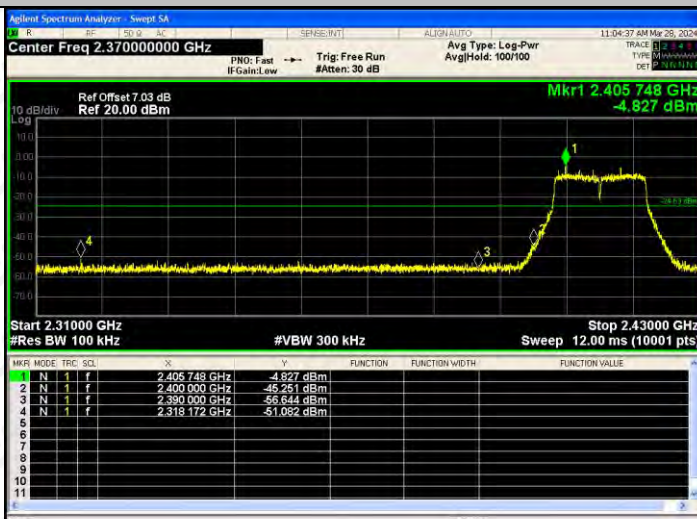


802.11g/HCH

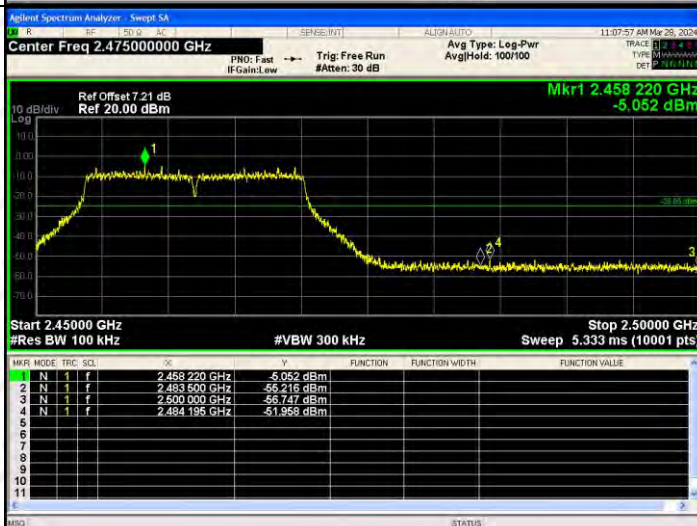


BAND EDGE Graphs

802.11n(HT20)/L
CH

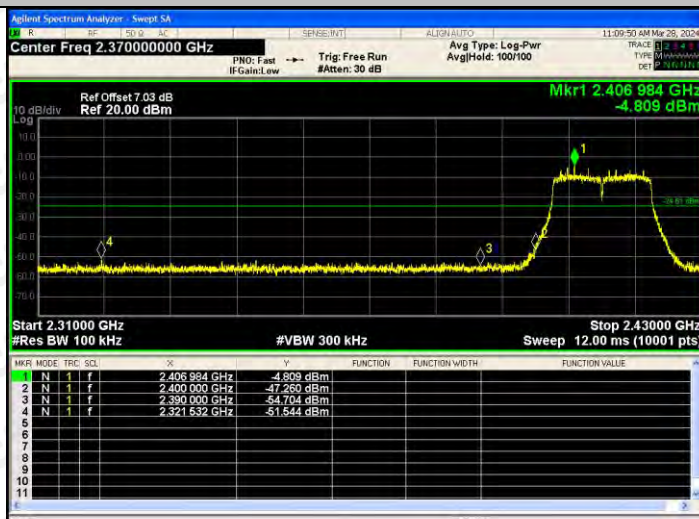


802.11n(HT20)/H
CH

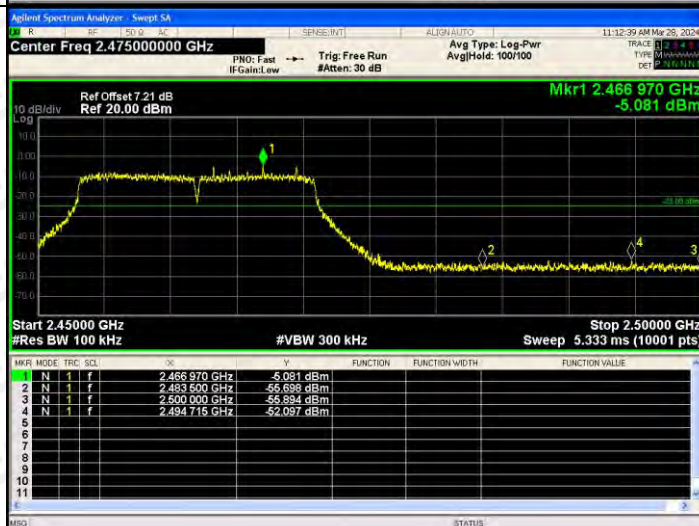


BAND EDGE Graphs

802.11n(HT40)/L
CH

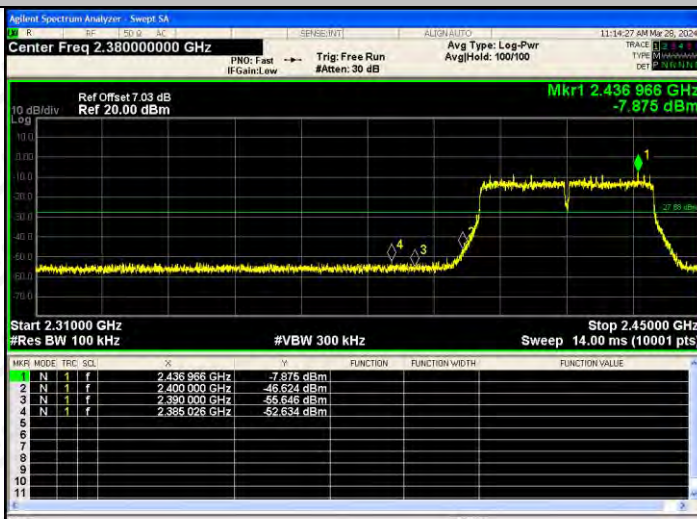




802.11n(HT40)/H
CH

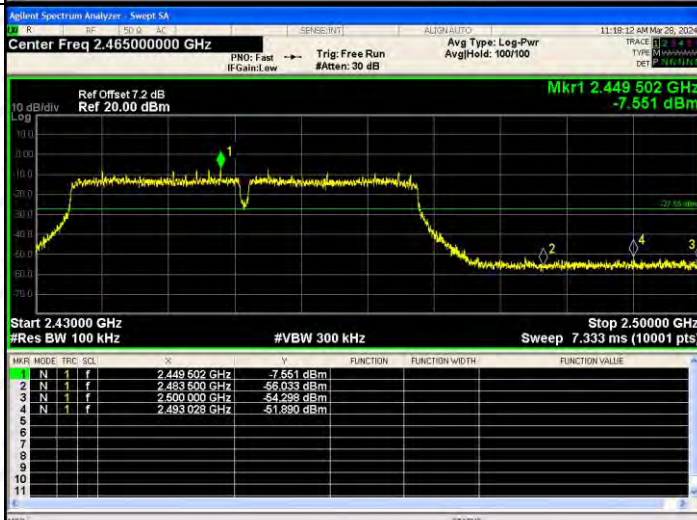




RF Conducted Spurious Emissions Graphs

802.11b /LCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.4123 GHz -1.078 dBm Mkr2 2.4397 GHz -2.503 dBm Mkr3 4.7614 GHz -55.732 dBm Mkr4 7.1169 GHz -54.136 dBm Mkr5 9.5495 GHz -53.660 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>2.4123 GHz</td><td>-1.078 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>2.4397 GHz</td><td>-2.503 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>4.7614 GHz</td><td>-55.732 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>7.1169 GHz</td><td>-54.136 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>9.5495 GHz</td><td>-53.660 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Freq	Power	Function	Function Width	Function Value	1	N	2.4123 GHz	-1.078 dBm				2	N	2.4397 GHz	-2.503 dBm				3	N	4.7614 GHz	-55.732 dBm				4	N	7.1169 GHz	-54.136 dBm				5	N	9.5495 GHz	-53.660 dBm				
Mkr	Mode	Freq	Power	Function	Function Width	Function Value																																						
1	N	2.4123 GHz	-1.078 dBm																																									
2	N	2.4397 GHz	-2.503 dBm																																									
3	N	4.7614 GHz	-55.732 dBm																																									
4	N	7.1169 GHz	-54.136 dBm																																									
5	N	9.5495 GHz	-53.660 dBm																																									
802.11b /MCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.4397 GHz -2.503 dBm Mkr2 4.7614 GHz -55.732 dBm Mkr3 7.1169 GHz -54.136 dBm Mkr4 9.5495 GHz -53.660 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>2.4397 GHz</td><td>-2.503 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>4.7614 GHz</td><td>-55.732 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>7.1169 GHz</td><td>-54.136 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>9.5495 GHz</td><td>-53.660 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Freq	Power	Function	Function Width	Function Value	1	N	2.4397 GHz	-2.503 dBm				2	N	4.7614 GHz	-55.732 dBm				3	N	7.1169 GHz	-54.136 dBm				4	N	9.5495 GHz	-53.660 dBm											
Mkr	Mode	Freq	Power	Function	Function Width	Function Value																																						
1	N	2.4397 GHz	-2.503 dBm																																									
2	N	4.7614 GHz	-55.732 dBm																																									
3	N	7.1169 GHz	-54.136 dBm																																									
4	N	9.5495 GHz	-53.660 dBm																																									
802.11b /HCH	Agilent Spectrum Analyzer - Sweep SA Center Freq 13.265000000 GHz PNO: Fast IF Gain: Low Trig: Free Run #Atten: 26 dB Avg Type: Log-Pwr Avg/Hold: 10/10 Ref Offset 7.21 dB Ref 15.00 dBm Mkr1 2.4635 GHz -1.612 dBm Mkr2 4.7920 GHz -54.776 dBm Mkr3 7.6837 GHz -54.444 dBm Mkr4 10.0215 GHz -55.479 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>Mkr</th><th>Mode</th><th>Freq</th><th>Power</th><th>Function</th><th>Function Width</th><th>Function Value</th></tr><tr><td>1</td><td>N</td><td>2.4635 GHz</td><td>-1.612 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>4.7920 GHz</td><td>-54.776 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>7.6837 GHz</td><td>-54.444 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>10.0215 GHz</td><td>-55.479 dBm</td><td></td><td></td><td></td></tr></table>	Mkr	Mode	Freq	Power	Function	Function Width	Function Value	1	N	2.4635 GHz	-1.612 dBm				2	N	4.7920 GHz	-54.776 dBm				3	N	7.6837 GHz	-54.444 dBm				4	N	10.0215 GHz	-55.479 dBm											
Mkr	Mode	Freq	Power	Function	Function Width	Function Value																																						
1	N	2.4635 GHz	-1.612 dBm																																									
2	N	4.7920 GHz	-54.776 dBm																																									
3	N	7.6837 GHz	-54.444 dBm																																									
4	N	10.0215 GHz	-55.479 dBm																																									




RF Conducted Spurious Emissions Graphs

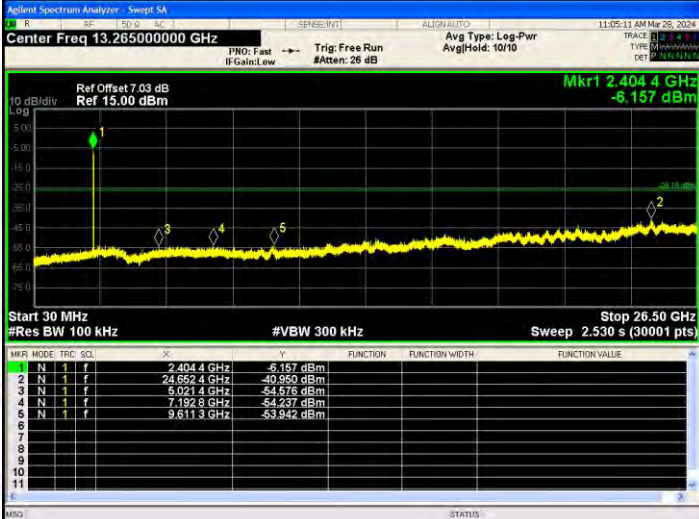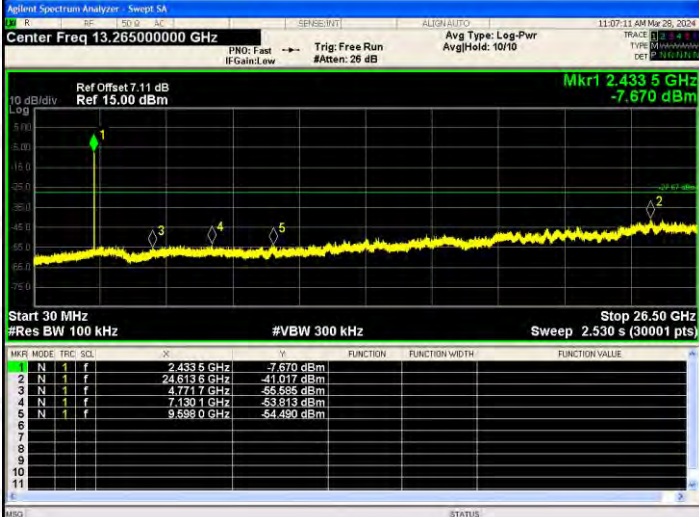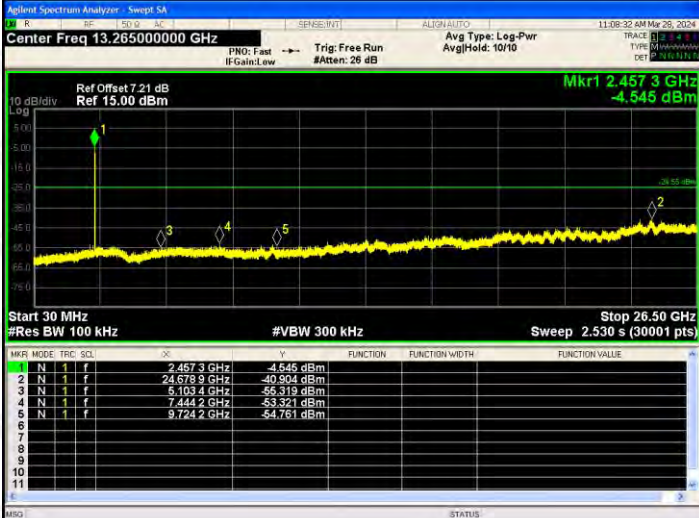802.11g /LCH	
802.11g /MCH	
802.11g /HCH	

RF Conducted Spurious Emissions Graphs

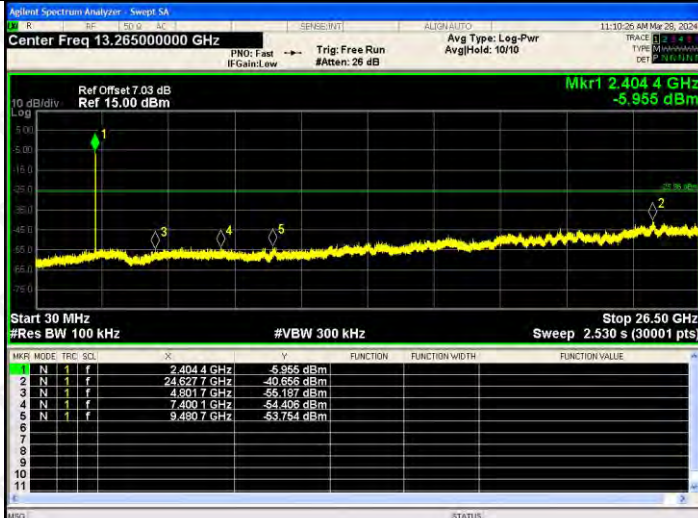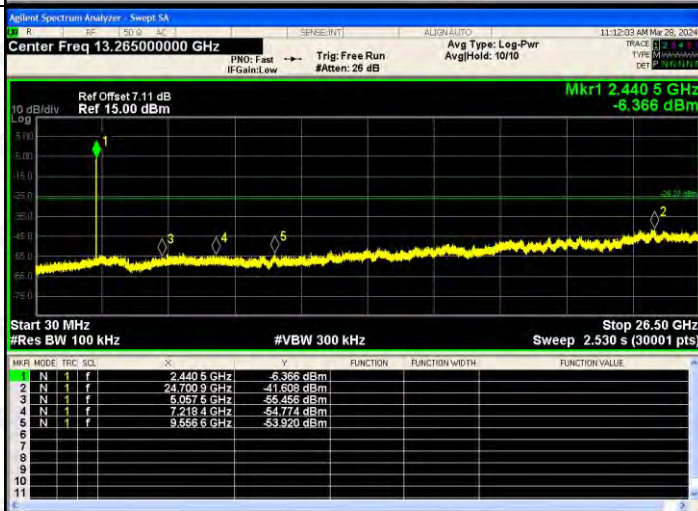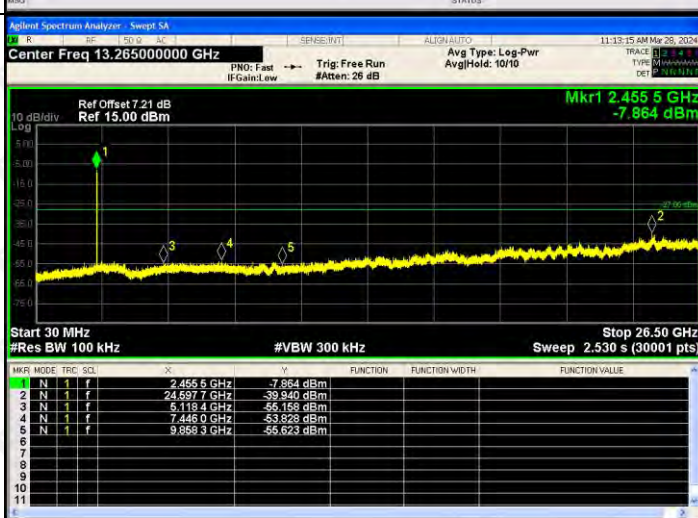802.11n (HT20)/ LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.404 4 GHz -5.955 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.404 4 GHz</td><td>-5.955 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.627 7 GHz</td><td>-40.656 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.801 7 GHz</td><td>-55.157 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.400 1 GHz</td><td>-54.406 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.480 7 GHz</td><td>-53.754 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.404 4 GHz	-5.955 dBm				2	N	1	f	24.627 7 GHz	-40.656 dBm				3	N	1	f	4.801 7 GHz	-55.157 dBm				4	N	1	f	7.400 1 GHz	-54.406 dBm				5	N	1	f	9.480 7 GHz	-53.754 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.404 4 GHz	-5.955 dBm																																																		
2	N	1	f	24.627 7 GHz	-40.656 dBm																																																		
3	N	1	f	4.801 7 GHz	-55.157 dBm																																																		
4	N	1	f	7.400 1 GHz	-54.406 dBm																																																		
5	N	1	f	9.480 7 GHz	-53.754 dBm																																																		
802.11 n(HT20) /MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.440 5 GHz -6.366 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.440 5 GHz</td><td>-6.366 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.700 9 GHz</td><td>-41.606 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.057 5 GHz</td><td>-55.456 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.218 4 GHz</td><td>-54.774 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.558 6 GHz</td><td>-53.920 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 5 GHz	-6.366 dBm				2	N	1	f	24.700 9 GHz	-41.606 dBm				3	N	1	f	5.057 5 GHz	-55.456 dBm				4	N	1	f	7.218 4 GHz	-54.774 dBm				5	N	1	f	9.558 6 GHz	-53.920 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.440 5 GHz	-6.366 dBm																																																		
2	N	1	f	24.700 9 GHz	-41.606 dBm																																																		
3	N	1	f	5.057 5 GHz	-55.456 dBm																																																		
4	N	1	f	7.218 4 GHz	-54.774 dBm																																																		
5	N	1	f	9.558 6 GHz	-53.920 dBm																																																		
802.11 n(HT20) /HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 7.21 dB Ref 15.00 dBm Mkr1 2.455 5 GHz -7.864 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.455 5 GHz</td><td>-7.864 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.697 7 GHz</td><td>-39.940 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.118 4 GHz</td><td>-55.158 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.445 0 GHz</td><td>-53.828 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.558 3 GHz</td><td>-55.623 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.455 5 GHz	-7.864 dBm				2	N	1	f	24.697 7 GHz	-39.940 dBm				3	N	1	f	5.118 4 GHz	-55.158 dBm				4	N	1	f	7.445 0 GHz	-53.828 dBm				5	N	1	f	9.558 3 GHz	-55.623 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.455 5 GHz	-7.864 dBm																																																		
2	N	1	f	24.697 7 GHz	-39.940 dBm																																																		
3	N	1	f	5.118 4 GHz	-55.158 dBm																																																		
4	N	1	f	7.445 0 GHz	-53.828 dBm																																																		
5	N	1	f	9.558 3 GHz	-55.623 dBm																																																		

RF Conducted Spurious Emissions Graphs

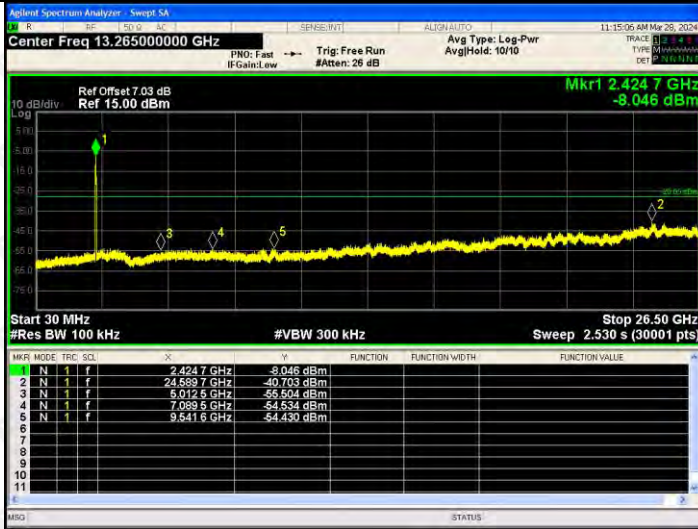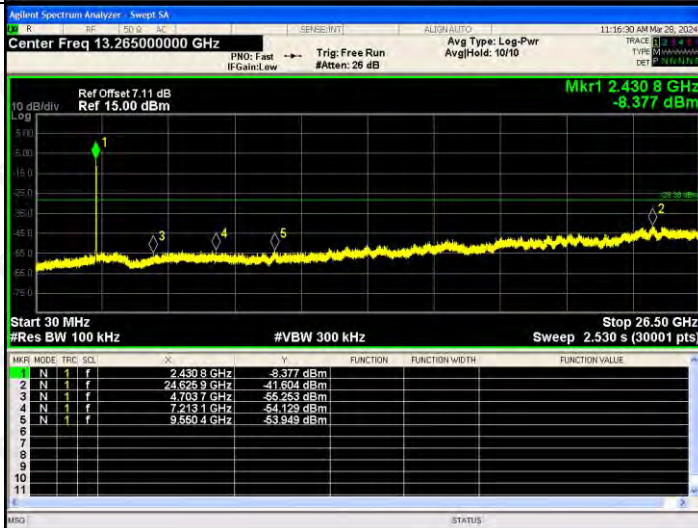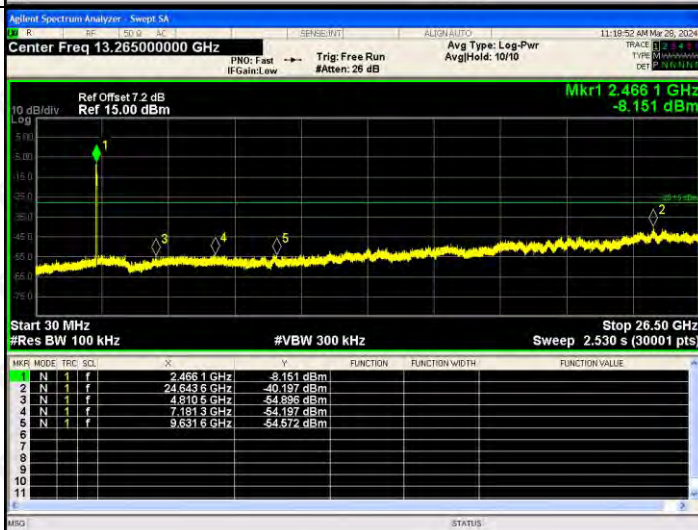802.11 n(HT40) /LCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 7.03 dB Ref 15.00 dBm Mkr1 2.424 7 GHz -9.046 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.424 7 GHz</td><td>-9.046 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.889 7 GHz</td><td>-40.703 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>5.012 5 GHz</td><td>-55.504 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.088 5 GHz</td><td>-54.534 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.541 6 GHz</td><td>-54.439 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.424 7 GHz	-9.046 dBm				2	N	1	f	24.889 7 GHz	-40.703 dBm				3	N	1	f	5.012 5 GHz	-55.504 dBm				4	N	1	f	7.088 5 GHz	-54.534 dBm				5	N	1	f	9.541 6 GHz	-54.439 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.424 7 GHz	-9.046 dBm																																																		
2	N	1	f	24.889 7 GHz	-40.703 dBm																																																		
3	N	1	f	5.012 5 GHz	-55.504 dBm																																																		
4	N	1	f	7.088 5 GHz	-54.534 dBm																																																		
5	N	1	f	9.541 6 GHz	-54.439 dBm																																																		
802.11 n(HT40) /MCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 7.11 dB Ref 15.00 dBm Mkr1 2.430 8 GHz -9.377 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.430 8 GHz</td><td>-9.377 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.826 9 GHz</td><td>-41.604 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.703 7 GHz</td><td>-55.253 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.213 1 GHz</td><td>-54.129 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.550 4 GHz</td><td>-53.949 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.430 8 GHz	-9.377 dBm				2	N	1	f	24.826 9 GHz	-41.604 dBm				3	N	1	f	4.703 7 GHz	-55.253 dBm				4	N	1	f	7.213 1 GHz	-54.129 dBm				5	N	1	f	9.550 4 GHz	-53.949 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.430 8 GHz	-9.377 dBm																																																		
2	N	1	f	24.826 9 GHz	-41.604 dBm																																																		
3	N	1	f	4.703 7 GHz	-55.253 dBm																																																		
4	N	1	f	7.213 1 GHz	-54.129 dBm																																																		
5	N	1	f	9.550 4 GHz	-53.949 dBm																																																		
802.11 n(HT40) /HCH	 Agilent Spectrum Analyzer - Sweep 5A Center Freq 13.265000000 GHz Ref Offset 7.2 dB Ref 15.00 dBm Mkr1 2.468 1 GHz -9.151 dBm Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>P</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.468 1 GHz</td><td>-9.151 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.843 6 GHz</td><td>-40.197 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>4.810 5 GHz</td><td>-54.896 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.181 3 GHz</td><td>-54.197 dBm</td><td></td><td></td><td></td></tr><tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.631 6 GHz</td><td>-54.572 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.468 1 GHz	-9.151 dBm				2	N	1	f	24.843 6 GHz	-40.197 dBm				3	N	1	f	4.810 5 GHz	-54.896 dBm				4	N	1	f	7.181 3 GHz	-54.197 dBm				5	N	1	f	9.631 6 GHz	-54.572 dBm			
MNR	MODE	TRC	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.468 1 GHz	-9.151 dBm																																																		
2	N	1	f	24.843 6 GHz	-40.197 dBm																																																		
3	N	1	f	4.810 5 GHz	-54.896 dBm																																																		
4	N	1	f	7.181 3 GHz	-54.197 dBm																																																		
5	N	1	f	9.631 6 GHz	-54.572 dBm																																																		

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	15.225	14.666	/	30
	MCH	15.242	14.608	/	30
	HCH	14.831	14.432	/	30
802.11g	LCH	13.549	13.34	/	30
	MCH	13.624	13.593	/	30
	HCH	13.528	13.845	/	30
802.11n(HT20)	LCH	13.294	13.251	16.283	30
	MCH	13.553	12.577	16.103	30
	HCH	13.22	13.212	16.226	30
802.11n(HT40)	LCH	13.611	12.876	16.269	30
	MCH	13.667	13.167	16.434	30
	HCH	13.11	13.006	16.069	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

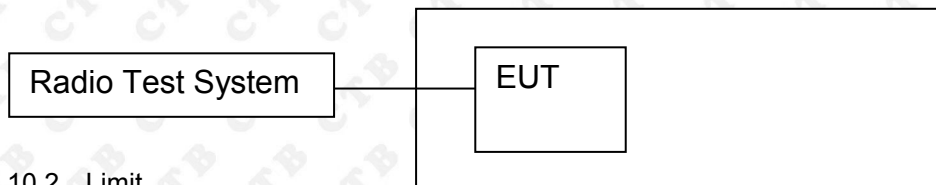

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.997	500	PASS
	MCH	9.995	500	PASS
	HCH	10.435	500	PASS
802.11g	LCH	16.337	500	PASS
	MCH	16.319	500	PASS
	HCH	16.326	500	PASS
802.11n(HT20)	LCH	16.661	500	PASS
	MCH	16.969	500	PASS
	HCH	16.789	500	PASS
802.11n(HT40)	LCH	35.579	500	PASS
	MCH	35.418	500	PASS
	HCH	35.293	500	PASS

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.664	500	PASS
	MCH	10.281	500	PASS
	HCH	10.657	500	PASS
802.11g	LCH	16.323	500	PASS
	MCH	16.342	500	PASS
	HCH	16.349	500	PASS
802.11n(HT20)	LCH	17.353	500	PASS
	MCH	17.319	500	PASS
	HCH	17.047	500	PASS
802.11n(HT40)	LCH	35.423	500	PASS
	MCH	35.701	500	PASS
	HCH	35.485	500	PASS

ANT1:
Test Graph:




802.11g/LCH








802.11g/MCH



802.11g/HCH

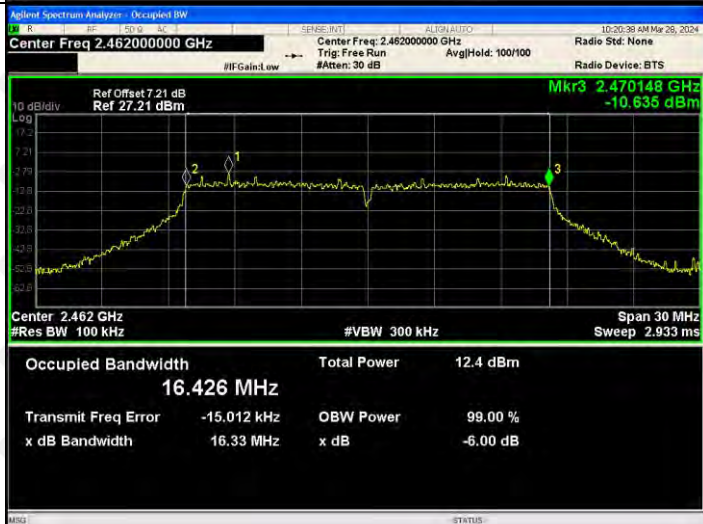

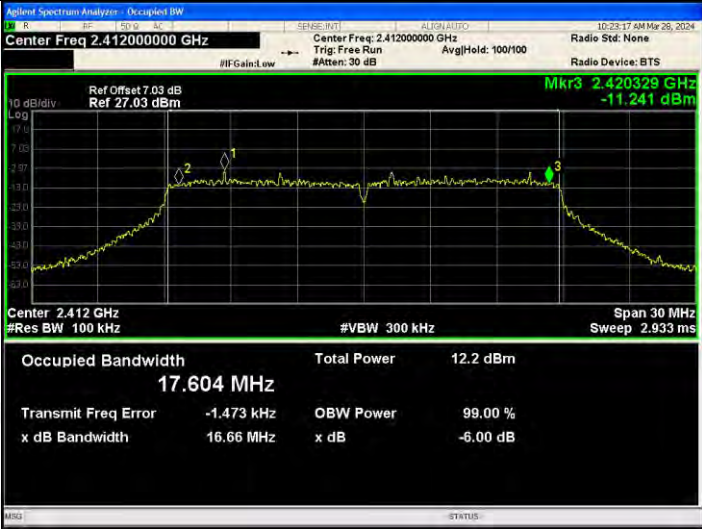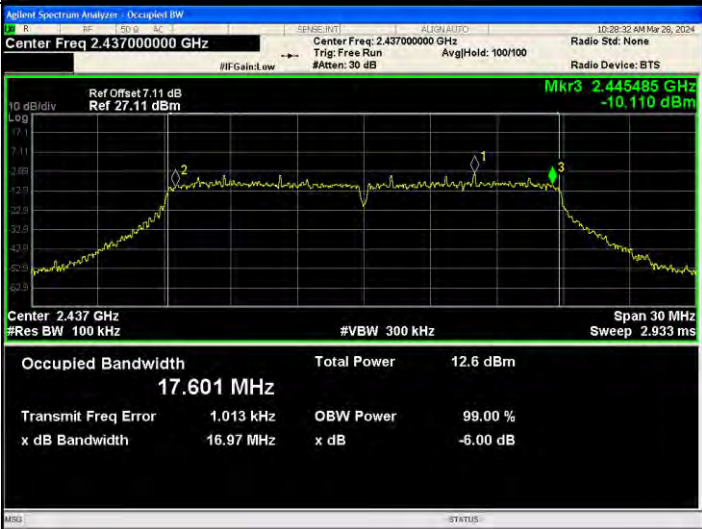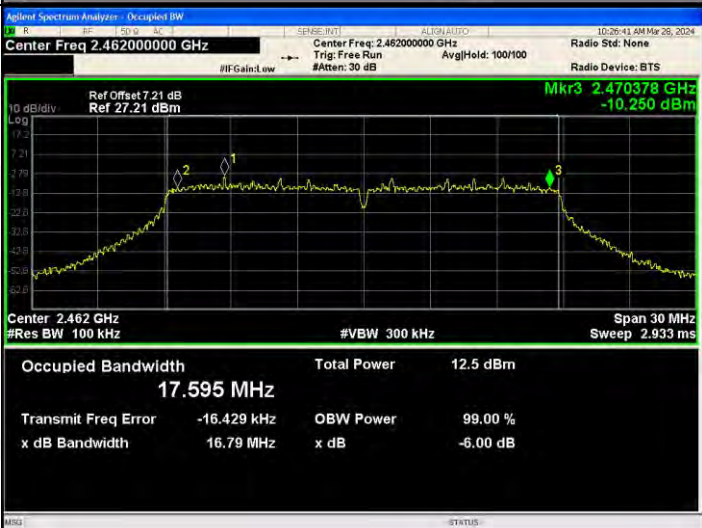802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Center Freq: 2.41200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.03 dB Ref 27.03 dBm Mkr3 2.420329 GHz -11.241 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.604 MHz Total Power 12.2 dBm Transmit Freq Error -1.473 kHz OBW Power 99.00 % x dB Bandwidth 16.66 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.11 dB Ref 27.11 dBm Mkr3 2.445485 GHz -10.110 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.601 MHz Total Power 12.6 dBm Transmit Freq Error 1.013 kHz OBW Power 99.00 % x dB Bandwidth 16.97 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Center Freq: 2.46200000 GHz Trig: Free Run Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset: 7.21 dB Ref 27.21 dBm Mkr3 2.470378 GHz -10.250 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.595 MHz Total Power 12.5 dBm Transmit Freq Error -16.429 kHz OBW Power 99.00 % x dB Bandwidth 16.79 MHz x dB -6.00 dB

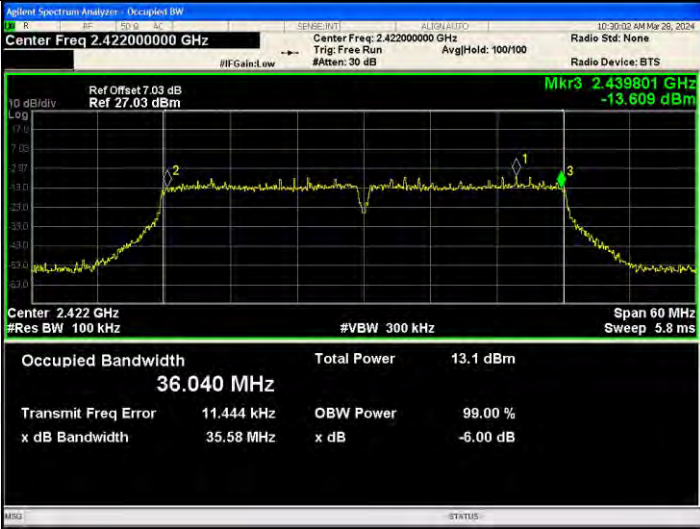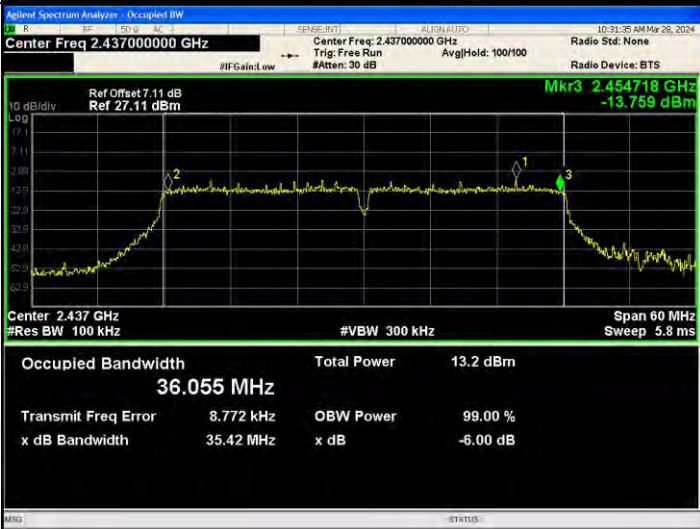802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.42200000 GHz Span 60 MHz Occupied Bandwidth 36.040 MHz Total Power 13.1 dBm
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Span 60 MHz Occupied Bandwidth 36.055 MHz Total Power 13.2 dBm
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.45200000 GHz Span 60 MHz Occupied Bandwidth 36.029 MHz Total Power 12.6 dBm

ANT2:

Test Graph:



802.11g/LCH







802.11g/MCH



802.11g/HCH

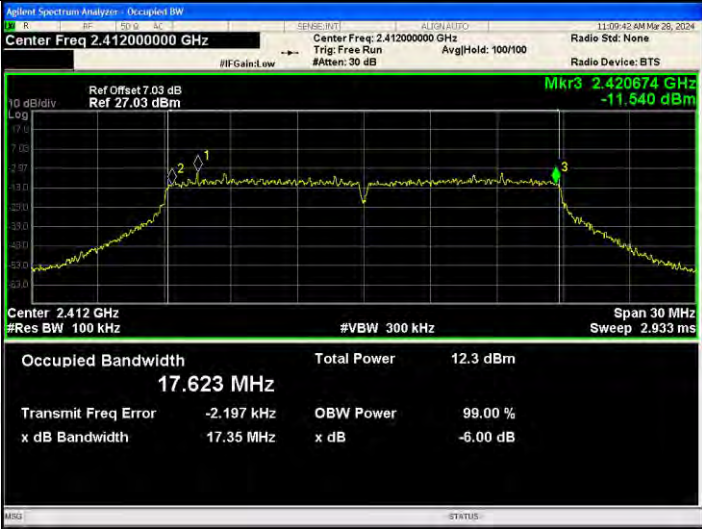


802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.420674 GHz -11.540 dBm Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.623 MHz Total Power 12.3 dBm Transmit Freq Error -2.197 kHz OBW Power 99.00 % x dB Bandwidth 17.35 MHz x dB -6.00 dB
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 27.11 dBm Mkr3 2.445659 GHz -13.180 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.591 MHz Total Power 11.6 dBm Transmit Freq Error -801 Hz OBW Power 99.00 % x dB Bandwidth 17.32 MHz x dB -6.00 dB
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 27.21 dBm Mkr3 2.470522 GHz -10.725 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.601 MHz Total Power 12.4 dBm Transmit Freq Error -1.943 kHz OBW Power 99.00 % x dB Bandwidth 17.05 MHz x dB -6.00 dB

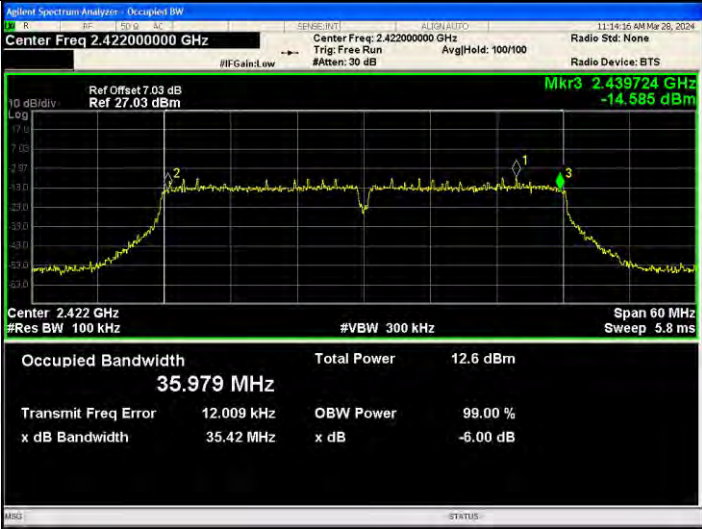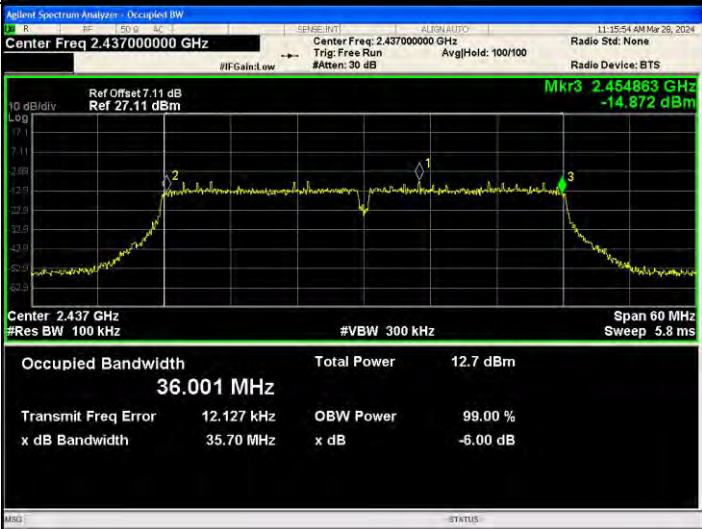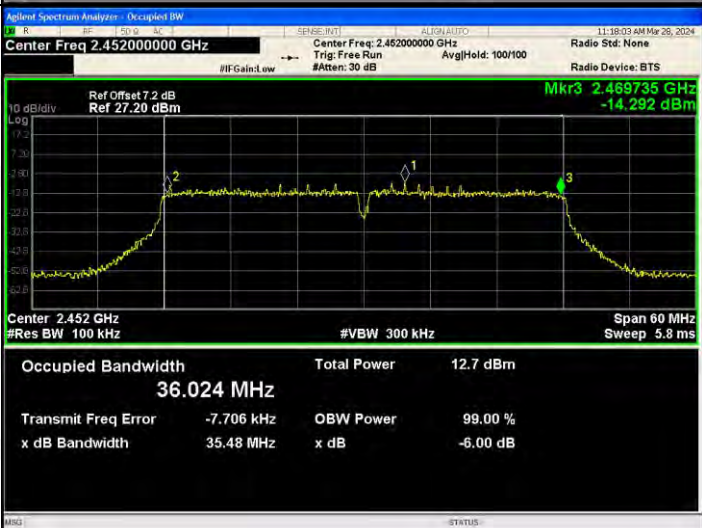802.11n(HT40)/LC H	
802.11n(HT40)/MC H	
802.11n(HT40)/HC H	

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

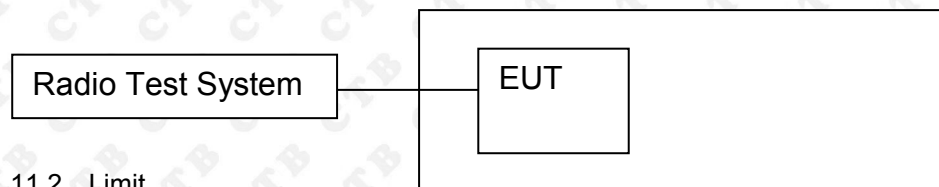

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz] Total	Limit(dBm)
802.11b	LCH	-16.743	-16.595	/	8
	MCH	-16.388	-14.286	/	8
	HCH	-15.826	-15.548	/	8
802.11g	LCH	-19.866	-19.576	/	8
	MCH	-18.179	-17.26	/	8
	HCH	-18.332	-19.425	/	8
802.11n(H T20)	LCH	-19.759	-20.511	-17.108	8
	MCH	-18.704	-19.9	-16.251	8
	HCH	-20.266	-20.358	-17.301	8
802.11n(H T40)	LCH	-27.356	-24.831	-22.902	8
	MCH	-21.116	-24.334	-19.423	8
	HCH	-21.789	-24.118	-19.789	8

ANT1: Test Graph

Graphs

802.11b /LCH



802.11b /MCH




802.11b/HCH




802.11g/LCH





802.11g/MCH

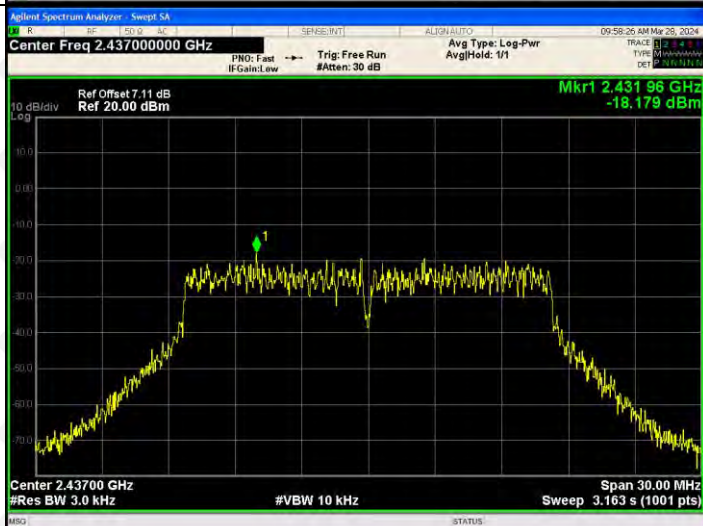


802.11g/HCH

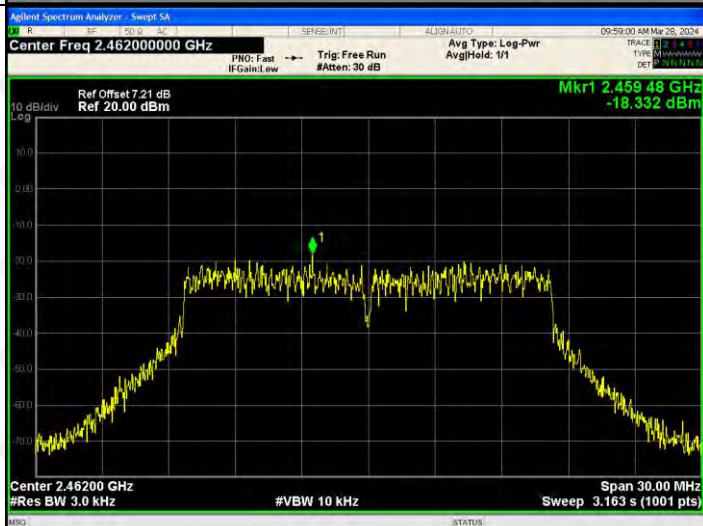

802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.40510 GHz -19.759 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.44324 GHz -18.704 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.46923 GHz -20.266 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

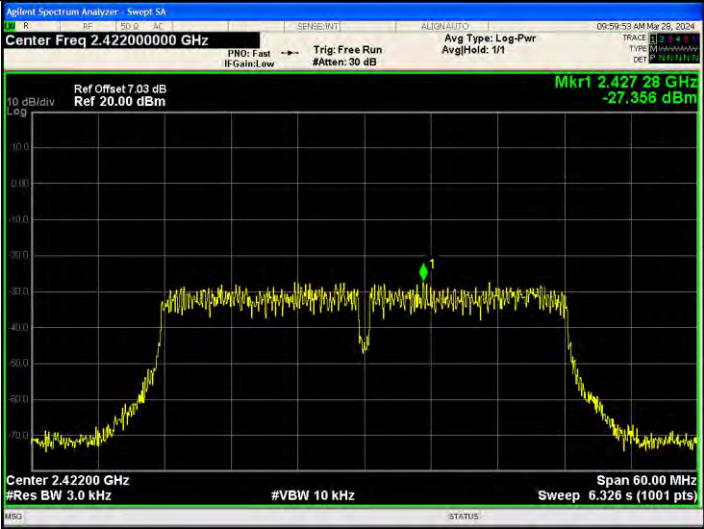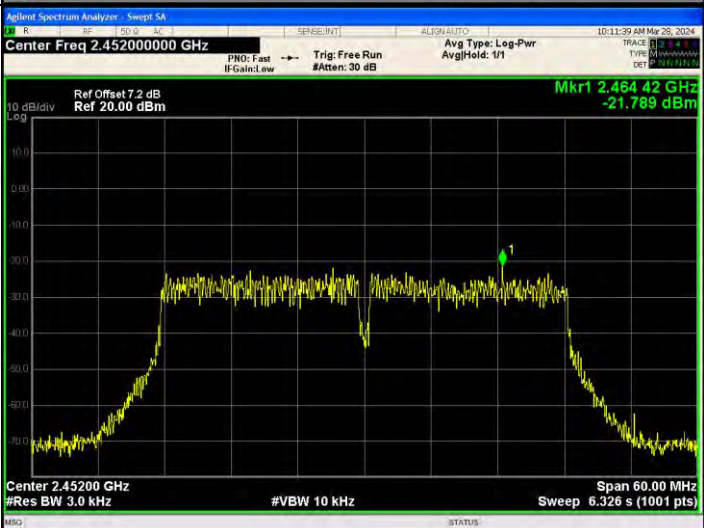802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.422000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.427 28 GHz -27.356 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.435 44 GHz -21.116 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.452000000 GHz Ref Offset 7.2 dB Ref 20.00 dBm Mkr1 2.464 42 GHz -21.789 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

ANT 2: Test Graph

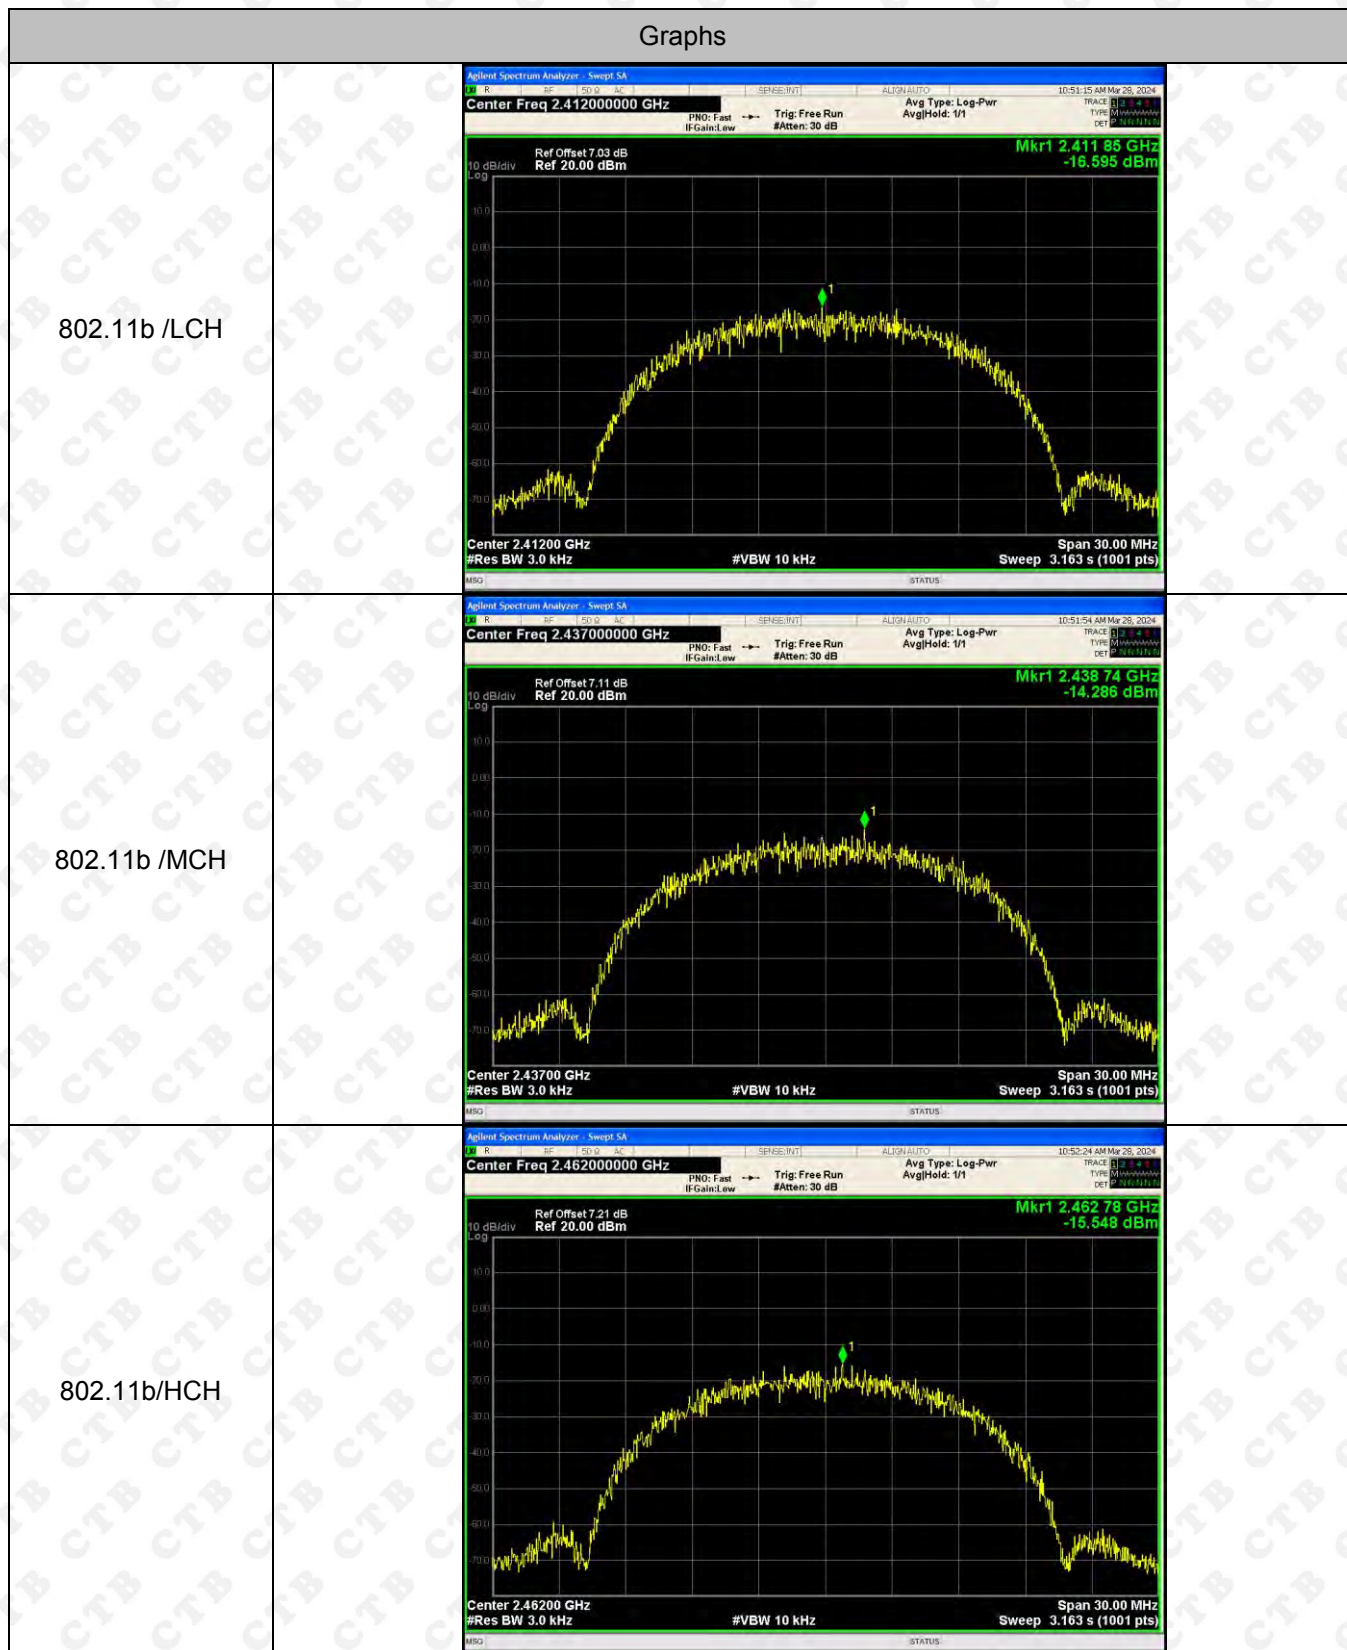


802.11g/LCH






802.11g/MCH



802.11g/HCH

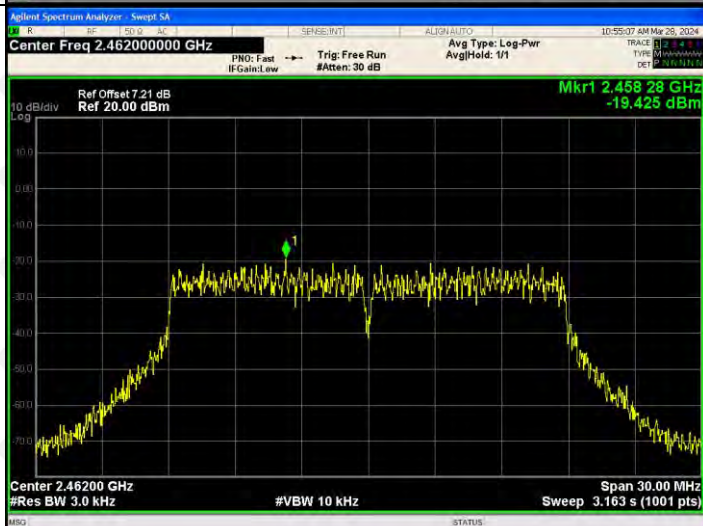

802.11n(HT20)/LC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.41635 GHz -20.511 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/MC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.43169 GHz -19.900 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)
802.11n(HT20)/HC H	 Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.45600 GHz -20.358 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)

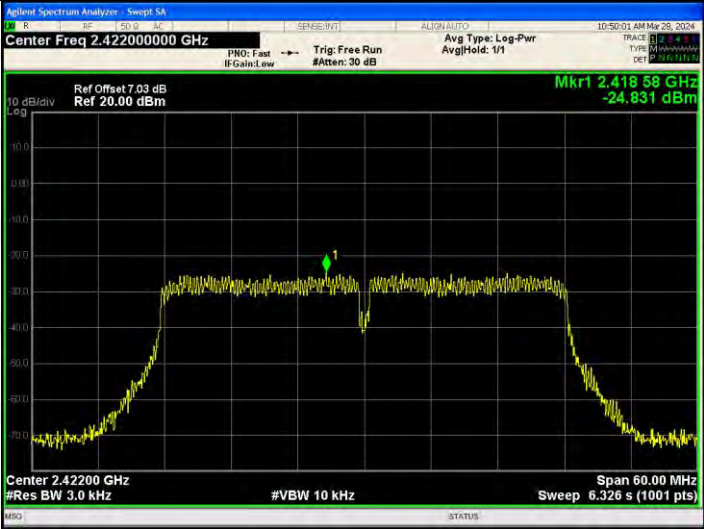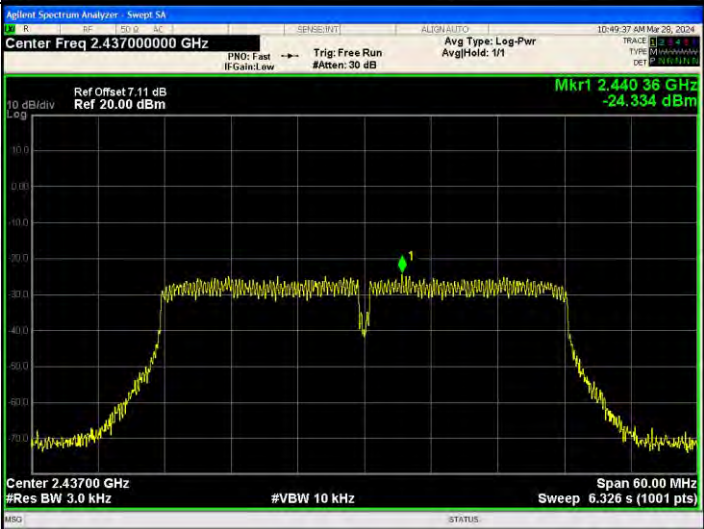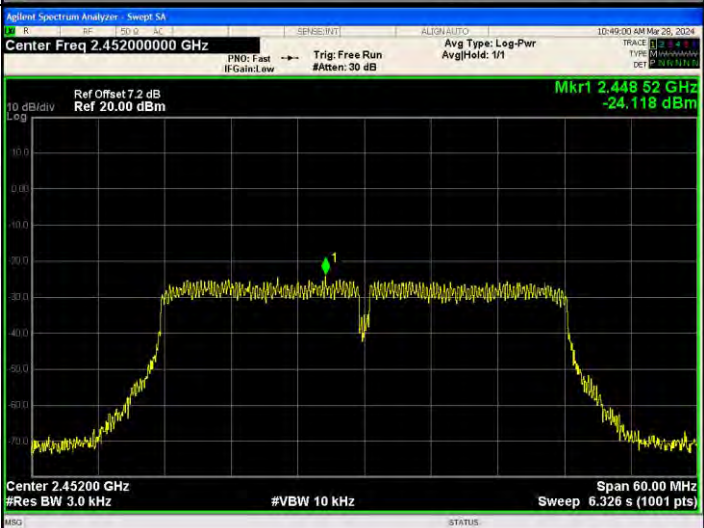802.11n(HT40)/LC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.422000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.418 58 GHz -24.831 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/MC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.437000000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.440 36 GHz -24.334 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)
802.11n(HT40)/HC H	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.452000000 GHz Ref Offset 7.2 dB Ref 20.00 dBm Mkr1 2.448 52 GHz -24.118 dBm Center 2.45200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is internal antenna and no consideration of replacement. The best case gain of the antenna is Ant1: 0.92dBi, Ant2:0.92dBi.


13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G



Above 1G

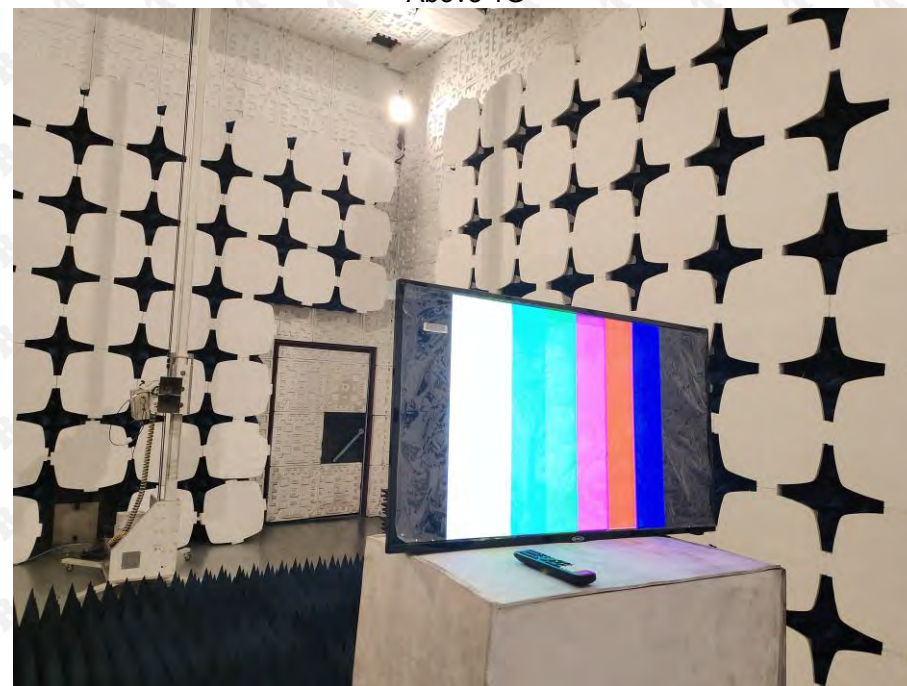

Conducted emission

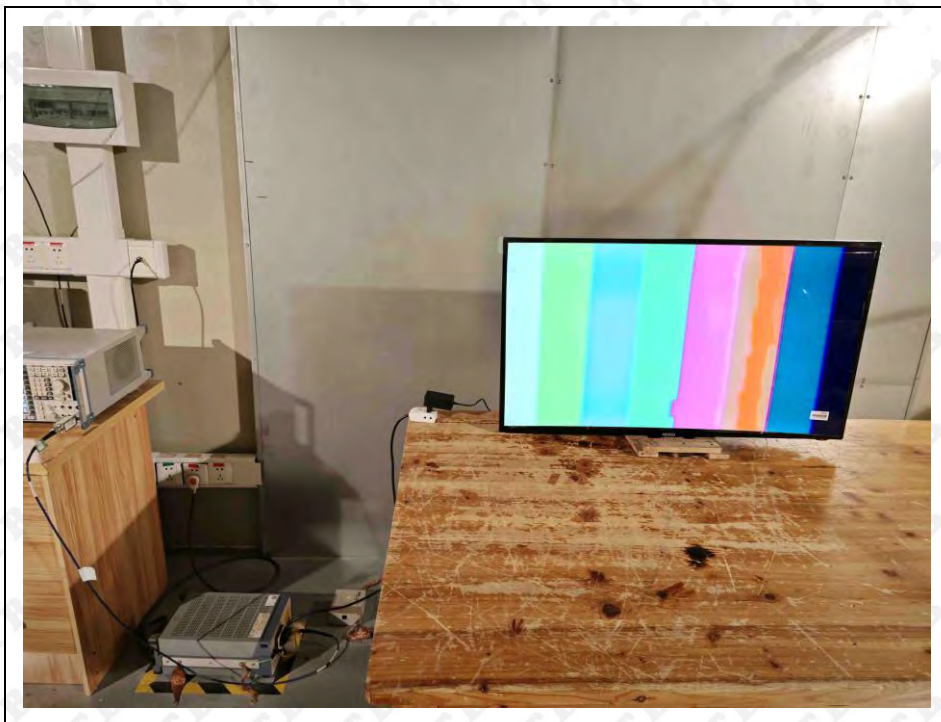

***** END OF REPORT *****