



FCC PART 22/24/27 TEST REPORT

FCC Part 22 /Part 24/Part 27

Report Reference No.: HK1812211956E

FCC ID: 2AHZ5QUEST

Compiled by
(position+printed name+signature) : File administrators Gary Qian

Supervised by
(position+printed name+signature) : Technique principal Eden Hu

Approved by
(position+printed name+signature) : Manager Jason Zhou

Testing Laboratory Name : Shenzhen HUAK Testing Technology Co., Ltd.
Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,
Heping Community, Fuhai Street, Bao'an District, Shenzhen, China

Applicant's name : Shenzhen Huafurui Technology Co., Ltd.
Address : Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of
Chong wen Garden), Crossing of the Liu xian street and Tang ling
road, Tao yuan street, Nan shan district, Shenzhen,P.R. China

Standard : FCC Part 22: PUBLIC MOBILE SERVICES
FCC Part 24: PERSONAL COMMUNICATIONS SERVICES
FCC Part 27: MISCELLANEOUS WIRELESS COMMUNICATIONS
SERVICES

Shenzhen HUAK Testing Technology Co., Ltd. All rights reserved.
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description : Smart Phone
Brand Name : CUBOT
Model : QUEST
Ratings : DC 3.85V From Battery; DC5V/2A
Modulation : GSM / GPRS :GMSK EGPRS: 8PSK
HSDPA:QPSK/16QAM; HSUPA:BPSK; WCDMA:QPSK
GPRS/EGPRS : Supported
Hardware version : A799_MAIN_PCB_V1.1
Software version : CUBOT_CUBOT_QUEST_8123C_V01_20181122
Frequency : GSM 850MHz; PCS 1900MHz; UMTS Band II;UMTS Band V;
UMTS Band IV
Result : PASS

**TEST REPORT**

Test Report No. :	HK1812211956E
--------------------------	---------------

Equipment under Test : Smart Phone

Model /Type : QUEST

Applicant : Shenzhen Huafurui Technology Co., Ltd.

Address : Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of Chong wen Garden), Crossing of the Liu xian street and Tang ling road, Tao yuan street, Nan shan district, Shenzhen,P.R. China

Manufacturer : Shenzhen Huafurui Technology Co., Ltd.

Address : Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of Chong wen Garden), Crossing of the Liu xian street and Tang ling road, Tao yuan street, Nan shan district, Shenzhen,P.R. China

Factory's Name : Shenzhen Huafurui Technology Co., Ltd.

Address..... : Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of Chong wen Garden), Crossing of the Liu xian street and Tang ling road, Tao yuan street, Nan shan district, Shenzhen,P.R. China

Date of Test

Date (s) of performance of tests..... **Dec. 28, 2018~Jan. 09, 2019**

Date of Issue **Feb. 18, 2019**

Test Result **Pass**

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Testing Engineer :

(Gary Qian)

Technical Manager :

(Eden Hu)

Authorized Signatory :

(Jason Zhou)



Revision	Issue Date	Revisions	Revised By
V1.0	Feb. 18, 2019	Initial Issue	Jason Zhou



TABLE OF CONTENTS

1. TEST STANDARDS	6
2.1 PRODUCT DESCRIPTION	7
2.2 RELATED SUBMITTAL(S) / GRANT (S)	9
2.3 TEST METHODOLOGY	9
2.4 TEST FACILITY	10
2.6 SPECIAL ACCESSORIES	11
2.7 EQUIPMENT MODIFICATIONS	11
3. SYSTEM TEST CONFIGURATION	12
3.1 EUT CONFIGURATION	12
3.2 EUT EXERCISE	12
3.3 CONFIGURATION OF EUT SYSTEM	12
4. SUMMARY OF TEST RESULTS	13
5. DESCRIPTION OF TEST MODES	14
6. OUTPUT POWER	15
6.1 CONDUCTED OUTPUT POWER	15
6.2 RADIATED OUTPUT POWER	22
6.2.1 MEASUREMENT METHOD	22
6.2.2 PROVISIONS APPLICABLE	23
6.3. PEAK-TO-AVERAGE RATIO	26
6.3.1 MEASUREMENT METHOD	26
6.3.2 PROVISIONS APPLICABLE	26
6.3.3 MEASUREMENT RESULT	27
7. OCCUPIED BANDWIDTH	29
7.1 MEASUREMENT METHOD	29
7.2 PROVISIONS APPLICABLE	29
7.3 MEASUREMENT RESULT	30
8. BAND EDGE	37
8.1 MEASUREMENT METHOD	37
8.2 PROVISIONS APPLICABLE	37
8.3 MEASUREMENT RESULT	38
9. SPURIOUS EMISSION	41
9.1 CONDUCTED SPURIOUS EMISSION	41
9.2 RADIATED SPURIOUS EMISSION	59
9.2.2 TEST SETUP	60
10. FREQUENCY STABILITY	65
10.1 MEASUREMENT METHOD	65
10.2 PROVISIONS APPLICABLE	66



10.3 MEASUREMENT RESULT	67
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	76



1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 22 \(10-1-12 Edition\):](#) PRIVATE LAND MOBILE RADIO SERVICES.

[FCC Part 24\(10-1-12 Edition\):](#) PUBLIC MOBILE SERVICES

[FCC Part 27\(10-12-18 Edition\):](#) MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[TIA-603 E Mar. 2016:](#) Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[FCC Part 2:](#) FREQUENCY ALLOCA-TIONS AND RADIO TREATY MAT-TERS; GENERAL RULES AND REG-ULATIONS

[KDB971168 D01:v03r01](#) MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

[ANSI C63.26:2015:](#) Compliance Testing of Transmitters Used in Licensed Radio Services



2. SUMMARY

2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Smart Phone
Frequency Bands:	☒ GSM 850 ☒ PCS1900 (U.S. Bands) ☒ GSM 900 ☒ DCS 1800 (Non-U.S. Bands) ☒ UMTS FDD Band II ☒ UMTS FDD Band IV ☒ UMTS FDD Band V (U.S. Bands) ☒ UMTS FDD Band I ☒ UMTS FDD Band VIII (Non-U.S. Bands)
Antenna Type	PIFA Antenna
Type of Modulation	GSM / GPRS :GMSK EGPRS: GMSK/8PSK WCDMA : QPSK
Antenna gain	GSM850:-1.02dBi; PCS1900: 0.7dBi; WCDMA850: -1.02dBi; WCDMA 1700:0.5dBi; WCDMA1900:0.7dBi;
Power Supply:	DC 3.85V by battery
Battery parameter:	DC3.85V/6000mAh
Dual Card:	GSM /WCDMA/LTE Card Slot
GPRS Class	12
Extreme Vol. Limits:	DC3.4 V to 4.4 V (Normal: DC3.85 V)
Extreme Temp. Tolerance	-10°C to +50°C
*** Note: 1. The High Voltage DC4.4V and Low Voltage DC3.4V were declared by manufacturer 2. The EUT couldn't be operating normally with higher or lower voltage.	

*** **Note:**1.The maximum power levels are GSM for MCS-4: GMSK link, and RMC 12.2kbps mode for WCDMA band II, WCDMA band V, WCDMA band IV, only these modes were used for all tests.
2. We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst case as a representative.

**GSM/WCDMA Card1 Slot :**

	Maximum ERP/EIRP (dBm)	Max. Average Burst Power (dBm)
GSM 850	32.18	33.70
PCS 1900	29.56	31.27
UMTS BAND II	20.73	21.94
UMTS BAND V	20.54	23.60
UMTS BAND IV	19.49	20.74

GSM/WCDMA Card2 Slot :

	Maximum ERP/EIRP (dBm)	Max. Average Burst Power (dBm)
GSM 850	30.59	32.19
PCS 1900	28.44	30.44
UMTS BAND II	19.36	20.59
UMTS BAND V	18.99	23.12
UMTS BAND IV	18.10	19.16



2.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID:2AHZ5QUEST**, filing to comply with the FCC Part 22H&24E requirements.

2.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-E-2016, and KDB 971168 D01 Power Means License Digital Systems V03R01.

**2.4 TEST FACILITY**

Site	Shenzhen HUAKE Testing Technology Co., Ltd.
Location	1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China
Designation Number	CN1229
Test Firm Registration Number : 616276	

ALL TEST EQUIPMENT LIST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Receiver	R&S	ESCI 7	HKE-010	Dec. 27, 2018	Dec. 26, 2019
LISN	R&S	ENV216	HKE-002	Dec. 27, 2018	Dec. 26, 2019
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018	Dec. 26, 2019
Horn antenna	Schwarzbeck	9120D	HKE-013	Dec. 27, 2018	Dec. 26, 2019
Preamplifier	EMCI	EMC051845SE	HKE-015	Dec. 27, 2018	Dec. 26, 2019
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	HKE-087	Dec. 27, 2018	Dec. 26, 2019
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Dec. 27, 2018	Dec. 26, 2019
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2018	Dec. 26, 2019
Power Sensor	Agilent	E9300A	HKE-086	Dec. 27, 2018	Dec. 26, 2019
Wireless Communication Test Set	R&S	CMU200	HKE-026	Dec. 27, 2018	Dec. 26, 2019



2.6 SPECIAL ACCESSORIES

The battery was supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

2.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



3. SYSTEM TEST CONFIGURATION

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

3.3 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Remark
1	Smart Phone	QUEST	2AHZ5QUEST	EUT
2	Adapter	QUEST	DC 5.0V 2A	Accessory
3	Battery	QUEST	DC3.85V/ 4000mAh	Accessory
4	USB	N/A	N/A	Accessory

***Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.

**4. SUMMARY OF TEST RESULTS**

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	2.1046	Pass
		Radiated Output Power	22.913(a) (2) / 24.232 (c)/ 27.50(d)(4)	
2	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	Pass
3	Spurious Emission	Conducted Spurious Emission	2.1051/22.917(a)/24.238(a)/ 27.53(h)	Pass
		Radiated Spurious Emission		
4	Frequency Stability		2.1053/22.917(a)/24.238(a)/27.53(h)	Pass
5	Occupied Bandwidth		2.1049	Pass
6	Band Edge		2.1051/22.917(a)/24.238(a)/ 27.53(h)	Pass



5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

*****Note:** GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V, WCDMA/HSPA band IV, mode have been tested during the test.

The worst condition was recorded in the test report if no other modes test data.



6. OUTPUT POWER

6.1 CONDUCTED OUTPUT POWER

6.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS1900, WCDMA/HSPA band II, WCDMA/HSPA band V, WCDMA/HSPA band IV) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

**GSM 850:**

Mode	Frequency (MHz)	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM850	824.2	33.44	-9	24.44
	836.6	33.64	-9	24.64
	848.8	33.70	-9	24.70
GPRS850 (1 Slot)	824.2	33.50	-9	24.50
	836.6	33.65	-9	24.65
	848.8	33.69	-9	24.69
GPRS850 (2 Slot)	824.2	32.69	-6	26.69
	836.6	32.84	-6	26.84
	848.8	32.93	-6	26.93
GPRS850 (3 Slot)	824.2	30.89	-4.26	26.63
	836.6	31.06	-4.26	26.80
	848.8	31.13	-4.26	26.87
GPRS850 (4 Slot)	824.2	29.69	-3	26.69
	836.6	29.91	-3	26.91
	848.8	30.01	-3	27.01

Mode	Channel	Frequency (MHz)	Avg.Burst Power (dBm)
EDGE (1 Slot)	128	824.2	26.37
	190	836.6	26.55
	251	848.8	26.90
EDGE (2 Slot)	128	824.2	24.71
	190	836.6	24.89
	251	848.8	25.17
EDGE (3 Slot)	128	824.2	22.11
	190	836.6	22.39
	251	848.8	22.75
EDGE (4 Slot)	128	824.2	20.89
	190	836.6	21.21
	251	848.8	21.53

**PCS 1900:**

Mode	Frequency (MHz)	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM1900	1850.2	31.17	-9	22.17
	1880	30.47	-9	21.47
	1909.8	30.70	-9	21.70
GPRS1900 (1 Slot)	1850.2	31.27	-9	22.27
	1880	30.56	-9	21.56
	1909.8	30.79	-9	21.79
GPRS1900 (2 Slot)	1850.2	30.51	-6	24.51
	1880	29.79	-6	23.79
	1909.8	30.11	-6	24.11
GPRS1900 (3 Slot)	1850.2	28.81	-4.26	24.55
	1880	28.10	-4.26	23.84
	1909.8	28.40	-4.26	24.14
GPRS1900 (4 Slot)	1850.2	27.75	-3	24.75
	1880	27.01	-3	24.01
	1909.8	27.37	-3	24.37

Mode	Channel	Frequency (MHz)	Avg.Burst Power (dBm)
EDGE (1 Slot)	512	1850.2	27.71
	661	1880	27.09
	810	1909.8	26.88
EDGE (2 Slot)	512	1850.2	26.25
	661	1880	25.63
	810	1909.8	25.36
EDGE (3 Slot)	512	1850.2	24.04
	661	1880	23.37
	810	1909.8	23.01
EDGE (4 Slot)	512	1850.2	22.70
	661	1880	22.04
	810	1909.8	21.73



UMTS BAND II

Mode	Frequency (MHz)	Reference power	Avg.Burst Power
WCDMA1900 RMC	1852.4	24	21.82
	1880	24	21.43
	1907.6	24	21.94
WCDMA1900 AMR	1852.4	24	20.71
	1880	24	20.59
	1907.6	24	20.47
HSDPA Subtest 1	1852.4	24	20.93
	1880	24	20.57
	1907.6	24	21.08
HSDPA Subtest 2	1852.4	24	20.18
	1880	24	19.89
	1907.6	24	20.26
HSDPA Subtest 3	1852.4	24	20.11
	1880	24	19.88
	1907.6	24	20.22
HSDPA Subtest 4	1852.4	24	20.09
	1880	24	19.84
	1907.6	24	20.16
HSUPA Subtest 1	1852.4	24	18.71
	1880	24	18.28
	1907.6	24	18.79
HSUPA Subtest 2	1852.4	24	18.88
	1880	24	18.42
	1907.6	24	18.96
HSUPA Subtest 3	1852.4	24	19.79
	1880	24	19.34
	1907.6	24	19.83
HSUPA Subtest 4	1852.4	24	18.44
	1880	24	18.00
	1907.6	24	18.53
HSUPA Subtest 5	1852.4	24	17.73
	1880	24	17.38
	1907.6	24	18.13

**UMTS BAND V**

Mode	Frequency (MHz)	Reference power	Avg.Burst Power
WCDMA850 RMC	826.4	24	22.86
	836.4	24	23.60
	846.6	24	23.56
WCDMA850 AMR	826.4	24	22.25
	836.4	24	22.12
	846.6	24	22.31
HSDPA Subtest 1	826.4	24	22.05
	836.4	24	22.31
	846.6	24	22.43
HSDPA Subtest 2	826.4	24	21.35
	836.4	24	21.54
	846.6	24	21.71
HSDPA Subtest 3	826.4	24	21.29
	836.4	24	21.62
	846.6	24	21.71
HSDPA Subtest 4	826.4	24	21.23
	836.4	24	21.60
	846.6	24	21.59
HSUPA Subtest 1	826.4	24	19.83
	836.4	24	20.14
	846.6	24	20.25
HSUPA Subtest 2	826.4	24	19.90
	836.4	24	20.21
	846.6	24	20.35
HSUPA Subtest 3	826.4	24	20.78
	836.4	24	21.10
	846.6	24	21.25
HSUPA Subtest 4	826.4	24	19.46
	836.4	24	19.74
	846.6	24	19.85
HSUPA Subtest 5	826.4	24	19.01
	836.4	24	19.27
	846.6	24	19.40

**UMTS BAND IV**

Mode	Frequency (MHz)	Reference power	Avg.Burst Power
WCDMA 1700 RMC	1712.4	24	20.74
	1732.4	24	20.69
	1752.6	24	20.70
WCDMA 1700 AMR	1712.4	24	20.52
	1732.4	24	20.44
	1752.6	24	20.64
HSDPA Subtest 1	1712.4	24	20.33
	1732.4	24	20.42
	1752.6	24	19.69
HSDPA Subtest 2	1712.4	24	19.81
	1732.4	24	19.77
	1752.6	24	19.46
HSDPA Subtest 3	1712.4	24	19.52
	1732.4	24	19.66
	1752.6	24	19.73
HSDPA Subtest 4	1712.4	24	20.44
	1732.4	24	20.52
	1752.6	24	20.42
HSUPA Subtest 1	1712.4	24	20.11
	1732.4	24	20.21
	1752.6	24	20.33
HSUPA Subtest 2	1712.4	24	20.54
	1732.4	24	20.39
	1752.6	24	20.42
HSUPA Subtest 3	1712.4	24	20.44
	1732.4	24	20.36
	1752.6	24	20.42
HSUPA Subtest 4	1712.4	24	19.33
	1732.4	24	19.87
	1752.6	24	19.44
HSUPA Subtest 5	1712.4	24	20.11
	1732.4	24	20.36
	1752.6	24	20.42



According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$\text{MAX}(CM-1,0)$
Note: $CM=1$ for $\beta_c/\beta_d=12/15, \beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.		

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



6.2 RADIATED OUTPUT POWER

6.2.1 MEASUREMENT METHOD

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.

1. Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signal operating below 1GHz are performed using dipole antennas. Measurements on signals operating above 1GHz are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT operating at its maximum duty cycle, at maximum power, and at the approximate frequencies.
2. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_r) at the chamber's probe antenna is recorded.
3. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $AR_{pl} = P_{in} + 2.15 - P_r$. The AR_{pl} is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + AR_{pl}$
4. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
5. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
6. The EUT is then put into continuously transmitting mode at its maximum power level.
7. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
8. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (P_{in}).
9. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15dBi...$

**6.2.2 PROVISIONS APPLICABLE**

Mode	FCC Part Section(s)	Nominal Peak Power
GSM/EDGE 850	22.913(a)(2)	$\leq 38.45\text{dBm}$ (7W). ERP
GSM/EDGE 1900	24.232(c)	$\leq 33\text{dBm}$ (2W). EIRP
UMTS BAND II	24.232(c)	$\leq 33\text{dBm}$ (2W).EIRP
UMTS BANDV	22.913(a)(2)	$\leq 38.45\text{dBm}$ (7W).ERP
UMTS BAND IV	27.50(d)(4)	$\leq 30\text{dBm}$ (1W). EIRP

**6.2.3 MEASUREMENT RESULT**

Radiated Power (ERP) for GSM/EDGE 850				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM	824.2	32.08	Horizontal	Pass
	836.6	32.15	Horizontal	Pass
	848.8	32.18	Horizontal	Pass
	824.2	30.25	Vertical	Pass
	836.6	30.27	Vertical	Pass
	848.8	30.59	Vertical	Pass
EDGE	824.2	25.07	Horizontal	Pass
	836.6	25.10	Horizontal	Pass
	848.8	25.19	Horizontal	Pass
	824.2	23.22	Vertical	Pass
	836.6	23.43	Vertical	Pass
	848.8	23.16	Vertical	Pass

Radiated Power (E.I.R.P) for GSM/EDGE 1900				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GSM	1850.2	29.56	Horizontal	Pass
	1880.0	29.47	Horizontal	Pass
	1909.8	29.33	Horizontal	Pass
	1850.2	27.43	Vertical	Pass
	1880.0	27.28	Vertical	Pass
	1909.8	27.39	Vertical	Pass
EDGE	1850.2	25.99	Horizontal	Pass
	1880.0	25.87	Horizontal	Pass
	1909.8	25.69	Horizontal	Pass
	1850.2	24.44	Vertical	Pass
	1880.0	24.49	Vertical	Pass
	1909.8	24.58	Vertical	Pass



Radiated Power (E.I.R.P) for UMTS band II				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P (dBm)	Polarization Of Max. E.I.R.P	
UMTS	1852.4	20.28	Horizontal	Pass
	1880	20.44	Horizontal	Pass
	1907.6	20.73	Horizontal	Pass
	1852.4	19.11	Vertical	Pass
	1880	19.14	Vertical	Pass
	1907.6	19.06	Vertical	Pass

Radiated Power (ERP) for UMTS band V				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
UMTS	826.4	20.37	Horizontal	Pass
	836.4	20.54	Horizontal	Pass
	846.6	20.34	Horizontal	Pass
	826.4	19.46	Vertical	Pass
	836.4	19.39	Vertical	Pass
	846.6	19.27	Vertical	Pass

Radiated Power (E.I.R.P) for UMTS band IV				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P. (dBm)	Polarization Of Max. E.I.R.P.	
UMTS	1712.4	19.49	Horizontal	Pass
	1732.4	19.35	Horizontal	Pass
	1752.6	19.42	Horizontal	Pass
	1712.4	18.55	Vertical	Pass
	1732.4	18.42	Vertical	Pass
	1752.6	18.70	Vertical	Pass

Note: Above is the worst mode data.



6.3. PEAK-TO-AVERAGE RATIO

6.3.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

6.3.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

**6.3.3 MEASUREMENT RESULT**

Modes	GSM850(GSM)		
Channel	128	190	251
	(Low)	(Mid)	(High)
Frequency (MHz)	824.2	836.6	848.8
Peak-To-Average Ratio (dB)/GSM	2.64	2.63	2.61
Peak-To-Average Ratio (dB)/EDGE	5.57	5.54	5.65

Modes	PCS1900 (GSM)		
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency (MHz)	1850.2	1880	1909.8
Peak-To-Average Ratio (dB)/GSM	2.63	2.66	2.65
Peak-To-Average Ratio (dB)/EDGE	5.49	5.55	5.53

Modes	UMTS BAND II		
Channel	9262	9400	9538
	(Low)	(Mid)	(High)
Frequency (MHz)	1852.4	1880	1907.6
Peak-To-Average Ratio (dB)	4.75	3.06	2.81

Modes	UMTS BAND V		
Channel	4132	4182	4233
	(Low)	(Mid)	(High)
Frequency (MHz)	826.4	836.4	846.6
Peak-To-Average Ratio (dB)	2.96	2.92	3.01



Modes	UMTS BAND IV		
Channel	8562	8662	8763
	(Low)	(Mid)	(High)
Frequency (MHz)	1712.4	1732.4	1752.6
Peak-To-Average Ratio (dB)	2.96	2.92	3.01



7. OCCUPIED BANDWIDTH

7.1 MEASUREMENT METHOD

1. The Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper Frequency limits, the mean power radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.
2. RBW=1~5% of the expected OBW, VBW>=3 x RBW, Detector=Peak, Trace mode=max hold, Sweep=auto couple, and the trace was allowed to stabilize.

7.2 PROVISIONS APPLICABLE

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

**7.3 MEASUREMENT RESULT****Test Results**

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM850	GSM	LCH	247.1	317	PASS
		MCH	244.3	311	PASS
		HCH	245.6	308	PASS
	EDGE	LCH	250.8	315	PASS
		MCH	247.3	304	PASS
		HCH	249.2	310	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM1900	GSM	LCH	246.3	315	PASS
		MCH	245.9	302	PASS
		HCH	242.9	306	PASS
	EDGE	LCH	249.5	311	PASS
		MCH	249.0	314	PASS
		HCH	248.9	309	PASS




For GSM


Test Band=GSM850/PCS1900

Test Mode=GSM/EDGE

GSM 850-LCH-GSM

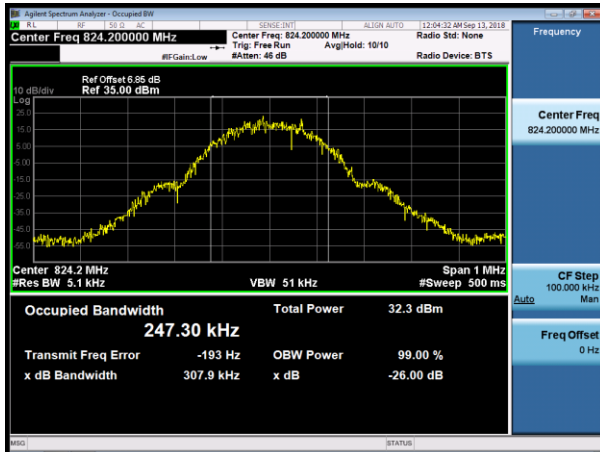


GSM 850-MCH-GSM

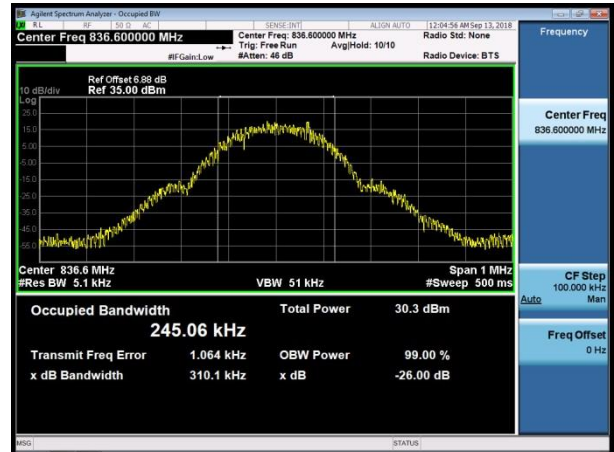

GSM 850-HCH-GSM




GSM 850-LCH-EDGE

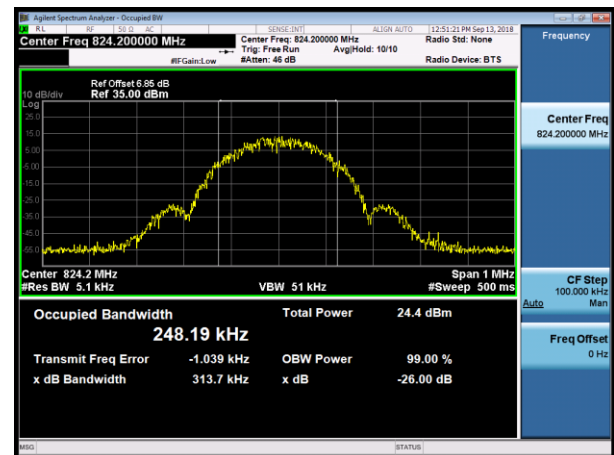





GSM 850-MCH-EDGE

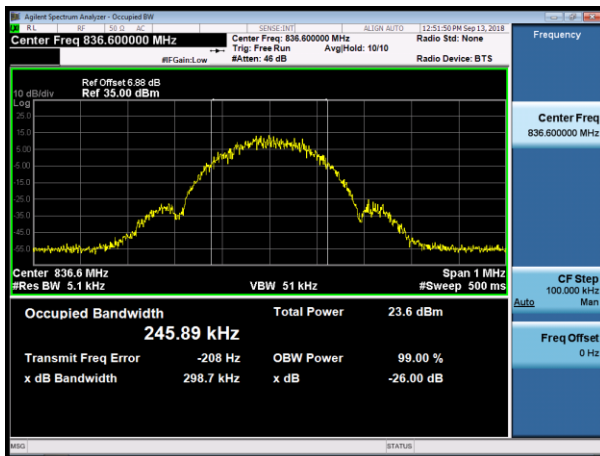


GSM 850-HCH-EDGE

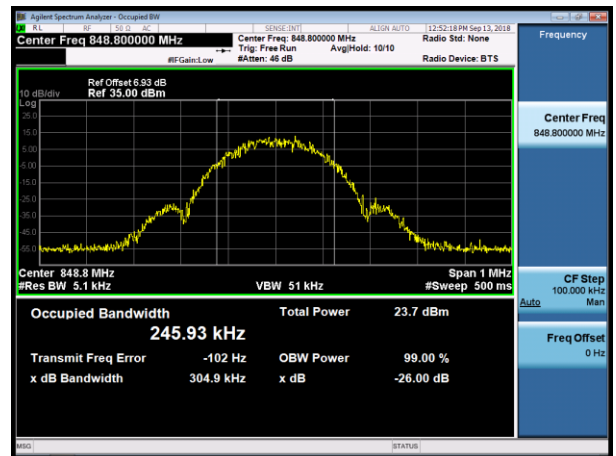


GSM 1900-LCH-GSM

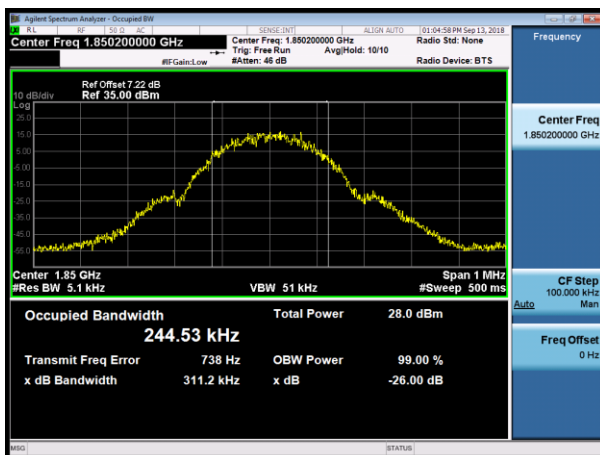


GSM 1900-MCH-GSM

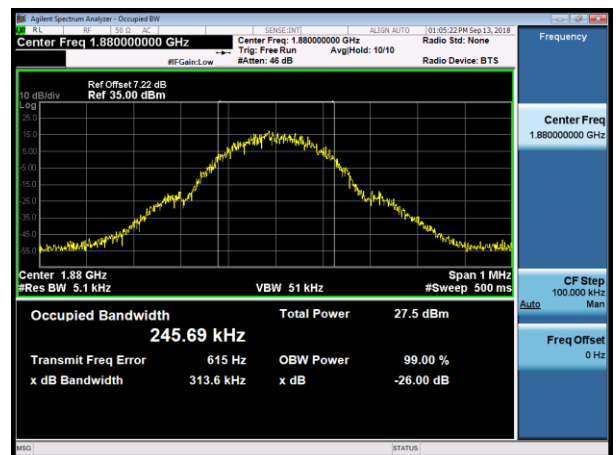

GSM 1900-HCH-GSM

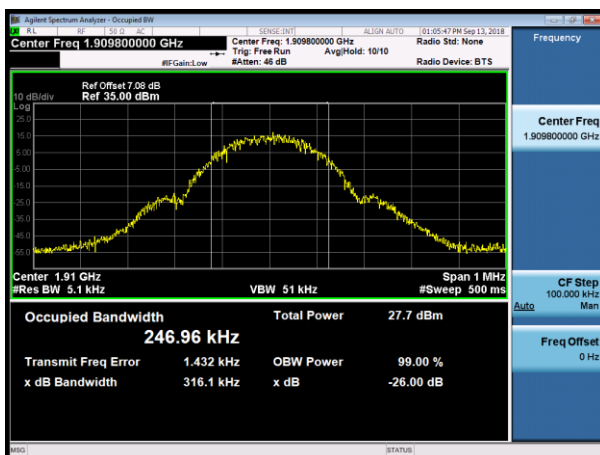


GSM 1900-LCH-EGPRS

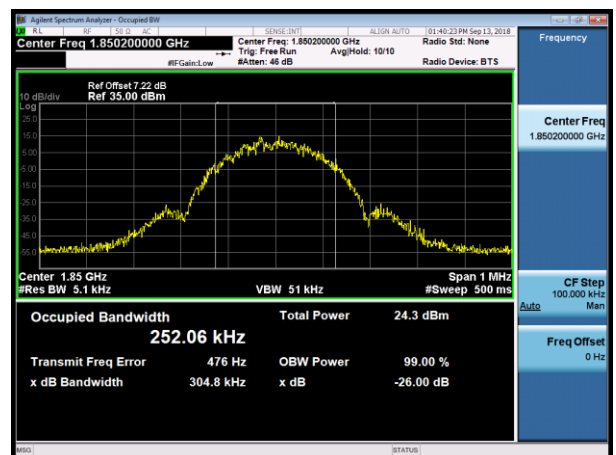




GSM 1900-MCH-EGPRS

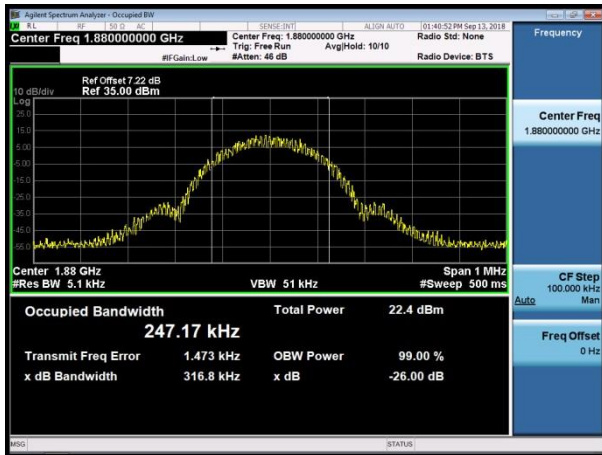

GSM 1900-HCH-EGPRS

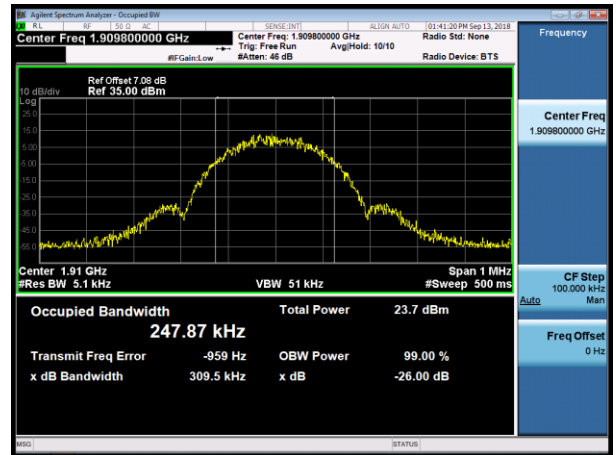



Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 850	UMTS	LCH	4162.7	4703	PASS
		MCH	4162.4	4706	PASS
		HCH	4170.3	4710	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 1700	UMTS	LCH	4168.4	4709	PASS
		MCH	4169.1	4713	PASS
		HCH	4165.9	4702	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 1900	UMTS	LCH	4177.1	4728	PASS
		MCH	4171.4	4726	PASS
		HCH	4179.6	4734	PASS




For WCDMA


Test Band=WCDMA850/WCDMA1700/WCDMA1900

Test Mode=UMTS


WCDMA 850-LCH

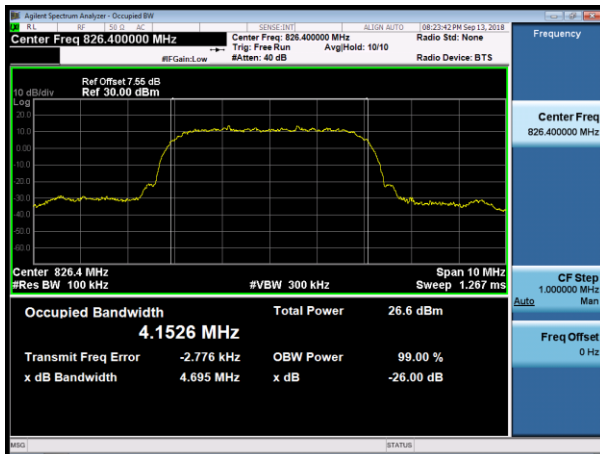


WCDMA 850-MCH

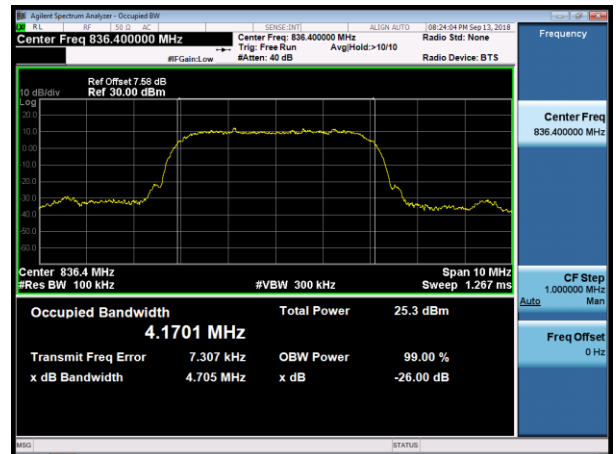

WCDMA 850-HCH

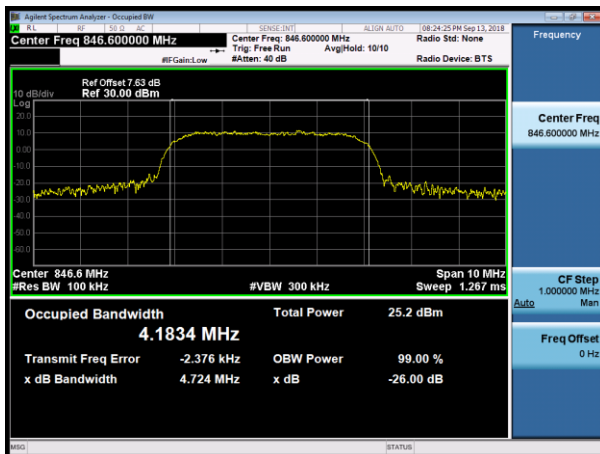


WCDMA 1700-LCH

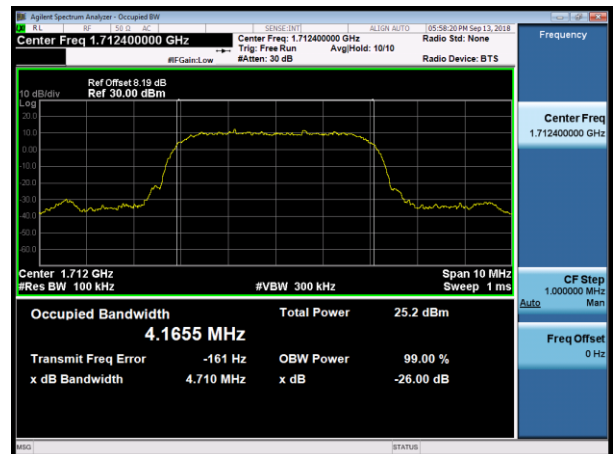





WCDMA 1700-MCH

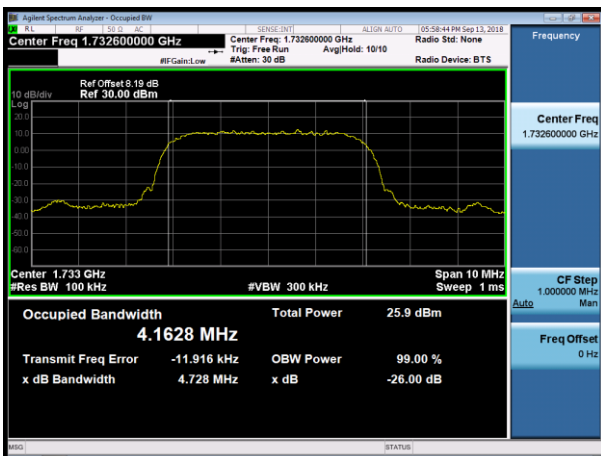


WCDMA 1700-HCH

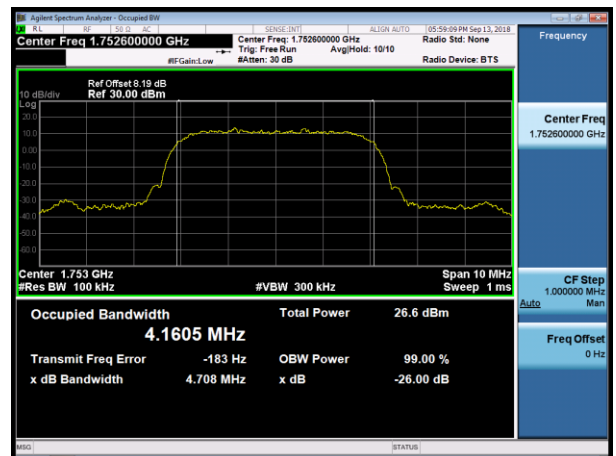


WCDMA 1900-LCH

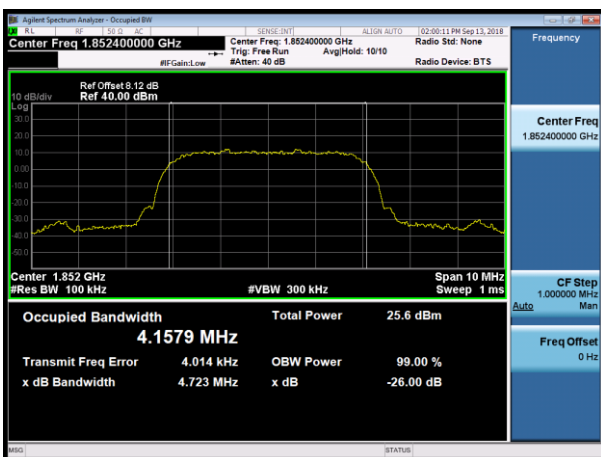

WCDMA 1900-MCH

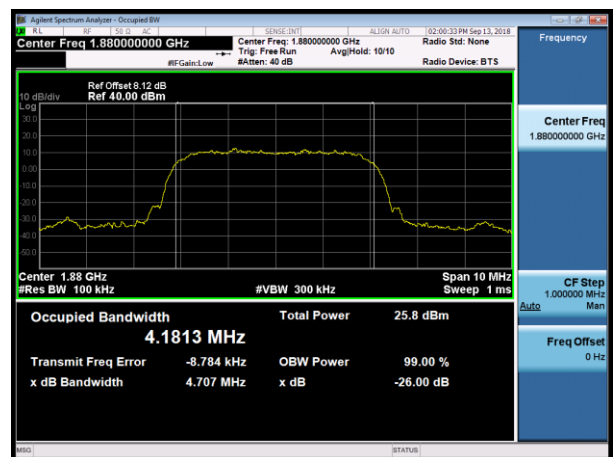

WCDMA 1900-HCH

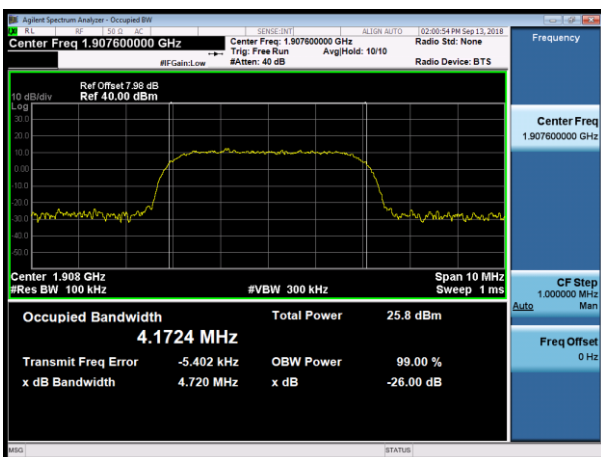



8. BAND EDGE

8.1 MEASUREMENT METHOD

1. All out of band emissions are measured with an analyzer spectrum connected to the antenna terminal of the EUT while the EUT at its maximum duty cycle, at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration
2. The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.
3. Start and stop frequency were set such that the band edge would be placed in the center of the plot.
4. Span was set large enough so as to capture all out of band emissions near the band edge.
5. RBW>1% of the emission bandwidth, VBW $\geq 3 \times$ RBW, Detector=RMS, Number of points $\geq 2 \times$ Span/RBW, Trace mode=max hold, Sweep time=auto couple, and the trace was allowed to stabilize

8.2 PROVISIONS APPLICABLE

As Specified in FCC rules of 22.917(a), 24.238(a) and KDB 971168 D1 V03R01.



8.3 MEASUREMENT RESULT


Test Results

For GSM


Test Band=GSM850/GSM1900

Test Mode=GSM/EDGE


GSM 850-LCH-GSM

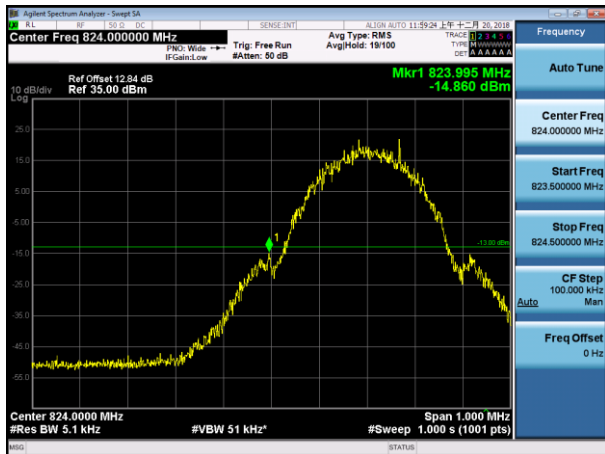


GSM 850-HCH-GSM

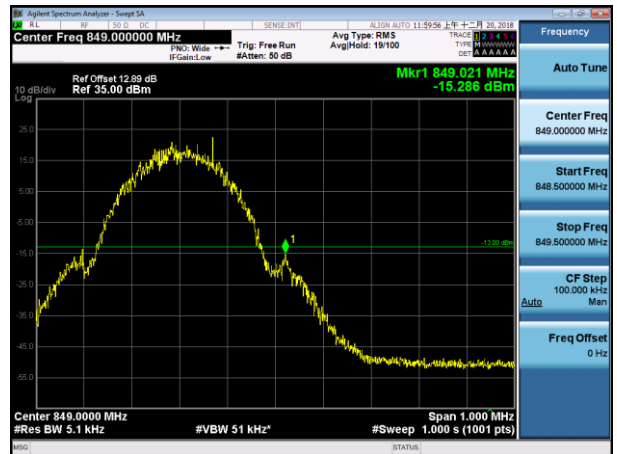

GSM 850-LCH-EDGE

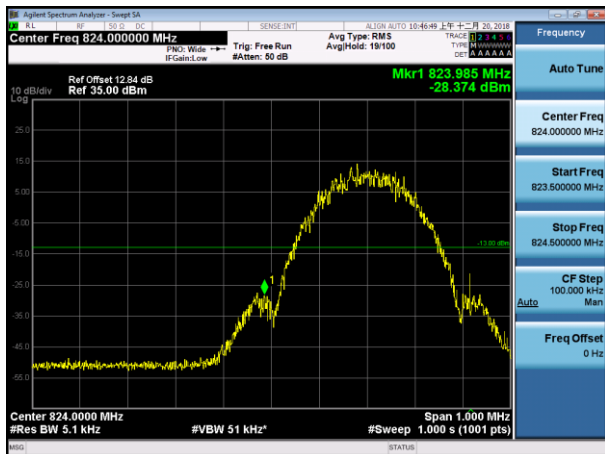


GSM 850-HCH-EDGE

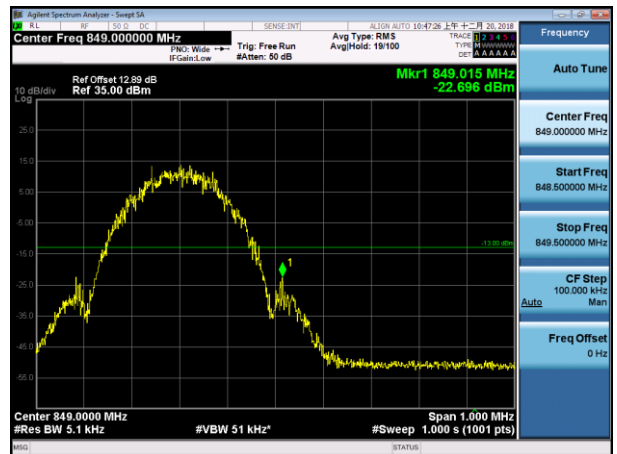





GSM 1900-LCH-GSM

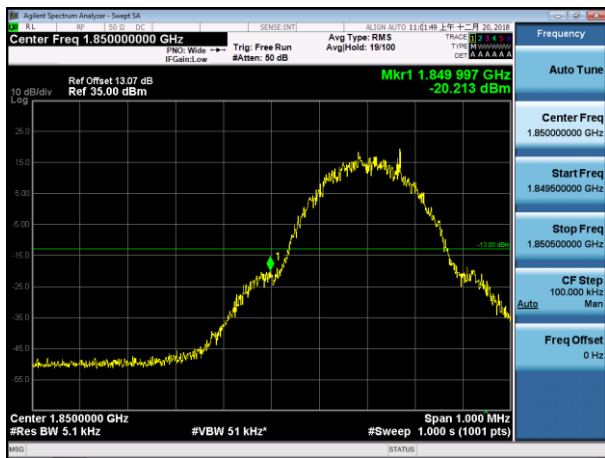


GSM 1900-HCH-GSM

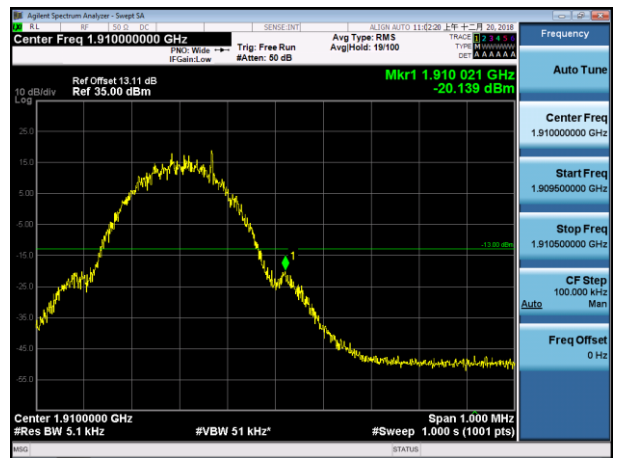

GSM 1900-LCH-EDGE

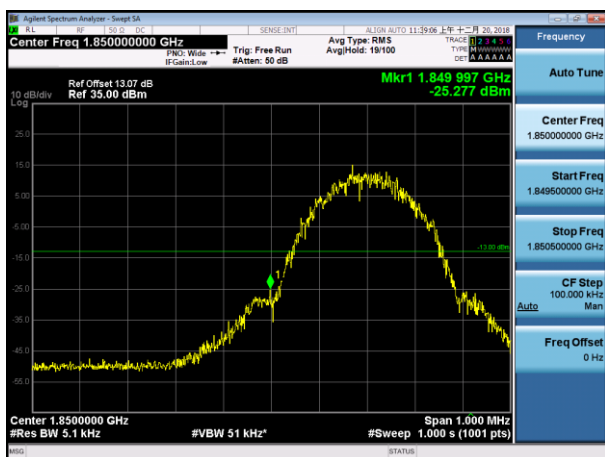

GSM 1900-HCH-EDGE

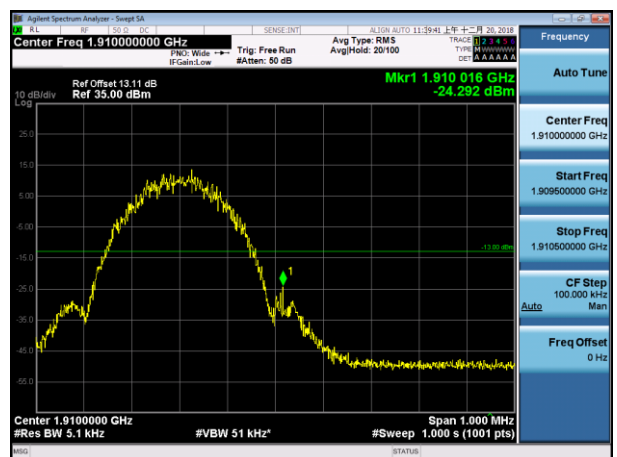




For WCDMA

Test Band=WCDMA850/WCDMA1700/WCDMA1900

Test Mode=UMTS


WCDMA 850-LCH

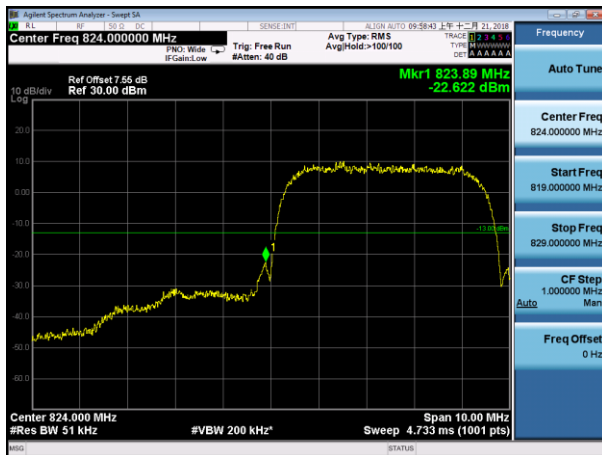

WCDMA 850-HCH




WCDMA 1700-LCH

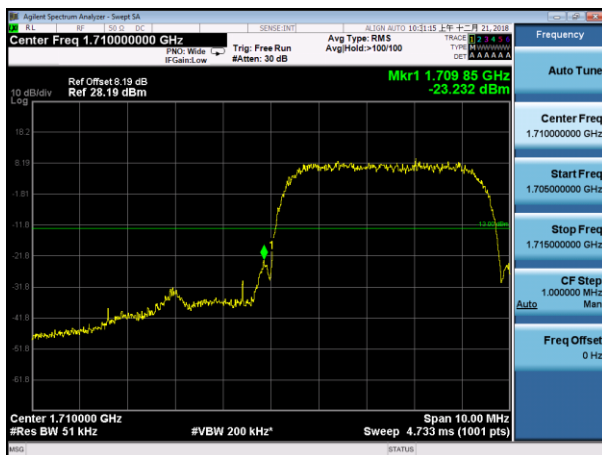

WCDMA 1700-HCH



WCDMA 1900-LCH

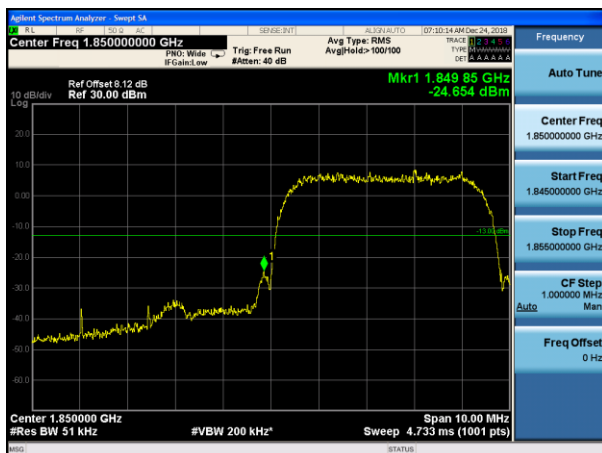

WCDMA 1900-HCH





9. SPURIOUS EMISSION

9.1 CONDUCTED SPURIOUS EMISSION

9.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. The level of the carrier and the various conducted spurious and harmonic frequency is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration.
2. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
3. Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

**Typical Channels for testing of GSM 850**

Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS 1900

Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

Typical Channels for testing of UMTS band II

Channel	Frequency (MHz)
9262	1852.4
9400	1880
9538	1907.6

Typical Channels for testing of UMTS band V

Channel	Frequency (MHz)
4132	826.4
4182	836.4
4233	846.6

Typical Channels for testing of UMTS band IV

Channel	Frequency (MHz)
8562	1712.4
8662	1732.4
8763	1752.6



9.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P , in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.




9.1.3 MEASUREMENT RESULT

Test Results


Test Band=GSM850/GSM1900

Test Mode=GSM/EDGE


GSM 850-LCH-GSM

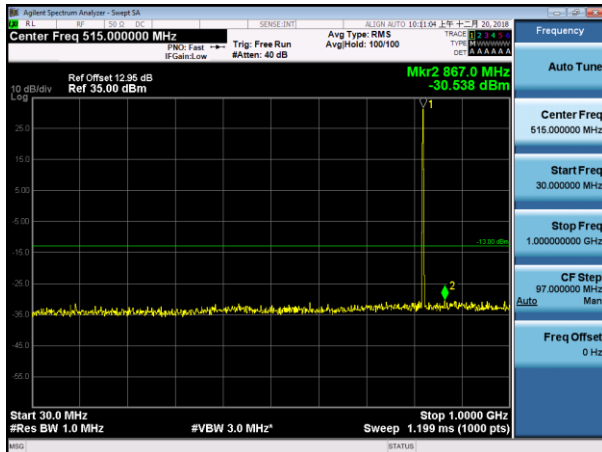


GSM 850-LCH-GSM

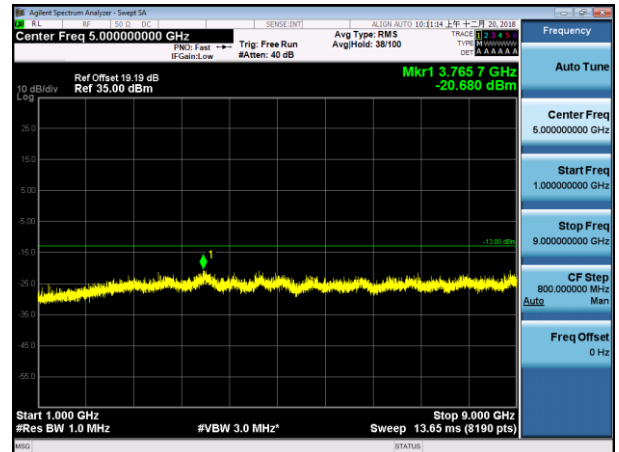

GSM 850-MCH-GSM

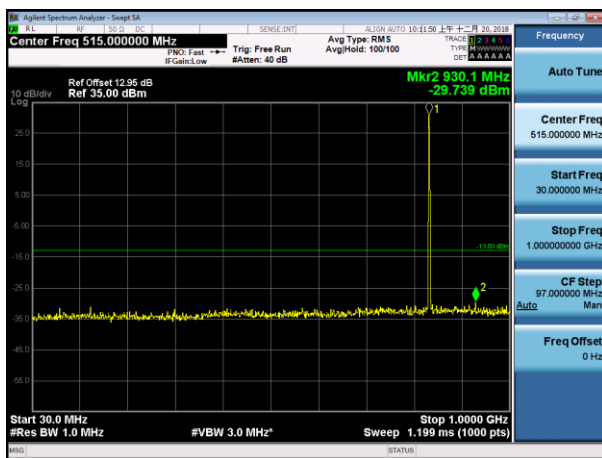


GSM 850-MCH-GSM

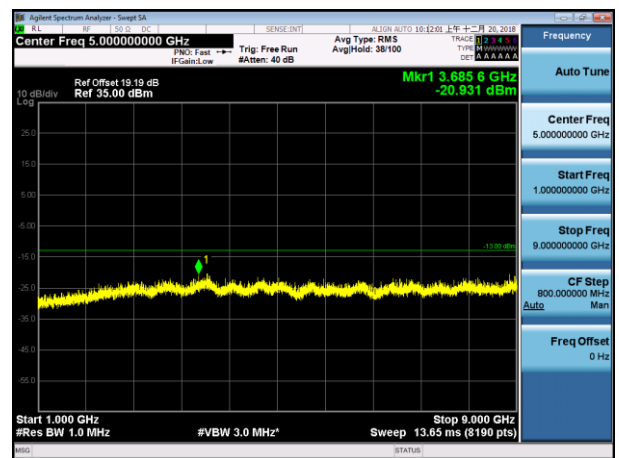





GSM 850-HCH-GSM

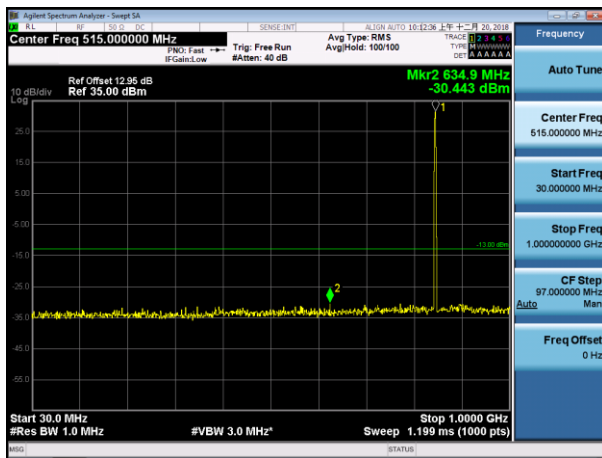


GSM 850-HCH-GSM

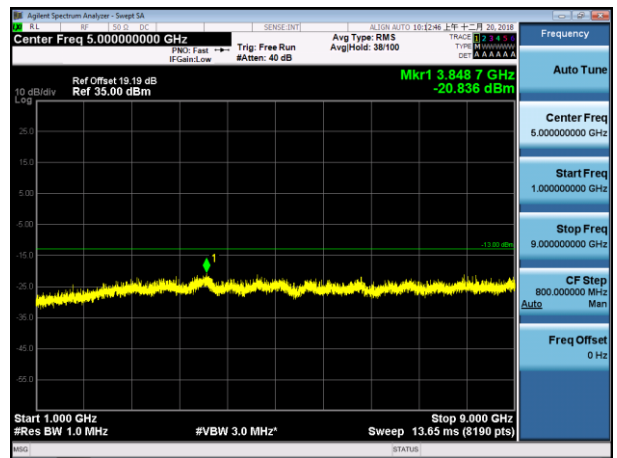


GSM 850-LCH-EDGE

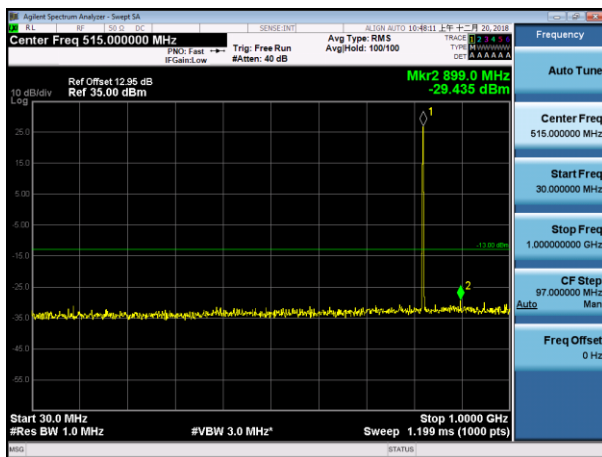

GSM 850-LCH- EDGE

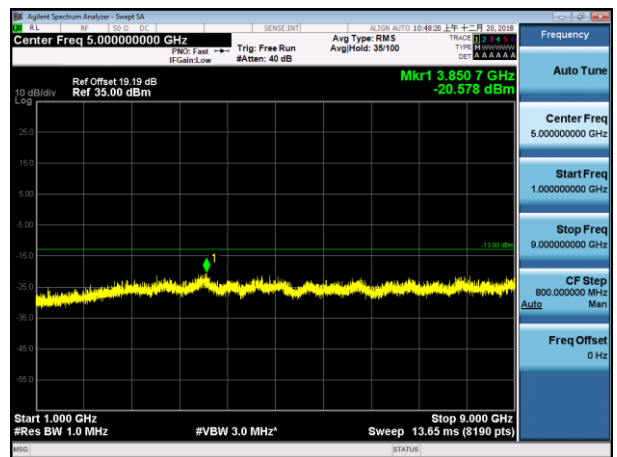

GSM 850-MCH-EDGE

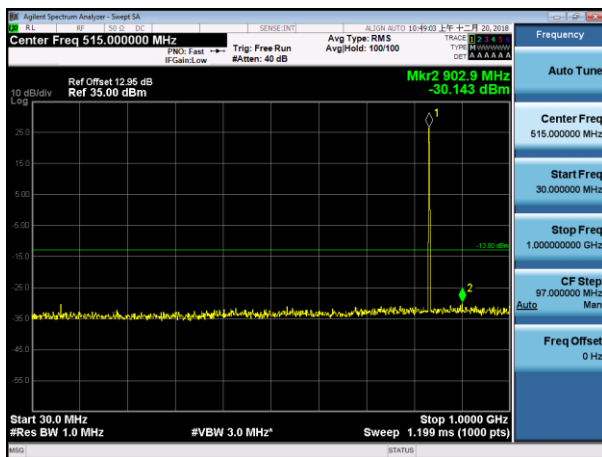

GSM 850-MCH-EDGE

