

Feature

- ※ High gain
- ※ Omani-directional
- ※ Wide bandwidth

Application

##填写对应配置完整的频段信息##

- ※GSM850/900/DCS/PCS/WCDMA B1/B2/B4/B5/B8
- LTE B1/B2/B3/B4/B5/B7/B8/B20/B28/B38/B40/B41

别漏掉下表面的表格

Name and address of the antenna manufacturer	Model number of the antenna
Dongguan Guangzheng Mold Plastic Co., Ltd No. 2 Yucheng Road, Shatounan District, Chang'an Town,Dongguan City	X6850b-ANT0 X6850b-ANT1 X6850b-ANT2 X6850b-ANT3 X6850b-ANT4 X6850b-ANT12 X6850b-ANT13 X6850b-ANT14

TYPE		
Transmitter Frequency		GSM 850/WCDMA B5/LTE B5 : 824 – 849 MHz
		GSM 900/WCDMA B8/LTE B8 : 880 – 915 MHz
		DCS /WCDMA B4/LTE B3/B4: 1710 – 1785 MHz
		PCS/WCDMA B2/LTE B2:1850-1910MHz
		WCDMA B1/LTE B1 : 1920 – 1980MHz
		LTE B7 :2500-2570MHz
		LTE B40 :2300-2400MHz
		LTE B38 :2570-2620MHz
		LTE B41 :2535-2655MHz
		LTE B20 :832-862MHz
		LTE B28 :710-755MHz
		GSM 850/WCDMA B5/LTE B5 : 869 – 894 MHz
		GSM 900/WCDMA B8/LTE B8 : 925 – 960 MHz
		DCS/LTE B3 : 1805 – 1880 MHz
		WCDMA 4/LTE B4 : 2110-2155 MHz
Receiver Frequency		PCS/WCDMA B2/LTE B2:1930-1990MHz
		WCDMA B1/LTE B1 : 2110 – 2170MHz
		LTE B7 :2620-2690MHz
		LTE B40 :2300-2400MHz
		LTE B38 :2570-2620MHz
		LTE B41 :2535-2655MHz
		LTE B20 :791-821MHz
		LTE B28 :758-803MHz
		GSM850/900: 32+/-2dBm
		DCS/PCS: 30+/-2dBm
		LTE B1/B2/B3/ B4/B5/B7/B8/B20/B28/B38/B40/B41: 23+/-2dBm
		WCDMA B1/B2/B4/B5/ B8: 23+/-2dBm
RF-Output Power (E.I.R.P)		
Antenna Gain	ANT0	GSM 850/WCDMA B5/LTE B5 : -6.89 dBi
		GSM 900/WCDMA B8/LTE B8 : -6.14 dBi
		LTE B20: -6.89 dBi
		LTE B28 : -7.95 dBi
	ANT4	DCS /WCDMA B4/LTE B3/B4: -2.7 dBi
		PCS/WCDMA B2/LTE B2: -2.8 dBi
		WCDMA B1/LTE B1 : -2.8 dBi
		LTE B7/B38/B41 : -0.88 dBi

##增益报告内需要把所有TX天线的增益值都填写##		LTE B40 : -1.34 dBi
	ANT13	GPS(L1): -1.41 dBi
	ANT12	WIFI 2.4G: -4.12 dBi 5G: -2.31 dBi
	ANT14	WIFI 2.4G: -3.37 dBi 5G: -3.19 dBi
Type of Modulation		

NFC	13.56MHz	Coil Antenna
WPT	110.5KHz-148KHz	Coil Antenna


※ Antenna Gain


##填写增益图时，需要与上表所填增益值对应，对应频段所填的值不能超过增益图的增益范围，例如，下图增益范围为-15 到 0dBi 左右，增益值填写不能超过这个范围##

##天线序号与天线增益图频段对应##


※ Antenna Gain

ANT13

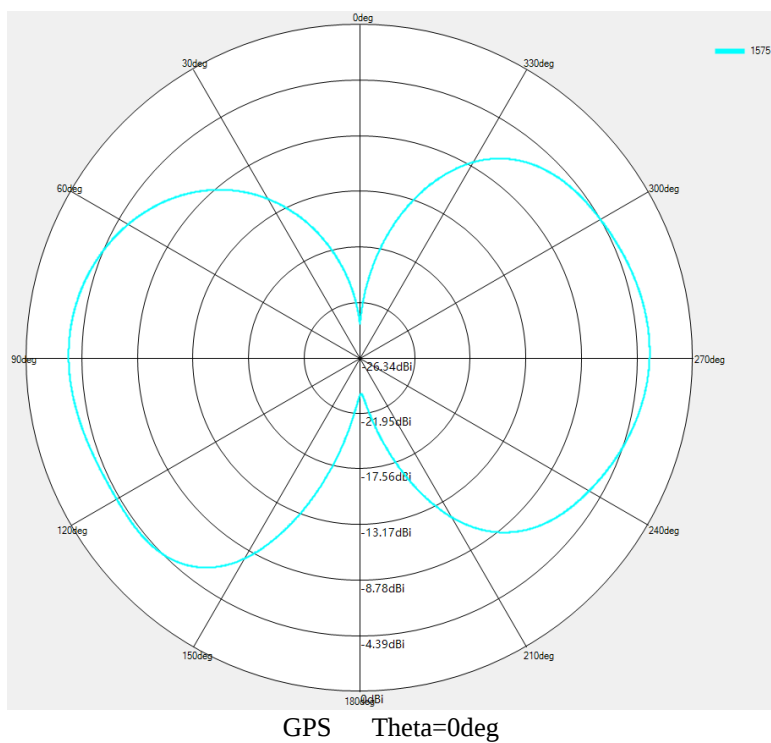

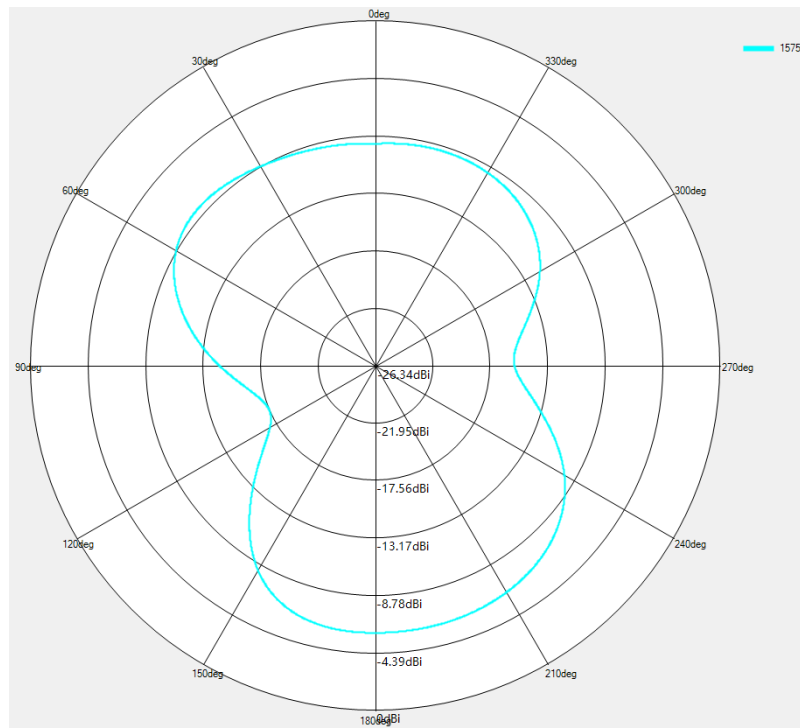



GPS Theta=90deg

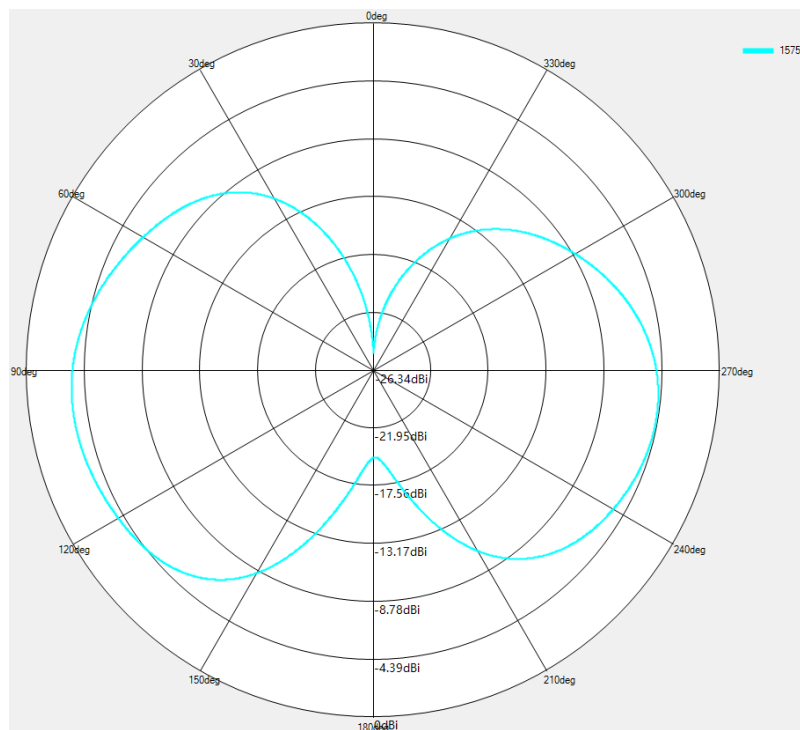


GPS Phi=90deg

※ Antenna Gain


ANT12

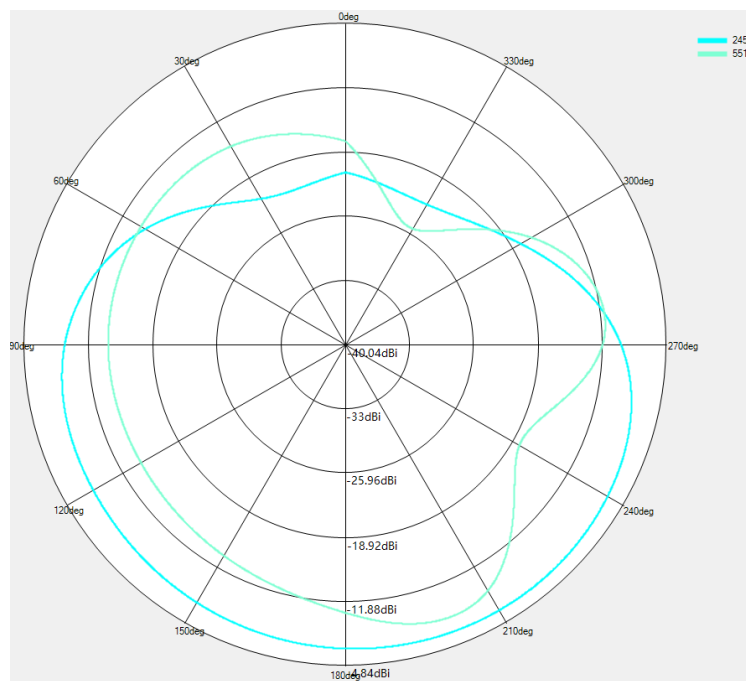
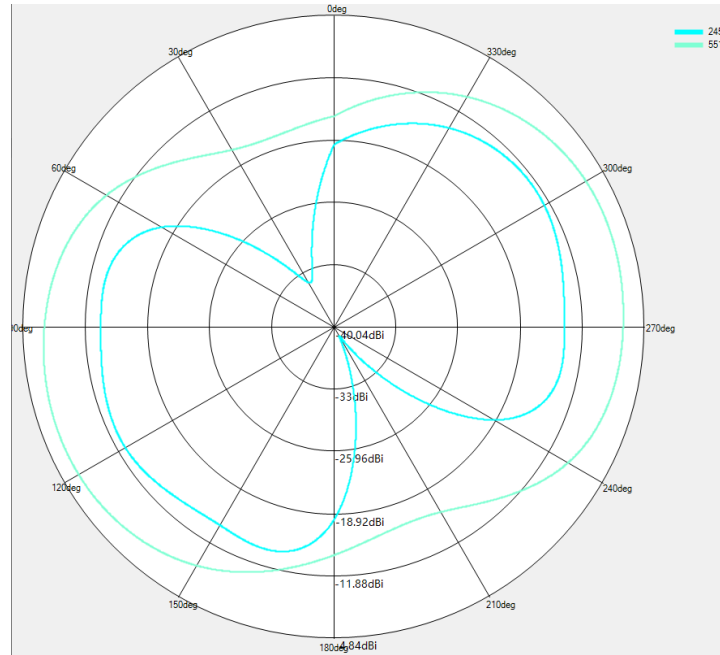


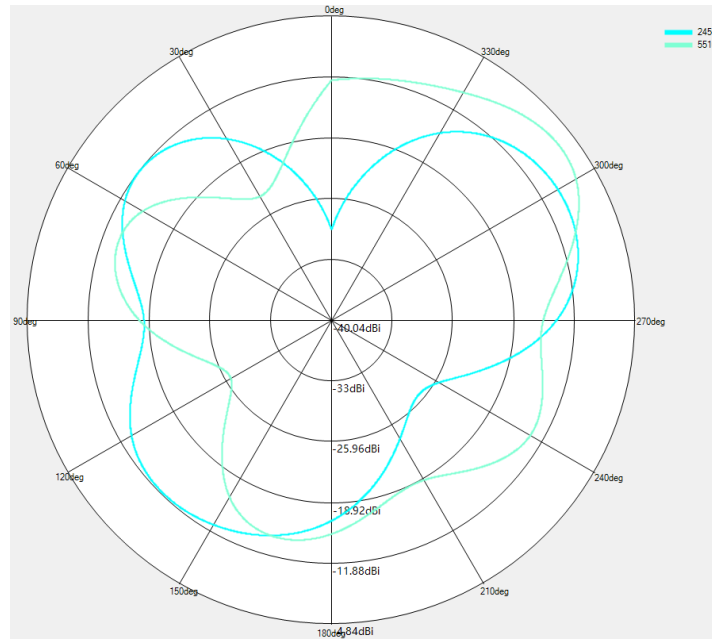

※ Antenna Gain


ANT14

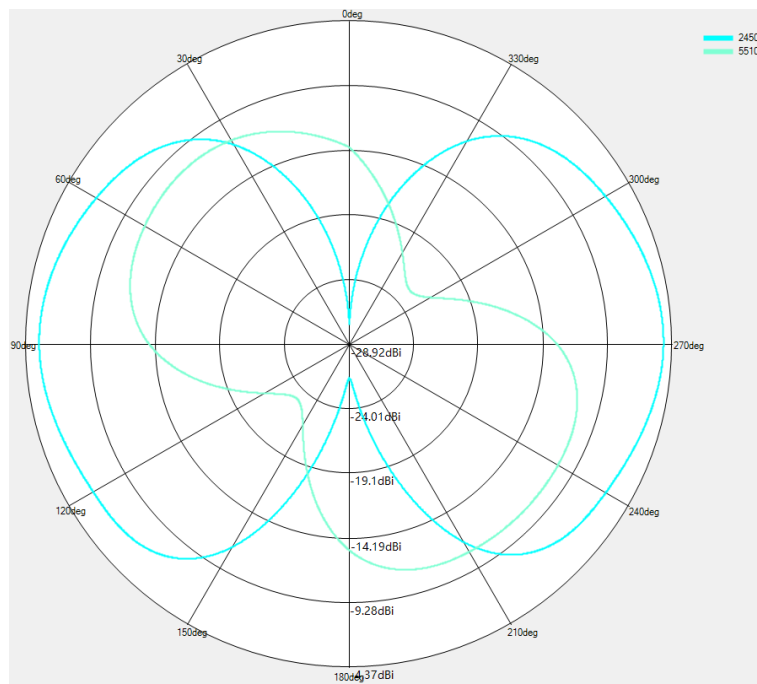

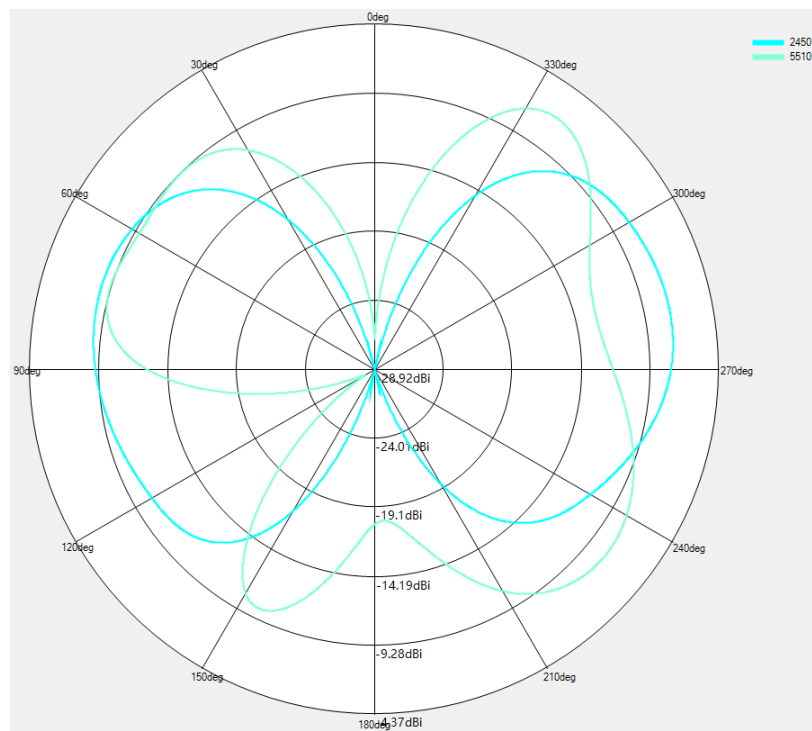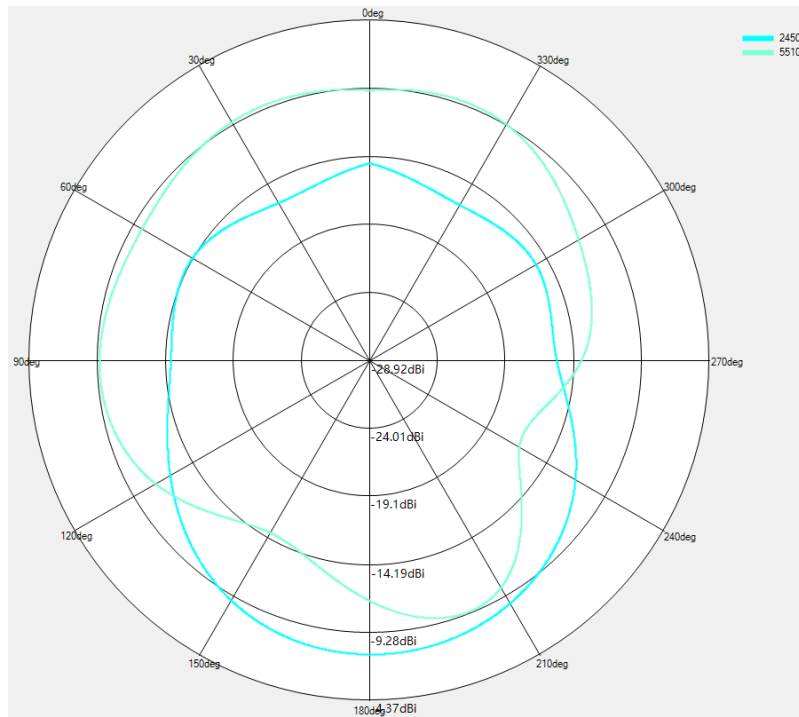


※ Antenna Gain


ANT0

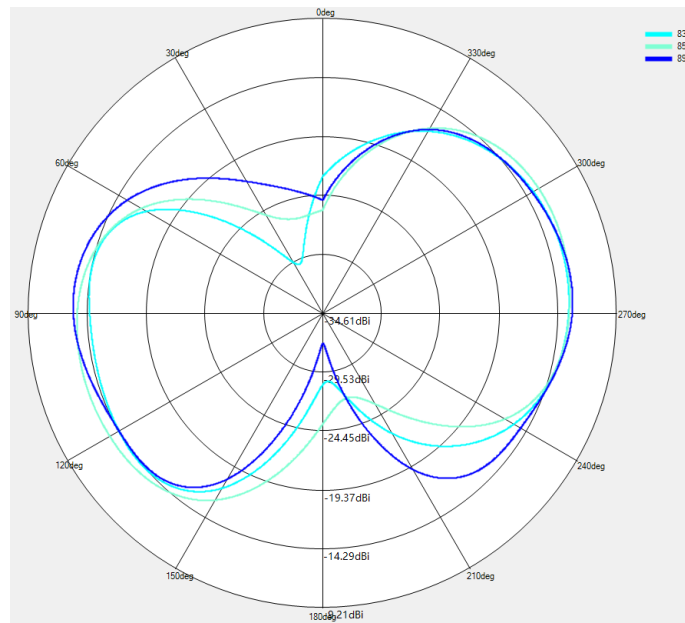

GSM850/ WCDMA B5/LTE B5/B20 Theta=0deg

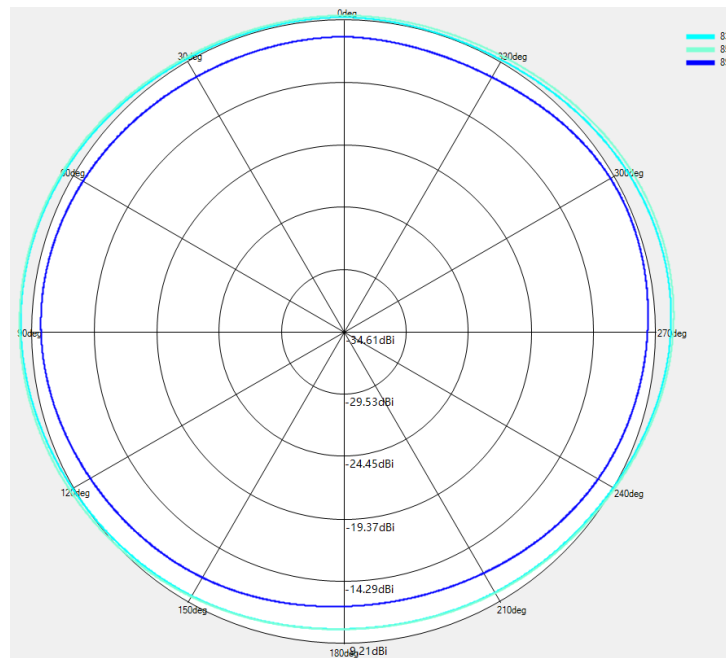


GSM850/ WCDMA B5/LTE B5/B20 Theta=90deg

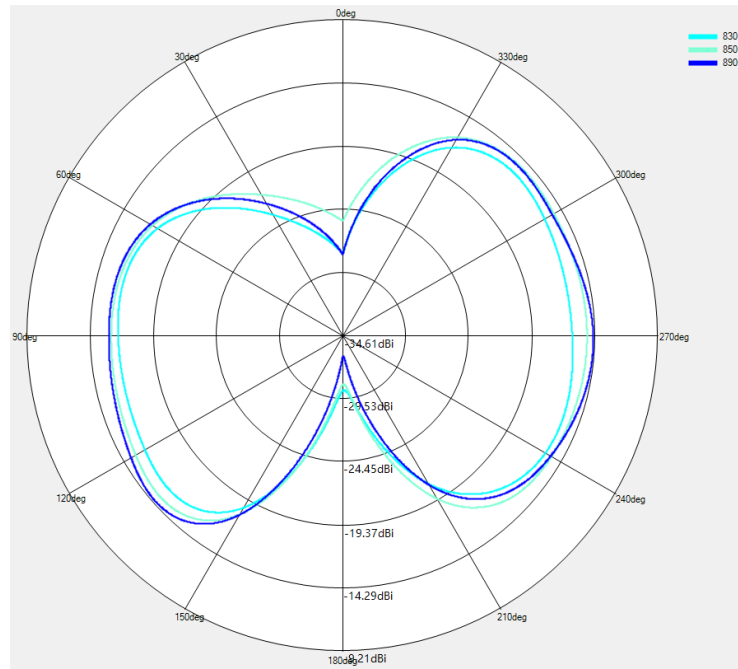


GSM850/ WCDMA B5/LTE B5/B20 Phi=90deg

※ Antenna Gain


ANT0

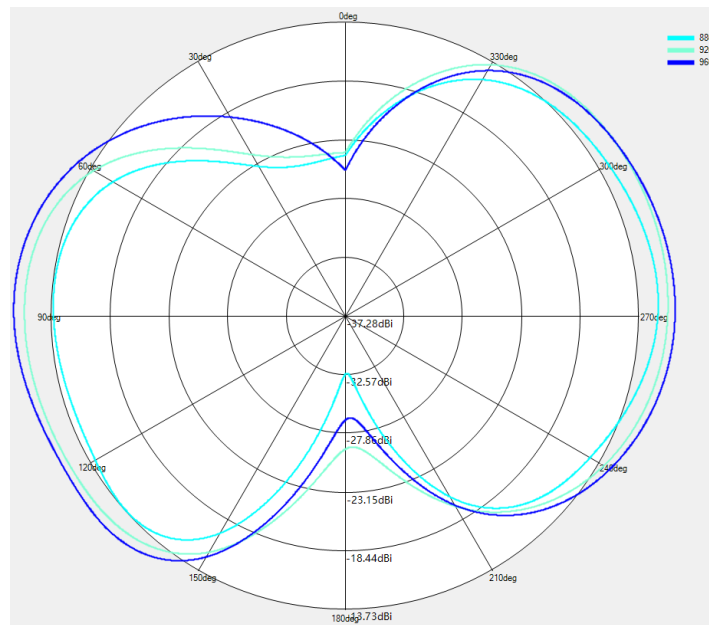

GSM 900/WCDMA B8/LTE B8 Theta=0deg

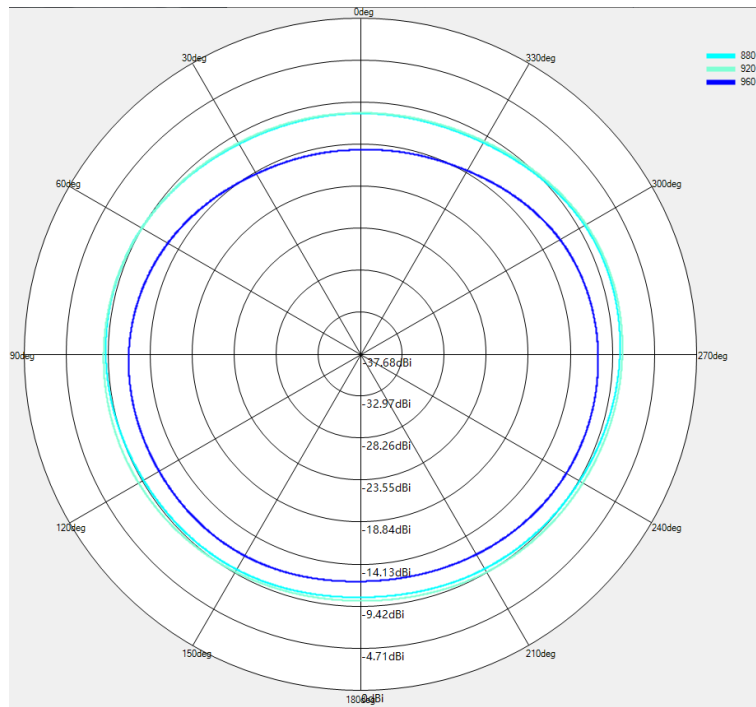


GSM 900/WCDMA B8/LTE B8 Theta=90deg

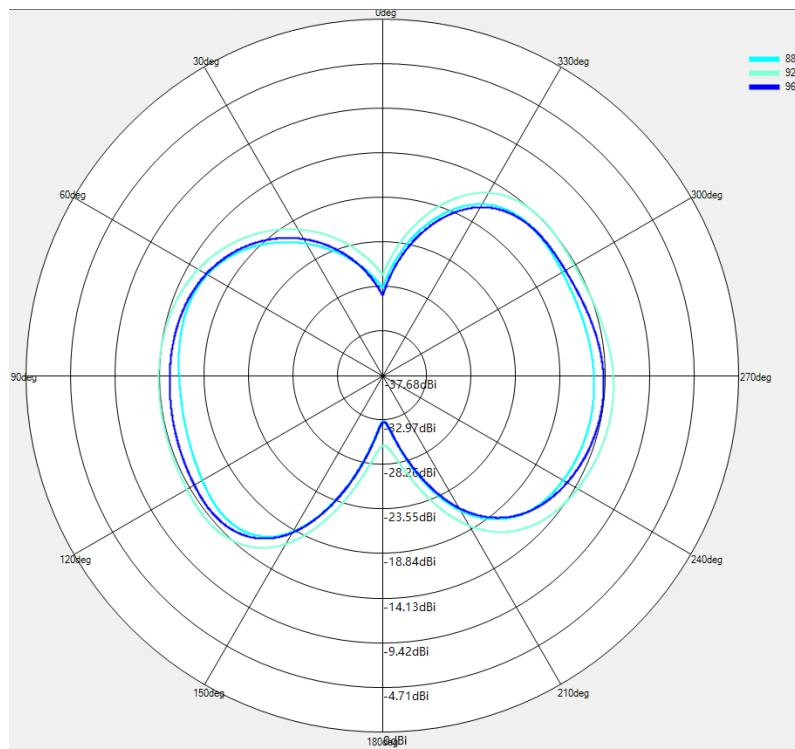


GSM 900/WCDMA B8/LTE B8 Phi=90deg

※ Antenna Gain


ANT0

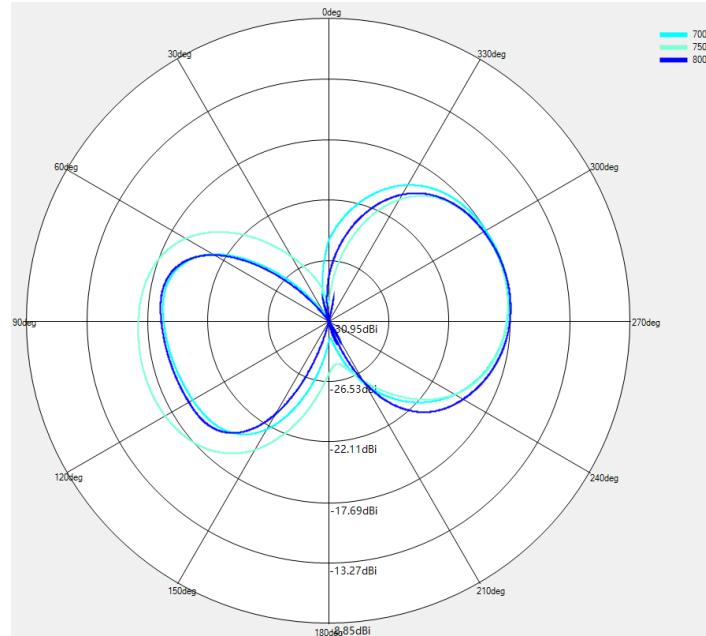

LTE B28 Theta=0deg

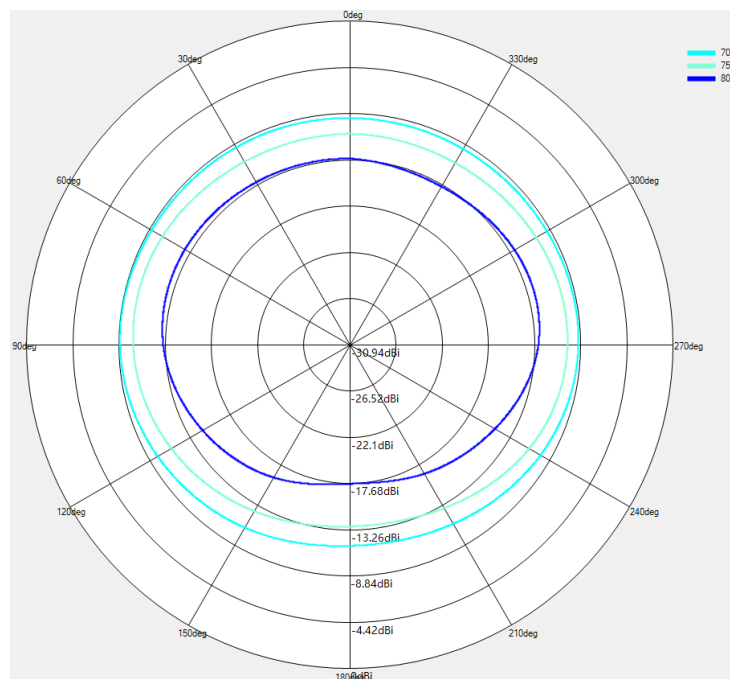



LTE B28 Theta=90deg

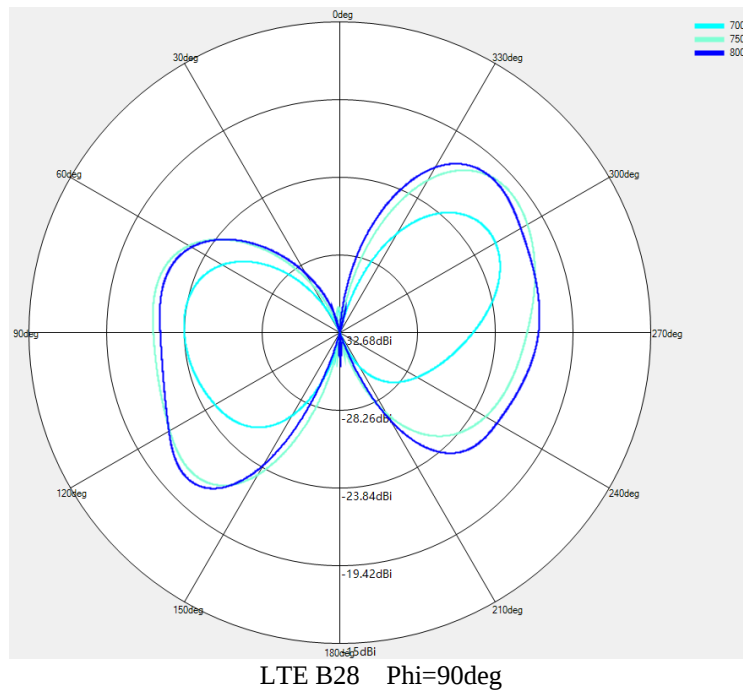


※ Antenna Gain

ANT4

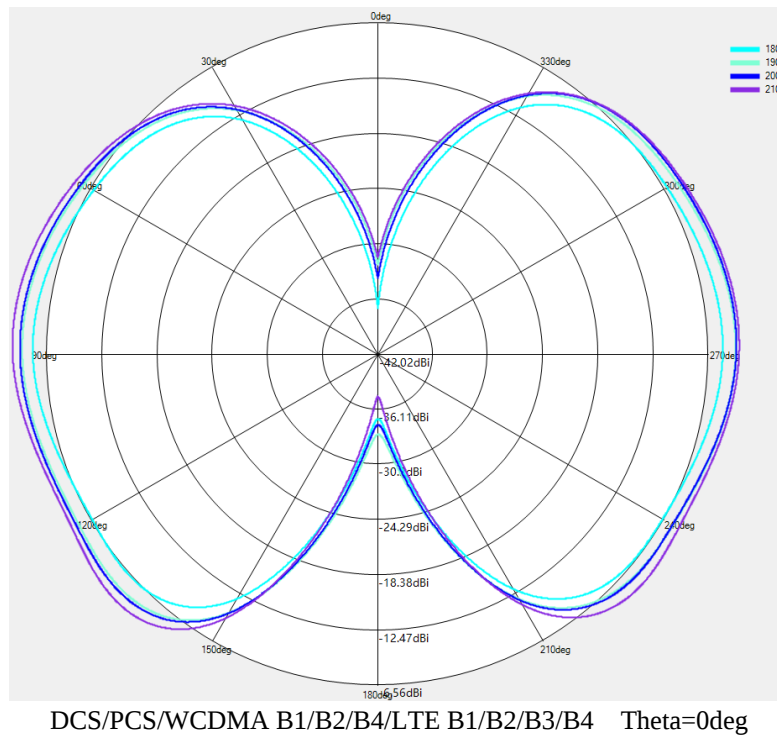

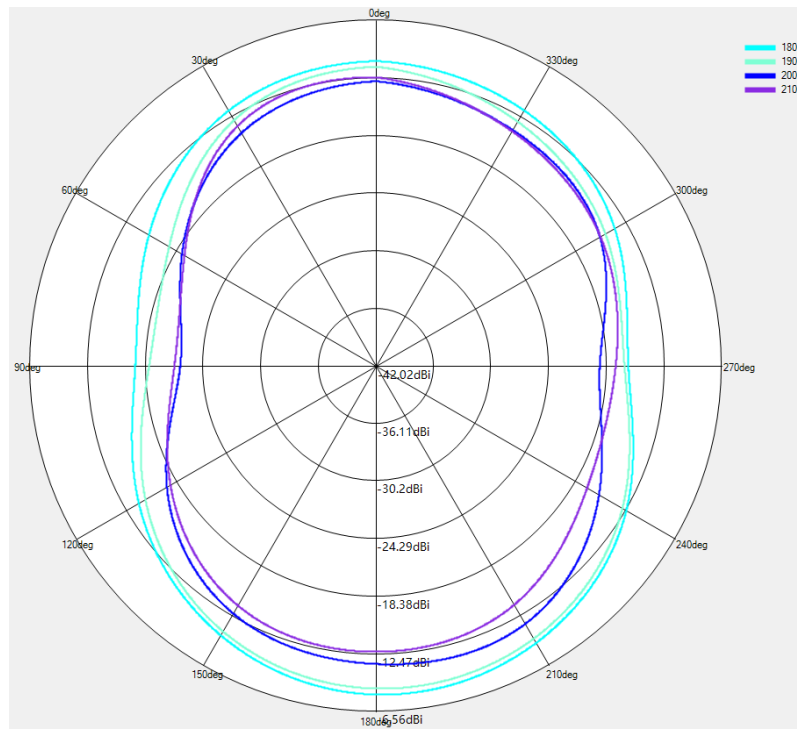


DCS/PCS/WCDMA B1/B2/B4/LTE B1/B2/B3/B4 Theta=90deg

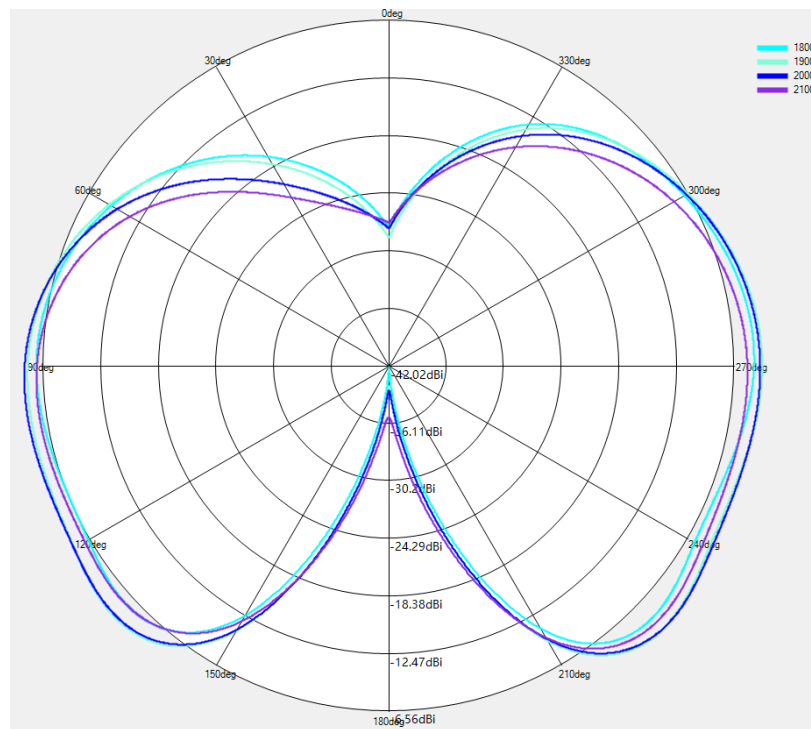


DCS/PCS/WCDMA B1/B2/B4/LTE B1/B2/B3/B4 Phi=90deg

※ Antenna Gain


ANT4

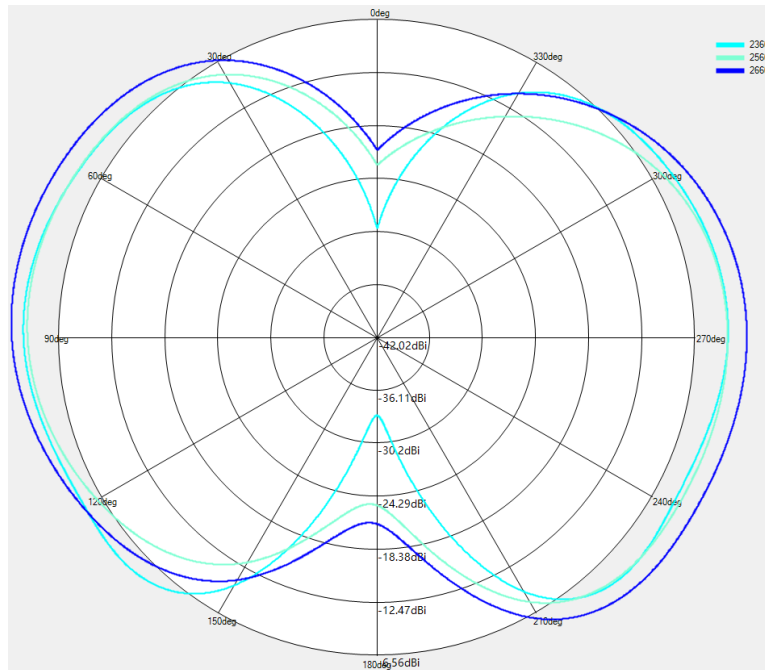

LTE B7/B38/B40/B41 Theta=0deg

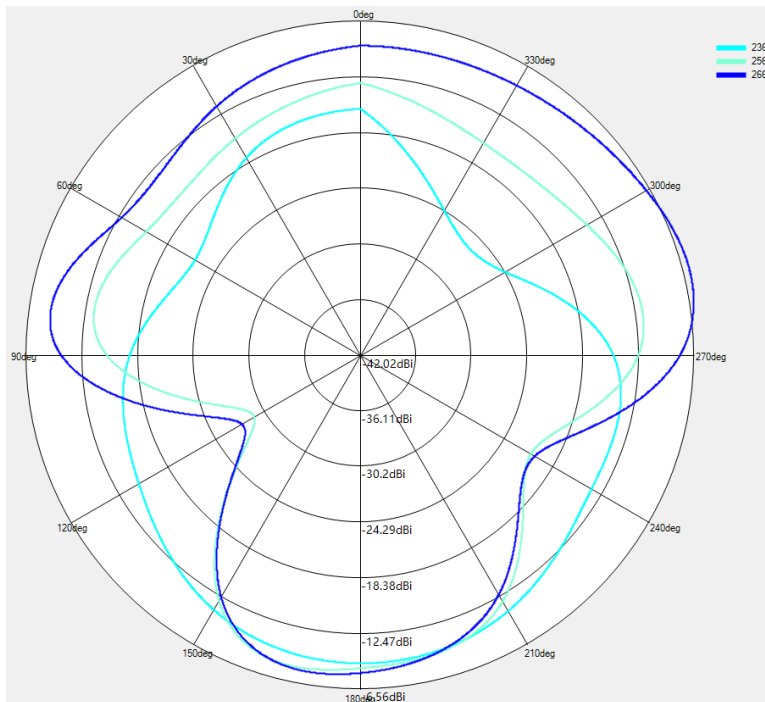

LTE B7/B38/B40/B41 Theta=90deg

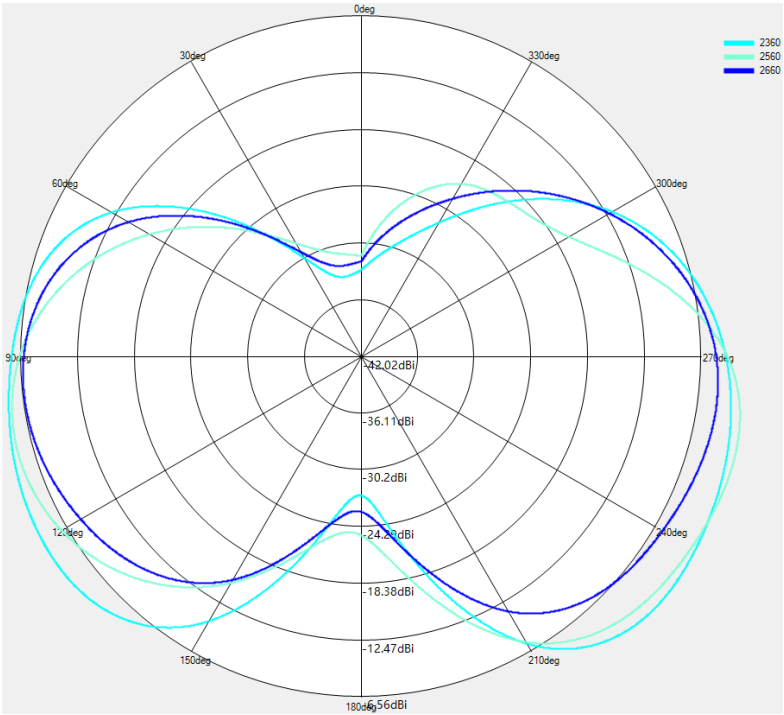

LTE B7/B38/B40/B41 $\Phi=90^\circ$

PREPARED BY	CHECKEDBY	APPROVAL BY	S.R.NO	
	Peitian.zhang		DATE:	2024/01/18