

承 认 书

SPECIFICATION FOR APPROVAL

客 户
CUSTOMER: SHENZHEN YONGMAN DIGITAL CO.,LTD

客 户 料 号:
CUST P/N:

料 号:
P/N:

TX-WPCX-D42.5*0.6-6.5UH

产 品 型 号
DESC: 20.5*39-0.08*80P-11TS-5mm-D42.5*0.6Double
slot outlet with adhesive backing-6.5uh

日 期
DATE:

2024/01/28

版 本:
Version:

A.0

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE

SHENZHEN YONGMAN DIGITAL CO.,LTD

Address: 2nd Floor, Tiantong Industrial Zone, Longhua District, Shenzhen



TEL: 13714532610

Version Change History

SPECIFICATION


产 品 型 号: DESC	20.5*39-0.08*80P-11TS-5mm-D42.5*0.6Double slot outlet with adhesive backing -7.8uh (with round 20 hard magnetic plate added)	Rev: A.0	客 户 CUST:	
			客 户 料 号 CUST P/N:	

一、尺寸 DIMENSION:(mm)

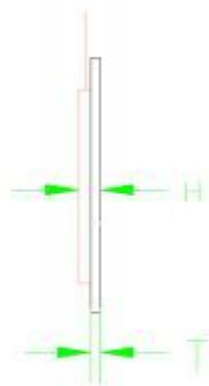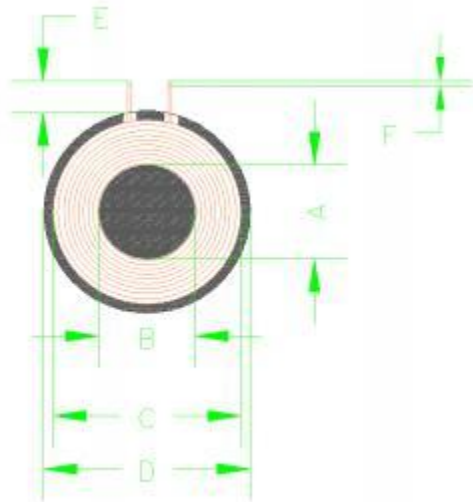

A	20±1mm
B	20.5±0.5mm
C	39±1mm
D	43.5±1mm
E	6±2mm
F	5mmMAX
T	0.6±0.2mm
H	2.5mmMAX

二、原理图 SCHEMATIC DIAGRAM

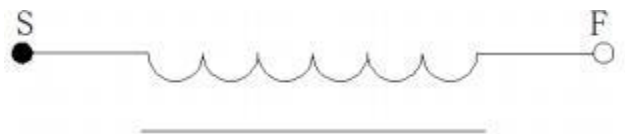

三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S	F	0.08*80P	11Ts	anti-clockwise

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	4.5 uH ± 10% Individual coil	100KHz/1.0V	LCZ METER 1062B
2	IND.	S-F	6.5 uH ± 10%Magnetic strip	100KHz/1.0V	LCZ METER 1062B
3	DCR	S-F	600mΩ Max		LCZ METER 502B

拟制/日期 PREPARED BY/DATE	审核/日期 CHECKED BY/DATE
曾伟浩 zengweihao2024/01/18	张燕 zhangyan2024/01/18