

 厦门新页微电子技术有限公司 Xiamen Newyea Microelectronics Technology Co.,Ltd.		地址: 中国·厦门思明区金山路8号和盛大厦 11 楼 Tel : +86-0592-6882776 www.xmnewyea.com		REVISION (版本)	Rev.1.3
				DATE (日期)	2023.7.28
Product Name 产品名称	单线圈发射模 块	PART NUMBER (产品型号)		NT1015E06	

APPROVAL SHEET

(承 认 书)

FOR
WIRELESS CHARGER
 (无线充)

MODEL NO.
 (型号)

NT1015E06

- ◆ **Company Add:** The 11#Floor,Hesheng Building,No.8,Jinshan Road,siming District,Xiamen,China
- ◆ **Tel:** (86-592) 6882776
- ◆ **Fax:** (86-592) 6882986
- ◆ **Website:** <http://www.xmnewyea.com>




厦门新页微电子技术有限公司
Xiamen Newyea Microelectronics Technology Co.,Ltd.

地址: 中国·厦门思明区金山路8号和盛大厦 11 楼
Tel : +86-0592-6882776 www.xmnewyea.com

REVISION (版本)	Rev.1.3
DATE (日期)	2023.7.28

Product Name 产品名称	单线圈发射模 块	PART NUMBER (产品型号)	NT1015E06
----------------------	-------------	-----------------------	-----------

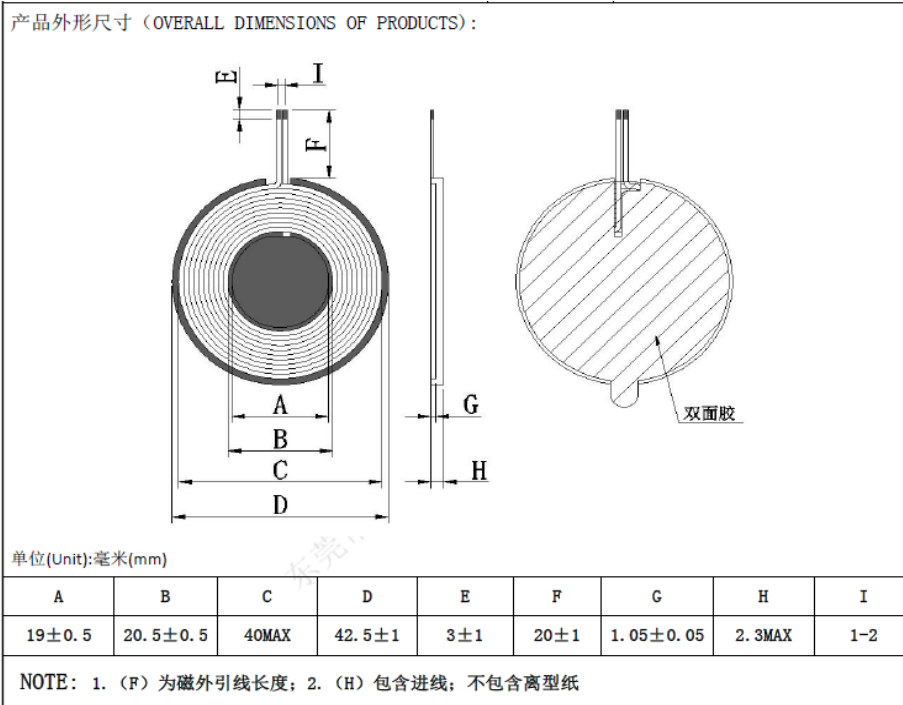

6. Input Characteristics (输入特性)

6.1 Rated Input Voltage (额定输入电压)

Rated input voltage is 12Vdc
(额定输入直流 12V)

6.2 Input Voltage Range (输入电压范围)

Input voltage range is from 11.5Vdc to 13Vdc.
(输入电压范围直流 11.5V~13V)

6.3 Input Frequency (输入频率)

It is normal for 50Hz or 60Hz and single phase.
(输入频率 50Hz/60Hz)

6.4 Steady DC Current (DC 输入电流)

Maximum steady state input current is 1.3A (Min) Measured at 12Vdc input and maximum load.
(12V 满载时输入电流 1.3 A (Min))

6.5 Standby (待机功耗)

The input power shall be less than 0.12 W at 12Vdc input.
(在输入电压 12V 时待机功耗小于 0.12 W)

6.6 Efficiency (效率)

The efficiency is 75% Min (not including the adaptor loss)
效率不低于 75% (不包括适配器损耗)