





Appendix A

RF Test Data for BT LE (Conducted Measurement)

Product Name: Bluetooth Fingerprint Padlock

Test Model: YL-C3BF

Environmental Conditions

Temperature:	23.5℃
Relative Humidity:	52.2%
ATM Pressure:	100.0 kPa
Test Engineer:	 Monkey Li
Supervised by:	 Li Huan




A.1 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.655	≥ 0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.661	≥ 0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.66	≥ 0.5	Pass




Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

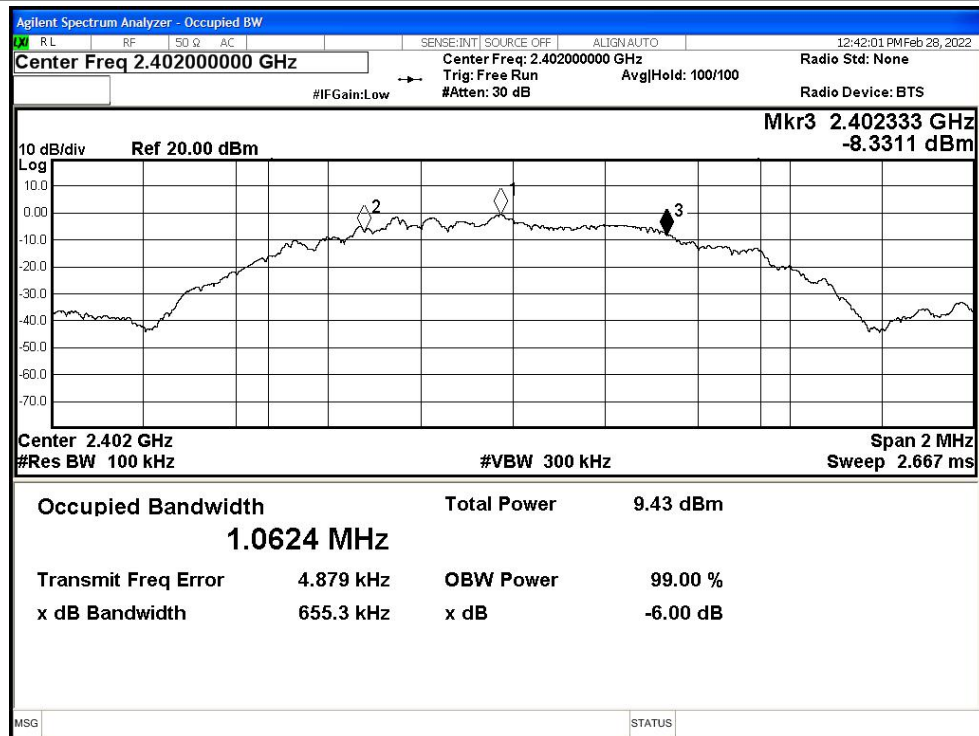


-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

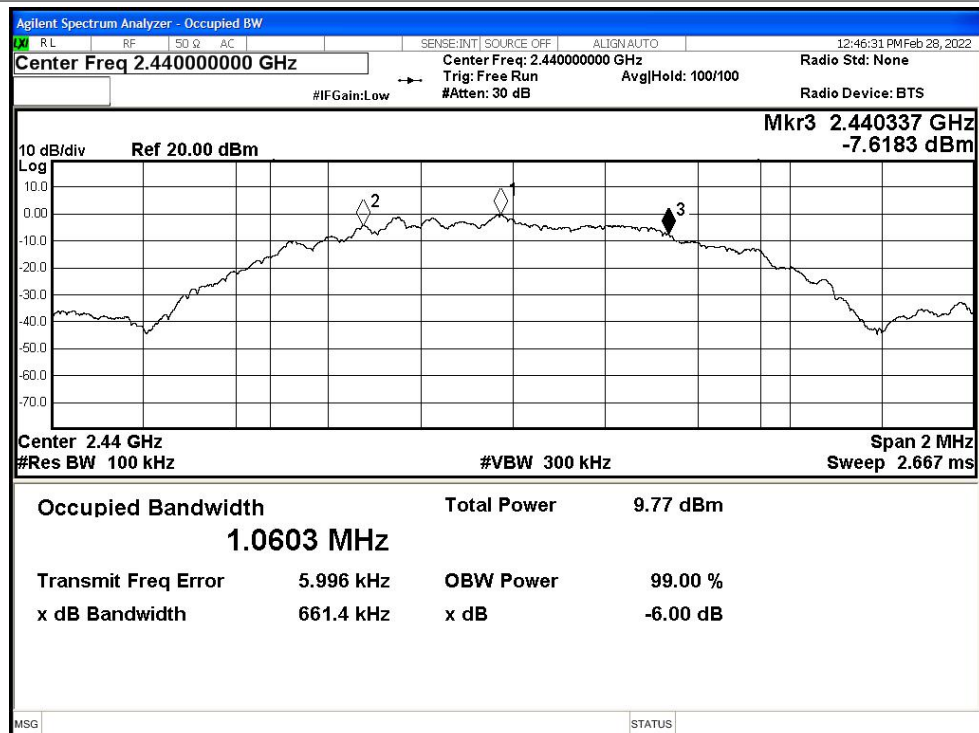



-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

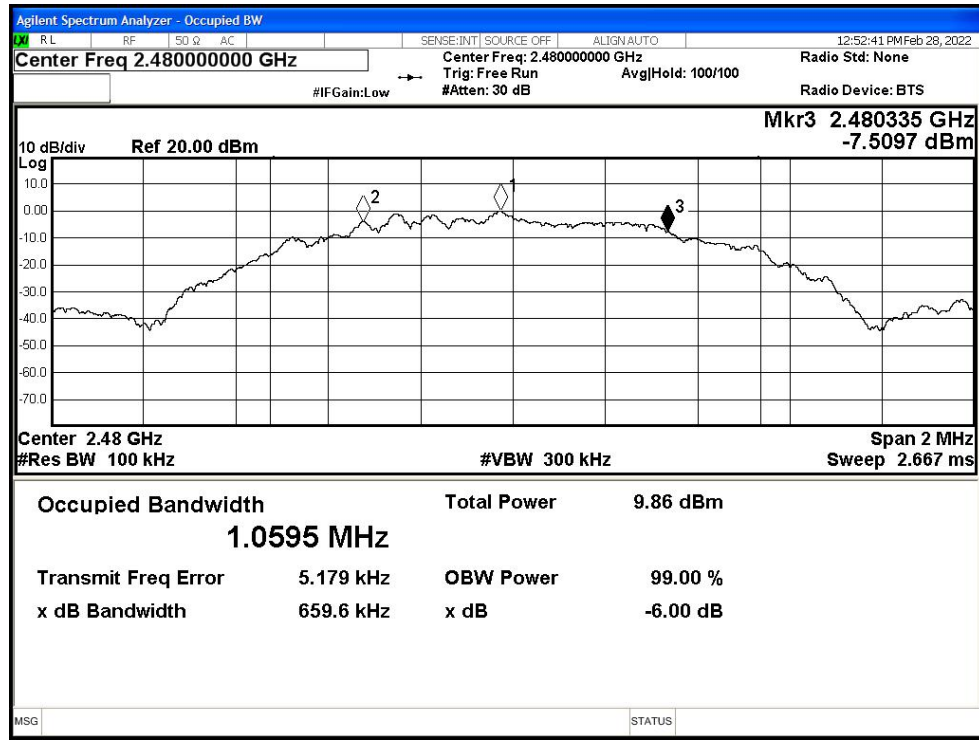




A.2 Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	3.68	≤30	Pass
NVNT	BLE 1M	2440	Ant1	3.94	≤30	Pass
NVNT	BLE 1M	2480	Ant1	4.08	≤30	Pass





Test Graphs

Power NVNT BLE 1M 2402MHz Ant1

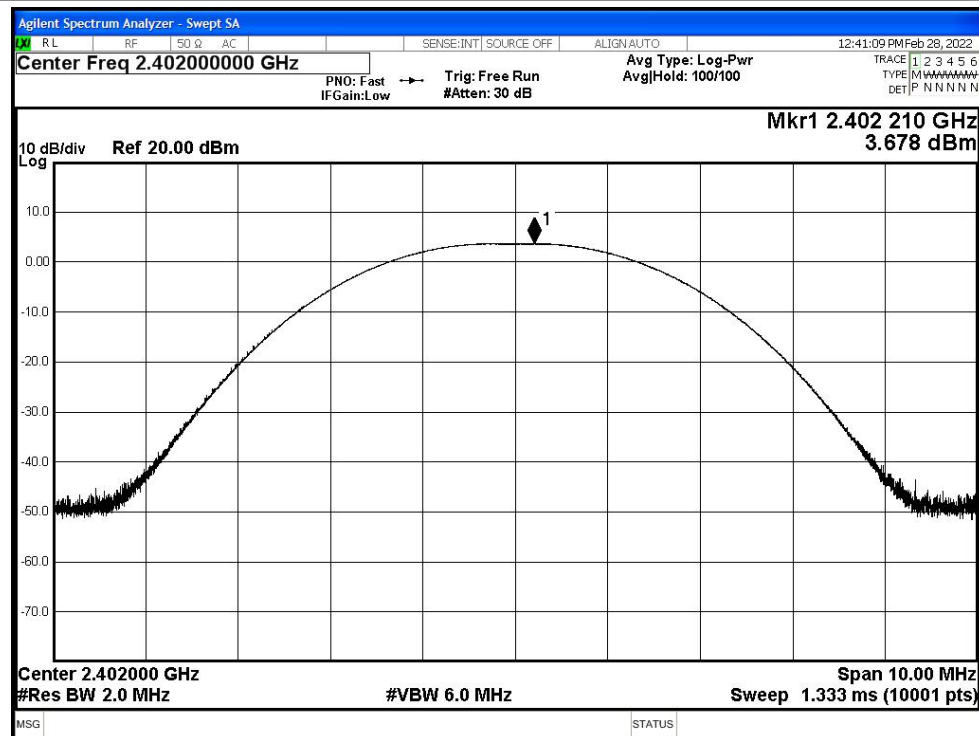

Power NVNT BLE 1M 2440MHz Ant1

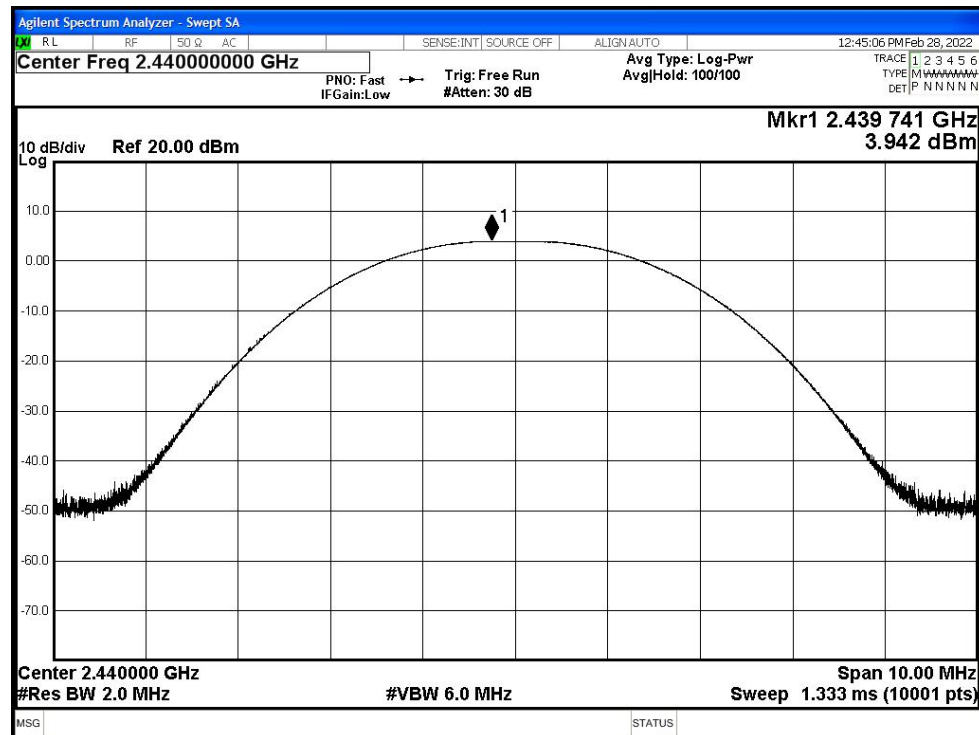

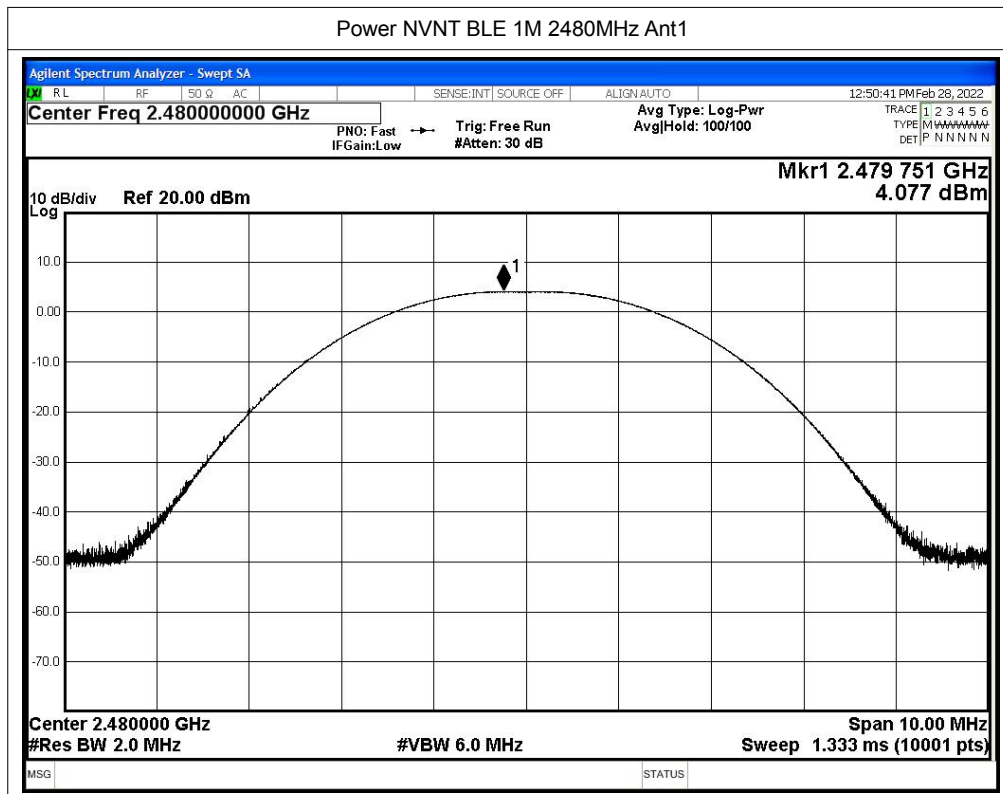




A.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-11.44	≤8	Pass
NVNT	BLE 1M	2440	Ant1	-11.18	≤8	Pass
NVNT	BLE 1M	2480	Ant1	-11.06	≤8	Pass





Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

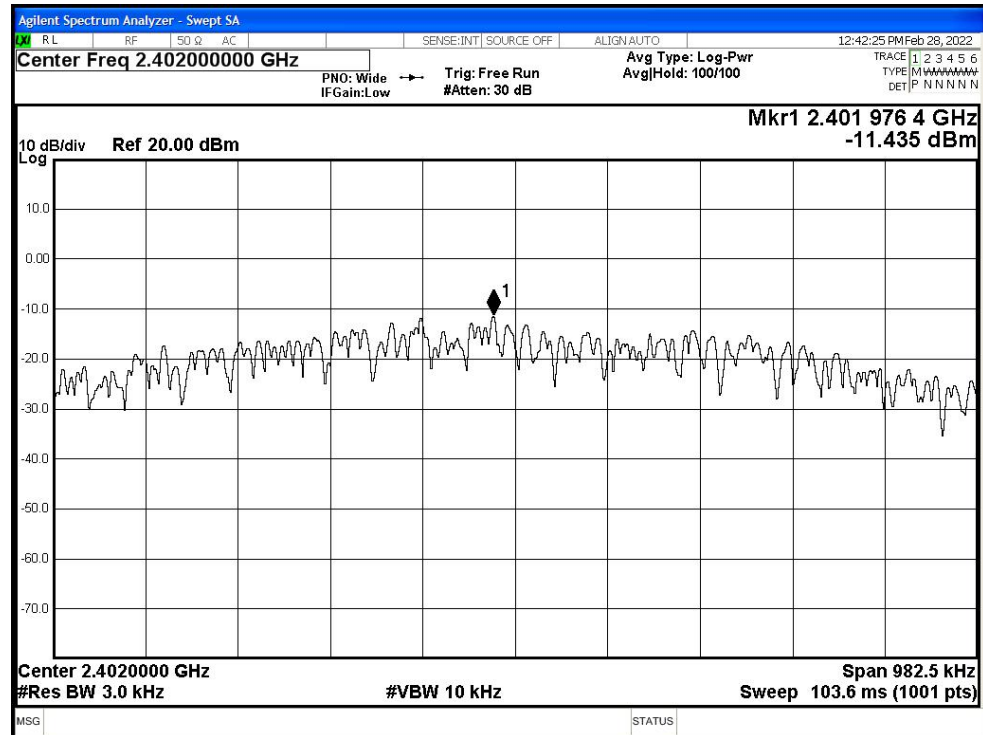

PSD NVNT BLE 1M 2440MHz Ant1

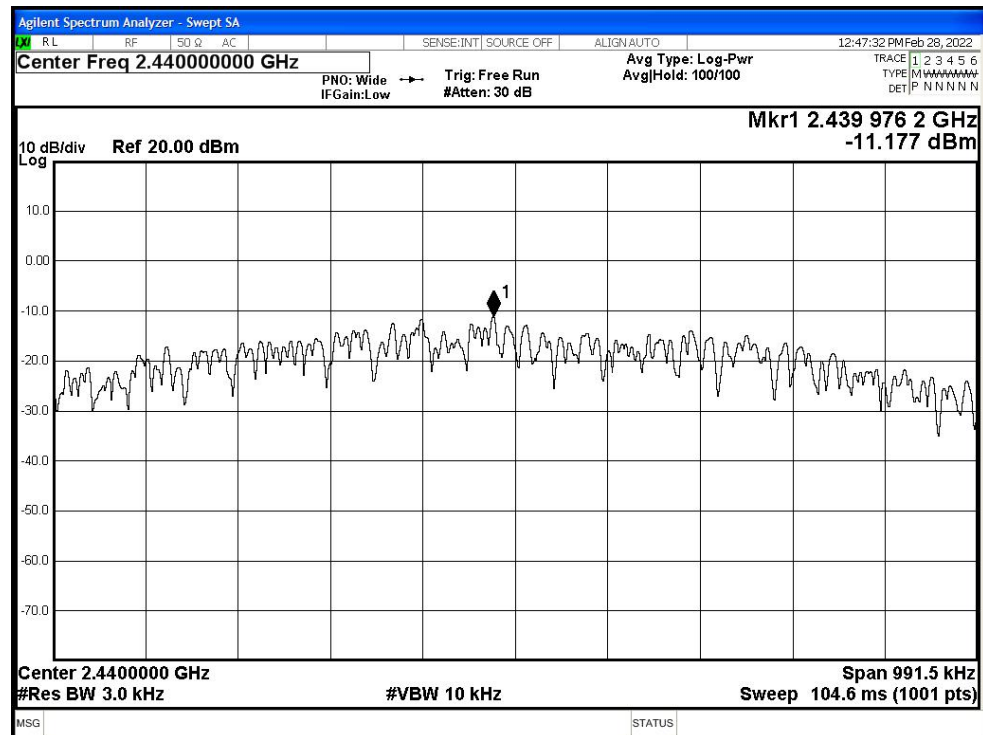

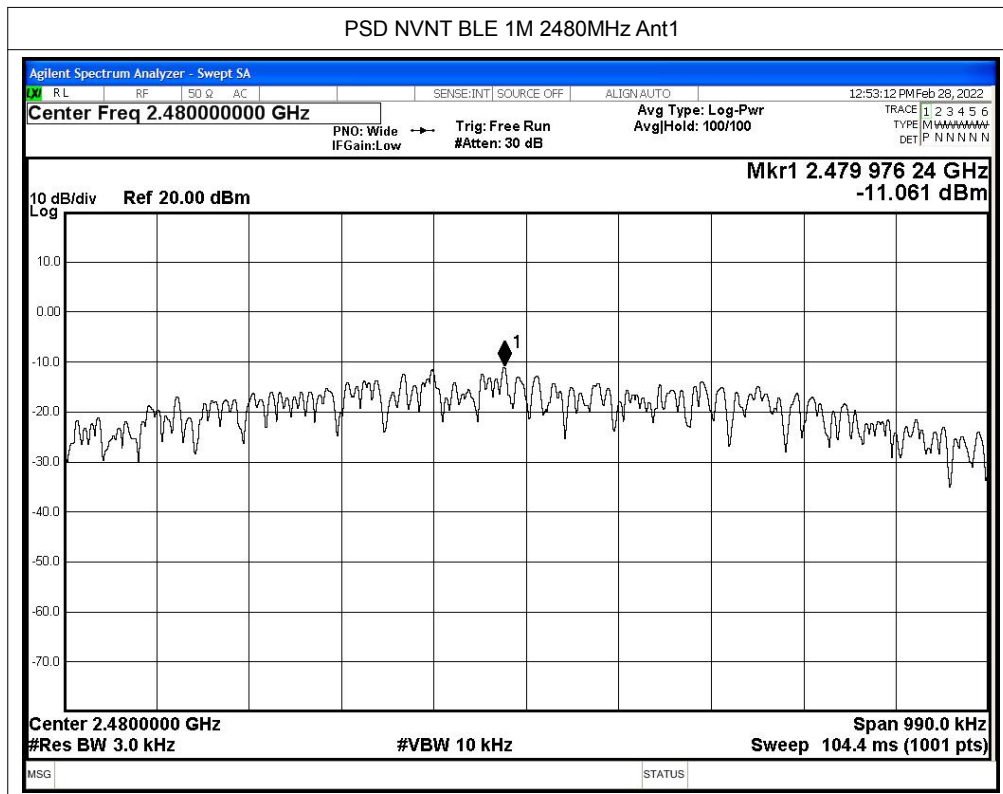




A.4 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max. Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-62.04	≤ -20	Pass
NVNT	BLE 1M	2480	Ant1	-62.1	≤ -20	Pass




Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

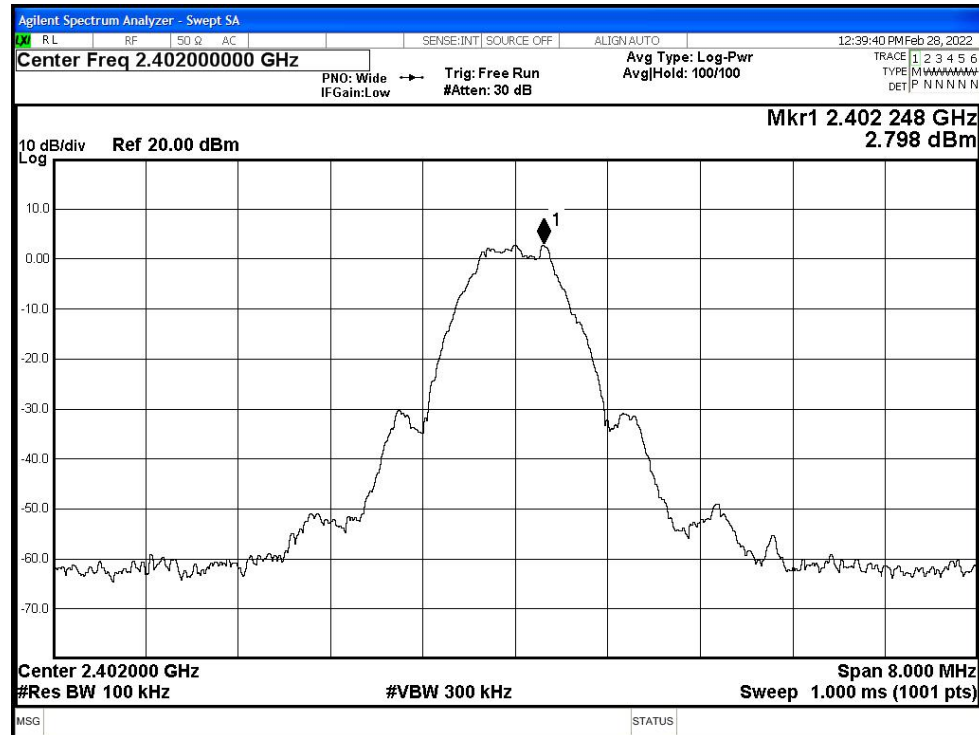


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

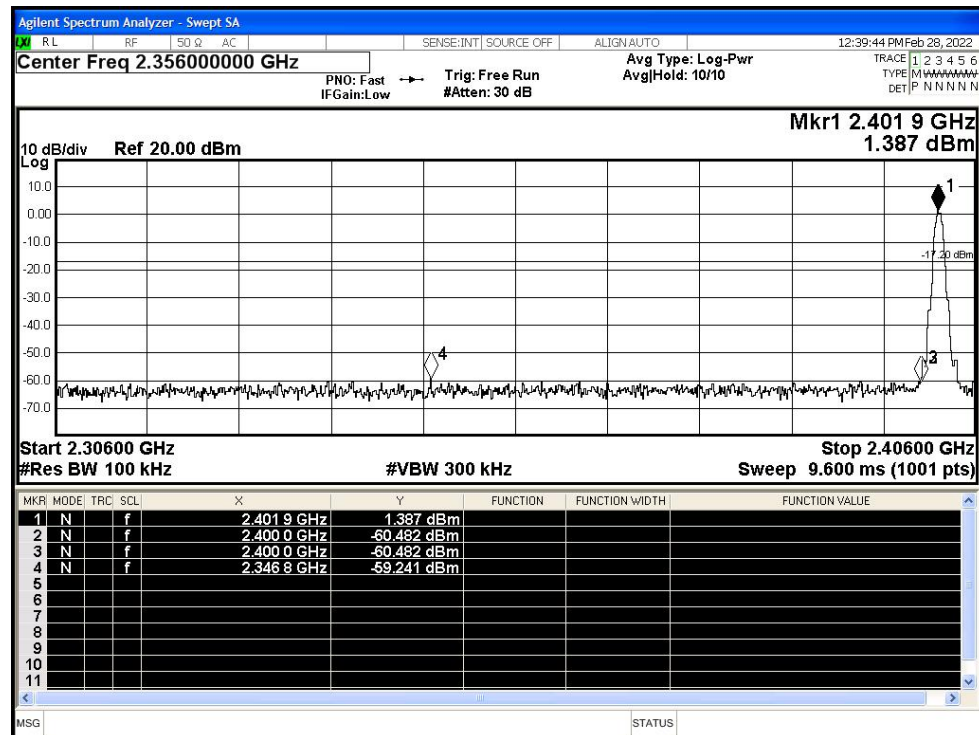




Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

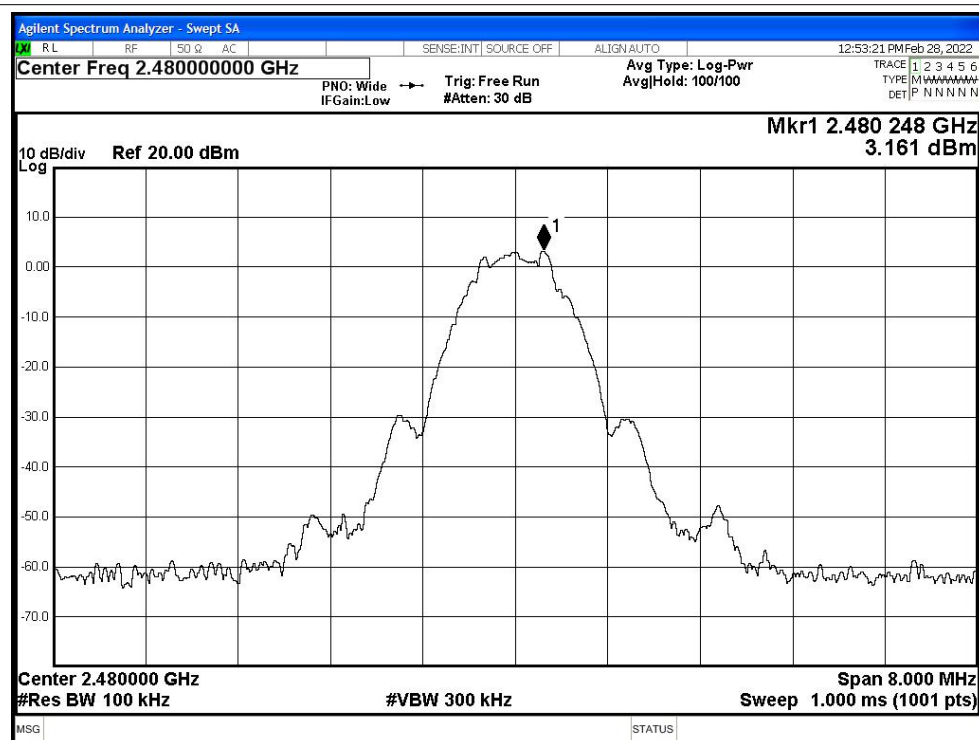

Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

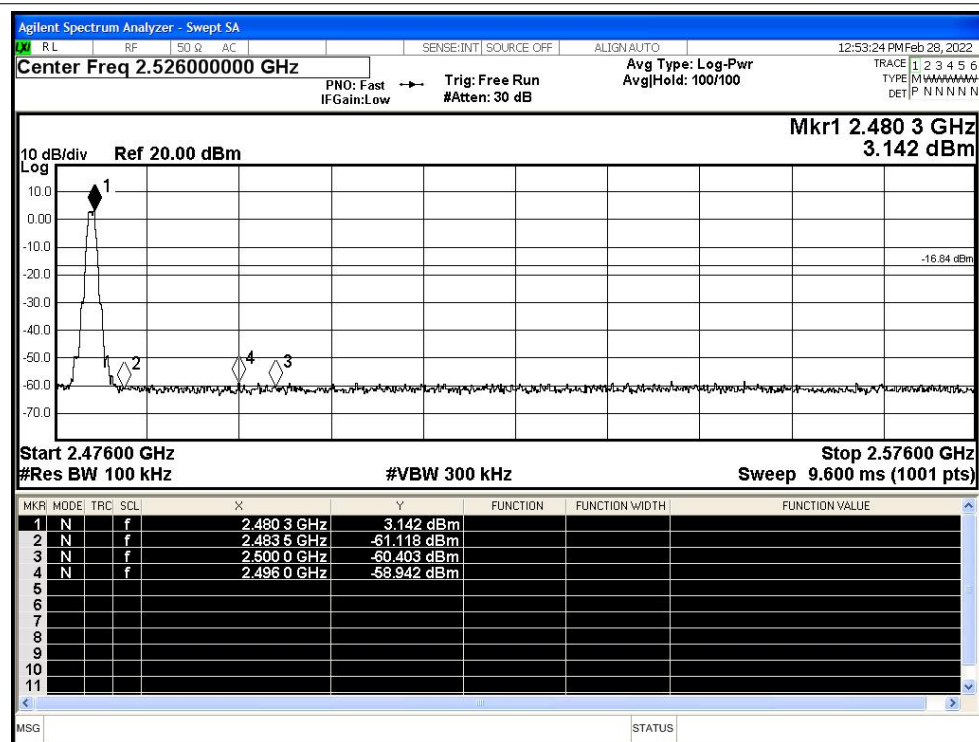




A.5 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max. Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-60.09	≤ -20	Pass
NVNT	BLE 1M	2440	Ant1	-59.96	≤ -20	Pass
NVNT	BLE 1M	2480	Ant1	-59.9	≤ -20	Pass




Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

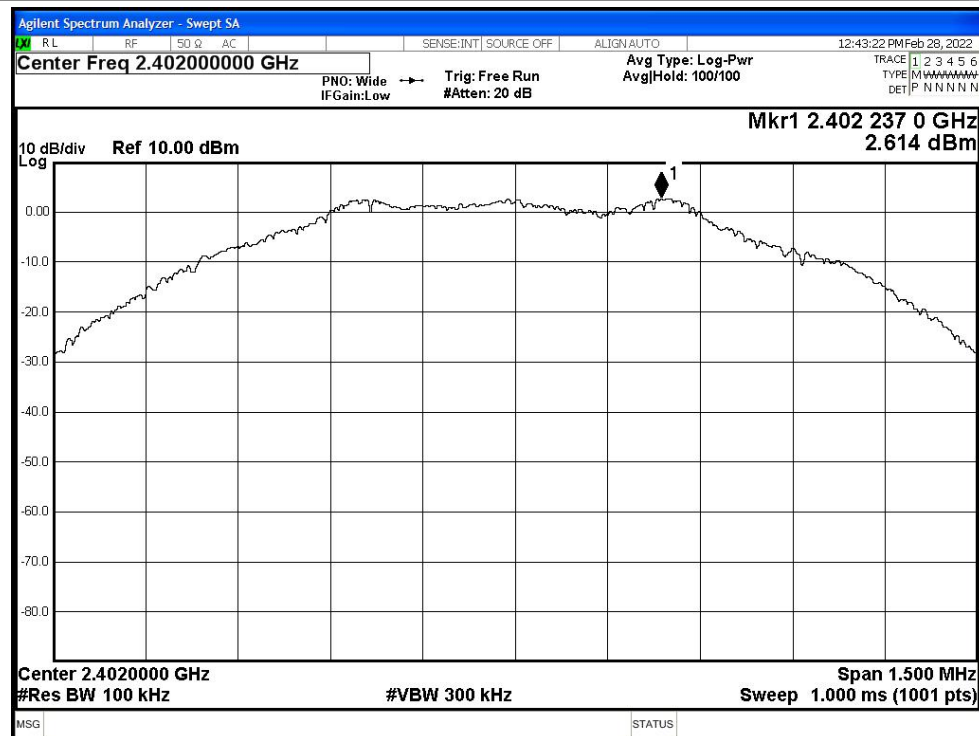


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

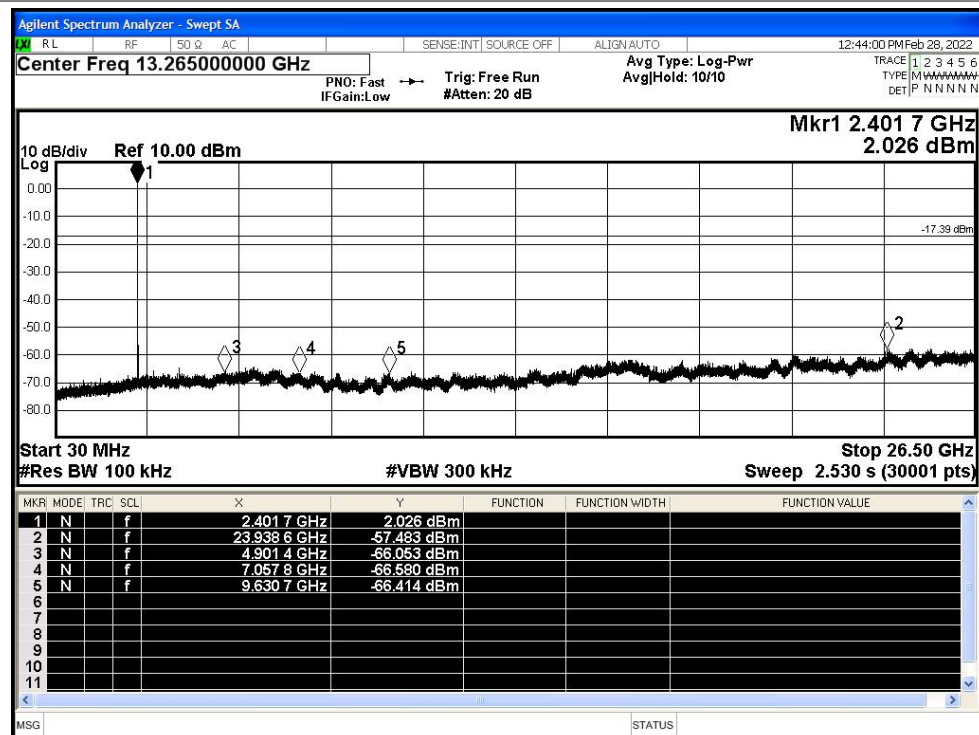




Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

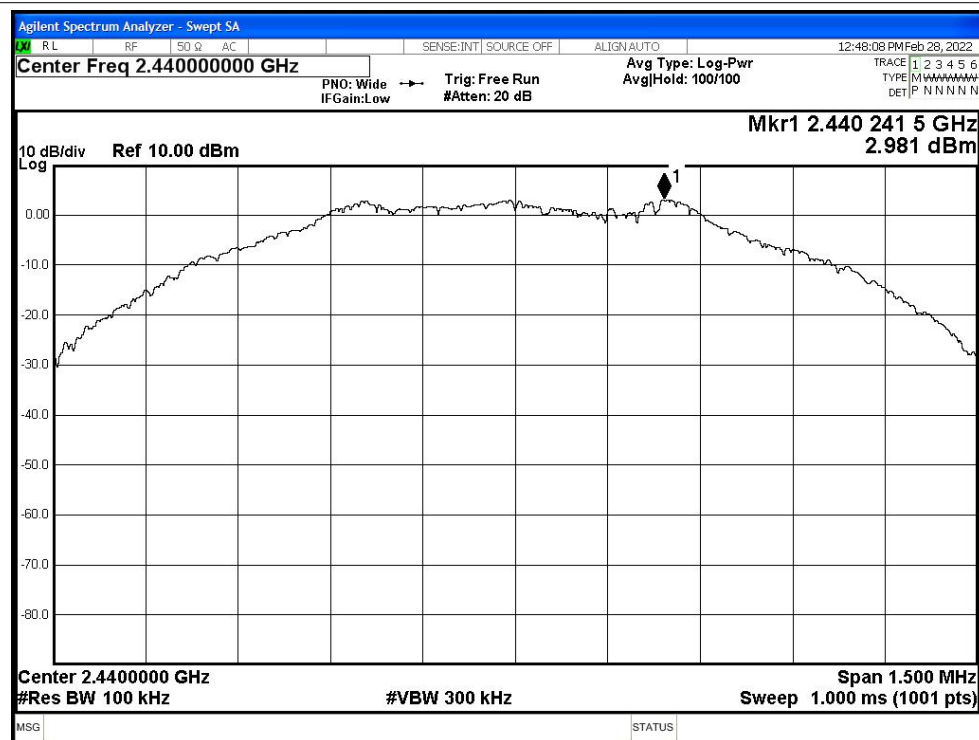


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

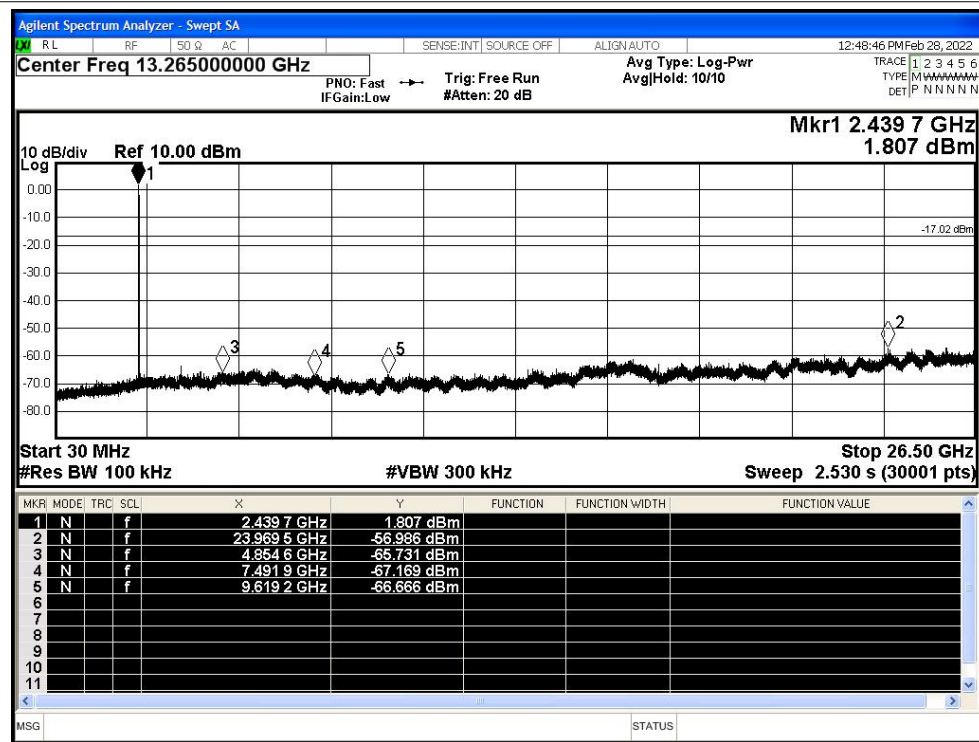




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

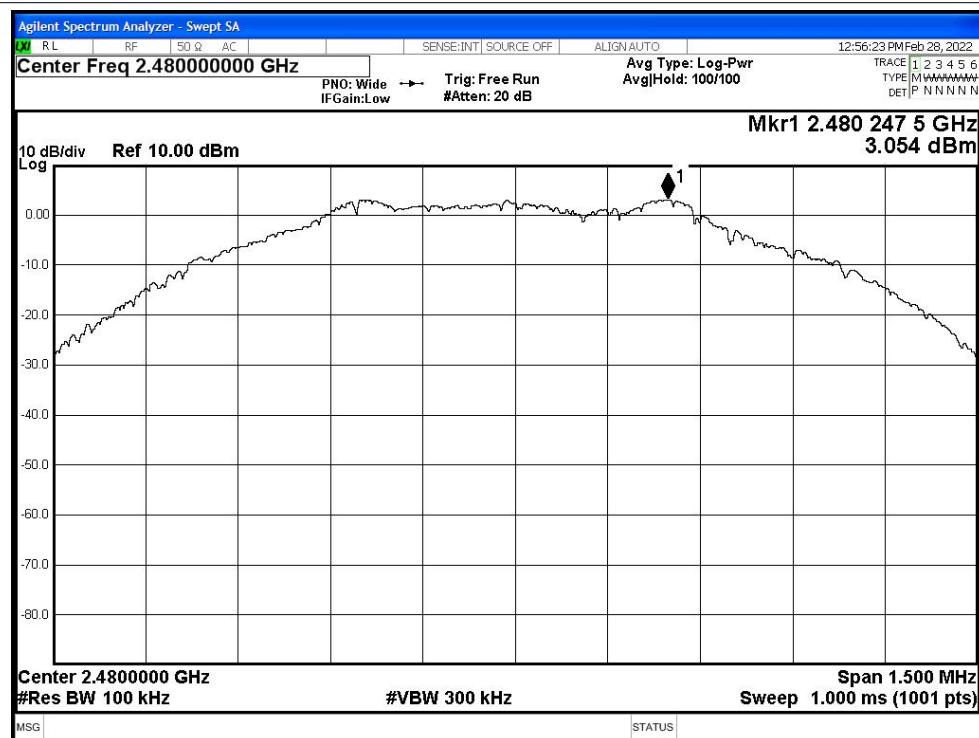

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

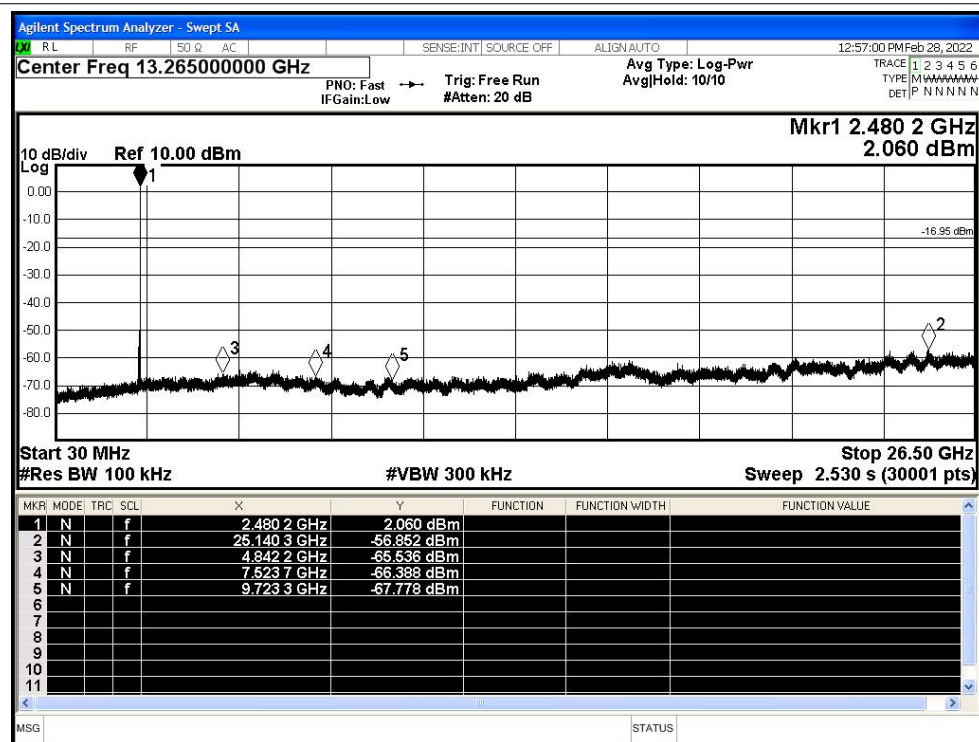




A.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	61.44	2.12	2.6
NVNT	BLE 1M	2440	Ant1	61.44	2.12	2.6
NVNT	BLE 1M	2480	Ant1	61.47	2.11	2.6





Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant1

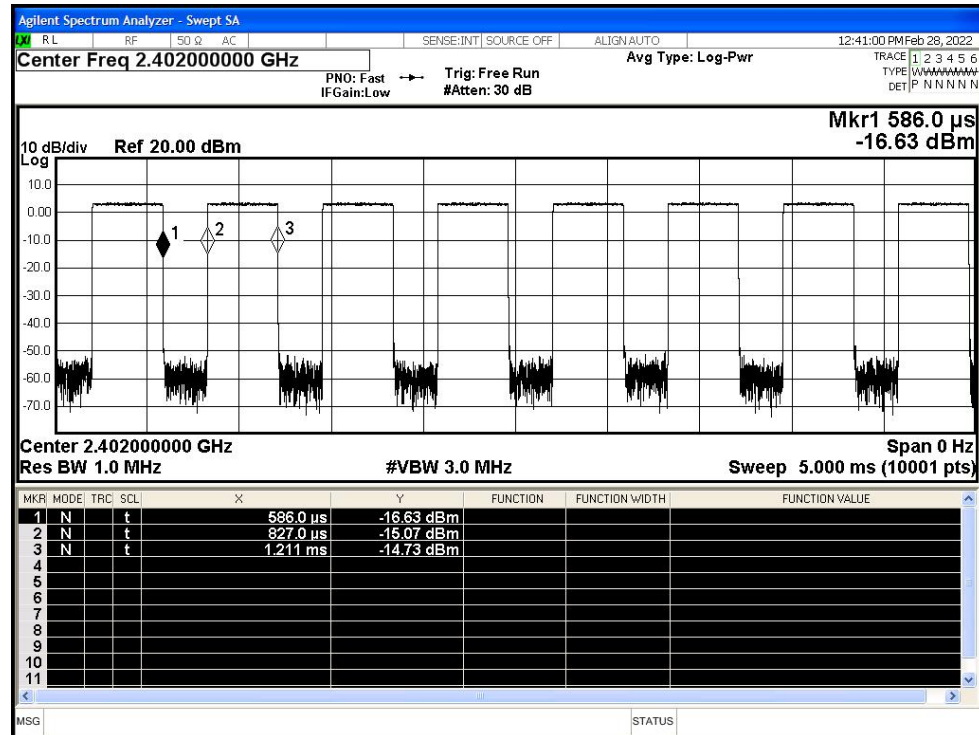

Duty Cycle NVNT BLE 1M 2440MHz Ant1

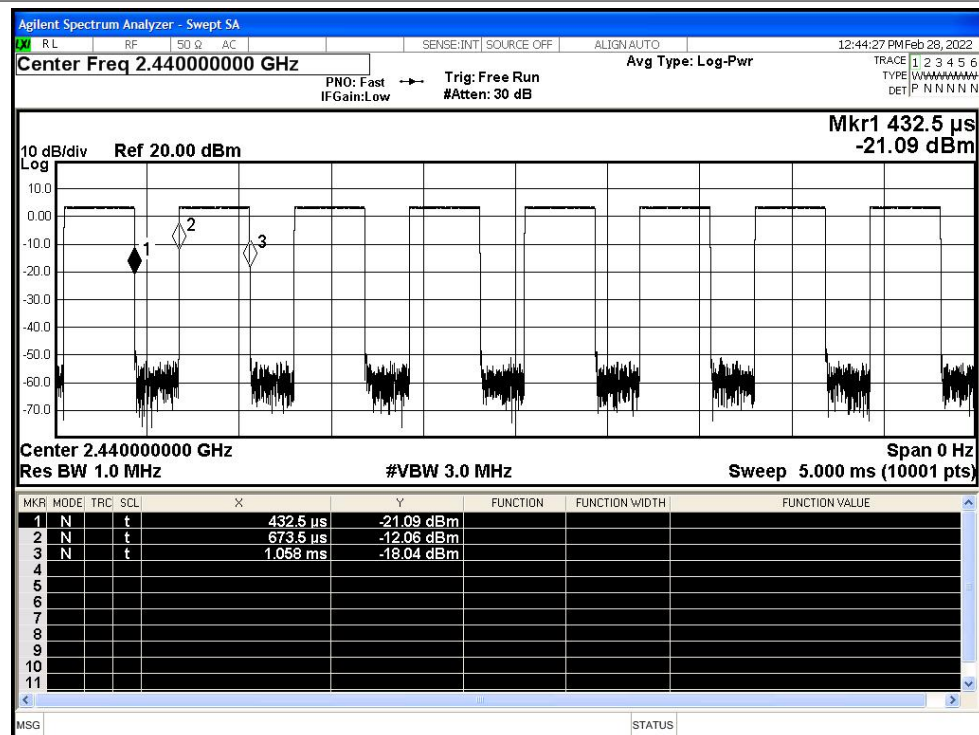

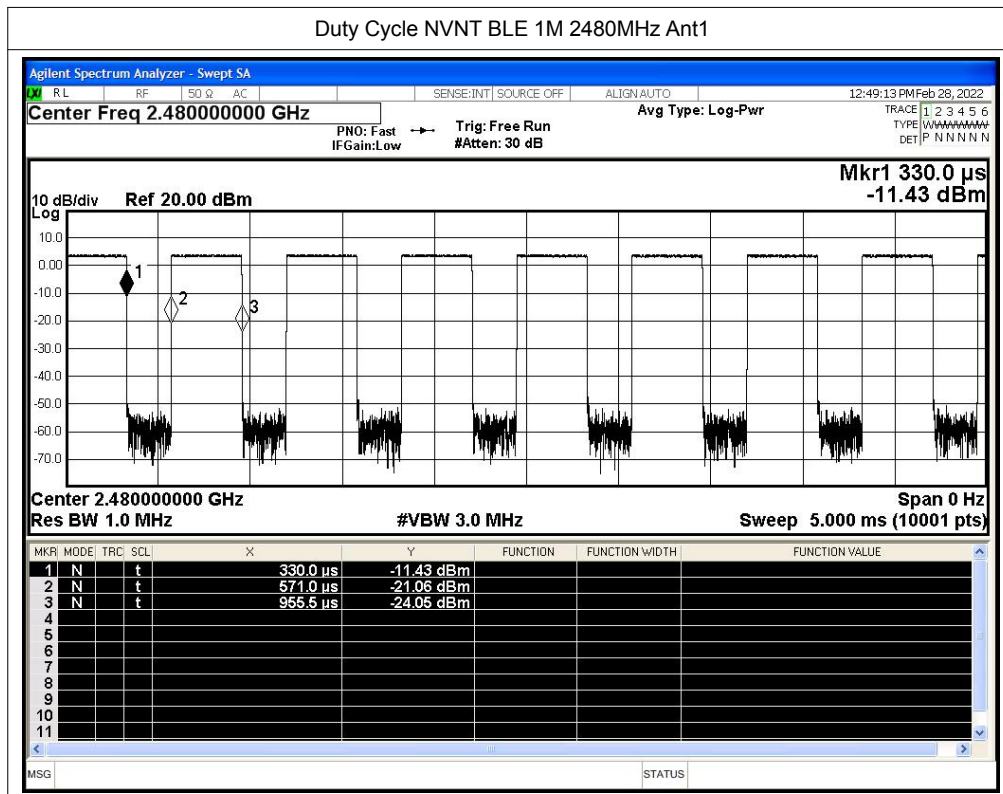




A.7 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant1	2310	-51.19	2	46.07	Peak	≤74	Pass
NVNT	BLE 1M	2402	Ant1	2310	-61.15	2	36.11	Average	≤54	Pass
NVNT	BLE 1M	2402	Ant1	2372.784	-48.55	2	48.71	Peak	≤74	Pass
NVNT	BLE 1M	2402	Ant1	2389.68	-60.45	2	36.81	Average	≤54	Pass
NVNT	BLE 1M	2402	Ant1	2390	-51.71	2	45.55	Peak	≤74	Pass
NVNT	BLE 1M	2402	Ant1	2390	-60.89	2	36.37	Average	≤54	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-52.72	2	44.54	Peak	≤74	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-59.94	2	37.32	Average	≤54	Pass
NVNT	BLE 1M	2480	Ant1	2491.744	-49.17	2	48.09	Peak	≤74	Pass
NVNT	BLE 1M	2480	Ant1	2483.536	-59.76	2	37.5	Average	≤54	Pass
NVNT	BLE 1M	2480	Ant1	2500	-52.42	2	44.84	Peak	≤74	Pass
NVNT	BLE 1M	2480	Ant1	2500	-60.87	2	36.39	Average	≤54	Pass




Test Graphs

Restrict Band NVNT BLE 1M 2402MHz Ant1 Peak

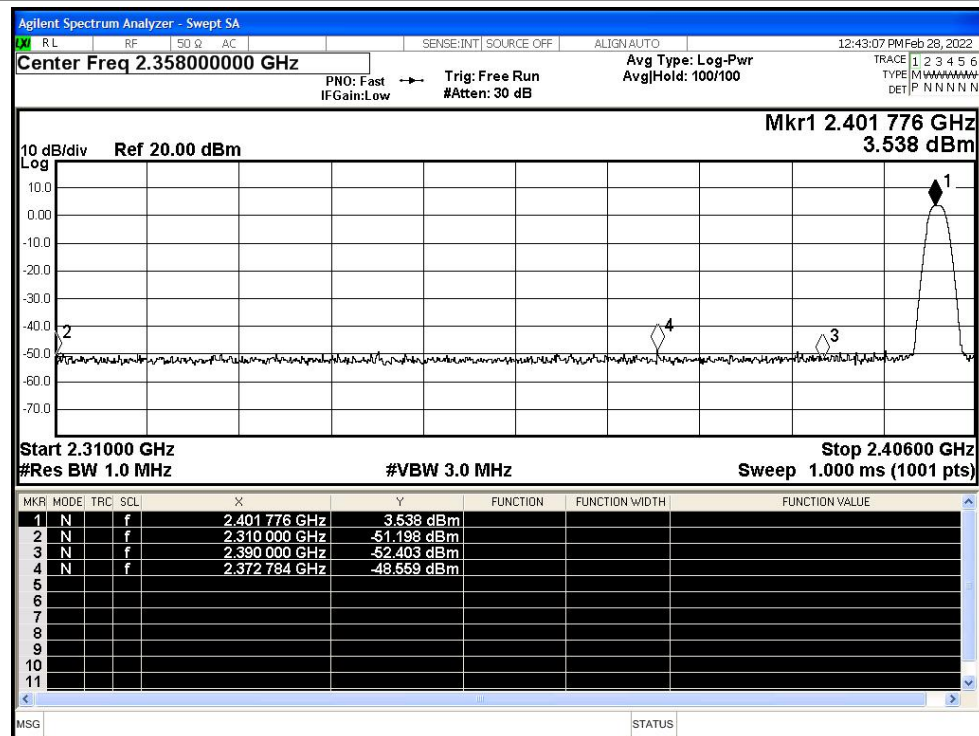


Restrict Band NVNT BLE 1M 2402MHz Ant1 Average

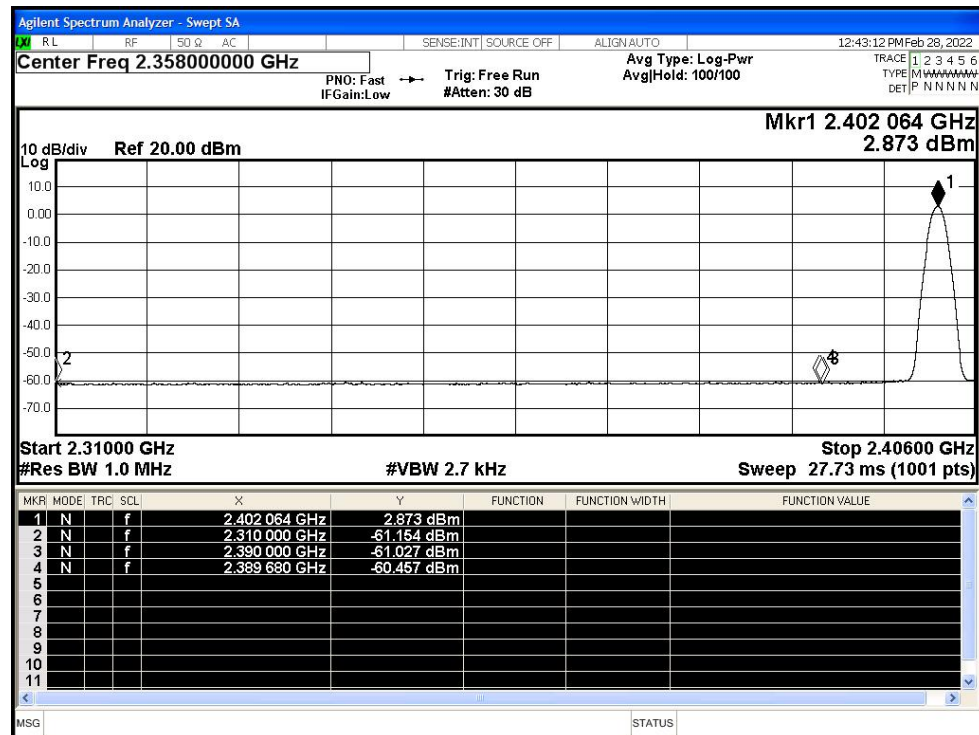



Restrict Band NVNT BLE 1M 2480MHz Ant1 Peak

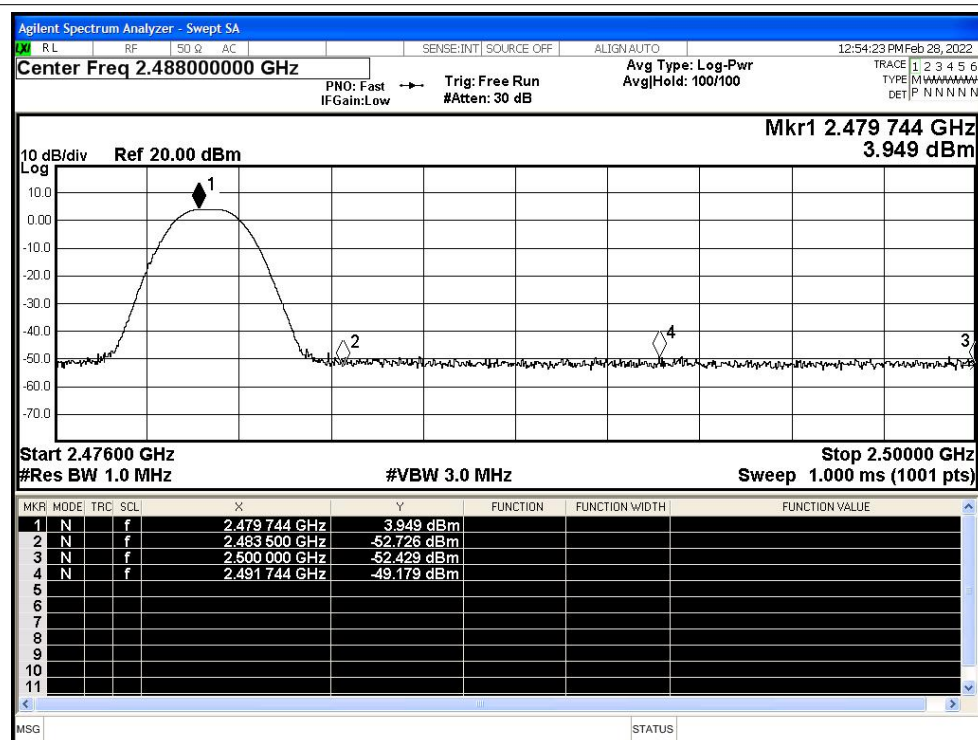

Restrict Band NVNT BLE 1M 2480MHz Ant1 Average

