

承認書
APPROVAL SHEET

客 户
欣派科技

品 名 规 格
DESCRIPTION: 5DB-L171-胶棒-铜管铜柱弹簧+转接线 11 牙母头母针-IPEX

料 号
PART NO.:

客 户 料 号
CUS PART NO.:

日 期
D A T E: 2024.7.24

云顶呈样签章

工 程 ENGINEERING DEPARTMENT	品 保 Q C DEPARTMENT	业 务 SALES DEPARTMENT

客户承认签章

工 程 ENGINEERING DEPARTMENT	品 保 Q C DEPARTMENT	采 购 PURCHASING DEPARTMENT

联系电话: 0755 23073599

※ 承认书一式三份, 惠蒙贵司承认签章

※ Approval in duplicate, please signed by your company.

Shenzhen Yunding Communication Electronics Co., Ltd


TEL: +86 0755-23073599

FAX: +86 0755-23097189

E-mail:wht0809@163.com

1. 测试项目与设备

	测试项目	设备
1. S11 参数 (S-parameter)	1. 回波损耗 (Return Loss) 2. 电压驻波比 (VSWR)	网络分析仪: Agilent E5071B HP 8753D
2. 有源测试 (Active)	1. 发射功率 (TRP) 2. 接收灵敏度 (TIS)	1. 暗室: ETS 7x4x3 m (3D) Chamber ETS 5x3x3 m (3D) Chamber 2. 综合测试仪: Agilent 8960 E5515B x2 StarPoint SP6011 Cmw500
3. 无源测试 (Passive)	1. 天线增益 (Gain) 2. 天线效率 (Efficiency)	1. 暗室: ETS 7x4x3 m (3D) Chamber ETS 5x3x3 m (3D) Chamber 2. 网络分析仪: Agilent E5071B HP 8753D

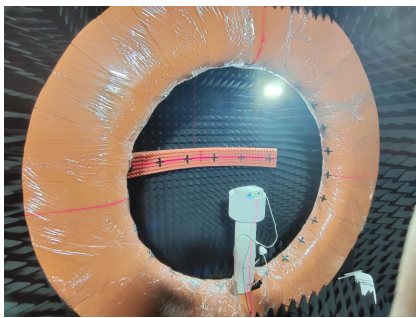

Shenzhen Yunding Communication Electronics Co., Ltd


TEL: +86 0755-23073599

FAX: +86 0755-23097189

E-mail:wht0809@163.com

2. 天线性能

SWR

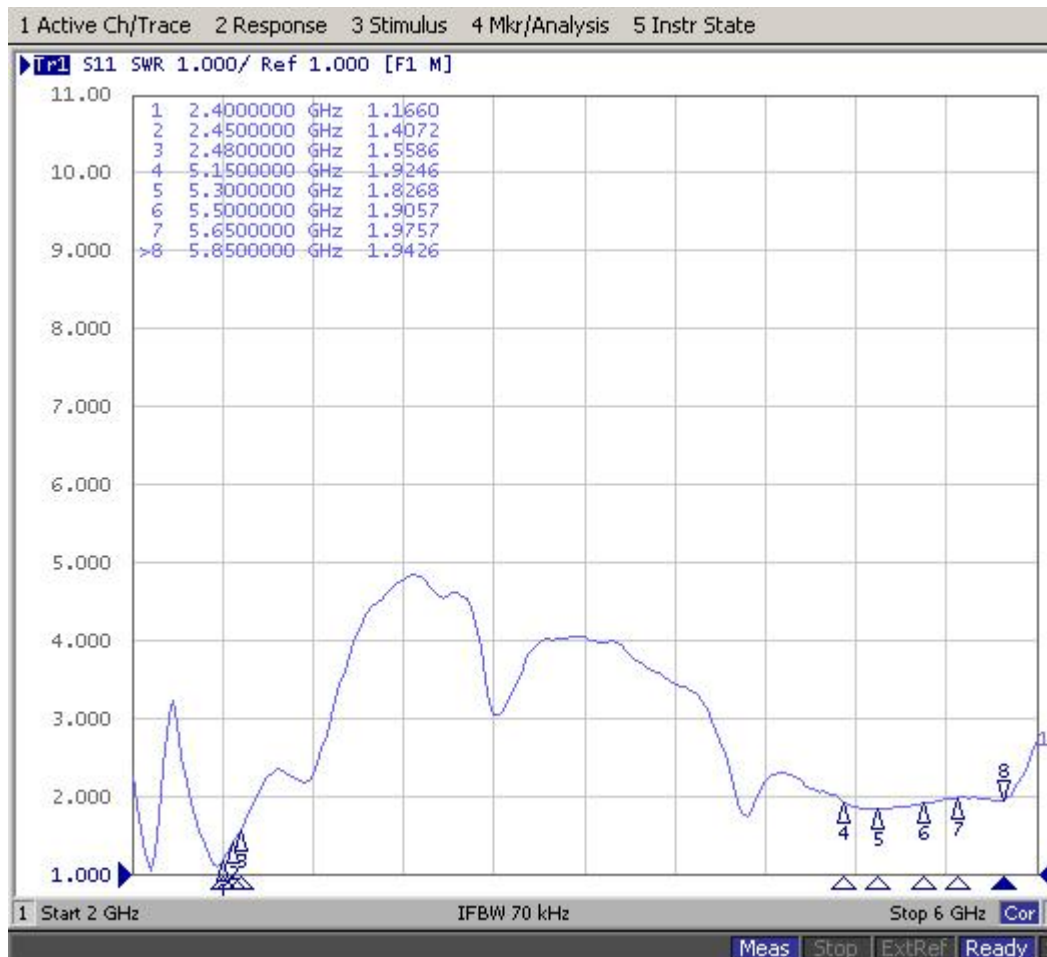

Shenzhen Yunding Communication Electronics Co., Ltd

TEL: +86 0755-23073599



FAX: +86 0755-23097189

E-mail:wht0809@163.com


3. 天线效率与增益

Passive Test For WIFI2.4		
Freq (MHz)	Effi (%)	Gain (dBi)
2400	59.16	3.46
2410	60.33	3.6
2420	60.62	3.55
2430	61.33	3.36
2440	65.1	3.33
2450	68.71	3.4
2460	71.65	3.61
2470	71.98	3.75
2480	73.38	3.9
2490	74.64	4
2500	71.52	3.84


2400.000MHz




2400.000MHz H

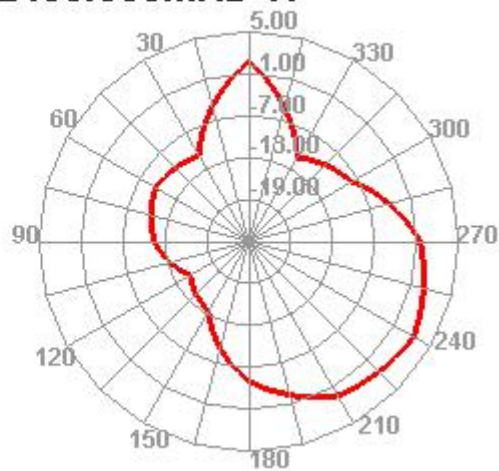

2400.000MHz E1

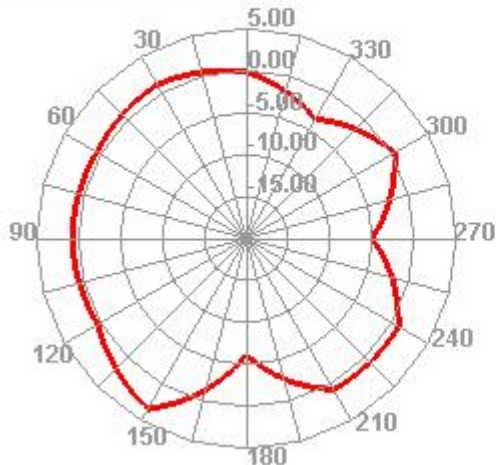

2400.000MHz E2

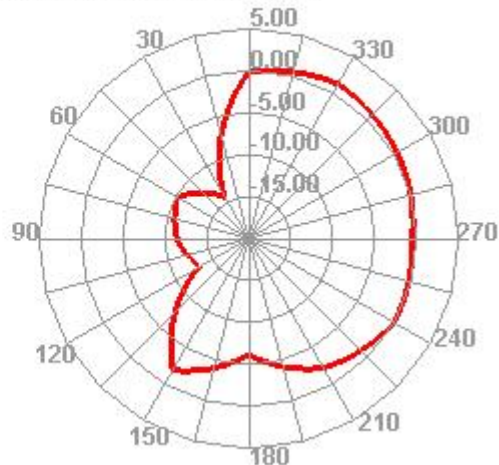

Shenzhen Yunding Communication Electronics Co., Ltd


TEL: +86 0755-23073599

FAX: +86 0755-23097189


E-mail:wht0809@163.com

Passive Test For WIFI5.8		
Freq (MHz)	Effi (%)	Gain (dBi)
5150	43.14	0.29
5250	33.13	0.15
5350	47.79	1.98
5450	44.64	1.43
5550	50.04	1.96
5650	38.33	0.86
5750	47.09	1
5850	41.32	0.32


5150.000MHz

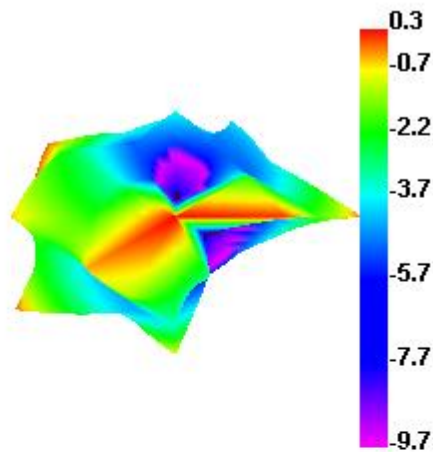


5150.000MHz H

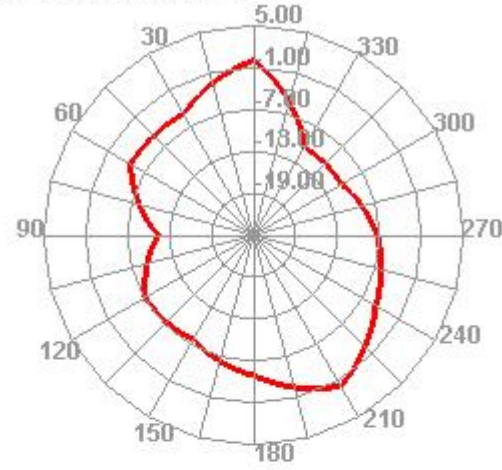


5150.000MHz E1

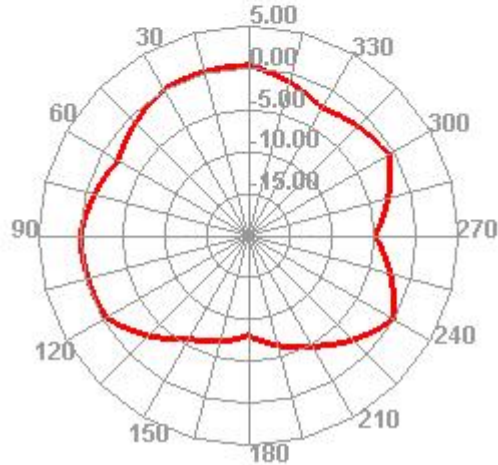

5150.000MHz E2

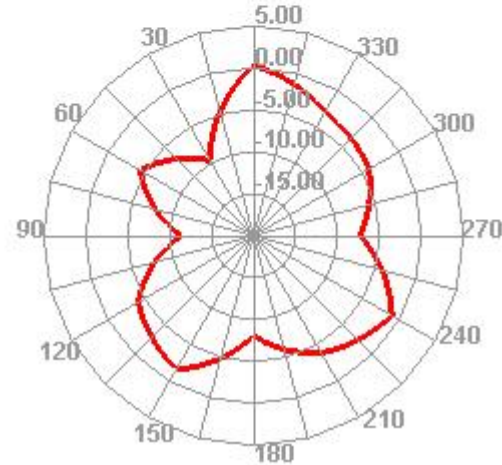

4. 天线结构图:

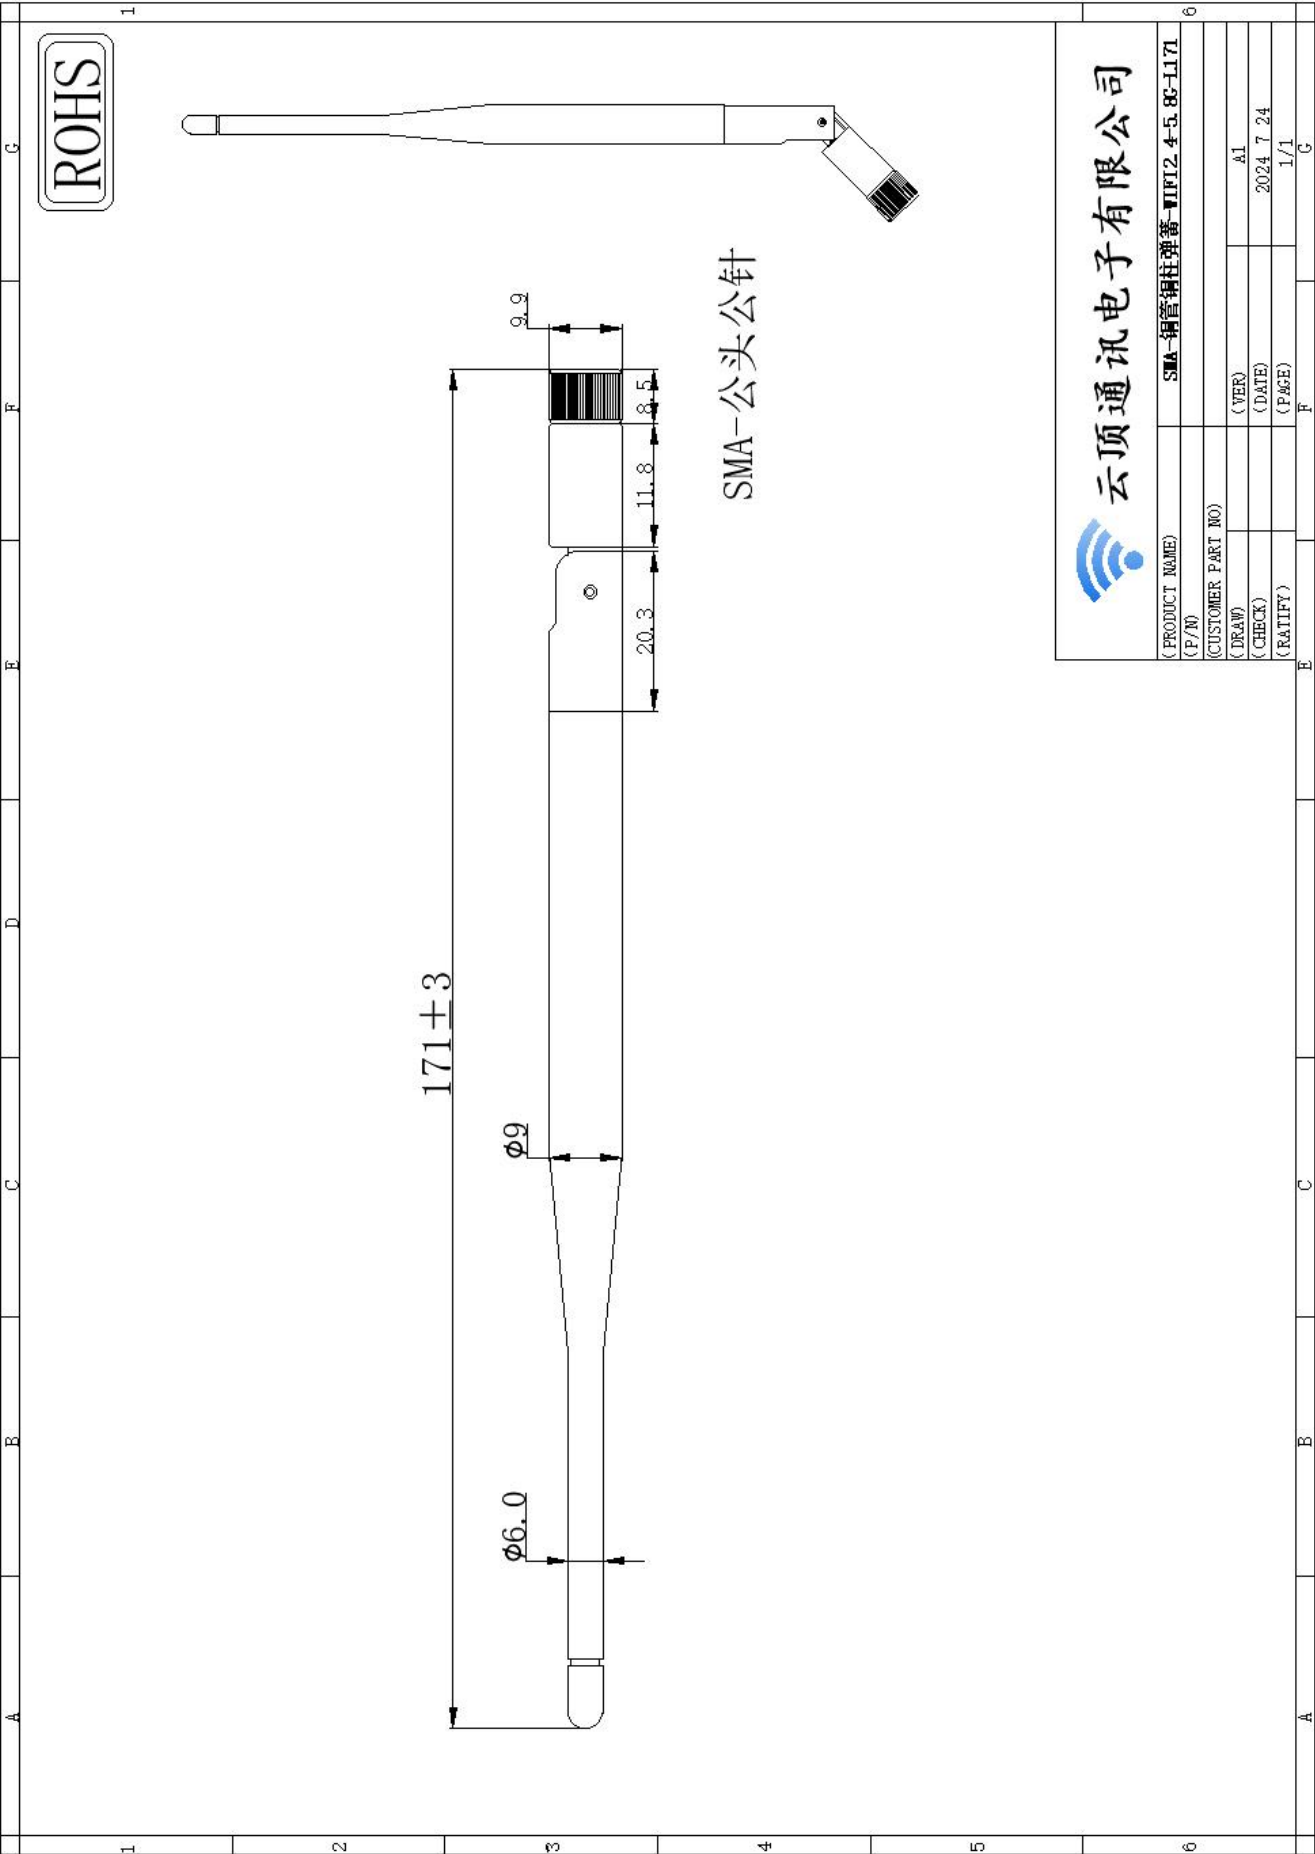

Shenzhen Yunding Communication Electronics Co., Ltd

TEL: +86 0755-23073599

FAX: +86 0755-23097189

E-mail:wht0809@163.com

电器技术参数			
电 性 能 指 标		Electrical Specifications	
频率范围	2400~2500/5150~5850MHz	Frequency Range	2400~2500/5150~5850MHz
电压驻波比	≤2.0	VSWR	≤2.0
输入阻抗	50 Ω	Input Impedance	50 Ω
增益	5 DBI	Gain	5 DBI
机 械 指 标		Mechanical Specifications	
天线颜色	黑色	Antenna color	Black
接口形式	SMA	Input connector	SMA
天线长度	171mm	Antenna length	171mm
工作温度	-40℃~+85℃	Working Temperature	-40℃~+85℃
工作湿度	20~80%	Working Humidity	20~80%

Shenzhen Yunding Communication Electronics Co., Ltd

TEL: +86 0755-23073599

FAX: +86 0755-23097189

E-mail:wht0809@163.com

环境性能测试（Environment performance test）：

项目	测试条件	测试结果
储存环境	在没有指定的情况下测试温度、湿度、气压如下： 1. 温度为-30℃~+80℃ 2. 相对湿度为45%-85% 3. 气压为86kpa-106kpa	电气机械性能正常
高低温试验	在70℃与-40℃之间进行5次循环，然后在正常条件下1-2H，检查外观质量。	尺寸应满足规定并应满足于机械、电气性能
耐恒定湿热试验	相对湿度95±3%，试验温度：40℃.持续2H作用后，试品取出后5min之内测定电气性能，试品在正常条件下1-2H，检查外观质量	尺寸应满足规定并应满足于机械、电气性能
振动试验	振频范围10-55HZ，位移幅值：0.35MM，加速度幅值：50.0M/S，扫频循环次数：30次	电气机械性能正常
跌落试验	1M高空按照互相垂直的轴方向自由跌落3次	电气机械性能正常

Project	Test condition	Test results
Storage environment	Test temperature, humidity, pressure without stated condition as follwings:1.Temperature: -30℃ ~ +80℃ ;2.Relative humidity: 45%-85%;3,Pressure: 86kpa-106kpa	Electrical and mechanical performance normal
High and low temperature test	Having 5 times cycle between -40℃ to 70℃,Then in common condition 1-2 hours test exterior quality.	Measurement satisfied with electrical and mechanical performance normal.
Resistance constant hot and humid test	Relative humidity:95±3%,Test temperature: 40℃,last 2 hours ,put it after 5 min test the electrical function .Test products during common condition 1-2 hours ,Then test exterior quality.	Measurement satisfied with electrical and mechanical performance normal.
Vibration test	Vibrate Frequency:10-55HZ; Distance :0.35mm;Acceleration :50.0m/s;Sweep frequency cycle:30 times	Electrical and mechanical performance normal
Fall test	From 1m height fall down 3 times freely (vertical direction)	Electrical and mechanical performance normal