
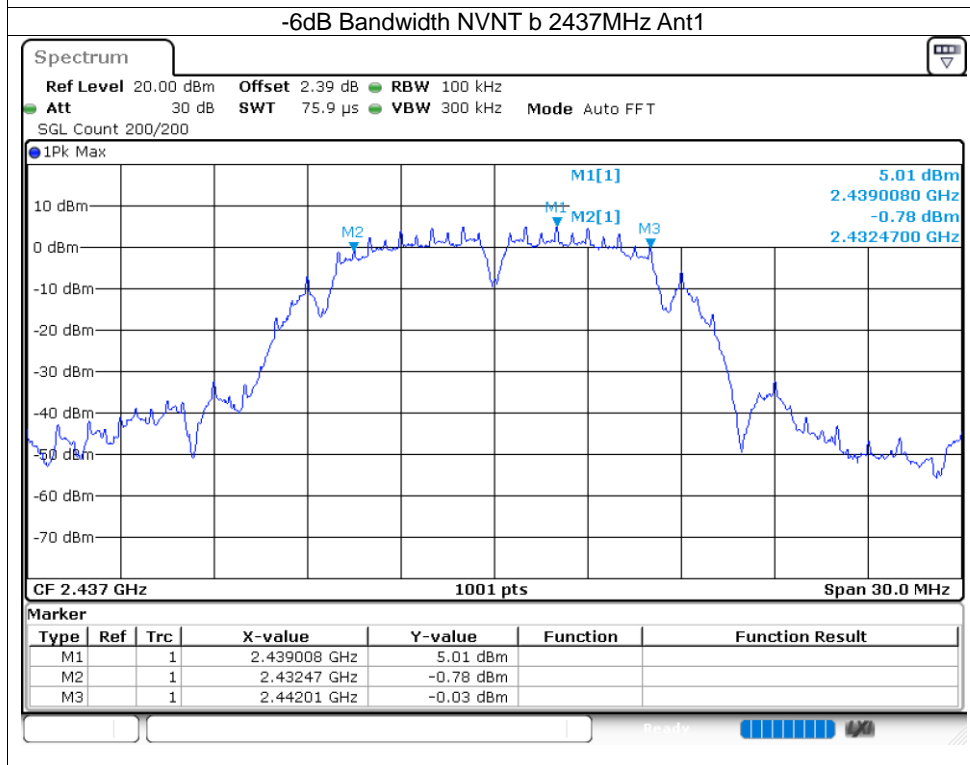




8.2 MAXIMUM CONDUCTED OUTPUT POWER



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	6.61	30	Pass
NVNT	b	2437	Ant1	5.51	30	Pass
NVNT	b	2462	Ant1	6.42	30	Pass
NVNT	g	2412	Ant1	7.57	30	Pass
NVNT	g	2437	Ant1	6.81	30	Pass
NVNT	g	2462	Ant1	7.64	30	Pass
NVNT	n20	2412	Ant1	7.11	30	Pass
NVNT	n20	2437	Ant1	7.11	30	Pass
NVNT	n20	2462	Ant1	7.67	30	Pass
NVNT	n40	2422	Ant1	6.29	30	Pass
NVNT	n40	2437	Ant1	6.31	30	Pass
NVNT	n40	2452	Ant1	6.39	30	Pass



8.3 -6dB BANDWIDTH



Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	8.76	0.5	Pass
NVNT	b	2437	Ant1	9.54	0.5	Pass
NVNT	b	2462	Ant1	9.066	0.5	Pass
NVNT	g	2412	Ant1	16.425	0.5	Pass
NVNT	g	2437	Ant1	16.05	0.5	Pass
NVNT	g	2462	Ant1	16.356	0.5	Pass
NVNT	n20	2412	Ant1	14.754	0.5	Pass
NVNT	n20	2437	Ant1	17.25	0.5	Pass
NVNT	n20	2462	Ant1	14.787	0.5	Pass
NVNT	n40	2422	Ant1	29.25	0.5	Pass
NVNT	n40	2437	Ant1	36.024	0.5	Pass
NVNT	n40	2452	Ant1	35.754	0.5	Pass


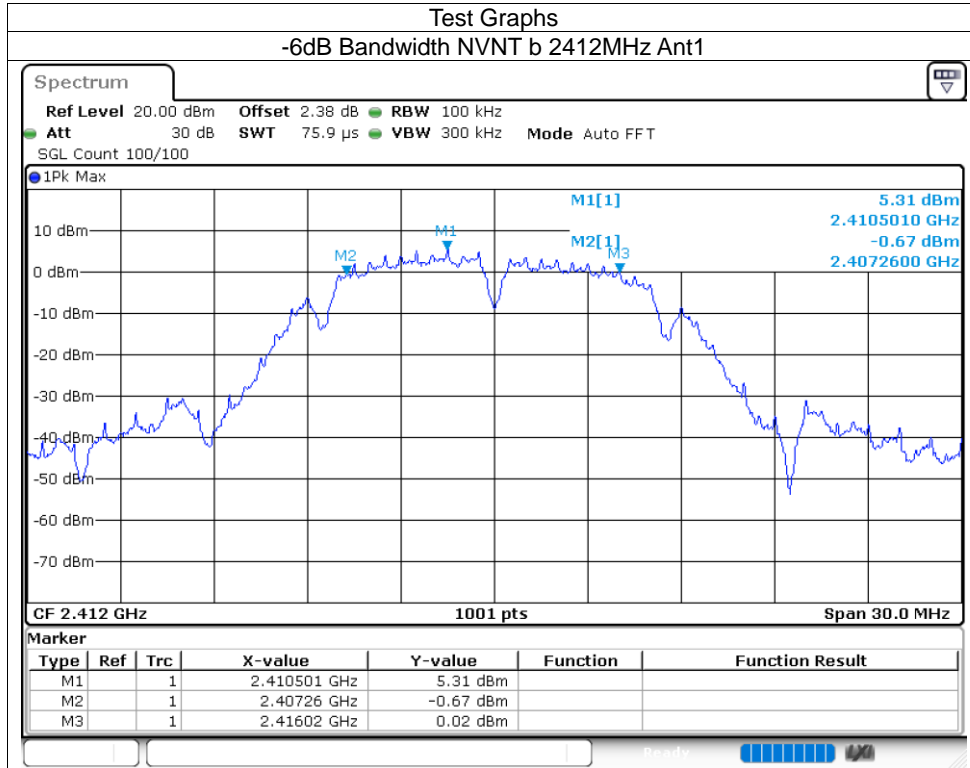


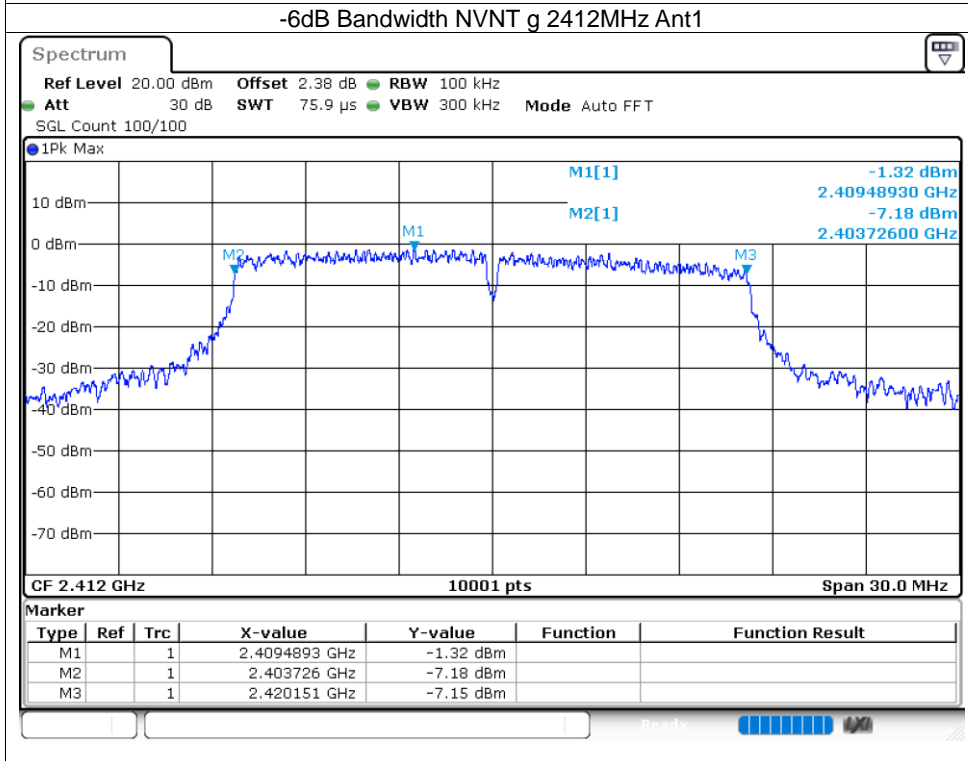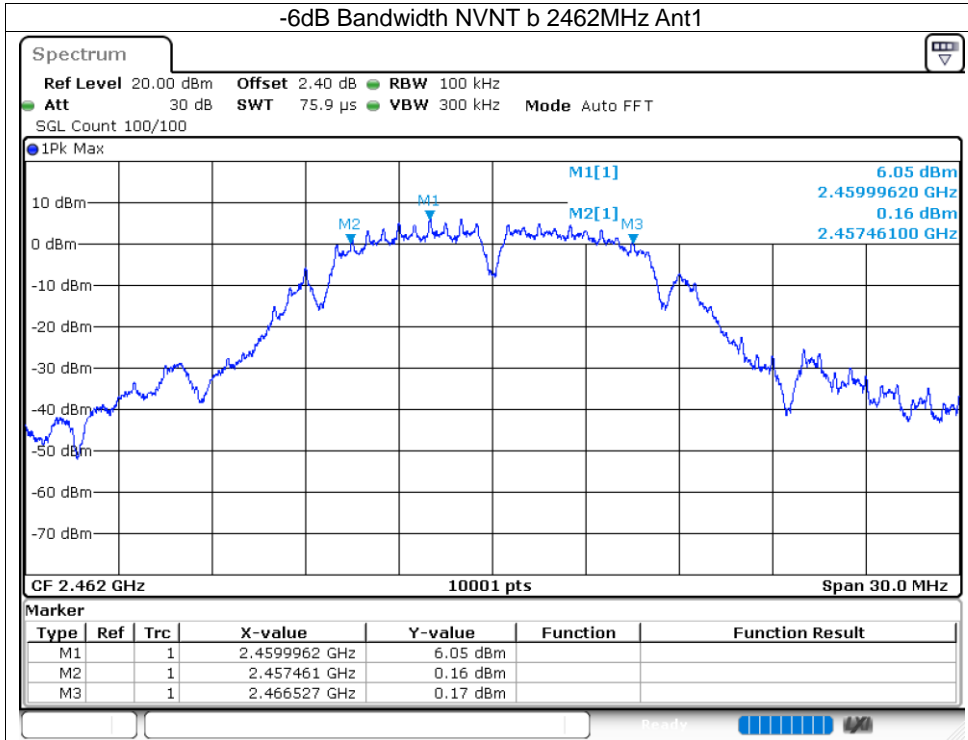

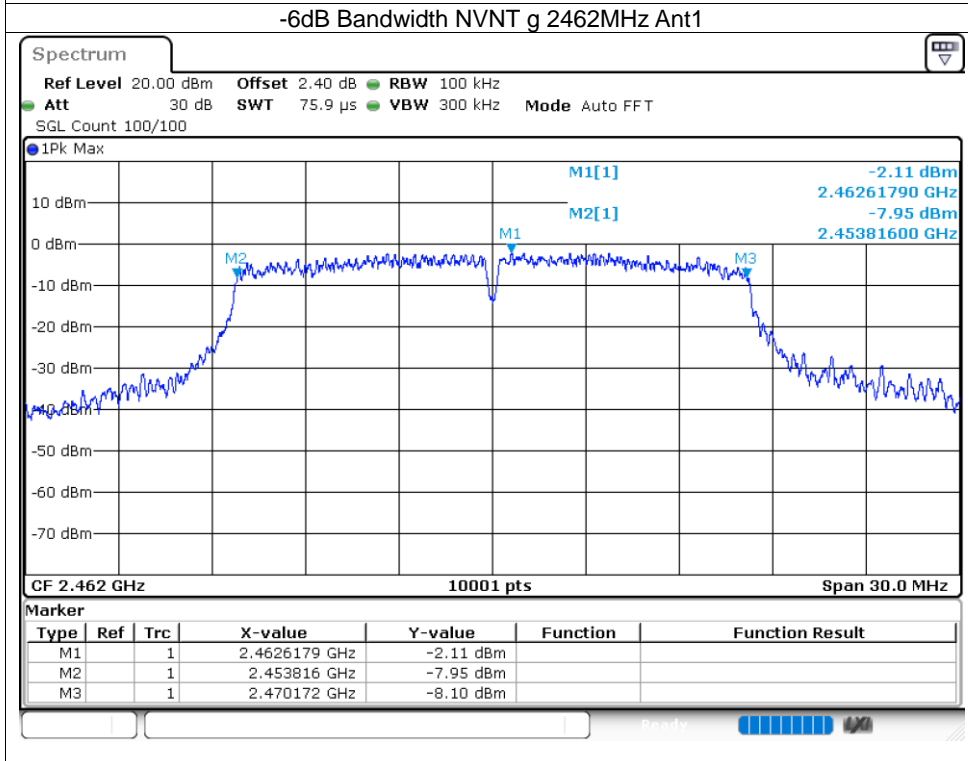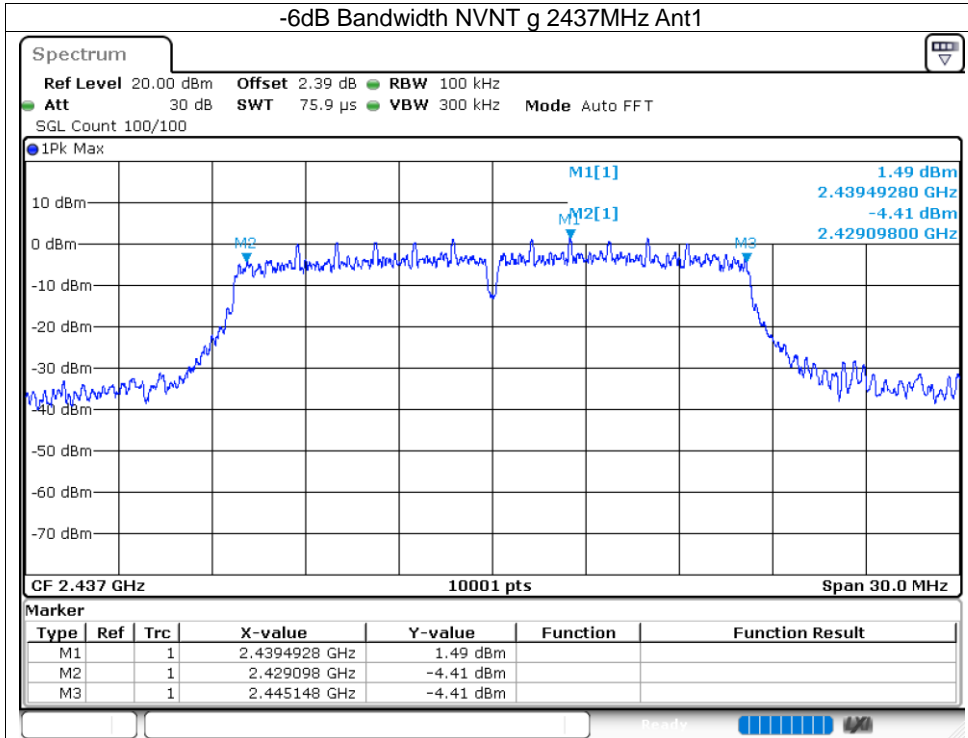

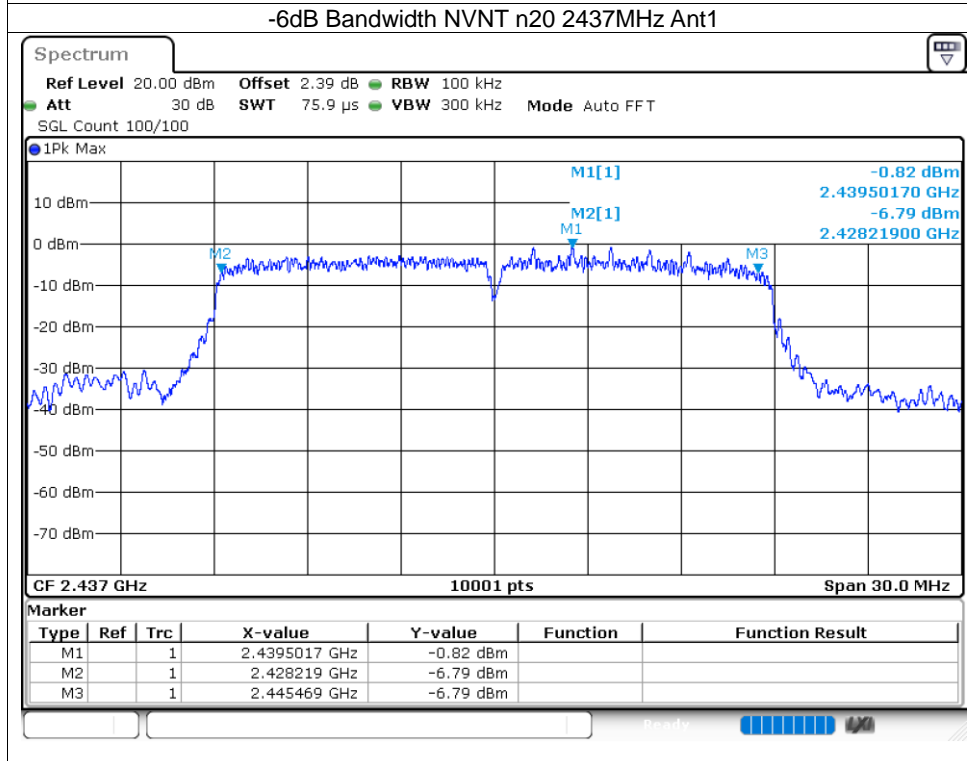
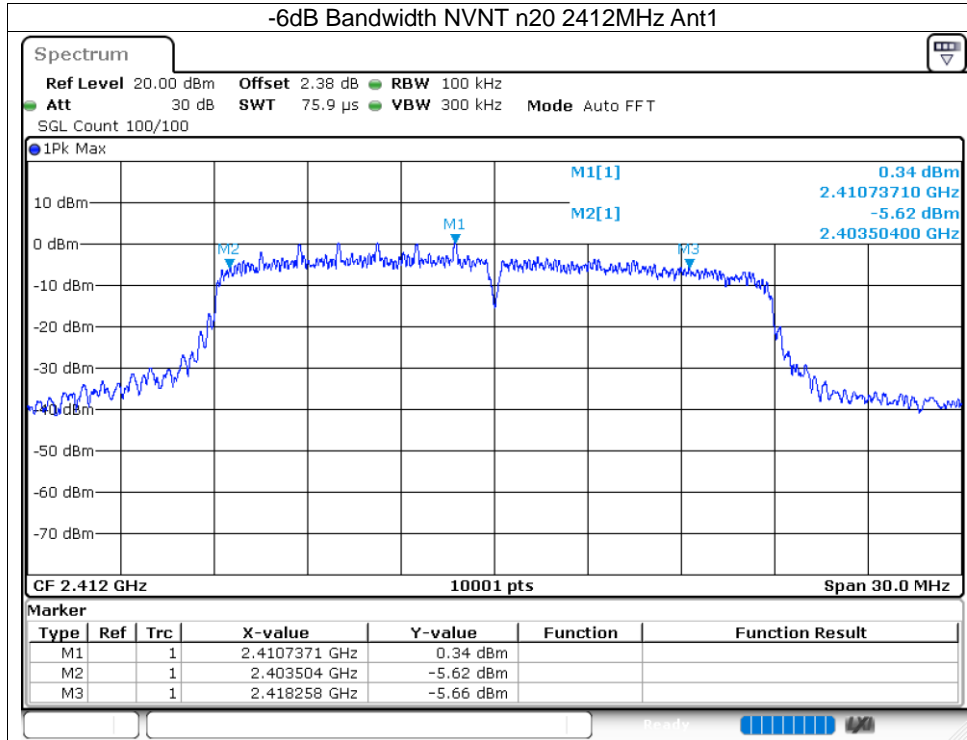


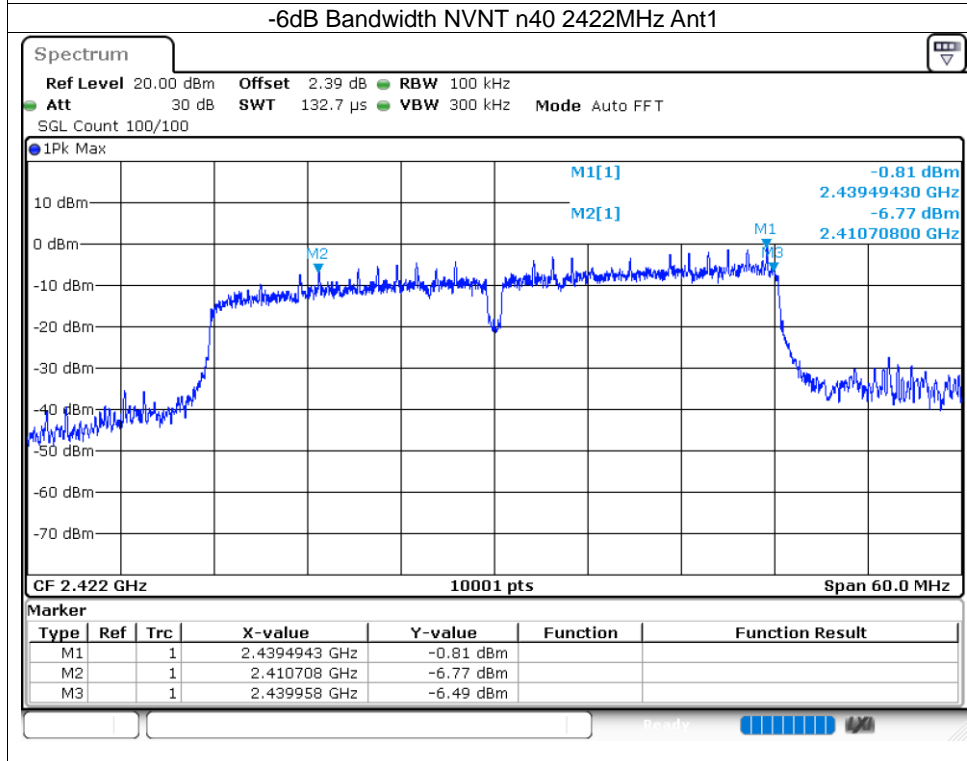
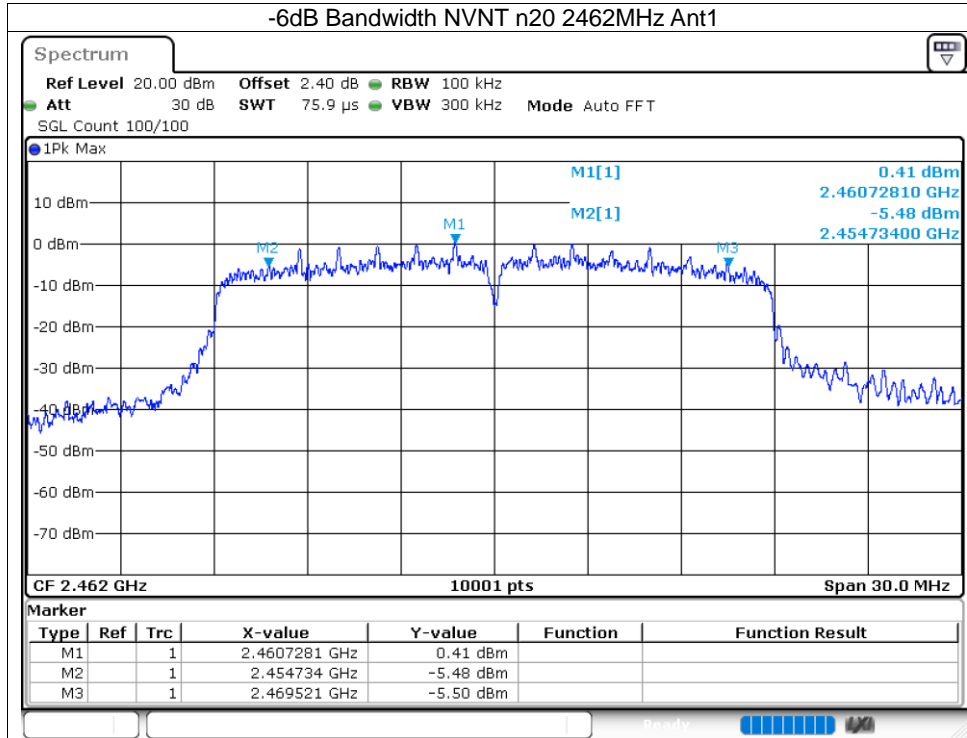


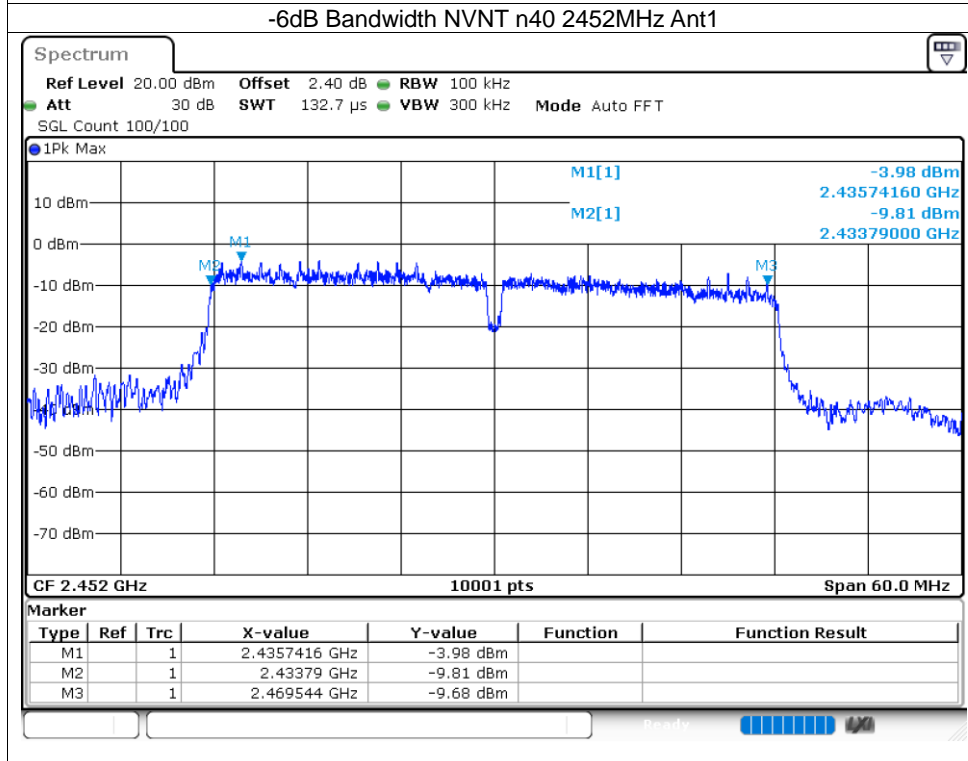
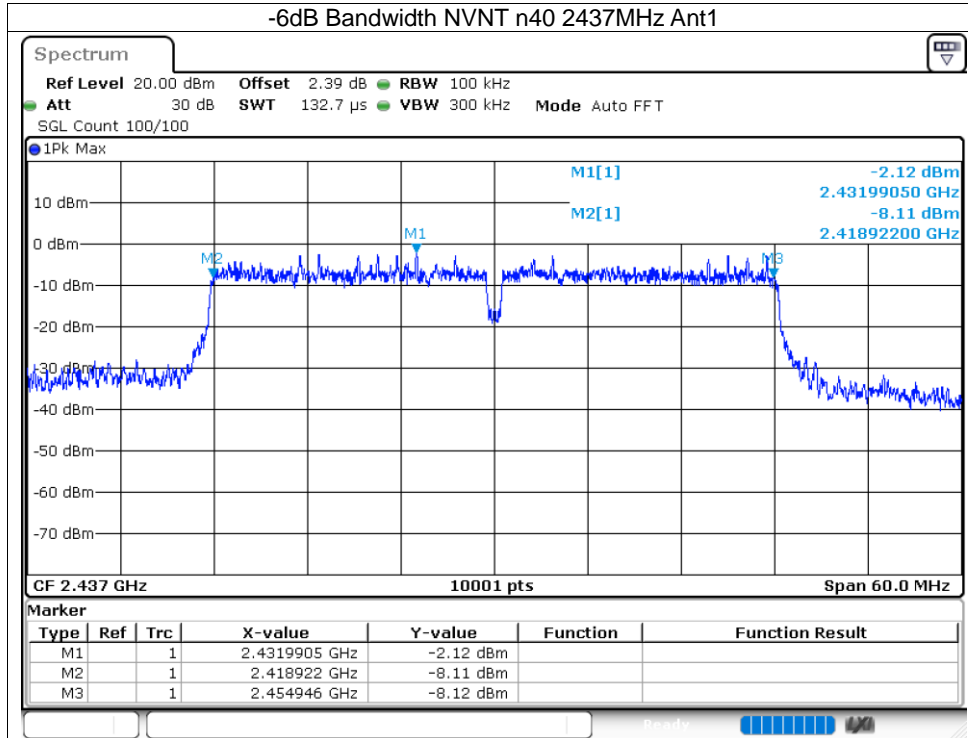




8.4 OCCUPIED CHANNEL BANDWIDTH



Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	b	2412	Ant1	12.078
NVNT	b	2437	Ant1	11.898
NVNT	b	2462	Ant1	12.078
NVNT	g	2412	Ant1	16.42
NVNT	g	2437	Ant1	16.417
NVNT	g	2462	Ant1	16.402
NVNT	n20	2412	Ant1	17.395
NVNT	n20	2437	Ant1	17.461
NVNT	n20	2462	Ant1	17.404
NVNT	n40	2422	Ant1	35.75
NVNT	n40	2437	Ant1	36.206
NVNT	n40	2452	Ant1	35.882

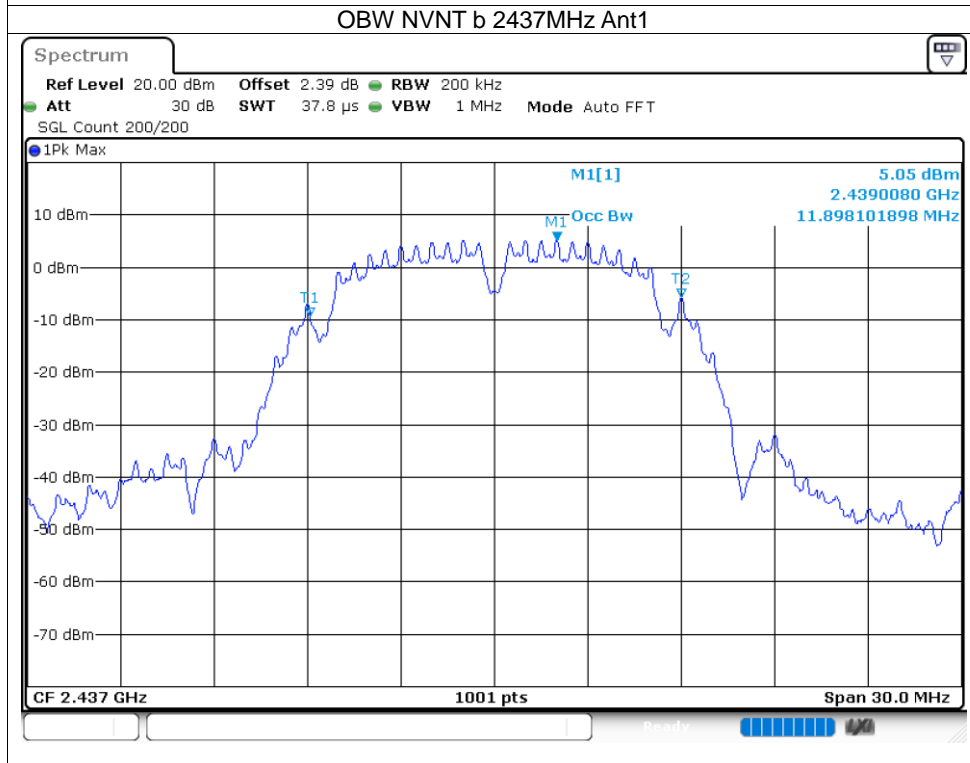
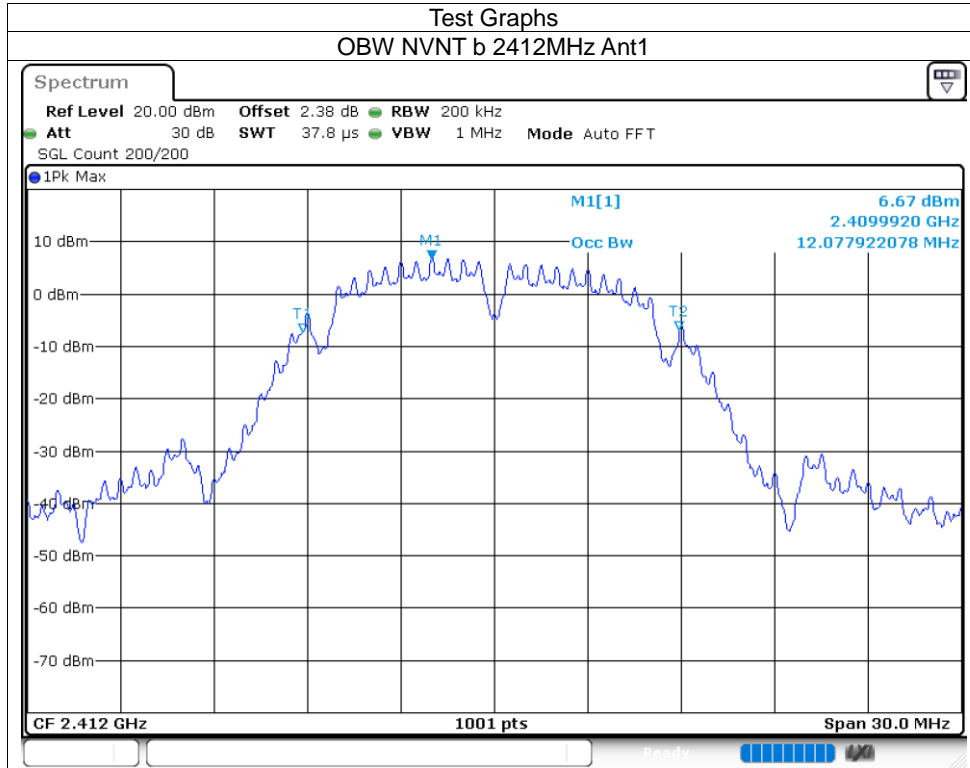


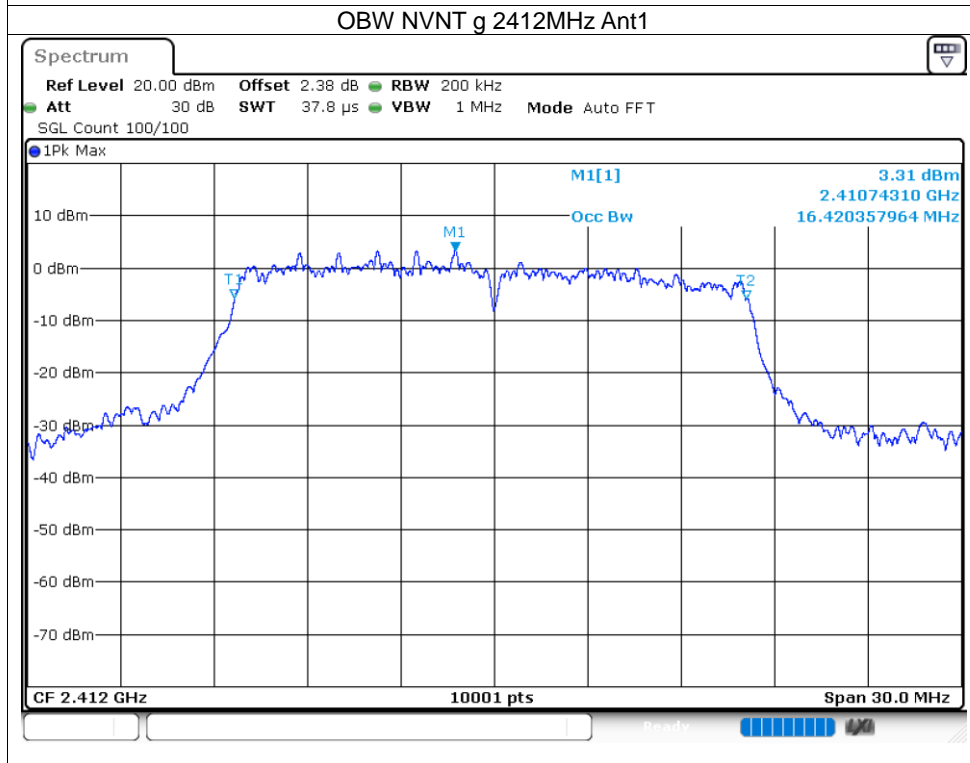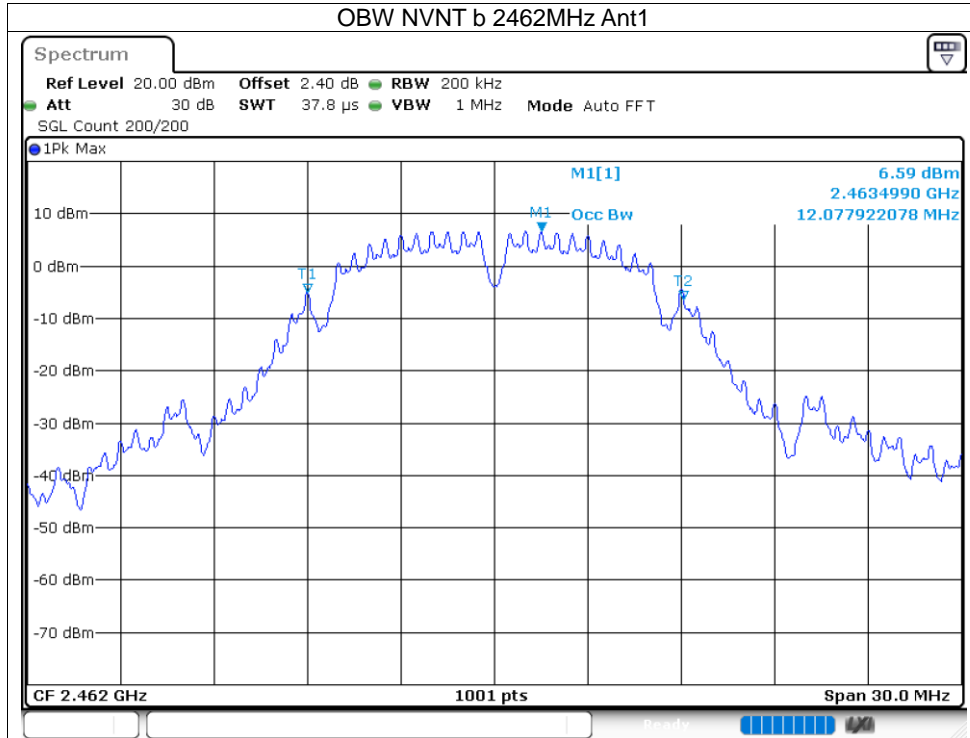

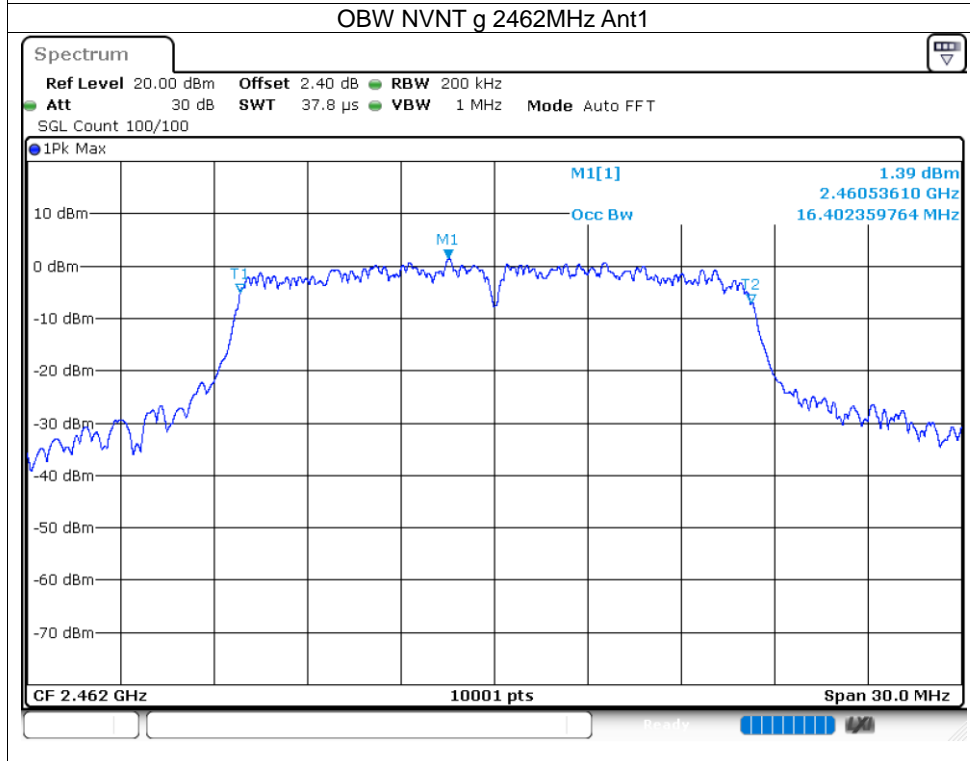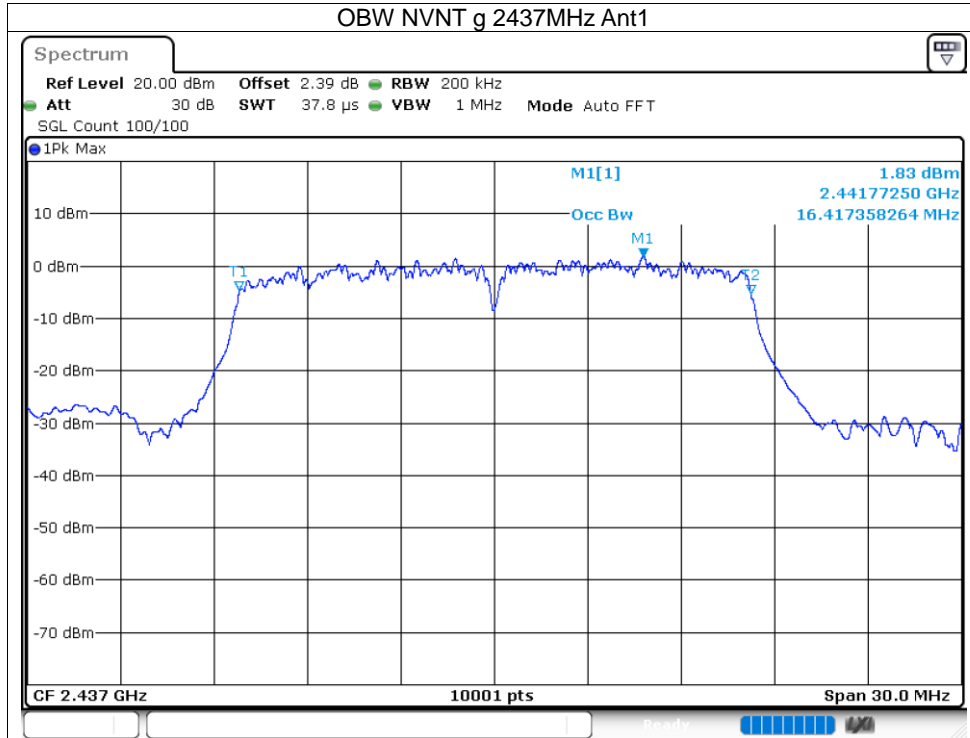

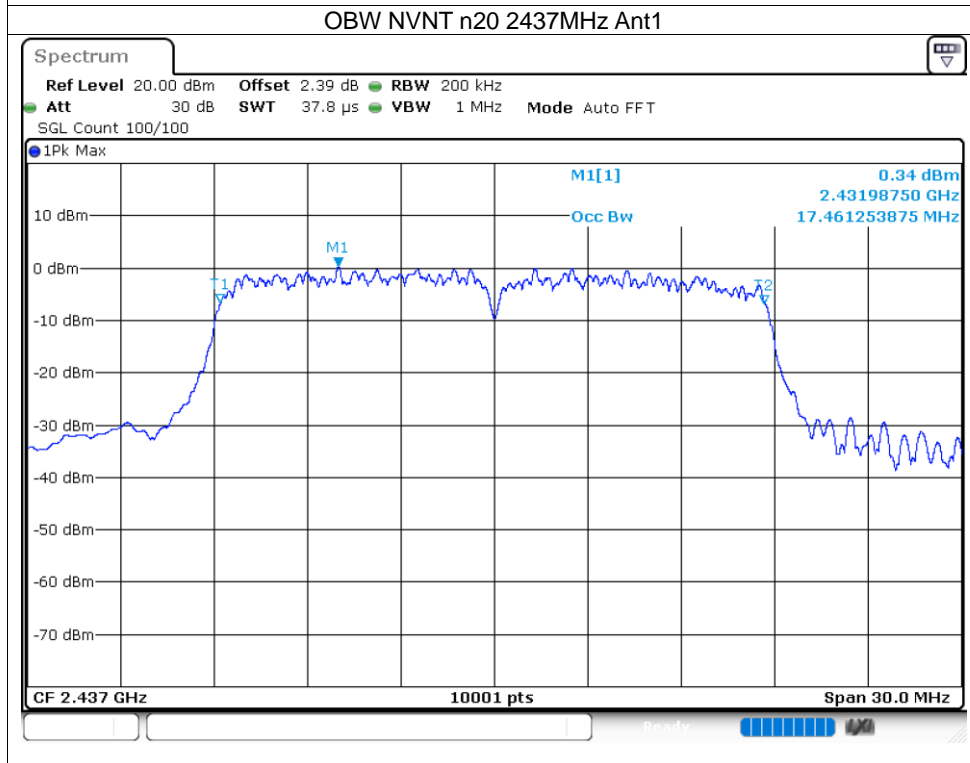
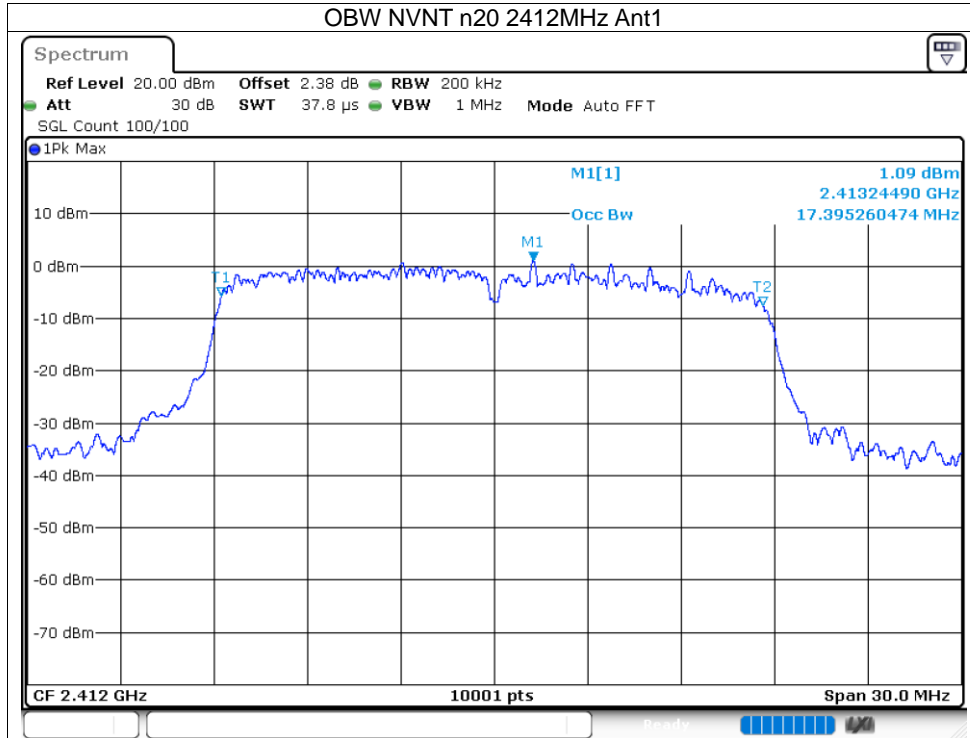


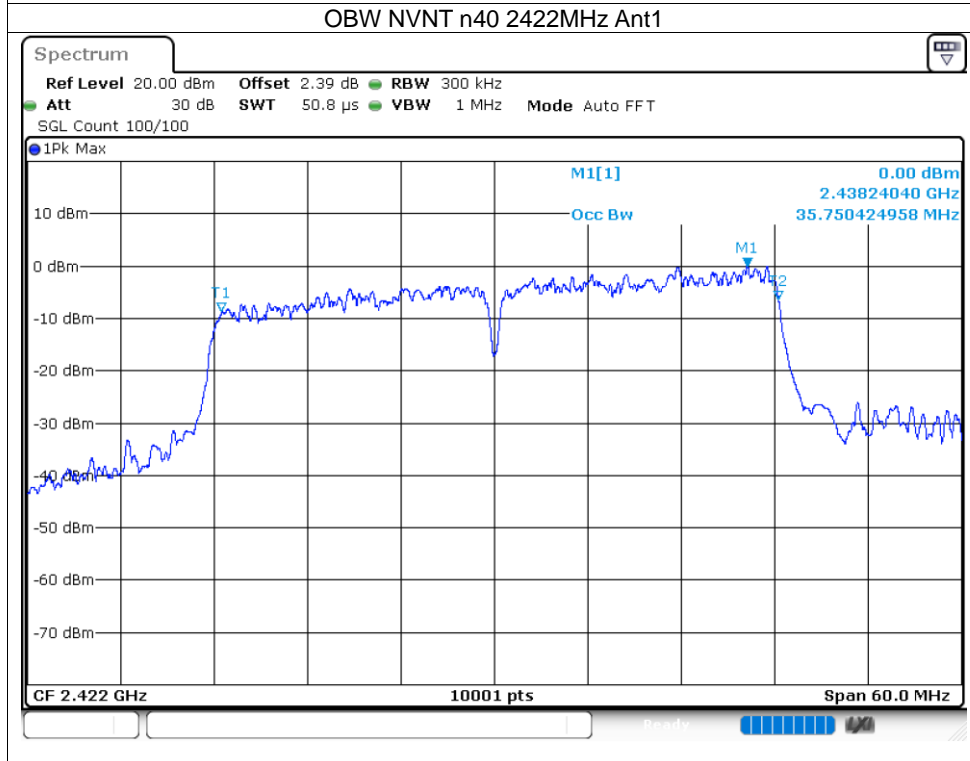
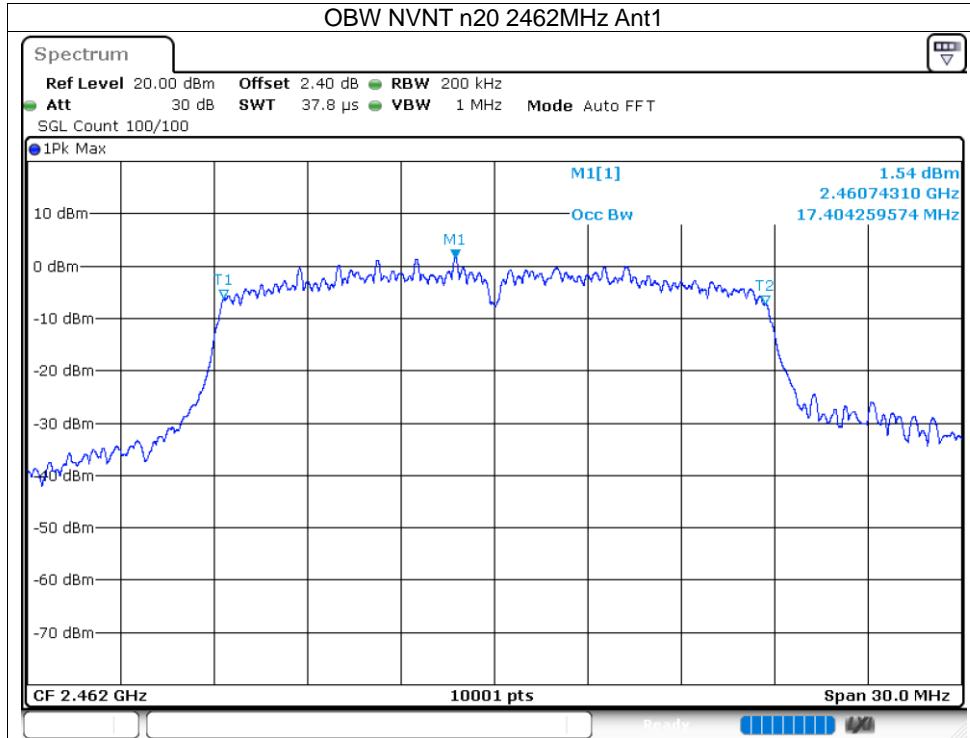


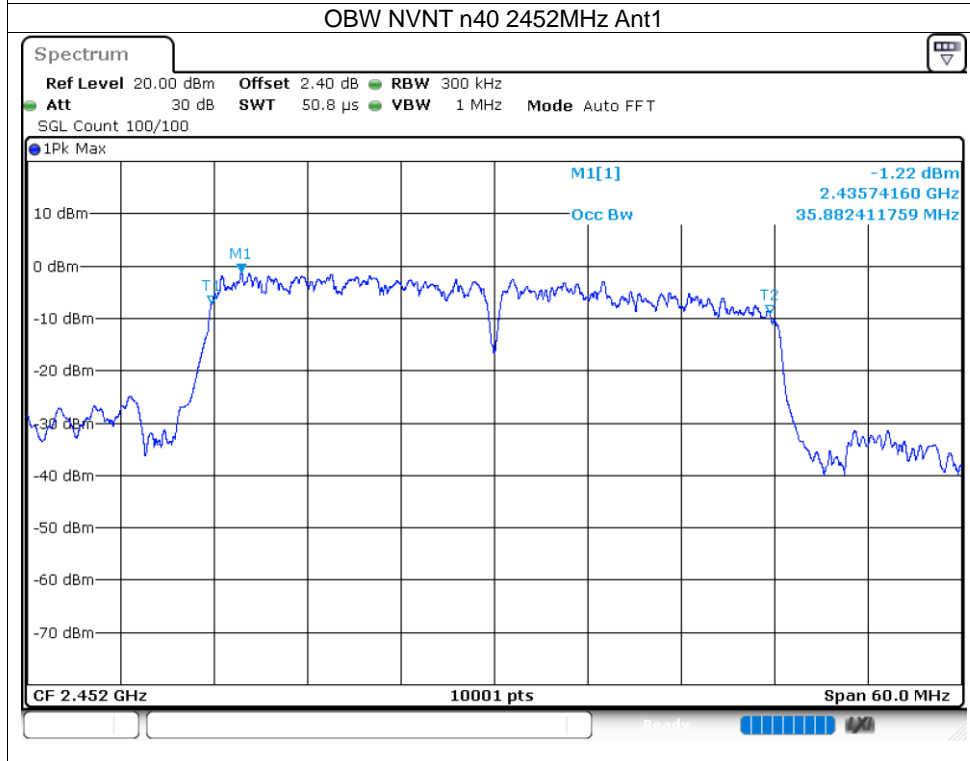
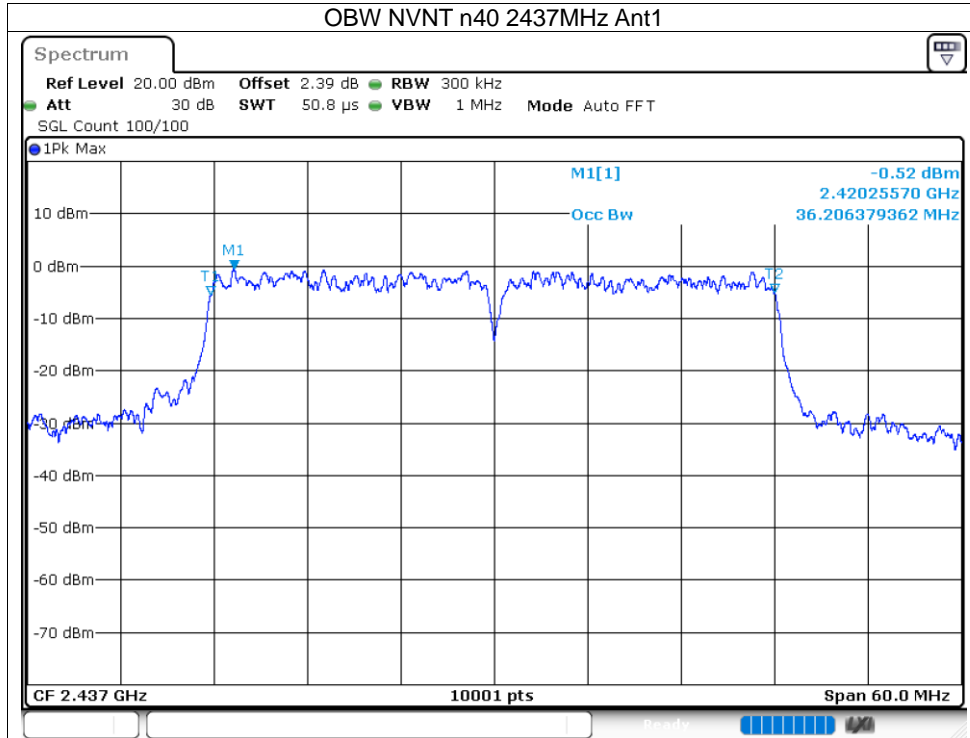




8.5 MAXIMUM POWER SPECTRAL DENSITY LEVEL



Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	-14.93	8	Pass
NVNT	b	2437	Ant1	-15.66	8	Pass
NVNT	b	2462	Ant1	-14.71	8	Pass
NVNT	g	2412	Ant1	-18.03	8	Pass
NVNT	g	2437	Ant1	-19.41	8	Pass
NVNT	g	2462	Ant1	-18.39	8	Pass
NVNT	n20	2412	Ant1	-18.22	8	Pass
NVNT	n20	2437	Ant1	-19.11	8	Pass
NVNT	n20	2462	Ant1	-17.8	8	Pass
NVNT	n40	2422	Ant1	-22.69	8	Pass
NVNT	n40	2437	Ant1	-22.03	8	Pass
NVNT	n40	2452	Ant1	-21.68	8	Pass

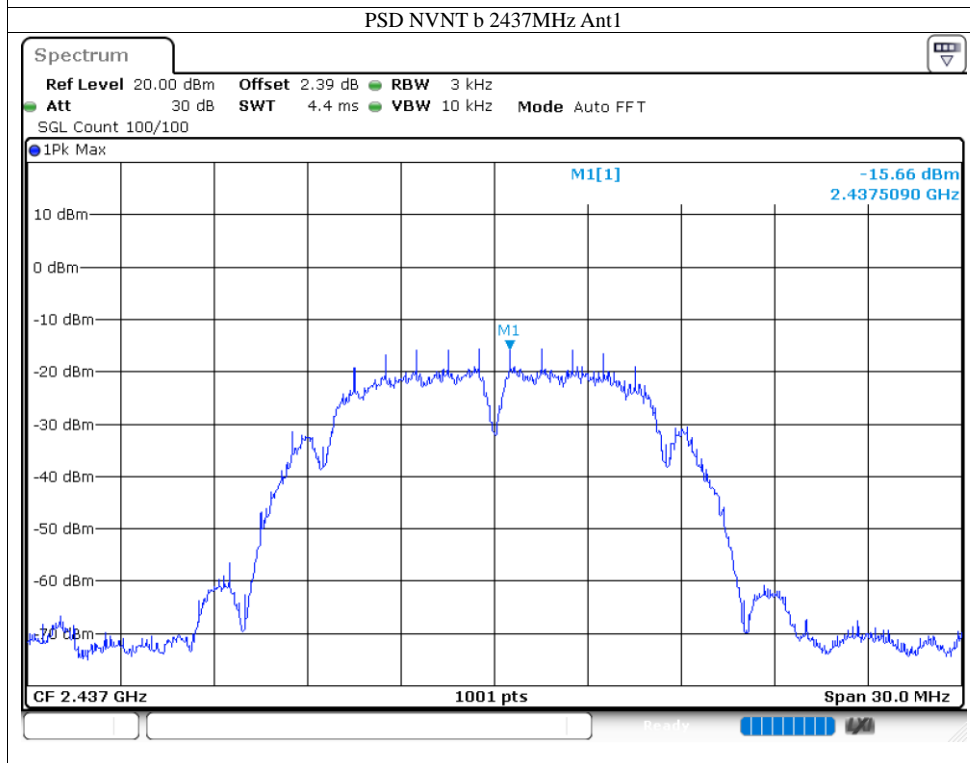
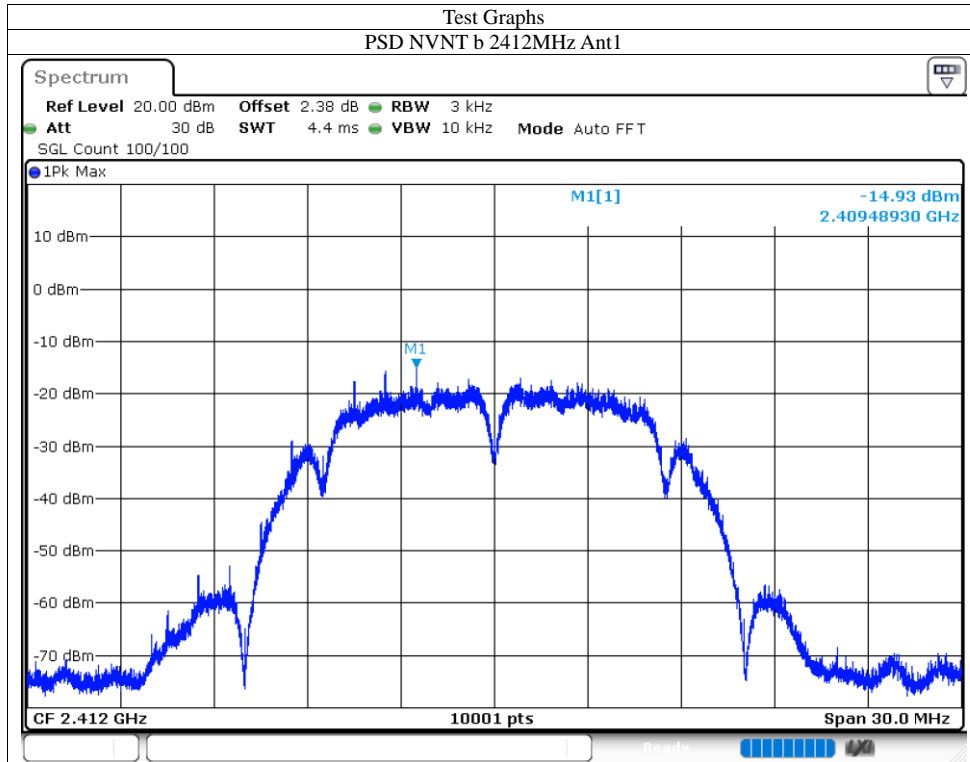


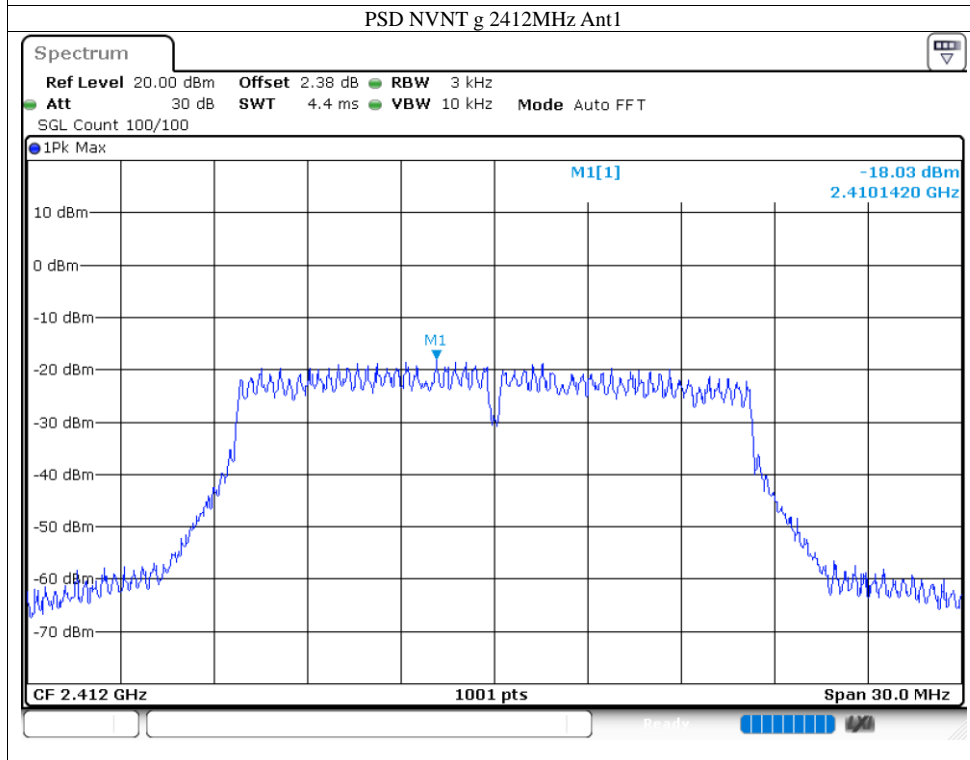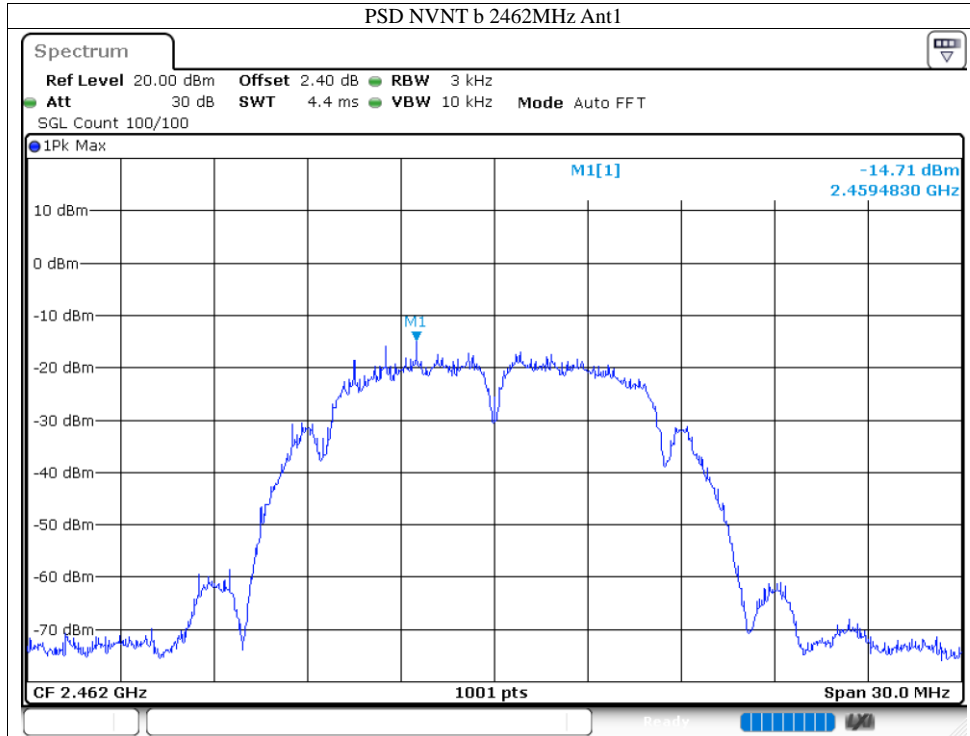

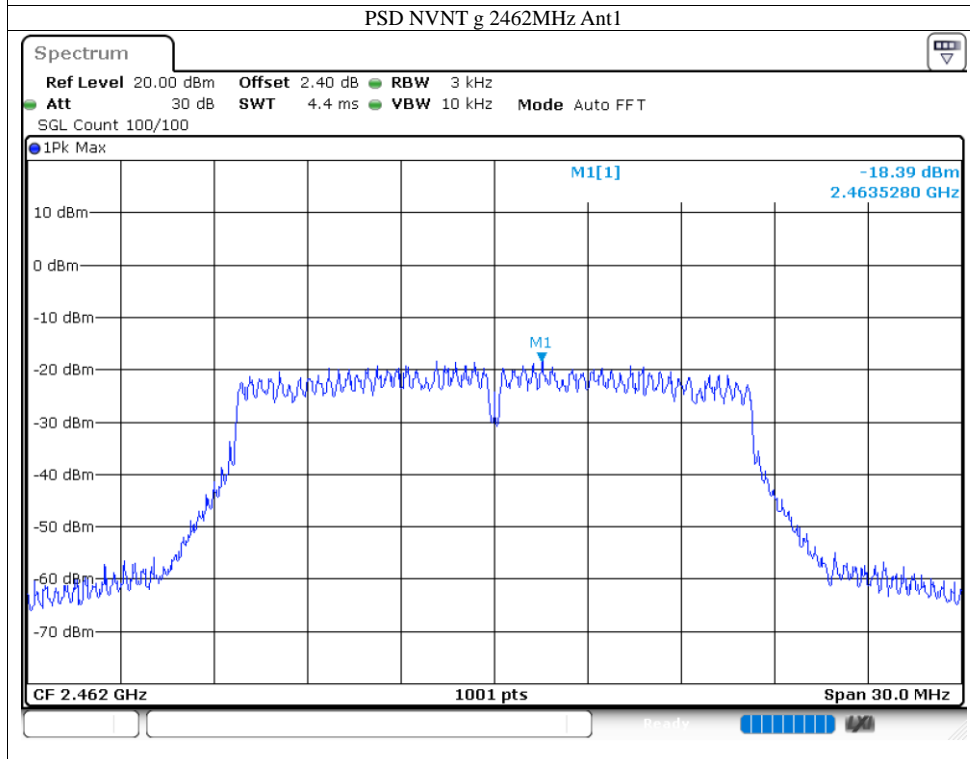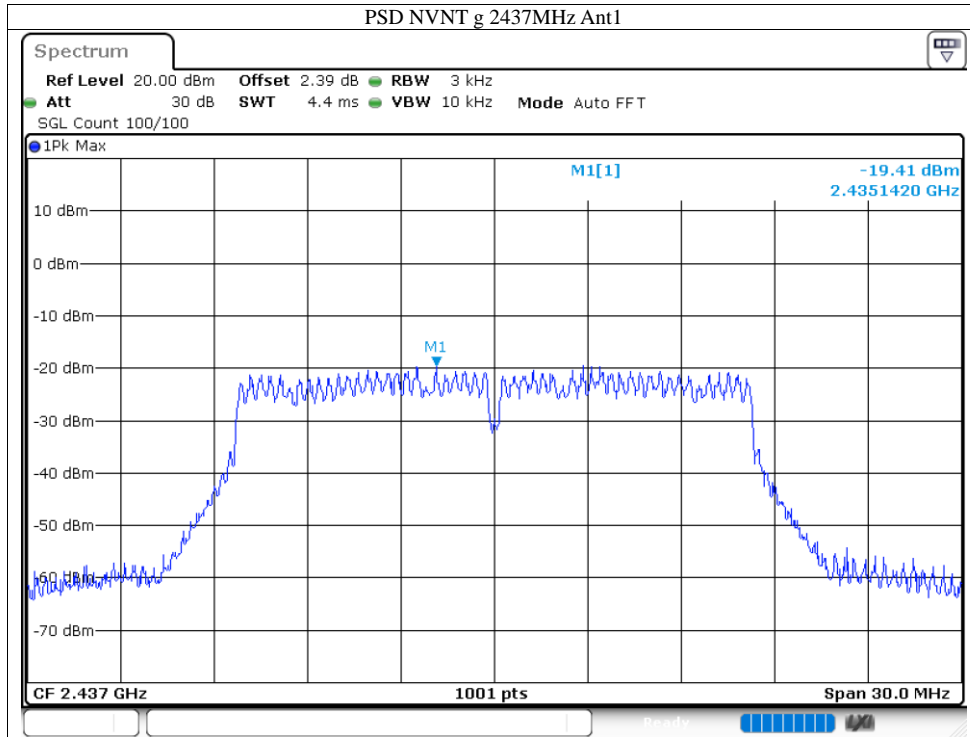

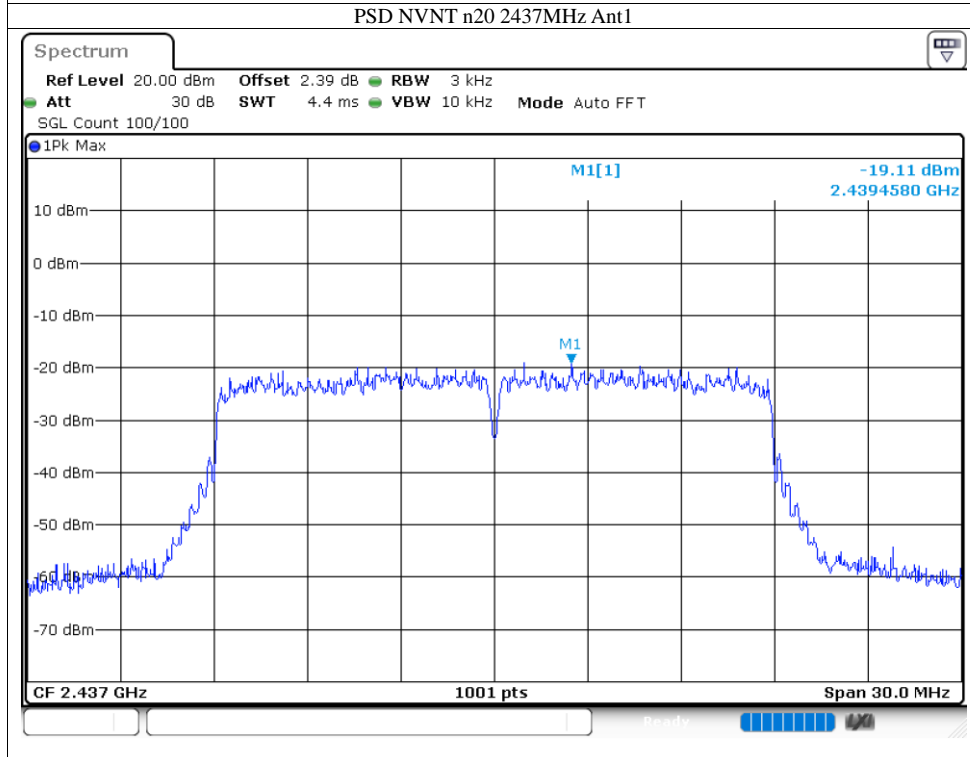
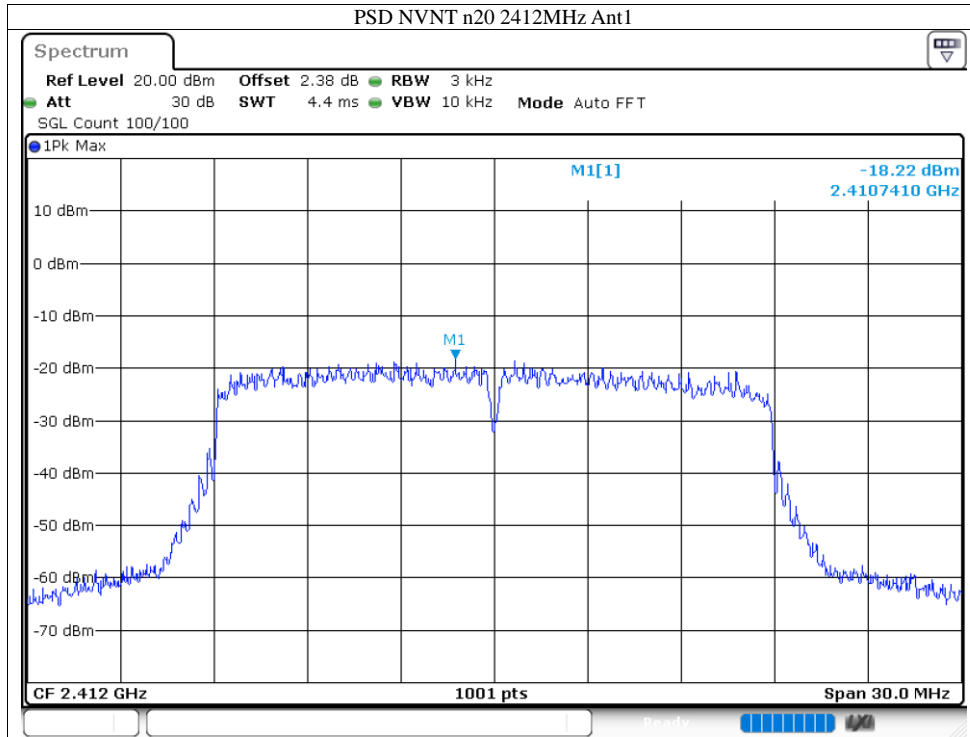


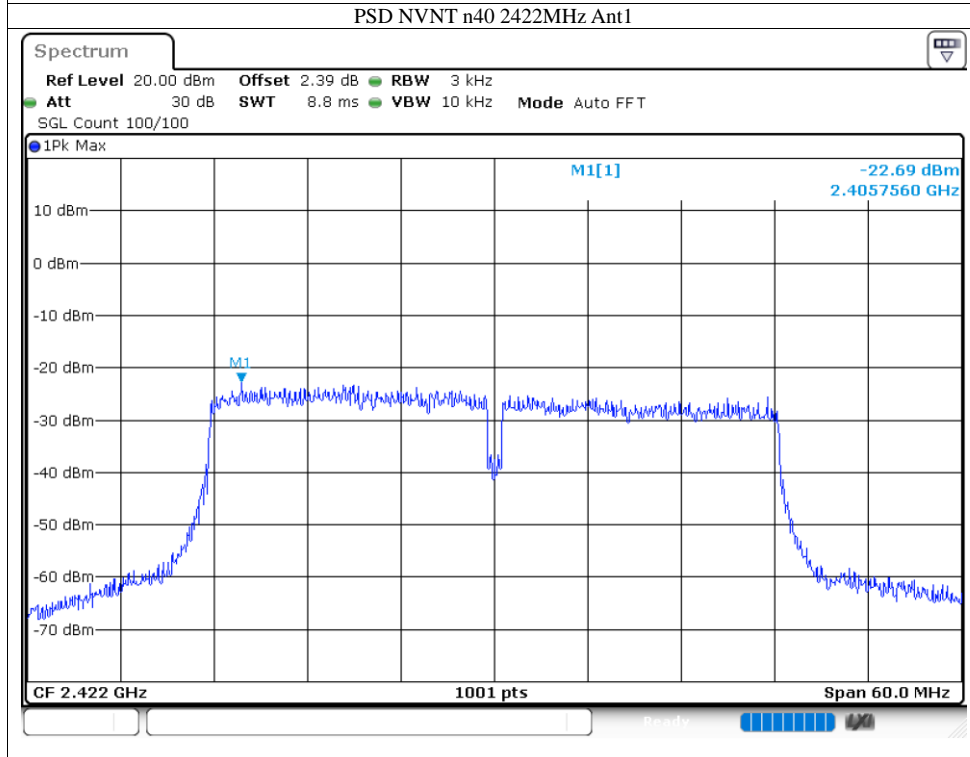
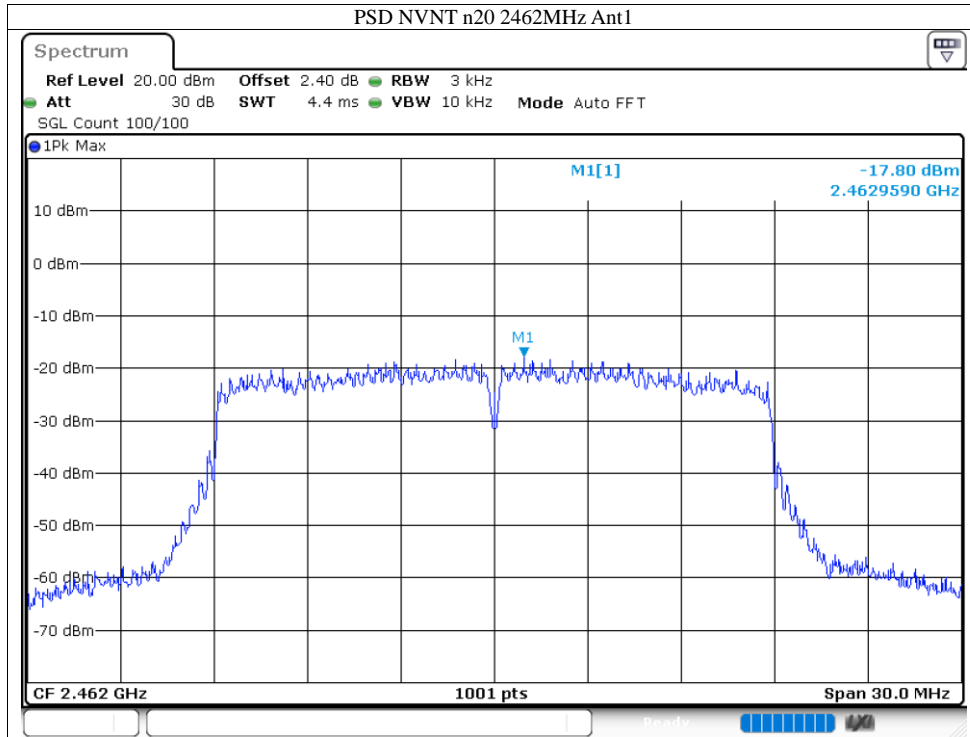


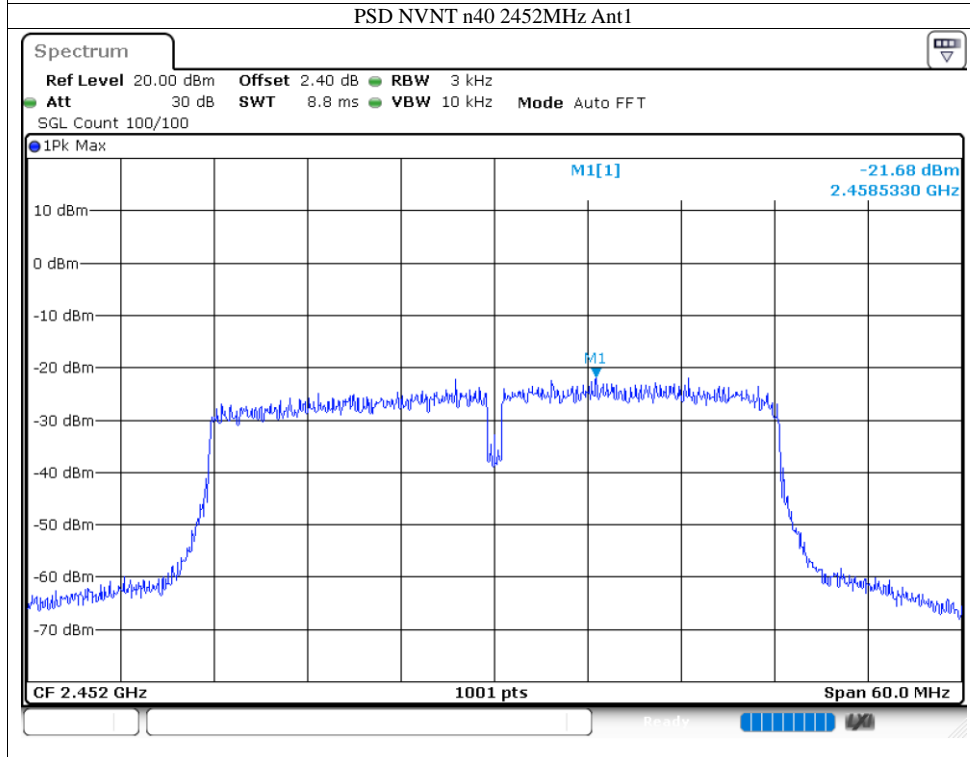
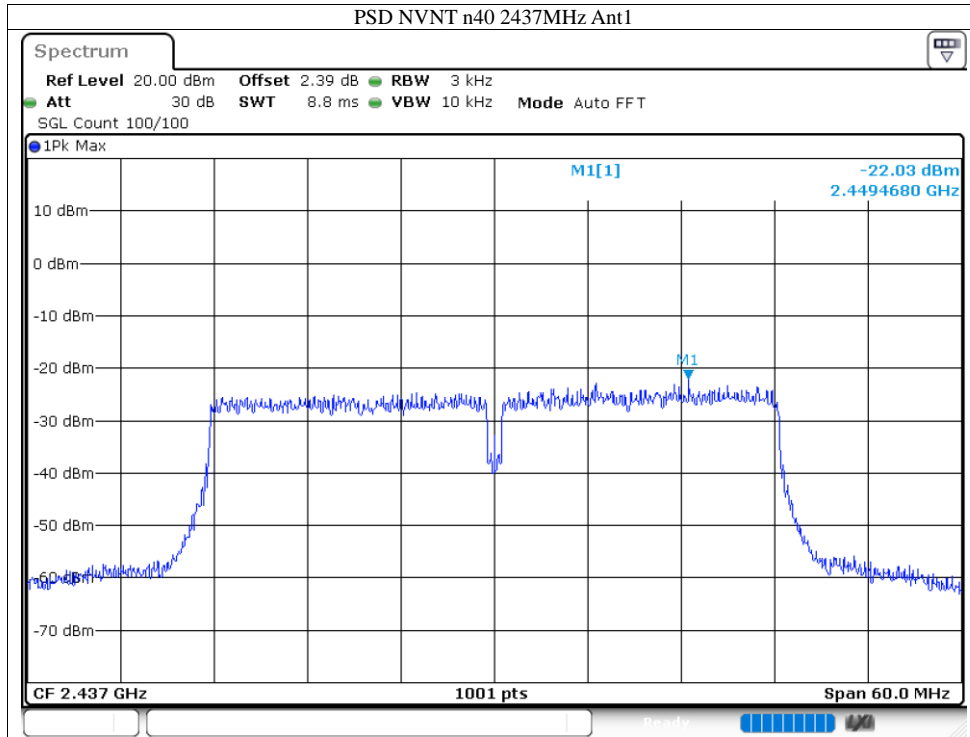




8.6 BAND EDGE



Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-60.77	-20	Pass
NVNT	b	2462	Ant1	-60.32	-20	Pass
NVNT	g	2412	Ant1	-51.48	-20	Pass
NVNT	g	2462	Ant1	-43.34	-20	Pass
NVNT	n20	2412	Ant1	-48.31	-20	Pass
NVNT	n20	2462	Ant1	-48.29	-20	Pass
NVNT	n40	2422	Ant1	-44.8	-20	Pass
NVNT	n40	2452	Ant1	-40.13	-20	Pass

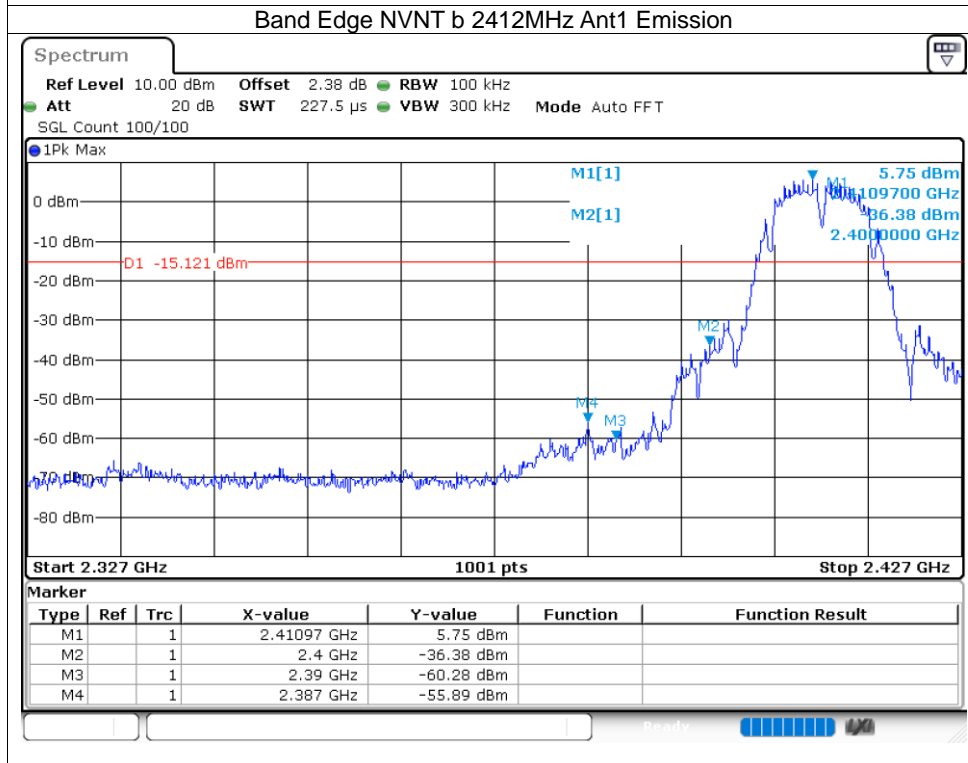
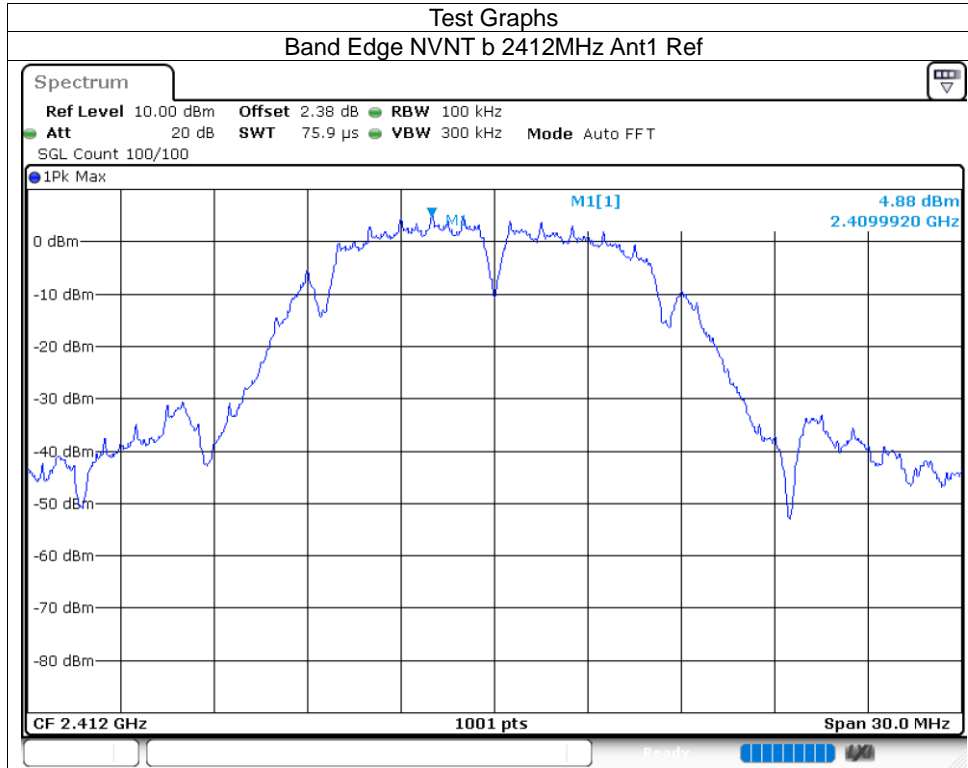


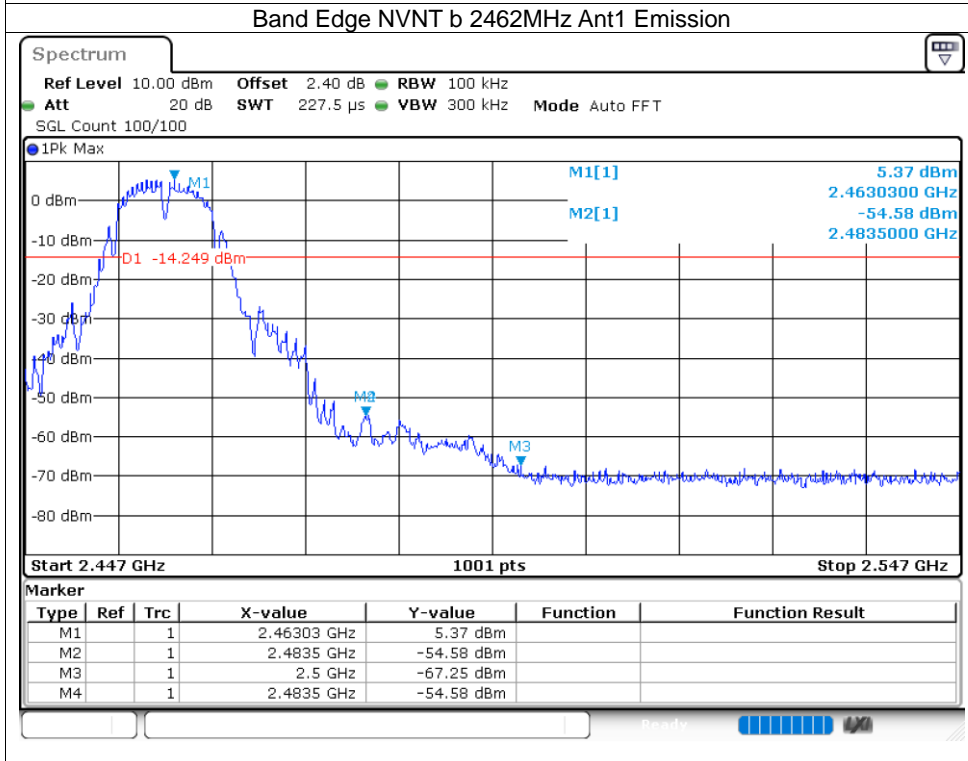
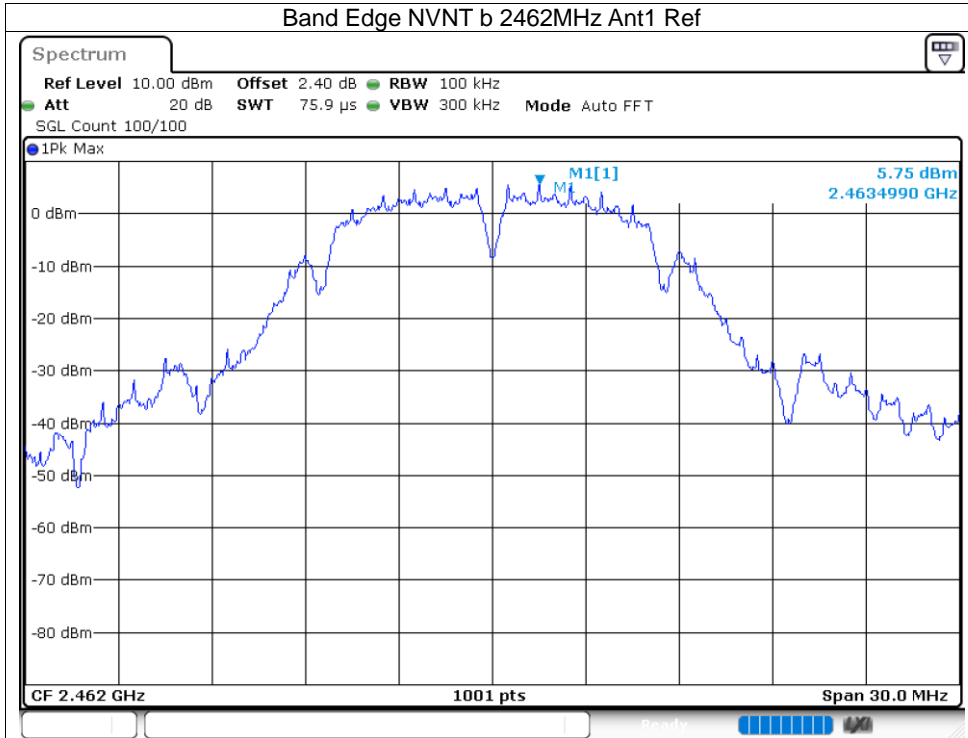


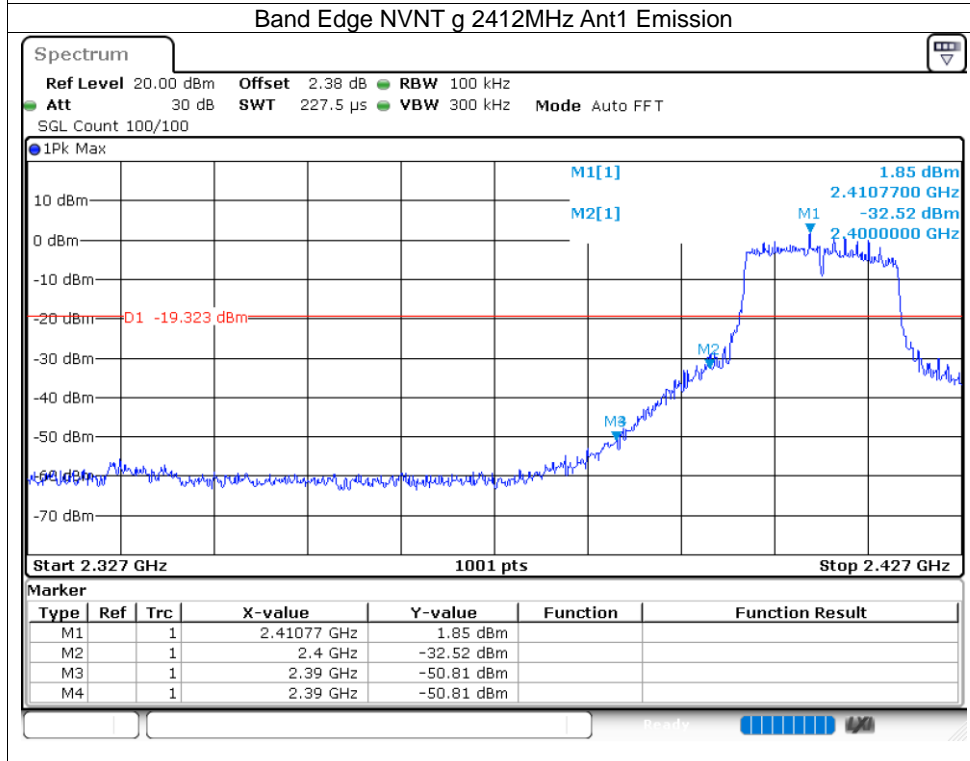
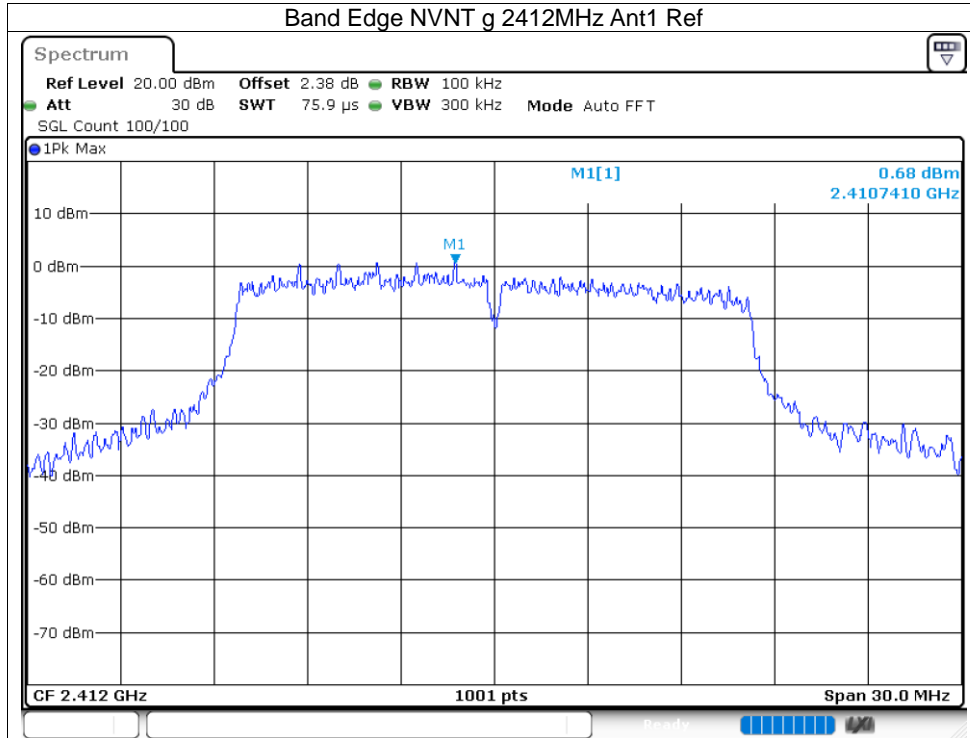


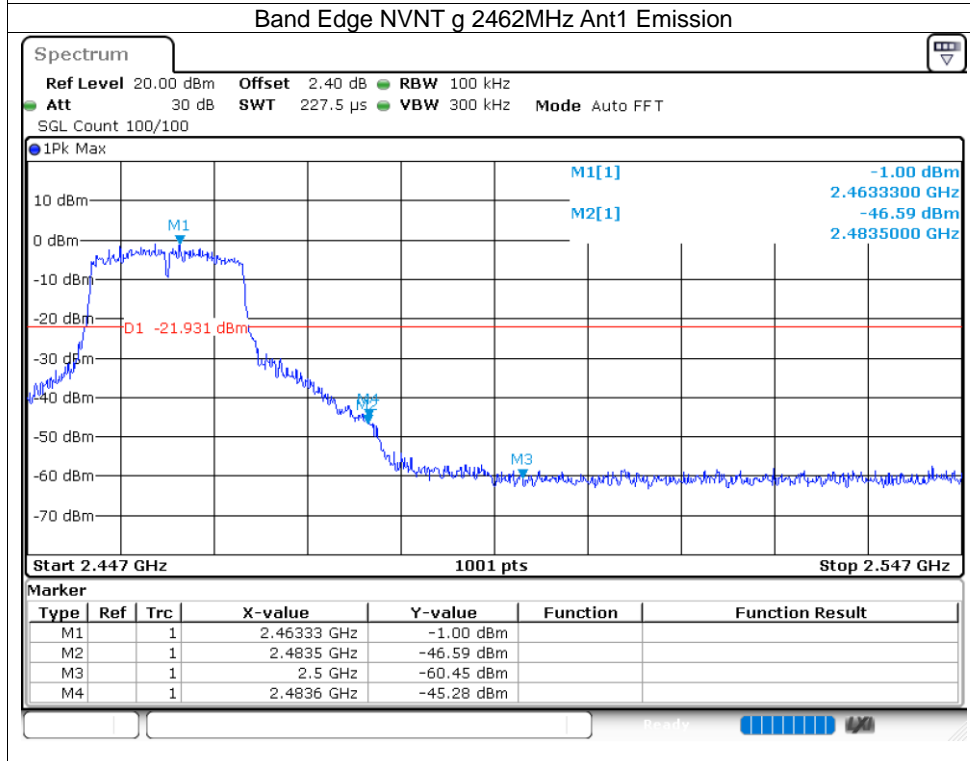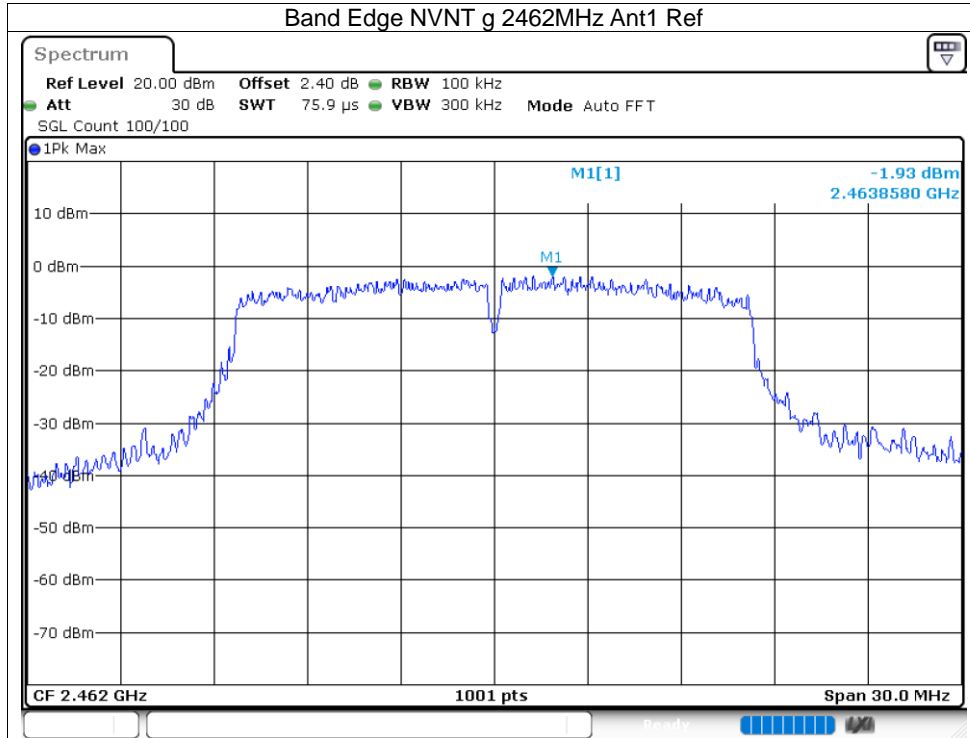

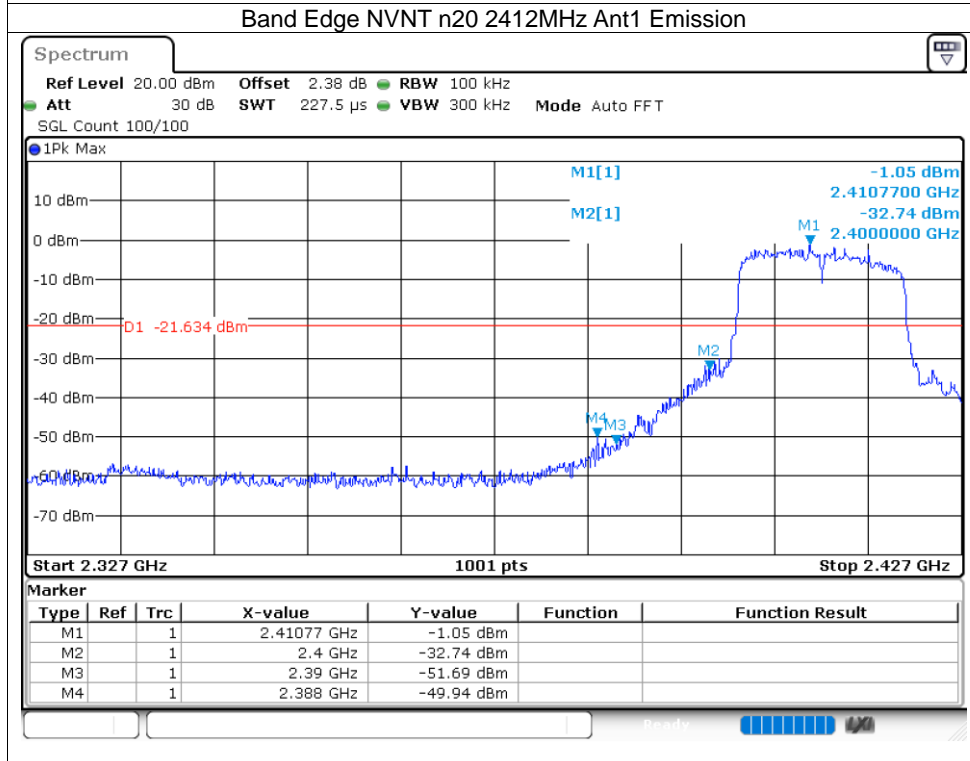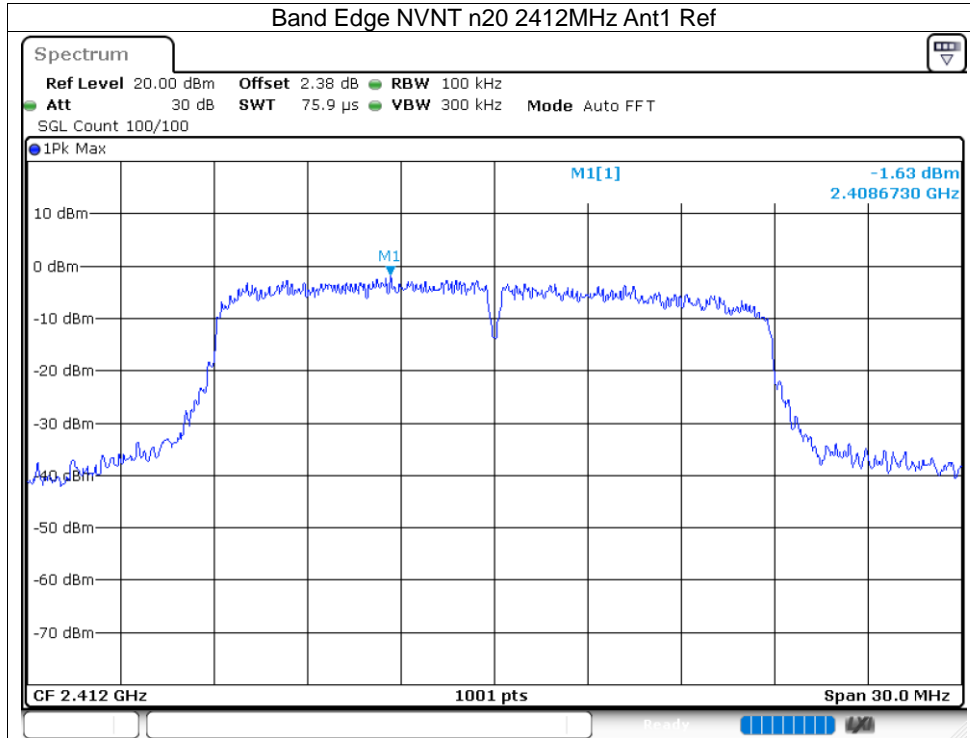

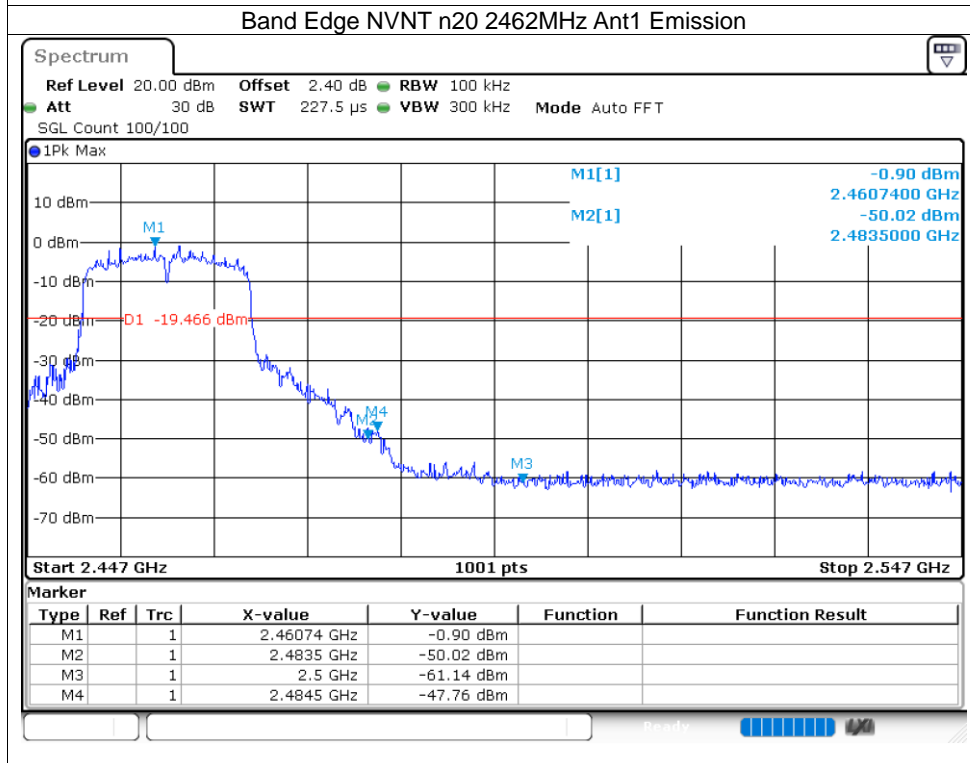
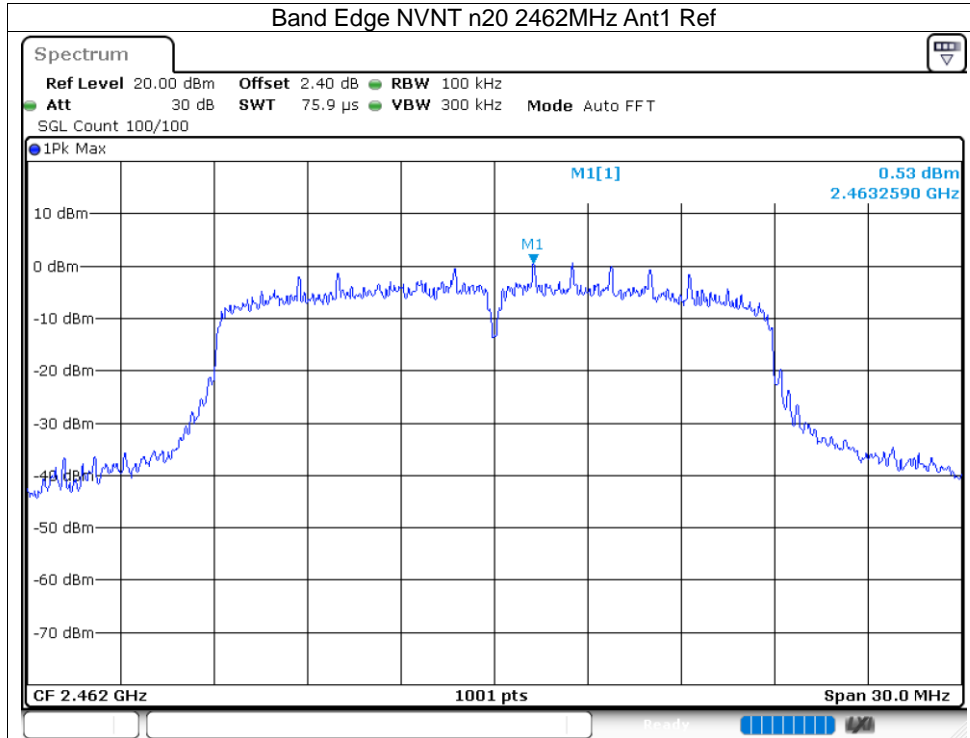


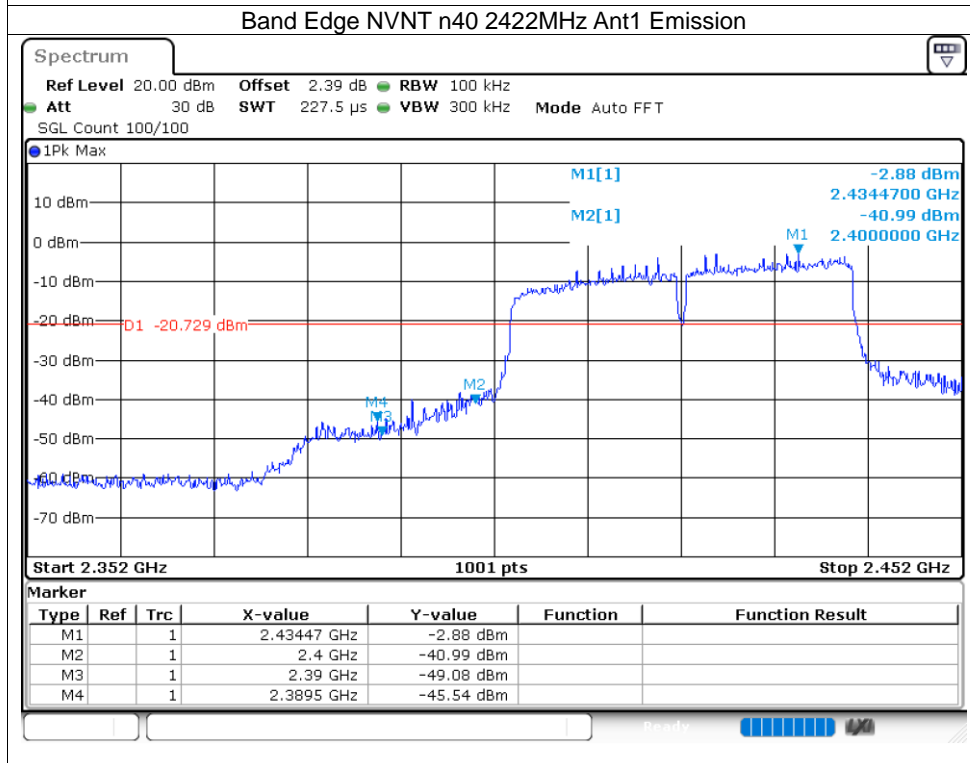
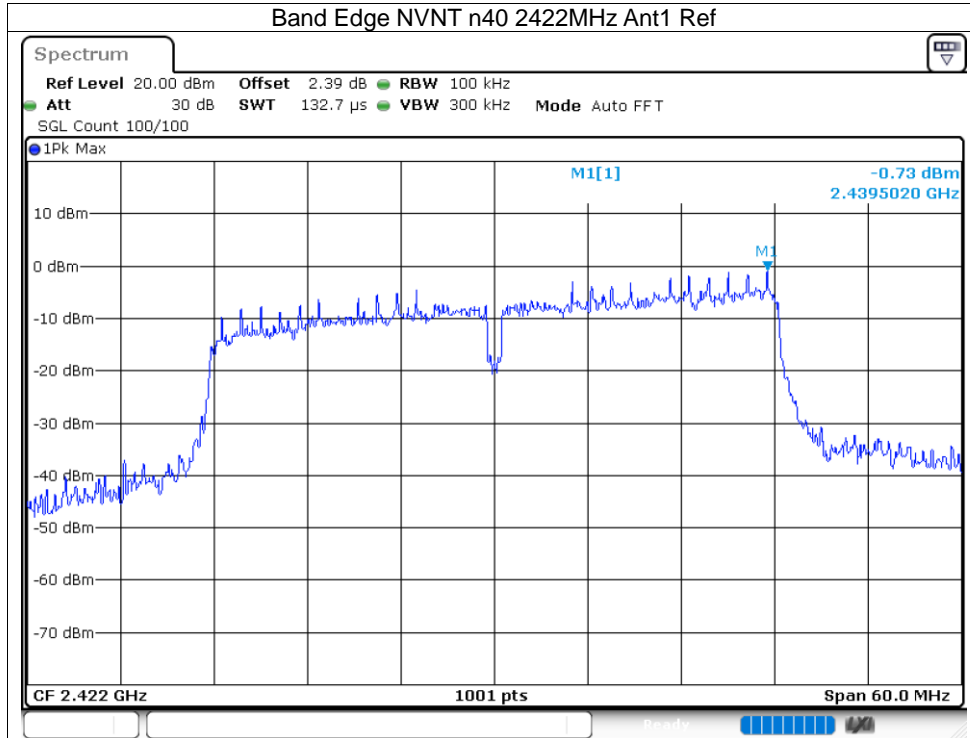


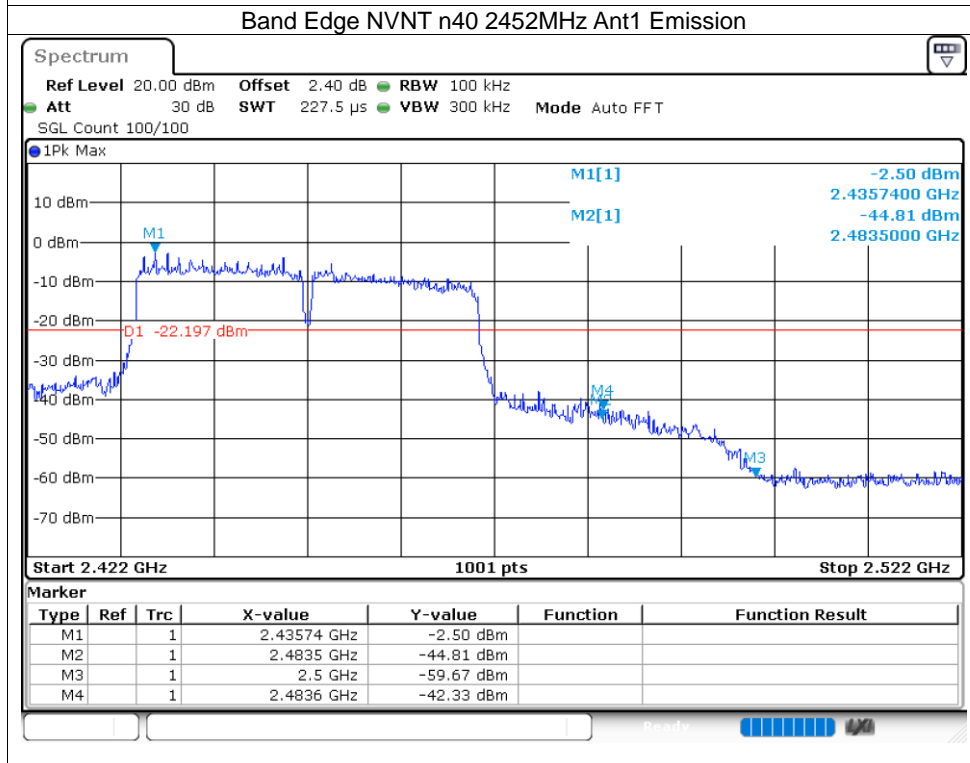
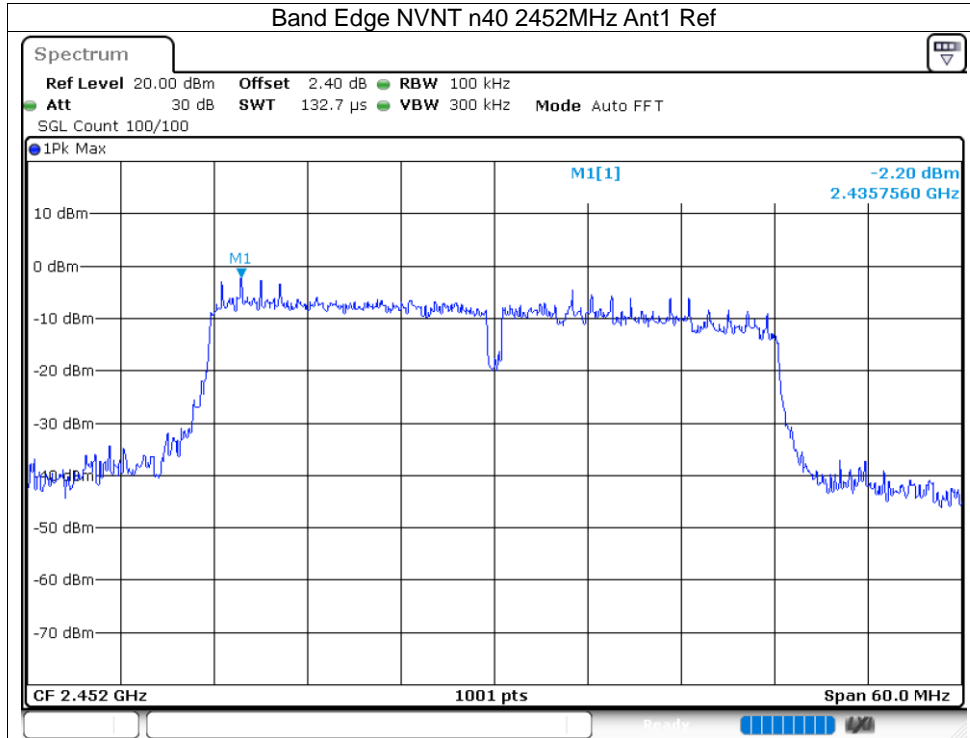




8.7 CONDUCTED RF SPURIOUS EMISSION



Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-57.18	-20	Pass
NVNT	b	2437	Ant1	-54.02	-20	Pass
NVNT	b	2462	Ant1	-57.07	-20	Pass
NVNT	g	2412	Ant1	-50.75	-20	Pass
NVNT	g	2437	Ant1	-51.96	-20	Pass
NVNT	g	2462	Ant1	-51.6	-20	Pass
NVNT	n20	2412	Ant1	-46.93	-20	Pass
NVNT	n20	2437	Ant1	-48.29	-20	Pass
NVNT	n20	2462	Ant1	-48.37	-20	Pass
NVNT	n40	2422	Ant1	-48.88	-20	Pass
NVNT	n40	2437	Ant1	-46.11	-20	Pass
NVNT	n40	2452	Ant1	-41.13	-20	Pass

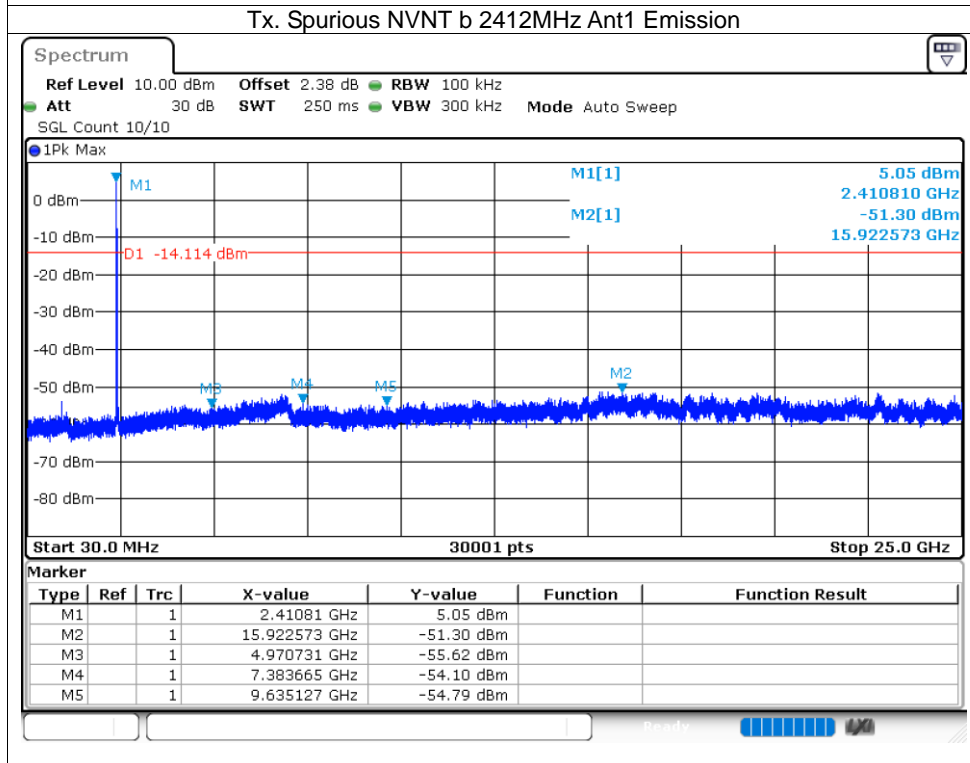
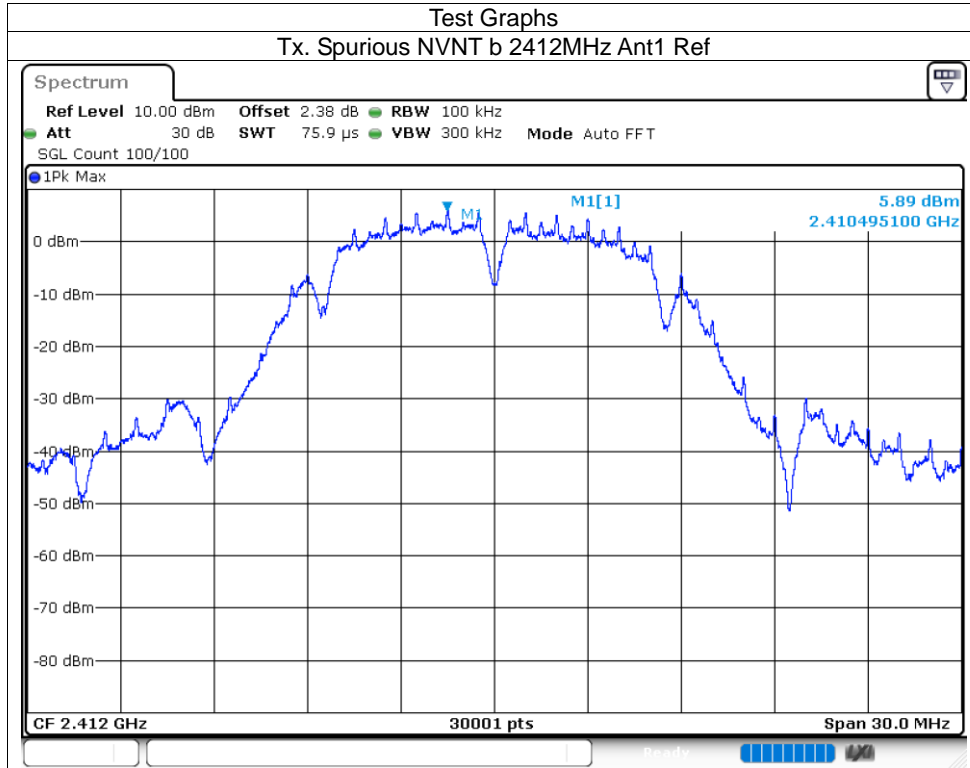


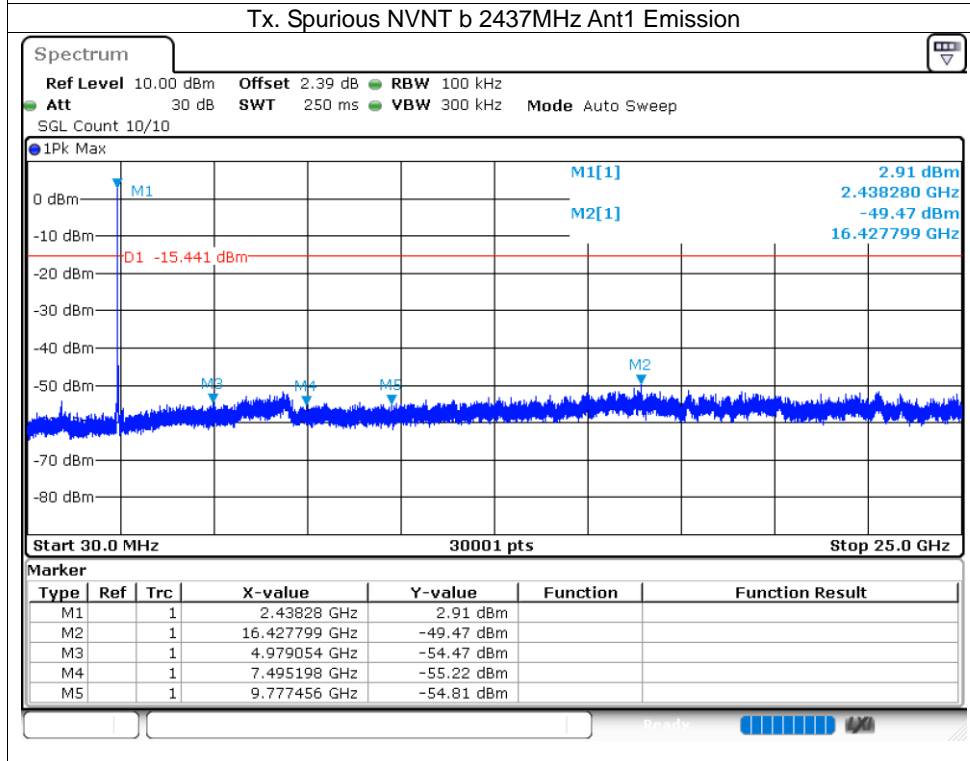
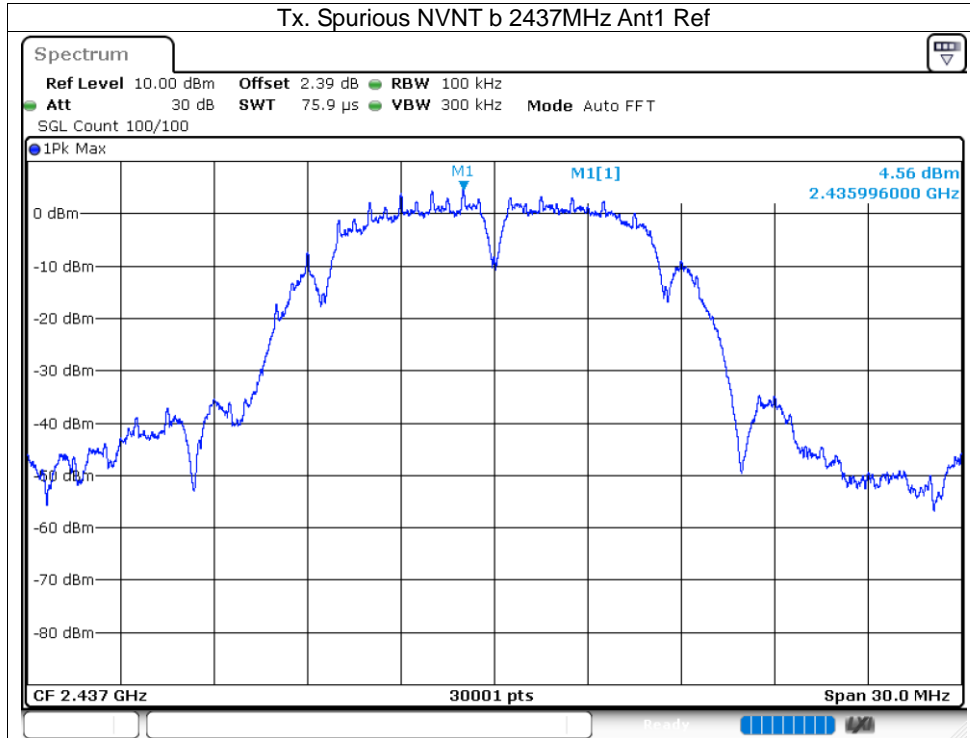


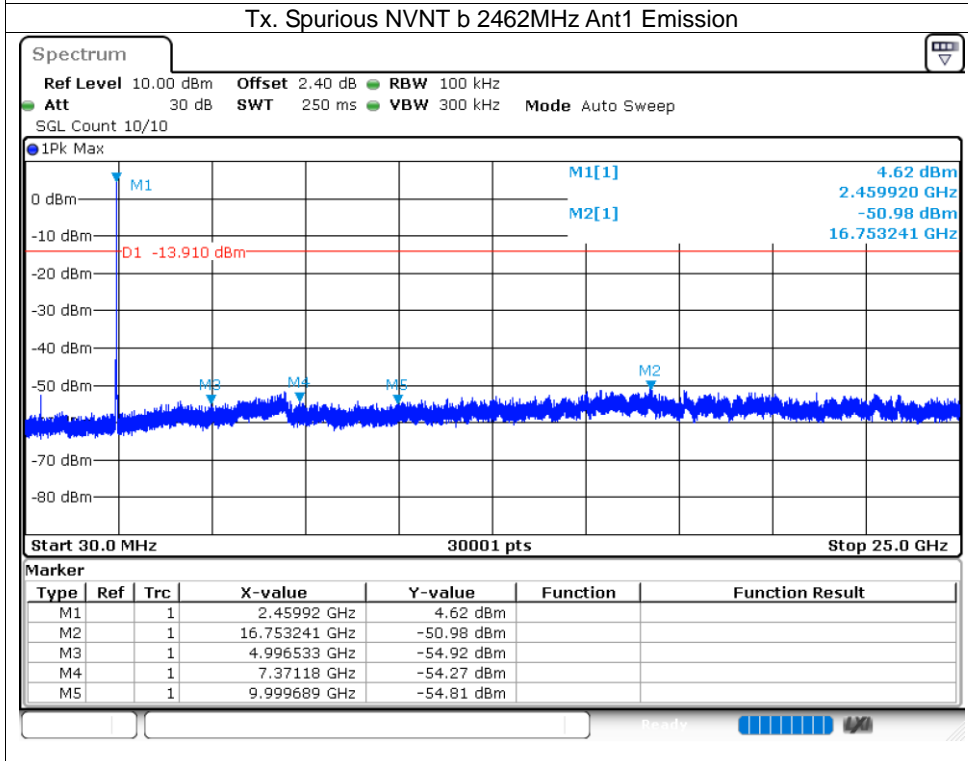
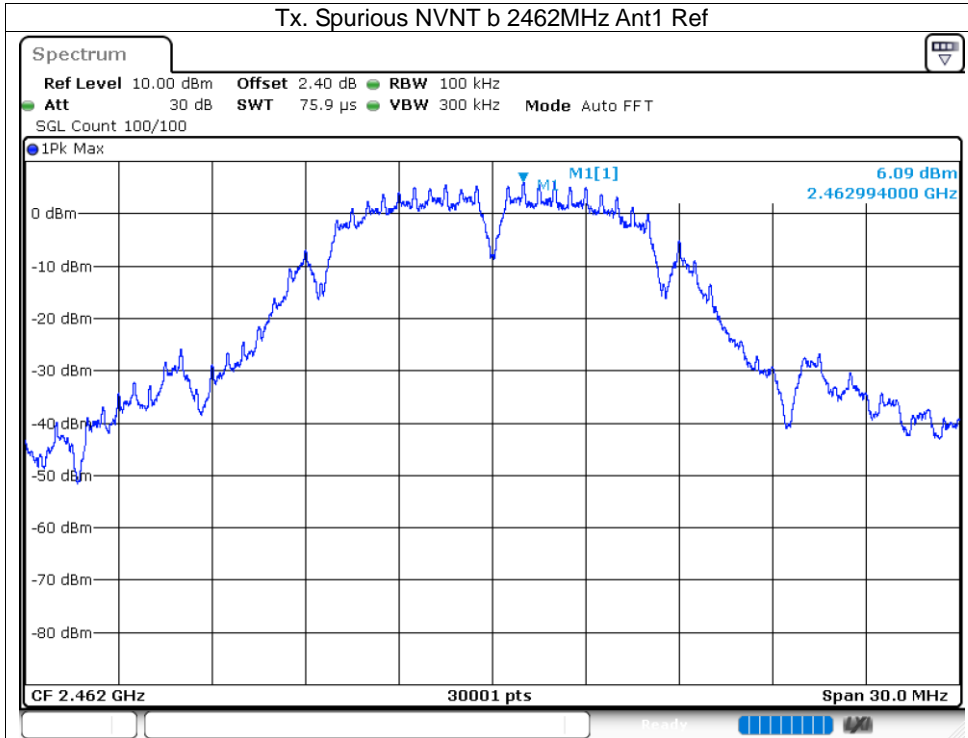


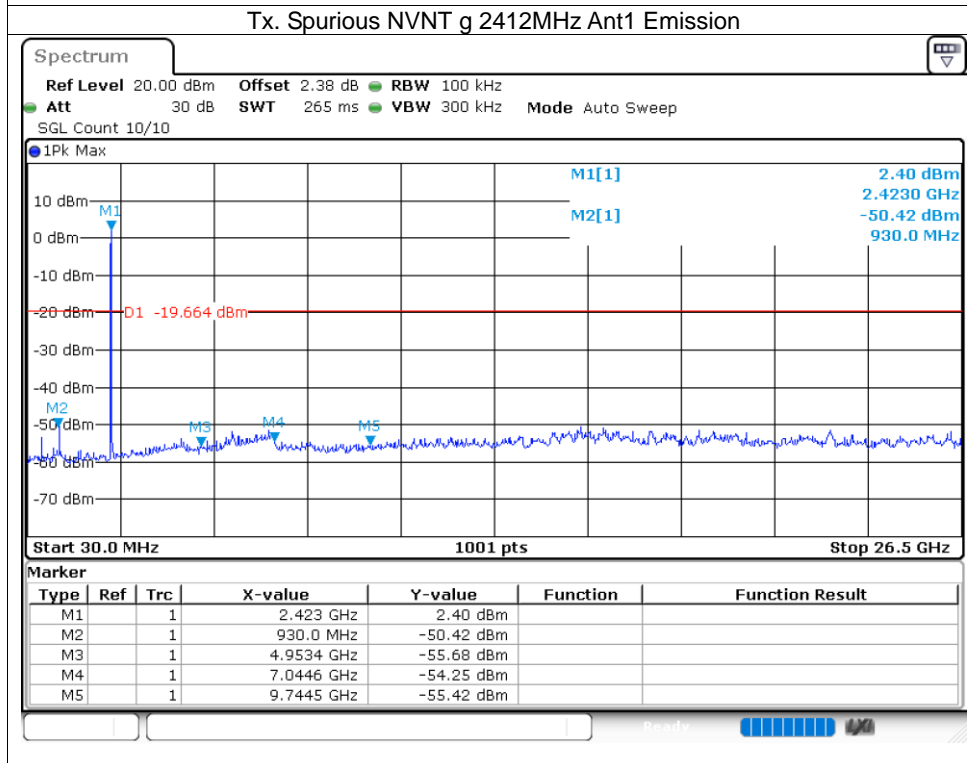
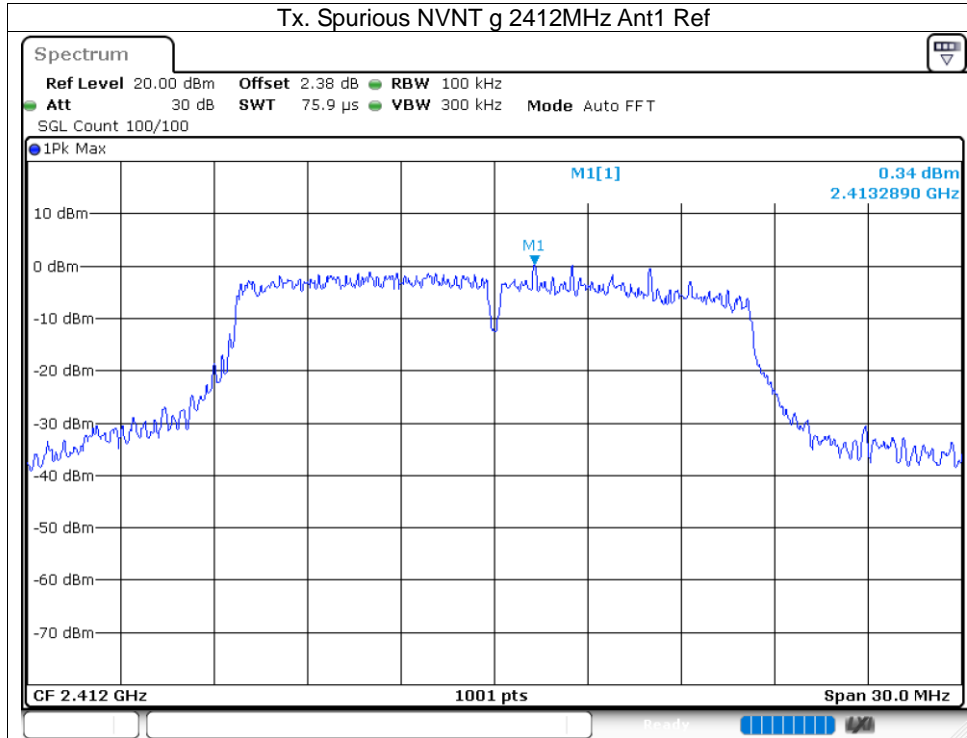


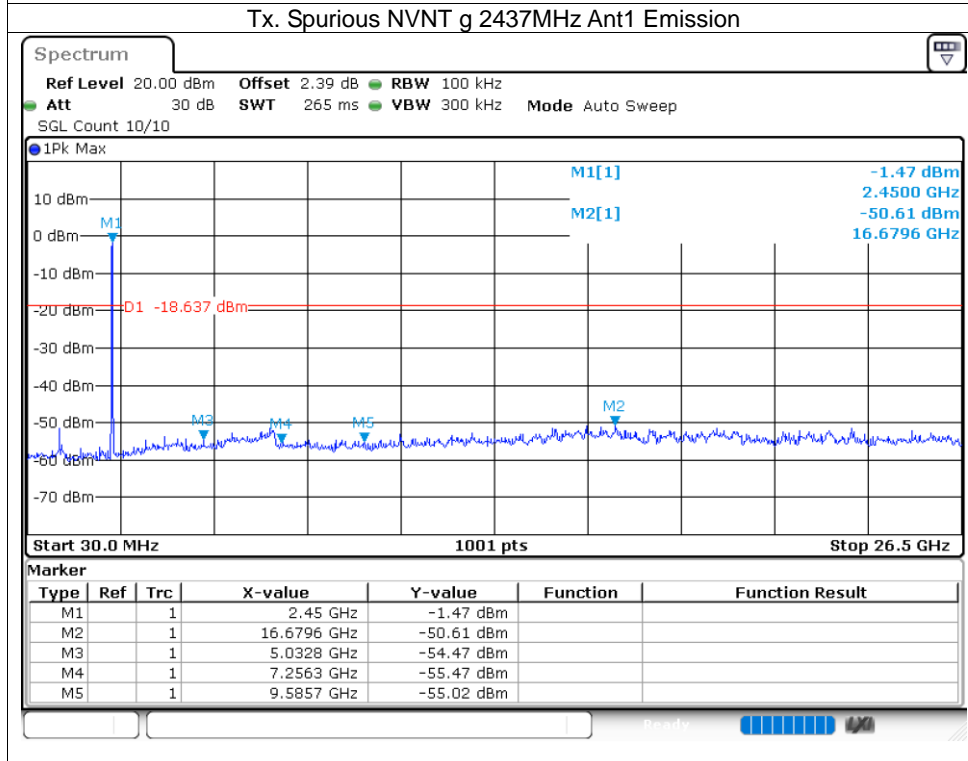
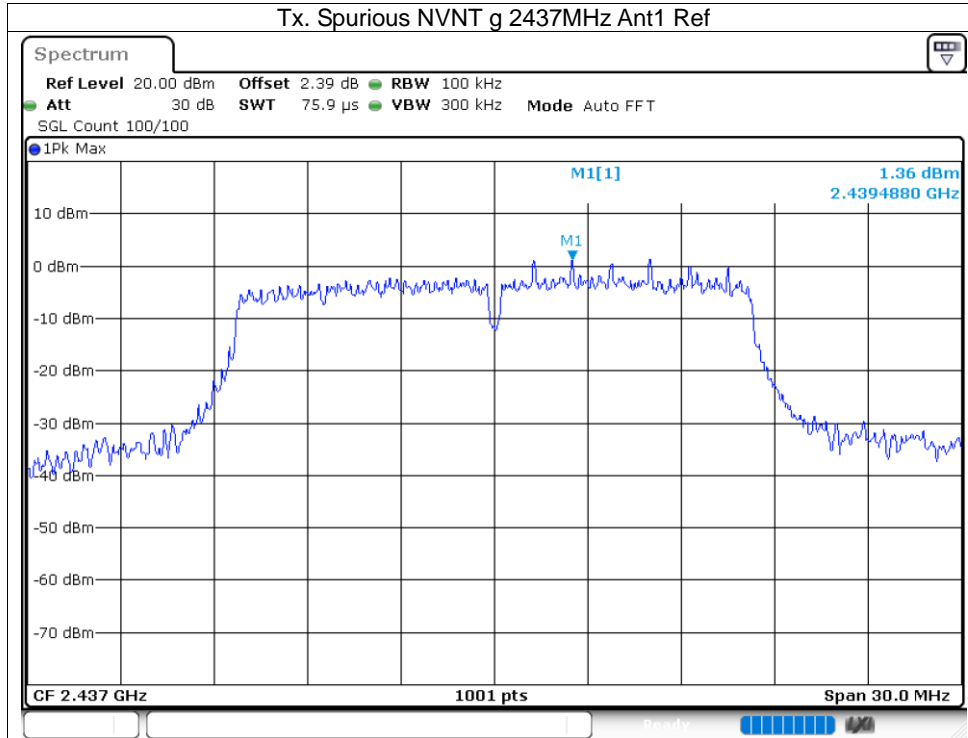


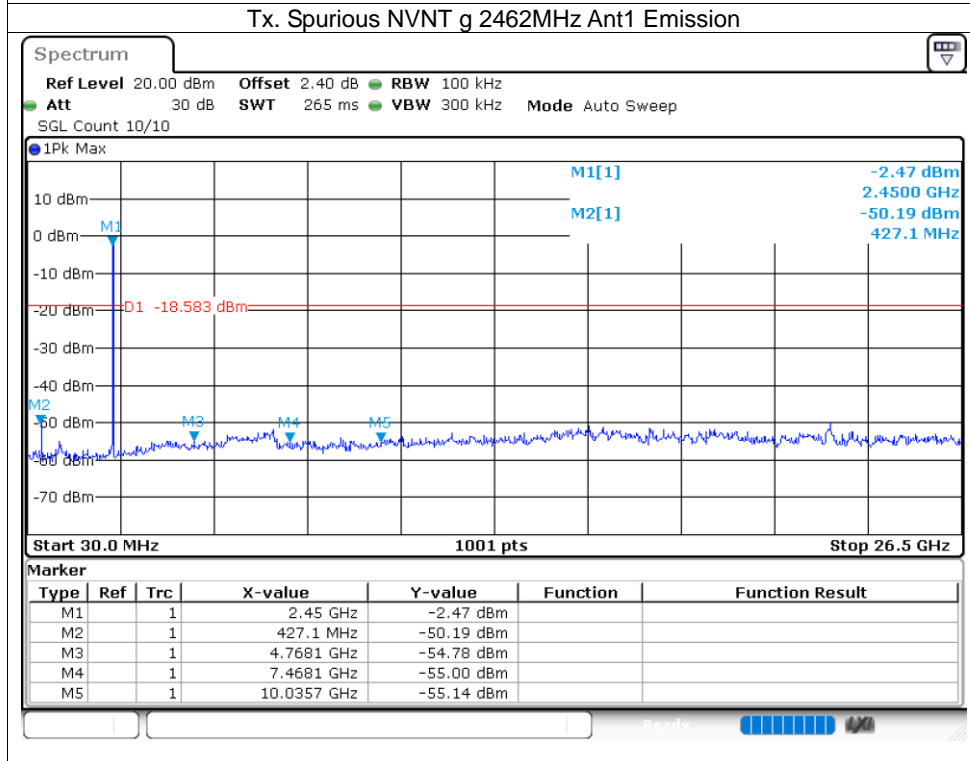
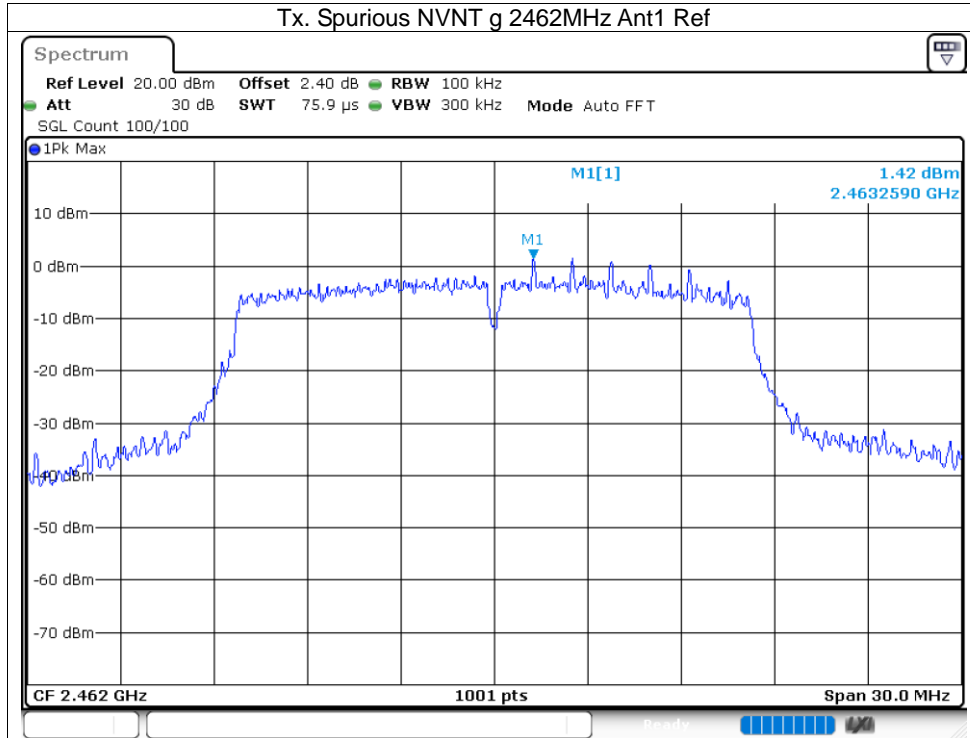


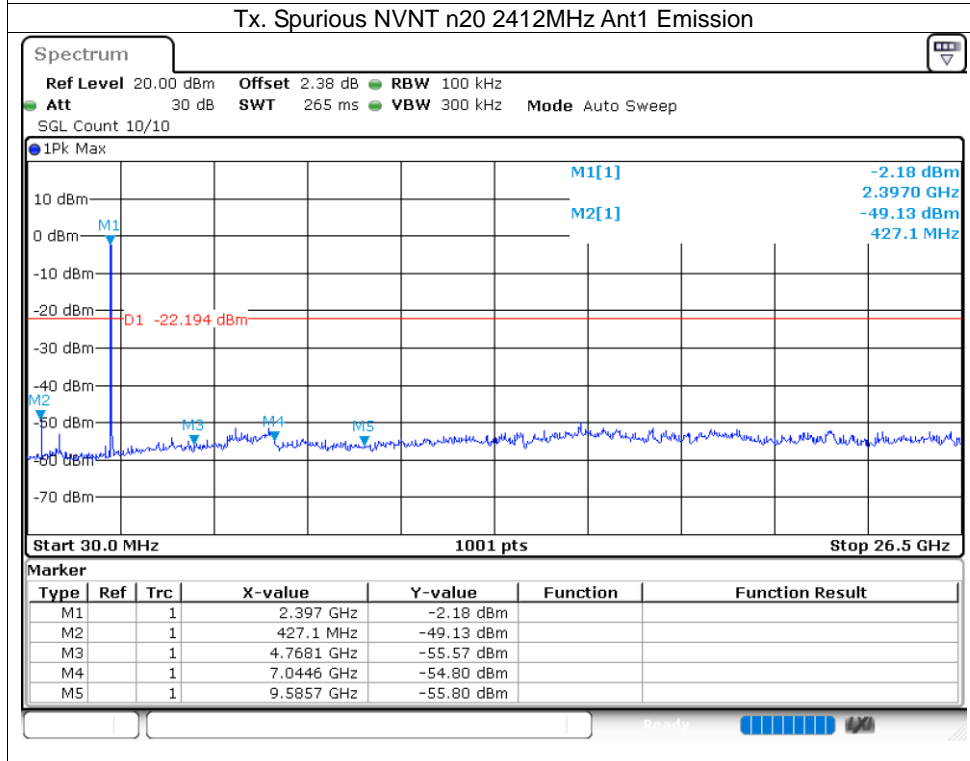
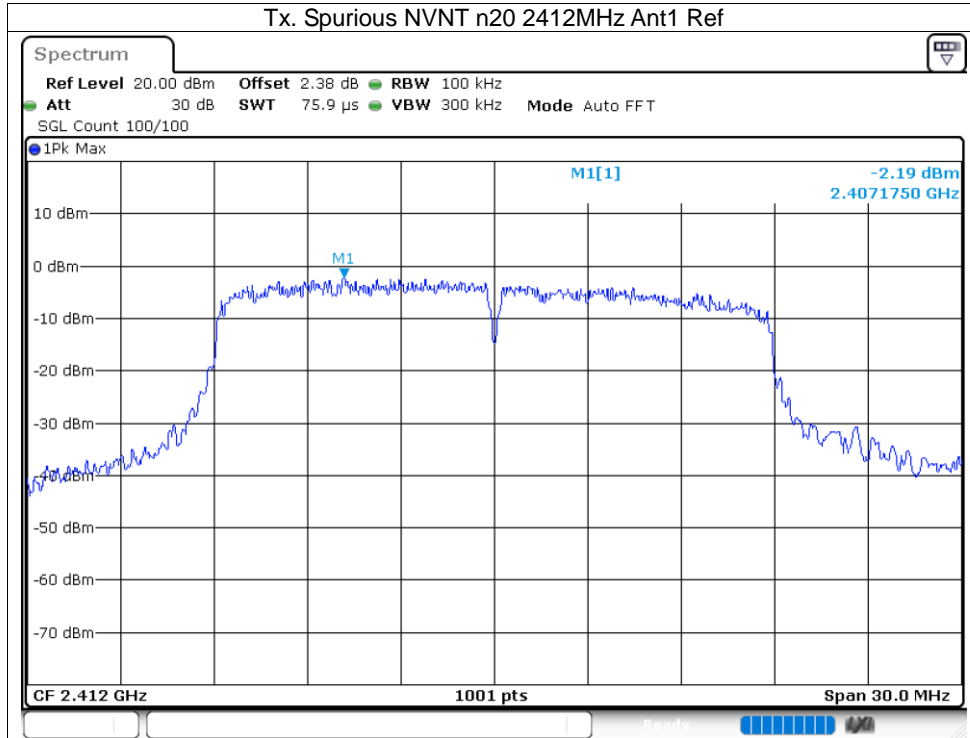


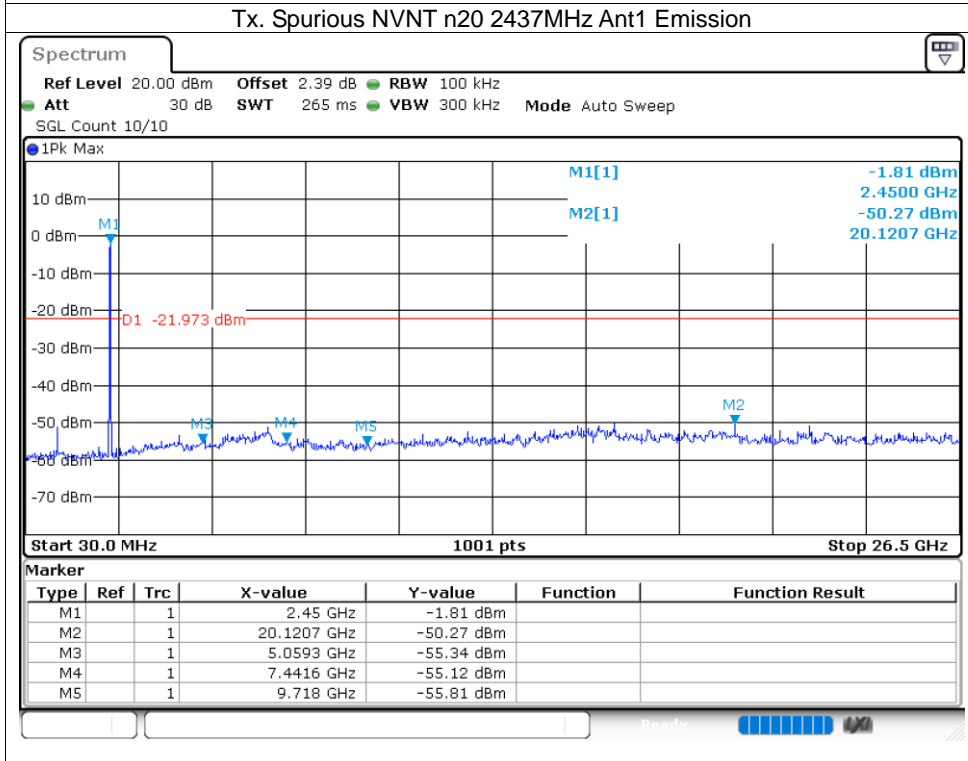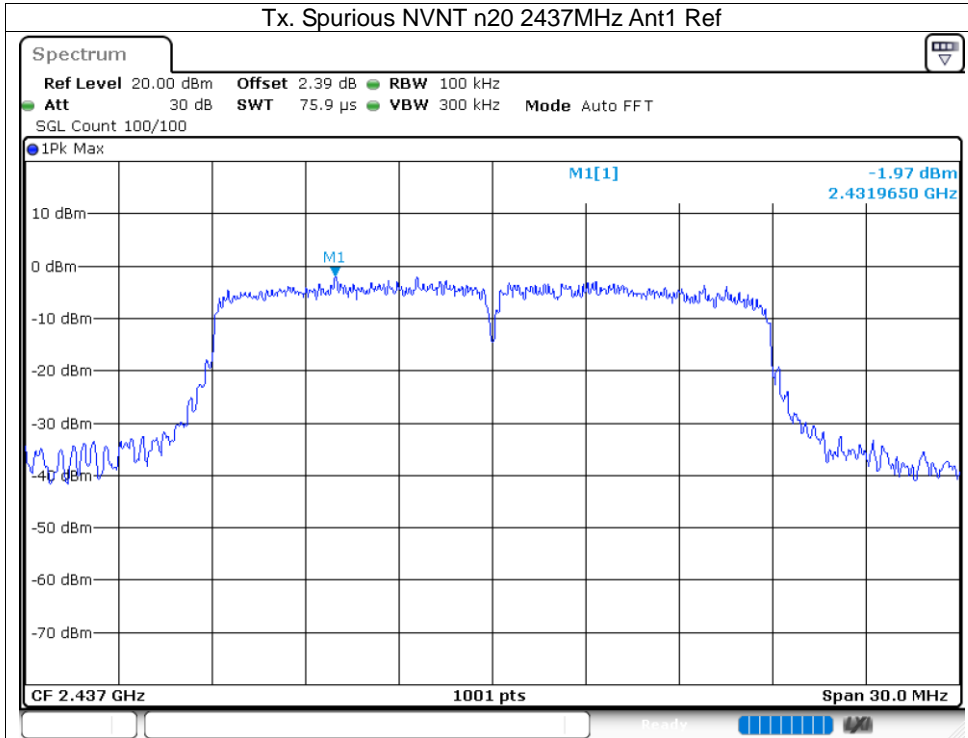

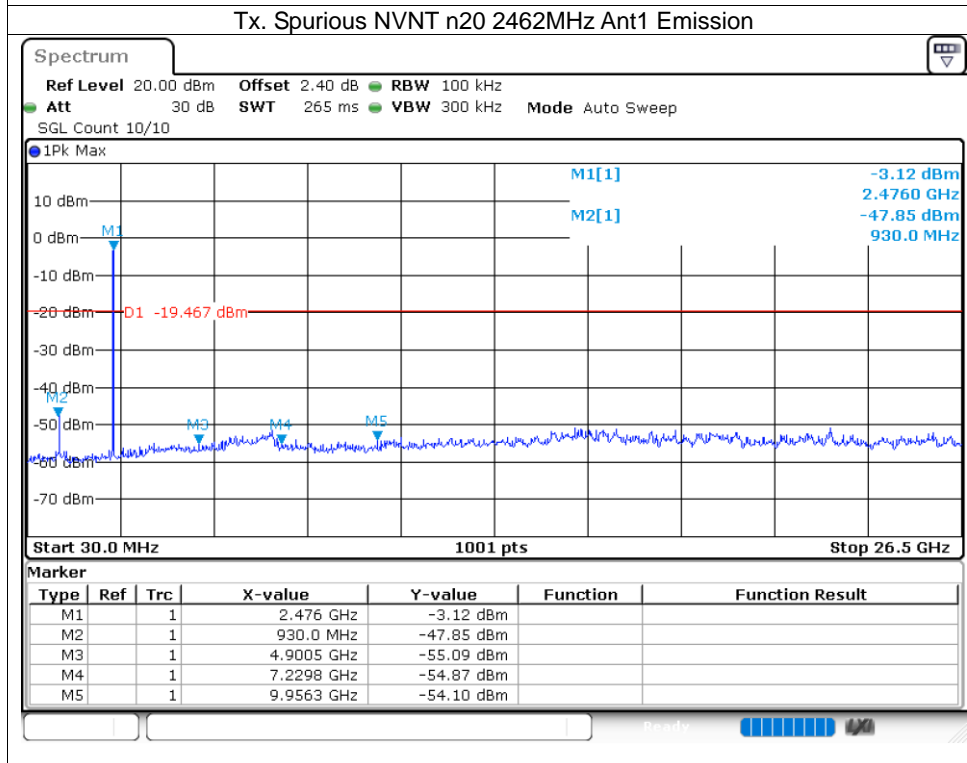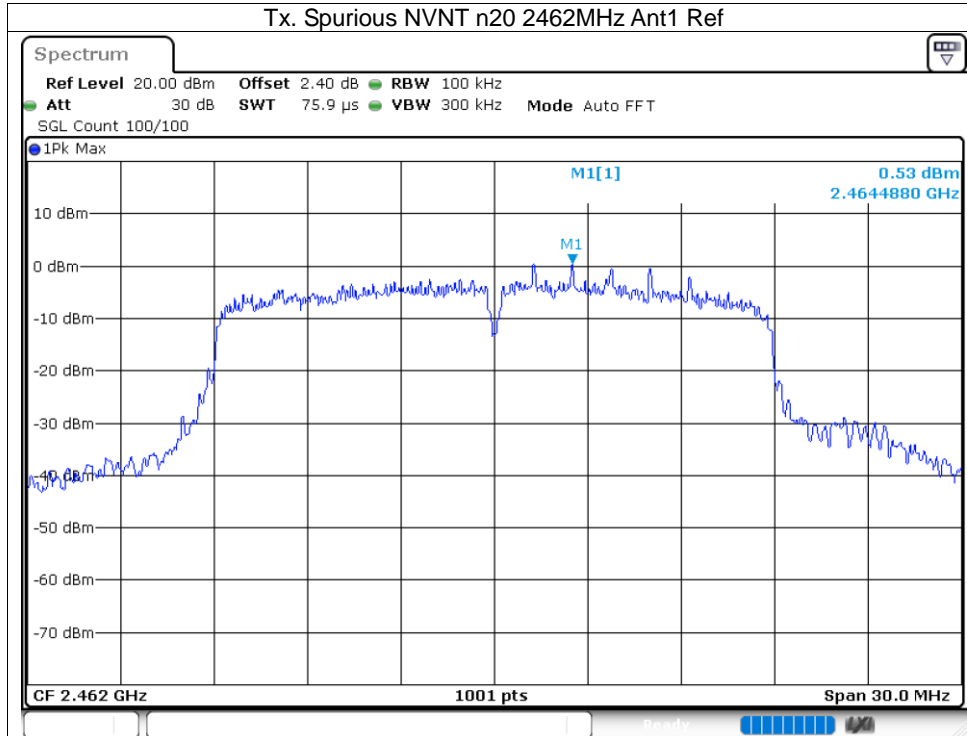

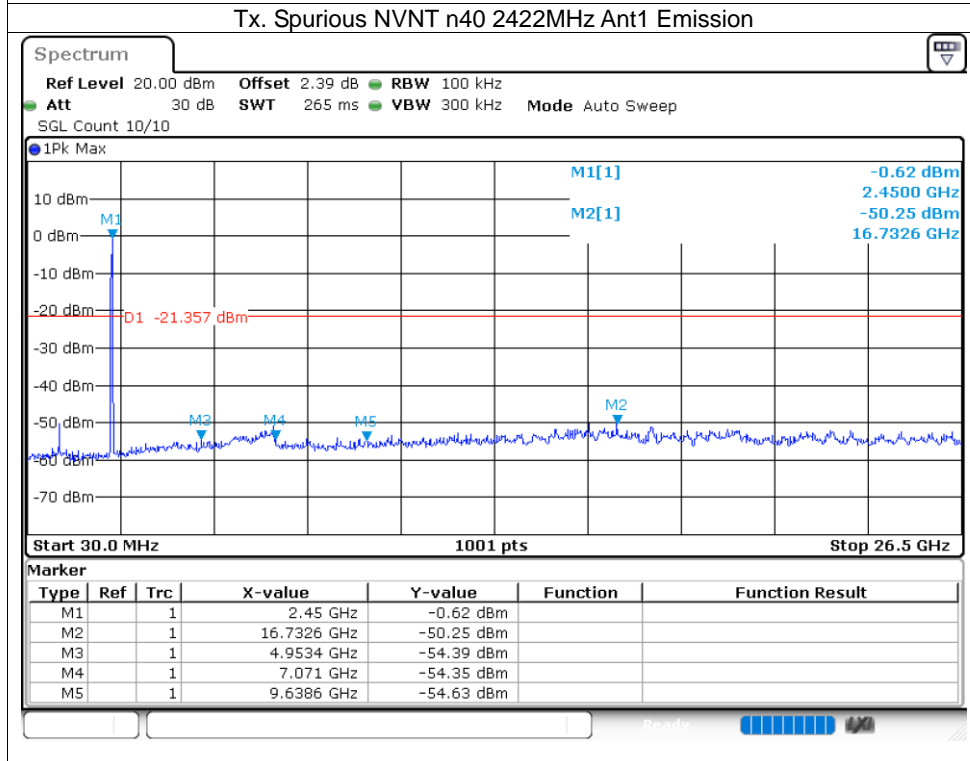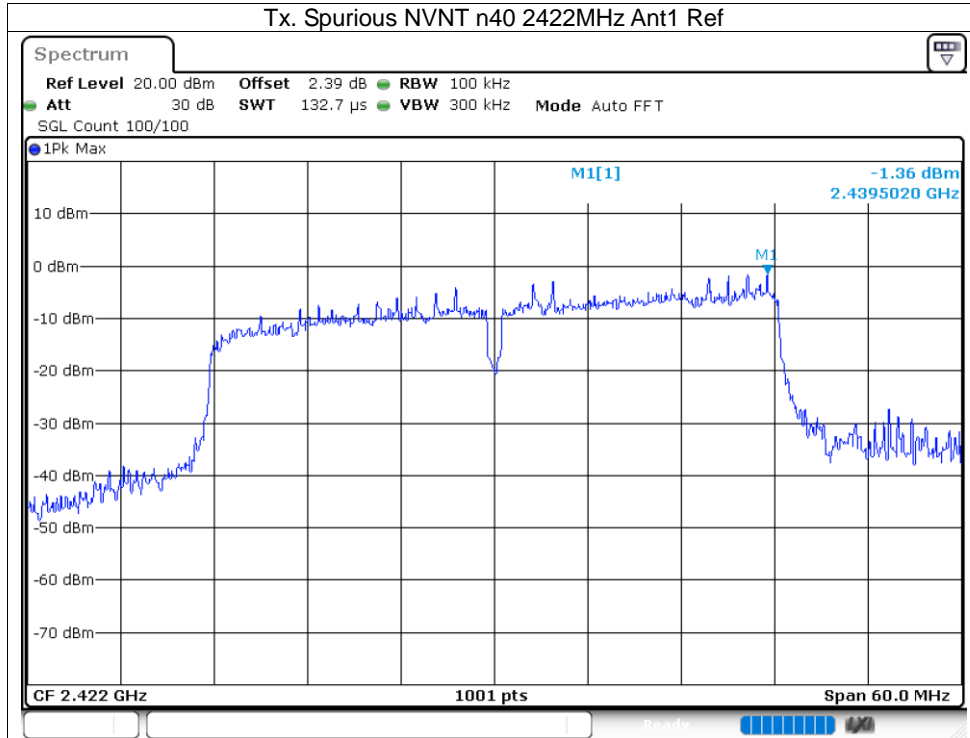

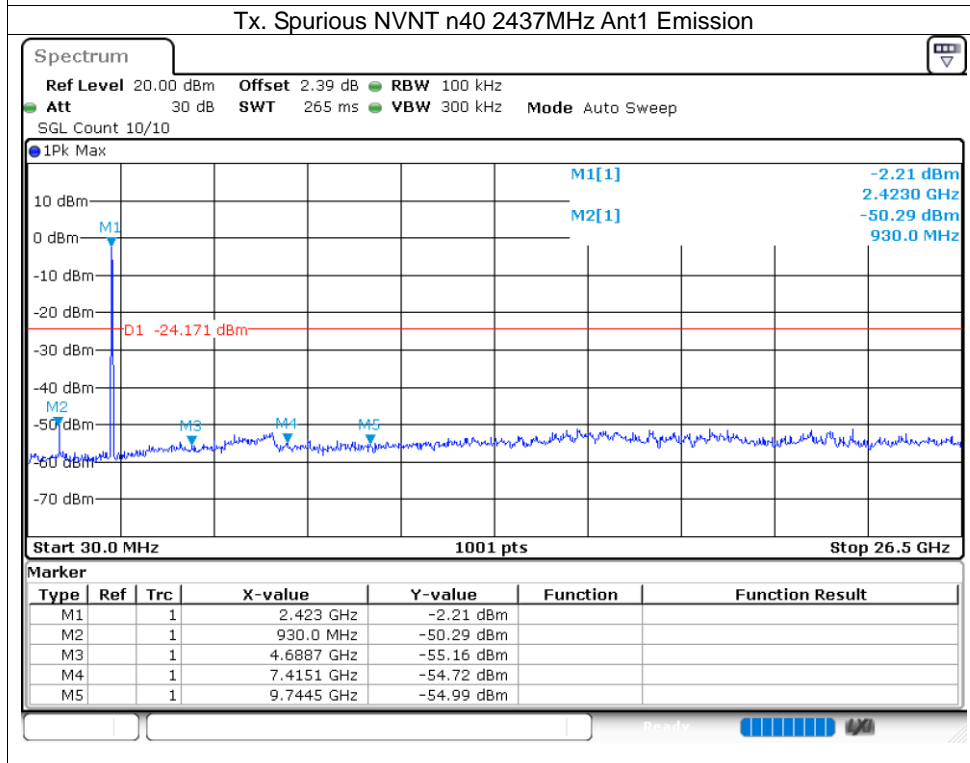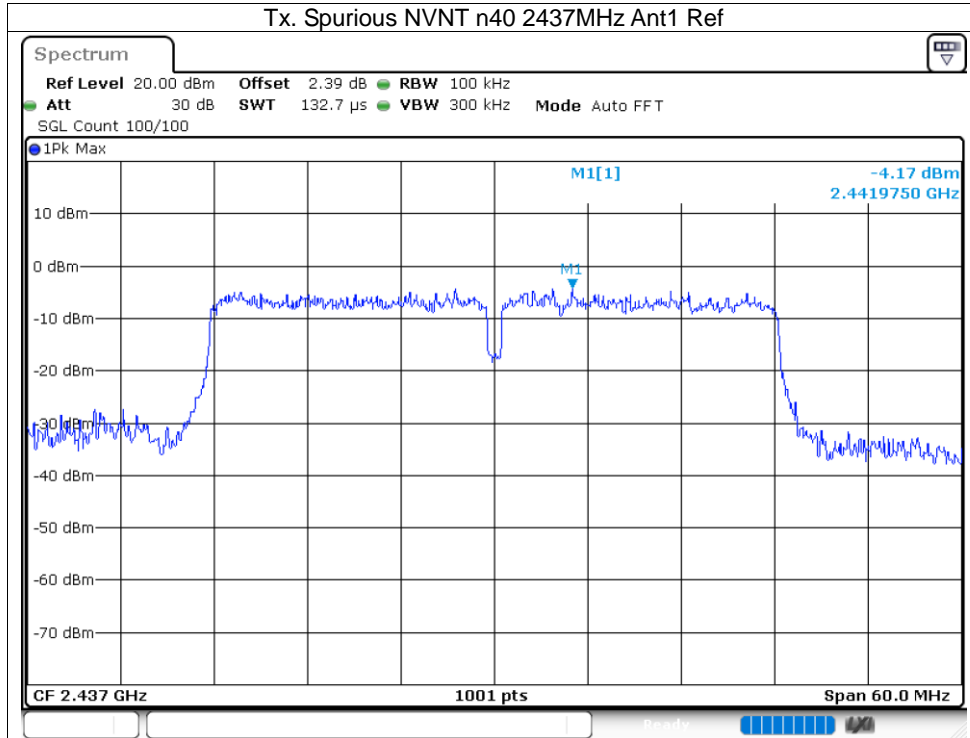

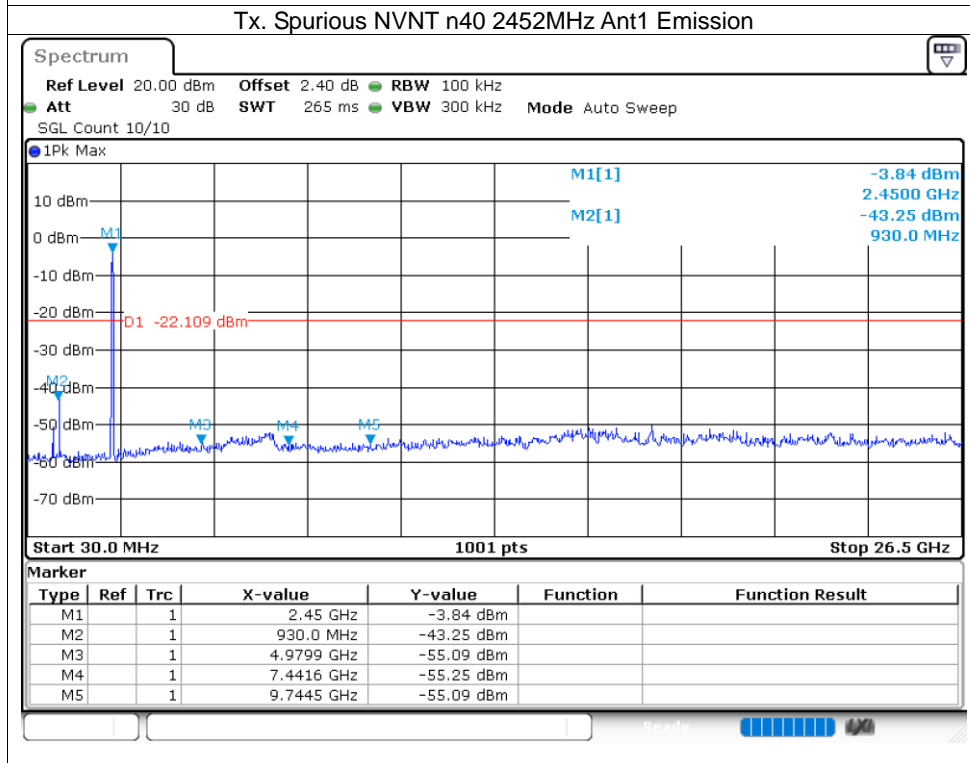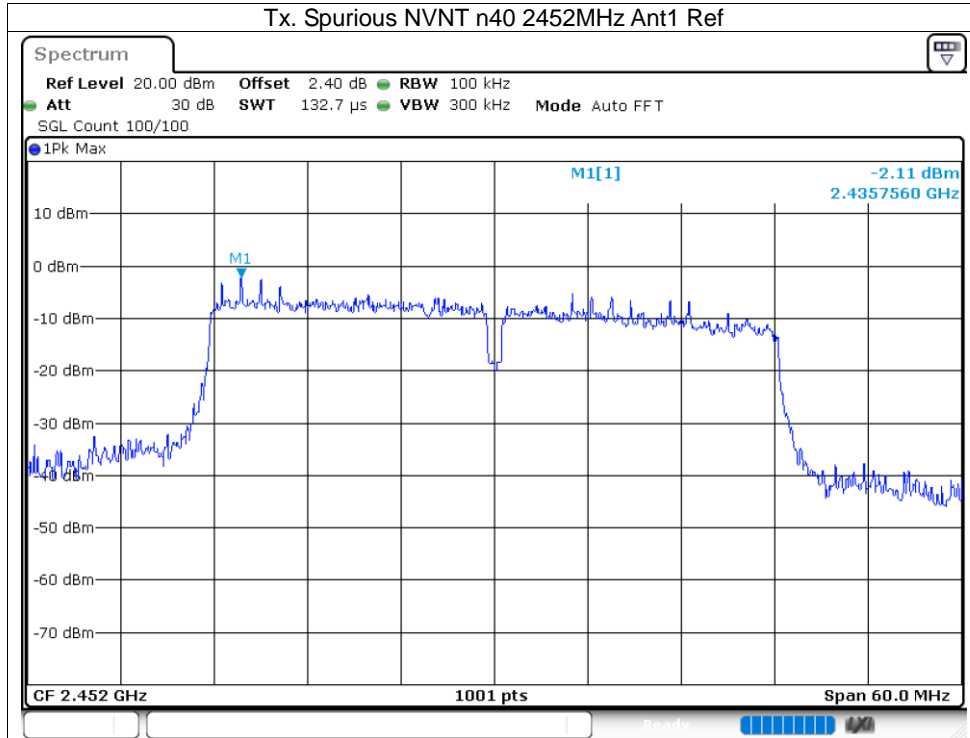

END OF REPORT