



# FCC Radio Test Report

## FCC ID: 2ARNB-HMWB01


This report concerns: Original Grant

**Project No.** : 2405G010  
**Equipment** : Wi-Fi and Bluetooth Module  
**Brand Name** :   
Hoymiles,  
**Test Model** : HM-WB01  
**Series Model** : N/A  
**Applicant** : Hoymiles Power Electronics Inc.  
**Address** : No. 18 Kangjing Road, Hangzhou, Zhejiang Province, P.R. China  
**Manufacturer** : Hoymiles Power Electronics Inc.  
**Address** : No. 18 Kangjing Road, Hangzhou, Zhejiang Province, P.R. China  
**Factory** : FN-LINK TECHNOLOGY LIMITED  
**Address** : No.8, Litong RD., Liuyang Economic & Technical Development Zone, Changsha, CHINA  
**Date of Receipt** : Jun. 12, 2024  
**Date of Test** : Jun. 14, 2024 ~ Jul. 02, 2024  
**Issued Date** : Aug. 22, 2024  
**Report Version** : R00  
**Test Sample** : Engineering Sample No.: SSL2024061259 for conducted & radiated emissions - below 30MHz & power, SSL2024061263 for others.  
**Standard(s)** : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

**Prepared by** :


:



Evan Yang

**Approved by** :

:



Chay Cai

Room 108, Building 2, No.1, Yile Road, Songshan Lake Zone, Dongguan City, Guangdong, People's Republic of China.

Tel: +86-769-8318-3000

Web: [www.newbtl.com](http://www.newbtl.com)

Service mail: [btl\\_qa@newbtl.com](mailto:btl_qa@newbtl.com)

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

| <b>Table of Contents</b>                                     | <b>Page</b> |
|--------------------------------------------------------------|-------------|
| <b>REPORT ISSUED HISTORY</b>                                 | <b>6</b>    |
| <b>1 . APPLICABLE STANDARDS</b>                              | <b>7</b>    |
| <b>2 . SUMMARY OF TEST RESULTS</b>                           | <b>7</b>    |
| 2.1 TEST FACILITY                                            | 8           |
| 2.2 MEASUREMENT UNCERTAINTY                                  | 8           |
| 2.3 TEST ENVIRONMENT CONDITIONS                              | 9           |
| <b>3 . GENERAL INFORMATION</b>                               | <b>10</b>   |
| 3.1 GENERAL DESCRIPTION OF EUT                               | 10          |
| 3.2 DESCRIPTION OF TEST MODES                                | 11          |
| 3.3 PARAMETERS OF TEST SOFTWARE                              | 13          |
| 3.4 DUTY CYCLE                                               | 14          |
| 3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 16          |
| 3.6 SUPPORT UNITS                                            | 16          |
| 3.7 CUSTOMER INFORMATION DESCRIPTION                         | 16          |
| <b>4 . AC POWER LINE CONDUCTED EMISSIONS</b>                 | <b>17</b>   |
| 4.1 LIMIT                                                    | 17          |
| 4.2 TEST PROCEDURE                                           | 17          |
| 4.3 DEVIATION FROM TEST STANDARD                             | 17          |
| 4.4 TEST SETUP                                               | 17          |
| 4.5 EUT OPERATION CONDITIONS                                 | 18          |
| 4.6 TEST RESULTS                                             | 18          |
| <b>5 . RADIATED EMISSIONS</b>                                | <b>19</b>   |
| 5.1 LIMIT                                                    | 19          |
| 5.2 TEST PROCEDURE                                           | 20          |
| 5.3 DEVIATION FROM TEST STANDARD                             | 20          |
| 5.4 TEST SETUP                                               | 21          |
| 5.5 EUT OPERATION CONDITIONS                                 | 23          |
| 5.6 TEST RESULTS - 9 KHZ TO 30 MHZ                           | 23          |
| 5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ                        | 23          |
| 5.8 TEST RESULTS - ABOVE 1000 MHZ                            | 23          |
| <b>6 . BANDWIDTH</b>                                         | <b>24</b>   |
| 6.1 LIMIT                                                    | 24          |
| 6.2 TEST PROCEDURE                                           | 24          |

| <b>Table of Contents</b>                                   | <b>Page</b> |
|------------------------------------------------------------|-------------|
| 6.3 DEVIATION FROM STANDARD                                | 24          |
| 6.4 TEST SETUP                                             | 24          |
| 6.5 EUT OPERATION CONDITIONS                               | 24          |
| 6.6 TEST RESULTS                                           | 24          |
| <b>7 . MAXIMUM OUTPUT POWER</b>                            | <b>25</b>   |
| 7.1 LIMIT                                                  | 25          |
| 7.2 TEST PROCEDURE                                         | 25          |
| 7.3 DEVIATION FROM STANDARD                                | 25          |
| 7.4 TEST SETUP                                             | 25          |
| 7.5 EUT OPERATION CONDITIONS                               | 25          |
| 7.6 TEST RESULTS                                           | 25          |
| <b>8 . CONDUCTED SPURIOUS EMISSIONS</b>                    | <b>26</b>   |
| 8.1 LIMIT                                                  | 26          |
| 8.2 TEST PROCEDURE                                         | 26          |
| 8.3 DEVIATION FROM STANDARD                                | 26          |
| 8.4 TEST SETUP                                             | 26          |
| 8.5 EUT OPERATION CONDITIONS                               | 26          |
| 8.6 TEST RESULTS                                           | 26          |
| <b>9 . POWER SPECTRAL DENSITY</b>                          | <b>27</b>   |
| 9.1 LIMIT                                                  | 27          |
| 9.2 TEST PROCEDURE                                         | 27          |
| 9.3 DEVIATION FROM STANDARD                                | 27          |
| 9.4 TEST SETUP                                             | 27          |
| 9.5 EUT OPERATION CONDITIONS                               | 27          |
| 9.6 TEST RESULTS                                           | 27          |
| <b>10 . MEASUREMENT INSTRUMENTS LIST</b>                   | <b>28</b>   |
| <b>11 . EUT TEST PHOTO</b>                                 | <b>30</b>   |
| <b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>      | <b>37</b>   |
| <b>APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ</b>    | <b>40</b>   |
| <b>APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ</b> | <b>45</b>   |
| <b>APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ</b>      | <b>48</b>   |
| <b>APPENDIX E - BANDWIDTH</b>                              | <b>81</b>   |
| <b>APPENDIX F - MAXIMUM OUTPUT POWER</b>                   | <b>87</b>   |

**Table of Contents****Page****APPENDIX G - CONDUCTED SPURIOUS EMISSIONS****89****APPENDIX H - POWER SPECTRAL DENSITY****95**

**REPORT ISSUED HISTORY**

| Report No.          | Version | Description      | Issued Date   | Note  |
|---------------------|---------|------------------|---------------|-------|
| BTL-FCCP-2-2405G010 | R00     | Original Report. | Aug. 22, 2024 | Valid |

## 1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 558074 D01 15.247 Meas Guidance v05r02

## 2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| FCC CFR Title 47, Part 15, Subpart C |                                   |                                        |          |         |
|--------------------------------------|-----------------------------------|----------------------------------------|----------|---------|
| Standard(s) Section                  | Test Item                         | Test Result                            | Judgment | Remark  |
| 15.207                               | AC Power Line Conducted Emissions | APPENDIX A                             | PASS     | -----   |
| 15.247(d)<br>15.205(a)<br>15.209(a)  | Radiated Emissions                | APPENDIX B<br>APPENDIX C<br>APPENDIX D | PASS     | -----   |
| 15.247(a)(2)                         | Bandwidth                         | APPENDIX E                             | PASS     | -----   |
| 15.247(b)(3)                         | Maximum Output Power              | APPENDIX F                             | PASS     | -----   |
| 15.247(d)                            | Conducted Spurious Emissions      | APPENDIX G                             | PASS     | -----   |
| 15.247(e)                            | Power Spectral Density            | APPENDIX H                             | PASS     | -----   |
| 15.203                               | Antenna Requirement               | -----                                  | PASS     | Note(2) |

Note:

(1) "N/A" denotes test is not applicable in this test report.

(2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan City, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

## 2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

### A. AC power line conducted emissions test:

| Test Site | Method | Measurement Frequency Range | U,(dB) |
|-----------|--------|-----------------------------|--------|
| DG-C02    | CISPR  | 150kHz ~ 30MHz              | 2.88   |

### B. Radiated emissions test:

| Test Site | Method | Measurement Frequency Range | U,(dB) |
|-----------|--------|-----------------------------|--------|
| DG-CB01   | CISPR  | 9kHz ~ 30MHz                | 2.36   |

| Test Site       | Method | Measurement Frequency Range | Ant.<br>H / V | U,(dB) |
|-----------------|--------|-----------------------------|---------------|--------|
| DG-CB03<br>(3m) | CISPR  | 30MHz ~ 200MHz              | V             | 4.40   |
|                 |        | 30MHz ~ 200MHz              | H             | 3.62   |
|                 |        | 200MHz ~ 1,000MHz           | V             | 4.58   |
|                 |        | 200MHz ~ 1,000MHz           | H             | 3.98   |

| Test Site       | Method | Measurement Frequency Range | U,(dB) |
|-----------------|--------|-----------------------------|--------|
| DG-CB03<br>(3m) | CISPR  | 1GHz ~ 6GHz                 | 4.08   |
|                 |        | 6GHz ~ 18GHz                | 4.62   |

| Test Site       | Method | Measurement Frequency Range | U,(dB) |
|-----------------|--------|-----------------------------|--------|
| DG-CB03<br>(1m) | CISPR  | 18 ~ 26.5 GHz               | 3.36   |

### C. Other Measurement:

| Test Item                   | Uncertainty |
|-----------------------------|-------------|
| Bandwidth                   | 0.90 %      |
| Maximum Output Power        | 1.3 dB      |
| Conducted Spurious Emission | 1.9 dB      |
| Power Spectral Density      | 1.4 dB      |
| Temperature                 | 0.8 °C      |
| Humidity                    | 2.2 %       |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

## 2.3 TEST ENVIRONMENT CONDITIONS

| Test Item                               | Temperature | Humidity | Test Voltage | Tested By   | Test Date     |
|-----------------------------------------|-------------|----------|--------------|-------------|---------------|
| AC Power Line<br>Conducted Emissions    | 25°C        | 46%      | AC 120V/60Hz | Hayden Chen | Jun. 21, 2024 |
| Radiated Emissions<br>-9kHz to 30 MHz   | 21°C        | 50%      | DC 5V        | Hayden Chen | Jun. 24, 2024 |
| Radiated Emissions<br>-30MHz to 1000MHz | 24°C        | 56%      | DC 5V        | Jensen Zhou | Jun. 26, 2024 |
| Radiated Emissions<br>-Above 1000MHz    | 25°C        | 60%      | DC 5V        | Allen Tong  | Jul. 02, 2024 |
| Bandwidth                               | 19°C        | 45%      | DC 5V        | Arvin Tong  | Jun. 24, 2024 |
| Maximum Output Power                    | 23°C        | 56%      | DC 5V        | Oliver Wang | Jun. 21, 2024 |
| Conducted Spurious<br>Emissions         | 19°C        | 45%      | DC 5V        | Arvin Tong  | Jun. 24, 2024 |
| Power Spectral Density                  | 19°C        | 45%      | DC 5V        | Arvin Tong  | Jun. 24, 2024 |

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

|                         |                                                                                                                                              |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment               | Wi-Fi and Bluetooth Module                                                                                                                   |
| Brand Name              | <br>Hoymiles,                                               |
| Test Model              | HM-WB01                                                                                                                                      |
| Series Model            | N/A                                                                                                                                          |
| Model Difference(s)     | N/A                                                                                                                                          |
| Software Version        | N/A                                                                                                                                          |
| Hardware Version        | N/A                                                                                                                                          |
| Power Source            | DC voltage supplied from external power supply.                                                                                              |
| Power Rating            | DC 3.3V                                                                                                                                      |
| Operation Frequency     | 2412 MHz ~ 2462 MHz                                                                                                                          |
| Modulation Type         | IEEE 802.11b: DSSS<br>IEEE 802.11g: OFDM<br>IEEE 802.11n: OFDM<br>IEEE 802.11ax: OFDMA                                                       |
| Bit Rate of Transmitter | IEEE 802.11b: 11/5.5/2/1 Mbps<br>IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps<br>IEEE 802.11n: up to 150 Mbps<br>IEEE 802.11ax: up to 143.4 Mbps |
| Maximum Output Power    | IEEE 802.11b: 18.19 dBm (0.0659 W)                                                                                                           |

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

#### 2. Channel List:

| CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20), IEEE 802.11ax(HE20) |                 |         |                 |         |                 |         |                 |
|-------------------------------------------------------------------------------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| CH03 - CH09 for IEEE 802.11n(HT40)                                                  |                 |         |                 |         |                 |         |                 |
| Channel                                                                             | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01                                                                                  | 2412            | 04      | 2427            | 07      | 2442            | 10      | 2457            |
| 02                                                                                  | 2417            | 05      | 2432            | 08      | 2447            | 11      | 2462            |
| 03                                                                                  | 2422            | 06      | 2437            | 09      | 2452            |         |                 |

#### 3. Table for Filed Antenna:

| Brand                                             | P/N      | Antenna Type | Connector     | Gain (dBi) |
|---------------------------------------------------|----------|--------------|---------------|------------|
| Wutong Holding Group Co., Ltd                     | A6040312 | Whip         | IPEX MHF Plug | 4.57       |
| DONGGUAN CITY SLEing INTEL-TECH CO., LTD          | A6040284 | Whip         | MHF           | -0.89      |
| DONGGUAN SLEing INTEL-TECH CO., LTD               | A6040433 | Whip         | MHF           | -1.05      |
| DONGGUAN SLEing INTEL-TECH CO., LTD               | A6040436 | Dipole       | MHF           | 3.06       |
| Kunshan Innwave Communication Technology Co.,Ltd. | A6040457 | Whip         | IPEX          | 3.16       |

### 3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

| Pretest Mode | Description                       |
|--------------|-----------------------------------|
| Mode 1       | TX B Mode Channel 01/06/11        |
| Mode 2       | TX G Mode Channel 01/06/11        |
| Mode 3       | TX N(HT20) Mode Channel 01/06/11  |
| Mode 4       | TX N(HT40) Mode Channel 03/06/09  |
| Mode 5       | TX AX(HE20) Mode Channel 01/06/11 |
| Mode 6       | TX B Mode Channel 11              |

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

| AC power line conducted emissions test |                      |
|----------------------------------------|----------------------|
| Final Test Mode                        | Description          |
| Mode 6                                 | TX B Mode Channel 11 |

| Radiated emissions test - Below 1GHz |                      |
|--------------------------------------|----------------------|
| Final Test Mode                      | Description          |
| Mode 6                               | TX B Mode Channel 11 |

| Radiated emissions test- Above 1GHz |                                   |
|-------------------------------------|-----------------------------------|
| Final Test Mode                     | Description                       |
| Mode 1                              | TX B Mode Channel 01/06/11        |
| Mode 2                              | TX G Mode Channel 01/06/11        |
| Mode 3                              | TX N(HT20) Mode Channel 01/06/11  |
| Mode 4                              | TX N(HT40) Mode Channel 03/06/09  |
| Mode 5                              | TX AX(HE20) Mode Channel 01/06/11 |

| Conducted test  |                                   |
|-----------------|-----------------------------------|
| Final Test Mode | Description                       |
| Mode 1          | TX B Mode Channel 01/06/11        |
| Mode 2          | TX G Mode Channel 01/06/11        |
| Mode 3          | TX N(HT20) Mode Channel 01/06/11  |
| Mode 4          | TX N(HT40) Mode Channel 03/06/09  |
| Mode 5          | TX AX(HE20) Mode Channel 01/06/11 |

**NOTE:**

- (1) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (2) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX B Mode Channel 11 is found to be the worst case and recorded.
- (3) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (4) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (5) EUT collocates with five kinds of antenna, and the antenna type is the same. Found the highest gain: 4.57 dBi antenna (P/N: A6040312) to test.
- (6) For radiated spurious emissions above 1 GHz test, the vertical and horizontal are tested and only record the worst case.


### 3.3 PARAMETERS OF TEST SOFTWARE

| Test Software Version | RDTool_V1.0.0.0 |      |      |
|-----------------------|-----------------|------|------|
| Frequency (MHz)       | 2412            | 2437 | 2462 |
| IEEE 802.11b          | 58              | 62   | 68   |
| IEEE 802.11g          | -30             | -27  | -24  |
| IEEE 802.11n(HT20)    | -40             | -38  | -35  |
| IEEE 802.11ax(HE20)   | -8              | 7    | 10   |
| Frequency (MHz)       | 2422            | 2437 | 2452 |
| IEEE 802.11n(HT40)    | -29             | -24  | -22  |

## 3.4 DUTY CYCLE

If duty cycle is  $\geq 98\%$ , duty factor is not required.  
 If duty cycle is  $< 98\%$ , duty factor shall be considered.  
 The output power = measured power + duty factor.


IEEE 802.11b

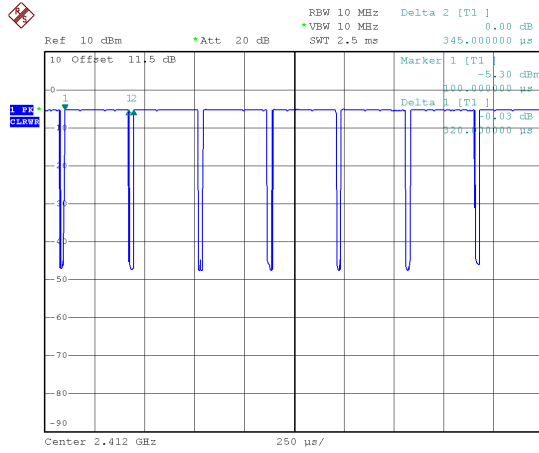

Date: 24.JUN.2024 16:59:52

Duty cycle = 0.320 ms / 0.345 ms = 92.75%  
 Duty Factor =  $10 \log(1/\text{Duty cycle}) = 0.33$


IEEE 802.11g

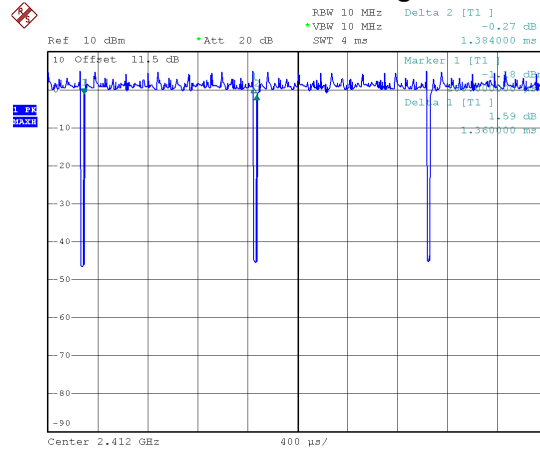

Date: 24.JUN.2024 17:02:51

Duty cycle = 1.360 ms / 1.384 ms = 98.27%  
 Duty Factor =  $10 \log(1/\text{Duty cycle}) = 0.00$


IEEE 802.11n(HT20)

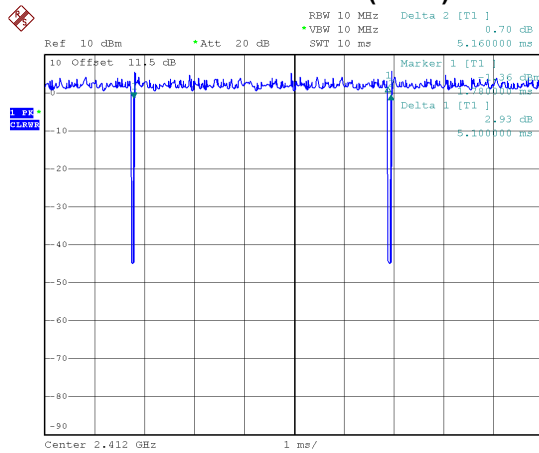

Date: 24.JUN.2024 17:05:42

Duty cycle = 5.100 ms / 5.160 ms = 98.84%  
 Duty Factor =  $10 \log(1/\text{Duty cycle}) = 0.00$


IEEE 802.11n(HT40)

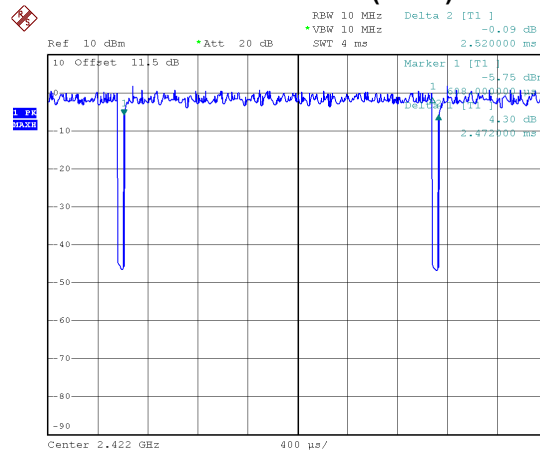

Date: 24.JUN.2024 17:07:42

Duty cycle = 2.472 ms / 2.520 ms = 98.10%  
 Duty Factor =  $10 \log(1/\text{Duty cycle}) = 0.00$

## IEEE 802.11ax(HE20)

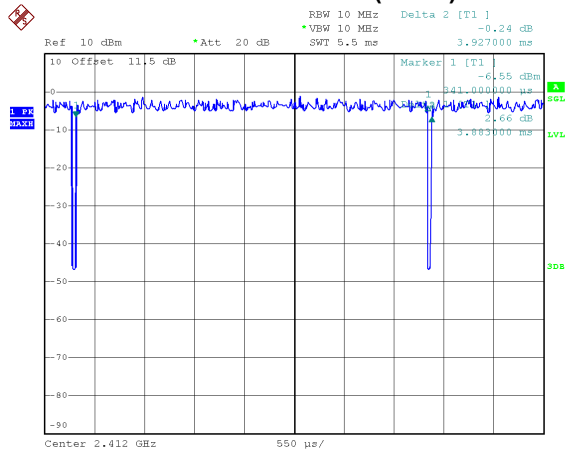

Date: 24.JUN.2024 17:15:21

Duty cycle = 3.883 ms / 3.927 ms = 98.88%  
 Duty Factor =  $10 \log(1/\text{Duty cycle}) = 0.00$

### NOTE:

For IEEE 802.11b:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3125 Hz.

For IEEE 802.11g:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.


For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz.

For IEEE 802.11ax(HE20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

### 3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

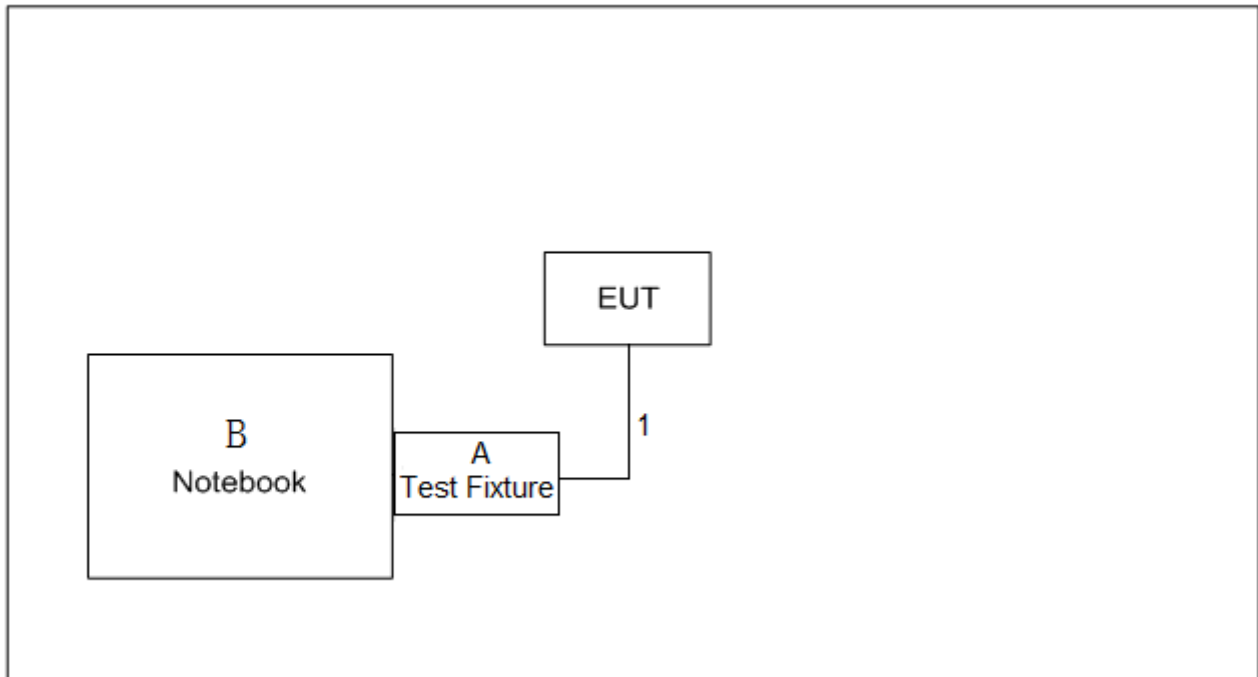

### 3.6 SUPPORT UNITS

For Radiated Emissions-9 kHz to 30 MHz:

| Item | Equipment    | Brand  | Model No.     | Series No. |
|------|--------------|--------|---------------|------------|
| A    | Test Fixture | N/A    | N/A           | N/A        |
| B    | Notebook     | HUAWEI | magicBook2019 | N/A        |

For Radiated Emissions-30 MHz to 1000 MHz:

| Item | Equipment    | Brand | Model No.  | Series No. |
|------|--------------|-------|------------|------------|
| A    | Test Fixture | N/A   | N/A        | N/A        |
| B    | Notebook     | HONOR | NBLK-WAX9X | N/A        |

For Radiated Emissions-Above 1000 MHz:

| Item | Equipment    | Brand  | Model No. | Series No. |
|------|--------------|--------|-----------|------------|
| A    | Test Fixture | N/A    | N/A       | N/A        |
| B    | Notebook     | Lenovo | Pro 13    | N/A        |

| Item | Cable Type | Shielded Type | Ferrite Core | Length |
|------|------------|---------------|--------------|--------|
| 1    | Data Cable | NO            | NO           | 0.1m   |

### 3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain and beamforming gain are provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

## 4. AC POWER LINE CONDUCTED EMISSIONS

### 4.1 LIMIT

| Frequency of Emission (MHz) | Limit (dB $\mu$ V) |           |
|-----------------------------|--------------------|-----------|
|                             | Quasi-peak         | Average   |
| 0.15 - 0.5                  | 66 to 56*          | 56 to 46* |
| 0.5 - 5.0                   | 56                 | 46        |
| 5.0 - 30.0                  | 60                 | 50        |

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

### 4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

| Receiver Parameters | Setting  |
|---------------------|----------|
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

### 4.3 DEVIATION FROM TEST STANDARD

No deviation.

### 4.4 TEST SETUP

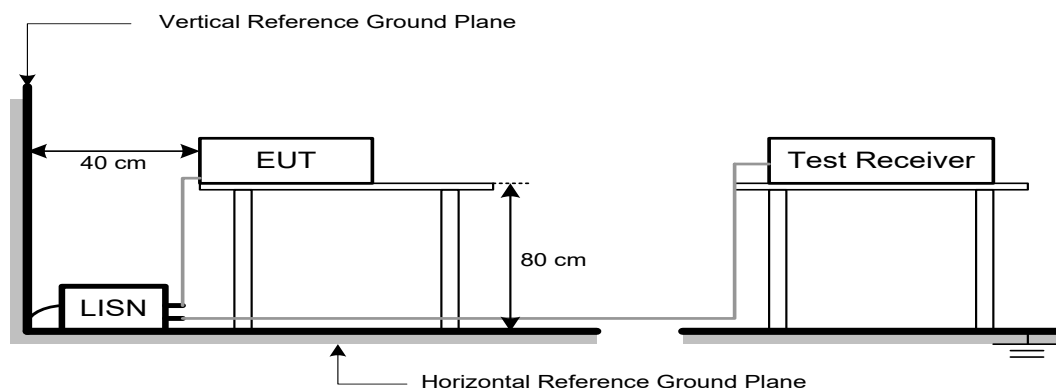

**4.5 EUT OPERATION CONDITIONS**

EUT was programmed to be in continuously transmitting mode.

**4.6 TEST RESULTS**

Please refer to the APPENDIX A.

## 5. RADIATED EMISSIONS

### 5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                           |
| 0.490-1.705     | 24000/F(kHz)                      | 30                            |
| 1.705-30.0      | 30                                | 30                            |
| 30-88           | 100                               | 3                             |
| 88-216          | 150                               | 3                             |
| 216-960         | 200                               | 3                             |
| Above 960       | 500                               | 3                             |

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

| Frequency (MHz) | Band edge/ Harmonic at 3m (dBμV/m) |         | Harmonic at 1m (dBμV/m) |               |
|-----------------|------------------------------------|---------|-------------------------|---------------|
|                 | Peak                               | Average | Peak                    | Average       |
| Above 1000      | 74                                 | 54      | 83.5 (Note 4)           | 63.5 (Note 4) |

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

20log (d<sub>limit</sub>/d<sub>measure</sub>)=20log (3/1)=9.5 dB.

FS<sub>limit</sub>: Harmonic at 3m Peak and Average limit.

FS<sub>max</sub>: Harmonic at 1m Peak and Average Maximum value.

d<sub>limit</sub>: Harmonic at 3m test distance.

d<sub>measure</sub>: Harmonic Actual test distance.

## 5.2 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.  
(below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:

| Spectrum Parameters    | Setting                         |
|------------------------|---------------------------------|
| Start ~ Stop Frequency | 9 kHz~150 kHz for RBW 200 Hz    |
| Start ~ Stop Frequency | 0.15 MHz~30 MHz for RBW 9 kHz   |
| Start ~ Stop Frequency | 30 MHz~1000 MHz for RBW 100 kHz |

| Spectrum Parameters                        | Setting                                                    |
|--------------------------------------------|------------------------------------------------------------|
| Start Frequency                            | 1000 MHz                                                   |
| Stop Frequency                             | 10th carrier harmonic                                      |
| RBW / VBW<br>(Emission in restricted band) | 1 MHz / 3 MHz for PK value<br>1 MHz / 1/T Hz for AVG value |


| Receiver Parameters    | Setting                             |
|------------------------|-------------------------------------|
| Start ~ Stop Frequency | 9 kHz~90 kHz for PK/AVG detector    |
| Start ~ Stop Frequency | 90 kHz~110 kHz for QP detector      |
| Start ~ Stop Frequency | 110 kHz~490 kHz for PK/AVG detector |
| Start ~ Stop Frequency | 490 kHz~30 MHz for QP detector      |
| Start ~ Stop Frequency | 30 MHz~1000 MHz for QP detector     |
| Start ~ Stop Frequency | 1 GHz~26.5 GHz for PK/AVG detector  |

## 5.3 DEVIATION FROM TEST STANDARD


No deviation.

## 5.4 TEST SETUP


9 kHz to 30 MHz

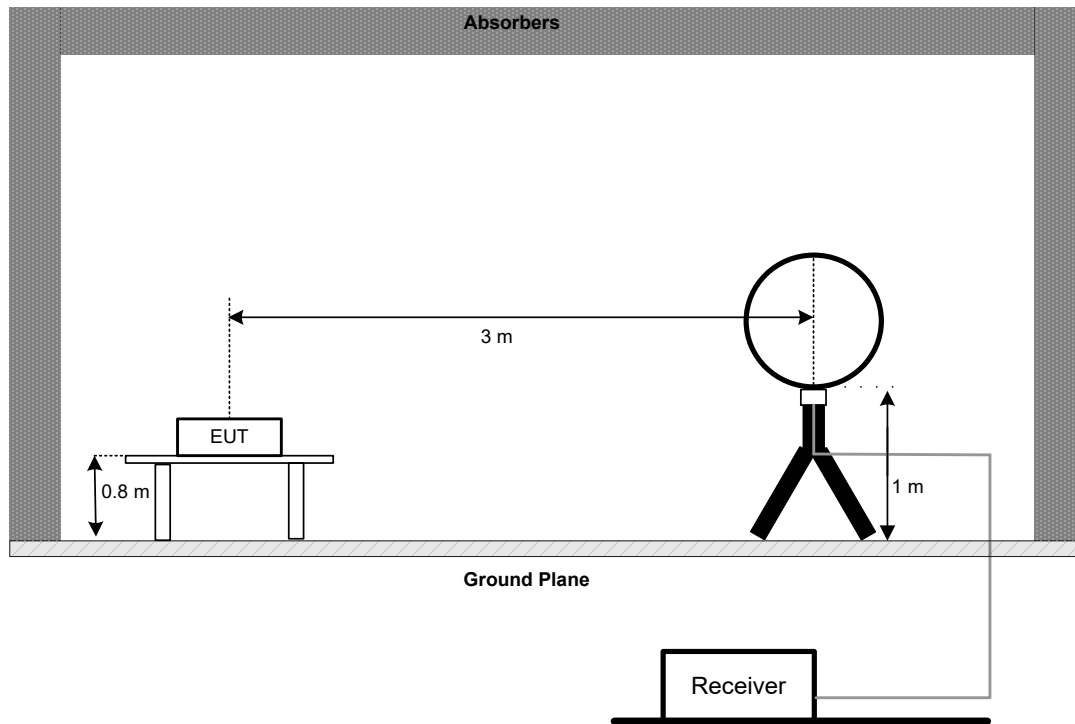


30 MHz to 1 GHz

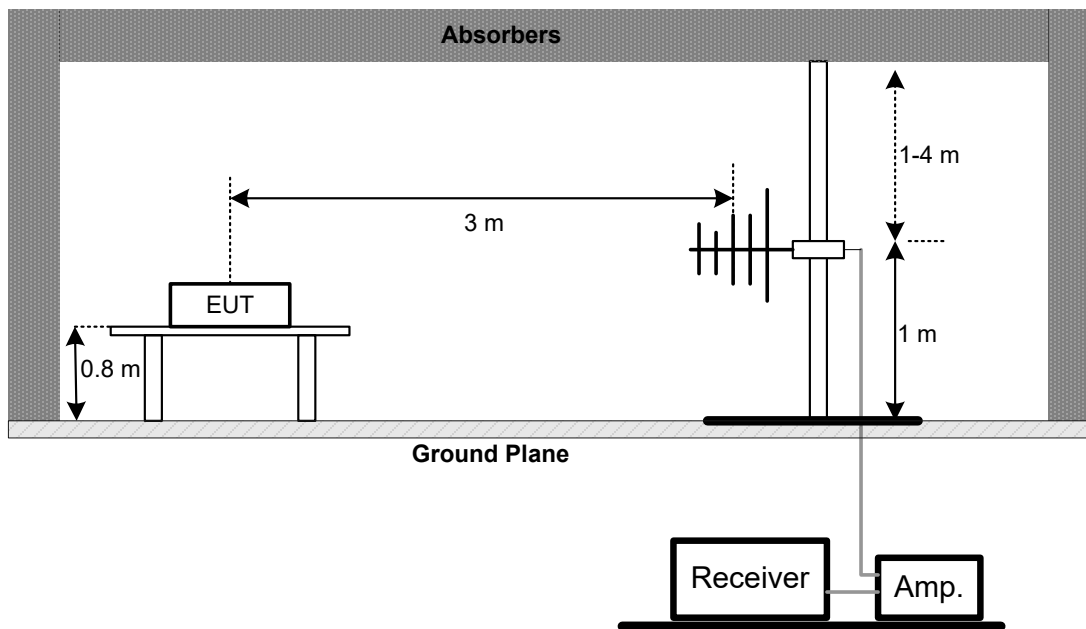

## Above 1 GHz Band edge & Harmonic(1 GHz to 18 GHz)

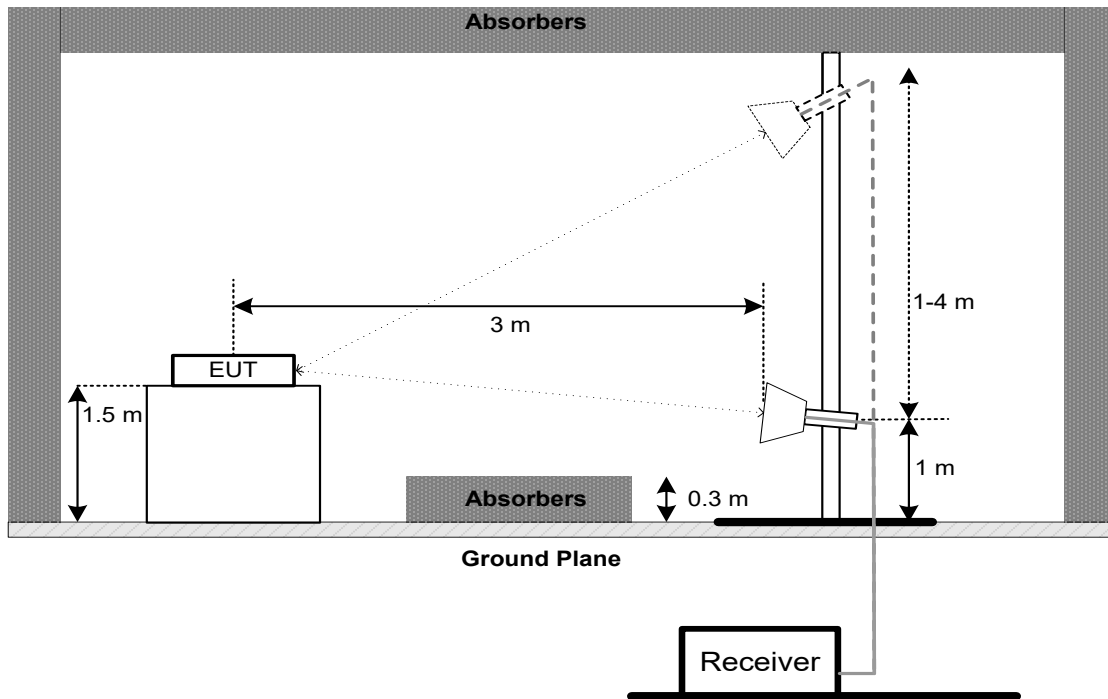

## Harmonic(18 GHz to 26.5 GHz)

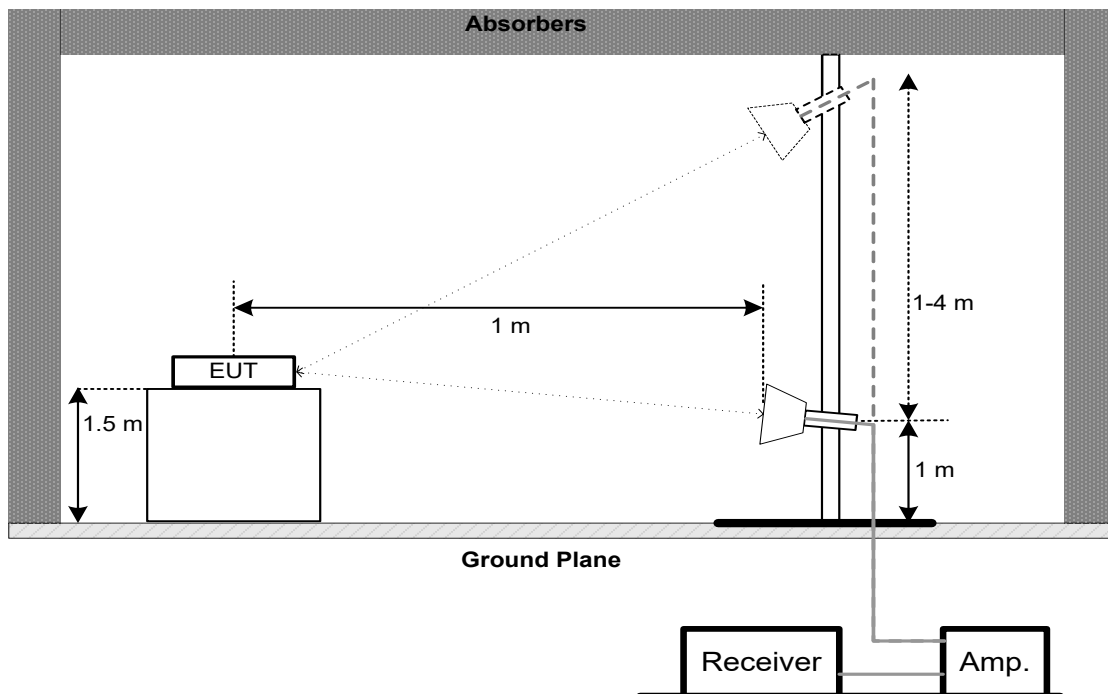

**5.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**5.6 TEST RESULTS - 9 KHZ TO 30 MHZ**

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

**5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ**

Please refer to the APPENDIX C.

**5.8 TEST RESULTS - ABOVE 1000 MHZ**

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 6. BANDWIDTH

### 6.1 LIMIT

| Section          | Test Item              | Limit           |
|------------------|------------------------|-----------------|
| FCC 15.247(a)(2) | 6 dB Bandwidth         | Minimum 500 kHz |
|                  | 99% Emission Bandwidth | -               |

### 6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

| Spectrum Parameters | Setting                 |
|---------------------|-------------------------|
| Span Frequency      | > Measurement Bandwidth |
| RBW                 | 100 kHz                 |
| VBW                 | 300 kHz                 |
| Detector            | Peak                    |
| Trace               | Max Hold                |
| Sweep Time          | Auto                    |

For 99% Emission Bandwidth:

| Spectrum Parameters | Setting                                 |
|---------------------|-----------------------------------------|
| Span Frequency      | Between 1.5 times and 5.0 times the OBW |
| RBW                 | 300 kHz For 20MHz<br>1 MHz For 40MHz    |
| VBW                 | 1 MHz For 20MHz<br>3 MHz For 40MHz      |
| Detector            | Peak                                    |
| Trace               | Max Hold                                |
| Sweep Time          | Auto                                    |

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 6.6 TEST RESULTS

Please refer to the APPENDIX E.

## 7. MAXIMUM OUTPUT POWER

### 7.1 LIMIT

| Section          | Test Item            | Limit                    |
|------------------|----------------------|--------------------------|
| FCC 15.247(b)(3) | Maximum Output Power | 1.0000 Watt or 30.00 dBm |


### 7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.2.3.1 (for AVG power) of ANSI C63.10-2013.

### 7.3 DEVIATION FROM STANDARD

No deviation.

### 7.4 TEST SETUP

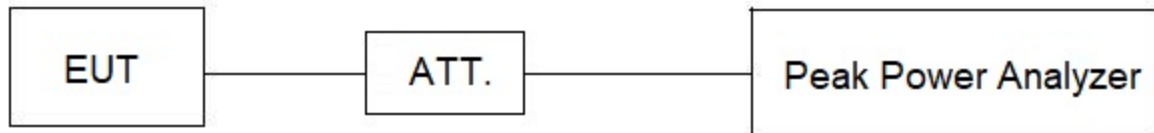

### 7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 7.6 TEST RESULTS

Please refer to the APPENDIX F.

## 8. CONDUCTED SPURIOUS EMISSIONS

### 8.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

### 8.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

| Spectrum Parameters | Setting  |
|---------------------|----------|
| Start Frequency     | 30 MHz   |
| Stop Frequency      | 26.5 GHz |
| RBW                 | 100 kHz  |
| VBW                 | 300 kHz  |
| Detector            | Peak     |
| Trace               | Max Hold |
| Sweep Time          | Auto     |

### 8.3 DEVIATION FROM STANDARD

No deviation.

### 8.4 TEST SETUP

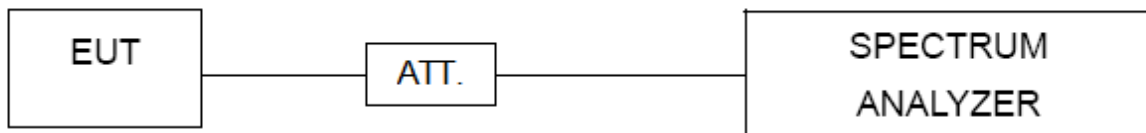

### 8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 8.6 TEST RESULTS

Please refer to the APPENDIX G.

## 9. POWER SPECTRAL DENSITY

### 9.1 LIMIT

| Section       | Test Item              | Limit                   |
|---------------|------------------------|-------------------------|
| FCC 15.247(e) | Power Spectral Density | 8 dBm<br>(in any 3 kHz) |

### 9.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

| Spectrum Parameters | Setting                           |
|---------------------|-----------------------------------|
| Span Frequency      | 25 MHz (20 MHz) / 60 MHz (40 MHz) |
| RBW                 | 3 kHz                             |
| VBW                 | 10 kHz                            |
| Detector            | Peak                              |
| Trace               | Max Hold                          |
| Sweep Time          | Auto                              |

### 9.3 DEVIATION FROM STANDARD

No deviation.

### 9.4 TEST SETUP

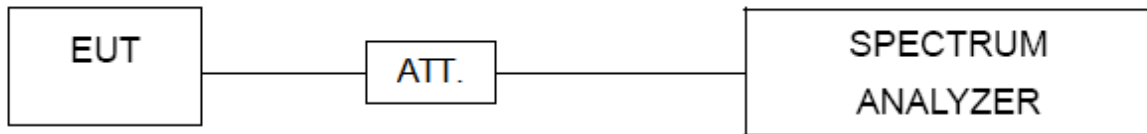

### 9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 9.6 TEST RESULTS

Please refer to the APPENDIX H.

## 10. MEASUREMENT INSTRUMENTS LIST

| AC Power Line Conducted Emissions |                      |              |                          |            |                  |
|-----------------------------------|----------------------|--------------|--------------------------|------------|------------------|
| Item                              | Kind of Equipment    | Manufacturer | Type No.                 | Serial No. | Calibrated until |
| 1                                 | EMI TEST RECEIVER    | R&S          | ESCI                     | 100382     | Dec. 22, 2024    |
| 2                                 | TWO-LINE V-NETWORK   | R&S          | ENV216                   | 101447     | Dec. 22, 2024    |
| 3                                 | Measurement Software | Farad        | EZ-EMC<br>Ver.NB-03A1-01 | N/A        | N/A              |
| 4                                 | Cable                | N/A          | SFT205-NMNM-9M<br>-001   | 9M         | Nov. 27, 2024    |
| 5                                 | 643 Shield Room      | ETS          | 6*4*3                    | N/A        | N/A              |

| Radiated Emissions - 9 kHz to 30 MHz |                      |              |                           |               |                  |
|--------------------------------------|----------------------|--------------|---------------------------|---------------|------------------|
| Item                                 | Kind of Equipment    | Manufacturer | Type No.                  | Serial No.    | Calibrated until |
| 1                                    | Active Loop Antenna  | Schwarzbeck  | FMZB 1513-60B             | 1513-60 B-034 | Mar. 30, 2025    |
| 2                                    | MXE EMI Receiver     | Keysight     | N9038A                    | MY56400091    | Dec. 22, 2024    |
| 3                                    | Cable                | N/A          | RW2350-3.8A-NMB<br>M-1.5M | N/A           | Jun. 09, 2025    |
| 4                                    | Cable                | N/A          | RG 213/U                  | N/A           | Jun. 09, 2025    |
| 5                                    | Measurement Software | Farad        | EZ-EMC<br>Ver.NB-03A1-01  | N/A           | N/A              |
| 6                                    | 966 Chamber room     | ETS          | 9*6*6                     | N/A           | Jul. 11, 2024    |

| Radiated Emissions - 30 MHz to 1 GHz |                          |                |                          |            |                  |
|--------------------------------------|--------------------------|----------------|--------------------------|------------|------------------|
| Item                                 | Kind of Equipment        | Manufacturer   | Type No.                 | Serial No. | Calibrated until |
| 1                                    | Trilog-Broadband Antenna | Schwarzbeck    | VULB 9168                | 1462       | Dec. 13, 2024    |
| 2                                    | Attenuator               | EMC INSTRUMENT | EMCI-N-6-06              | AT-06009   | Dec. 13, 2024    |
| 3                                    | Preamplifier             | EMC INSTRUMENT | EMC001330                | 980863     | Apr. 07, 2025    |
| 4                                    | Cable                    | RegalWay       | LMR400-NMNM-12<br>.5m    | N/A        | Jul. 04, 2024    |
| 5                                    | Cable                    | RegalWay       | LMR400-NMNM-3<br>m       | N/A        | Jul. 04, 2024    |
| 6                                    | Cable                    | RegalWay       | LMR400-NMNM-0.<br>5m     | N/A        | Jul. 04, 2024    |
| 7                                    | Receiver                 | Agilent        | N9038A                   | MY52130039 | Dec. 22, 2024    |
| 8                                    | Positioning Controller   | MF             | MF-7802                  | N/A        | N/A              |
| 9                                    | Measurement Software     | Farad          | EZ-EMC<br>Ver.NB-03A1-01 | N/A        | N/A              |
| 10                                   | 966 Chamber room         | CM             | 9*6*6                    | N/A        | May 16, 2025     |

### Radiated Emissions - Above 1 GHz

| Item | Kind of Equipment           | Manufacturer      | Type No.                        | Serial No. | Calibrated until |
|------|-----------------------------|-------------------|---------------------------------|------------|------------------|
| 1    | EXA Spectrum Analyzer       | Keysight          | N9010A                          | MY55150209 | May 31, 2025     |
| 2    | Low Noise Amplifier         | CONNPHY           | CLN-18G40G-4330-K               | 619413     | Jul. 06, 2024    |
| 3    | Cable                       | RegalWay          | RWLP50-2.6A-2.92<br>M2.92M-1.1M | N/A        | Jul. 26, 2024    |
| 4    | Cable                       | Tonscend          | HF160-KMKM-3M                   | N/A        | Jul. 26, 2024    |
| 5    | Broad-Band Horn Antenna     | Schwarzbeck       | BBHA9170                        | 1227       | Oct. 10, 2024    |
| 6    | Positioning Controller      | MF                | MF-7802                         | N/A        | N/A              |
| 7    | Measurement Software        | Farad             | EZ-EMC<br>Ver.NB-03A1-01        | N/A        | N/A              |
| 8    | Receiver                    | Agilent           | N9038A                          | MY52130039 | Dec. 22, 2024    |
| 9    | Preamplifier                | EMC<br>INSTRUMENT | EMC118A45SE                     | 980888     | Nov. 17, 2024    |
| 10   | Double Ridged Guide Antenna | ETS               | 3115                            | 75846      | Mar 20, 2025     |
| 11   | Cable                       | RegalWay          | RWLP50-4.0A-SMS<br>M-12.5M      | N/A        | Feb. 19, 2025    |
| 12   | Cable                       | RegalWay          | RWLP50-4.0A-NM<br>RASM-2.5M     | N/A        | Aug. 08, 2024    |
| 13   | Cable                       | RegalWay          | RWLP50-4.0A-NM<br>RASMRA-0.8M   | N/A        | Aug. 08, 2024    |
| 14   | MXA Signal Analyzer         | KEYSIGHT          | N9020B                          | MY63380204 | Nov. 17, 2024    |

### Bandwidth & Conducted Spurious Emissions & Power Spectral Density

| Item | Kind of Equipment    | Manufacturer     | Type No.           | Serial No. | Calibrated until |
|------|----------------------|------------------|--------------------|------------|------------------|
| 1    | Spectrum Analyzer    | R&S              | FSP40              | 100185     | May 31, 2025     |
| 2    | Attenuator           | Talent Microwave | TA10A0-S-26.5      | N/A        | N/A              |
| 3    | DC Block             | N/A              | N/A                | N/A        | N/A              |
| 4    | Measurement Software | BTL              | BTL Conducted Test | N/A        | N/A              |

### Maximum Output Power


| Item | Kind of Equipment     | Manufacturer     | Type No.    | Serial No. | Calibrated until |
|------|-----------------------|------------------|-------------|------------|------------------|
| 1    | Peak Power Analyzer   | Keysight         | 8990B       | MY51000506 | May 31, 2025     |
| 2    | Wideband power sensor | Keysight         | N1923A      | MY58310004 | May 31, 2025     |
| 3    | Attenuator            | Talent Microwave | TA10A2-S-18 | N/A        | N/A              |

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.



## 11. EUT TEST PHOTO



### AC Power Line Conducted Emissions Test Photos

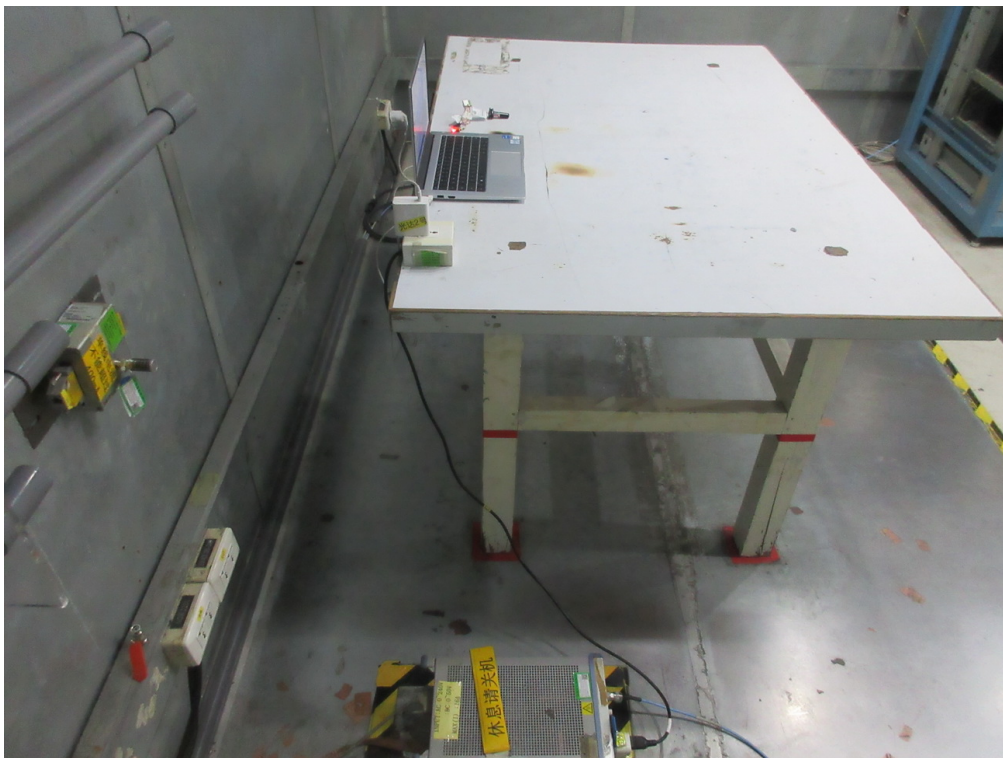

**Radiated Emissions Test Photos**


**9 kHz to 30 MHz**

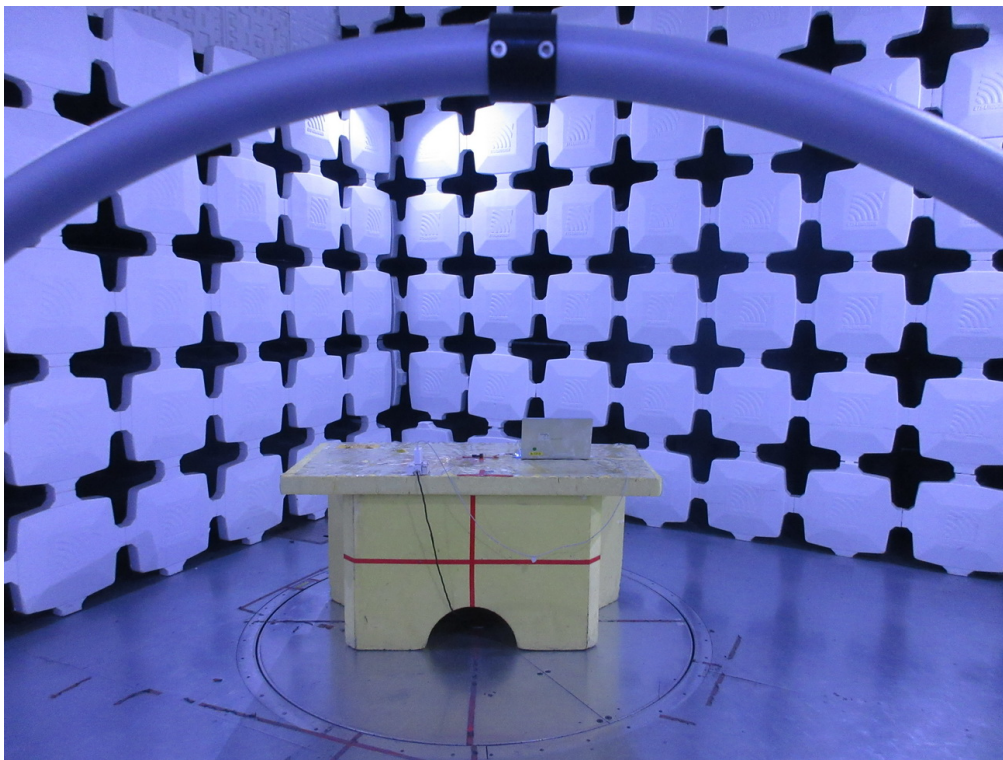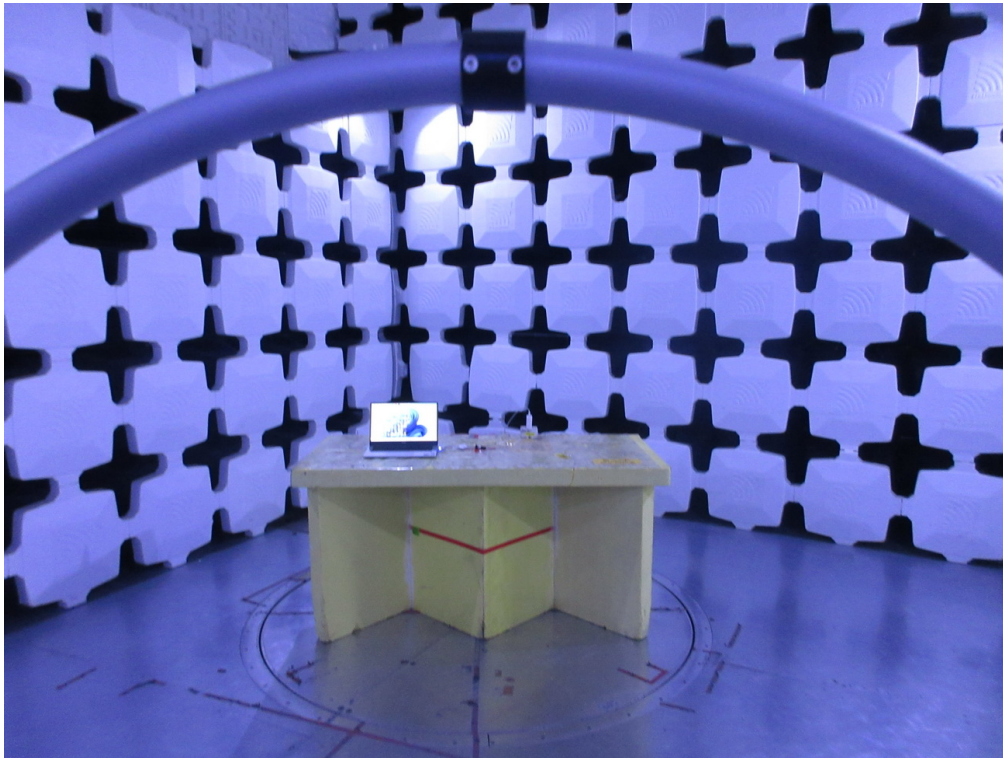

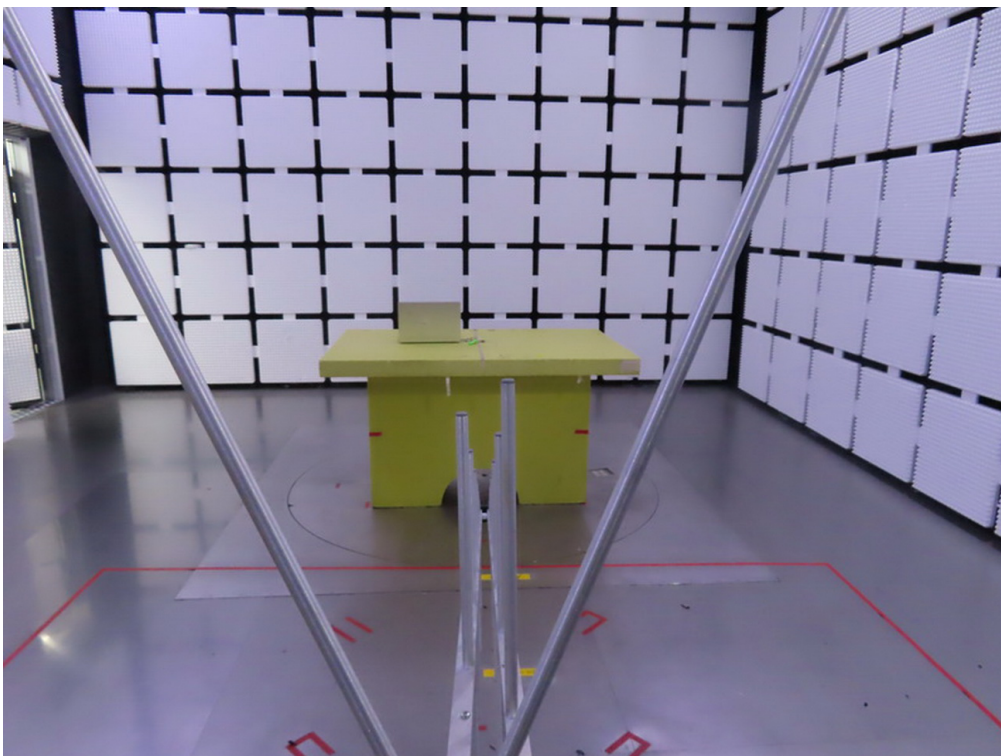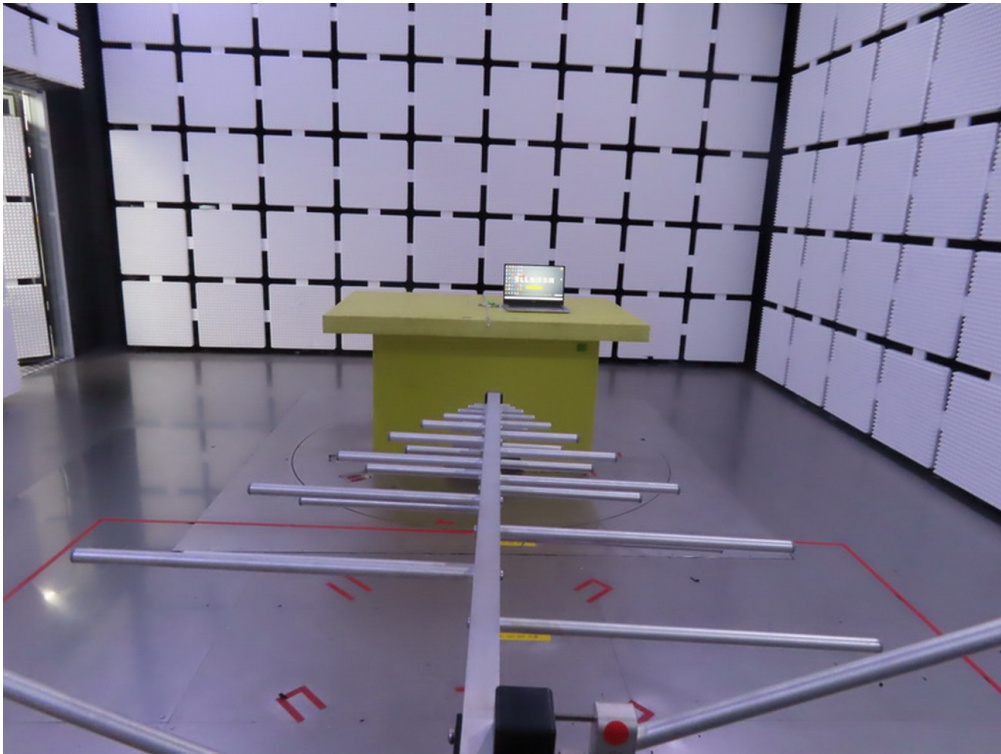**Radiated Emissions Test Photos****30 MHz to 1 GHz**

**Radiated Emissions Test Photos**


**1 GHz to 18 GHz**

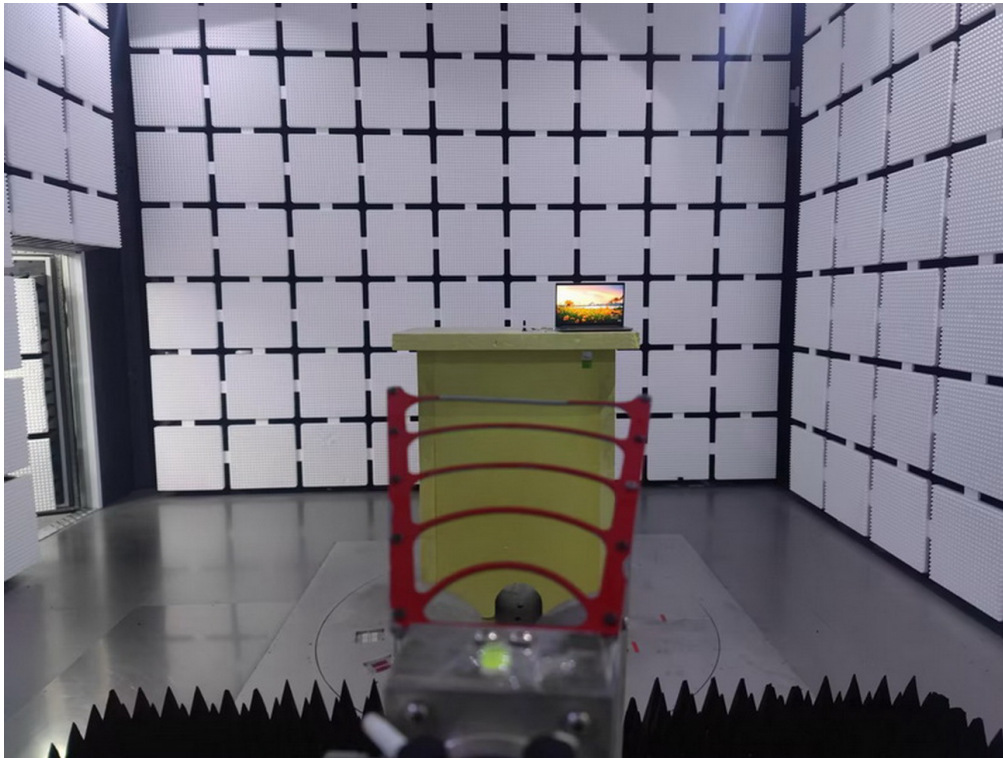


**Radiated Emissions Test Photos**

**18 GHz to 26.5 GHz**



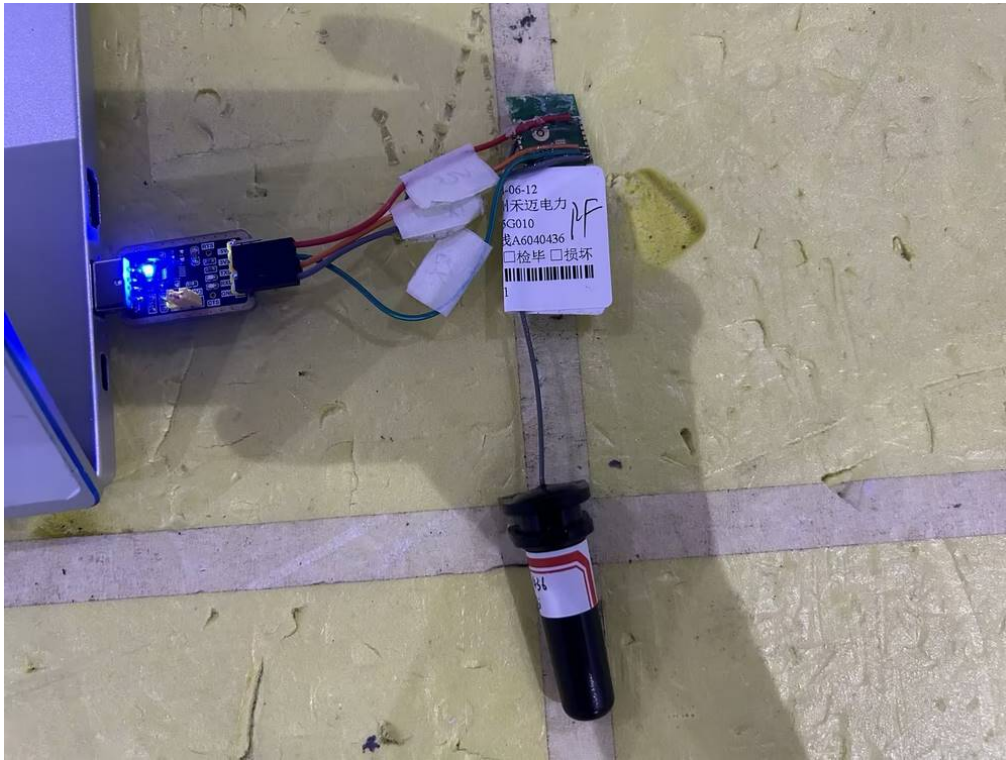


## Conducted Test Photos

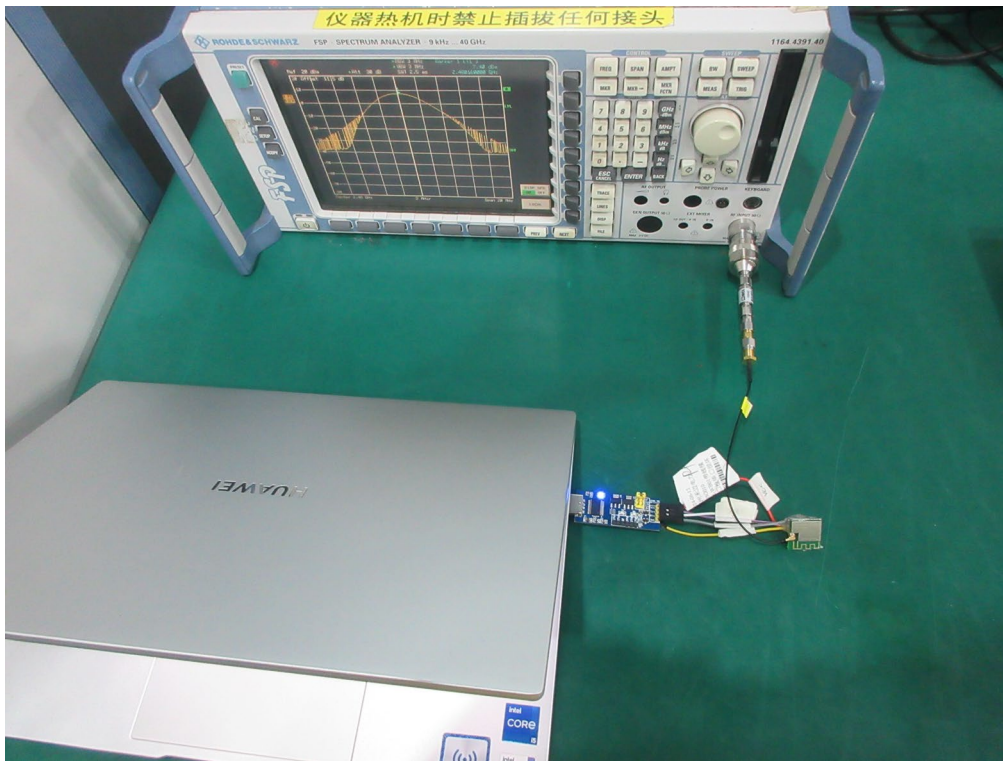

## **APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS**

|           |                      |       |      |
|-----------|----------------------|-------|------|
| Test Mode | TX B Mode Channel 11 | Phase | Line |
|-----------|----------------------|-------|------|

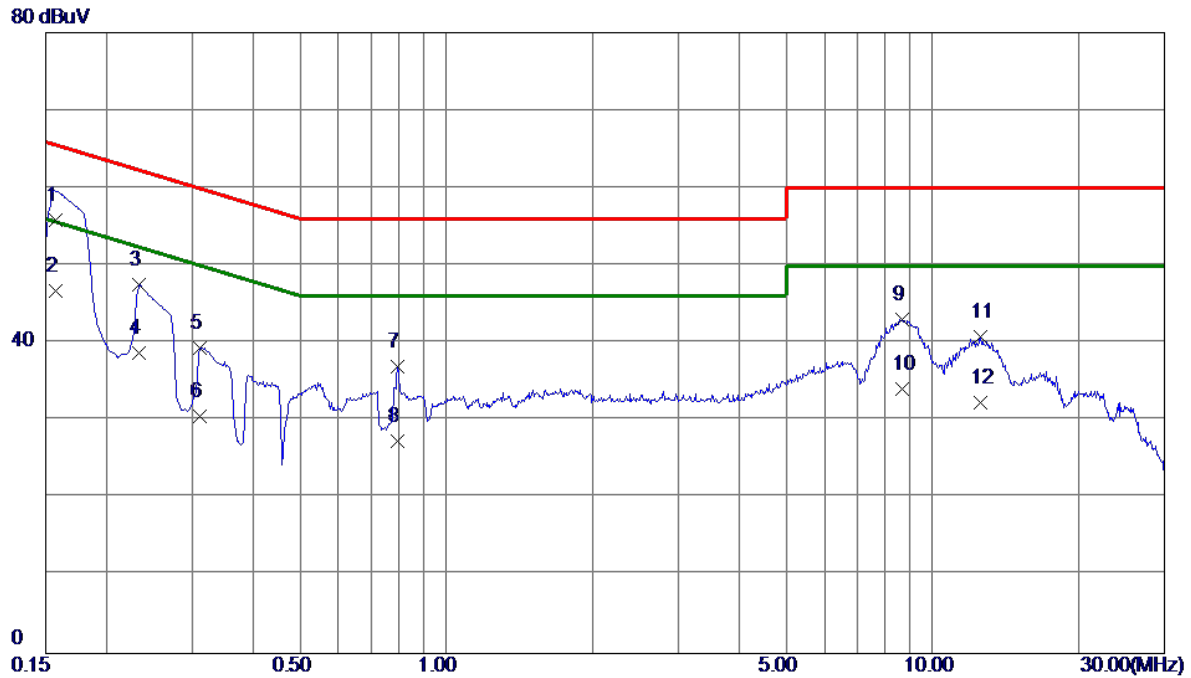


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|---------|
| 1   | 0.1568       | 45.90                    | 9.97                    | 55.87                   | 65.63         | -9.76        | QP       |         |
| 2 * | 0.1568       | 36.80                    | 9.97                    | 46.77                   | 55.63         | -8.86        | AVG      |         |
| 3   | 0.2333       | 37.50                    | 10.04                   | 47.54                   | 62.33         | -14.79       | QP       |         |
| 4   | 0.2333       | 28.69                    | 10.04                   | 38.73                   | 52.33         | -13.60       | AVG      |         |
| 5   | 0.3120       | 29.16                    | 10.20                   | 39.36                   | 59.92         | -20.56       | QP       |         |
| 6   | 0.3120       | 20.30                    | 10.20                   | 30.50                   | 49.92         | -19.42       | AVG      |         |
| 7   | 0.7957       | 25.80                    | 11.11                   | 36.91                   | 56.00         | -19.09       | QP       |         |
| 8   | 0.7957       | 16.20                    | 11.11                   | 27.31                   | 46.00         | -18.69       | AVG      |         |
| 9   | 8.6505       | 31.49                    | 11.59                   | 43.08                   | 60.00         | -16.92       | QP       |         |
| 10  | 8.6505       | 22.51                    | 11.59                   | 34.10                   | 50.00         | -15.90       | AVG      |         |
| 11  | 12.5205      | 28.34                    | 12.49                   | 40.83                   | 60.00         | -19.17       | QP       |         |
| 12  | 12.5205      | 19.90                    | 12.49                   | 32.39                   | 50.00         | -17.61       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                      |       |         |
|-----------|----------------------|-------|---------|
| Test Mode | TX B Mode Channel 11 | Phase | Neutral |
|-----------|----------------------|-------|---------|

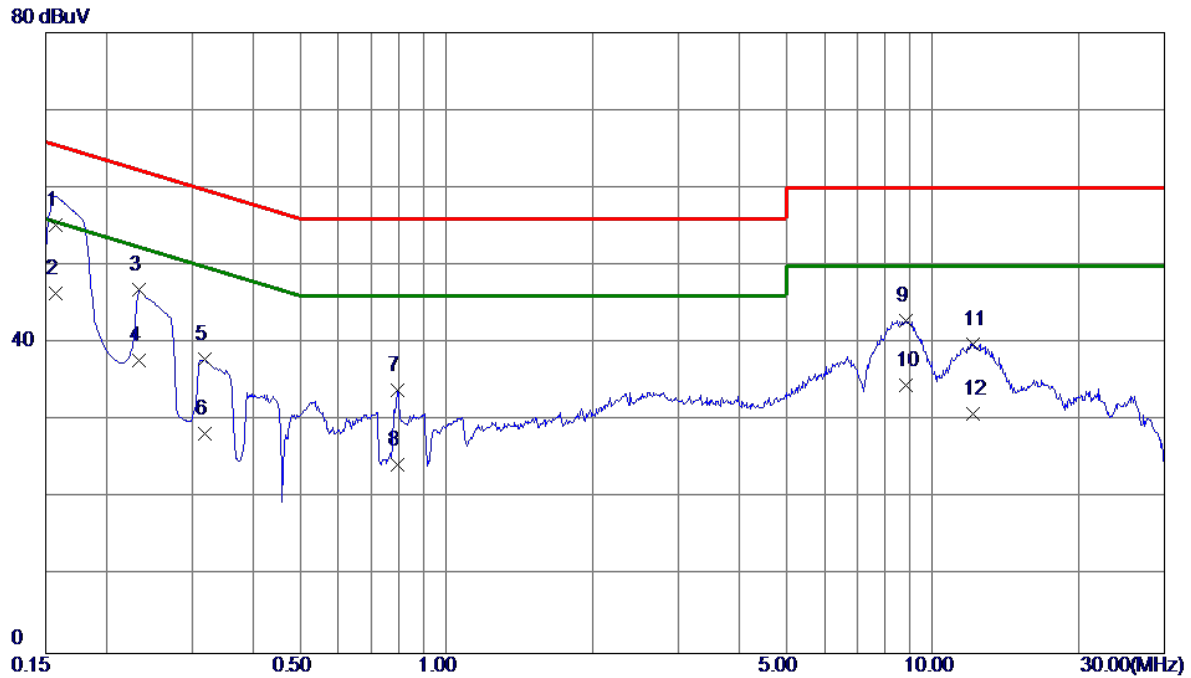


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV | Limit<br>dBuV | Margin<br>dB | Detector | Comment |
|-----|--------------|--------------------------|-------------------------|-------------------------|---------------|--------------|----------|---------|
| 1   | 0.1568       | 45.31                    | 9.93                    | 55.24                   | 65.63         | -10.39       | QP       |         |
| 2 * | 0.1568       | 36.41                    | 9.93                    | 46.34                   | 55.63         | -9.29        | AVG      |         |
| 3   | 0.2333       | 36.82                    | 10.00                   | 46.82                   | 62.33         | -15.51       | QP       |         |
| 4   | 0.2333       | 27.79                    | 10.00                   | 37.79                   | 52.33         | -14.54       | AVG      |         |
| 5   | 0.3187       | 27.80                    | 10.18                   | 37.98                   | 59.74         | -21.76       | QP       |         |
| 6   | 0.3187       | 18.09                    | 10.18                   | 28.27                   | 49.74         | -21.47       | AVG      |         |
| 7   | 0.7957       | 22.92                    | 11.06                   | 33.98                   | 56.00         | -22.02       | QP       |         |
| 8   | 0.7957       | 13.30                    | 11.06                   | 24.36                   | 46.00         | -21.64       | AVG      |         |
| 9   | 8.8418       | 31.27                    | 11.61                   | 42.88                   | 60.00         | -17.12       | QP       |         |
| 10  | 8.8418       | 22.91                    | 11.61                   | 34.52                   | 50.00         | -15.48       | AVG      |         |
| 11  | 12.1313      | 27.45                    | 12.38                   | 39.83                   | 60.00         | -20.17       | QP       |         |
| 12  | 12.1313      | 18.50                    | 12.38                   | 30.88                   | 50.00         | -19.12       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ**

|           |                      |              |        |
|-----------|----------------------|--------------|--------|
| Test Mode | TX B Mode Channel 11 | Polarization | Ant 0° |
|-----------|----------------------|--------------|--------|

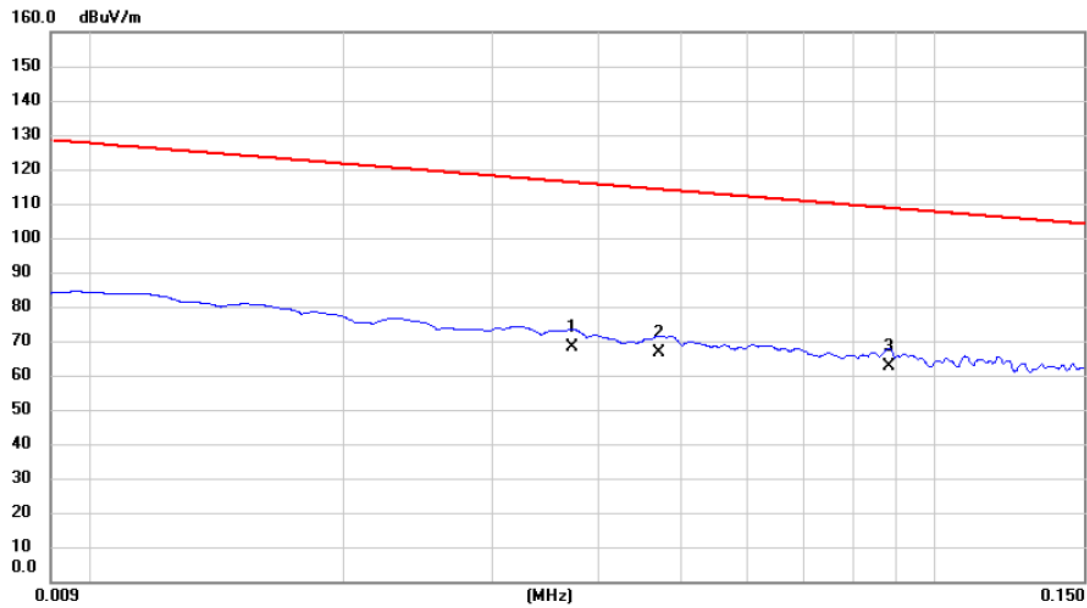


| No. Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|---------|--------|---------------|----------------|-------------|--------|--------|----------|---------|
|         | MHz    | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1       | 0.0372 | 47.21         | 21.14          | 68.35       | 116.19 | -47.84 | AVG      |         |
| 2       | 0.0472 | 45.39         | 21.19          | 66.58       | 114.13 | -47.55 | AVG      |         |
| 3 *     | 0.0881 | 41.11         | 21.30          | 62.41       | 108.71 | -46.30 | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                      |              |        |
|-----------|----------------------|--------------|--------|
| Test Mode | TX B Mode Channel 11 | Polarization | Ant 0° |
|-----------|----------------------|--------------|--------|

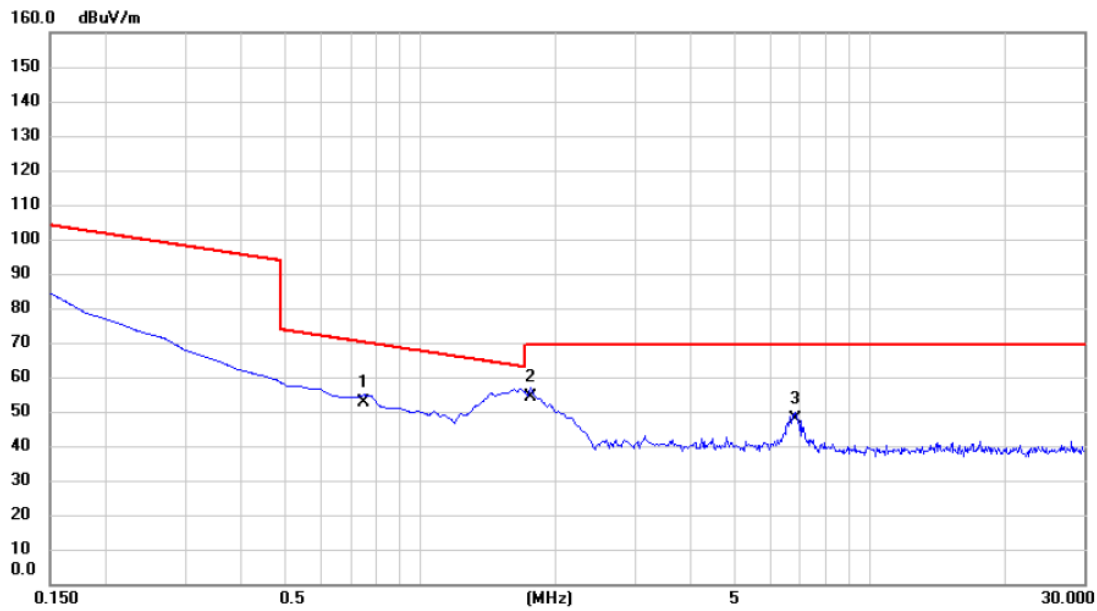


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1       | 0.7470       | 31.49                    | 21.15                   | 52.64                      | 70.14           | -17.50       | QP       |         |
| 2 *     | 1.7620       | 32.99                    | 21.12                   | 54.11                      | 69.54           | -15.43       | QP       |         |
| 3       | 6.8065       | 26.45                    | 21.19                   | 47.64                      | 69.54           | -21.90       | QP       |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                      |              |         |
|-----------|----------------------|--------------|---------|
| Test Mode | TX B Mode Channel 11 | Polarization | Ant 90° |
|-----------|----------------------|--------------|---------|

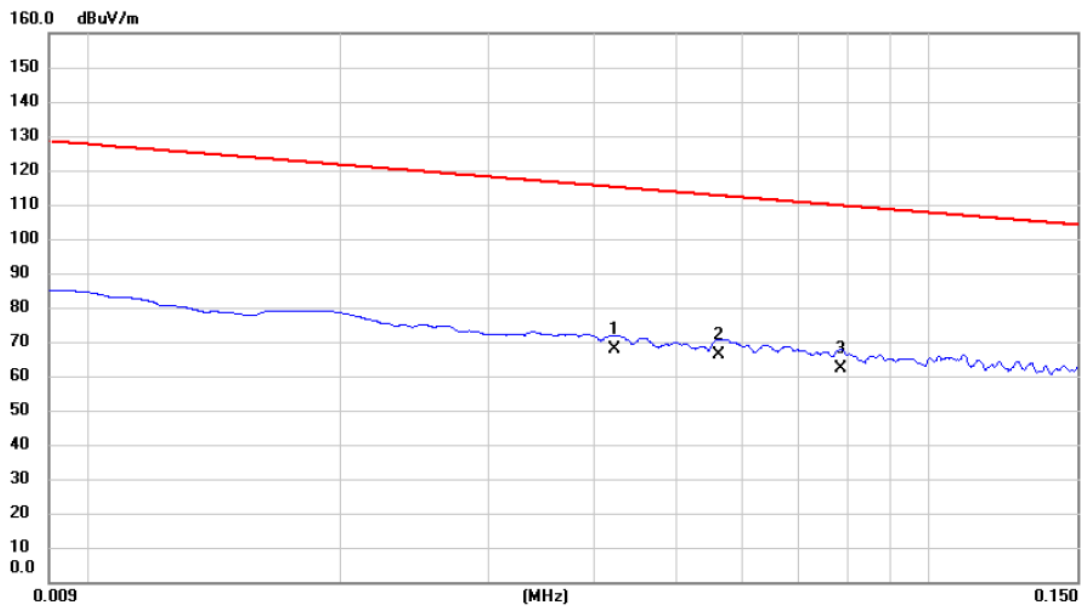


| No. Mk. | Freq.  | Reading Level | Correct Factor | Measure-ment | Limit  | Margin |          |         |
|---------|--------|---------------|----------------|--------------|--------|--------|----------|---------|
|         | MHz    | dBuV          | dB             | dBuV/m       | dBuV/m | dB     | Detector | Comment |
| 1       | 0.0423 | 46.48         | 21.16          | 67.64        | 115.08 | -47.44 | AVG      |         |
| 2 *     | 0.0562 | 45.10         | 21.22          | 66.32        | 112.61 | -46.29 | AVG      |         |
| 3       | 0.0785 | 41.01         | 21.30          | 62.31        | 109.71 | -47.40 | AVG      |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                      |              |         |
|-----------|----------------------|--------------|---------|
| Test Mode | TX B Mode Channel 11 | Polarization | Ant 90° |
|-----------|----------------------|--------------|---------|

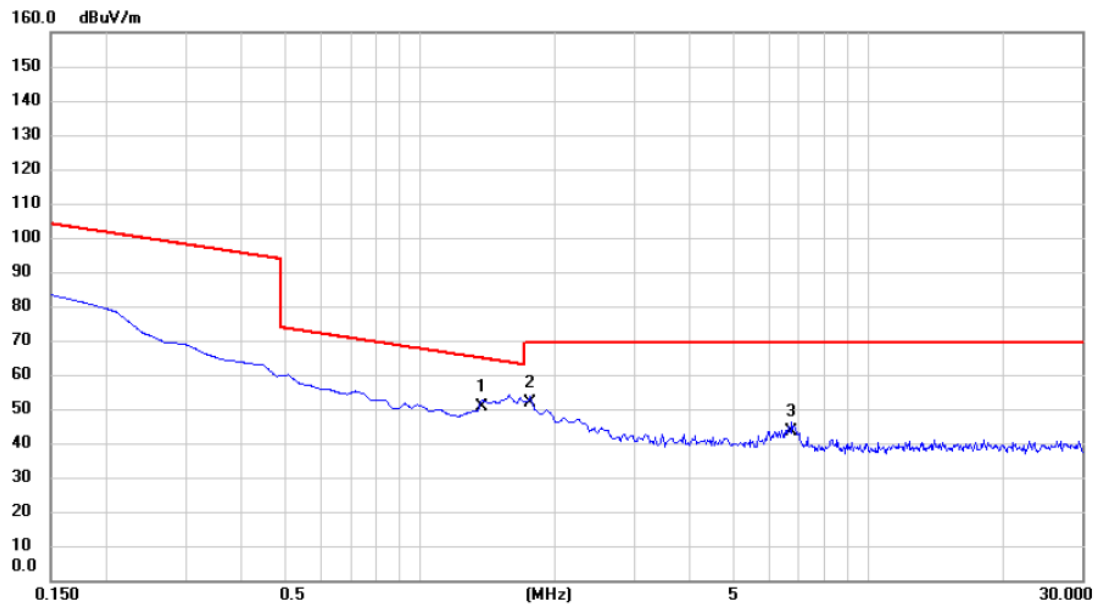

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|--------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 1.3740 | 29.45         | 21.15          | 50.60       | 64.84  | -14.24 | QP       |         |
| 2   |     | 1.7620 | 30.62         | 21.12          | 51.74       | 69.54  | -17.80 | QP       |         |
| 3   |     | 6.7470 | 22.18         | 21.19          | 43.37       | 69.54  | -26.17 | QP       |         |

## REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ**

|           |                      |              |          |
|-----------|----------------------|--------------|----------|
| Test Mode | TX B Mode Channel 11 | Polarization | Vertical |
|-----------|----------------------|--------------|----------|

80 dBuV/m

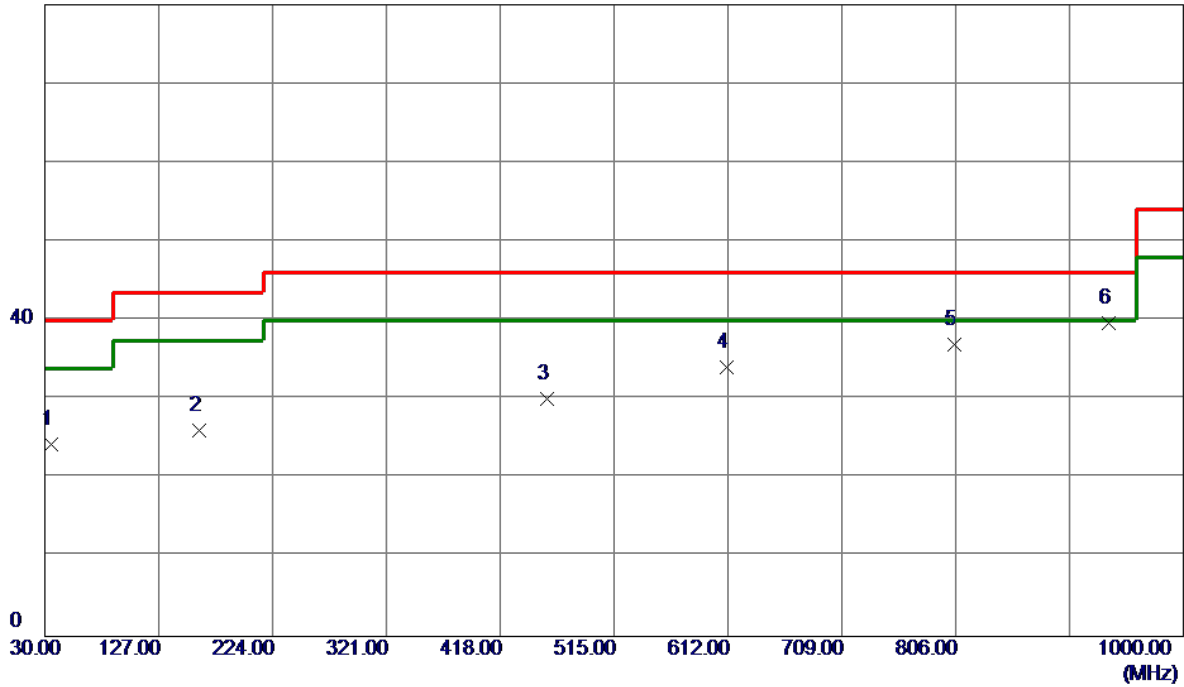


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 35.3350      | 36.51                      | -12.26                  | 24.25                     | 40.00           | -15.75       | Peak     |         |
| 2   | 161.4350     | 36.88                      | -10.83                  | 26.05                     | 43.50           | -17.45       | Peak     |         |
| 3   | 457.7700     | 36.61                      | -6.48                   | 30.13                     | 46.00           | -15.87       | Peak     |         |
| 4   | 610.5450     | 37.34                      | -3.28                   | 34.06                     | 46.00           | -11.94       | Peak     |         |
| 5   | 804.5450     | 37.99                      | -1.07                   | 36.92                     | 46.00           | -9.08        | Peak     |         |
| 6 * | 936.4650     | 39.21                      | 0.54                    | 39.75                     | 46.00           | -6.25        | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                      |              |            |
|-----------|----------------------|--------------|------------|
| Test Mode | TX B Mode Channel 11 | Polarization | Horizontal |
|-----------|----------------------|--------------|------------|

80 dBuV/m

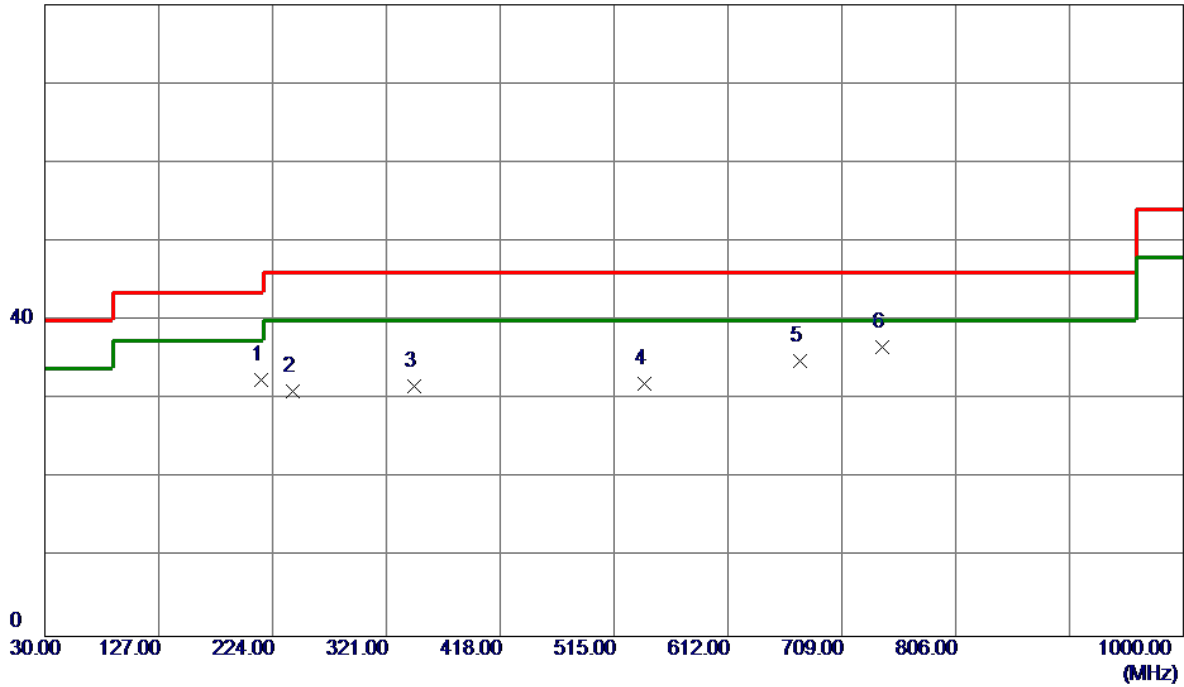

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 214.3000     | 46.82                      | -14.30                  | 32.52                     | 43.50           | -10.98       | Peak     |         |
| 2   | 240.9750     | 43.60                      | -12.57                  | 31.03                     | 46.00           | -14.97       | Peak     |         |
| 3   | 344.7650     | 41.07                      | -9.35                   | 31.72                     | 46.00           | -14.28       | Peak     |         |
| 4   | 541.1900     | 37.02                      | -5.00                   | 32.02                     | 46.00           | -13.98       | Peak     |         |
| 5   | 673.1100     | 37.31                      | -2.44                   | 34.87                     | 46.00           | -11.13       | Peak     |         |
| 6 * | 743.9200     | 37.67                      | -1.08                   | 36.59                     | 46.00           | -9.41        | Peak     |         |


## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ**

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX B Mode 2412 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

120 dBuV/m

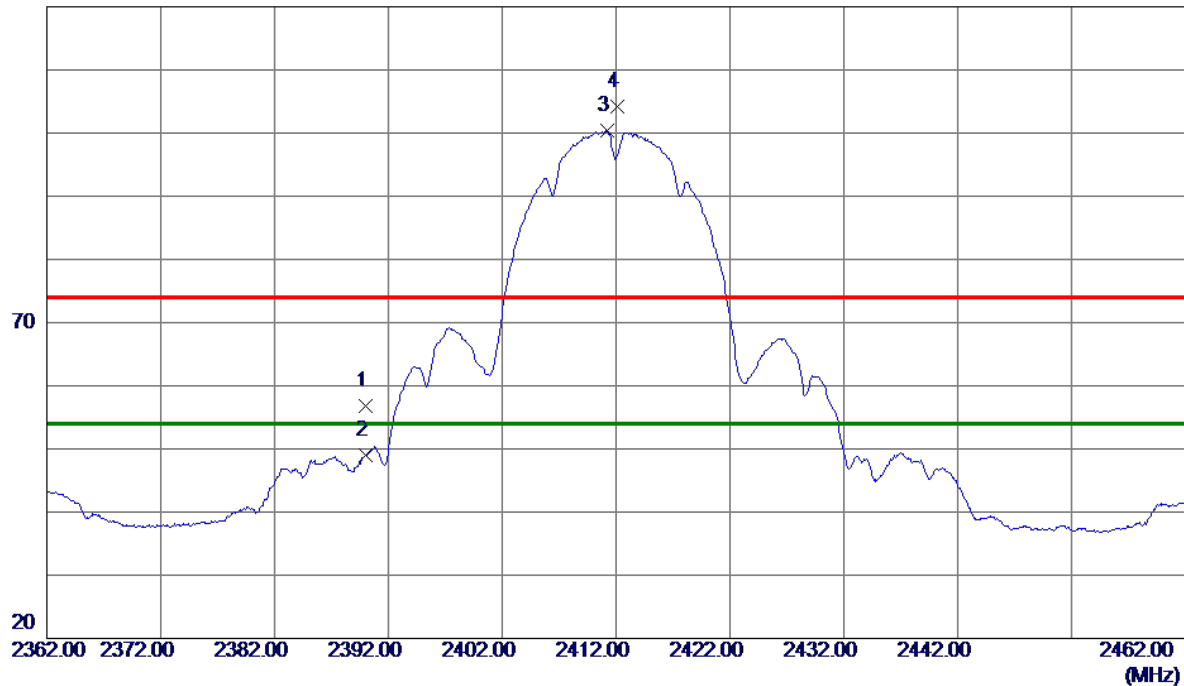


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 50.65                      | 6.14                    | 56.79                     | 74.00           | -17.21       | Peak     |          |
| 2   | 2390.0000    | 42.95                      | 6.14                    | 49.09                     | 54.00           | -4.91        | AVG      |          |
| 3 * | 2411.2000    | 94.24                      | 6.15                    | 100.39                    | 54.00           | 46.39        | AVG      | No Limit |
| 4   | 2412.1000    | 97.99                      | 6.15                    | 104.14                    | 74.00           | 30.14        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX B Mode 2412 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

100 dBuV/m

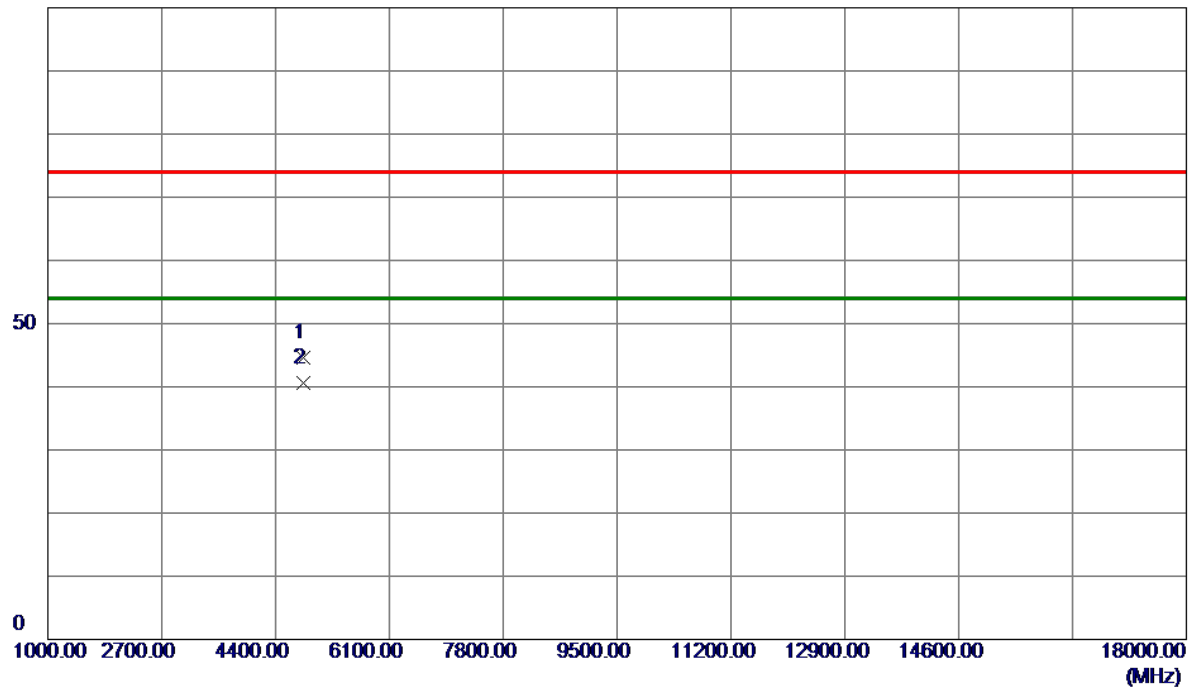


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4823.9720    | 43.70                      | 0.81                    | 44.51                     | 74.00           | -29.49       | Peak     |         |
| 2 * | 4824.0000    | 39.70                      | 0.81                    | 40.51                     | 54.00           | -13.49       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX B Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

120 dBuV/m

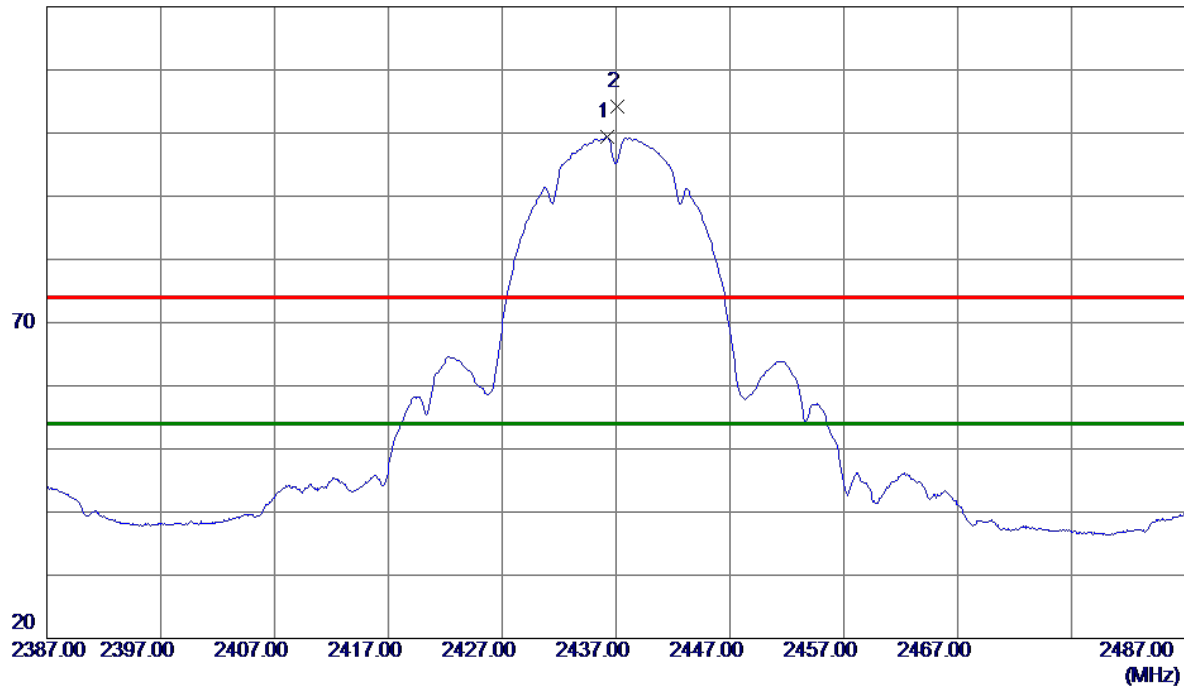

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 2436.2000    | 93.16                      | 6.16                    | 99.32                     | 54.00           | 45.32        | AVG      | No Limit |
| 2   | 2437.1000    | 97.98                      | 6.16                    | 104.14                    | 74.00           | 30.14        | Peak     | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX B Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

100 dBuV/m

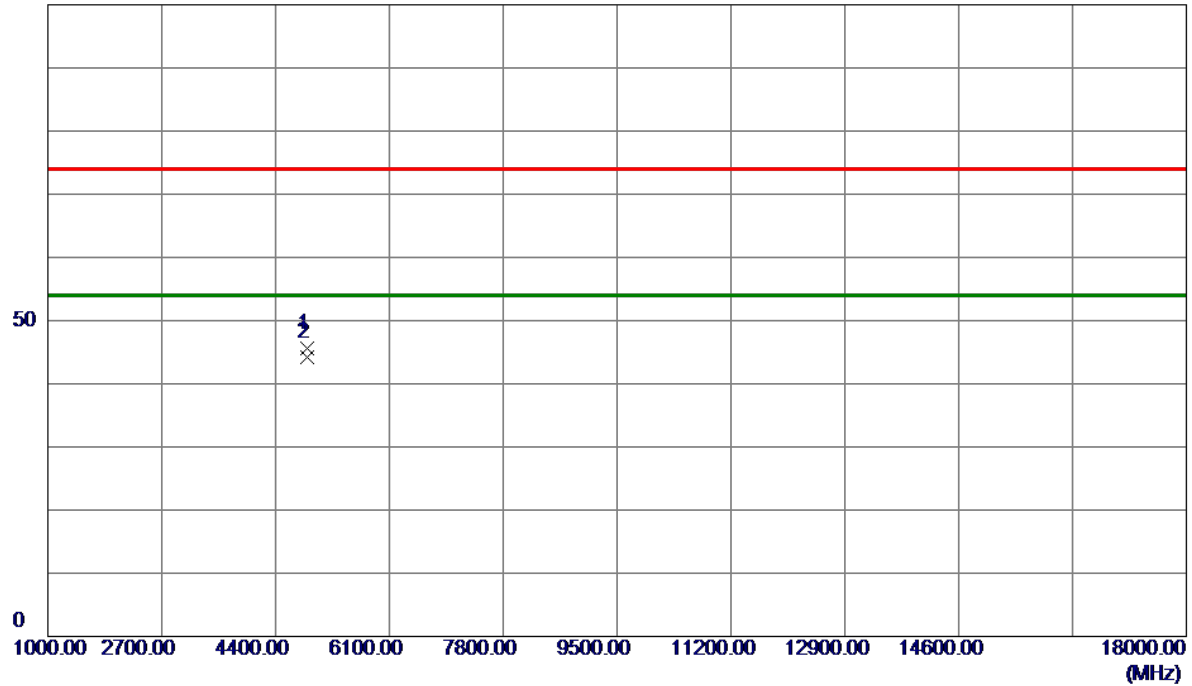


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4873.7100    | 44.66                      | 0.95                    | 45.61                     | 74.00           | -28.39       | Peak     |         |
| 2 * | 4874.1650    | 43.24                      | 0.95                    | 44.19                     | 54.00           | -9.81        | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX B Mode 2462 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

120 dBuV/m

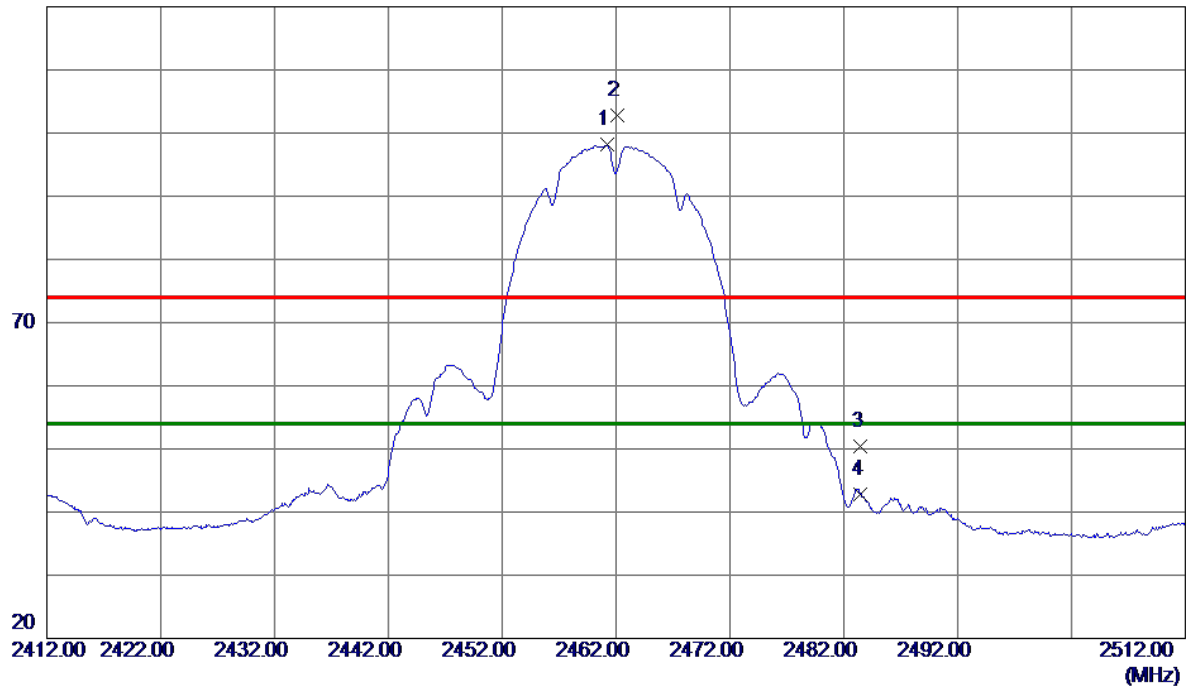


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 2461.2000    | 91.96                      | 6.17                    | 98.13                     | 54.00           | 44.13        | AVG      | No Limit |
| 2   | 2462.1000    | 96.71                      | 6.17                    | 102.88                    | 74.00           | 28.88        | Peak     | No Limit |
| 3   | 2483.5000    | 44.20                      | 6.17                    | 50.37                     | 74.00           | -23.63       | Peak     |          |
| 4   | 2483.5000    | 36.60                      | 6.17                    | 42.77                     | 54.00           | -11.23       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX B Mode 2462 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

100 dBuV/m

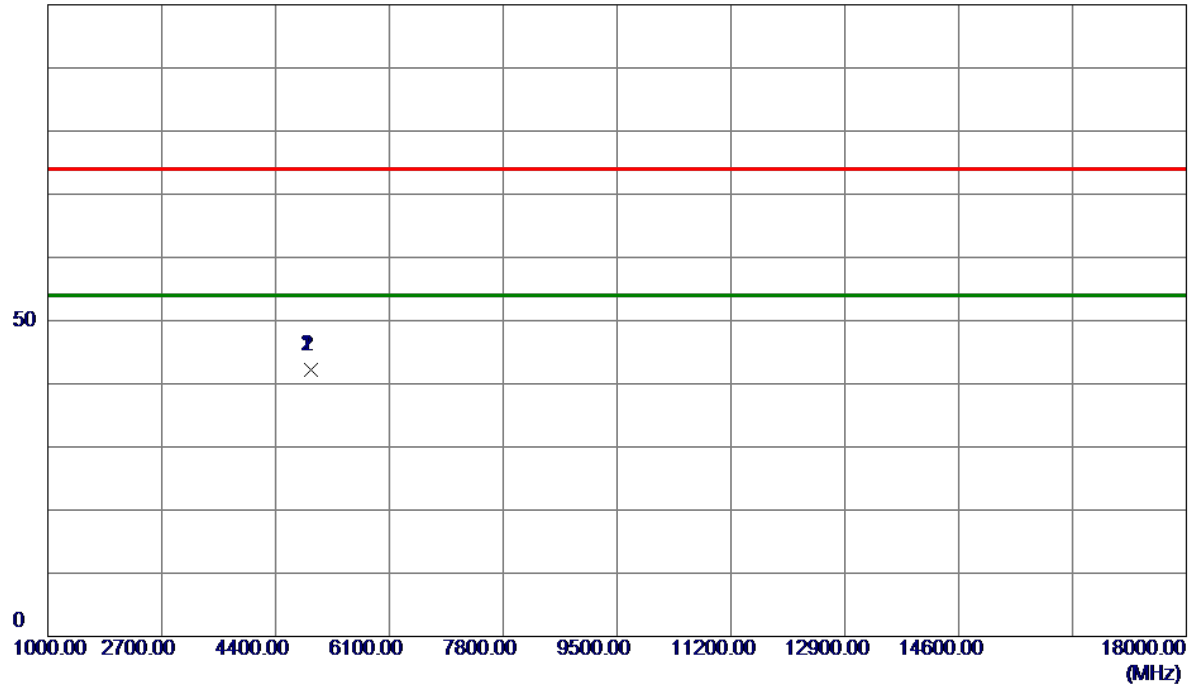


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4924.0450    | 41.05                      | 1.08                    | 42.13                     | 54.00           | -11.87       | AVG      |         |
| 2   | 4924.0800    | 41.07                      | 1.08                    | 42.15                     | 74.00           | -31.85       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2412 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

120 dBuV/m

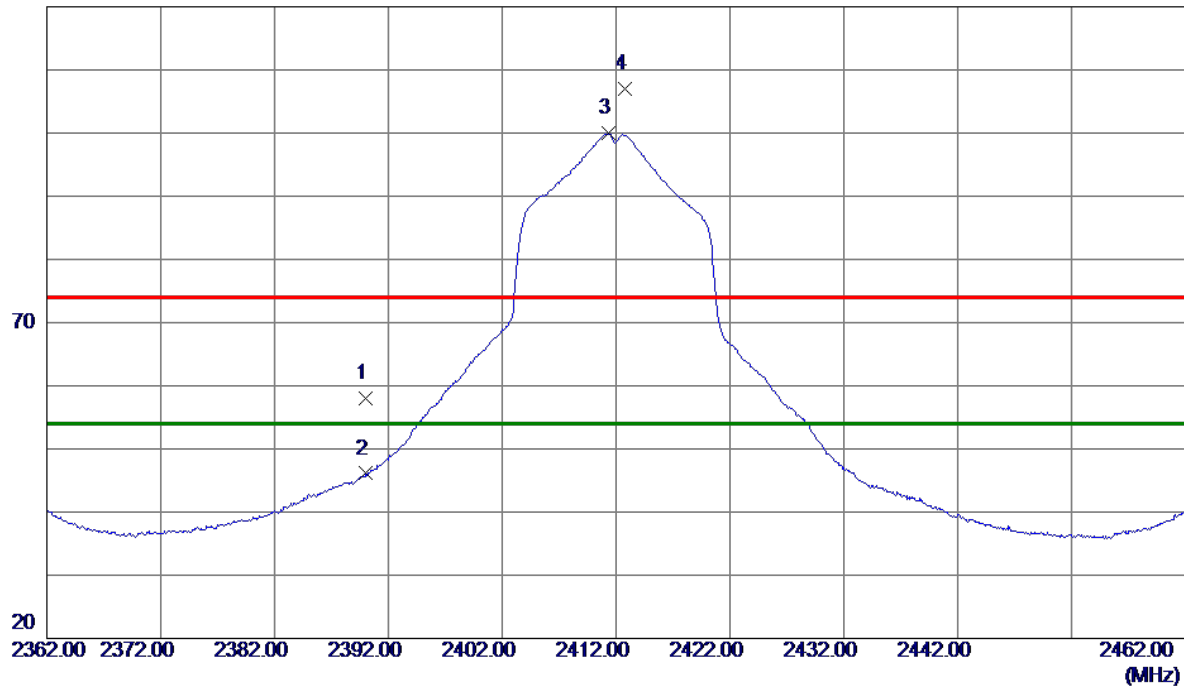


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 51.79                      | 6.14                    | 57.93                     | 74.00           | -16.07       | Peak     |          |
| 2   | 2390.0000    | 39.96                      | 6.14                    | 46.10                     | 54.00           | -7.90        | AVG      |          |
| 3 * | 2411.3500    | 93.75                      | 6.15                    | 99.90                     | 54.00           | 45.90        | AVG      | No Limit |
| 4   | 2412.7500    | 100.94                     | 6.15                    | 107.09                    | 74.00           | 33.09        | Peak     | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2412 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

100 dBuV/m

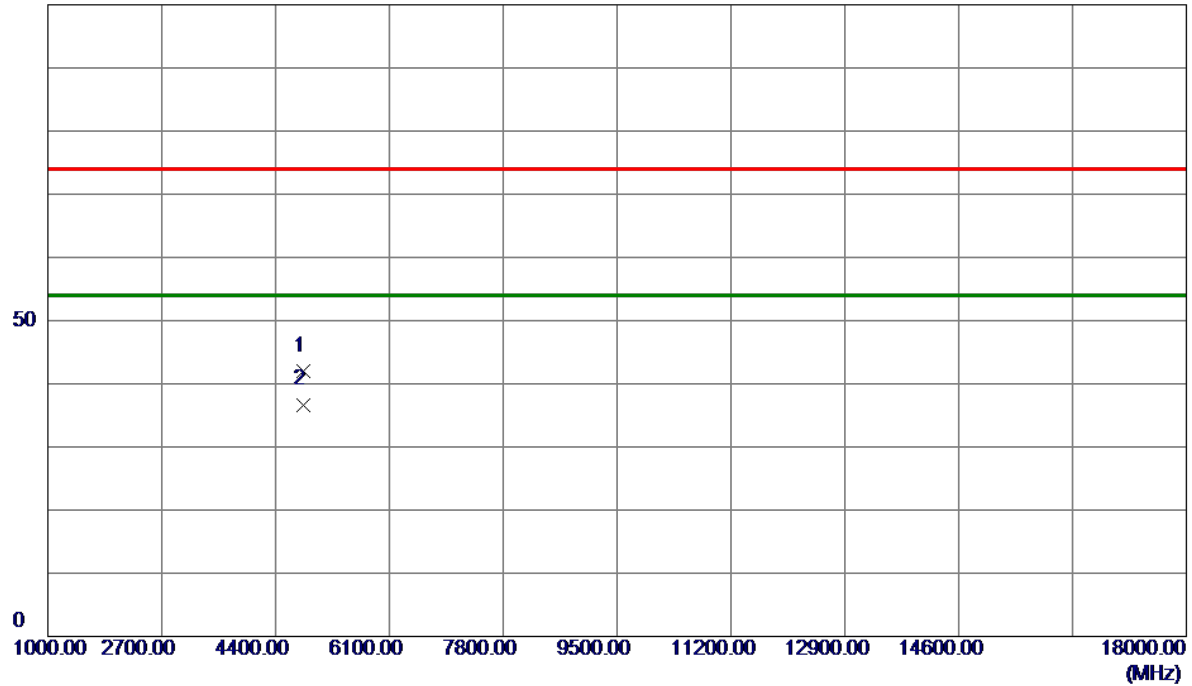

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4823.8550    | 41.20                      | 0.81                    | 42.01                     | 74.00           | -31.99       | Peak     |         |
| 2 * | 4823.9150    | 35.89                      | 0.81                    | 36.70                     | 54.00           | -17.30       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

120 dBuV/m

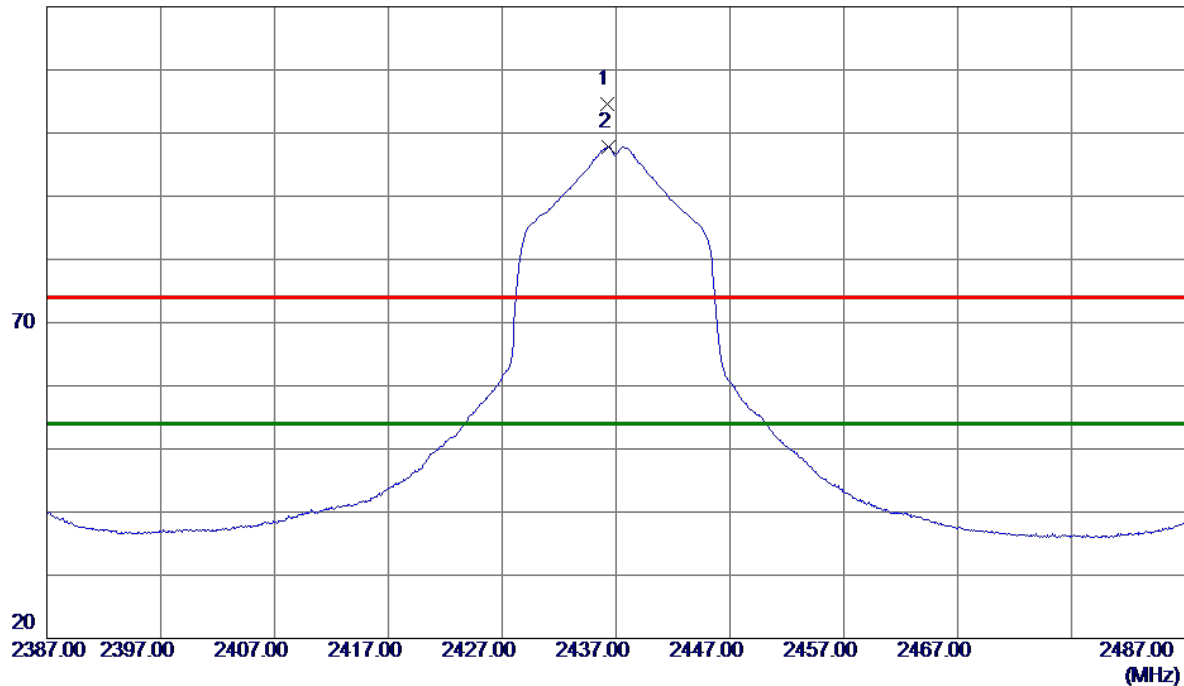


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2436.2000    | 98.47                      | 6.16                    | 104.63                    | 74.00           | 30.63        | Peak     | No Limit |
| 2 * | 2436.3500    | 91.60                      | 6.16                    | 97.76                     | 54.00           | 43.76        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

100 dBuV/m

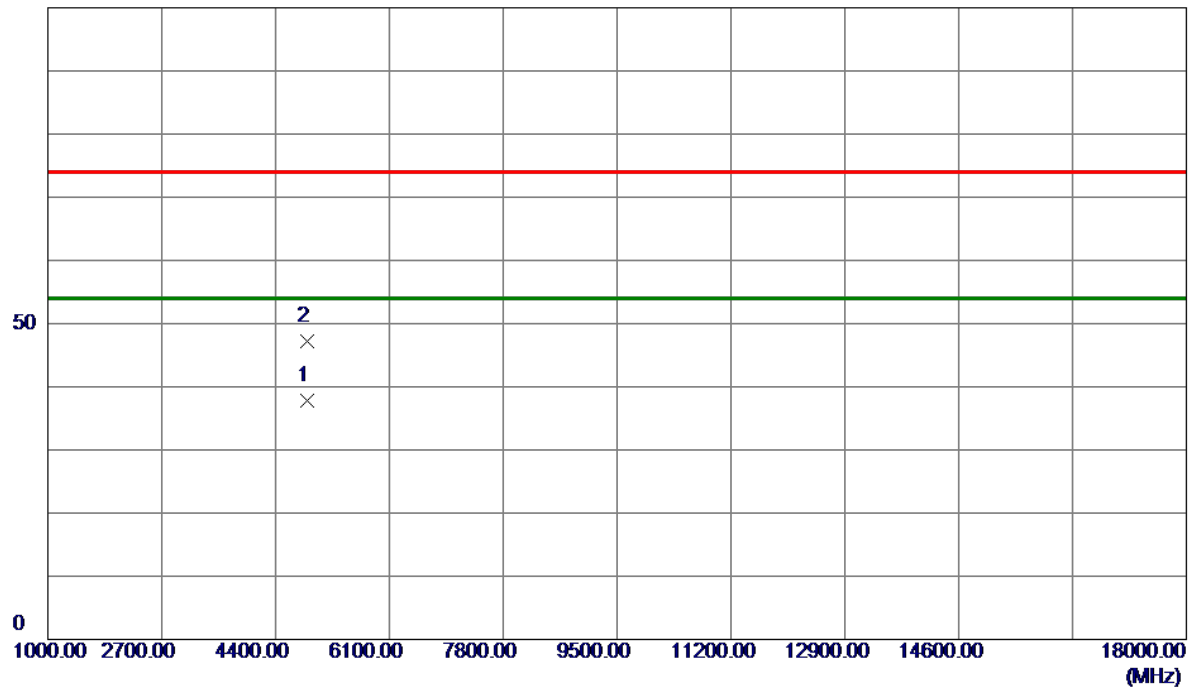


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4873.8250    | 36.93                      | 0.95                    | 37.88                     | 54.00           | -16.12       | AVG      |         |
| 2   | 4874.3500    | 46.28                      | 0.95                    | 47.23                     | 74.00           | -26.77       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2462 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

120 dBuV/m

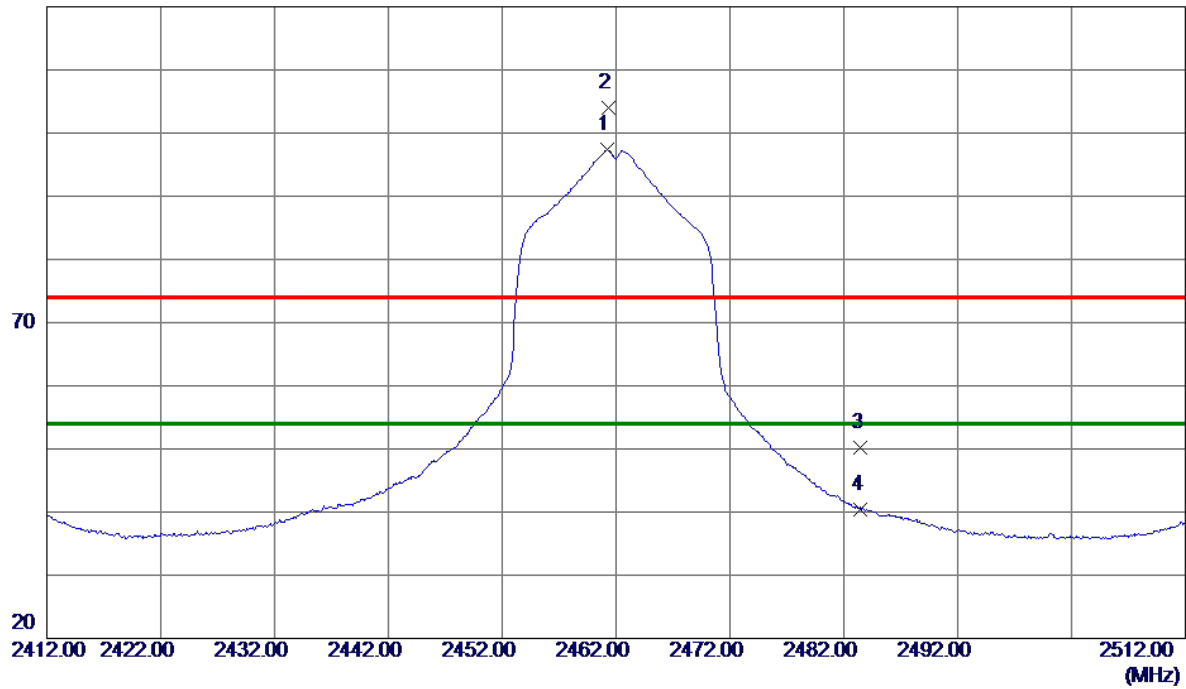


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 2461.2500    | 91.14                      | 6.17                    | 97.31                     | 54.00           | 43.31        | AVG      | No Limit |
| 2   | 2461.3000    | 97.81                      | 6.17                    | 103.98                    | 74.00           | 29.98        | Peak     | No Limit |
| 3   | 2483.5000    | 44.10                      | 6.17                    | 50.27                     | 74.00           | -23.73       | Peak     |          |
| 4   | 2483.5000    | 34.32                      | 6.17                    | 40.49                     | 54.00           | -13.51       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX G Mode 2462 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

100 dBuV/m

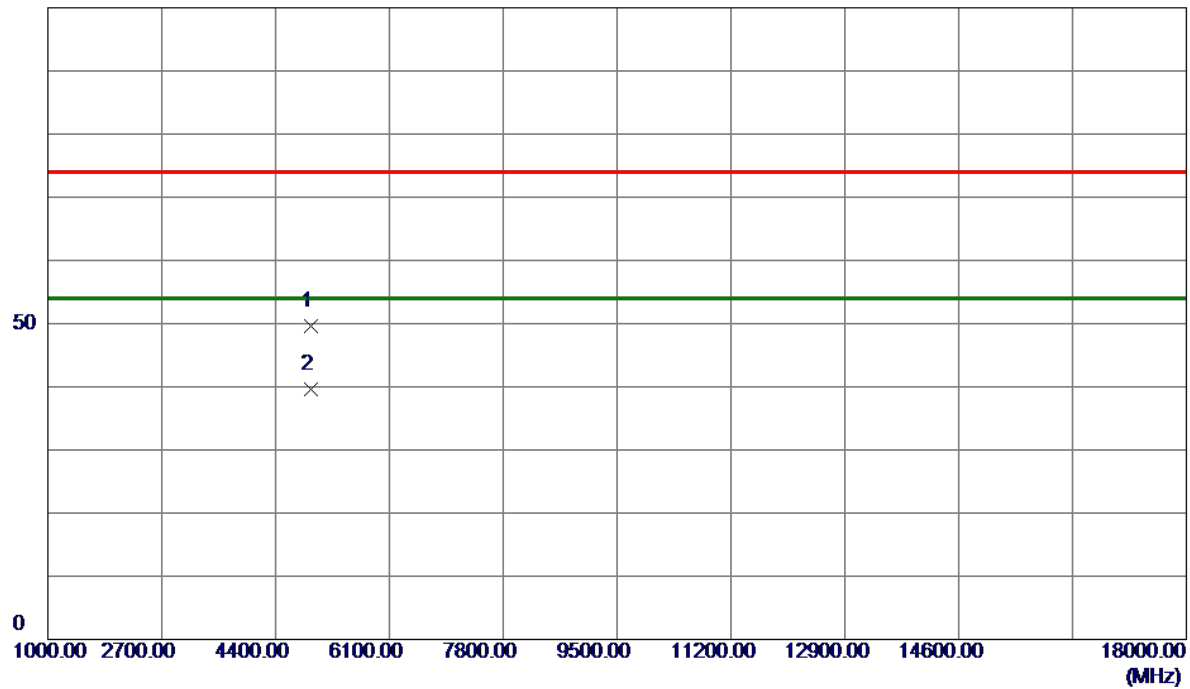


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4922.6000    | 48.54                      | 1.07                    | 49.61                     | 74.00           | -24.39       | Peak     |         |
| 2 * | 4923.7500    | 38.53                      | 1.08                    | 39.61                     | 54.00           | -14.39       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2412 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

120 dBuV/m

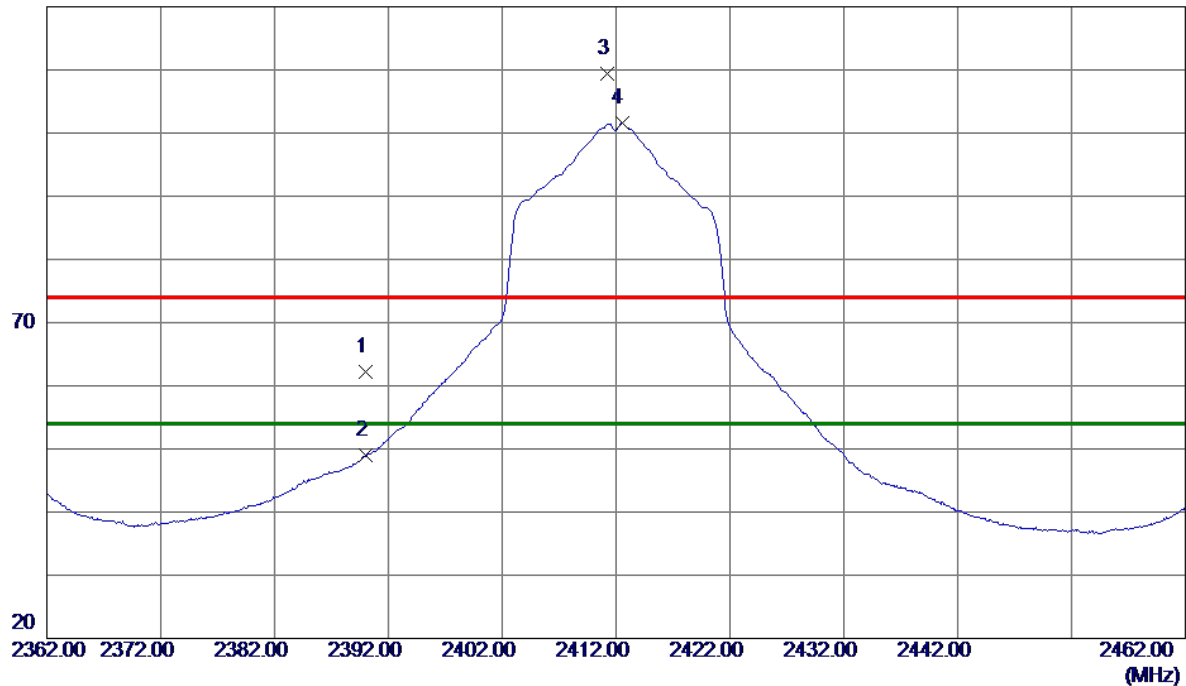


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 56.15                      | 6.14                    | 62.29                     | 74.00           | -11.71       | Peak     |          |
| 2   | 2390.0000    | 42.78                      | 6.14                    | 48.92                     | 54.00           | -5.08        | AVG      |          |
| 3   | 2411.2500    | 103.31                     | 6.15                    | 109.46                    | 74.00           | 35.46        | Peak     | No Limit |
| 4 * | 2412.5000    | 95.40                      | 6.15                    | 101.55                    | 54.00           | 47.55        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2412 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

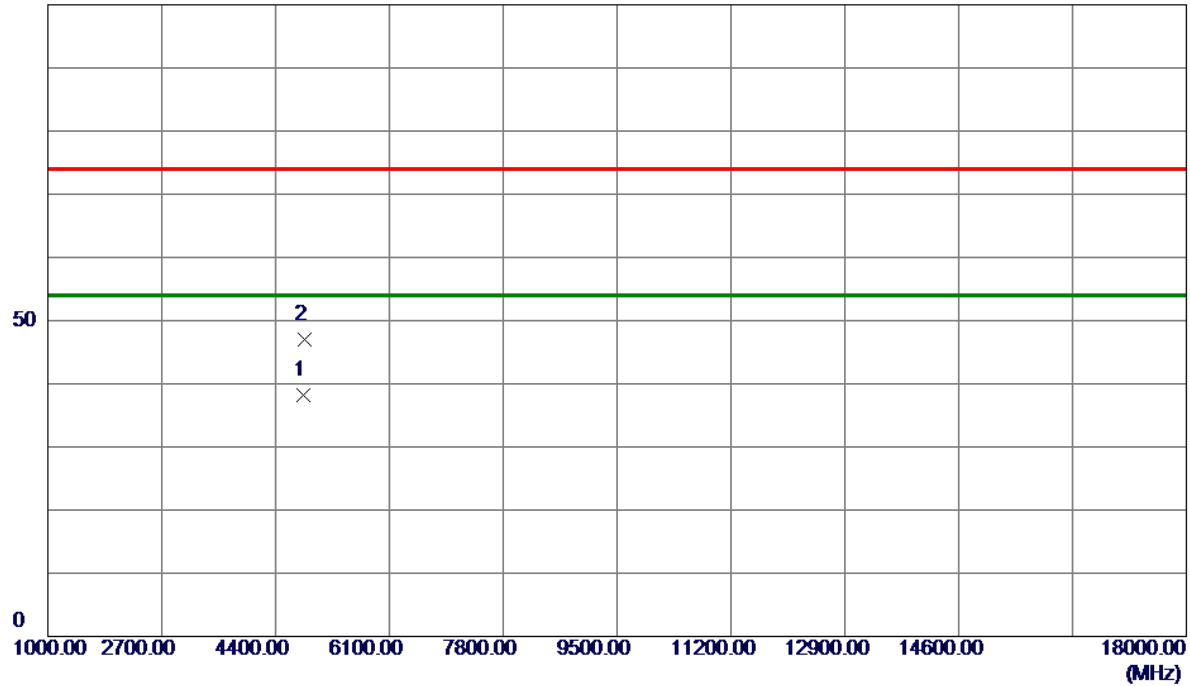


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4823.7750    | 37.36                      | 0.81                    | 38.17                     | 54.00           | -15.83       | AVG      |         |
| 2   | 4825.5250    | 46.25                      | 0.82                    | 47.07                     | 74.00           | -26.93       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

120 dBuV/m

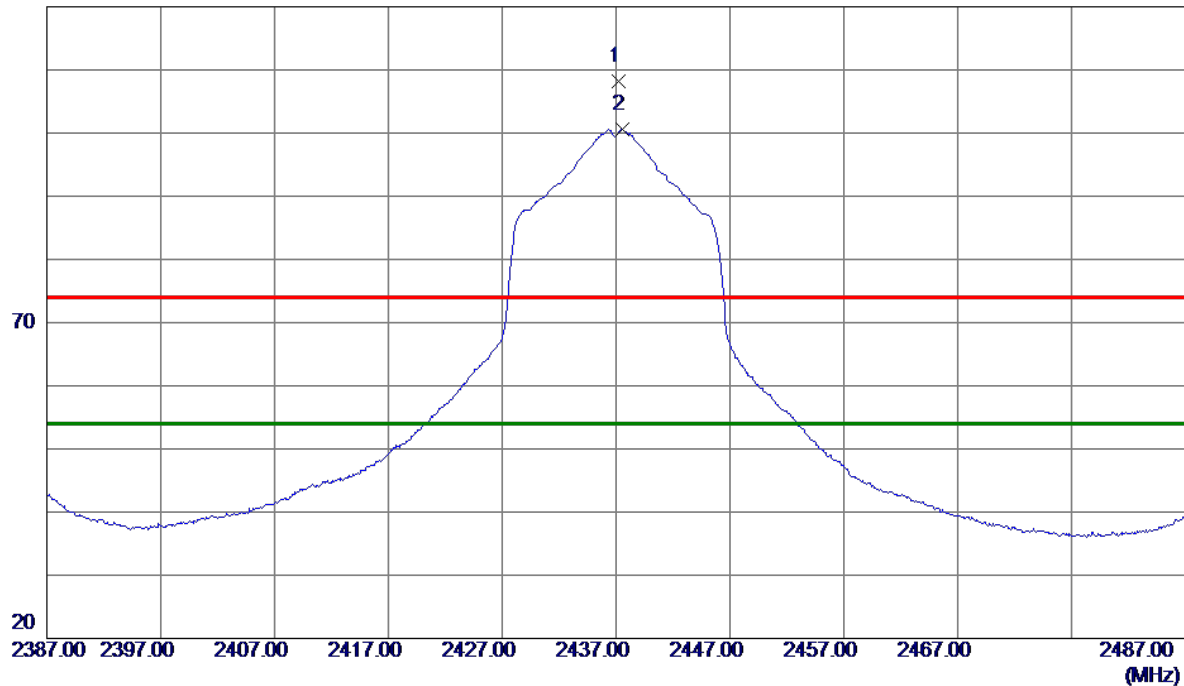


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2437.2500    | 102.14                     | 6.16                    | 108.30                    | 74.00           | 34.30        | Peak     | No Limit |
| 2 * | 2437.6000    | 94.43                      | 6.16                    | 100.59                    | 54.00           | 46.59        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

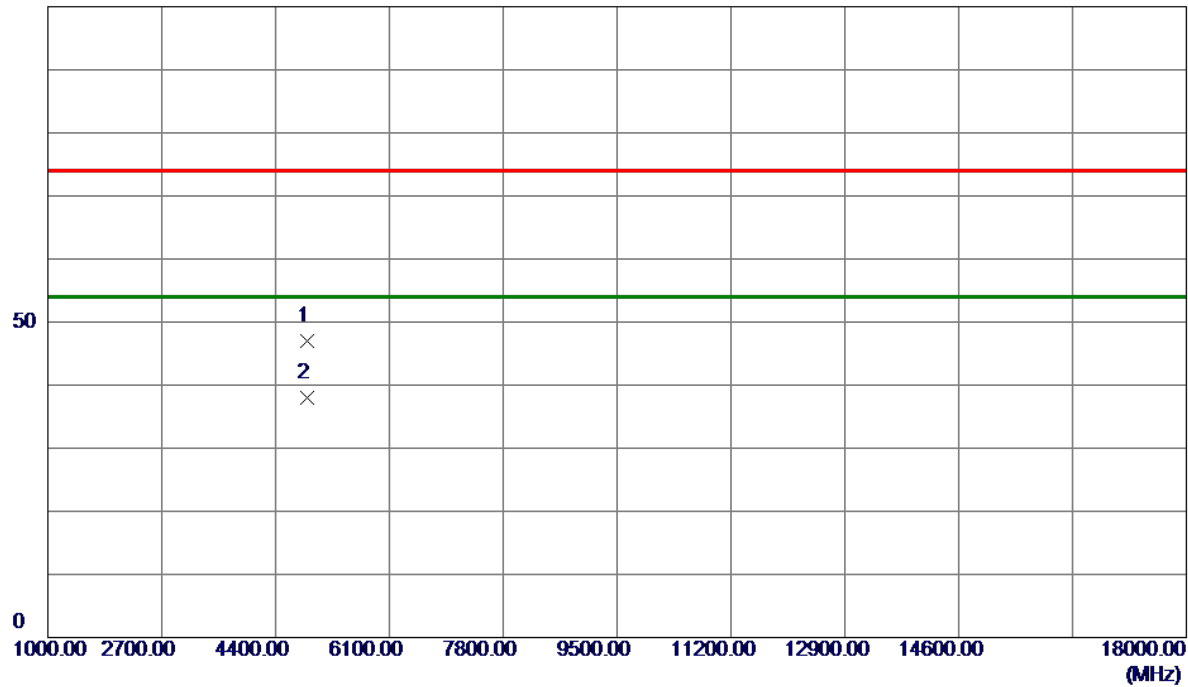


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4873.6250    | 46.03                      | 0.95                    | 46.98                     | 74.00           | -27.02       | Peak     |         |
| 2 * | 4873.7500    | 37.08                      | 0.95                    | 38.03                     | 54.00           | -15.97       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2462 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

120 dBuV/m

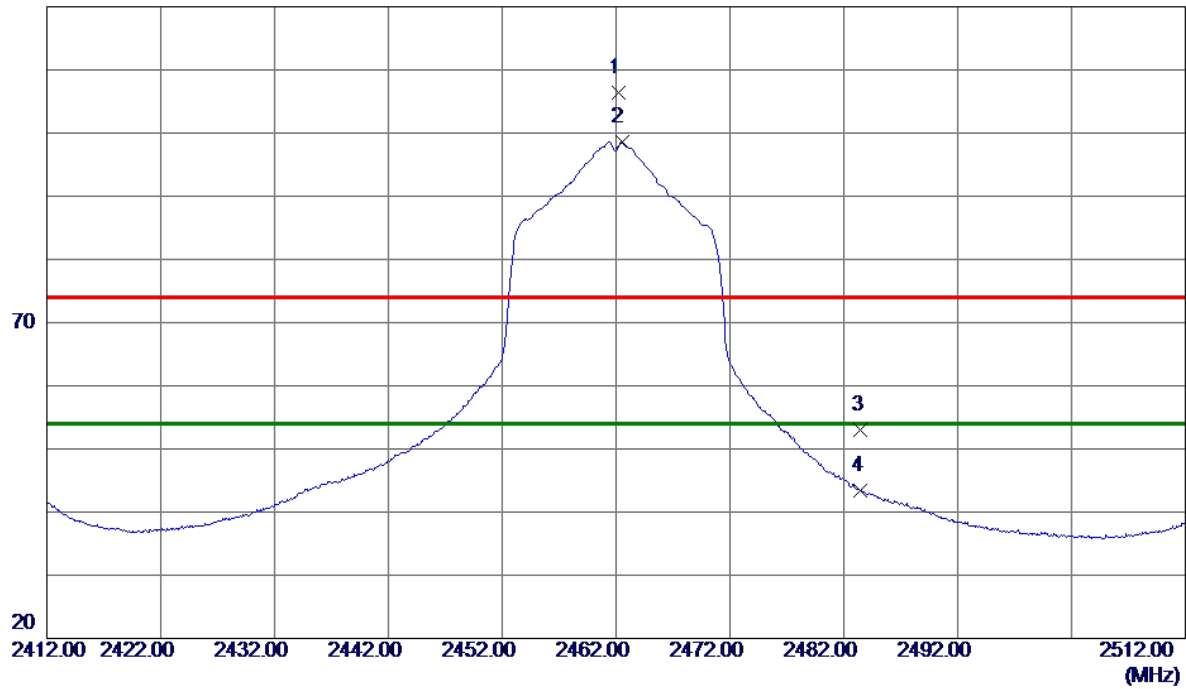


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2462.2500    | 100.20                     | 6.17                    | 106.37                    | 74.00           | 32.37        | Peak     | No Limit |
| 2 * | 2462.5000    | 92.46                      | 6.17                    | 98.63                     | 54.00           | 44.63        | AVG      | No Limit |
| 3   | 2483.5000    | 46.81                      | 6.17                    | 52.98                     | 74.00           | -21.02       | Peak     |          |
| 4   | 2483.5000    | 37.21                      | 6.17                    | 43.38                     | 54.00           | -10.62       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT20) Mode 2462 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

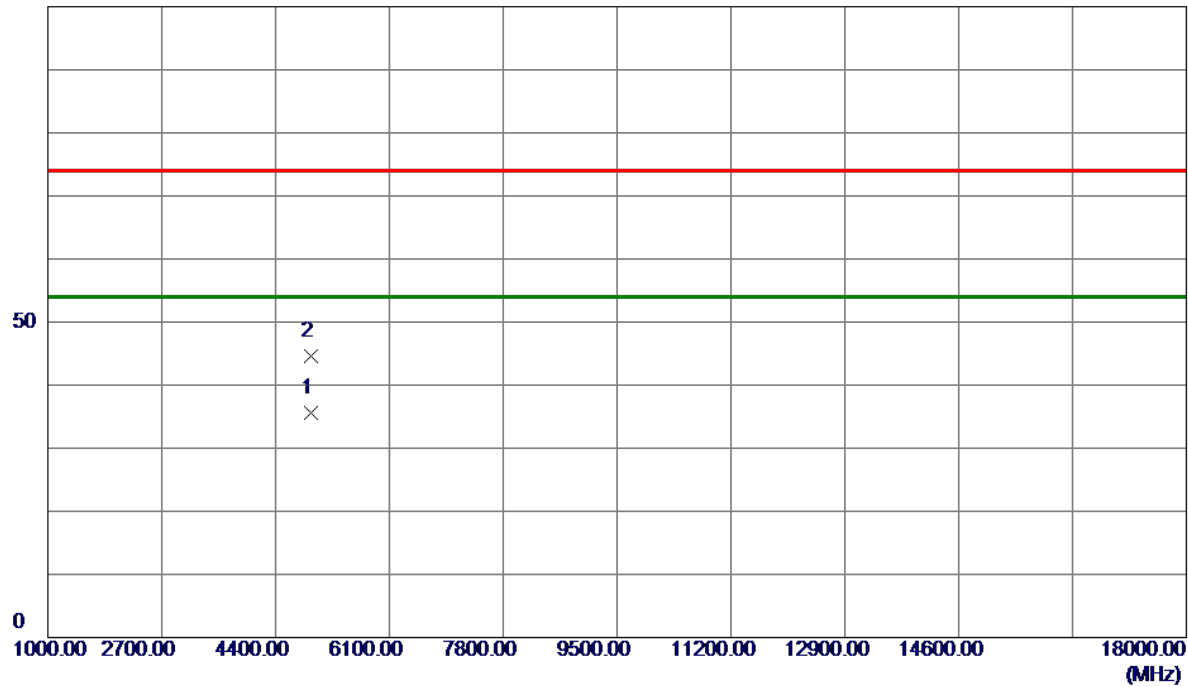


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4923.6500    | 34.47                      | 1.08                    | 35.55                     | 54.00           | -18.45       | AVG      |         |
| 2   | 4924.9000    | 43.45                      | 1.08                    | 44.53                     | 74.00           | -29.47       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2422 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

120 dBuV/m

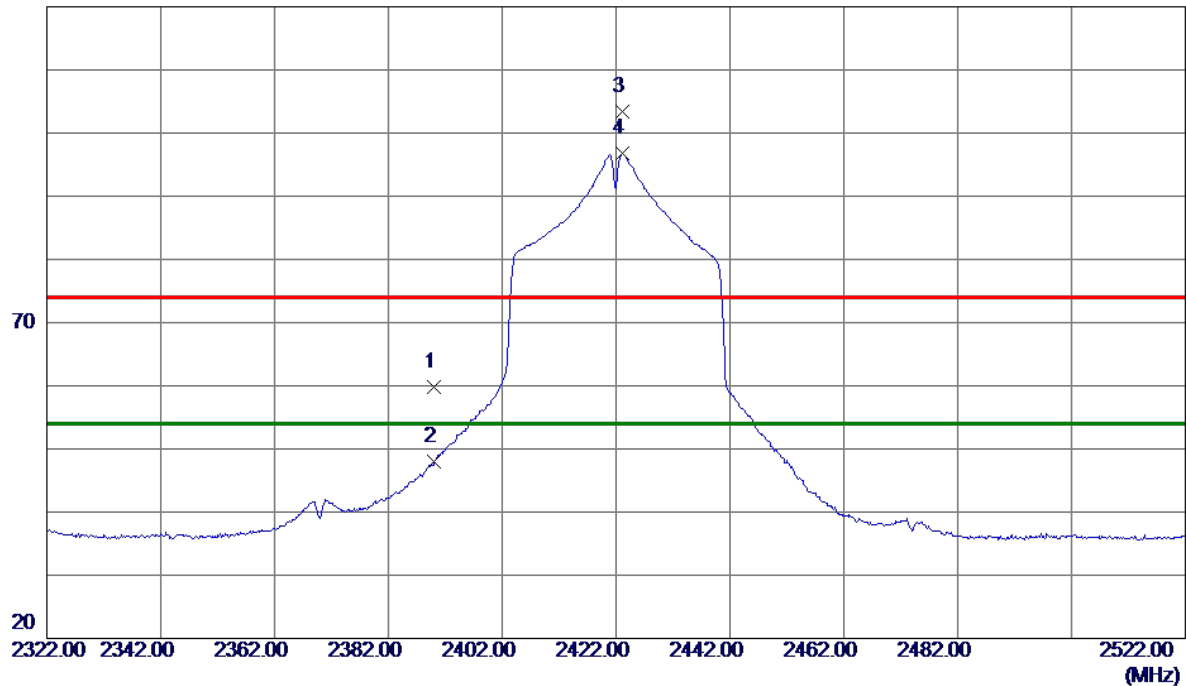


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 53.75                      | 6.14                    | 59.89                     | 74.00           | -14.11       | Peak     |          |
| 2   | 2390.0000    | 41.80                      | 6.14                    | 47.94                     | 54.00           | -6.06        | AVG      |          |
| 3   | 2423.2000    | 97.32                      | 6.16                    | 103.48                    | 74.00           | 29.48        | Peak     | No Limit |
| 4 * | 2423.2000    | 90.57                      | 6.16                    | 96.73                     | 54.00           | 42.73        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2422 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

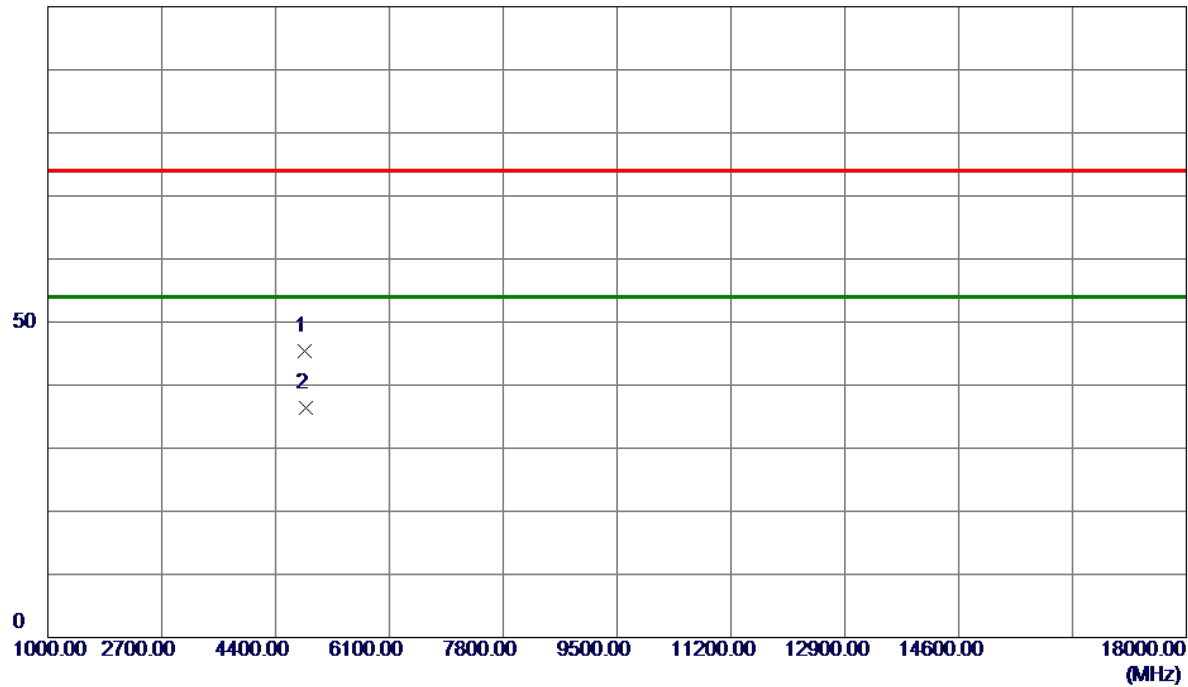


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4842.5750    | 44.58                      | 0.86                    | 45.44                     | 74.00           | -28.56       | Peak     |         |
| 2 * | 4844.0500    | 35.54                      | 0.87                    | 36.41                     | 54.00           | -17.59       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

120 dBuV/m

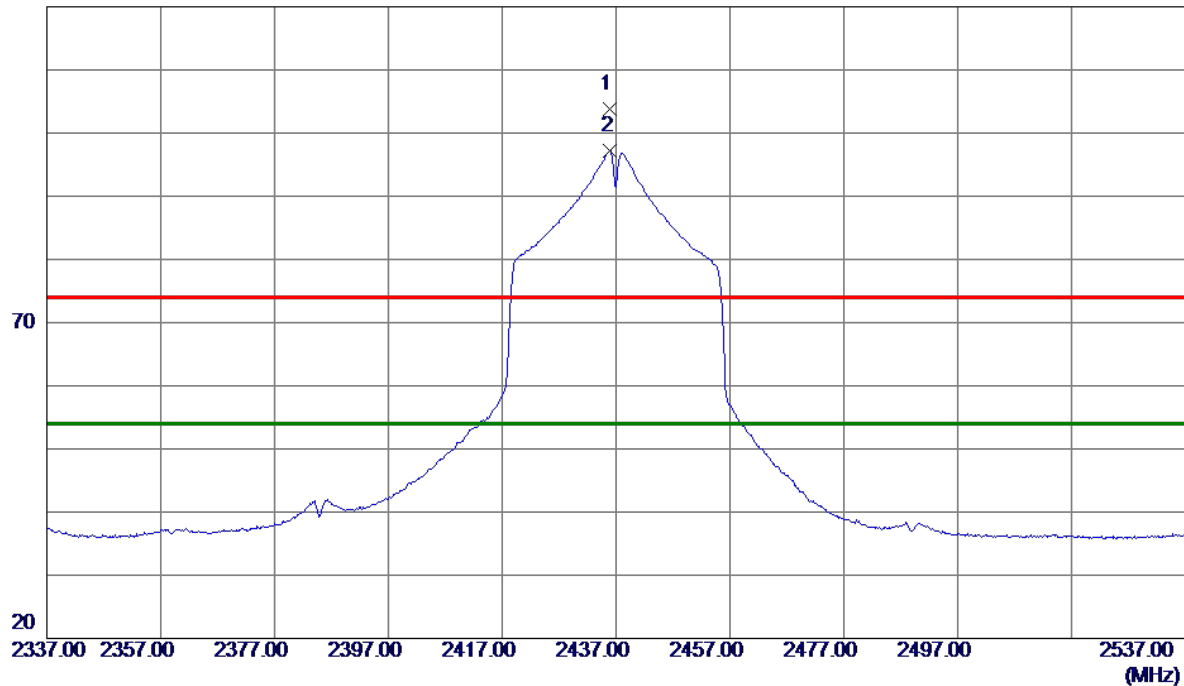


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2435.9000    | 97.72                      | 6.16                    | 103.88                    | 74.00           | 29.88        | Peak     | No Limit |
| 2 * | 2436.0000    | 91.04                      | 6.16                    | 97.20                     | 54.00           | 43.20        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2437 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

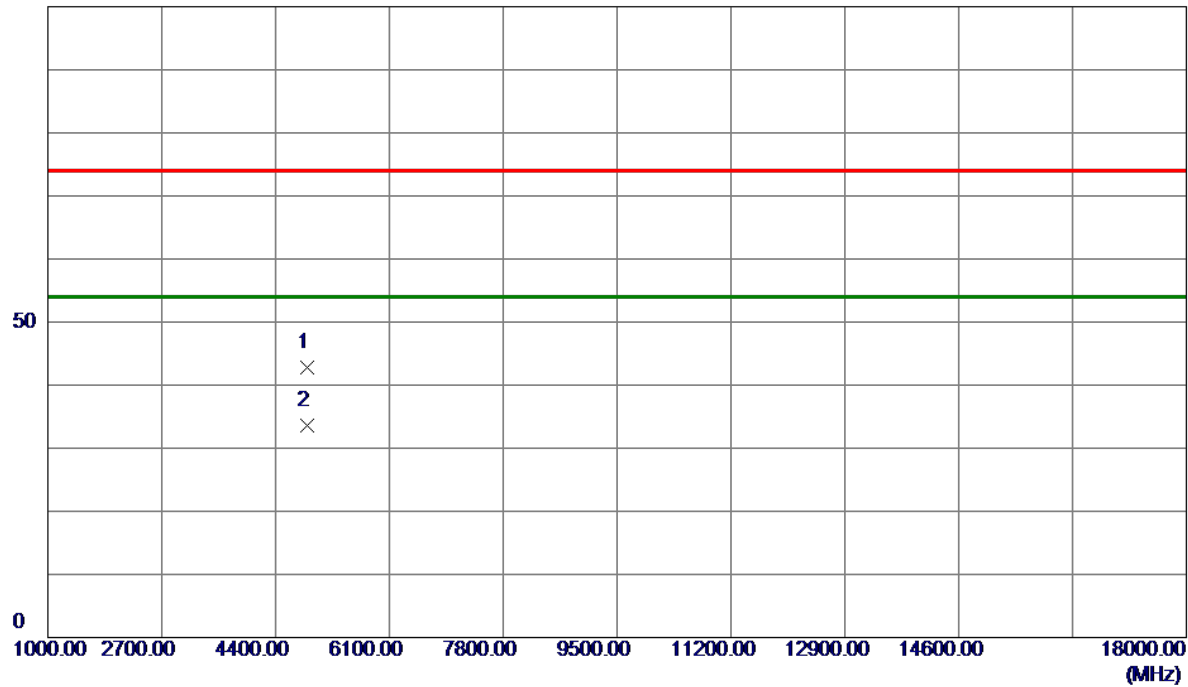


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4873.4500    | 41.81                      | 0.94                    | 42.75                     | 74.00           | -31.25       | Peak     |         |
| 2   | 4874.1000    | 32.71                      | 0.95                    | 33.66                     | 74.00           | -40.34       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2452 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

120 dBuV/m

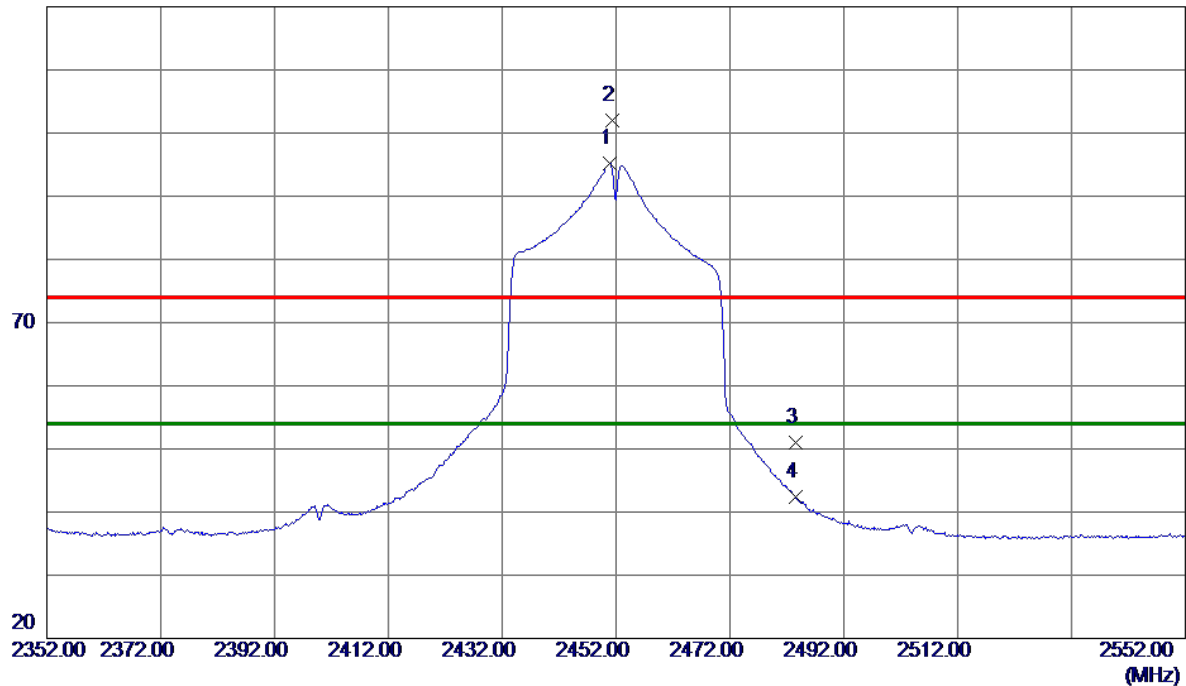


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1 * | 2450.9000    | 88.99                      | 6.16                    | 95.15                     | 54.00           | 41.15        | AVG      | No Limit |
| 2   | 2451.3000    | 95.78                      | 6.16                    | 101.94                    | 74.00           | 27.94        | Peak     | No Limit |
| 3   | 2483.5000    | 44.80                      | 6.17                    | 50.97                     | 74.00           | -23.03       | Peak     |          |
| 4   | 2483.5000    | 36.32                      | 6.17                    | 42.49                     | 54.00           | -11.51       | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                          |              |          |
|-----------|--------------------------|--------------|----------|
| Test Mode | TX N(HT40) Mode 2452 MHz | Polarization | Vertical |
|-----------|--------------------------|--------------|----------|

100 dBuV/m

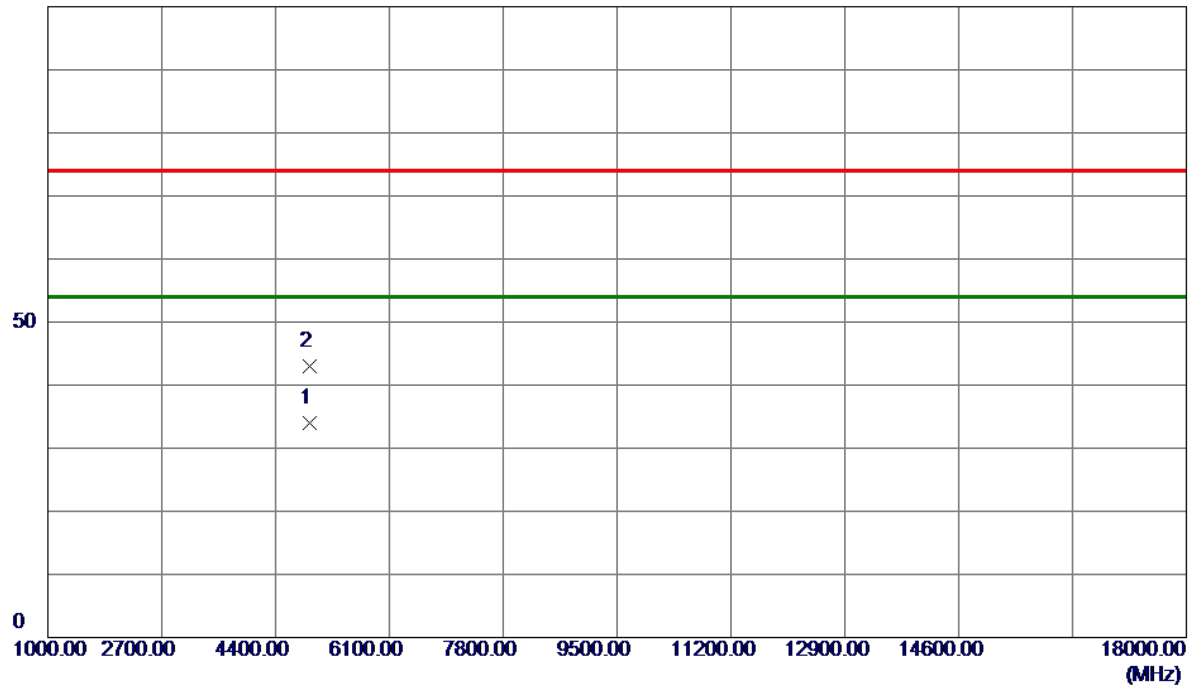


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4903.8250    | 33.03                      | 1.03                    | 34.06                     | 54.00           | -19.94       | AVG      |         |
| 2   | 4904.4750    | 42.02                      | 1.03                    | 43.05                     | 74.00           | -30.95       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | TX AX(HE20) Mode 2412 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

120 dBuV/m

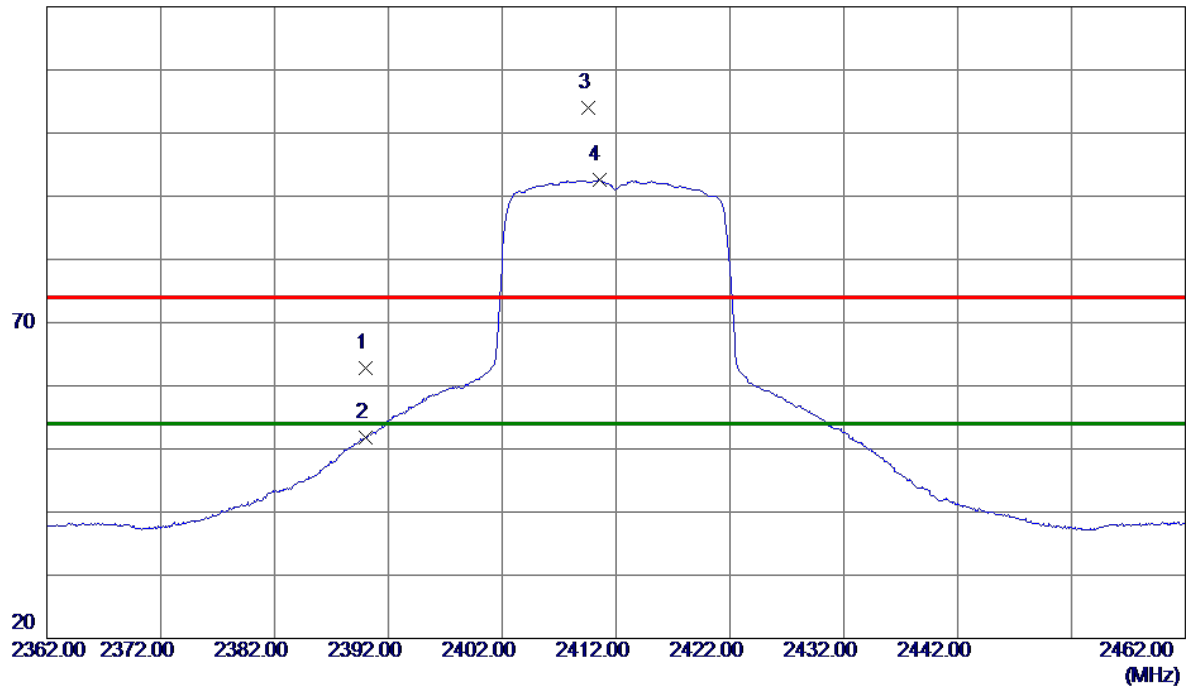


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2390.0000    | 56.73                      | 6.14                    | 62.87                     | 74.00           | -11.13       | Peak     |          |
| 2   | 2390.0000    | 45.66                      | 6.14                    | 51.80                     | 54.00           | -2.20        | AVG      |          |
| 3   | 2409.6000    | 97.80                      | 6.15                    | 103.95                    | 74.00           | 29.95        | Peak     | No Limit |
| 4 * | 2410.5000    | 86.36                      | 6.15                    | 92.51                     | 54.00           | 38.51        | AVG      | No Limit |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | TX AX(HE20) Mode 2412 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

100 dBuV/m

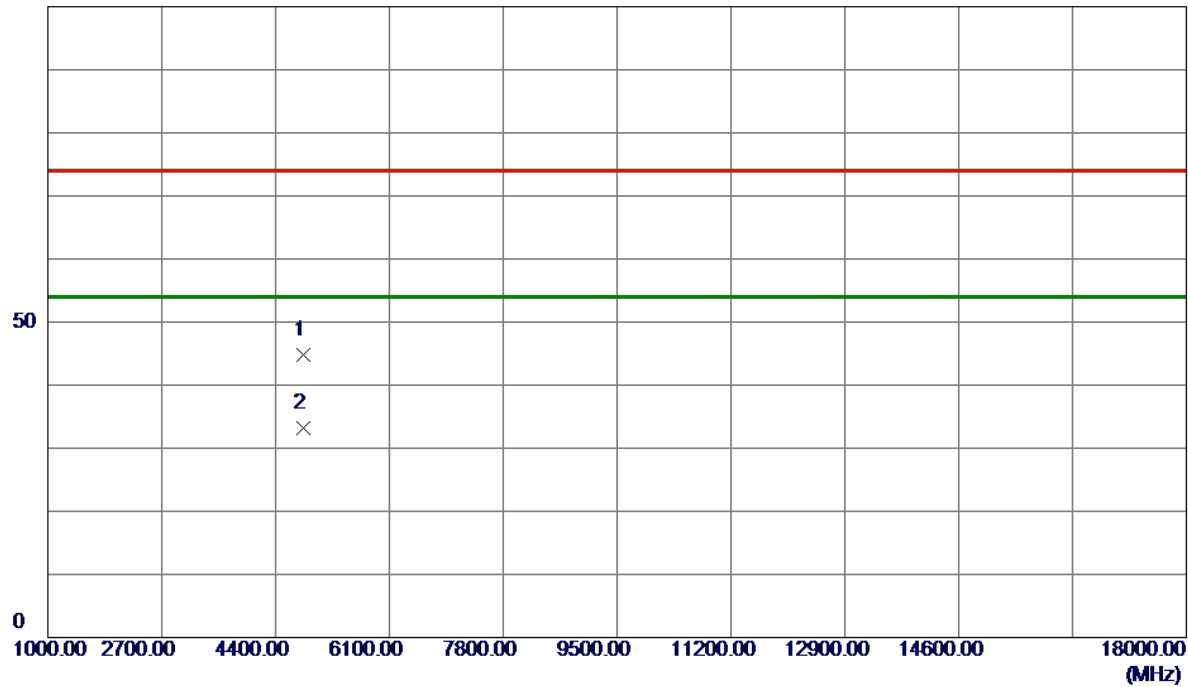


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4822.4500    | 44.00                      | 0.81                    | 44.81                     | 74.00           | -29.19       | Peak     |         |
| 2 * | 4823.8250    | 32.38                      | 0.81                    | 33.19                     | 54.00           | -20.81       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | TX AX(HE20) Mode 2437 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

120 dBuV/m

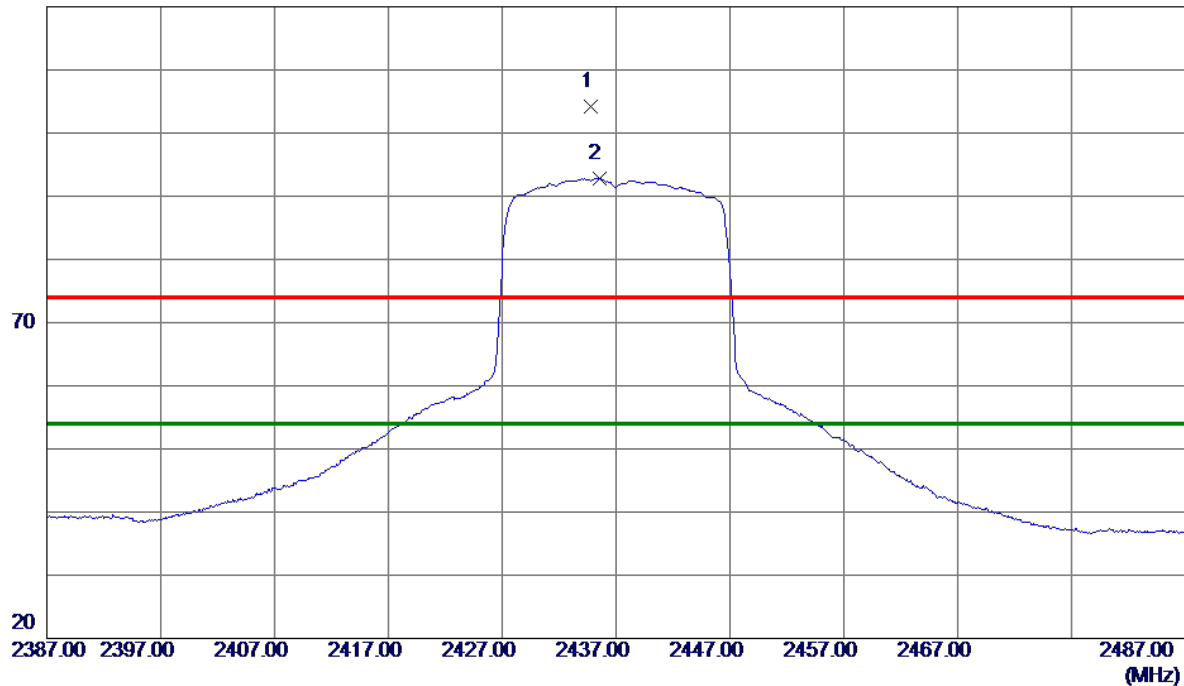

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2434.7500    | 98.02                      | 6.16                    | 104.18                    | 74.00           | 30.18        | Peak     | No Limit |
| 2 * | 2435.5000    | 86.72                      | 6.16                    | 92.88                     | 54.00           | 38.88        | AVG      | No Limit |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | TX AX(HE20) Mode 2437 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

100 dBuV/m

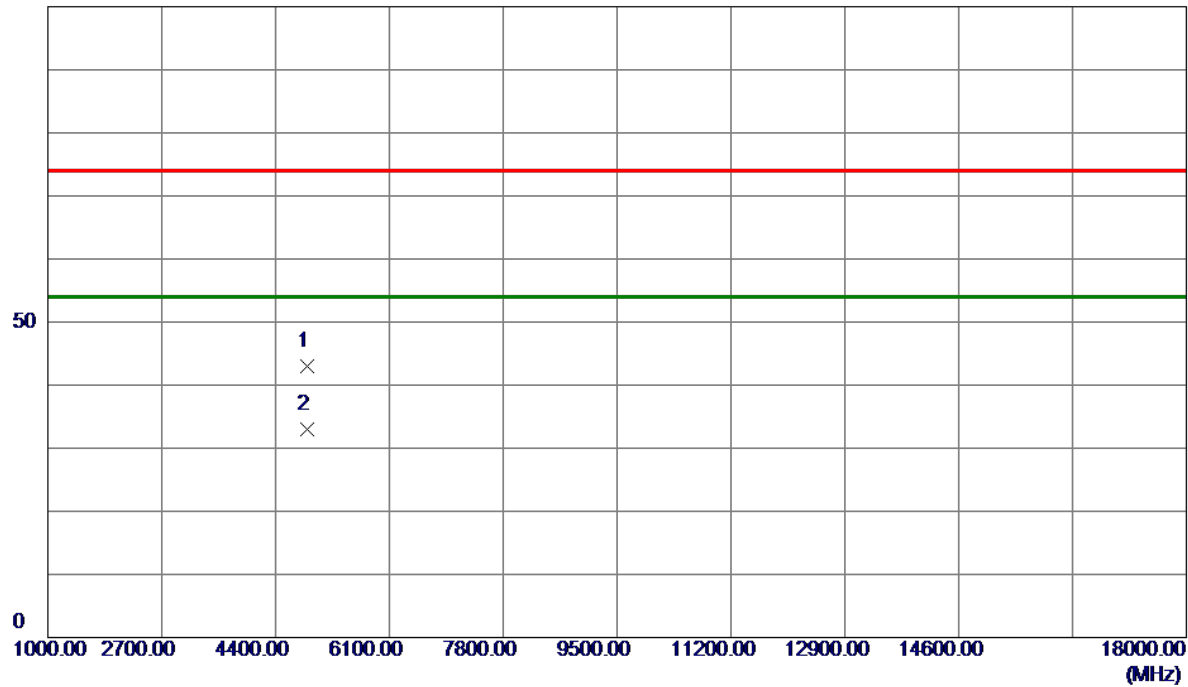

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 4872.4500    | 42.10                      | 0.94                    | 43.04                     | 74.00           | -30.96       | Peak     |         |
| 2 * | 4872.7000    | 32.10                      | 0.94                    | 33.04                     | 54.00           | -20.96       | AVG      |         |


## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | TX AX(HE20) Mode 2462 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

120 dBuV/m

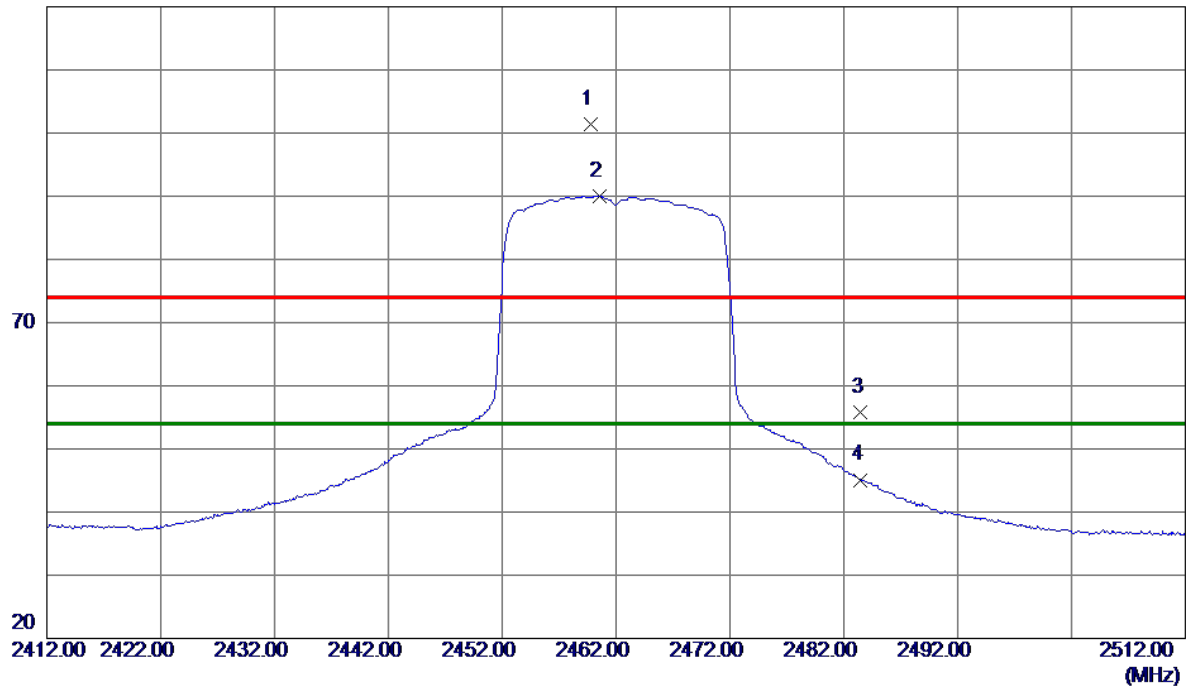


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment  |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|----------|
| 1   | 2459.7500    | 95.28                      | 6.17                    | 101.45                    | 74.00           | 27.45        | Peak     | No Limit |
| 2 * | 2460.5500    | 83.83                      | 6.17                    | 90.00                     | 54.00           | 36.00        | AVG      | No Limit |
| 3   | 2483.5000    | 49.58                      | 6.17                    | 55.75                     | 74.00           | -18.25       | Peak     |          |
| 4   | 2483.5000    | 38.93                      | 6.17                    | 45.10                     | 54.00           | -8.90        | AVG      |          |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                           |              |          |
|-----------|---------------------------|--------------|----------|
| Test Mode | TX AX(HE20) Mode 2462 MHz | Polarization | Vertical |
|-----------|---------------------------|--------------|----------|

100 dBuV/m

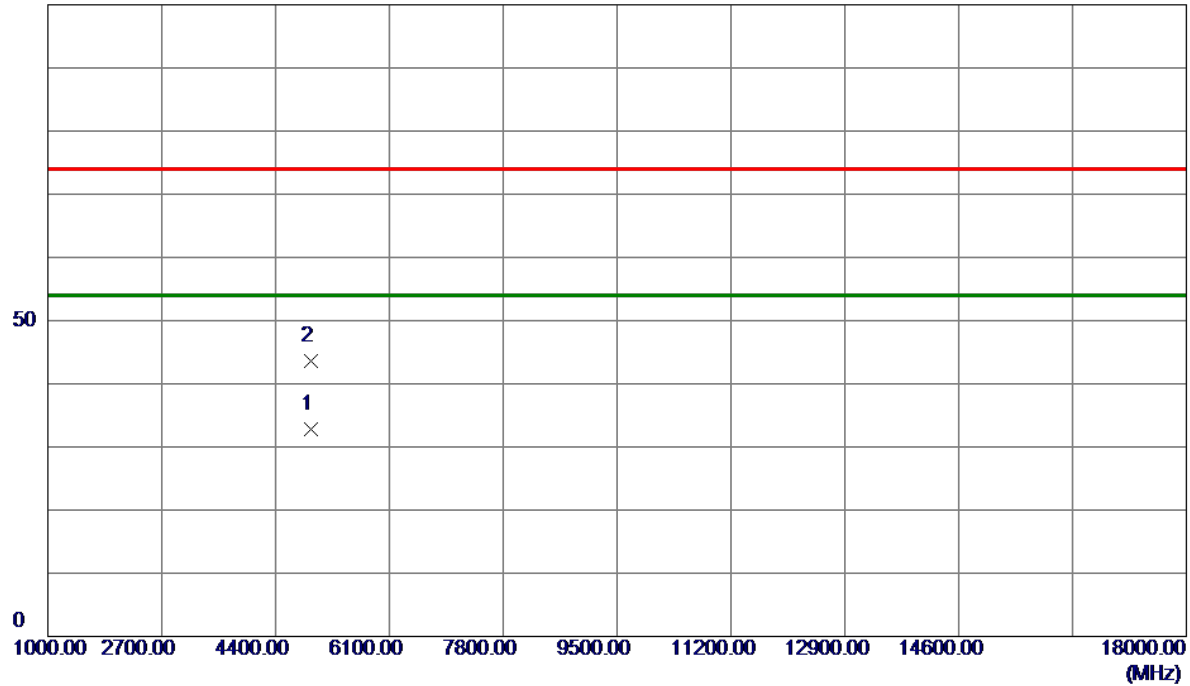


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 4923.9250    | 31.68                      | 1.08                    | 32.76                     | 54.00           | -21.24       | AVG      |         |
| 2   | 4926.1750    | 42.56                      | 1.08                    | 43.64                     | 74.00           | -30.36       | Peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |          |
|-----------|--------------------|--------------|----------|
| Test Mode | TX B Mode 2462 MHz | Polarization | Vertical |
|-----------|--------------------|--------------|----------|

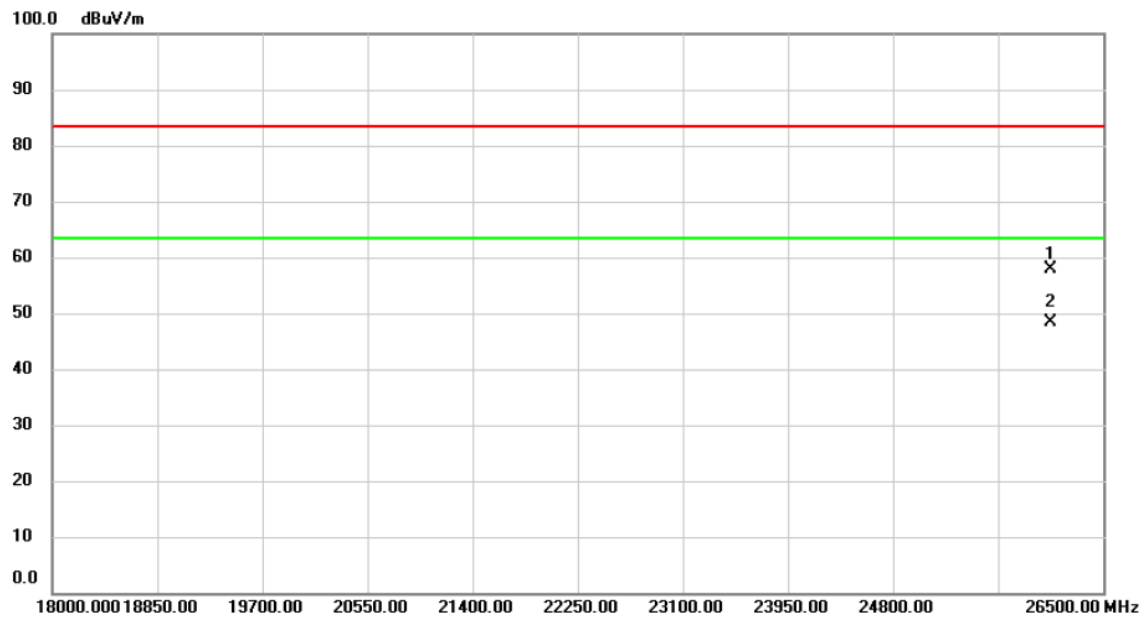


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 26079.25     | 47.84                    | 9.93                    | 57.77                      | 83.50           | -25.73       | peak     |         |
| 2   | *   | 26079.25     | 38.55                    | 9.93                    | 48.48                      | 63.50           | -15.02       | AVG      |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|           |                    |              |            |
|-----------|--------------------|--------------|------------|
| Test Mode | TX B Mode 2462 MHz | Polarization | Horizontal |
|-----------|--------------------|--------------|------------|

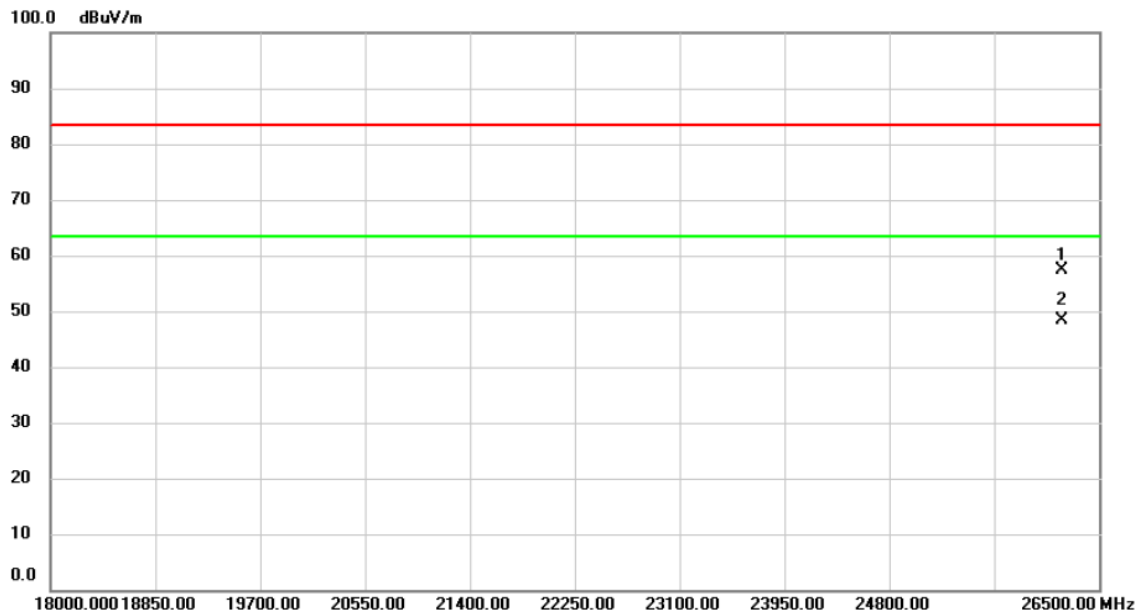

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   |     | 26194.00 | 47.59         | 9.90           | 57.49       | 83.50  | -26.01 | peak     |         |
| 2   | *   | 26194.00 | 38.58         | 9.90           | 48.48       | 63.50  | -15.02 | AVG      |         |

## REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

## APPENDIX E - BANDWIDTH

|           |           |
|-----------|-----------|
| Test Mode | TX B Mode |
|-----------|-----------|


| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | 99 % Occupied Bandwidth (MHz) | 6 dB Bandwidth Min. Limit (MHz) | Result   |
|---------|-----------------|----------------------|-------------------------------|---------------------------------|----------|
| 01      | 2412            | 10.060               | 15.440                        | 0.5                             | Complies |
| 06      | 2437            | 10.060               | 15.440                        | 0.5                             | Complies |
| 11      | 2462            | 10.060               | 15.360                        | 0.5                             | Complies |

CH01

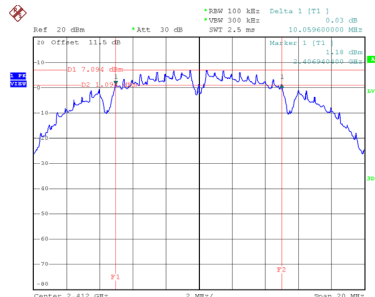


Date: 24.JUN.2024 17:33:11

CH06  
6 dB Bandwidth

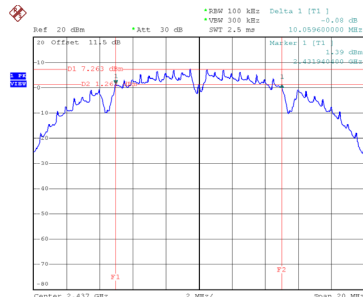


Date: 24.JUN.2024 17:35:15

CH11

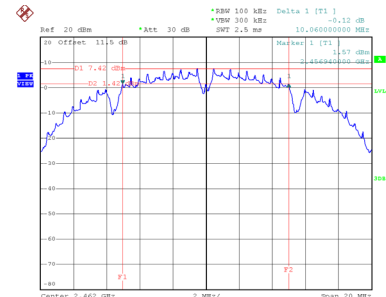


Date: 24.JUN.2024 17:36:56


99 % Occupied Bandwidth

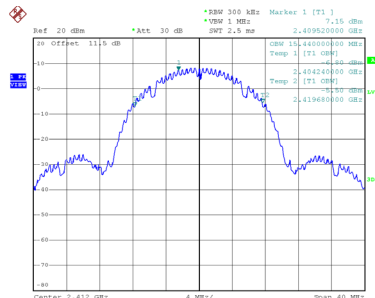

Date: 24.JUN.2024 17:33:18

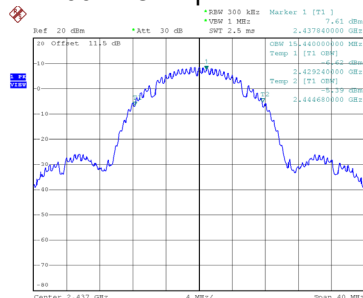

Date: 24.JUN.2024 17:35:22

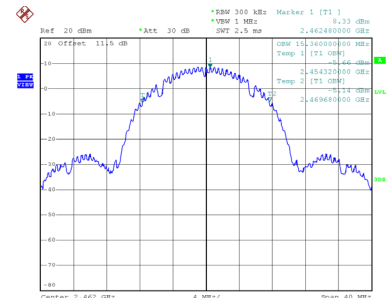

Date: 24.JUN.2024 17:37:04