
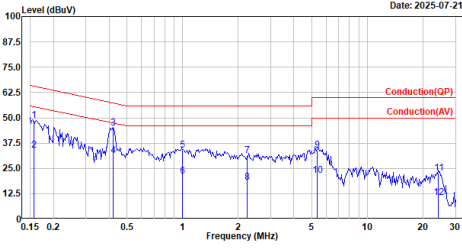
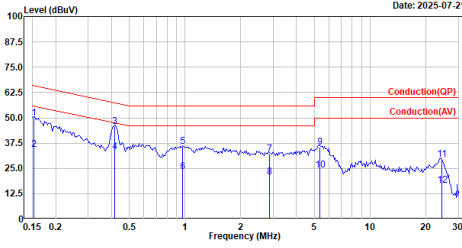


Appendix A. Test Result of AC Power Line Conducted Emission

TX_BLE2M_2440MHz_Line					TX_BLE2M_2440MHz_Neutral				
Site :HY-SR01 Condition :Line Mode :TX_BLE2M_2440MHz test by :Ryan  Date: 2025-07-21					Site :HY-SR01 Condition :Neutral Mode :TX_BLE2M_2440MHz test by :Ryan  Date: 2025-07-21				
No.	Frequency	Level	Limit	Over	Read	Factor	Remark		
	MHz	dBuV	dBuV	dB	dBuV	dB			
1	0.158	48.82	65.58	-16.76	39.18	9.64	QP		
2	0.158	33.81	55.58	-21.77	24.17	9.64	Average		
3	0.420	44.96	57.45	-12.49	35.31	9.65	QP		
4	0.420	31.40	47.45	-16.05	21.75	9.65	Average		
5	0.998	33.87	56.00	-22.13	24.18	9.69	QP		
6	0.998	21.31	46.00	-24.69	11.62	9.69	Average		
7	2.229	31.44	56.00	-24.56	21.64	9.80	QP		
8	2.229	18.26	46.00	-27.74	8.46	9.80	Average		
9	5.362	34.10	60.00	-25.90	23.98	10.12	QP		
10	5.362	21.36	50.00	-28.64	11.24	10.12	Average		
11	24.252	22.49	60.00	-37.51	12.64	9.85	QP		
12	24.252	10.57	50.00	-39.43	0.72	9.85	Average		
Note: 1. Level = Read Level + Factor 2. Factor = LISN insertion loss + Cable loss 3. Over Limit = Level - Limit Line									
No.	Frequency	Level	Limit	Over	Read	Factor	Remark		
	MHz	dBuV	dBuV	dB	dBuV	dB			
1	0.152	49.94	65.89	-15.95	40.32	9.62	QP		
2	0.152	34.36	55.89	-21.53	24.74	9.62	Average		
3	0.419	45.75	57.47	-11.72	36.12	9.63	QP		
4	0.419	33.11	47.47	-14.36	23.68	9.63	Average		
5	0.973	35.90	56.00	-20.10	26.23	9.67	QP		
6	0.973	23.29	46.00	-22.71	13.62	9.67	Average		
7	2.848	31.93	56.00	-24.07	22.05	9.88	QP		
8	2.848	20.61	46.00	-25.39	10.73	9.88	Average		
9	5.364	35.65	60.00	-24.35	25.54	10.11	QP		
10	5.364	24.07	50.00	-25.93	13.96	10.11	Average		
11	24.389	29.46	60.00	-30.54	19.47	9.99	QP		
12	24.389	16.46	50.00	-33.54	6.47	9.99	Average		
Note: 1. Level = Read Level + Factor 2. Factor = LISN insertion loss + Cable loss 3. Over Limit = Level - Limit Line									

Appendix B. Test Result of 6dB Bandwidth

Modulation	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
		Ant. 1		
GFSK (1Mbps)	2402	0.68	0.50	Pass
	2440	0.68	0.50	Pass
	2480	0.69	0.50	Pass
GFSK (2Mbps)	2402	1.10	0.50	Pass
	2440	1.10	0.50	Pass
	2480	1.10	0.50	Pass

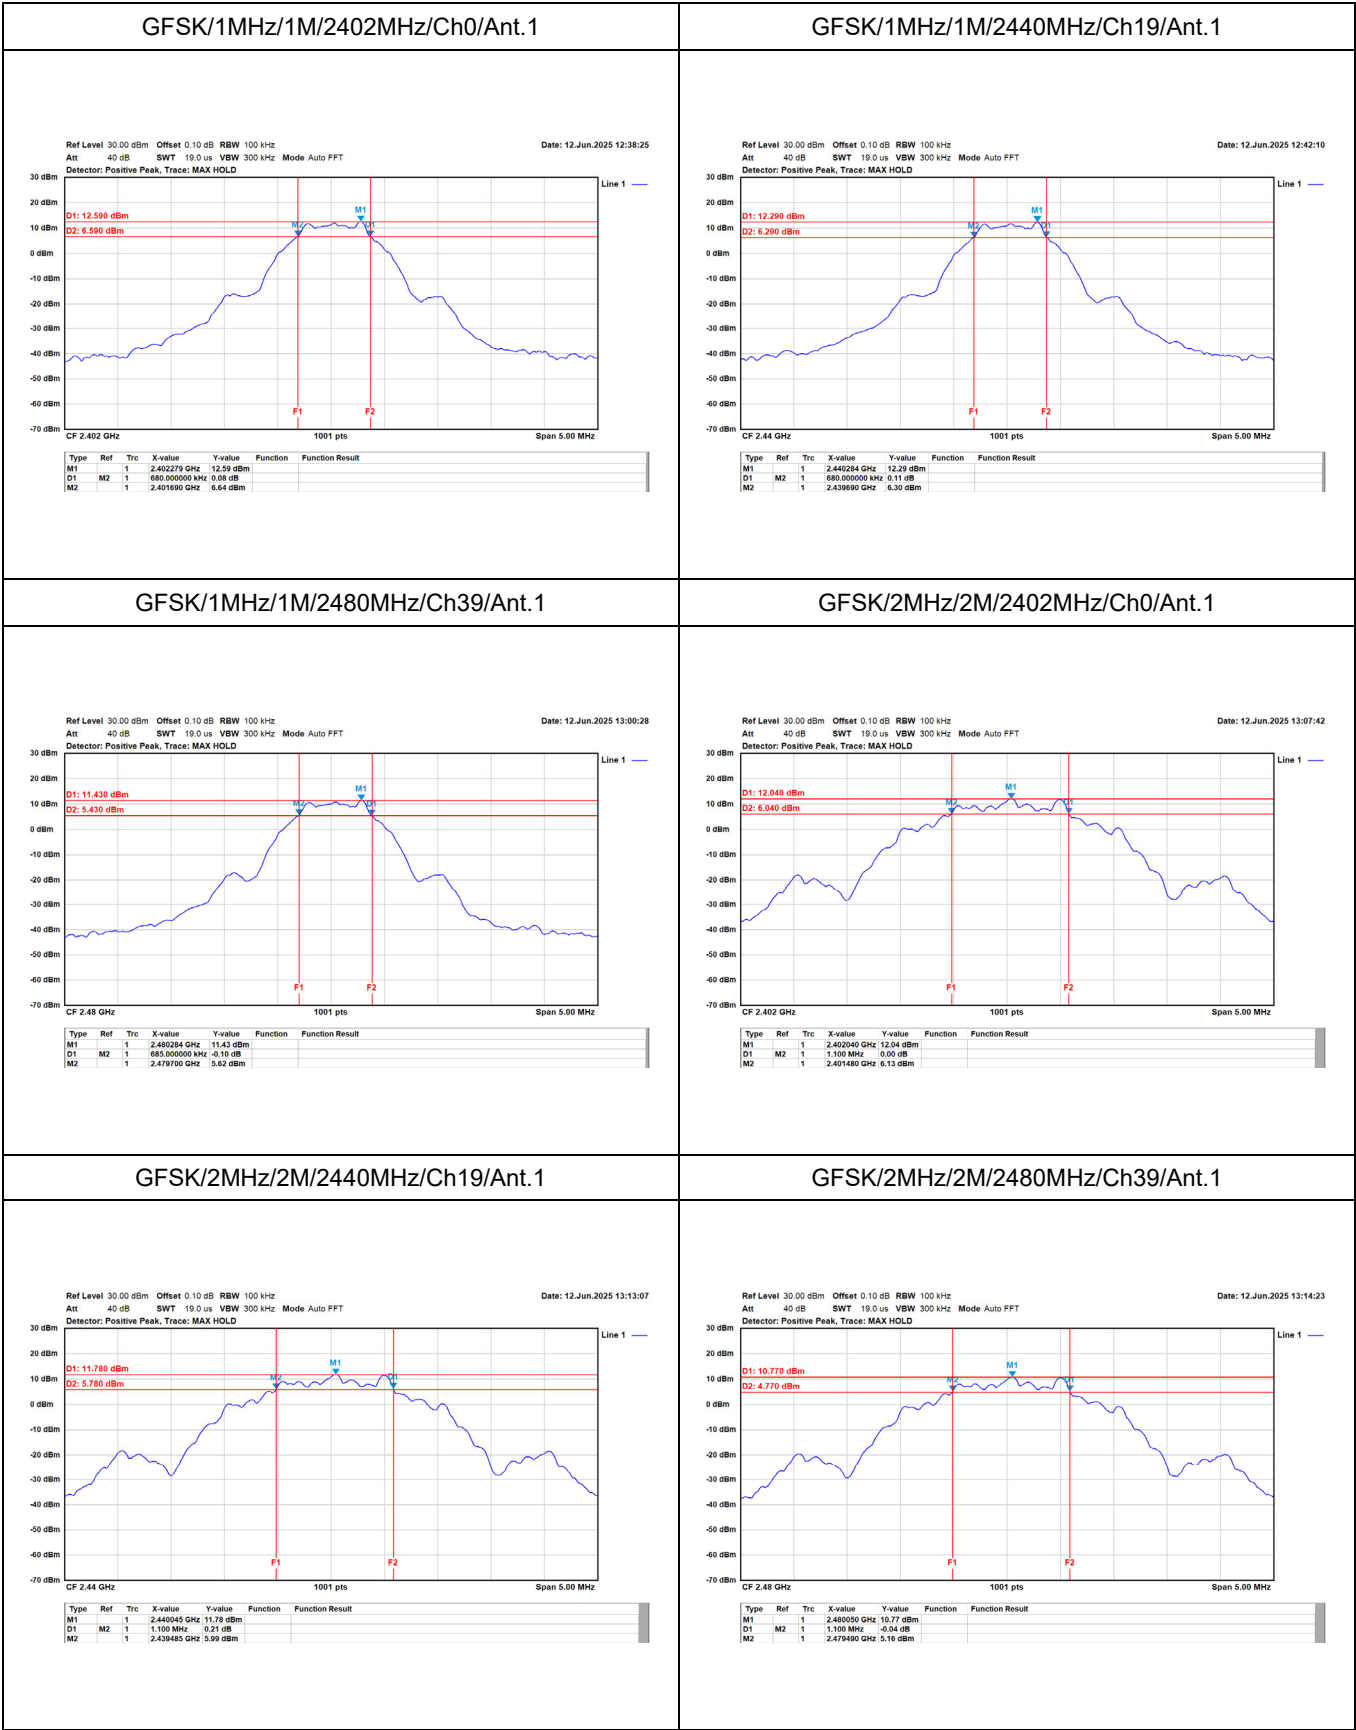


Appendix C. Test Result of Maximum Peak Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)	Limit (dBm)	Result
		Ant. 1		
GFSK (1Mbps)	2402	5.82	30.00	Pass
	2440	5.30	30.00	Pass
	2480	4.13	30.00	Pass
GFSK (2Mbps)	2402	5.76	30.00	Pass
	2440	5.27	30.00	Pass
	2480	4.14	30.00	Pass


Appendix D. Test Result of Power Spectral Density


Modulation	Frequency (MHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
		Ant. 1		
GFSK (1Mbps)	2402	-3.00	8.00	Pass
	2440	-3.57	8.00	Pass
	2480	-4.66	8.00	Pass
GFSK (2Mbps)	2402	-3.97	8.00	Pass
	2440	-4.31	8.00	Pass
	2480	-5.33	8.00	Pass

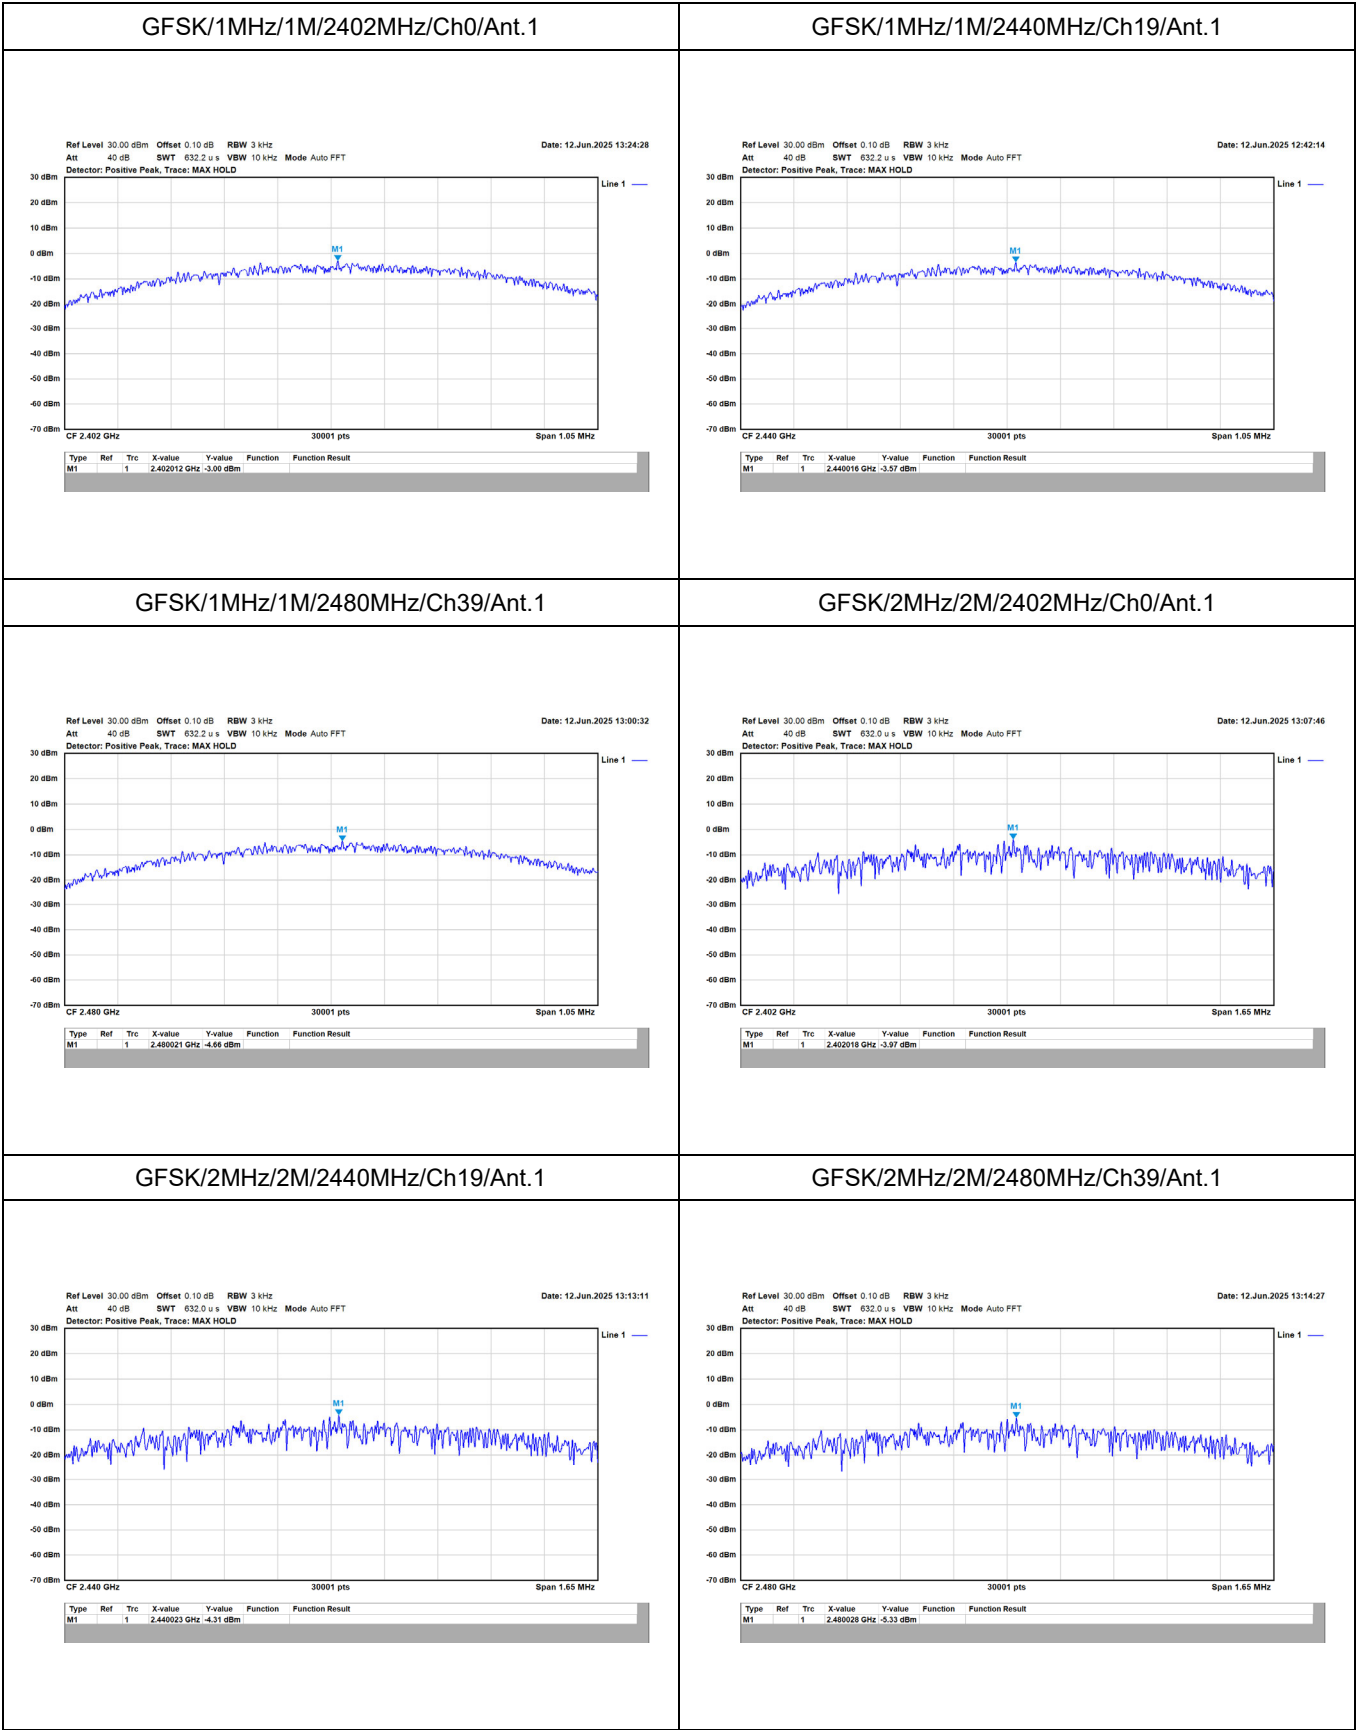


Appendix E. Test Result of Antenna Port Conducted Emission

Modulation	Measurement Level Δ (dB)	Result
GFSK (1 Mbps)	> 20	PASS
GFSK (2 Mbps)	> 20	PASS

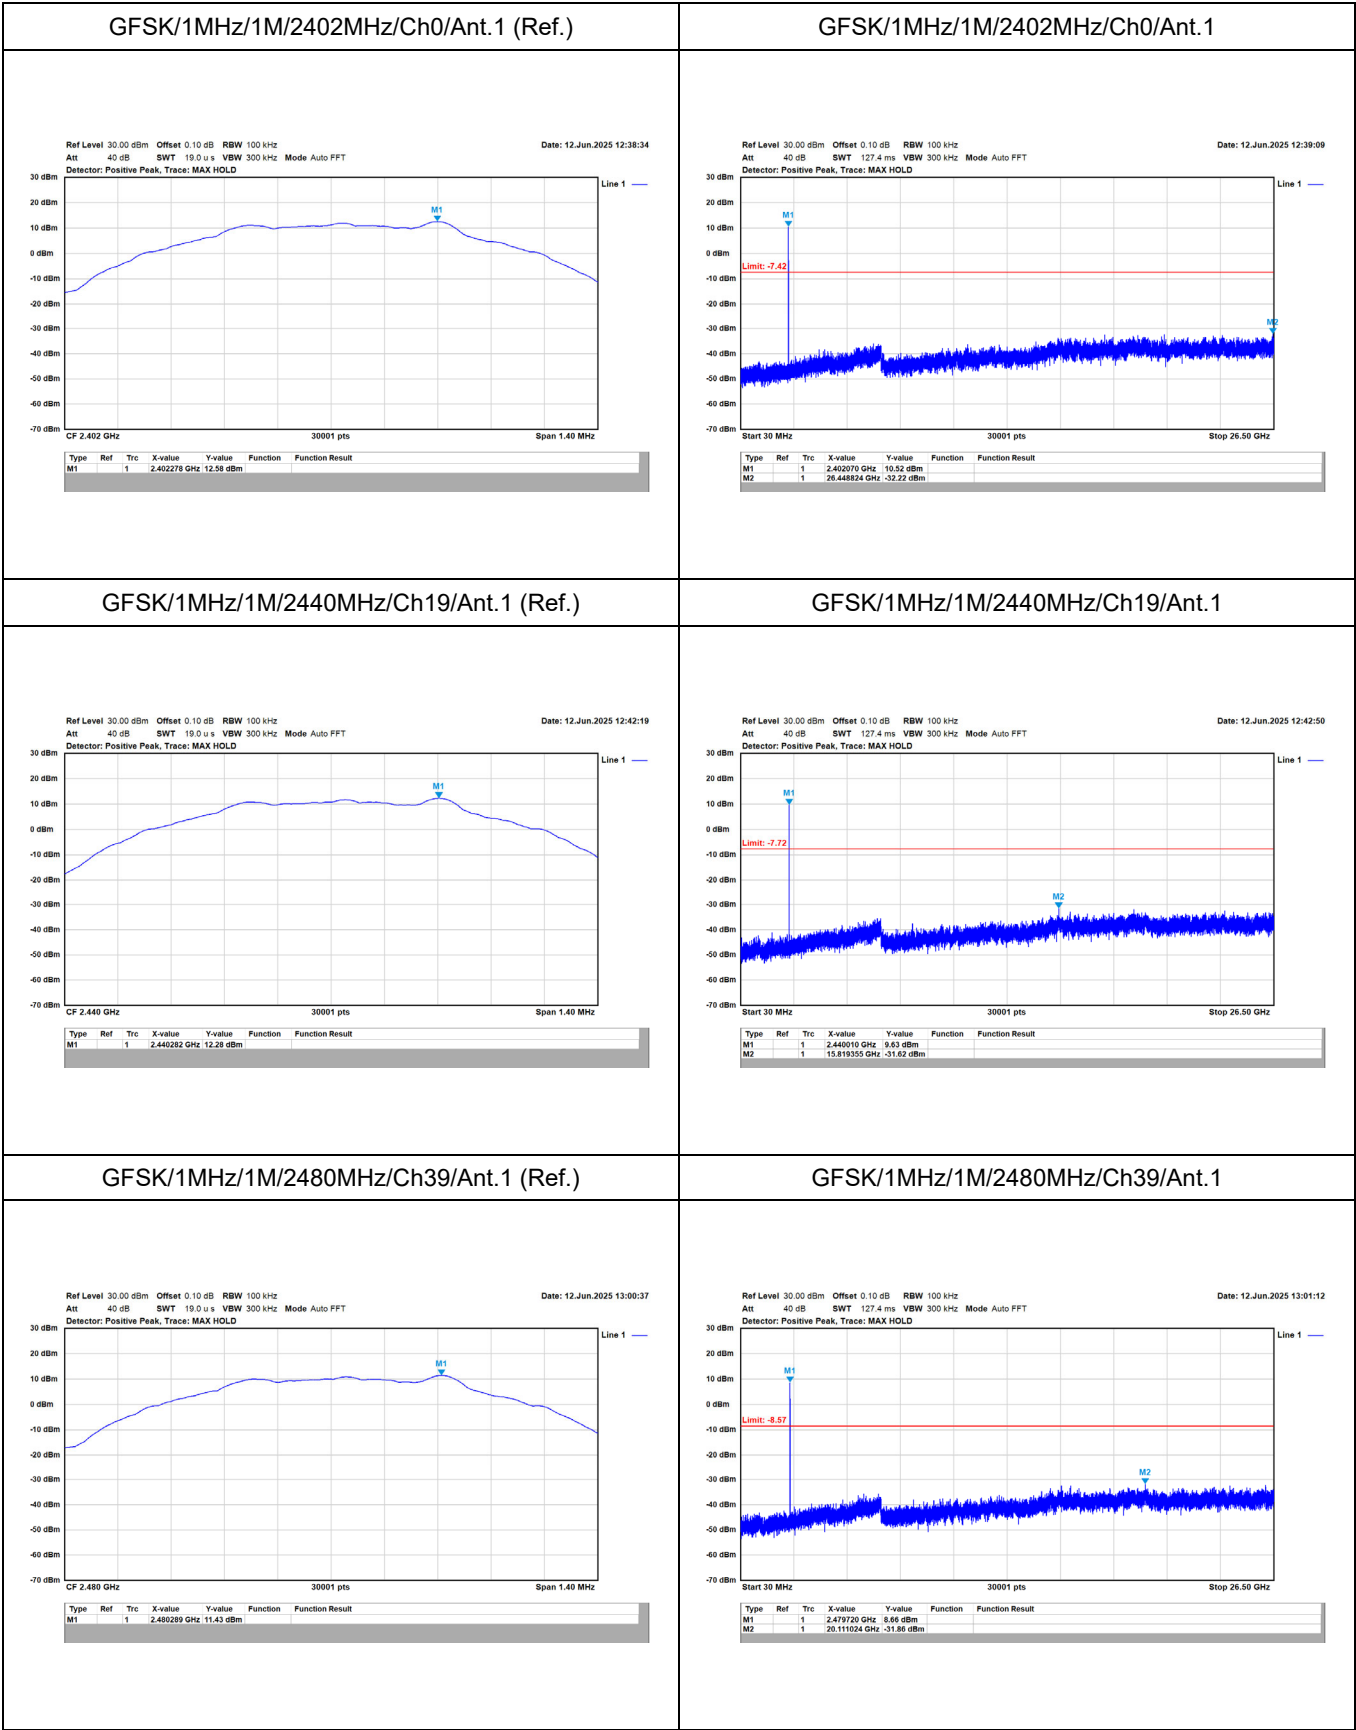


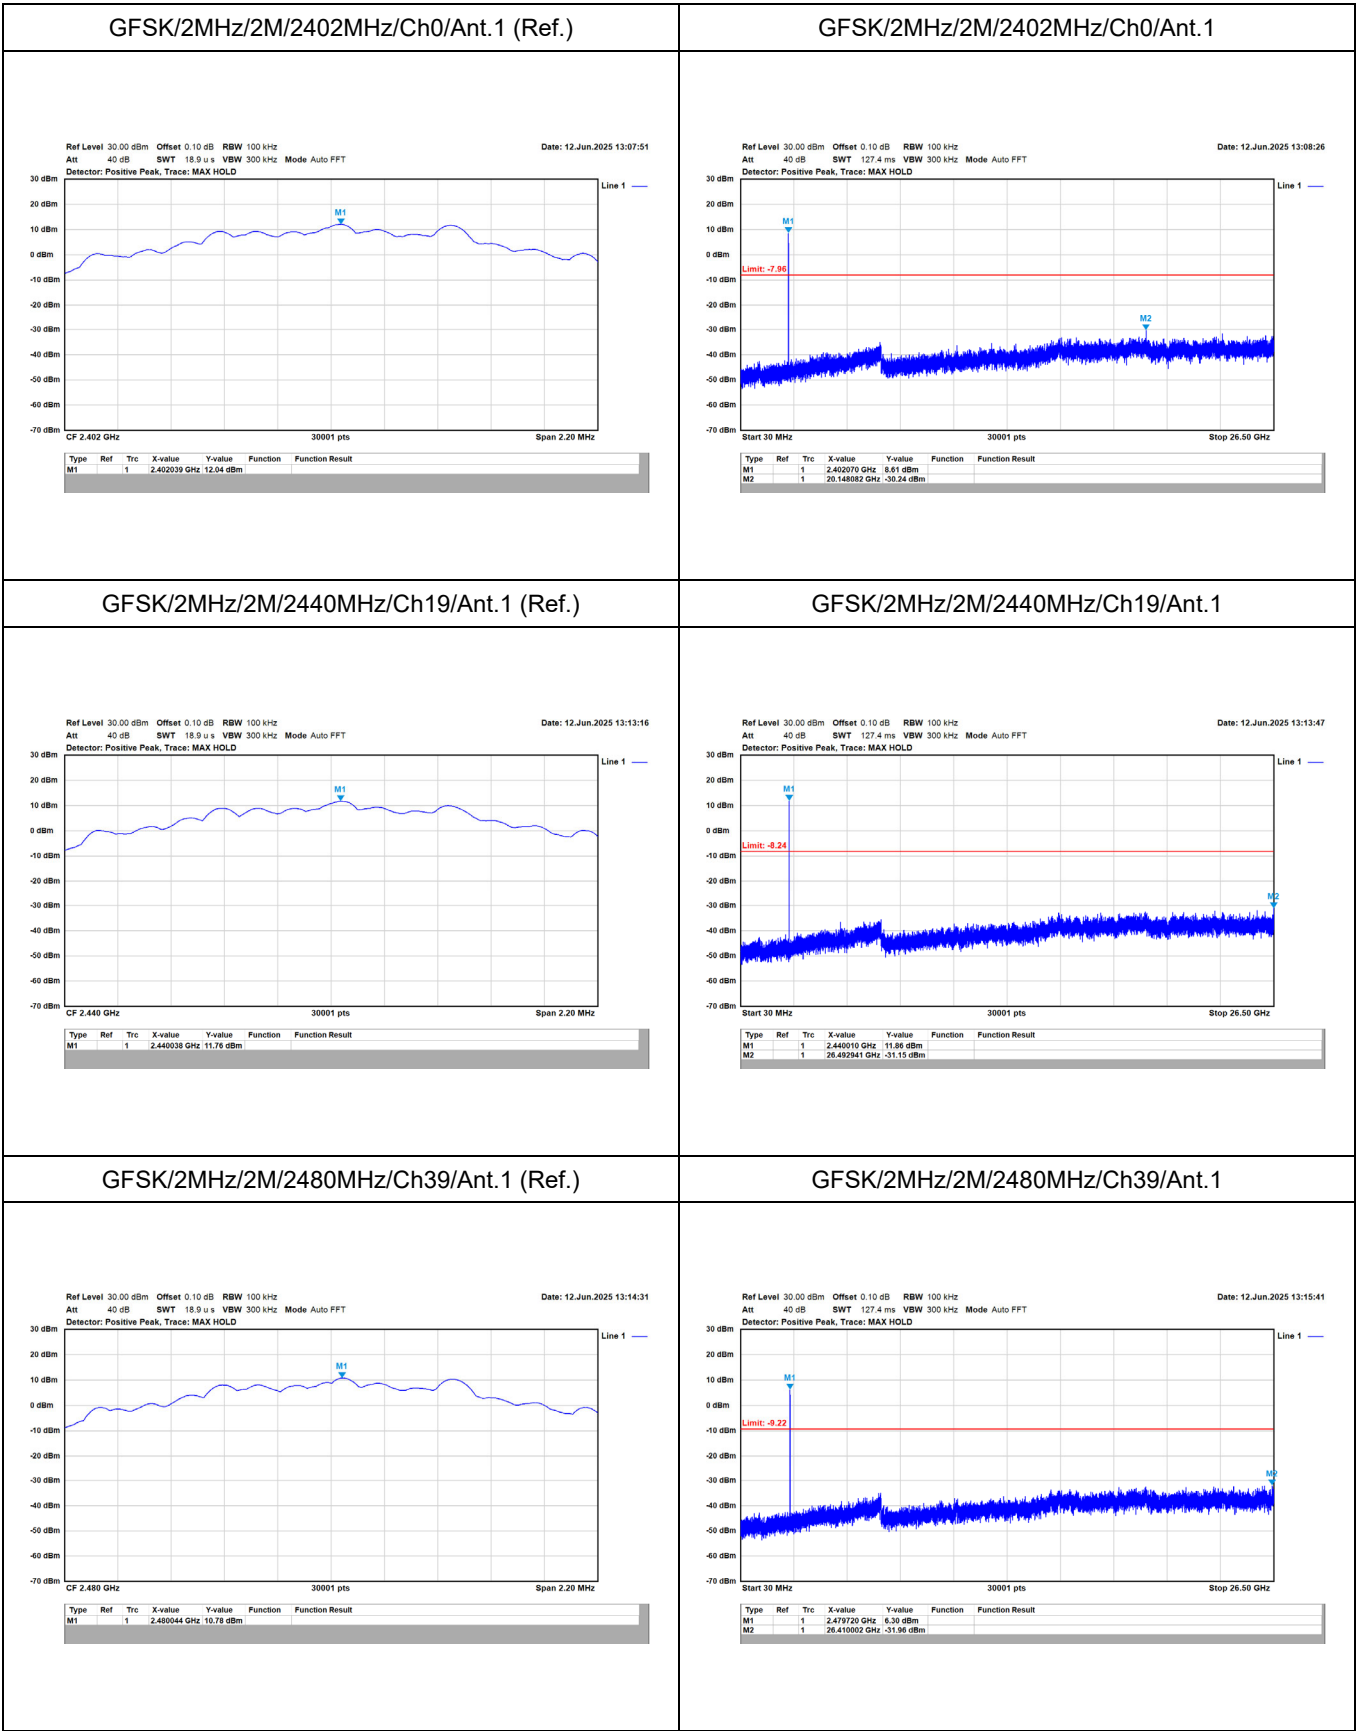


GFSK/1MHz/1M/2402MHz/Ch0/Ant.1(Band Edge)

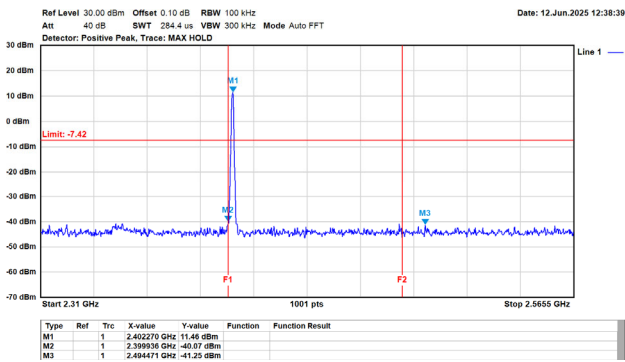


GFSK/1MHz/1M/2480MHz/Ch39/Ant.1(Band Edge)

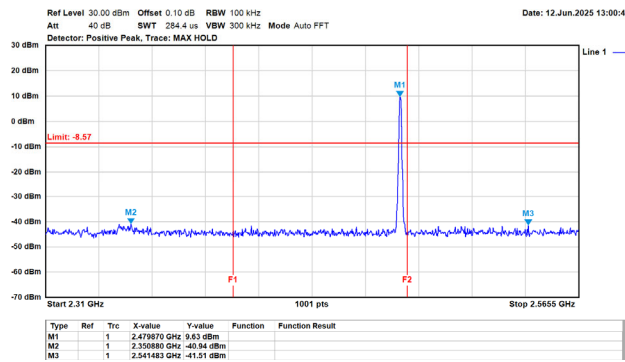

GFSK/2MHz/2M/2402MHz/Ch0/Ant.1(Band Edge)

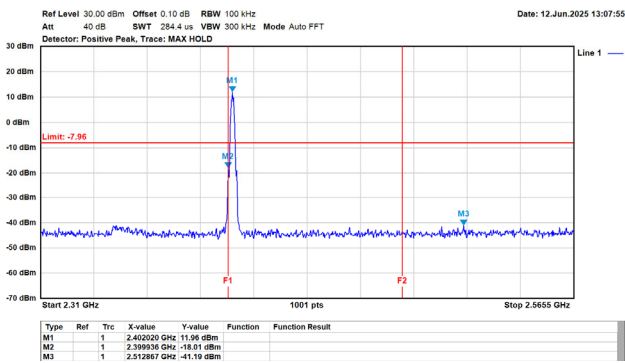

GFSK/2MHz/2M/2480MHz/Ch39/Ant.1(Band Edge)

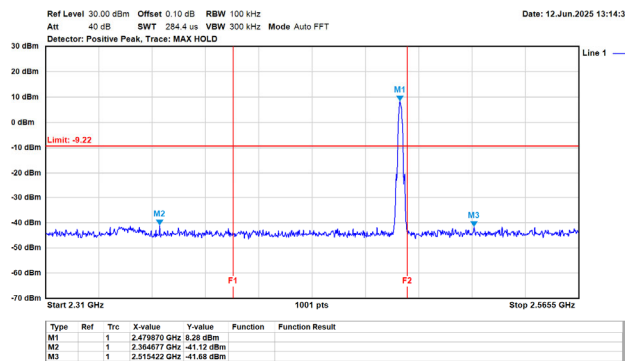


Appendix F. Test Result of Radiated Emission

TX_BLE1M_2402MHz_H Site :HY-CB03 Condition :3m ,Horizontal Mode :TX_BLE1M_2402MHz Test BY :Bob Level (dBuV/m) Date: 2025-07-02 </
--

TX_BLE1M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Bob

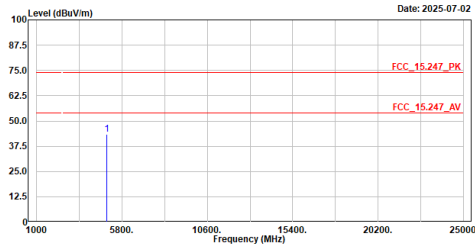


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	43.39	74.00	-30.61	57.61	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Bob

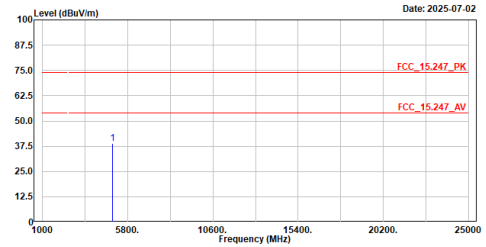


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	38.82	74.00	-35.18	53.84	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2402MHz
Test BY :Bob

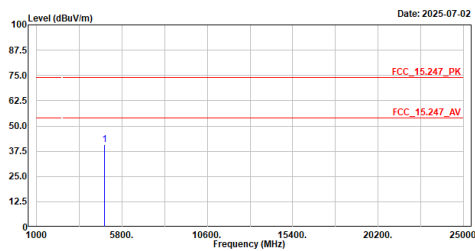


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	40.92	74.00	-33.08	55.87	-14.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2402MHz
Test BY :Bob

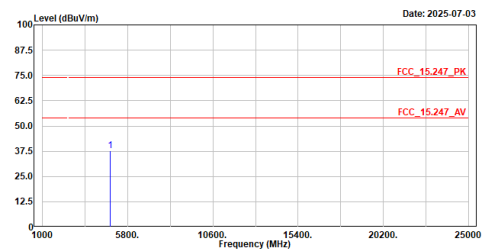


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4804.000	37.61	74.00	-36.39	52.56	-14.95	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Bob

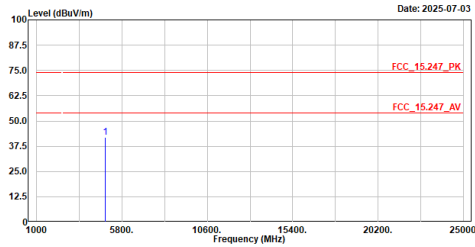


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	41.91	74.00	-32.09	56.50	-14.59	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Bob

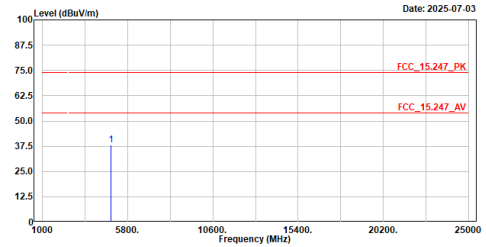


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4880.000	37.99	74.00	-36.01	52.58	-14.59	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2480MHz
Test BY :Bob

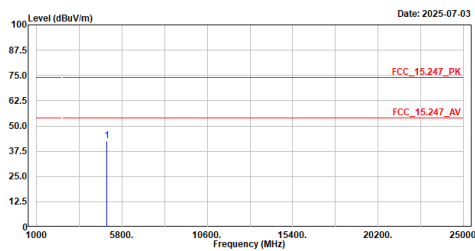


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	42.73	74.00	-31.27	56.95	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2480MHz
Test BY :Bob

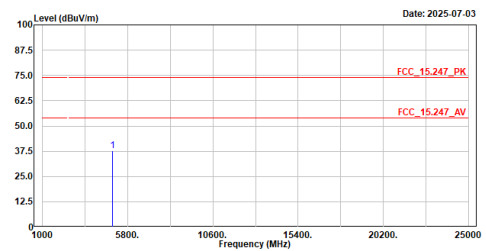


No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4960.000	37.60	74.00	-36.40	51.82	-14.22	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2440MHz_H_QP

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2440MHz
Test BY :Ashton

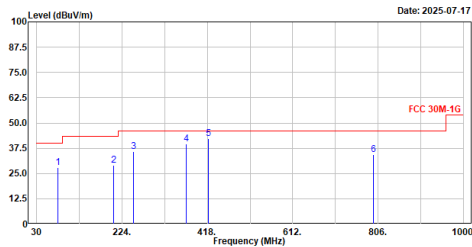


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	77.530	27.83	40.00	-12.17	56.27	-28.44	QP
2	205.570	29.04	43.50	-14.46	55.72	-26.68	QP
3	250.190	35.73	46.00	-10.27	60.64	-24.91	QP
4	369.500	39.60	46.00	-6.40	60.88	-21.28	QP
5	419.940	42.35	46.00	-3.65	62.30	-19.95	QP
6	795.330	34.44	46.00	-11.56	46.93	-12.49	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE2M_2440MHz_V_QP

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2440MHz
Test BY :Ashton

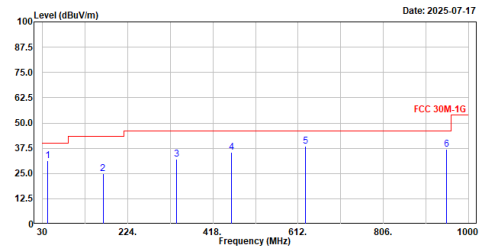


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	42.610	31.36	40.00	-8.64	55.09	-23.73	QP
2	167.740	25.04	43.50	-18.46	49.36	-24.32	QP
3	335.550	31.92	46.00	-14.08	53.89	-21.97	QP
4	460.680	35.35	46.00	-10.65	53.95	-18.60	QP
5	629.460	38.59	46.00	-7.41	53.73	-15.14	QP
6	950.530	37.12	46.00	-8.88	47.74	-10.62	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

TX_BLE1M_2402MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Bob

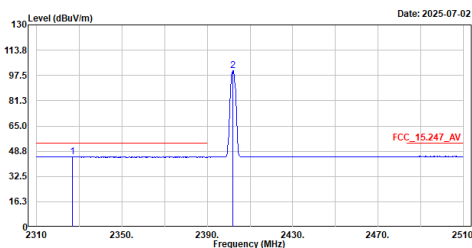


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2326.800	45.23	54.00	-8.77	14.69	30.54	Average
2	2402.000	100.51	-----	-----	70.05	30.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2402MHz
Test BY :Bob

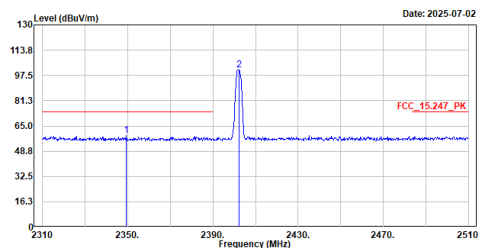


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2349.200	58.80	74.00	-15.20	28.38	30.42	Peak
2	2402.400	101.12	-----	-----	70.66	30.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Bob

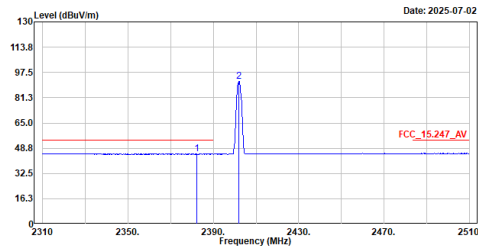


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2382.200	45.15	54.00	-8.85	14.72	30.43	Average
2	2402.000	91.59	-----	-----	61.13	30.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2402MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2402MHz
Test BY :Bob

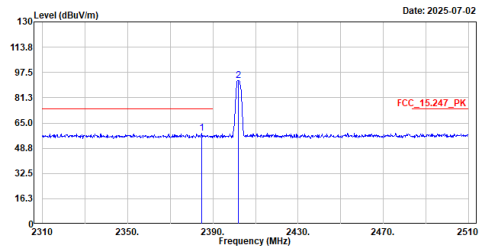


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2384.600	58.22	74.00	-15.78	27.79	30.43	Peak
2	2401.800	92.29	-----	-----	61.83	30.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Bob

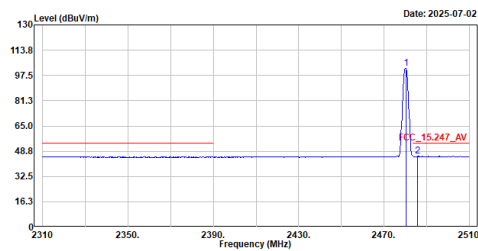


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.200	102.14	-----	-----	71.75	30.39	Average
2	2485.600	45.56	54.00	-8.44	15.10	30.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE1M_2480MHz
Test BY :Bob

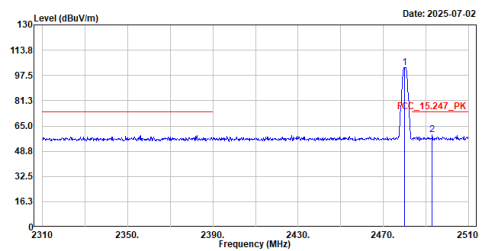


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	102.76	-----	-----	72.37	30.39	Peak
2	2493.000	59.45	74.00	-14.55	28.95	30.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Bob

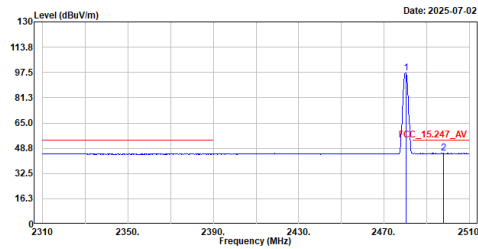


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.200	97.03	-----	-----	66.64	30.39	Average
2	2497.800	45.52	54.00	-8.48	15.01	30.51	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE1M_2480MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE1M_2480MHz
Test BY :Bob

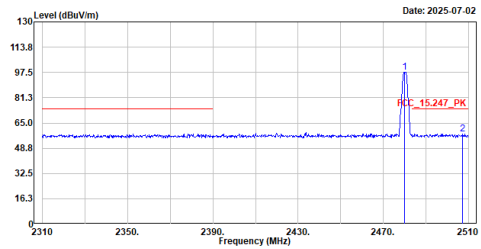


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2480.000	97.65	-----	-----	67.26	30.39	Peak
2	2507.200	58.04	74.00	-15.96	27.53	30.51	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2402MHz
Test BY :Bob

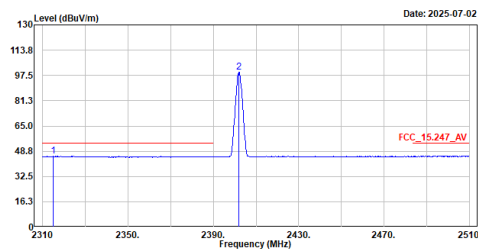


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2315.000	45.66	54.00	-8.34	15.05	30.61	Average
2	2402.000	99.48	-----	-----	69.02	30.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2402MHz
Test BY :Bob

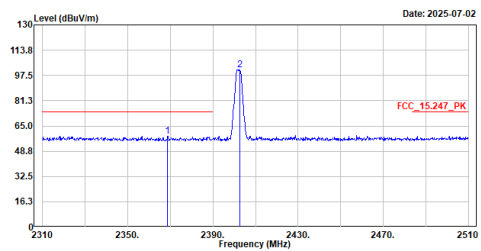


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB/m	
1	2368.000	58.44	74.00	-15.56	28.01	30.43	Peak
2	2402.000	101.13	-----	-----	70.65	30.48	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V_Average

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2402MHz
Test BY :Bob

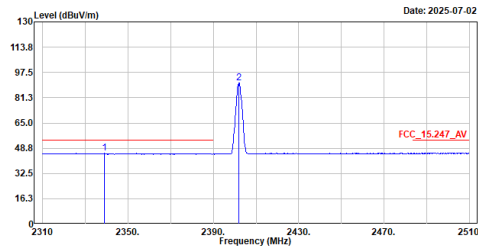


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2338.800	45.58	54.00	-8.42	15.15	30.43	Average
2	2402.000	90.59	-----	-----	60.13	30.46	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2402MHz_V_Peak

Site :HY-CB03
Condition :3m ,Vertical
Mode :TX_BLE2M_2402MHz
Test BY :Bob

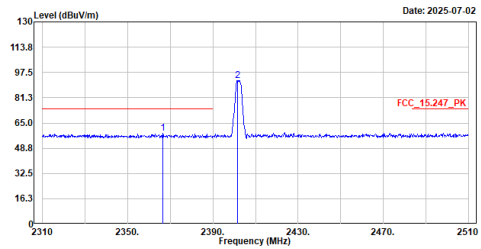


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2366.400	58.20	74.00	-15.80	27.78	30.42	Peak
2	2401.600	92.30	-----	-----	61.84	30.46	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H_Average

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2480MHz
Test BY :Bob

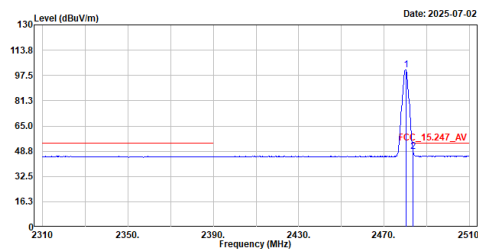


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2480.200	101.15	-----	-----	70.76	30.39	Average
2	2483.600	48.74	54.00	-5.26	18.30	30.44	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_H_Peak

Site :HY-CB03
Condition :3m ,Horizontal
Mode :TX_BLE2M_2480MHz
Test BY :Bob

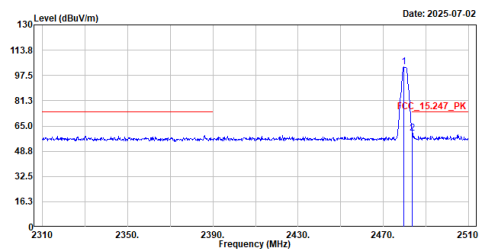

No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	2479.800	102.78	-----	-----	72.39	30.39	Peak
2	2483.600	60.42	74.00	-13.58	29.98	30.44	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

TX_BLE2M_2480MHz_V_Average				TX_BLE2M_2480MHz_V_Peak																																																																			
Site :HY-CB03 Condition :3m ,Vertical Mode :TX_BLE2M_2480MHz Test BY :Bob Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 2310 2350. 2390. 2430. 2470. 2510 Frequency (MHz) 2025-07-02 1 2 FCC_15.247_AV <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2480.200</td><td>96.04</td><td>-----</td><td>-----</td><td>65.65</td><td>30.39</td><td>Average</td></tr><tr><td>2</td><td>2483.600</td><td>46.74</td><td>54.00</td><td>-7.26</td><td>16.30</td><td>30.44</td><td>Average</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.				No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2480.200	96.04	-----	-----	65.65	30.39	Average	2	2483.600	46.74	54.00	-7.26	16.30	30.44	Average	Site :HY-CB03 Condition :3m ,Vertical Mode :TX_BLE2M_2480MHz Test BY :Bob Level (dBuV/m) 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 2310 2350. 2390. 2430. 2470. 2510 Frequency (MHz) 2025-07-02 1 2 FCC_15.247_PK <table><tr><th>No.</th><th>Frequency</th><th>Level</th><th>Limit Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr><tr><td>1</td><td>2479.800</td><td>97.69</td><td>-----</td><td>-----</td><td>67.30</td><td>30.39</td><td>Peak</td></tr><tr><td>2</td><td>2484.800</td><td>58.27</td><td>74.00</td><td>-15.73</td><td>27.82</td><td>30.45</td><td>Peak</td></tr></table> Note: 1. Level = Read Level + Factor 2. Factor = Antenna Factor + Cable Loss - Preamp Factor 3. Over Limit = Level - Limit Line 4. The emission levels of other frequencies are very lower than the limit and not show in test report.				No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1	2479.800	97.69	-----	-----	67.30	30.39	Peak	2	2484.800	58.27	74.00	-15.73	27.82	30.45	Peak
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																	
1	2480.200	96.04	-----	-----	65.65	30.39	Average																																																																
2	2483.600	46.74	54.00	-7.26	16.30	30.44	Average																																																																
No.	Frequency	Level	Limit Line	Over Limit	Read Level	Factor	Remark																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																	
1	2479.800	97.69	-----	-----	67.30	30.39	Peak																																																																
2	2484.800	58.27	74.00	-15.73	27.82	30.45	Peak																																																																