






7 Restrict Band


7.1 Test Result



Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-49.45	2	-	47.81	Peak	74	Pass
BLE 1M	2402	2310	-57.23	2	1.85	41.88	Average	54	Pass
BLE 1M	2402	2340.624	-46.19	2	-	51.07	Peak	74	Pass
BLE 1M	2402	2340.912	-54.84	2	1.85	44.27	Average	54	Pass
BLE 1M	2402	2390	-49.89	2	-	47.37	Peak	74	Pass
BLE 1M	2402	2390	-56.8	2	1.85	42.31	Average	54	Pass
BLE 1M	2480	2483.5	-49.87	2	-	47.39	Peak	74	Pass
BLE 1M	2480	2483.5	-55.85	2	1.83	43.24	Average	54	Pass
BLE 1M	2480	2497.144	-46.9	2	-	50.36	Peak	74	Pass
BLE 1M	2480	2483.512	-55.88	2	1.83	43.21	Average	54	Pass
BLE 1M	2480	2500	-48.35	2	-	48.91	Peak	74	Pass
BLE 1M	2480	2500	-56.34	2	1.83	42.75	Average	54	Pass
BLE 2M	2402	2310	-49.81	2	-	47.45	Peak	74	Pass
BLE 2M	2402	2310	-56.98	2	4.44	44.72	Average	54	Pass
BLE 2M	2402	2315.664	-46.28	2	-	50.98	Peak	74	Pass
BLE 2M	2402	2338.704	-54.16	2	4.44	47.54	Average	54	Pass
BLE 2M	2402	2390	-50.01	2	-	47.25	Peak	74	Pass
BLE 2M	2402	2390	-57.14	2	4.44	44.56	Average	54	Pass
BLE 2M	2480	2483.5	-47.16	2	-	50.1	Peak	74	Pass
BLE 2M	2480	2483.5	-55.56	2	4.52	46.22	Average	54	Pass
BLE 2M	2480	2493.088	-46.85	2	-	50.41	Peak	74	Pass
BLE 2M	2480	2485.024	-55.59	2	4.52	46.19	Average	54	Pass
BLE 2M	2480	2500	-48.8	2	-	48.46	Peak	74	Pass
BLE 2M	2480	2500	-56.63	2	4.52	45.15	Average	54	Pass

7.2 Test Graphs

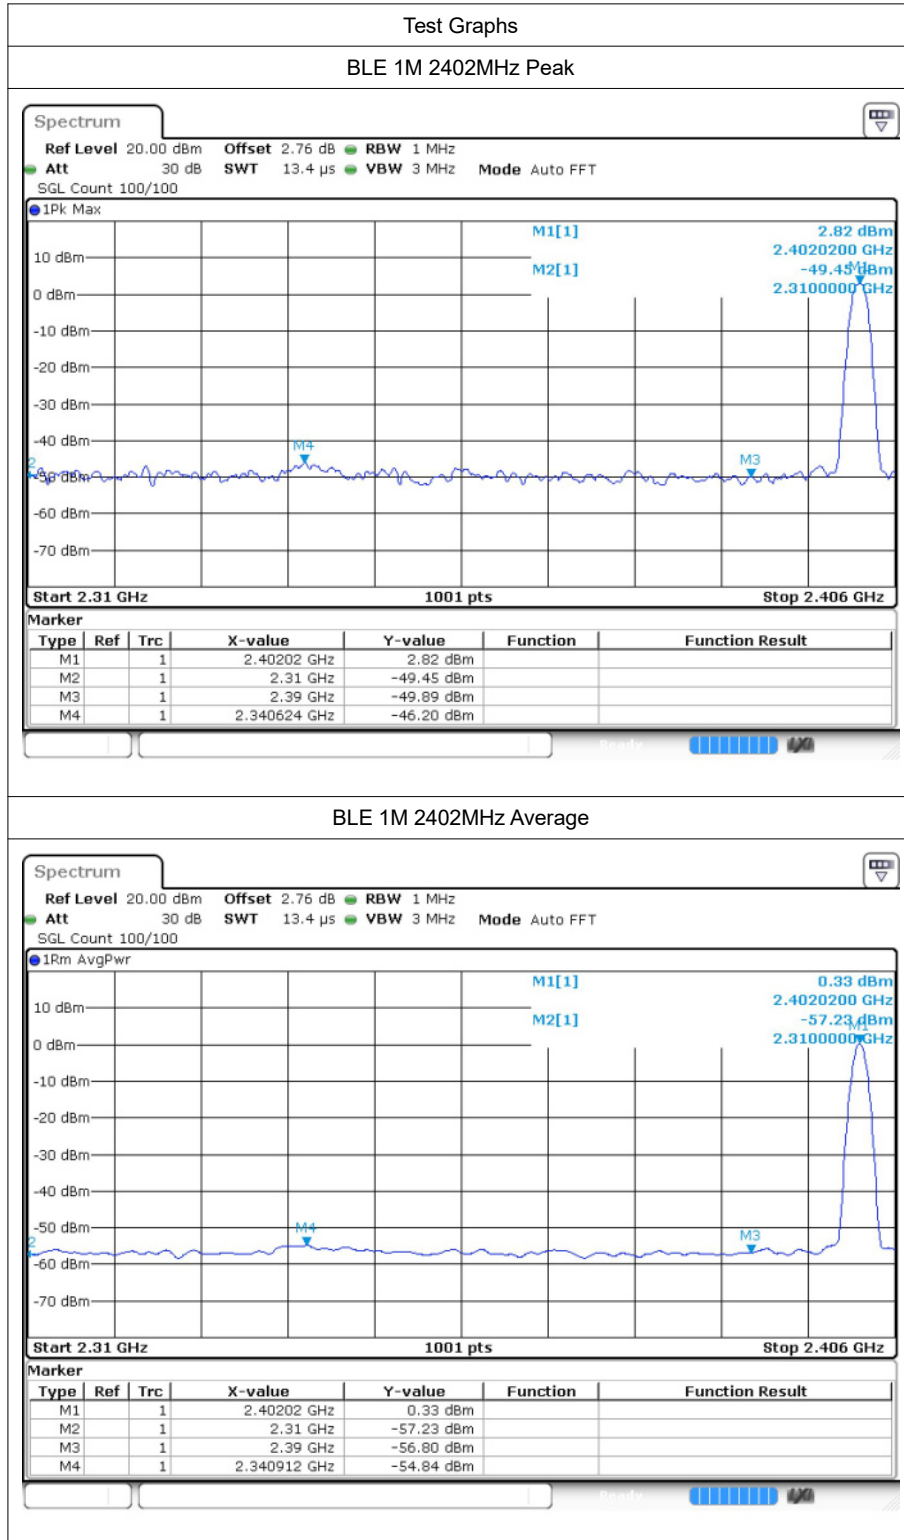

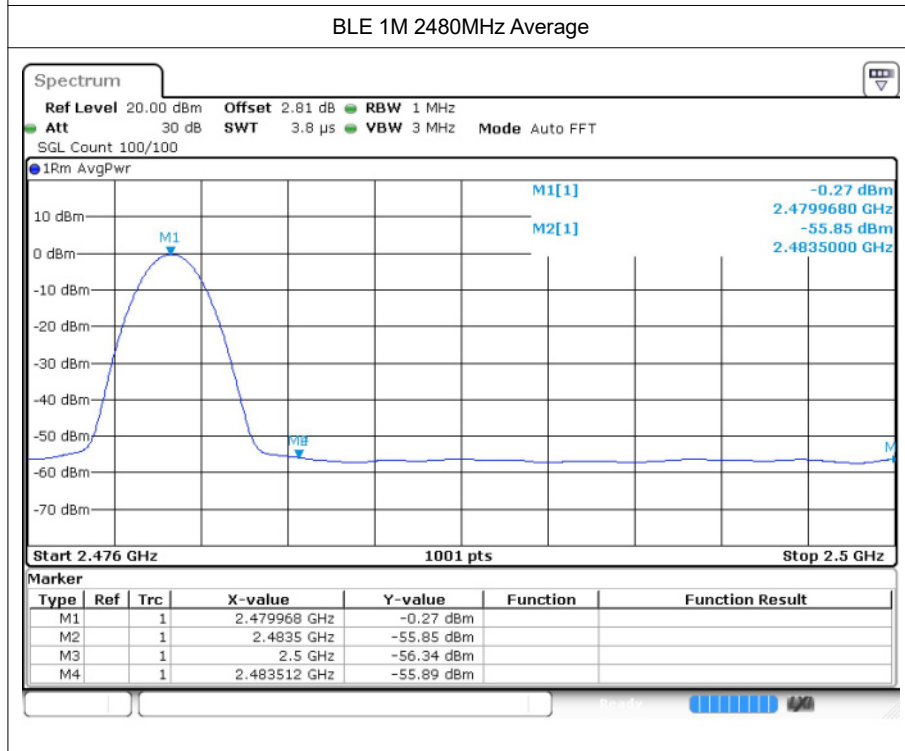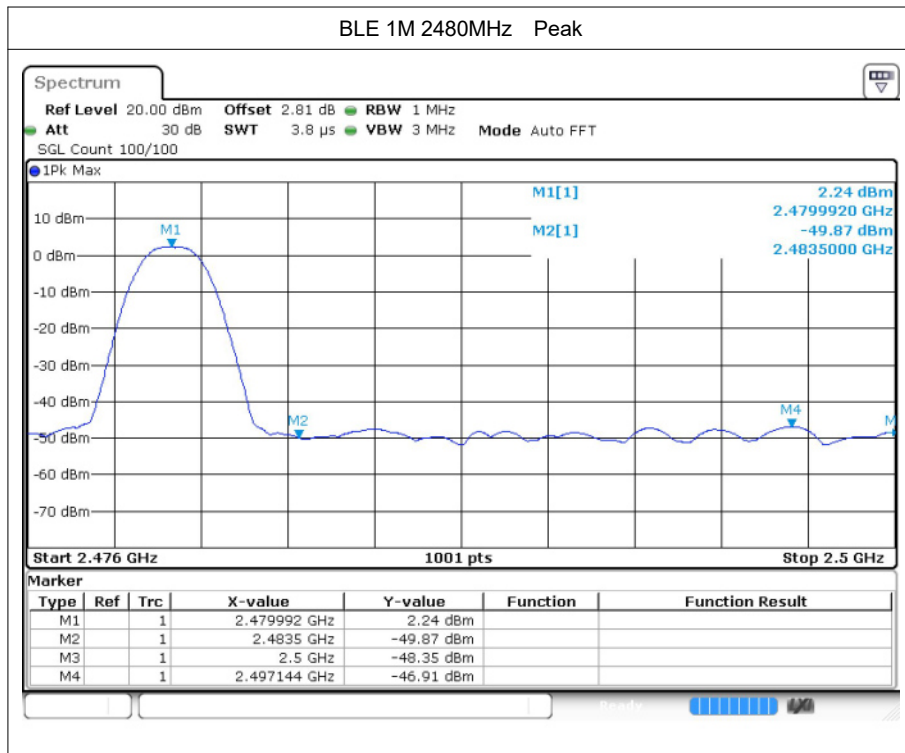

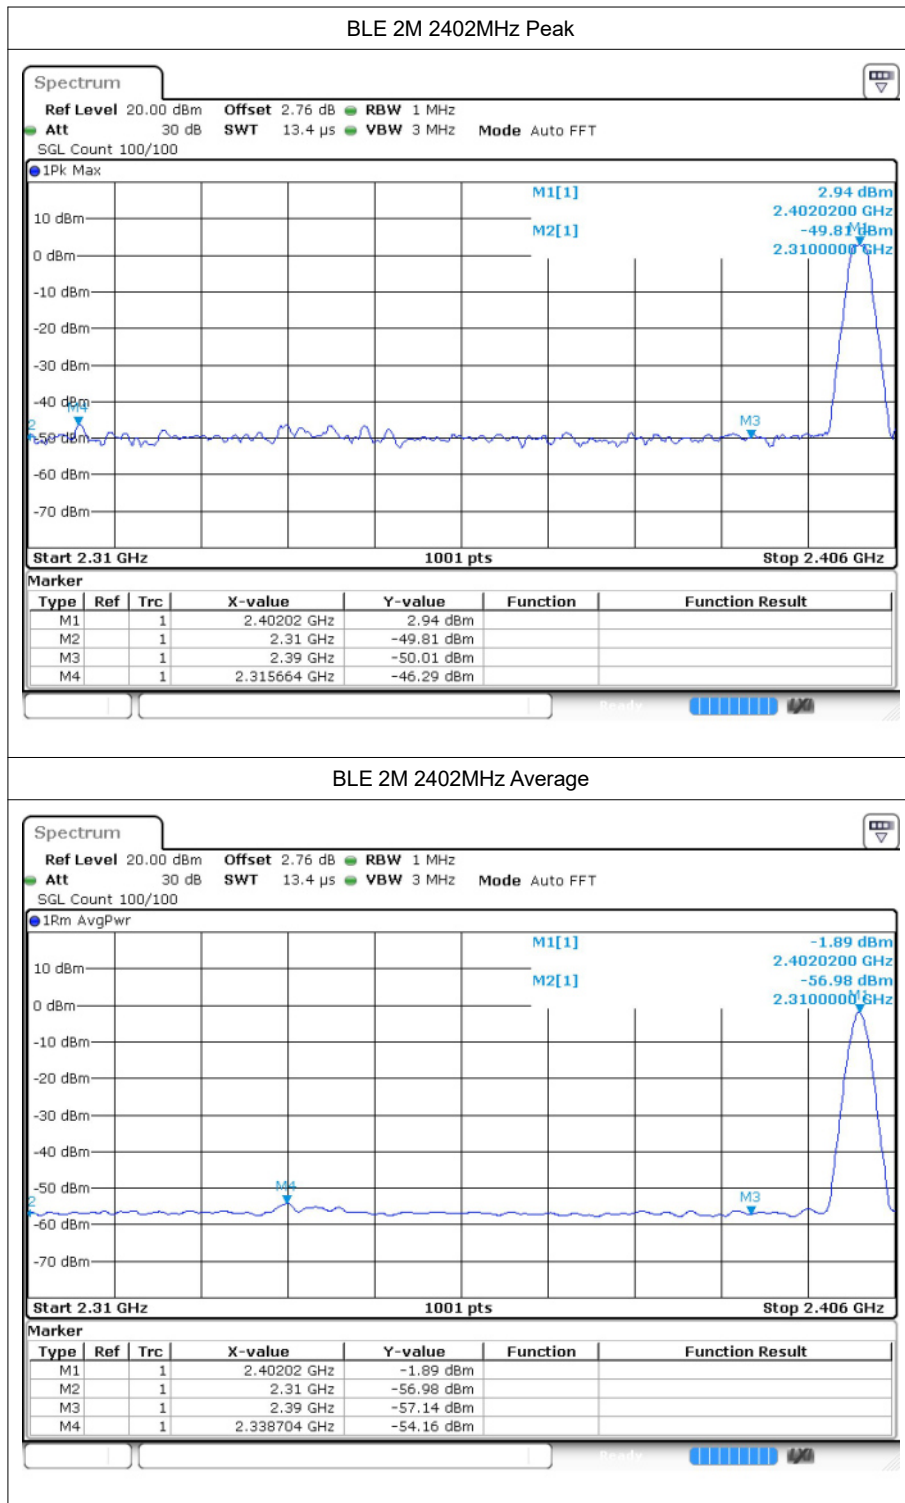

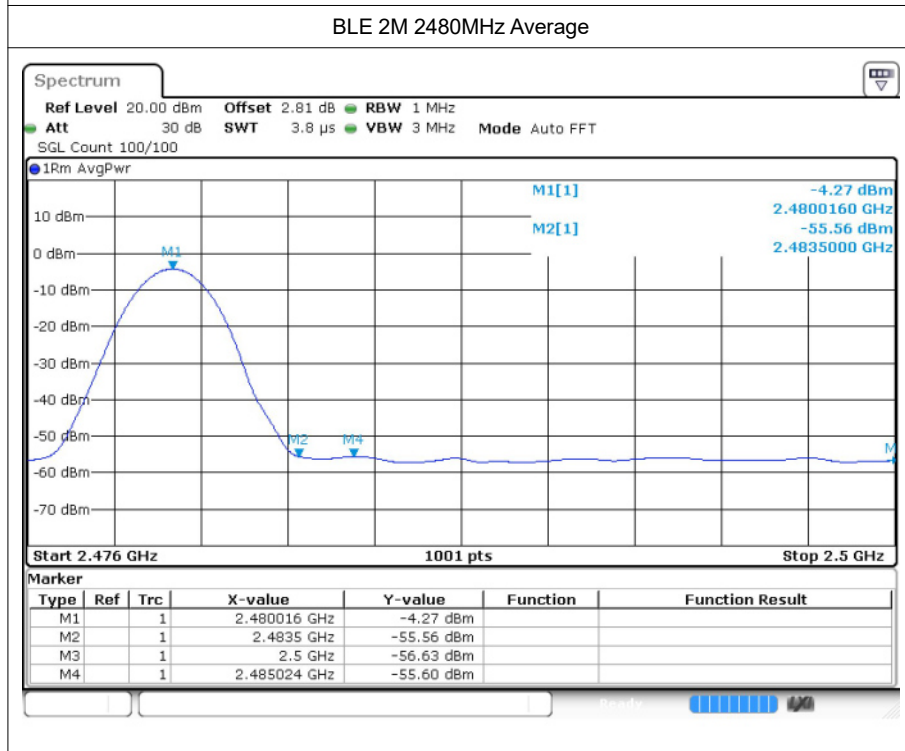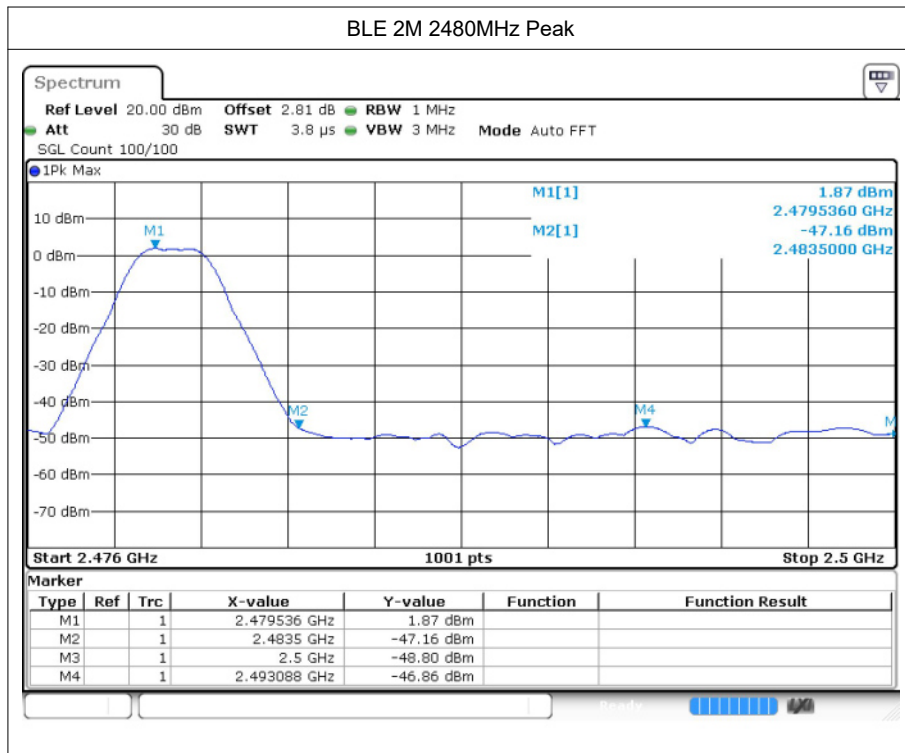

---The End---