

## Appendix B

### RF Test Data for 5.2GWIFI (Conducted Measurement)

**Product Name: Digital Projector**

**Test Model: NeoPix 140**

#### Environmental Conditions


|                    |             |
|--------------------|-------------|
| Temperature:       | 23.2°C      |
| Relative Humidity: | 52.6%       |
| ATM Pressure:      | 100.0 kPa   |
| Test Engineer:     | Suichao Lai |
| Supervised by:     | Yan Chen    |

## B.1 -26dB Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | -26 dB Bandwidth (MHz) | Limit -26 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|------------------------|------------------------------|---------|
| NVNT      | a    | 5180            | Ant1    | 27.517                 | ---                          | Pass    |
| NVNT      | a    | 5200            | Ant1    | 27.334                 | ---                          | Pass    |
| NVNT      | a    | 5240            | Ant1    | 26.059                 | ---                          | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 26.848                 | ---                          | Pass    |
| NVNT      | n20  | 5200            | Ant1    | 29.112                 | ---                          | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 28.199                 | ---                          | Pass    |
| NVNT      | n40  | 5190            | Ant1    | 49.112                 | ---                          | Pass    |
| NVNT      | n40  | 5230            | Ant1    | 52.637                 | ---                          | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | 28.495                 | ---                          | Pass    |
| NVNT      | ac20 | 5200            | Ant1    | 26.672                 | ---                          | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | 28.707                 | ---                          | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | 55.067                 | ---                          | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | 46.337                 | ---                          | Pass    |

## Test Graphs


## -26dB Bandwidth NVNT a 5180MHz Ant1

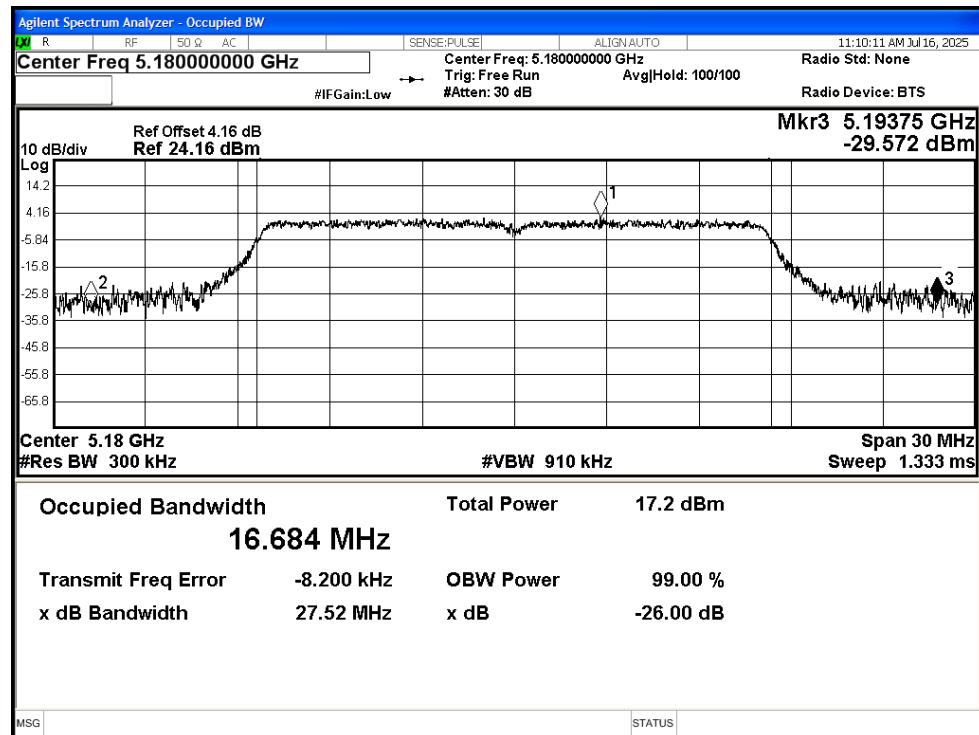


## -26dB Bandwidth NVNT a 5200MHz Ant1


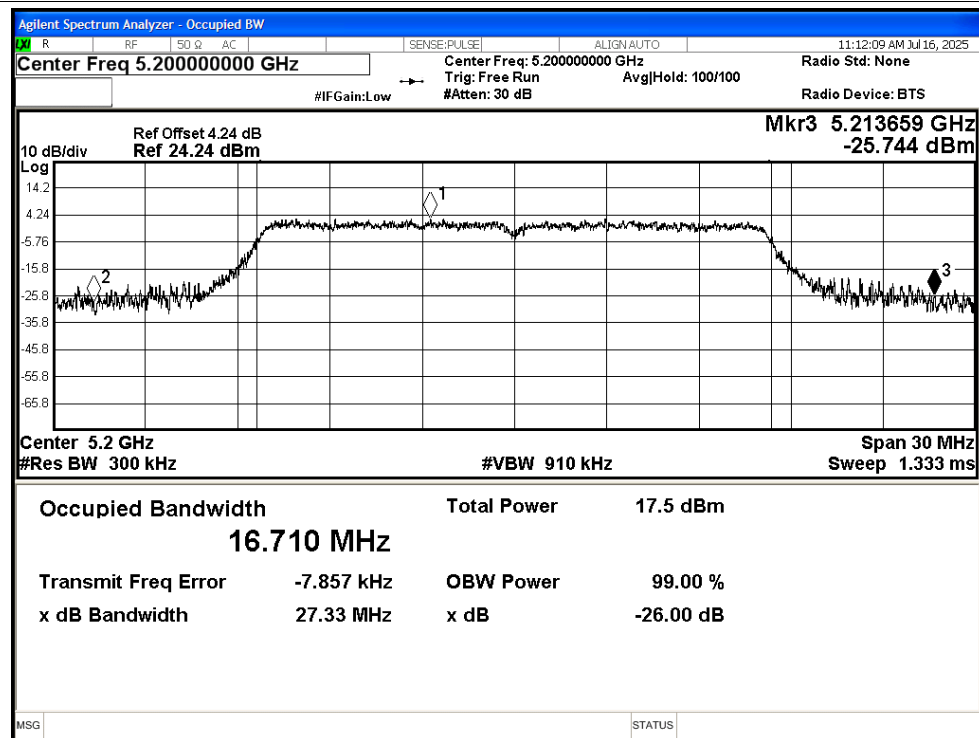




## -26dB Bandwidth NVNT a 5240MHz Ant1

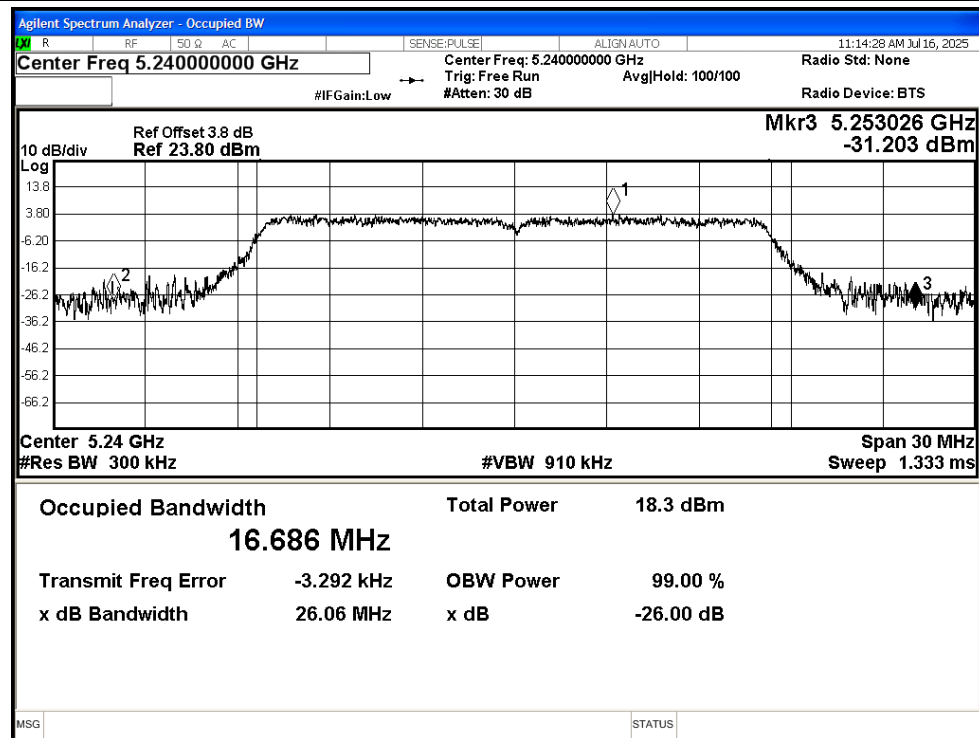


## -26dB Bandwidth NVNT n20 5180MHz Ant1

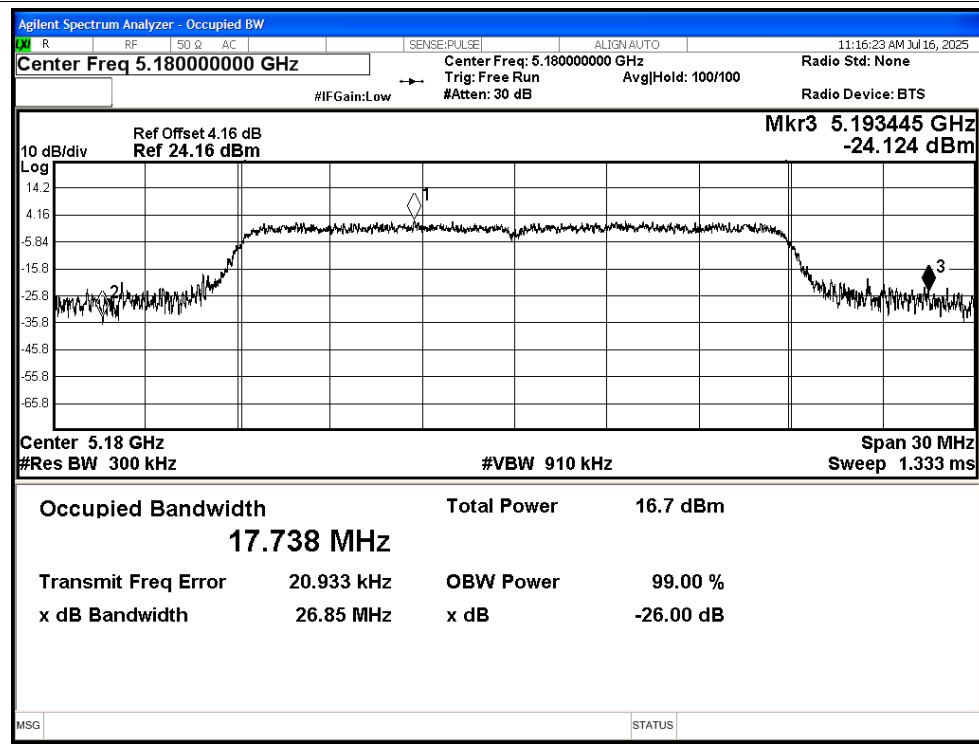

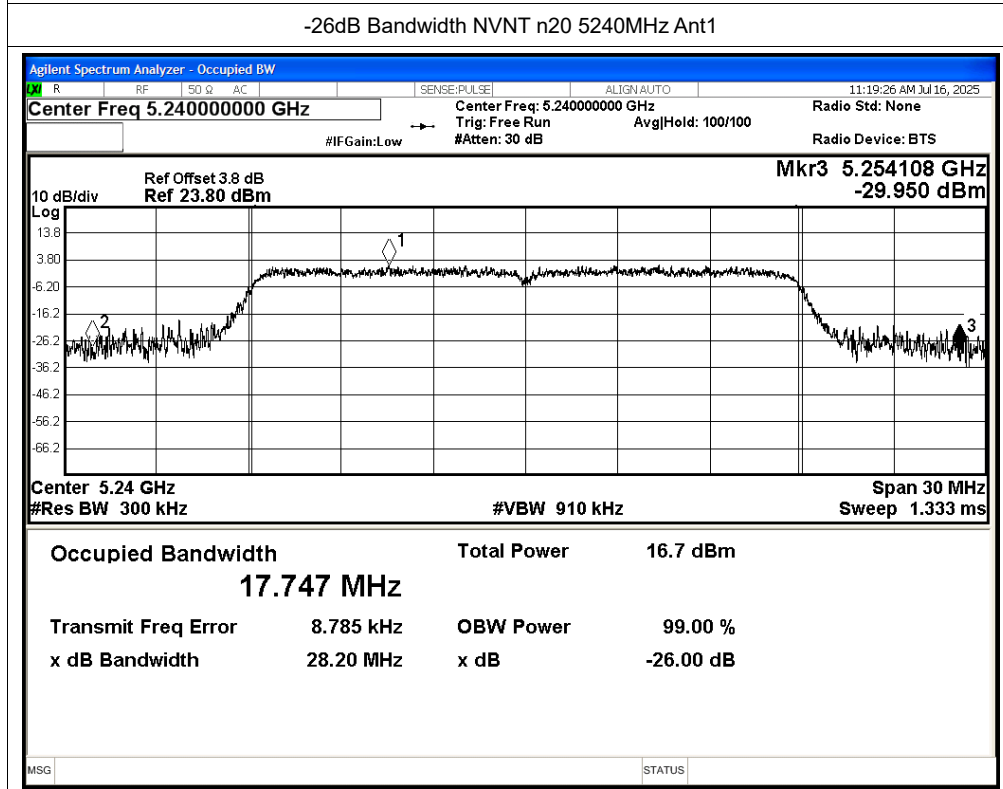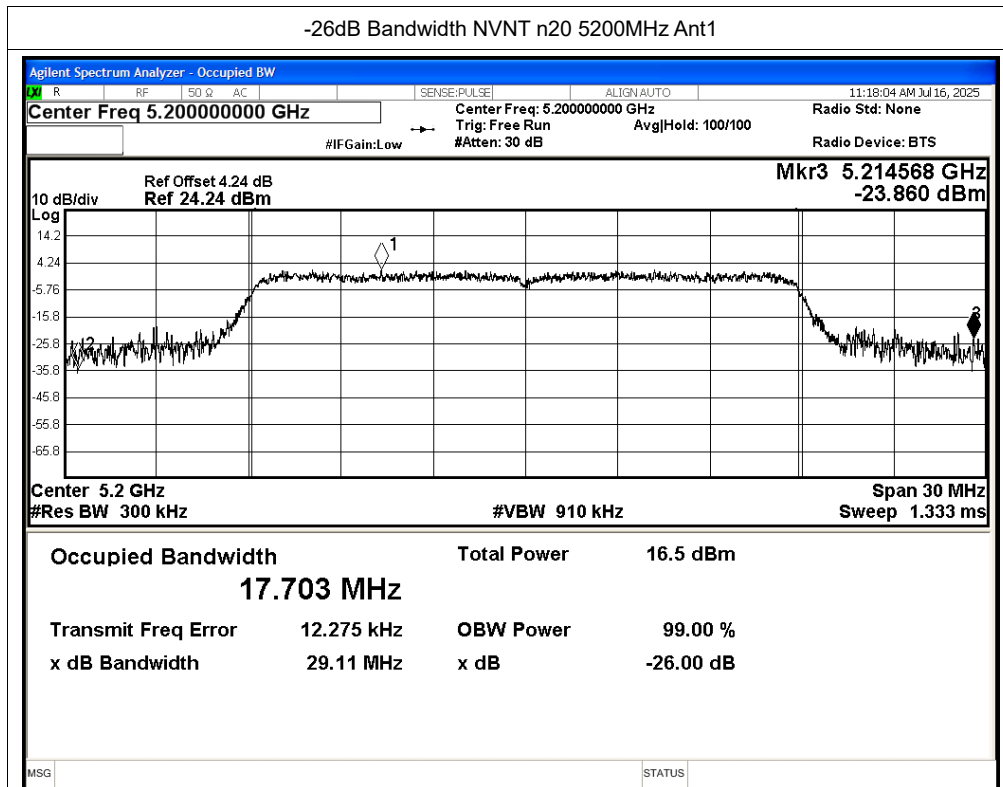


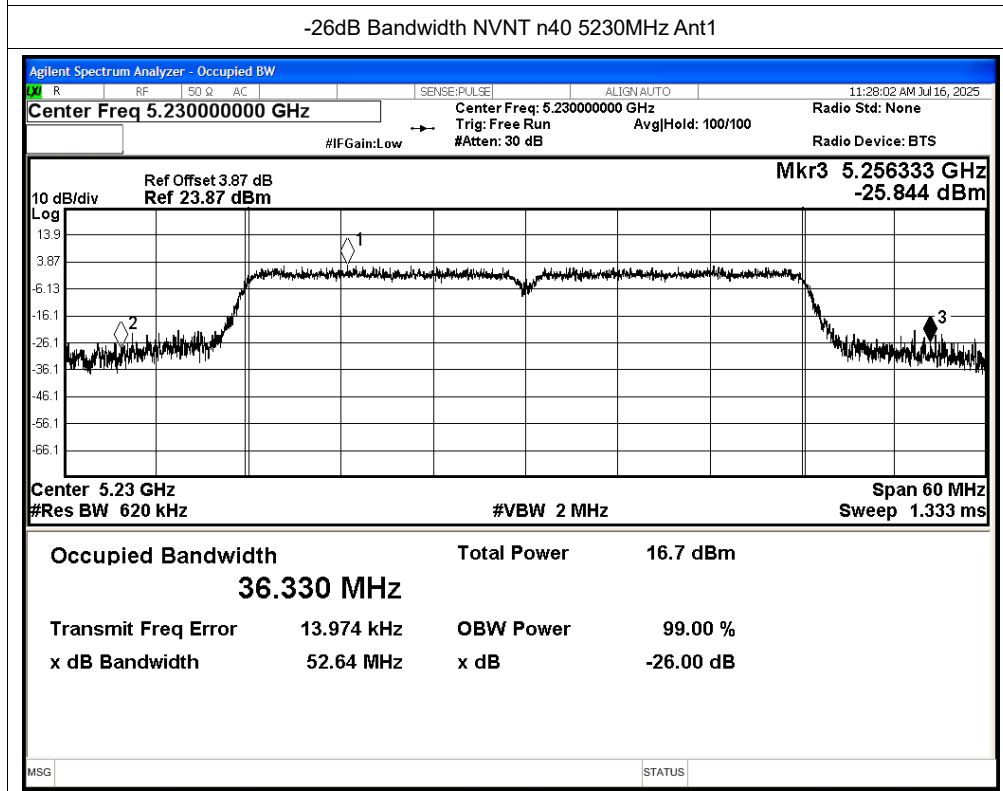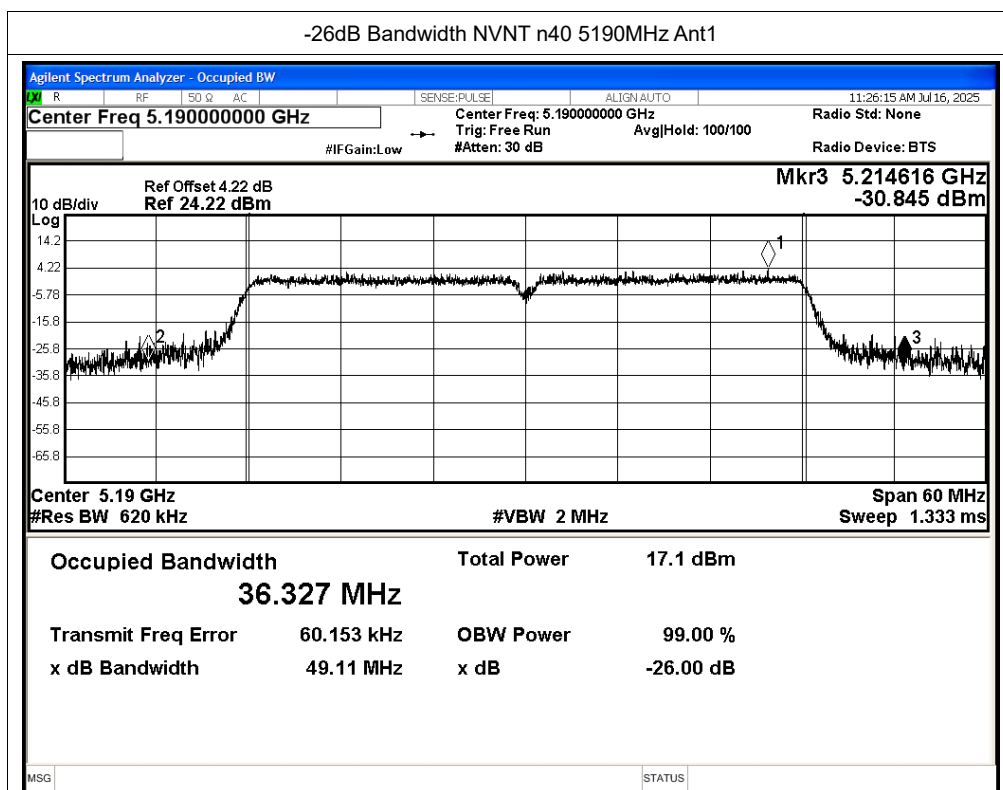


## -26dB Bandwidth NVNT ac20 5180MHz Ant1

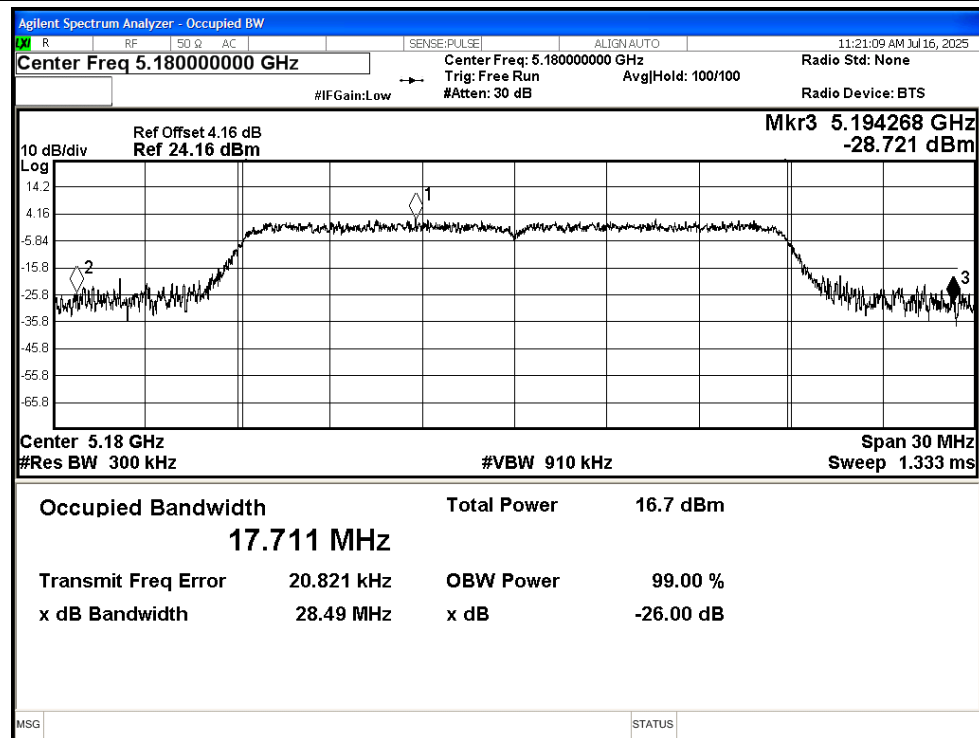


## -26dB Bandwidth NVNT ac20 5200MHz Ant1

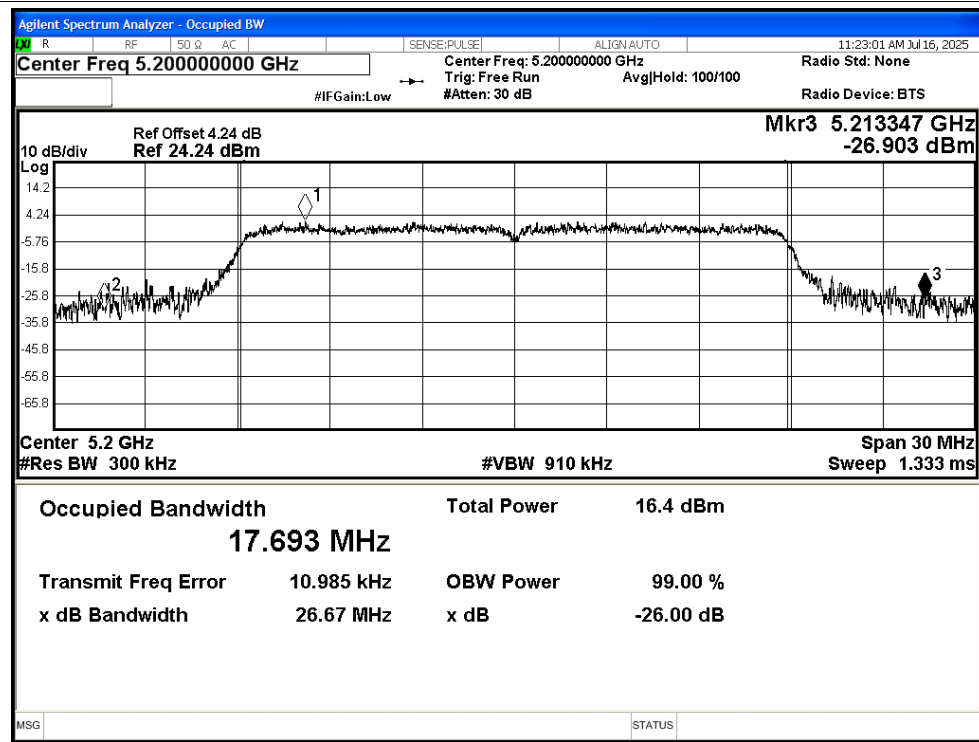


## -26dB Bandwidth NVNT ac20 5240MHz Ant1

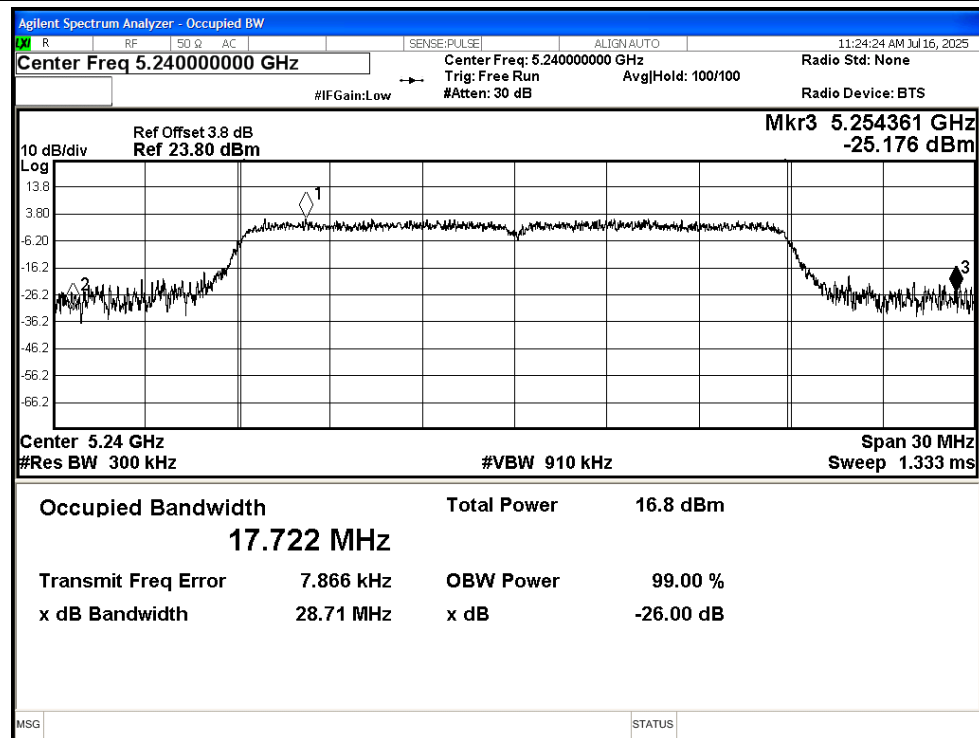

## -26dB Bandwidth NVNT ac40 5190MHz Ant1

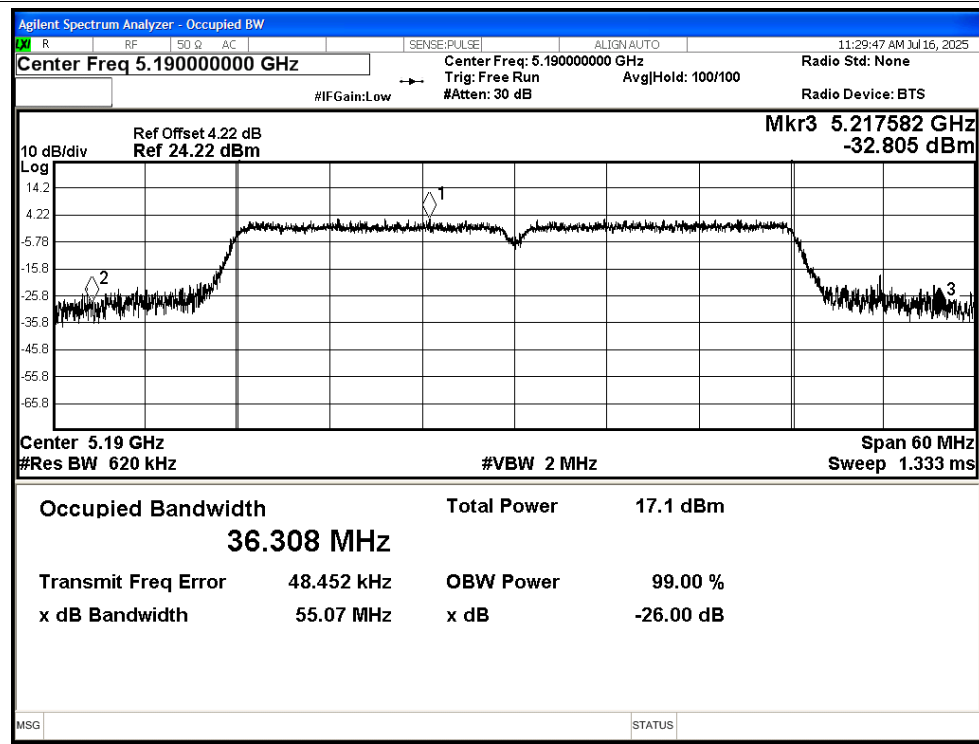



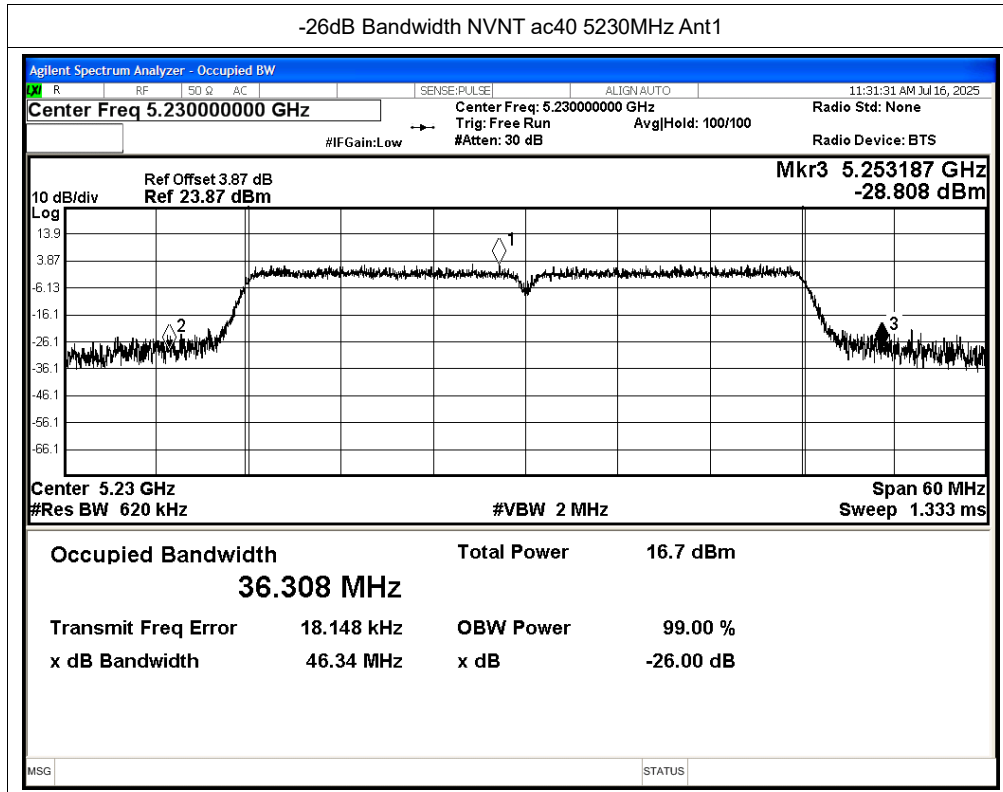

## B.2 Maximum Conducted Output Power


| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|------------------|-------------------|-------------|---------|
| NVNT      | a    | 5180            | Ant1    | 11.5                  | 0.24             | 11.74             | 24          | Pass    |
| NVNT      | a    | 5200            | Ant1    | 11.71                 | 0.24             | 11.95             | 24          | Pass    |
| NVNT      | a    | 5240            | Ant1    | 12.53                 | 0.24             | <b>12.77</b>      | 24          | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 11.19                 | 0.12             | 11.31             | 24          | Pass    |
| NVNT      | n20  | 5200            | Ant1    | 11                    | 0.12             | 11.12             | 24          | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 11.15                 | 0.12             | 11.27             | 24          | Pass    |
| NVNT      | n40  | 5190            | Ant1    | 10.67                 | 0.24             | 10.91             | 24          | Pass    |
| NVNT      | n40  | 5230            | Ant1    | 10.13                 | 0.24             | 10.37             | 24          | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | 11.17                 | 0.12             | 11.29             | 24          | Pass    |
| NVNT      | ac20 | 5200            | Ant1    | 10.88                 | 0.12             | 11                | 24          | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | 11.24                 | 0.12             | 11.36             | 24          | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | 10.78                 | 0.24             | 11.02             | 24          | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | 10.18                 | 0.23             | 10.41             | 24          | Pass    |

### B.3 Maximum Power Spectral Density Level


| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/MHz) | Duty Factor (dB) | Total PSD (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|-----------|------|-----------------|---------|-------------------------|------------------|---------------------|-----------------|---------|
| NVNT      | a    | 5180            | Ant1    | 1.06                    | 0.24             | 1.3                 | 11              | Pass    |
| NVNT      | a    | 5200            | Ant1    | 1.03                    | 0.24             | 1.27                | 11              | Pass    |
| NVNT      | a    | 5240            | Ant1    | 1.94                    | 0.24             | 2.18                | 11              | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 0.43                    | 0.12             | 0.55                | 11              | Pass    |
| NVNT      | n20  | 5200            | Ant1    | 0.08                    | 0.12             | 0.2                 | 11              | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 0.4                     | 0.12             | 0.52                | 11              | Pass    |
| NVNT      | n40  | 5190            | Ant1    | -2.82                   | 0.24             | -2.58               | 11              | Pass    |
| NVNT      | n40  | 5230            | Ant1    | -3.26                   | 0.24             | -3.02               | 11              | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | 0.55                    | 0.12             | 0.67                | 11              | Pass    |
| NVNT      | ac20 | 5200            | Ant1    | 0.03                    | 0.12             | 0.15                | 11              | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | 0.38                    | 0.12             | 0.5                 | 11              | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | -2.86                   | 0.24             | -2.62               | 11              | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | -3.45                   | 0.23             | -3.22               | 11              | Pass    |


## Test Graphs


## PSD NVNT a 5180MHz Ant1

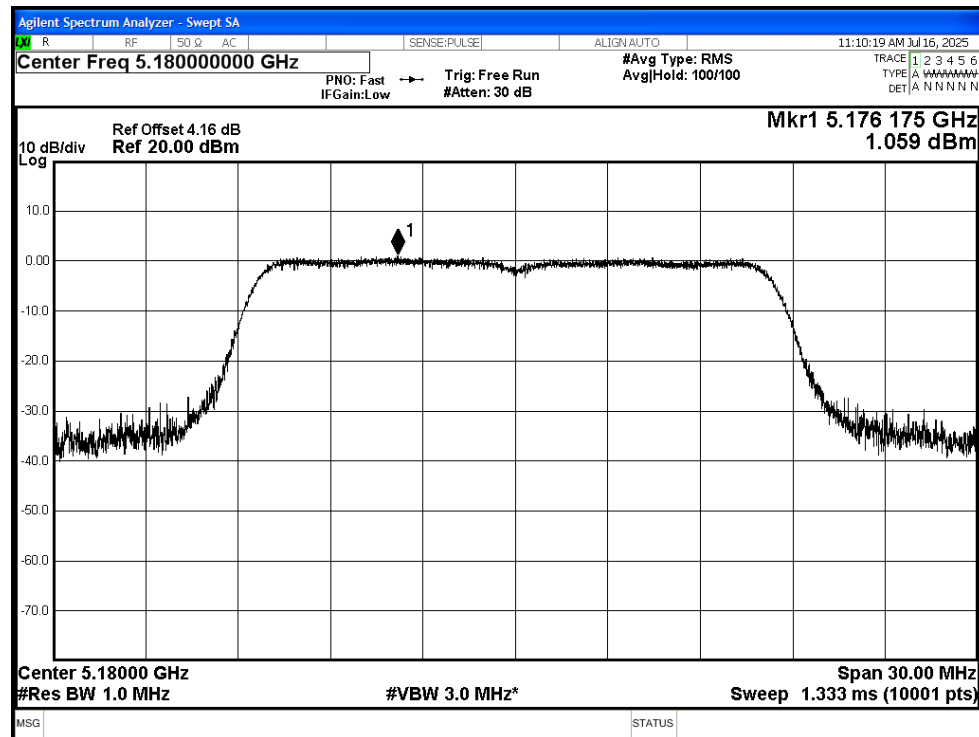




## PSD NVNT a 5200MHz Ant1

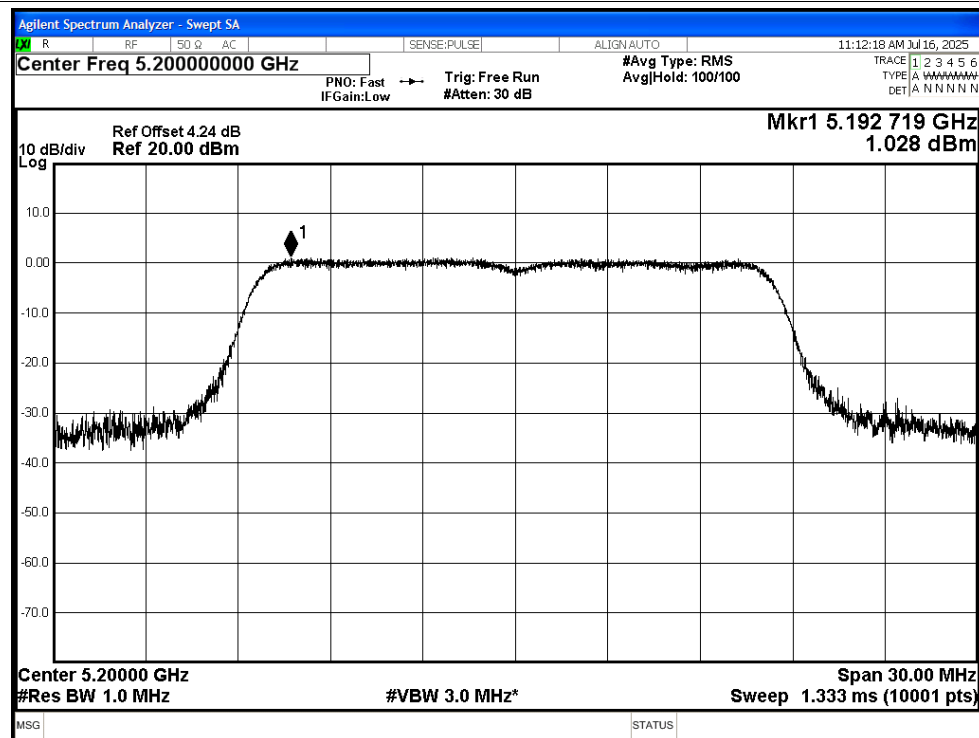

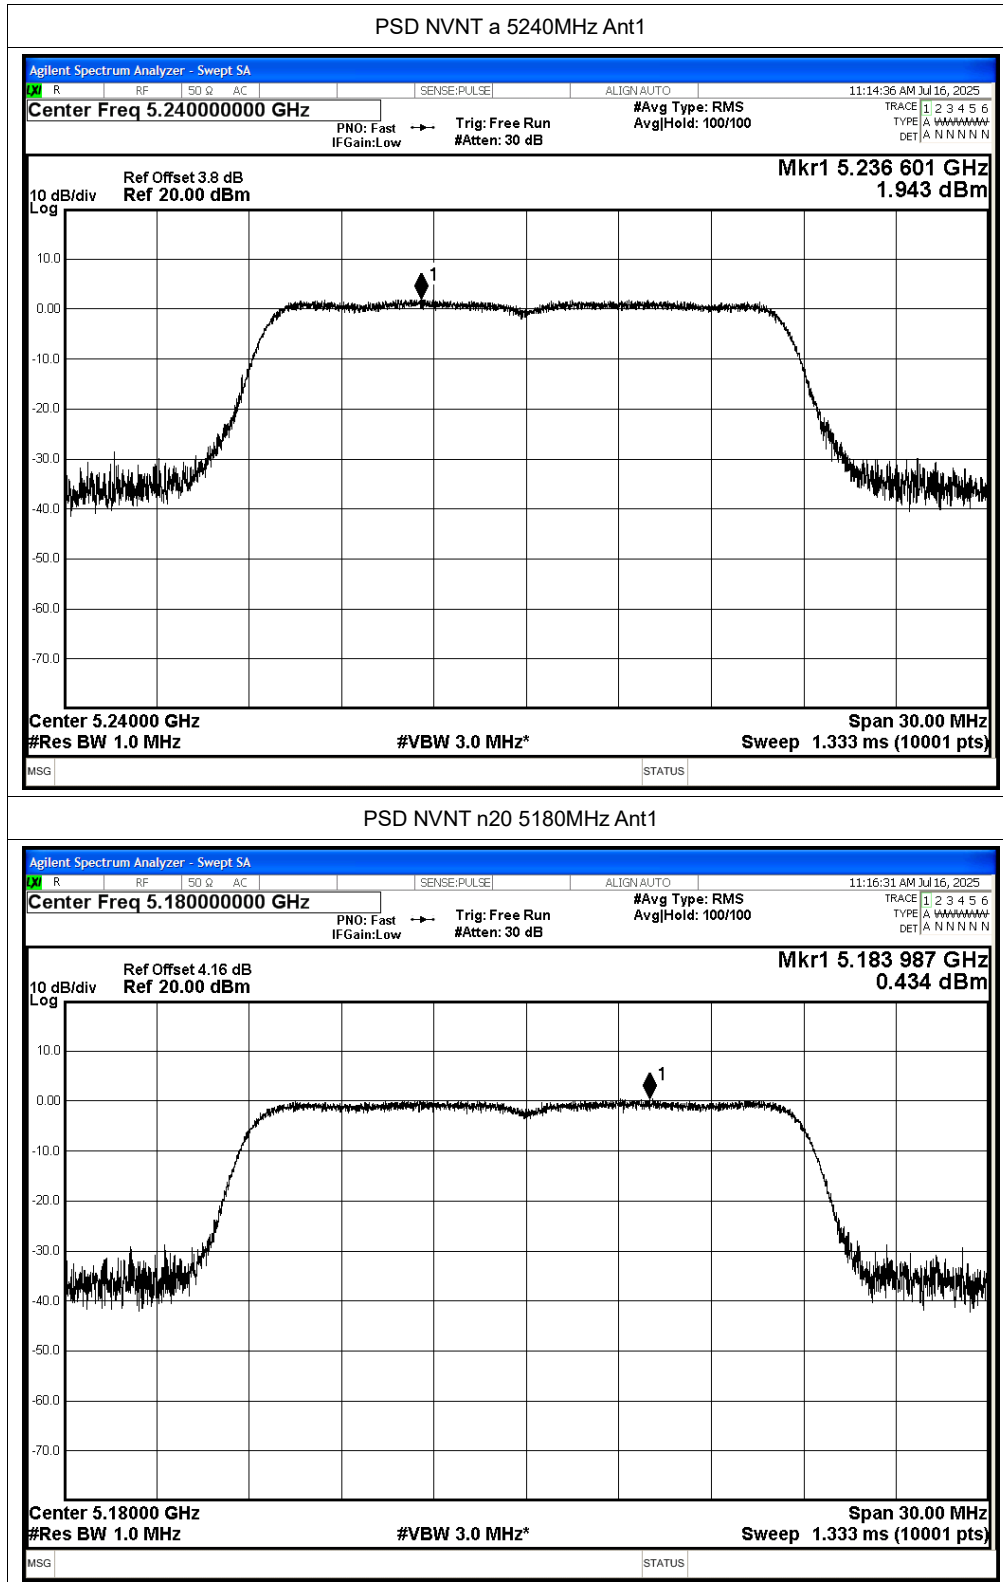


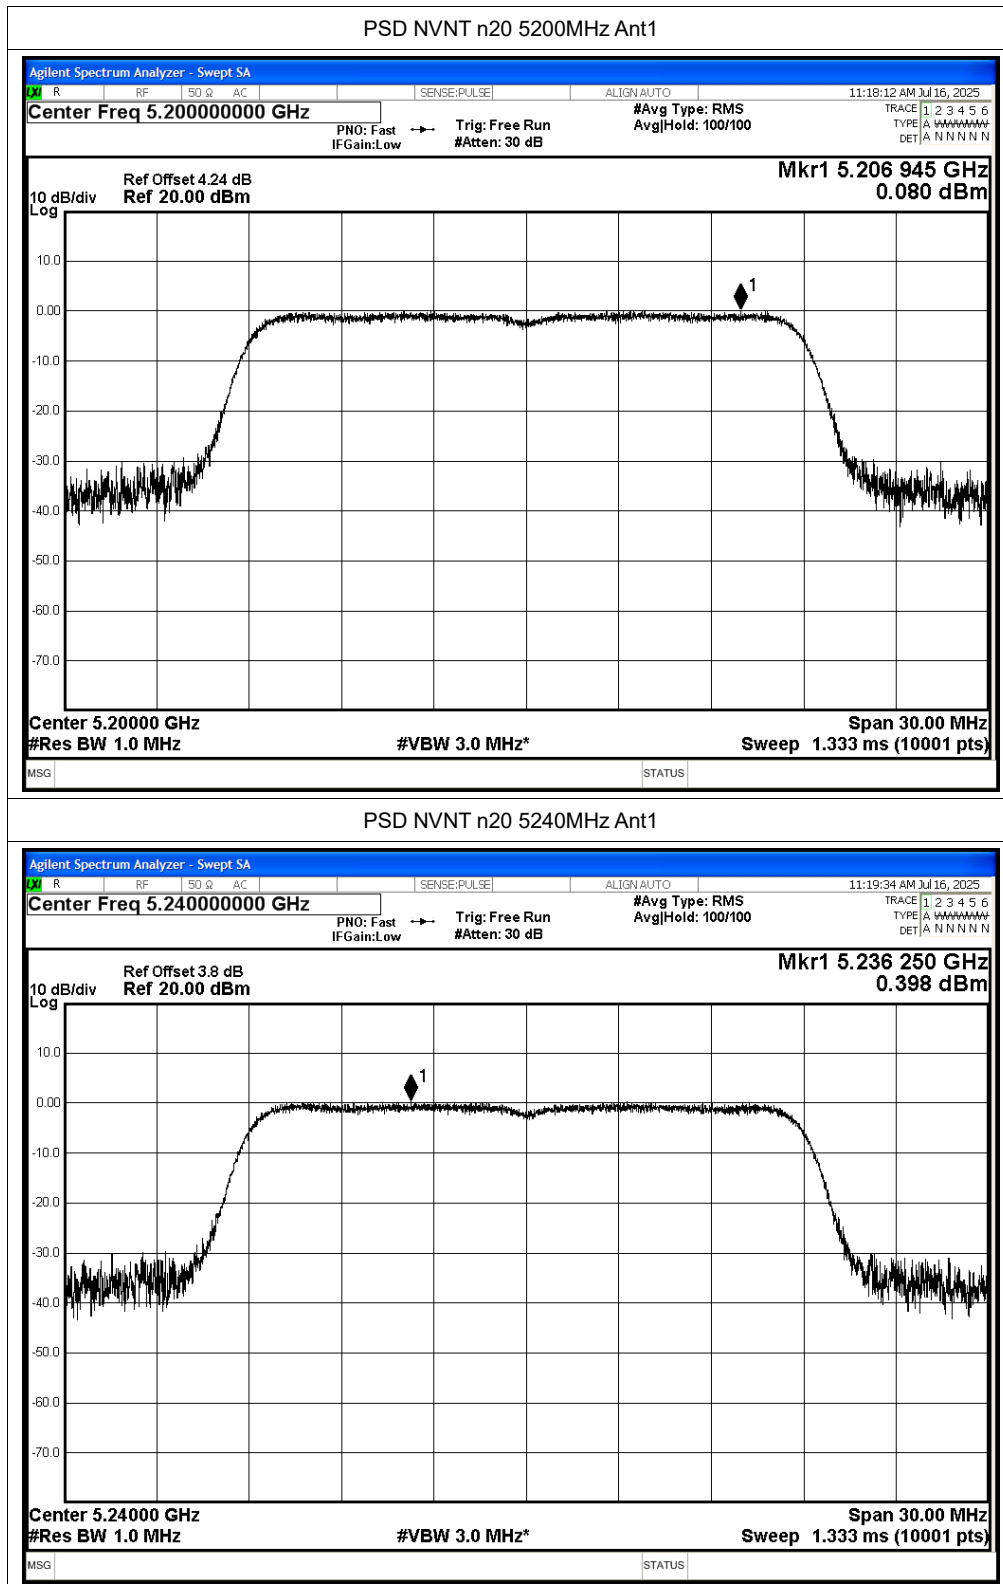


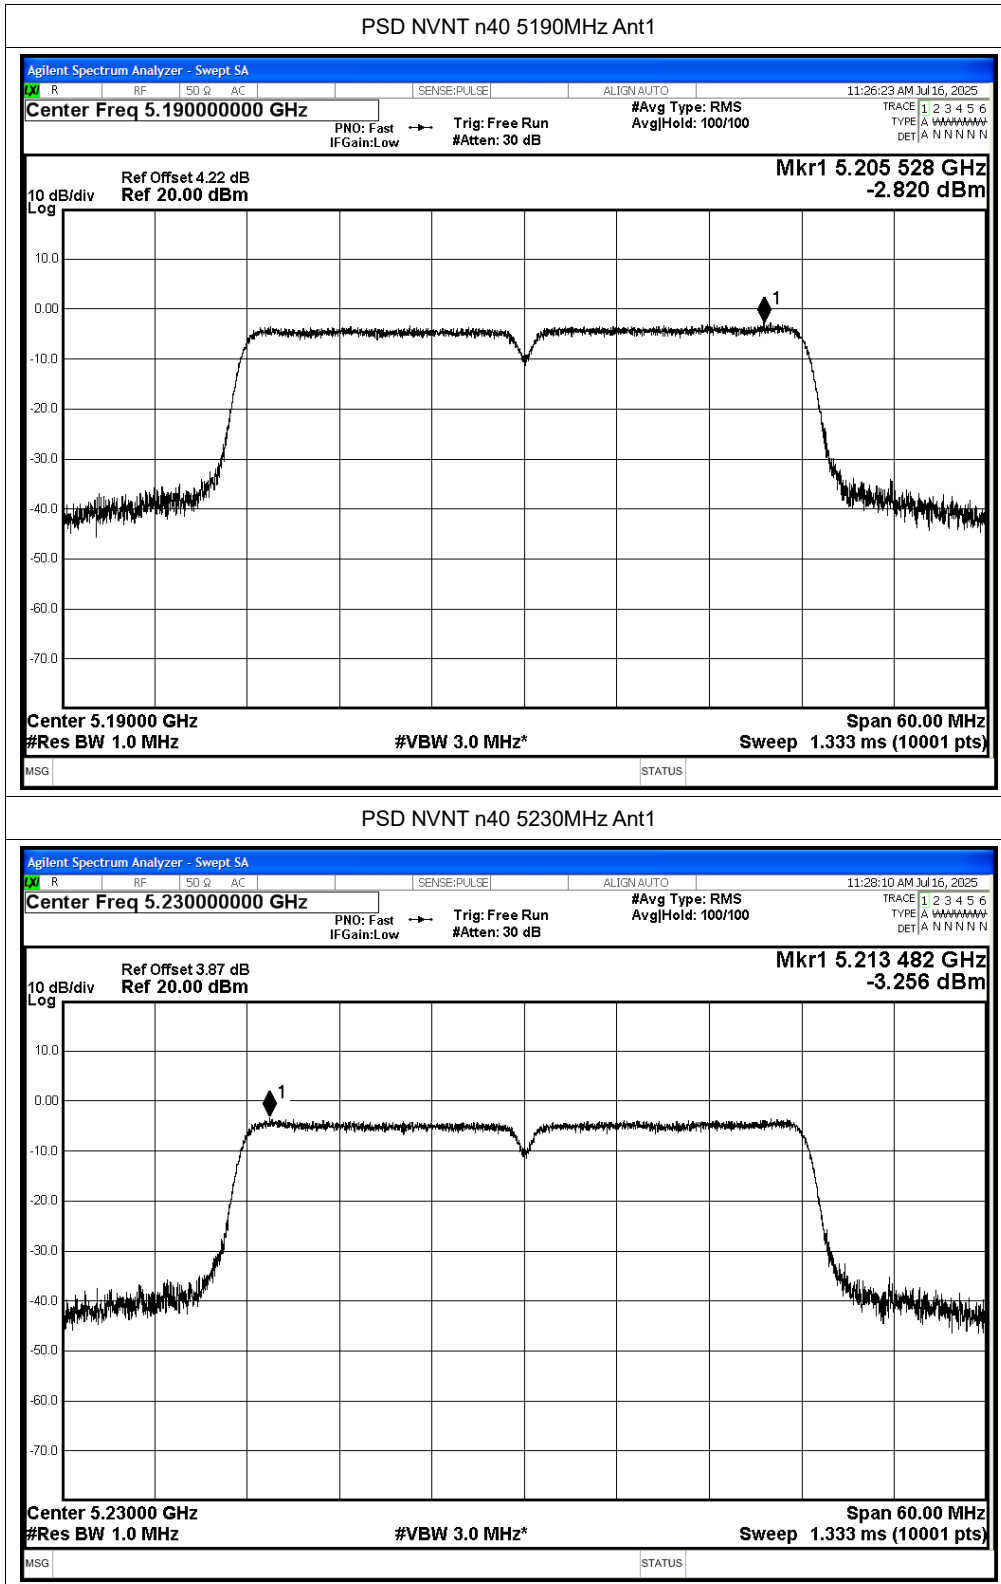

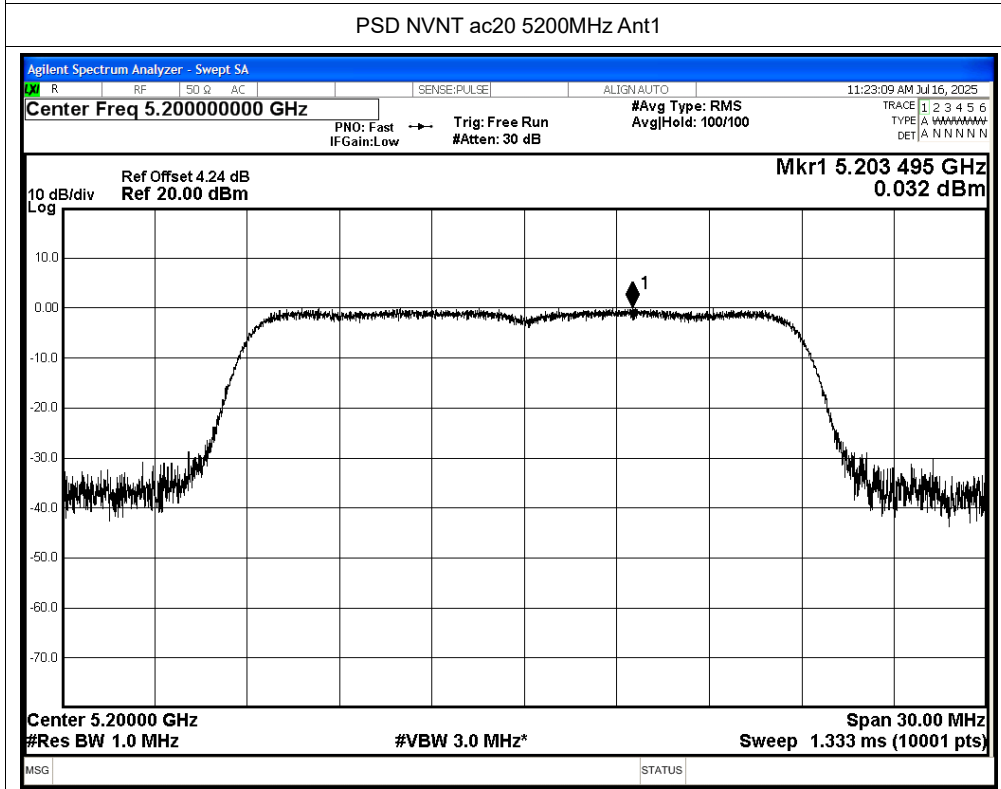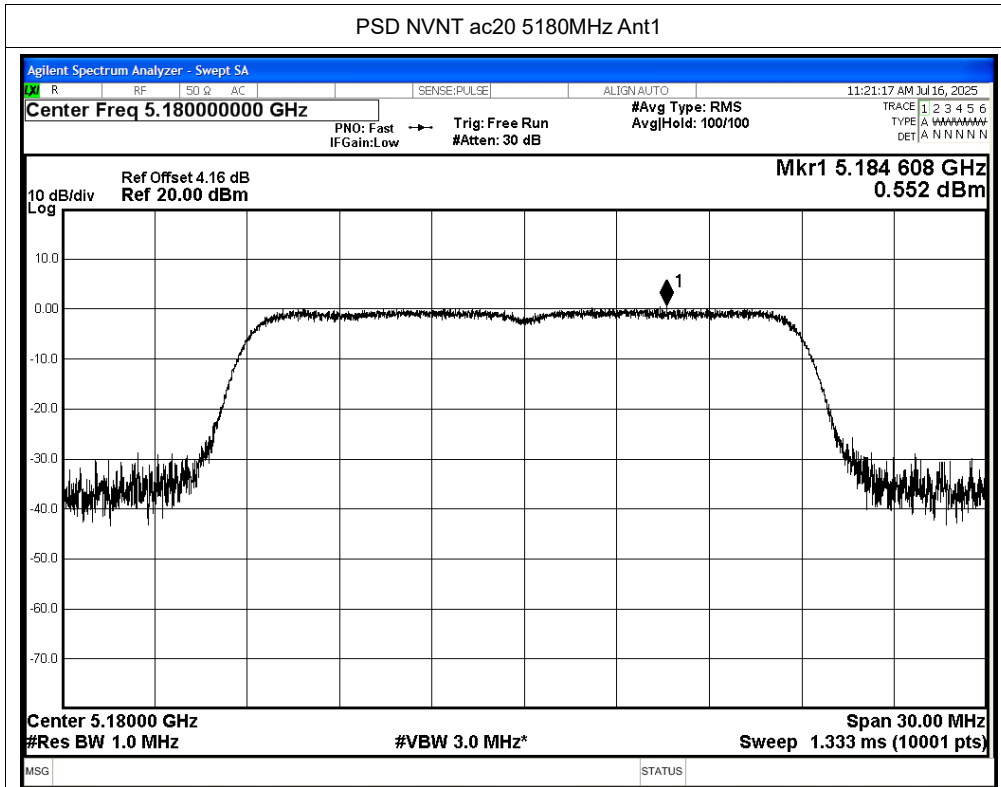



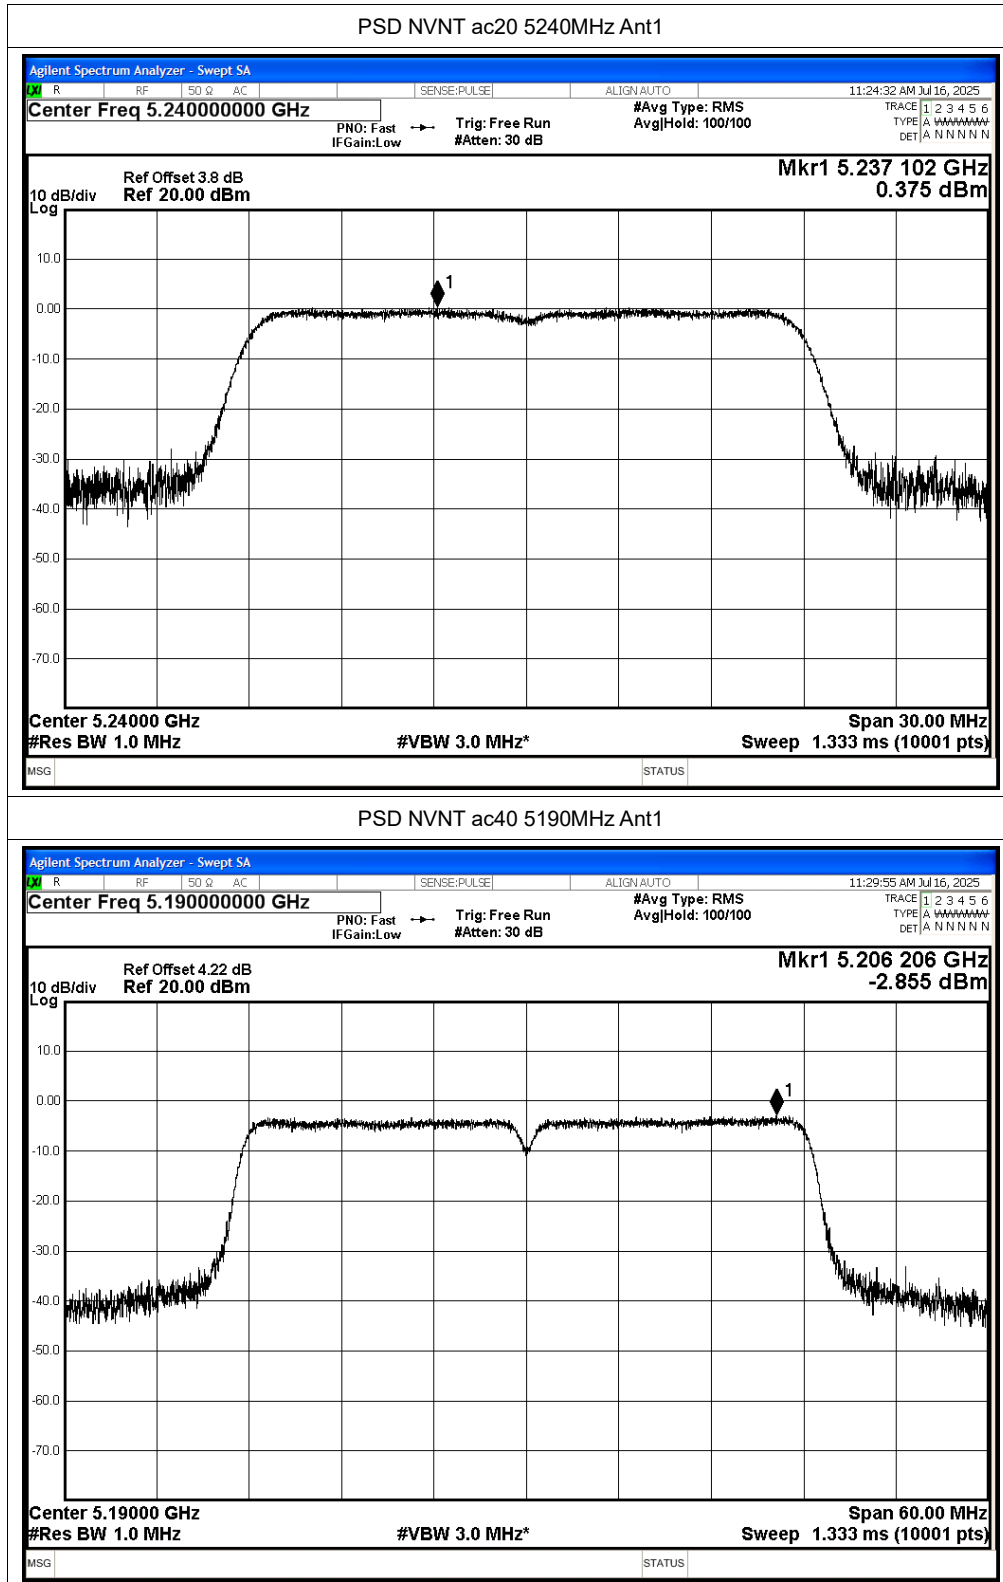

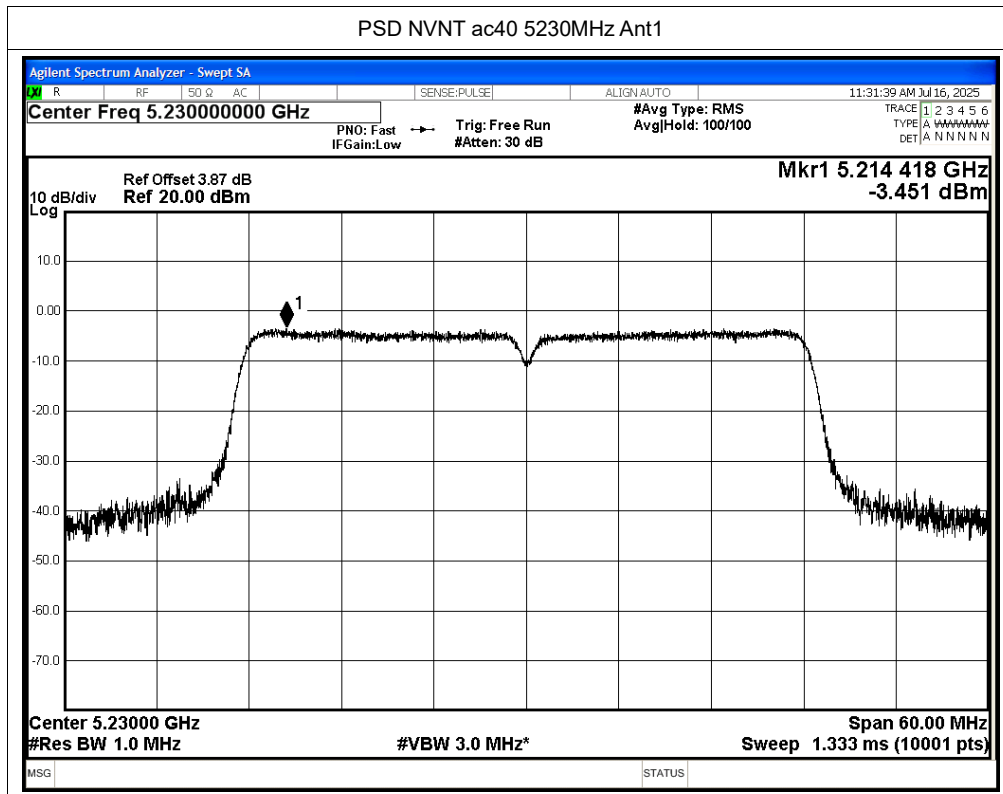

## B.4 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | Duty Factor (dB) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------------|------------|----------|----------------|---------|
| NVNT      | a    | 5180            | Ant1    | 4500            | -48.96      | 2          | -                | 48.27      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5180            | Ant1    | 4500            | -57.99      | 2          | 0.24             | 39.48      | Average  | 54             | Pass    |
| NVNT      | a    | 5180            | Ant1    | 5006.8          | -45.81      | 2          | -                | 51.42      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5180            | Ant1    | 5124.4          | -55.59      | 2          | 0.24             | 41.88      | Average  | 54             | Pass    |
| NVNT      | a    | 5180            | Ant1    | 5150            | -47.21      | 2          | -                | 50.02      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5180            | Ant1    | 5150            | -55.86      | 2          | 0.24             | 41.61      | Average  | 54             | Pass    |
| NVNT      | a    | 5240            | Ant1    | 5350            | -48.32      | 2          | -                | 48.91      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5240            | Ant1    | 5350            | -57.44      | 2          | 0.24             | 40.03      | Average  | 54             | Pass    |
| NVNT      | a    | 5240            | Ant1    | 5447.28         | -46.31      | 2          | -                | 50.92      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5240            | Ant1    | 5359.2          | -56.39      | 2          | 0.24             | 41.08      | Average  | 54             | Pass    |
| NVNT      | a    | 5240            | Ant1    | 5460            | -49.32      | 2          | -                | 47.91      | Peak     | 68.2           | Pass    |
| NVNT      | a    | 5240            | Ant1    | 5460            | -57.3       | 2          | 0.24             | 40.17      | Average  | 54             | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 4500            | -50.4       | 2          | -                | 46.83      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 4500            | -58.1       | 2          | 0.12             | 39.25      | Average  | 54             | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 5149.6          | -44.76      | 2          | -                | 52.47      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 5147.5          | -55.13      | 2          | 0.12             | 42.22      | Average  | 54             | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 5150            | -45.19      | 2          | -                | 52.04      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 5150            | -54.69      | 2          | 0.12             | 42.66      | Average  | 54             | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 5350            | -50.79      | 2          | -                | 46.44      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 5350            | -57.46      | 2          | 0.12             | 39.89      | Average  | 54             | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 5449.44         | -46.47      | 2          | -                | 50.76      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 5373.12         | -56.52      | 2          | 0.12             | 40.83      | Average  | 54             | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 5460            | -49.47      | 2          | -                | 47.76      | Peak     | 68.2           | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 5460            | -57.26      | 2          | 0.12             | 40.09      | Average  | 54             | Pass    |
| NVNT      | n40  | 5190            | Ant1    | 4500            | -48.47      | 2          | -                | 48.76      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5190            | Ant1    | 4500            | -58.17      | 2          | 0.24             | 39.3       | Average  | 54             | Pass    |
| NVNT      | n40  | 5190            | Ant1    | 5148.97         | -43.96      | 2          | -                | 53.27      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5190            | Ant1    | 5148.97         | -54.37      | 2          | 0.24             | 43.1       | Average  | 54             | Pass    |
| NVNT      | n40  | 5190            | Ant1    | 5150            | -44.07      | 2          | -                | 53.16      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5190            | Ant1    | 5150            | -54.59      | 2          | 0.24             | 42.88      | Average  | 54             | Pass    |
| NVNT      | n40  | 5230            | Ant1    | 5350            | -49.72      | 2          | -                | 47.51      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5230            | Ant1    | 5350            | -57.73      | 2          | 0.24             | 39.74      | Average  | 54             | Pass    |
| NVNT      | n40  | 5230            | Ant1    | 5360.64         | -45.96      | 2          | -                | 51.27      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5230            | Ant1    | 5385.21         | -56.48      | 2          | 0.24             | 40.99      | Average  | 54             | Pass    |
| NVNT      | n40  | 5230            | Ant1    | 5460            | -47.52      | 2          | -                | 49.71      | Peak     | 68.2           | Pass    |
| NVNT      | n40  | 5230            | Ant1    | 5460            | -57.21      | 2          | 0.24             | 40.26      | Average  | 54             | Pass    |

Guangzhou LCS Compliance Testing Laboratory Ltd.


Add: No.44-1, Qianfeng North Road, Shiqi, Panyu District, Guangzhou, Guangdong, China

Tel: +(86) 020-39166689 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


|      |      |      |      |         |        |   |      |       |         |      |      |
|------|------|------|------|---------|--------|---|------|-------|---------|------|------|
| NVNT | ac20 | 5180 | Ant1 | 4500    | -49.32 | 2 | -    | 47.91 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5180 | Ant1 | 4500    | -58    | 2 | 0.12 | 39.35 | Average | 54   | Pass |
| NVNT | ac20 | 5180 | Ant1 | 5147.5  | -45.31 | 2 | -    | 51.92 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5180 | Ant1 | 5148.2  | -55.01 | 2 | 0.12 | 42.34 | Average | 54   | Pass |
| NVNT | ac20 | 5180 | Ant1 | 5150    | -41.94 | 2 | -    | 55.29 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5180 | Ant1 | 5150    | -55.51 | 2 | 0.12 | 41.84 | Average | 54   | Pass |
| NVNT | ac20 | 5240 | Ant1 | 5350    | -48.78 | 2 | -    | 48.45 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5240 | Ant1 | 5350    | -57.44 | 2 | 0.12 | 39.91 | Average | 54   | Pass |
| NVNT | ac20 | 5240 | Ant1 | 5380.56 | -46.5  | 2 | -    | 50.73 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5240 | Ant1 | 5382.72 | -56.53 | 2 | 0.12 | 40.82 | Average | 54   | Pass |
| NVNT | ac20 | 5240 | Ant1 | 5460    | -49.99 | 2 | -    | 47.24 | Peak    | 68.2 | Pass |
| NVNT | ac20 | 5240 | Ant1 | 5460    | -58.03 | 2 | 0.12 | 39.32 | Average | 54   | Pass |
| NVNT | ac40 | 5190 | Ant1 | 4500    | -47.66 | 2 | -    | 49.57 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5190 | Ant1 | 4500    | -57.36 | 2 | 0.24 | 40.11 | Average | 54   | Pass |
| NVNT | ac40 | 5190 | Ant1 | 5149.7  | -44.65 | 2 | -    | 52.58 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5190 | Ant1 | 5148.97 | -54.93 | 2 | 0.24 | 42.54 | Average | 54   | Pass |
| NVNT | ac40 | 5190 | Ant1 | 5150    | -44.65 | 2 | -    | 52.58 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5190 | Ant1 | 5150    | -55.36 | 2 | 0.24 | 42.11 | Average | 54   | Pass |
| NVNT | ac40 | 5230 | Ant1 | 5350    | -49.71 | 2 | -    | 47.52 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5230 | Ant1 | 5350    | -57.07 | 2 | 0.23 | 40.39 | Average | 54   | Pass |
| NVNT | ac40 | 5230 | Ant1 | 5427.6  | -46.16 | 2 | -    | 51.07 | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5230 | Ant1 | 5371.44 | -56.51 | 2 | 0.23 | 40.95 | Average | 54   | Pass |
| NVNT | ac40 | 5230 | Ant1 | 5460    | -49.93 | 2 | -    | 47.3  | Peak    | 68.2 | Pass |
| NVNT | ac40 | 5230 | Ant1 | 5460    | -56.92 | 2 | 0.23 | 40.54 | Average | 54   | Pass |

## Test Graphs


## Restrict Band NVNT a 5180MHz Ant1 Peak

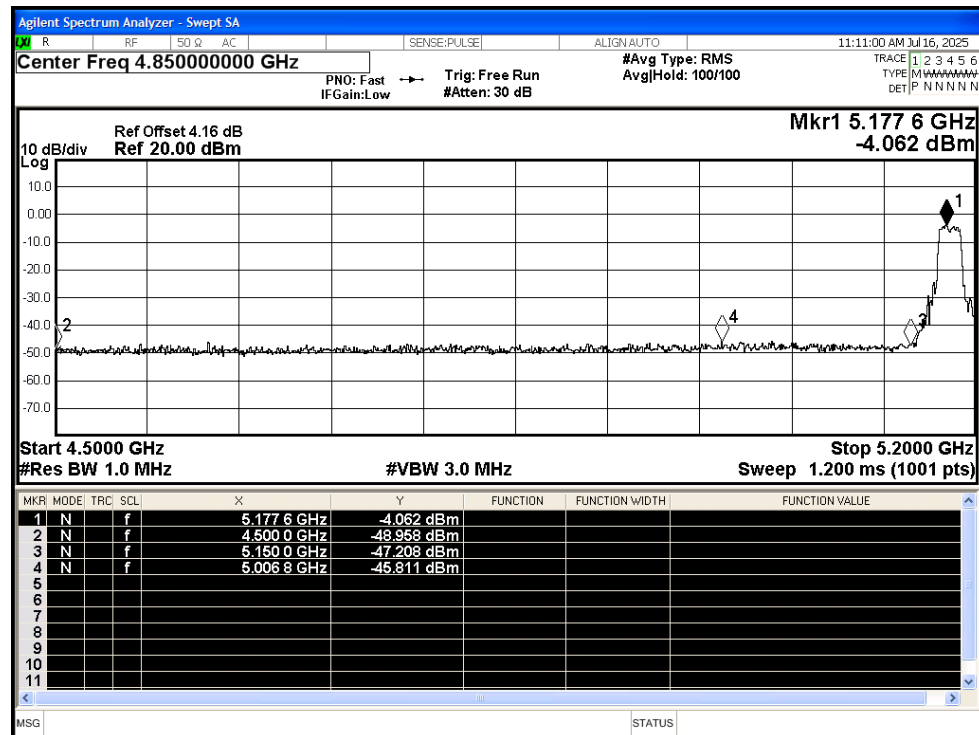


## Restrict Band NVNT a 5180MHz Ant1 Average

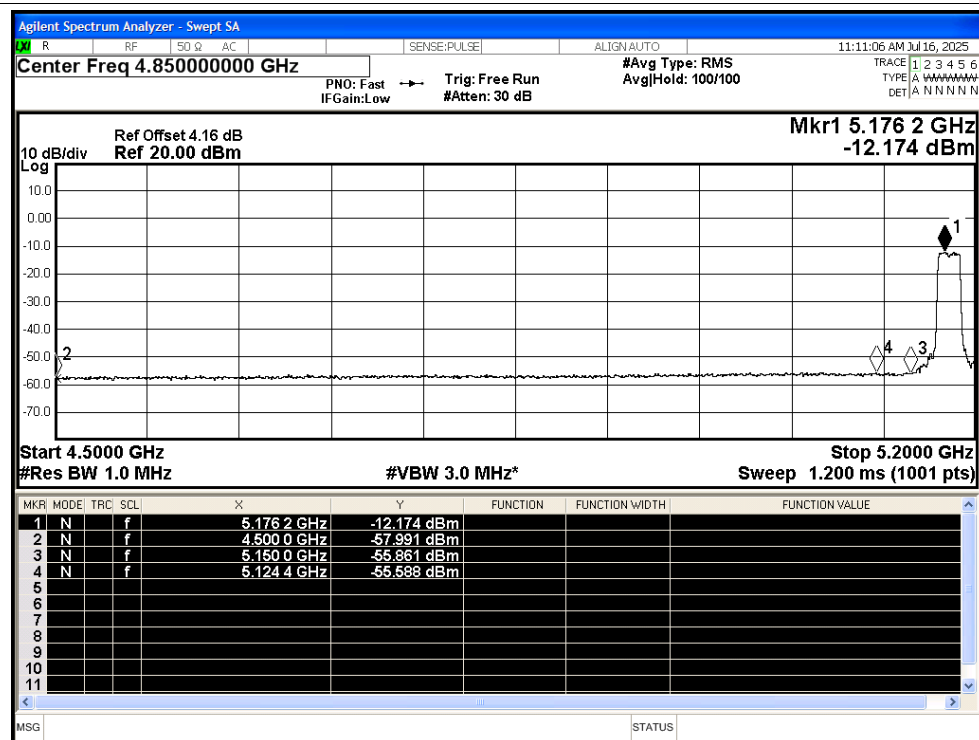


## Restrict Band NVNT a 5240MHz Ant1 Peak

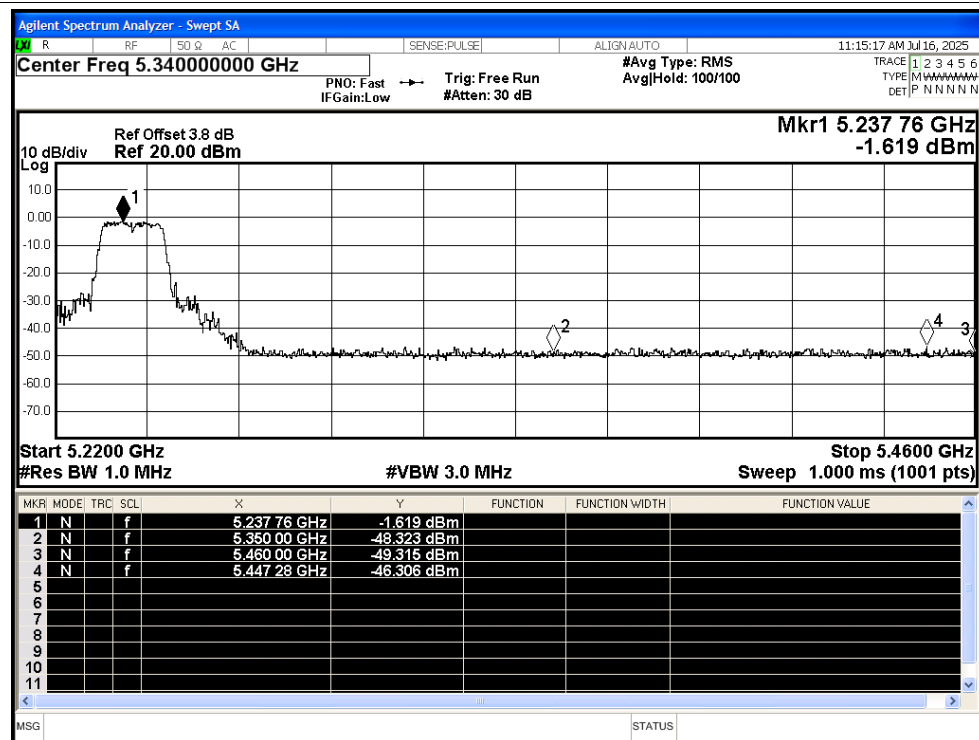


## Restrict Band NVNT a 5240MHz Ant1 Average

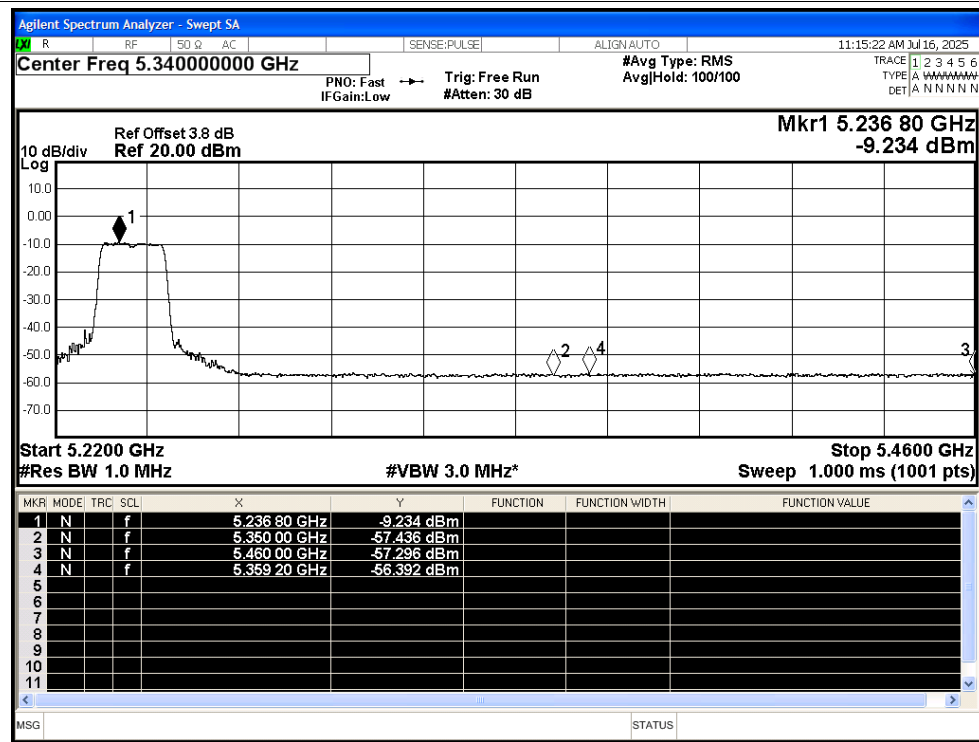


## Restrict Band NVNT n20 5180MHz Ant1 Peak

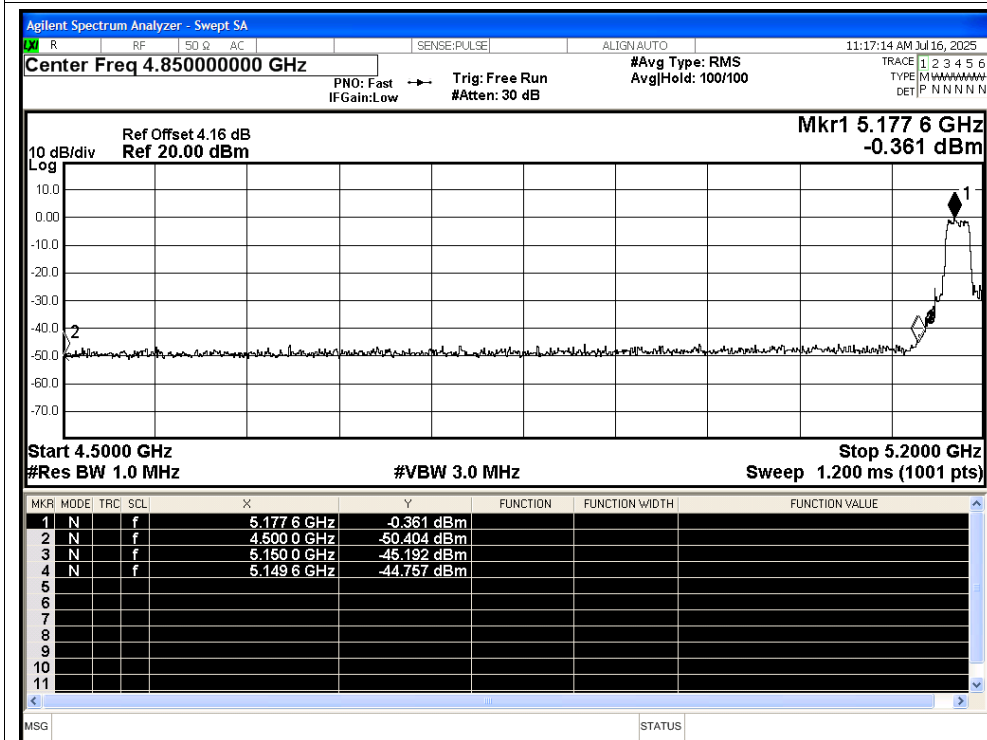


## Restrict Band NVNT n20 5180MHz Ant1 Average

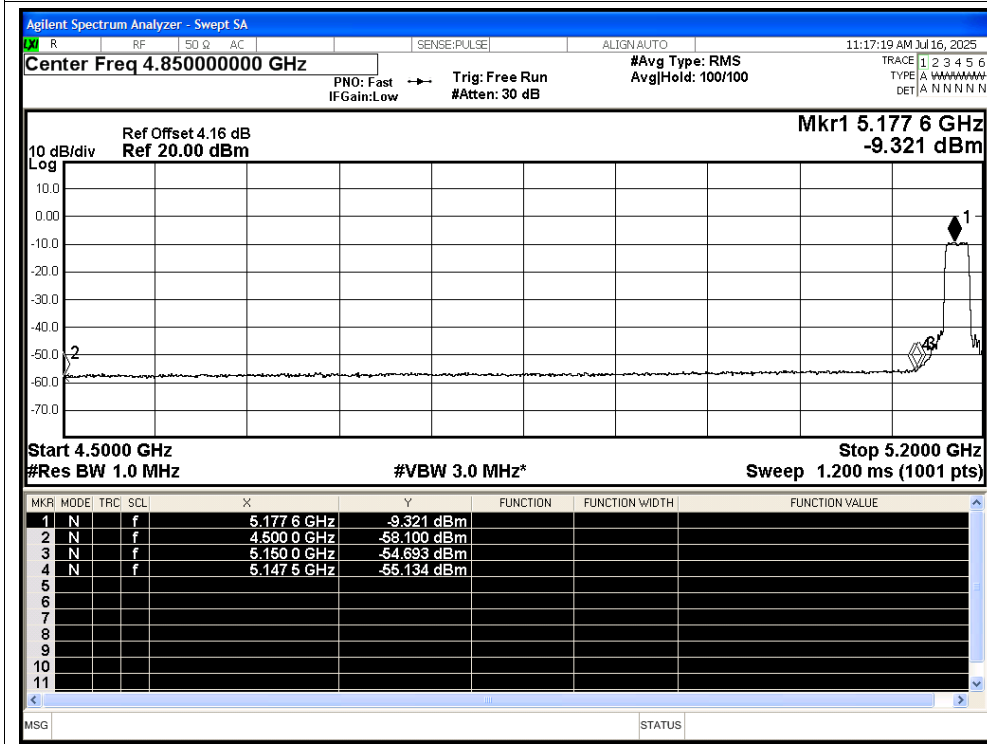

## Restrict Band NVNT n20 5240MHz Ant1 Peak

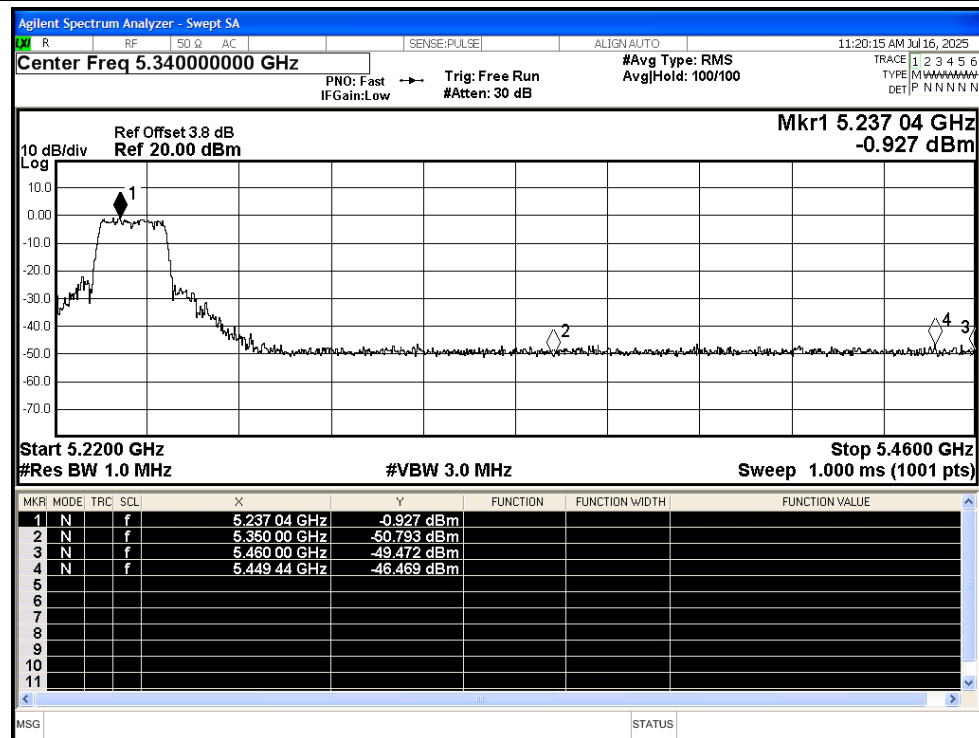


## Restrict Band NVNT n20 5240MHz Ant1 Average

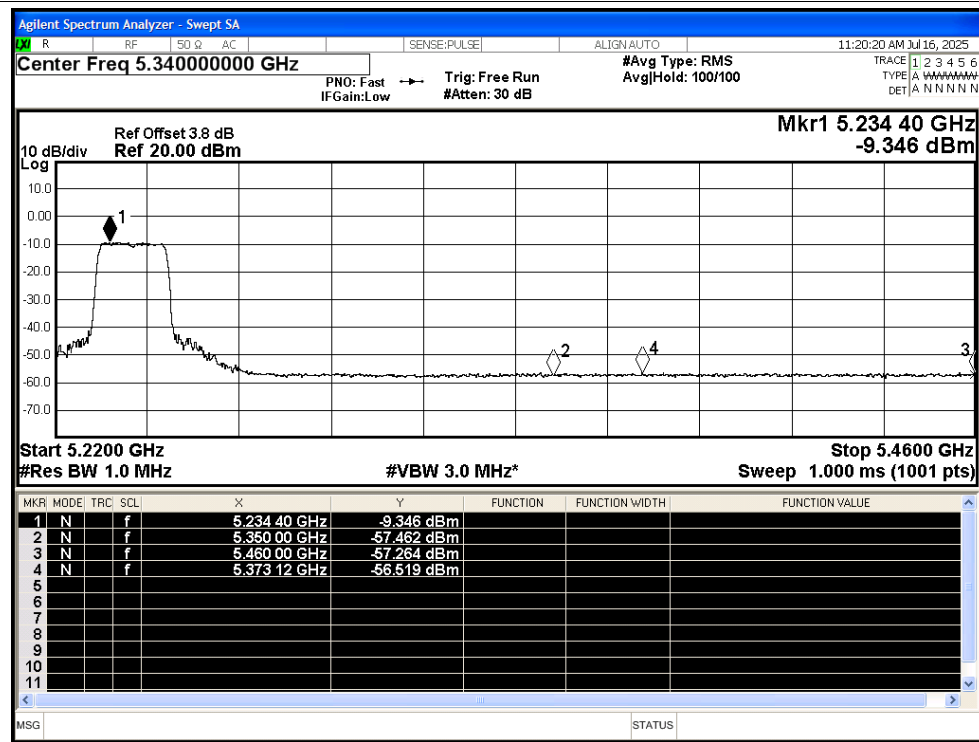





## Restrict Band NVNT n40 5190MHz Ant1 Peak

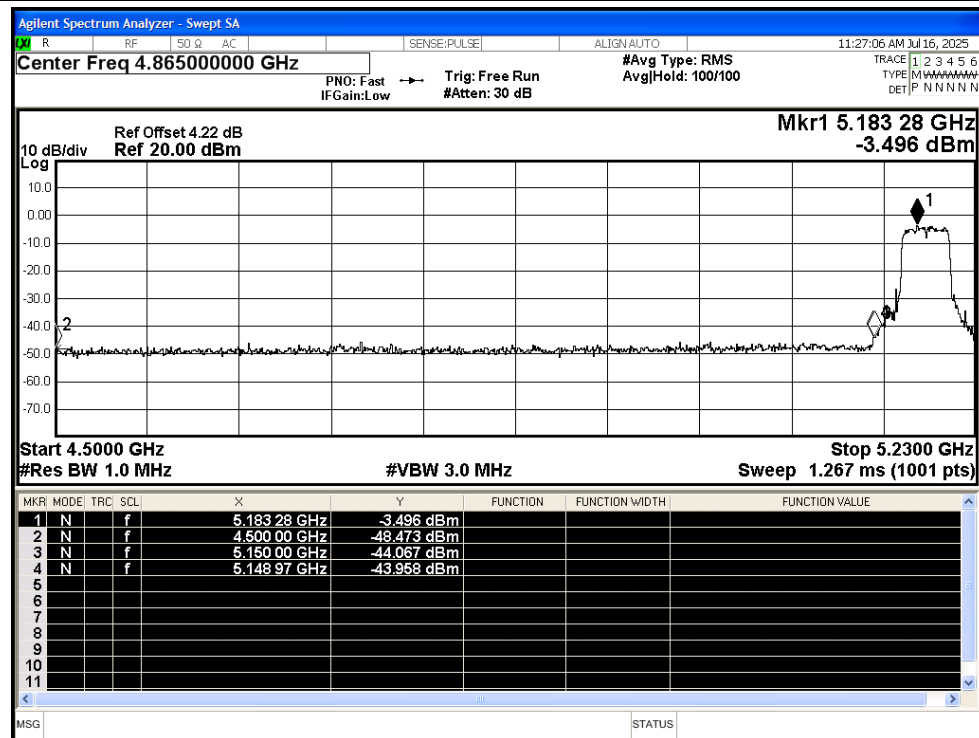


## Restrict Band NVNT n40 5190MHz Ant1 Average

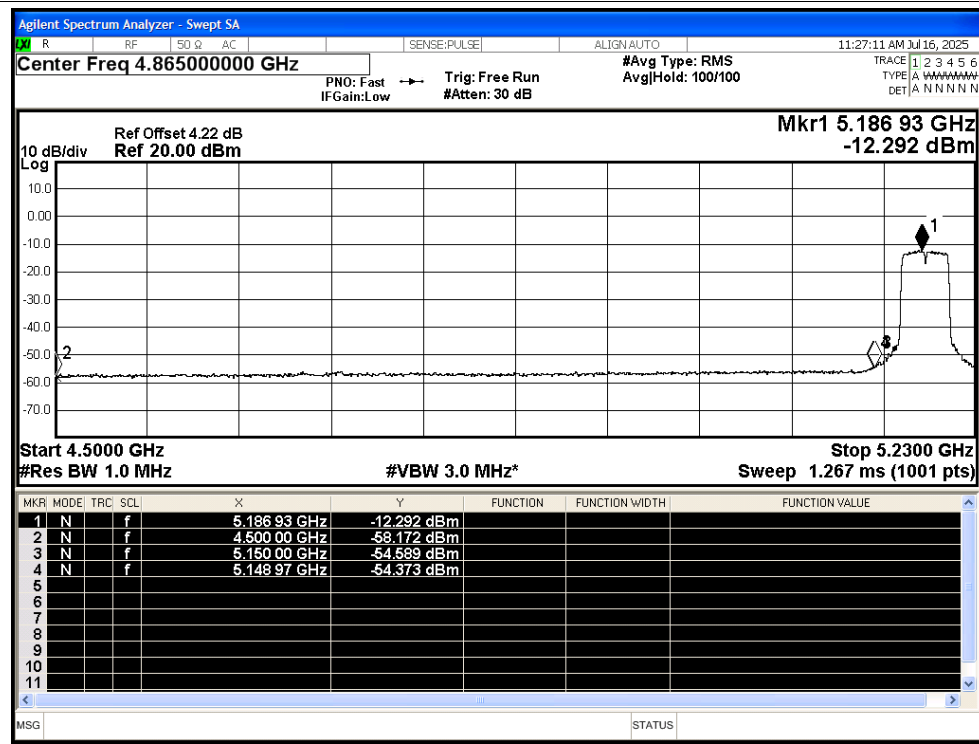


## Restrict Band NVNT n40 5230MHz Ant1 Peak

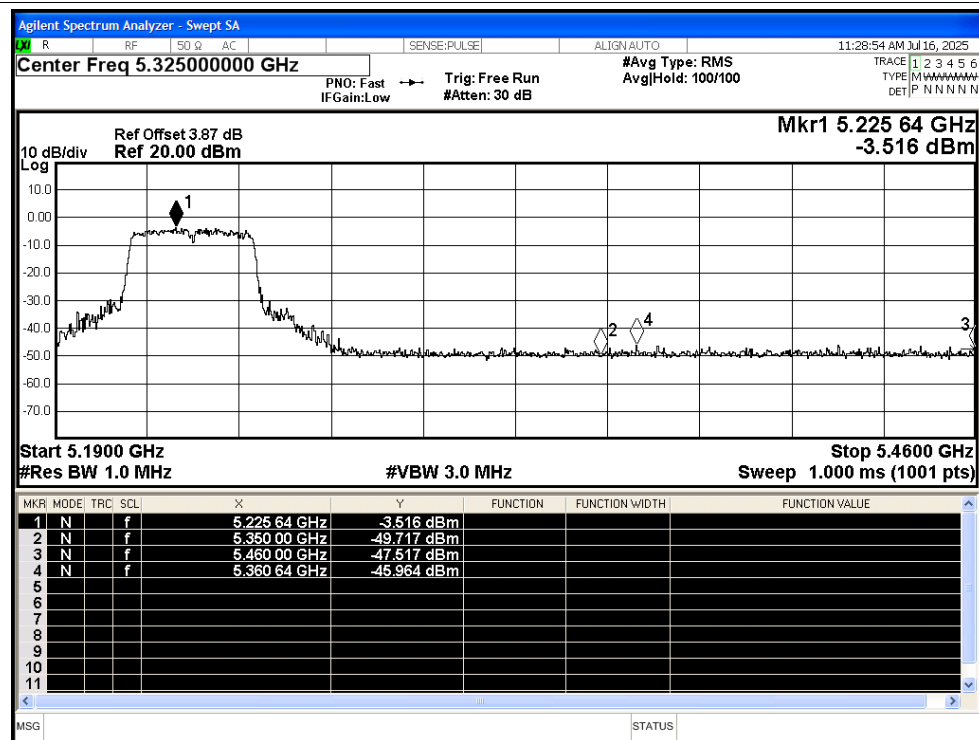


## Restrict Band NVNT n40 5230MHz Ant1 Average

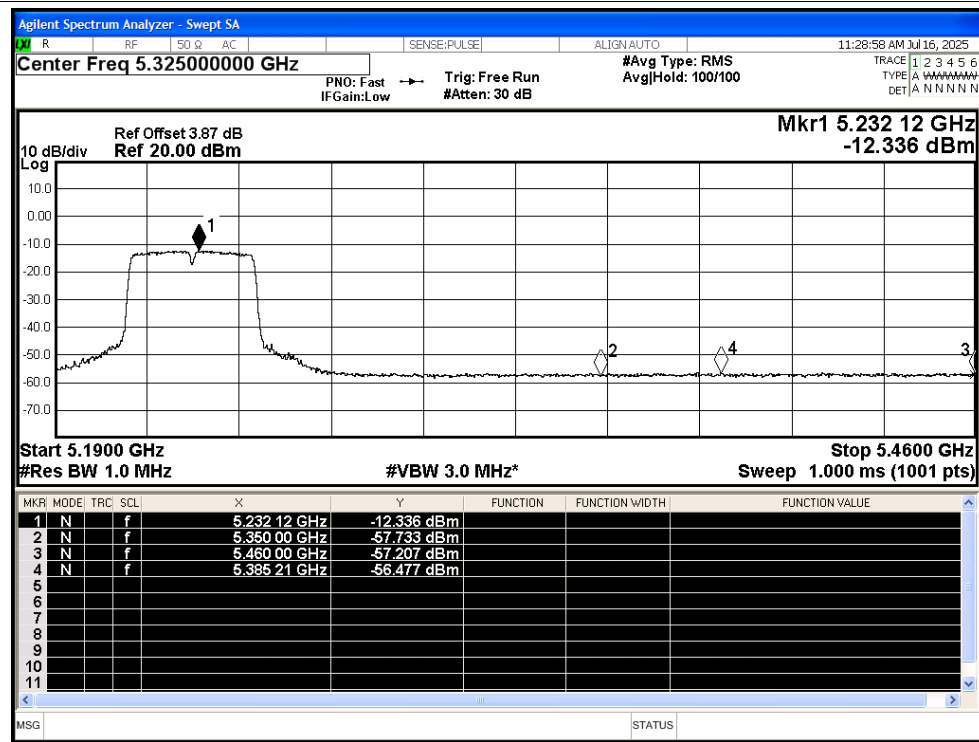


## Restrict Band NVNT ac20 5180MHz Ant1 Peak

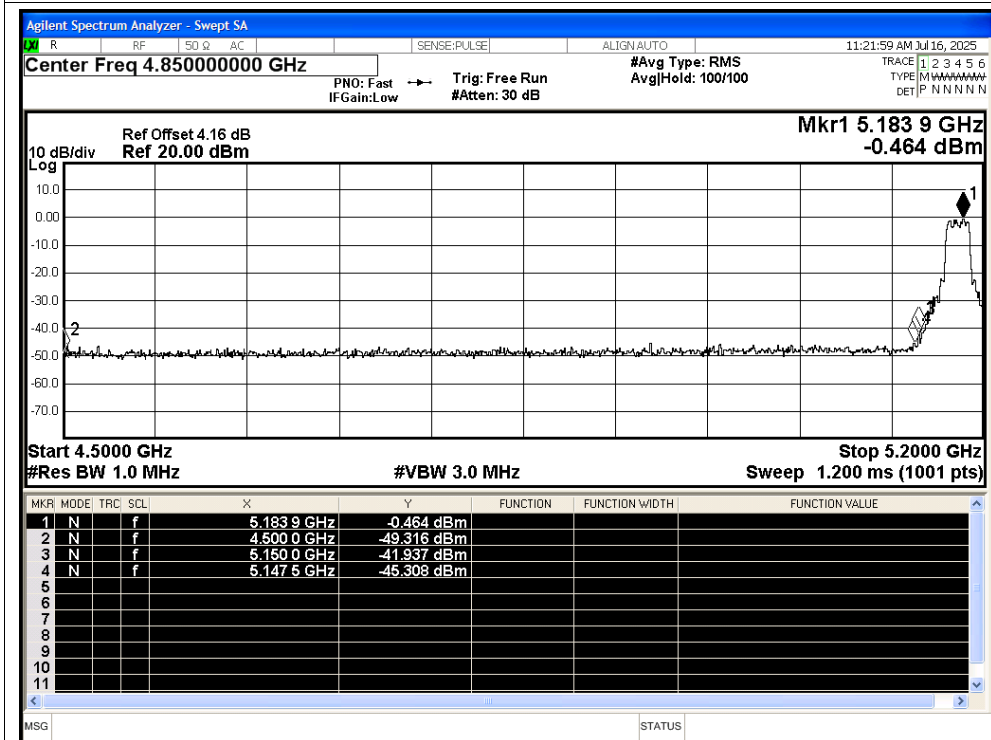


## Restrict Band NVNT ac20 5180MHz Ant1 Average

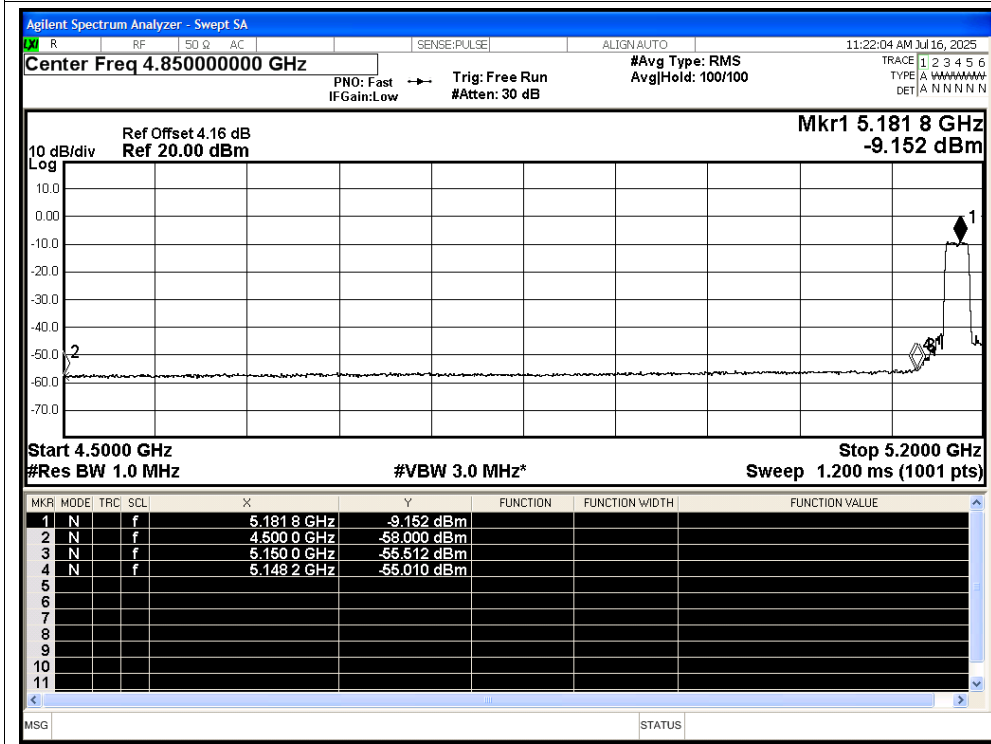


## Restrict Band NVNT ac20 5240MHz Ant1 Peak

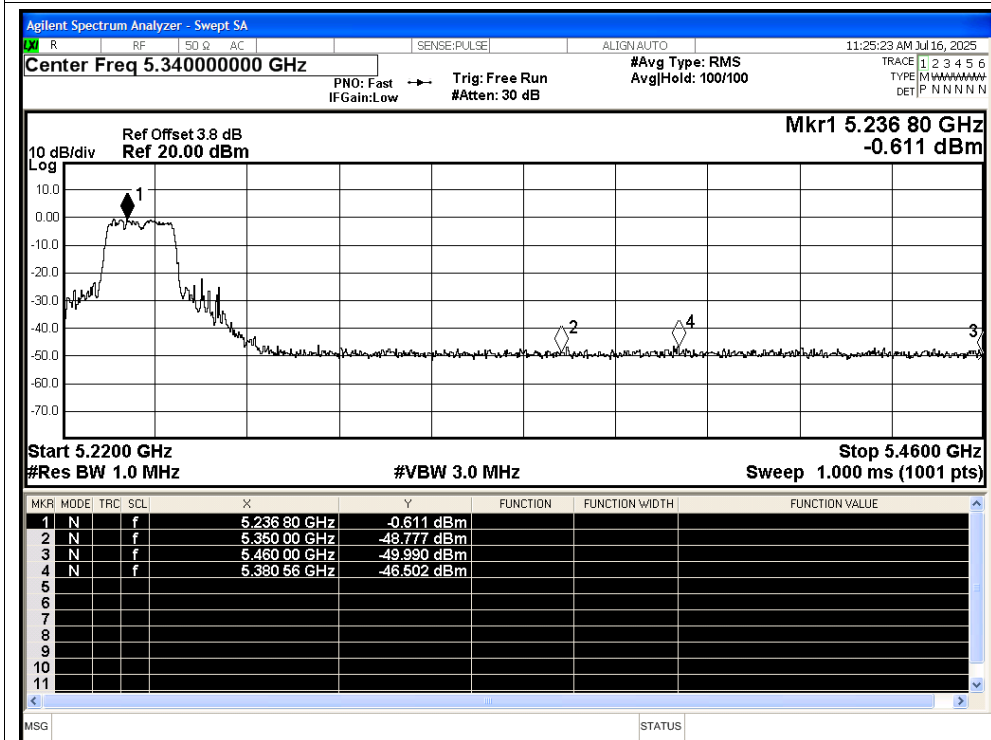


## Restrict Band NVNT ac20 5240MHz Ant1 Average

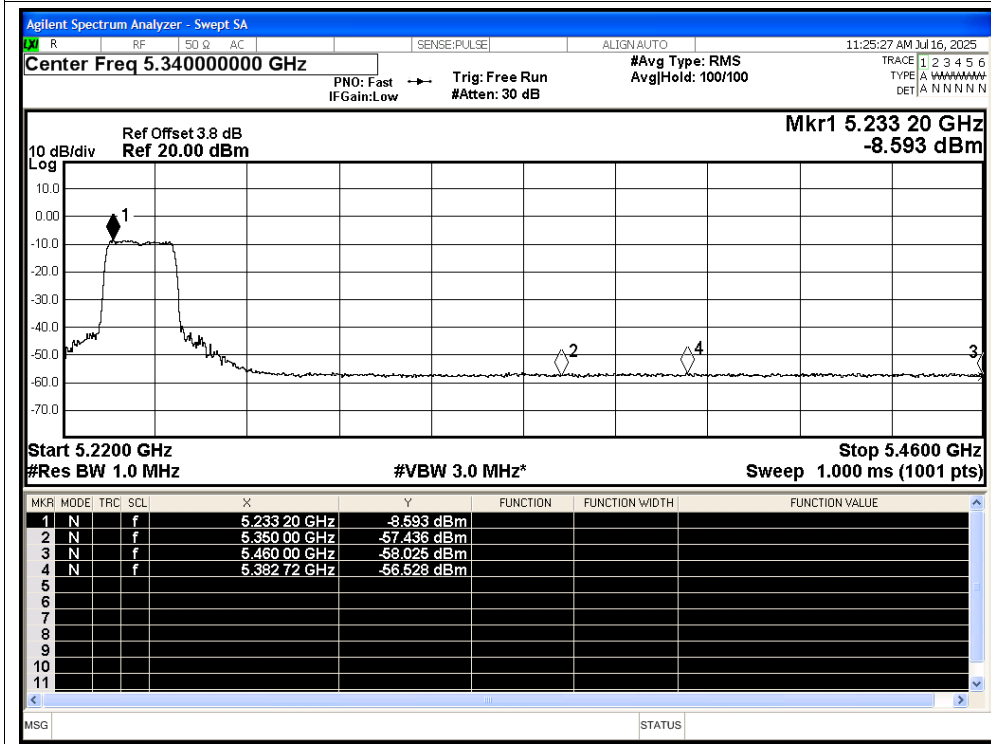


## Restrict Band NVNT ac40 5190MHz Ant1 Peak

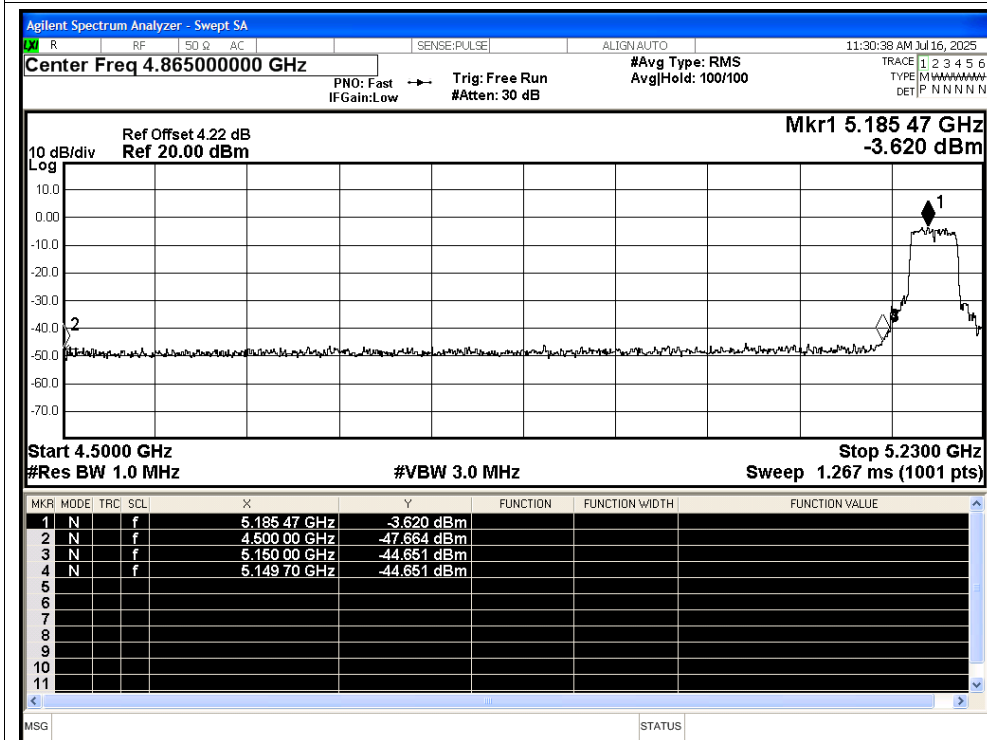


## Restrict Band NVNT ac40 5190MHz Ant1 Average

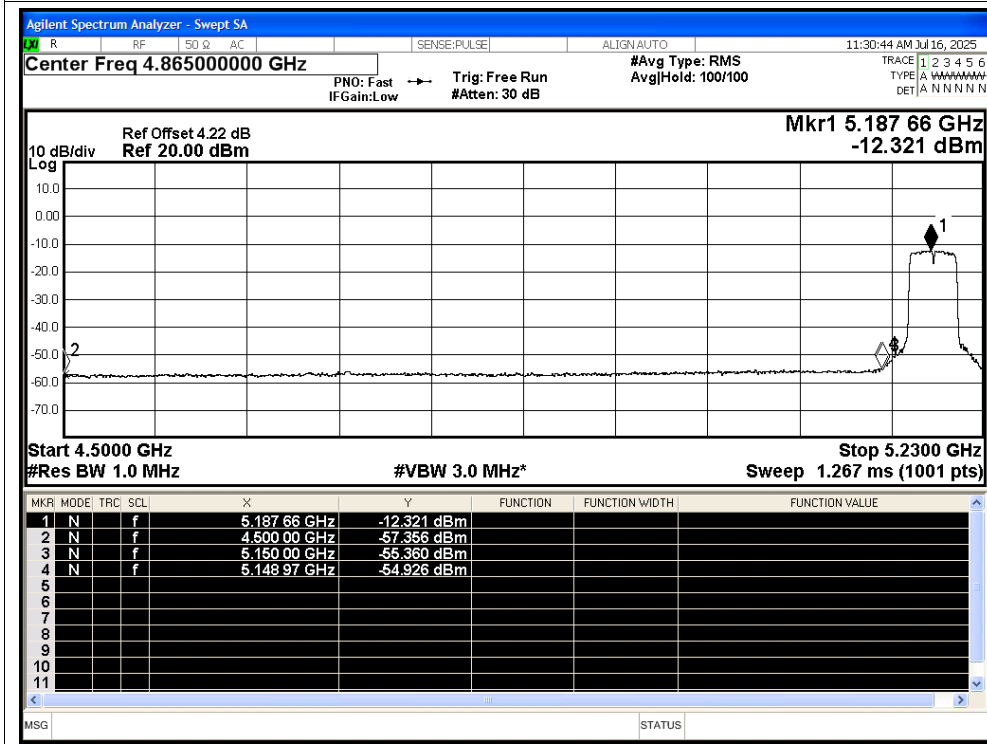

## Restrict Band NVNT ac40 5230MHz Ant1 Peak

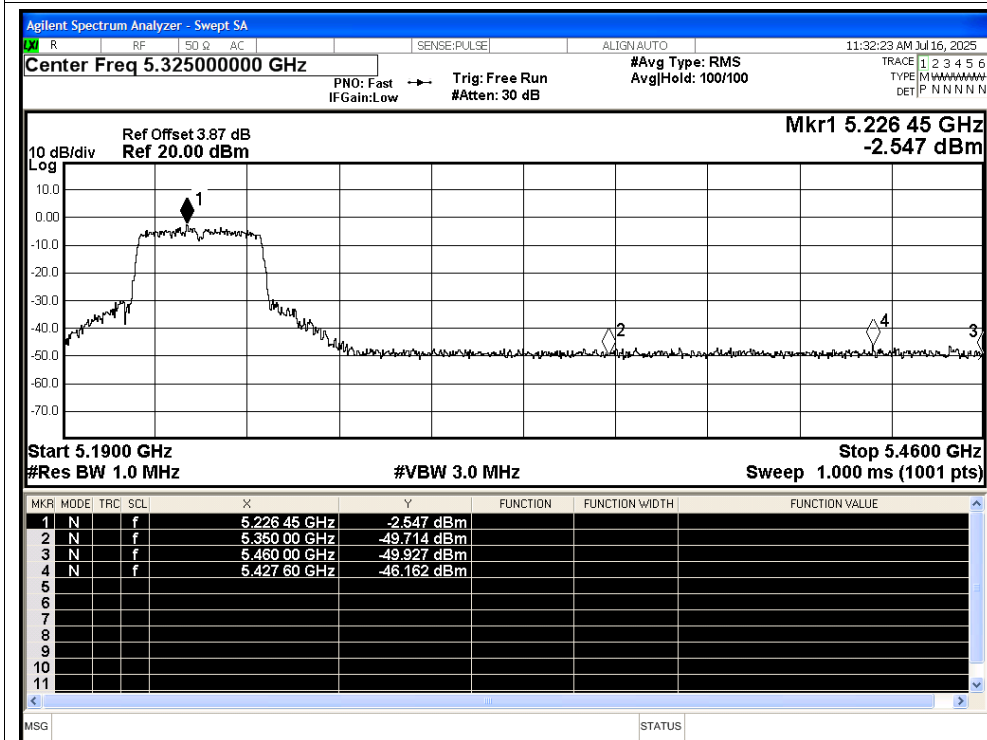

## Restrict Band NVNT ac40 5230MHz Ant1 Average

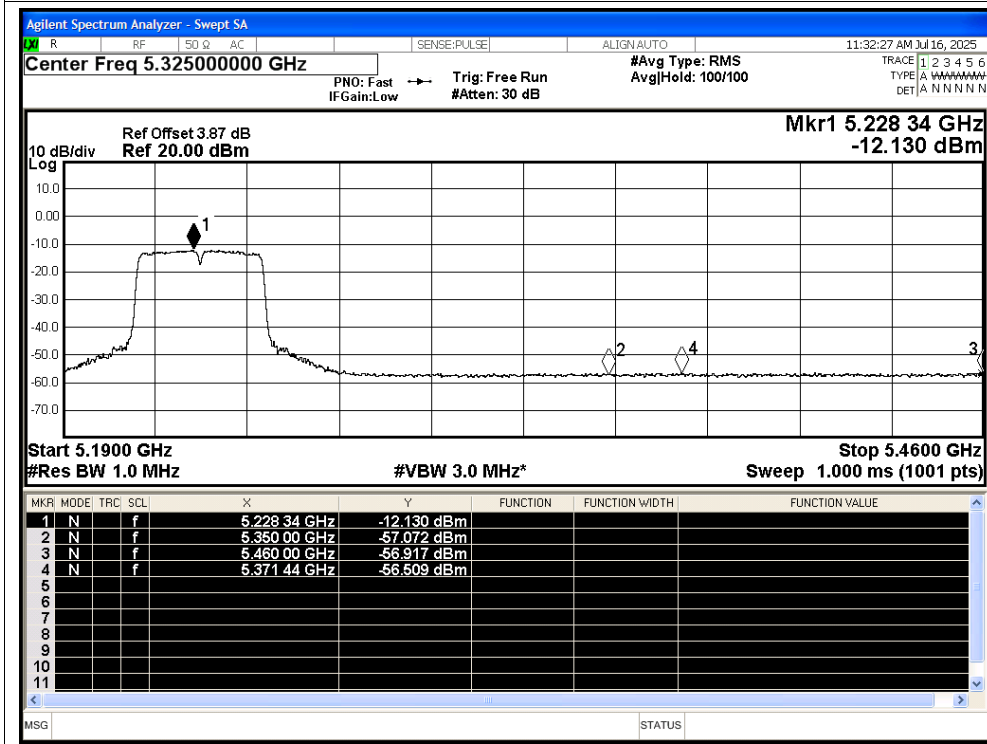


## B.5 Frequency Stability


| Condition | Mode | Frequency (MHz) | Antenna | Measured Frequency (MHz) | Frequency Error (Hz) | Deviation (ppm) | Limit (ppm) | Verdict |
|-----------|------|-----------------|---------|--------------------------|----------------------|-----------------|-------------|---------|
| NVNT      | a    | 5180            | Ant1    | 5180                     | 0                    | 0               | 25          | Pass    |
| NVNT      | a    | 5200            | Ant1    | 5200                     | 0                    | 0               | 25          | Pass    |
| NVNT      | a    | 5240            | Ant1    | 5239.98                  | -20000               | -3.82           | 25          | Pass    |
| NVNT      | n20  | 5180            | Ant1    | 5179.98                  | -20000               | -3.86           | 25          | Pass    |
| NVNT      | n20  | 5200            | Ant1    | 5199.98                  | -20000               | -3.85           | 25          | Pass    |
| NVNT      | n20  | 5240            | Ant1    | 5239.98                  | -20000               | -3.82           | 25          | Pass    |
| NVNT      | n40  | 5190            | Ant1    | 5190                     | 0                    | 0               | 25          | Pass    |
| NVNT      | n40  | 5230            | Ant1    | 5230                     | 0                    | 0               | 25          | Pass    |
| NVNT      | ac20 | 5180            | Ant1    | 5179.96                  | -40000               | -7.72           | 25          | Pass    |
| NVNT      | ac20 | 5200            | Ant1    | 5199.98                  | -20000               | -3.85           | 25          | Pass    |
| NVNT      | ac20 | 5240            | Ant1    | 5239.98                  | -20000               | -3.82           | 25          | Pass    |
| NVNT      | ac40 | 5190            | Ant1    | 5189.96                  | -40000               | -7.71           | 25          | Pass    |
| NVNT      | ac40 | 5230            | Ant1    | 5230                     | 0                    | 0               | 25          | Pass    |

## Test Graphs

## Freq. Stability NVNT a 5180MHz Ant1

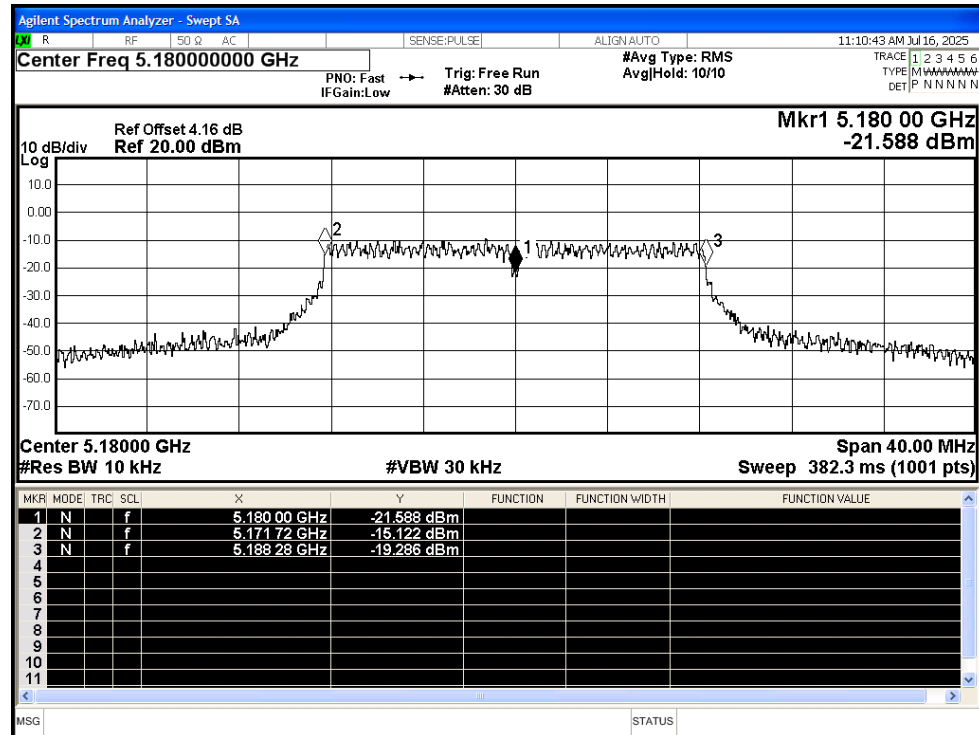


## Freq. Stability NVNT a 5200MHz Ant1

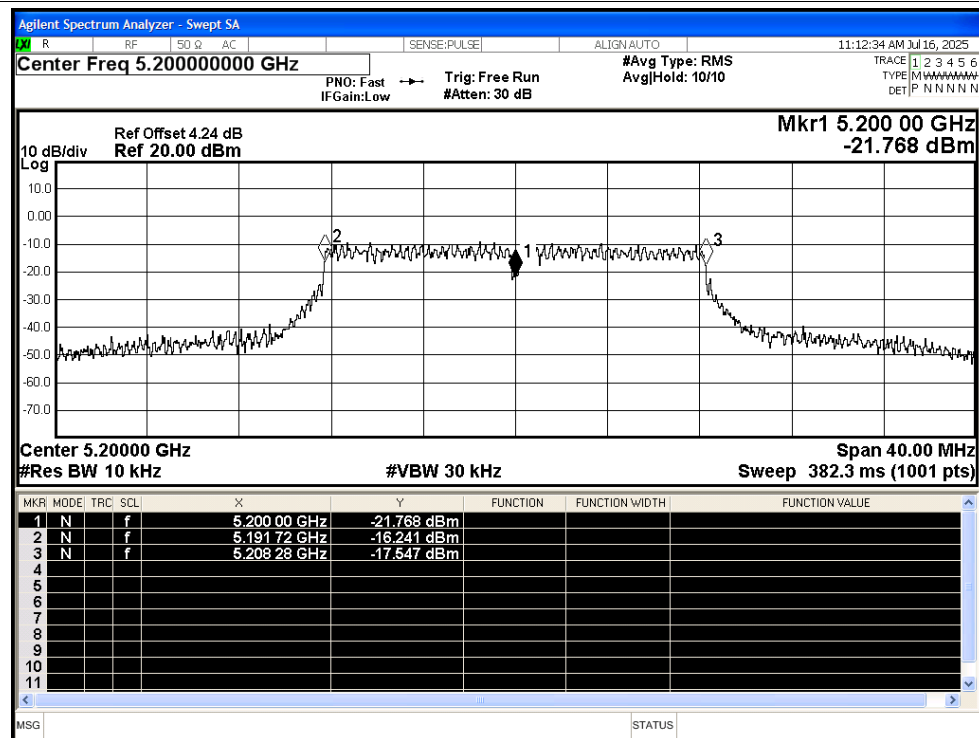





## Freq. Stability NVNT a 5240MHz Ant1

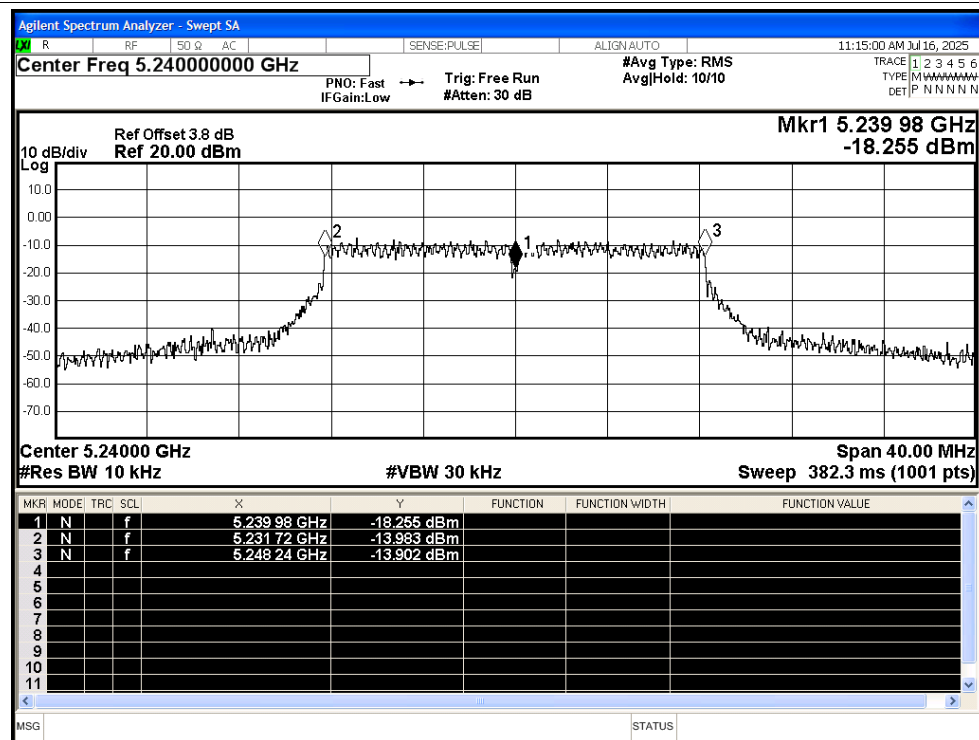


## Freq. Stability NVNT n20 5180MHz Ant1

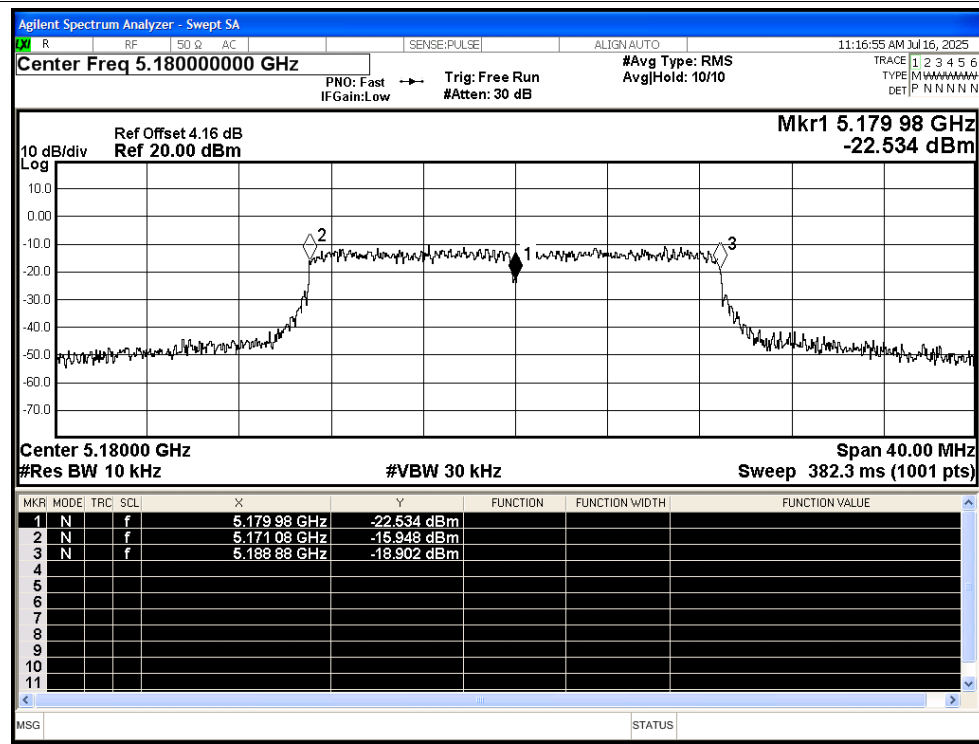


## Freq. Stability NVNT n20 5200MHz Ant1

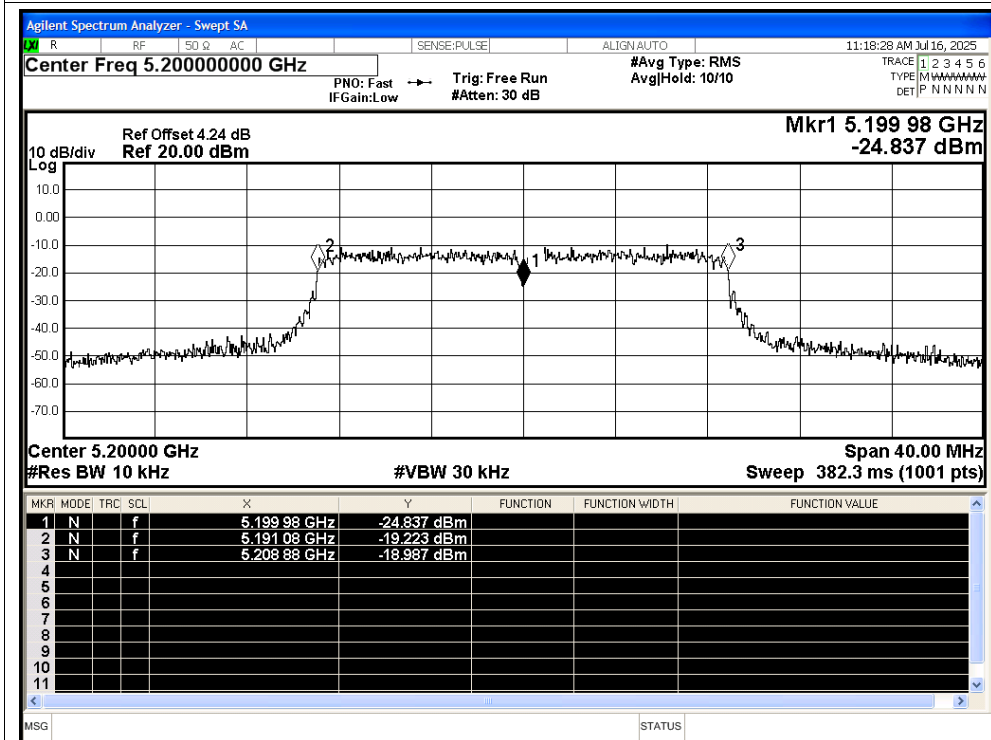


## Freq. Stability NVNT n20 5240MHz Ant1

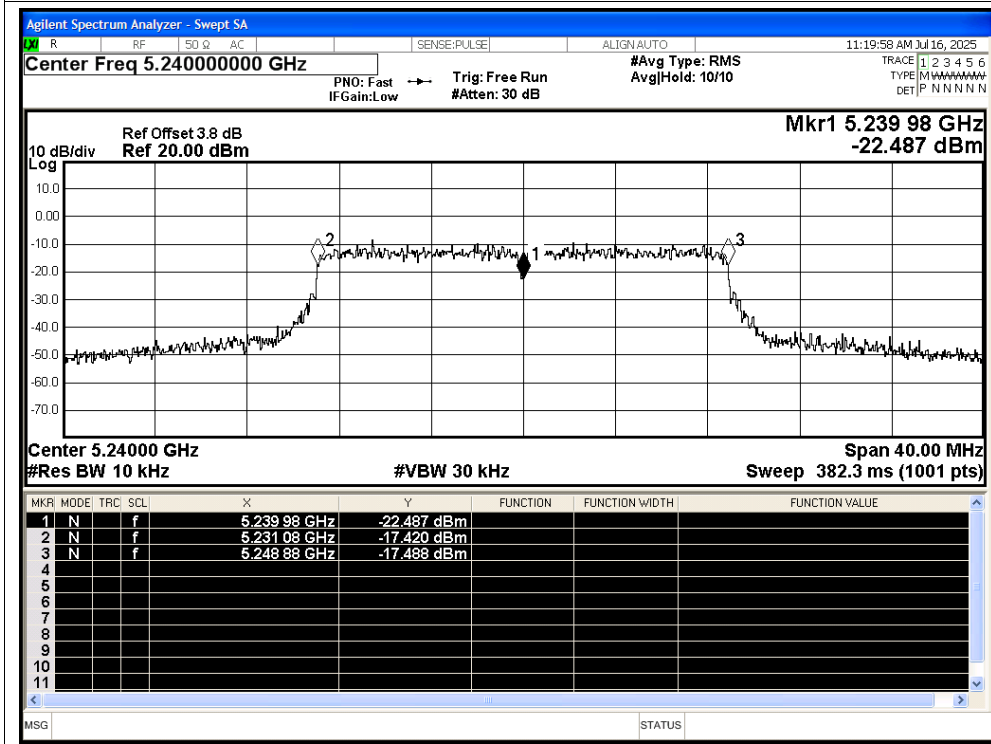


## Freq. Stability NVNT n40 5190MHz Ant1

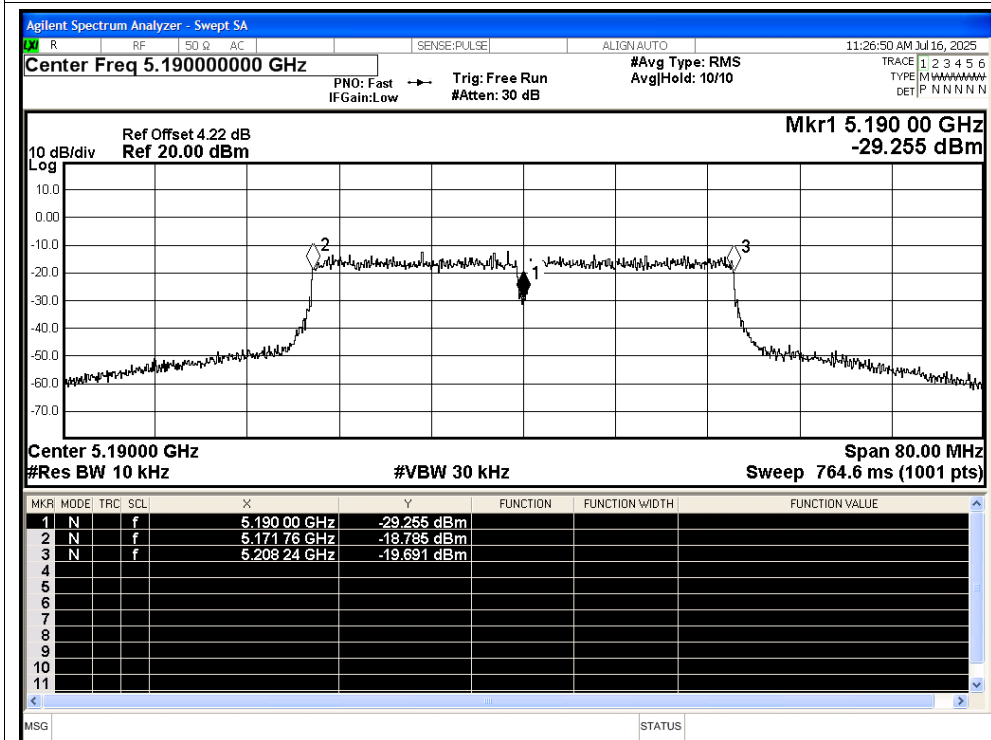


## Freq. Stability NVNT n40 5230MHz Ant1

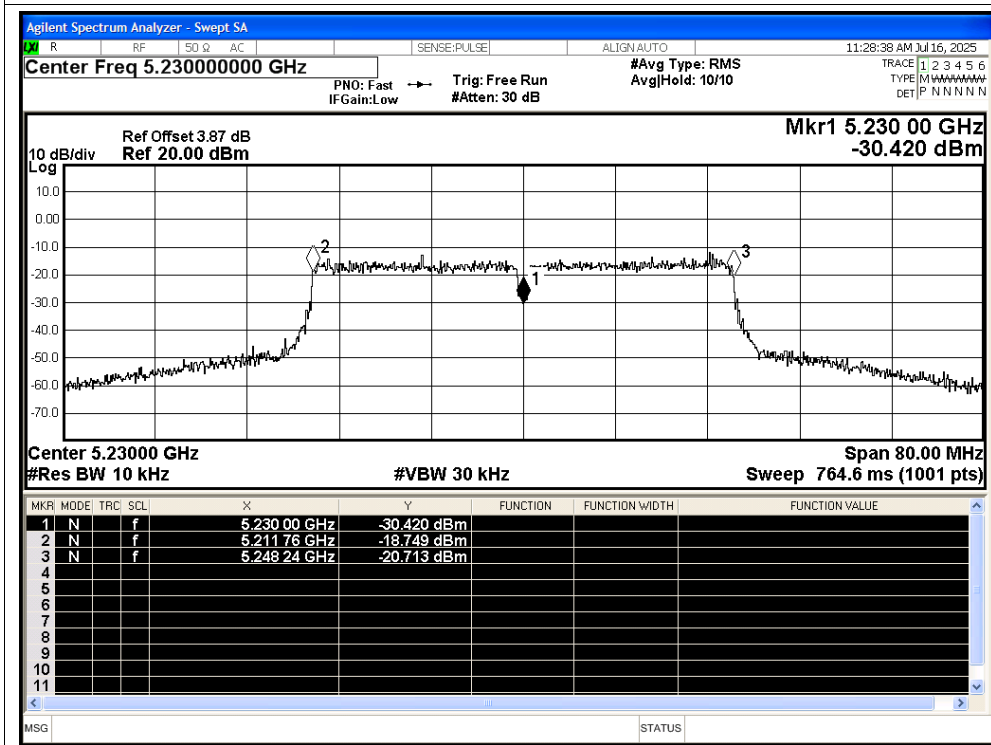


## Freq. Stability NVNT ac20 5180MHz Ant1

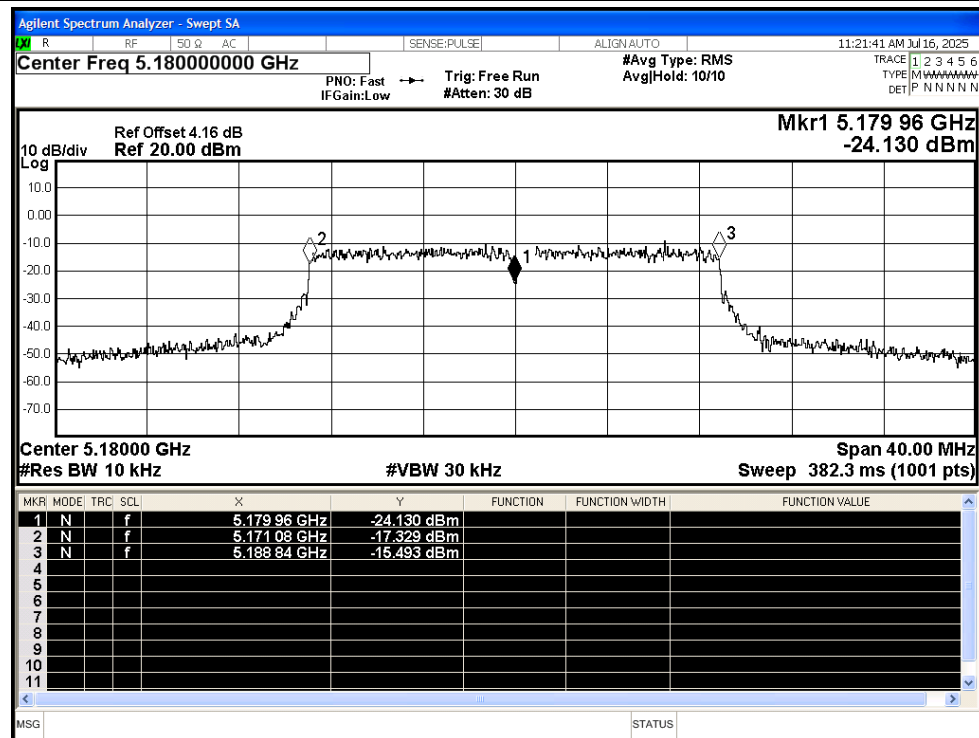


## Freq. Stability NVNT ac20 5200MHz Ant1

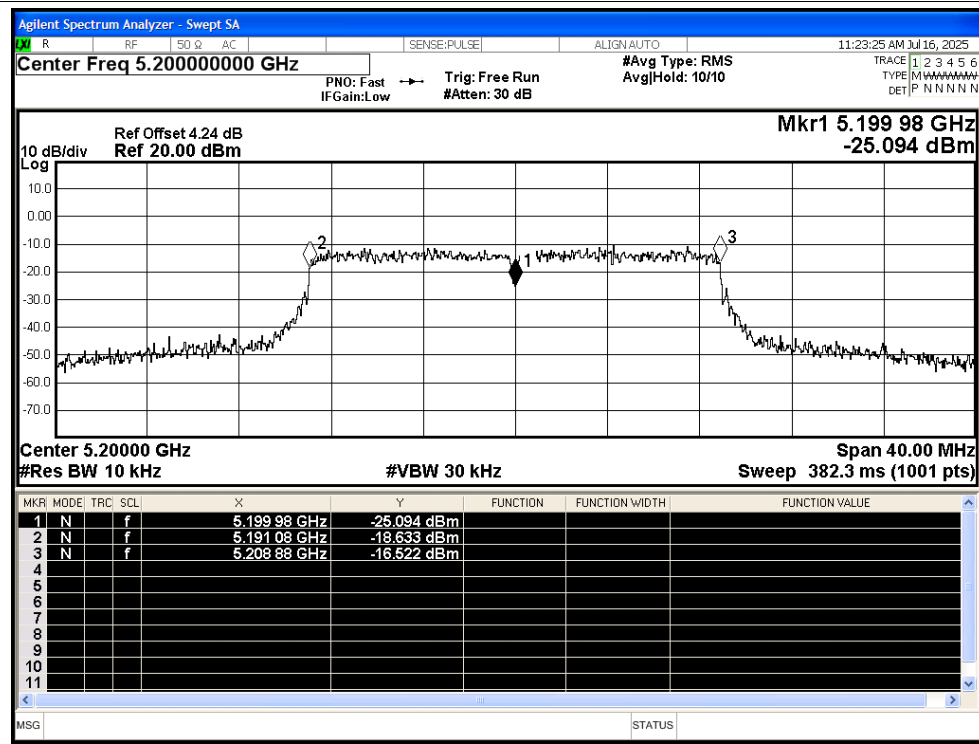


## Freq. Stability NVNT ac20 5240MHz Ant1

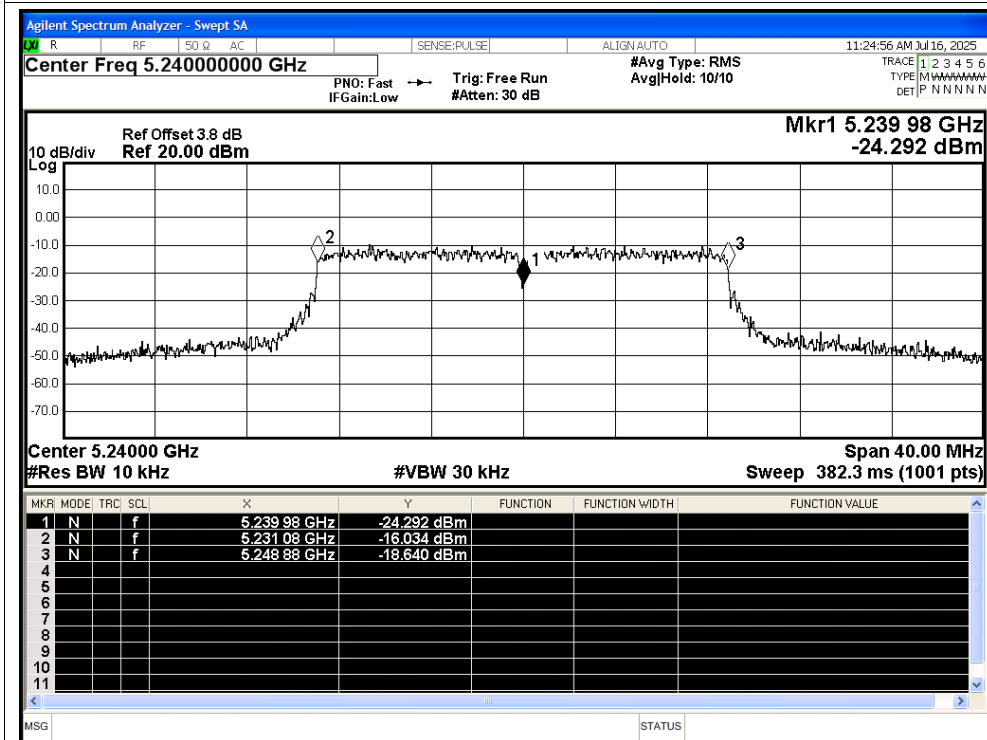

## Freq. Stability NVNT ac40 5190MHz Ant1

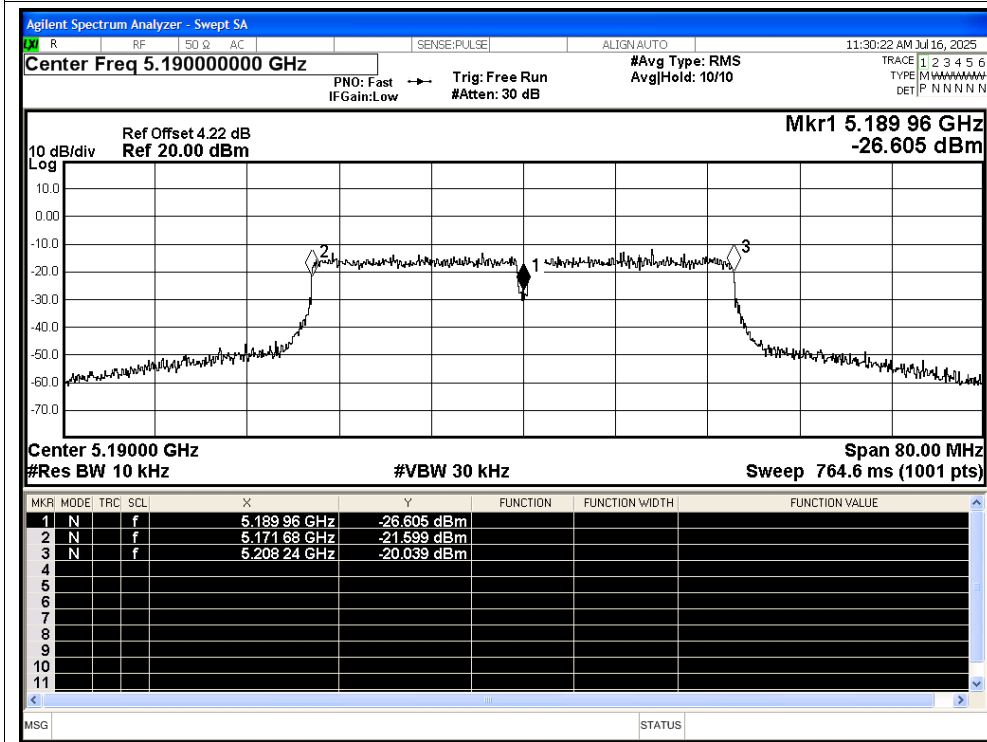

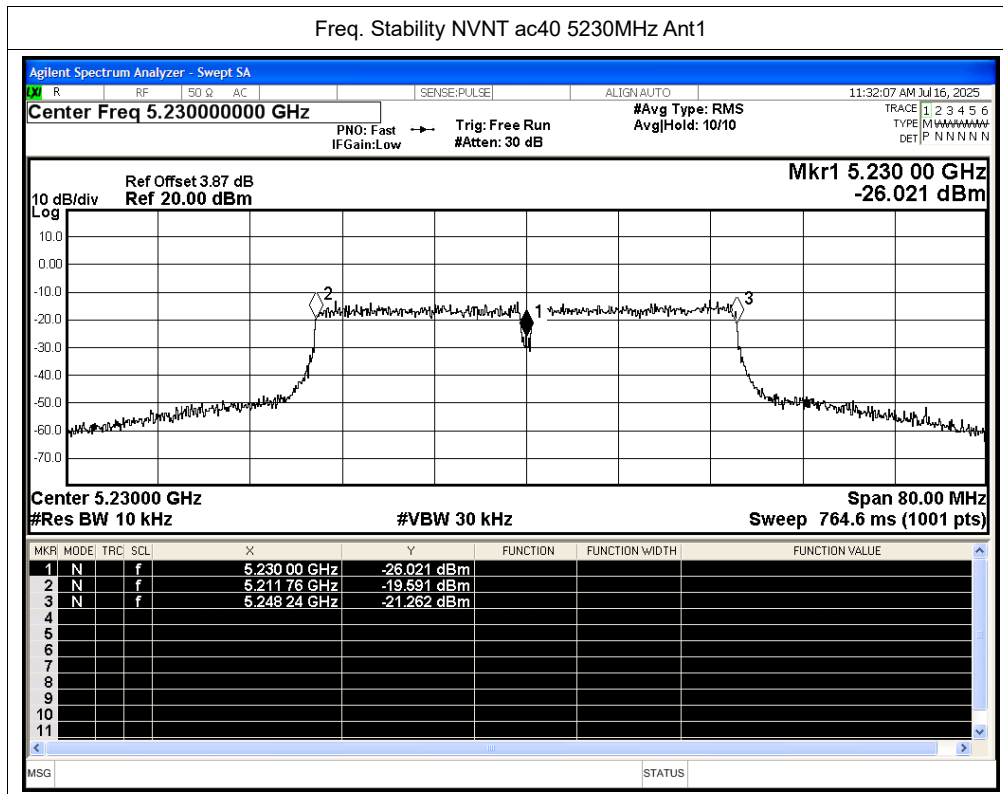


## B.6 Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | a    | 5180            | Ant1    | 94.56          | 0.24                   | 0.91      |
| NVNT      | a    | 5200            | Ant1    | 94.56          | 0.24                   | 0.91      |
| NVNT      | a    | 5240            | Ant1    | 94.65          | 0.24                   | 0.91      |
| NVNT      | n20  | 5180            | Ant1    | 97.29          | 0.12                   | 0.44      |
| NVNT      | n20  | 5200            | Ant1    | 97.29          | 0.12                   | 0.44      |
| NVNT      | n20  | 5240            | Ant1    | 97.33          | 0.12                   | 0.44      |
| NVNT      | n40  | 5190            | Ant1    | 94.71          | 0.24                   | 0.9       |
| NVNT      | n40  | 5230            | Ant1    | 94.71          | 0.24                   | 0.9       |
| NVNT      | ac20 | 5180            | Ant1    | 97.35          | 0.12                   | 0.44      |
| NVNT      | ac20 | 5200            | Ant1    | 97.34          | 0.12                   | 0.44      |
| NVNT      | ac20 | 5240            | Ant1    | 97.34          | 0.12                   | 0.44      |
| NVNT      | ac40 | 5190            | Ant1    | 94.72          | 0.24                   | 0.9       |
| NVNT      | ac40 | 5230            | Ant1    | 94.81          | 0.23                   | 0.9       |

## Test Graphs

## Duty Cycle NVNT a 5180MHz Ant1

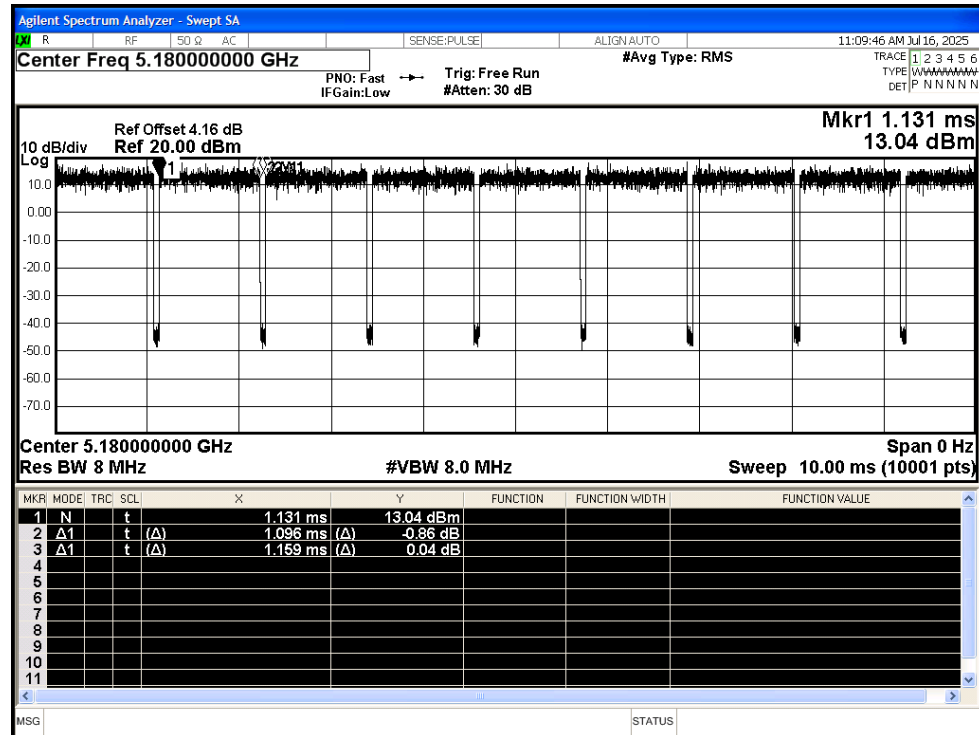


## Duty Cycle NVNT a 5200MHz Ant1

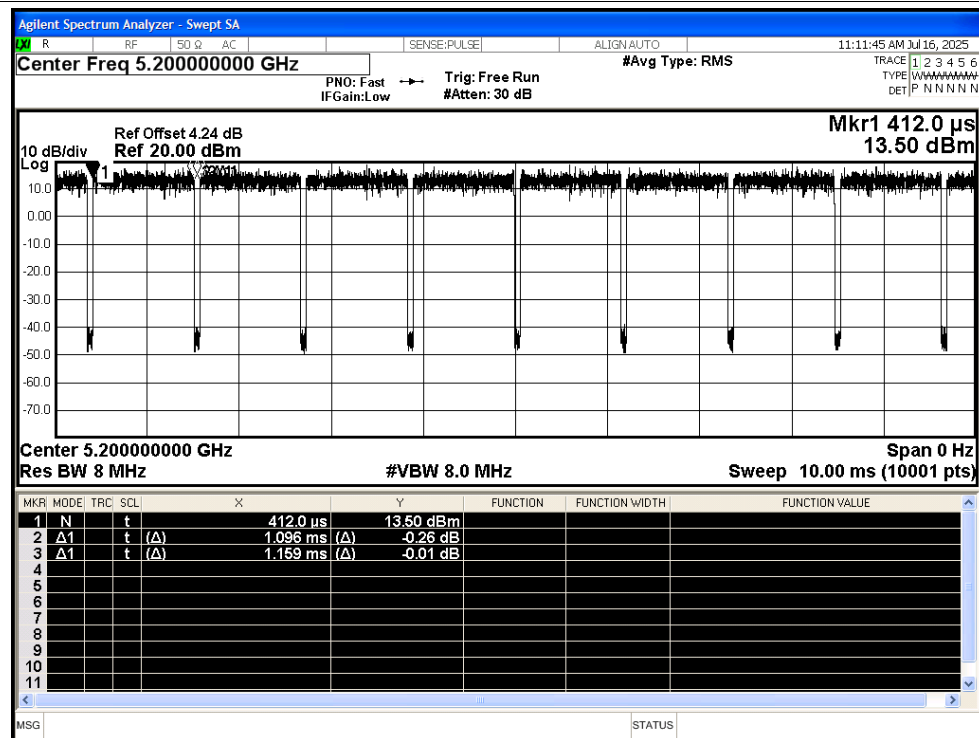






## Duty Cycle NVNT a 5240MHz Ant1

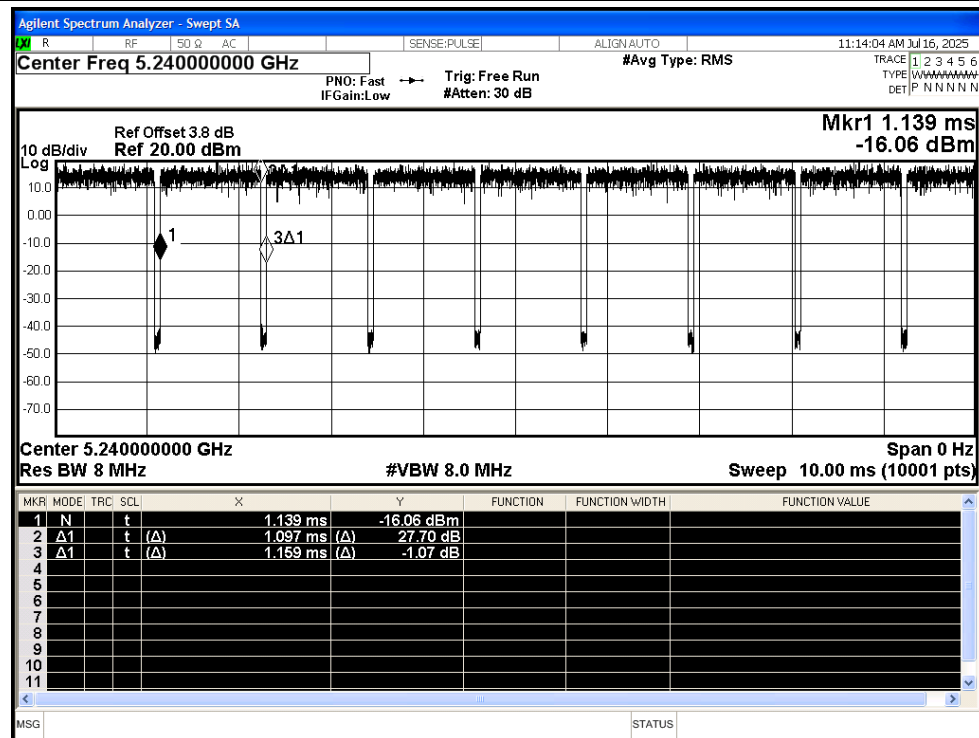


## Duty Cycle NVNT n20 5180MHz Ant1

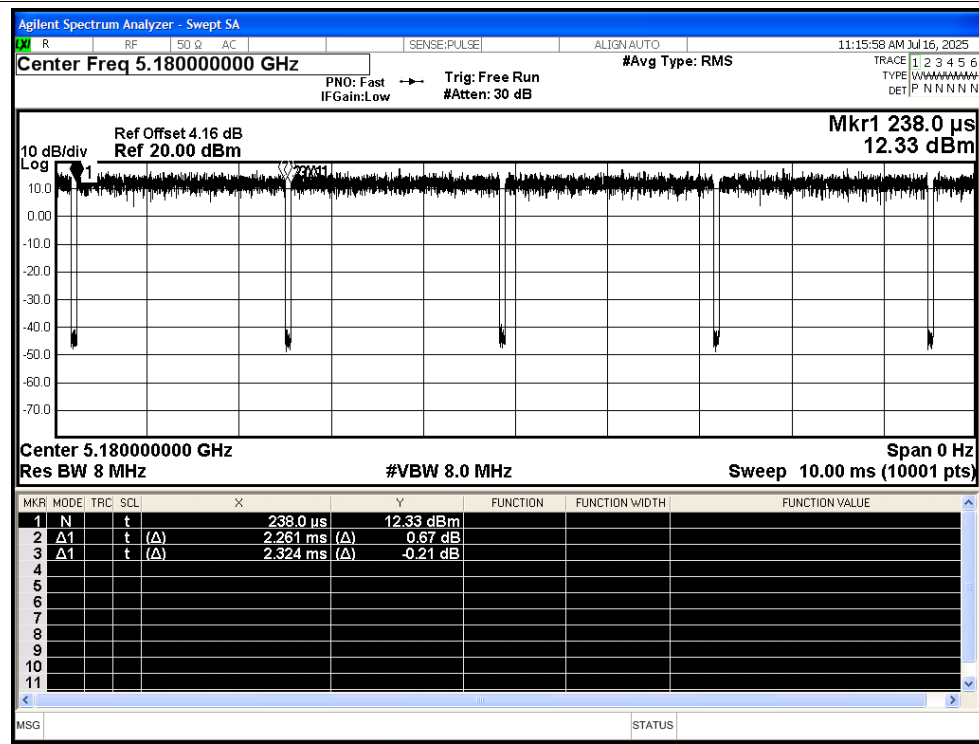


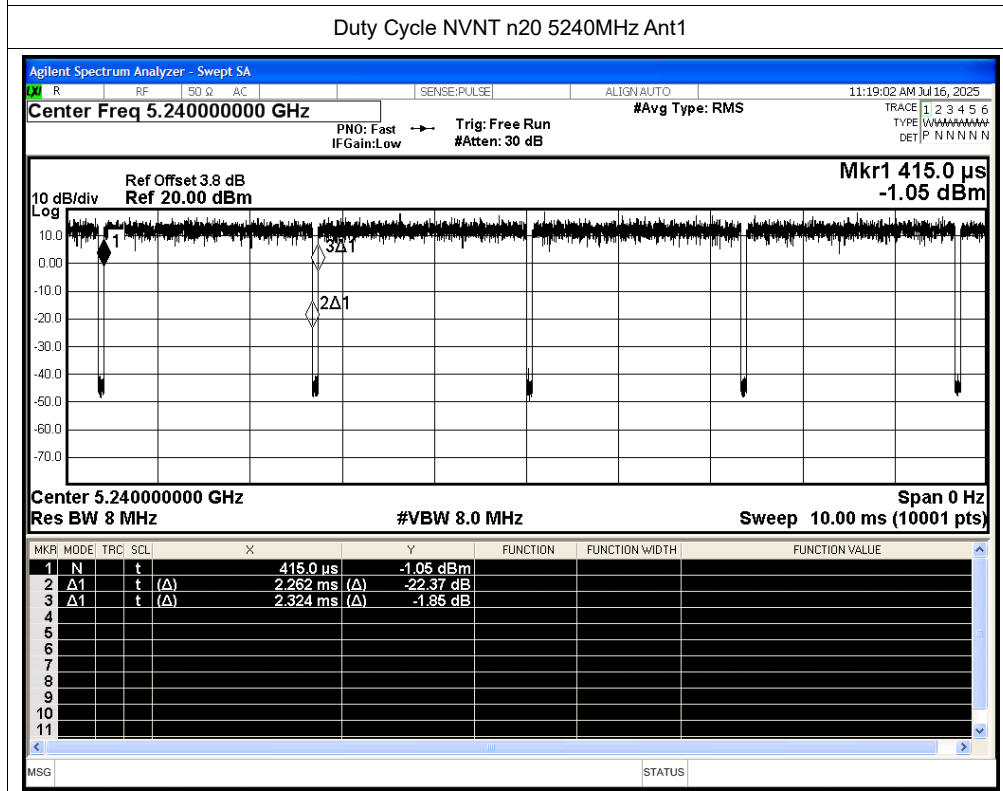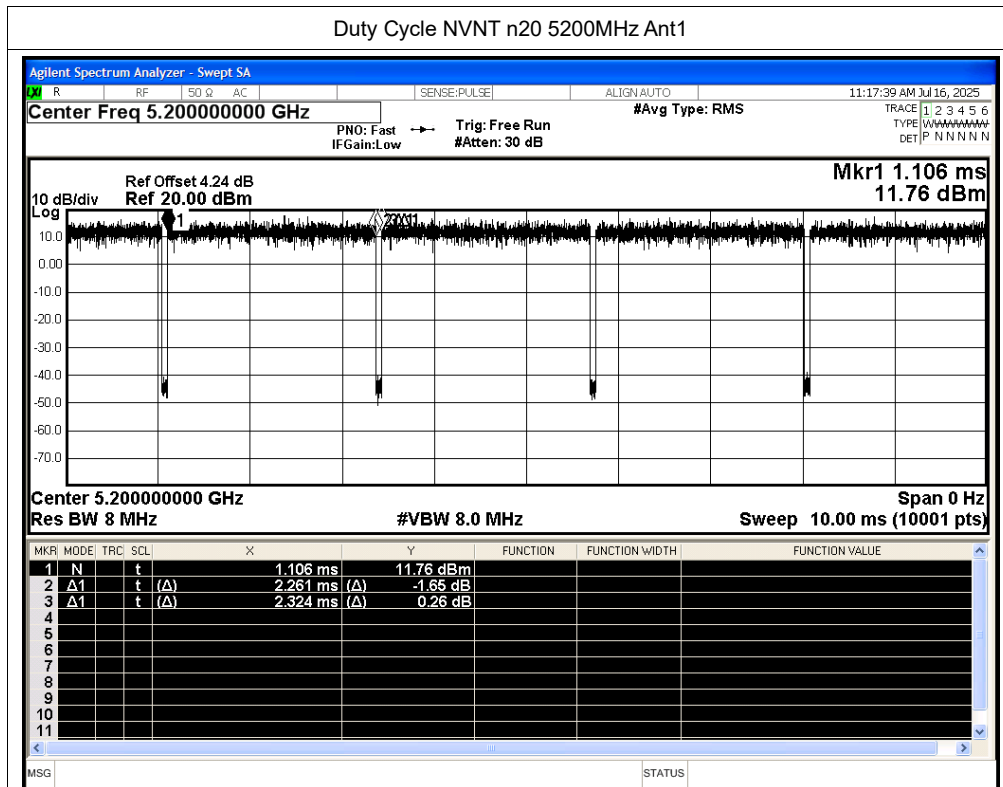


## Duty Cycle NVNT n40 5190MHz Ant1

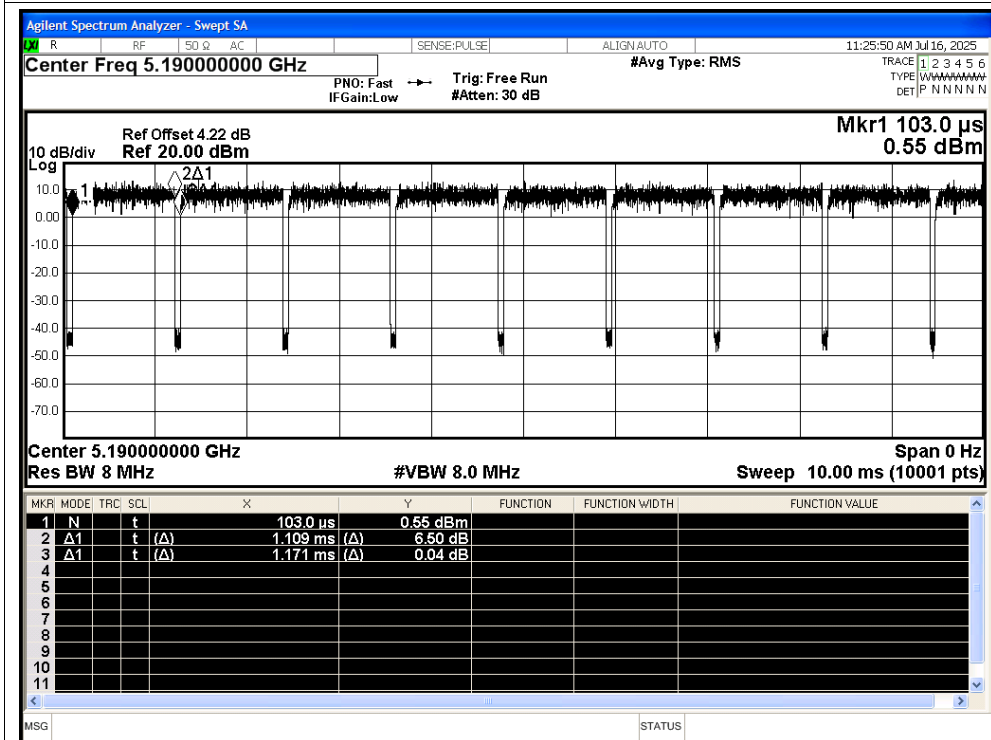


## Duty Cycle NVNT n40 5230MHz Ant1

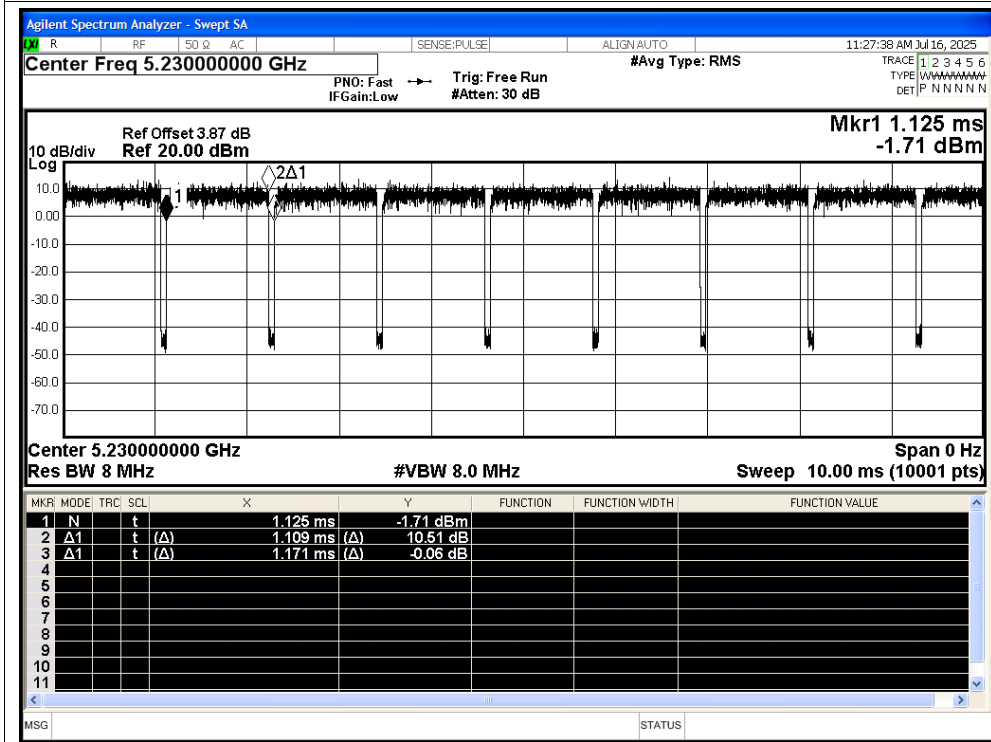

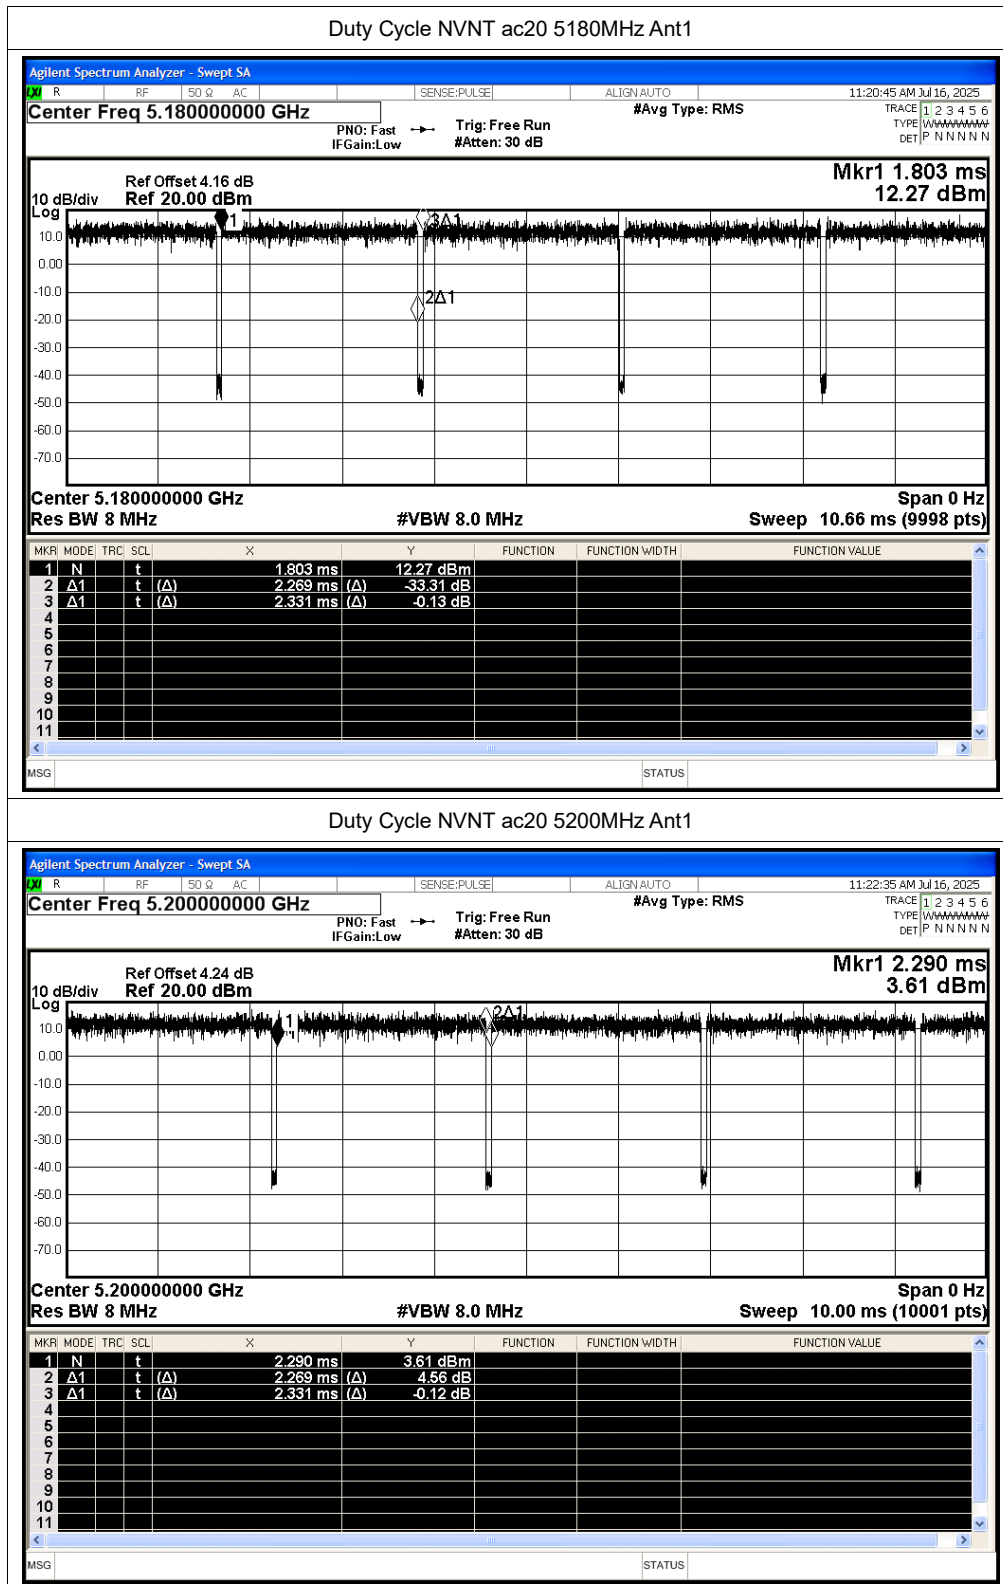

## Duty Cycle NVNT ac20 5240MHz Ant1

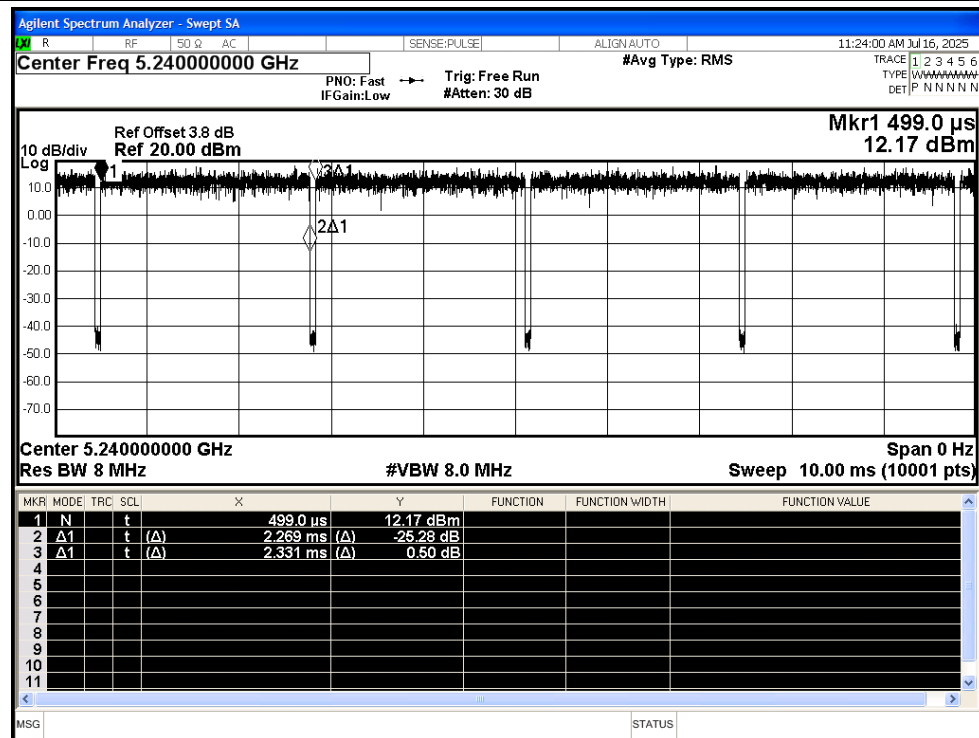

## Duty Cycle NVNT ac40 5190MHz Ant1

