

TEST REPORT

Product Name: Time Lapse Camera
FCC ID: 2ASW3-ATL4500
Trademark: 
Model Number: ATL4500
Prepared For: Shenzhen Atli Technology Co., Ltd
Address: 5F, Aozhihao Integrated Building, Xinzhou 4th Street, Futian District, Shenzhen, China
Manufacturer: Shenzhen Atli Technology Co., Ltd
Address: 5F, Aozhihao Integrated Building, Xinzhou 4th Street, Futian District, Shenzhen, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Aug. 19, 2024
Sample tested Date: Aug. 19, 2024 to Aug. 28, 2024
Issue Date: Sep. 24, 2024
Report No.: CTB240828099RFX
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHz band radio test report.

Compiled by:

Zhou kui

Zhou Kui

Reviewed by:

Arron Liu

Arron Liu

Approved by:



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	40
8.1 Block Diagram Of Test Setup	40
8.2 Limit	40
8.3 Test procedure	40
9. CONDUCTED OUTPUT POWER	57
9.1 Block Diagram Of Test Setup	57
9.2 Limit	57
9.3 Test procedure	57
9.4 Test Result	58
10. 6DB OCCUPIED BANDWIDTH	59
10.1 Block Diagram Of Test Setup	59
10.2 Limit	59
10.3 Test procedure	59
10.4 Test Result	60
11. POWER SPECTRAL DENSITY	70
11.1 Block Diagram Of Test Setup	70
11.2 Limit	70

11.3 Test procedure 70
11.4 Test Result 71
12. ANTENNA REQUIREMENT 80
13. EUT TEST SETUP PHOTOGRAPHS 81

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB240828099RFX	Sep. 24, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	ATL4500
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	T100-4.X.X
Software Version:	ATLI CAM
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 17.159dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: External antenna
Antenna Gain:	WiFi (2.4G): Ant1: 3.43dBi Ant2: 3.43dBi
Ratings:	DC 12V charging from adapter

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/TypeNo.	SeriesNo.	Note
1	Adapter	JIYIN	JY-05100C	/	AE

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	12
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2024/11/16
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28


Radiated emission(No.2 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2026/11/14
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/7/07
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/7/06
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/23
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2024/11/27
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/



9	Coaxial cable	Rosenberg	8m	/	/	2024/11/27
10	Coaxial cable	Times	2m	/	/	2024/11/27
11	Coaxial cable	Times	2m	/	/	2024/11/27
12	Coaxial cable	Times	1m	/	/	2024/11/27
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

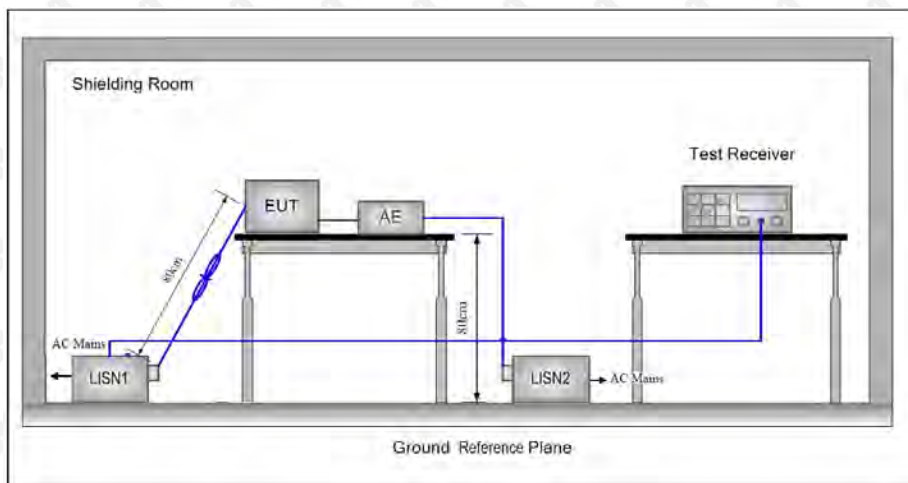

6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result


Test Specification: Line
AC 120V 60Hz

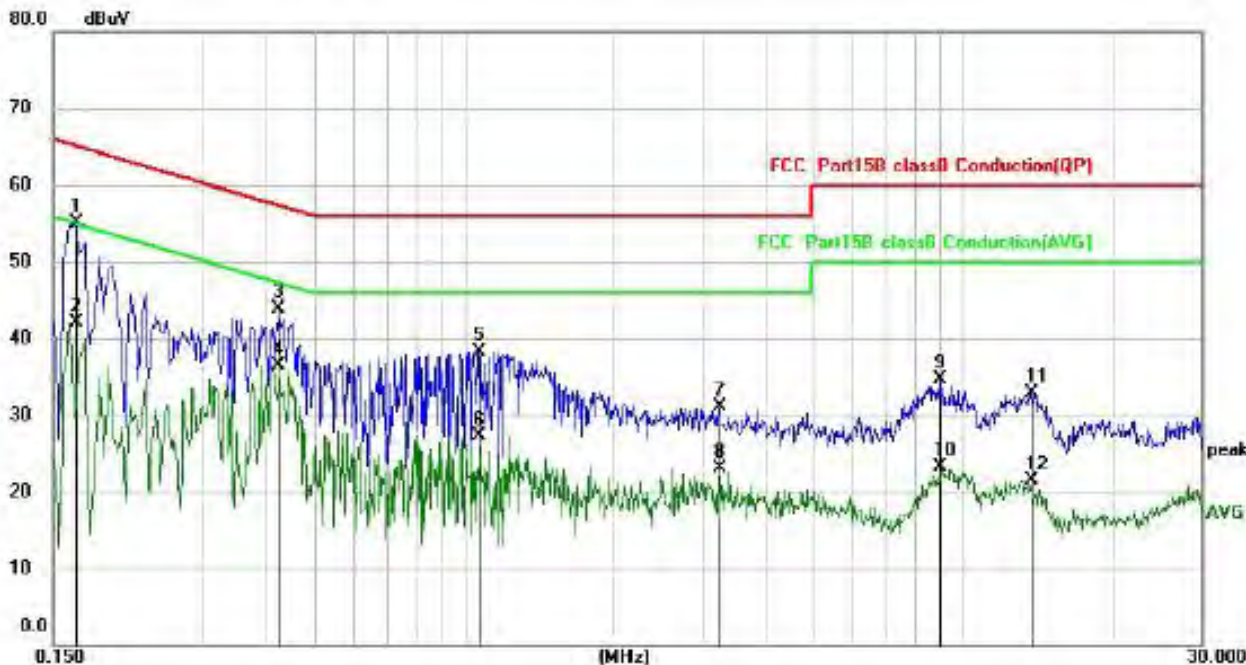

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1660	44.25	10.83	55.08	65.16	-10.08	QP
2		0.1660	31.35	10.83	42.18	55.16	-12.98	AVG
3		0.4259	33.36	10.55	43.91	57.33	-13.42	QP
4		0.4259	26.00	10.55	36.55	47.33	-10.78	AVG
5		1.0700	27.40	10.99	38.39	56.00	-17.61	QP
6		1.0700	16.40	10.99	27.39	46.00	-18.61	AVG
7		3.2259	19.33	11.85	31.18	56.00	-24.82	QP
8		3.2259	11.24	11.85	23.09	46.00	-22.91	AVG
9		9.0059	21.53	13.14	34.67	60.00	-25.33	QP
10		9.0059	10.21	13.14	23.35	50.00	-26.65	AVG
11		13.6700	19.59	13.31	32.90	60.00	-27.10	QP
12		13.6700	8.17	13.31	21.48	50.00	-28.52	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral
AC 120V 60Hz

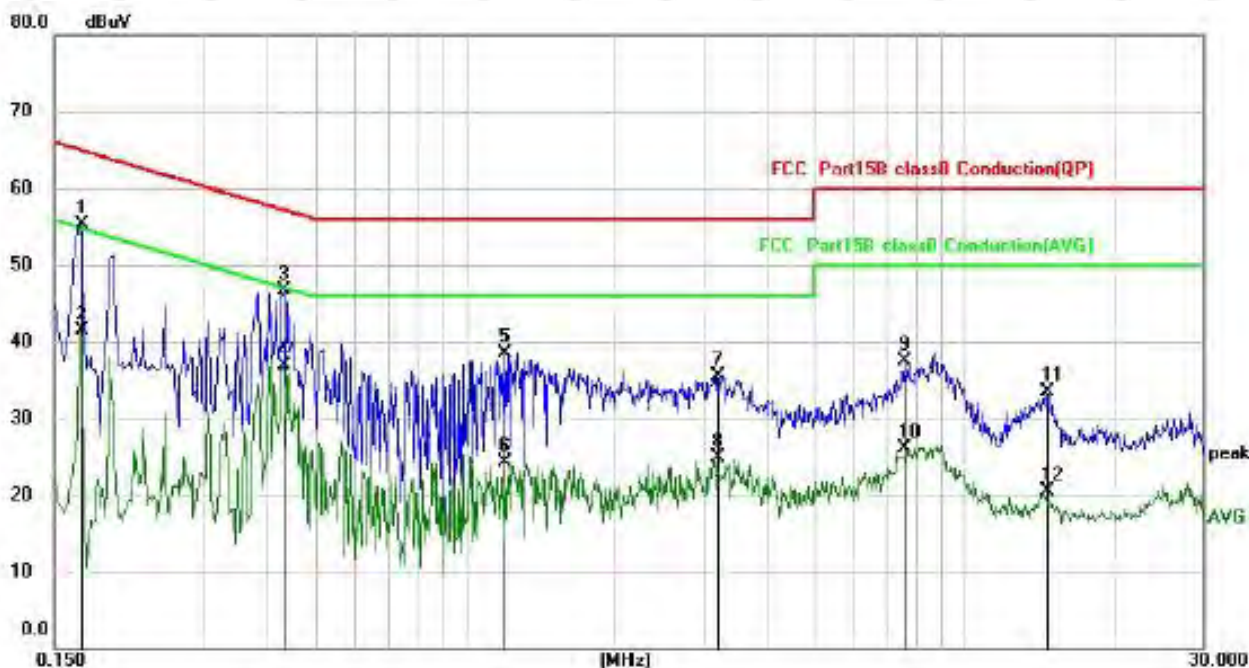

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1700	44.57	10.82	55.39	64.96	-9.57	QP
2		0.1700	30.67	10.82	41.49	54.96	-13.47	AVG
3		0.4339	36.18	10.55	46.73	57.18	-10.45	QP
4		0.4339	26.28	10.55	36.83	47.18	-10.35	AVG
5		1.1978	27.41	11.07	38.48	56.00	-17.52	QP
6		1.1978	13.26	11.07	24.33	46.00	-21.67	AVG
7		3.1939	23.71	11.84	35.55	56.00	-20.45	QP
8		3.1939	13.05	11.84	24.89	46.00	-21.11	AVG
9		7.5819	24.46	13.00	37.46	60.00	-22.54	QP
10		7.5819	13.04	13.00	26.04	50.00	-23.96	AVG
11		14.5259	20.22	13.33	33.55	60.00	-26.45	QP
12		14.5259	7.08	13.33	20.41	50.00	-29.59	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

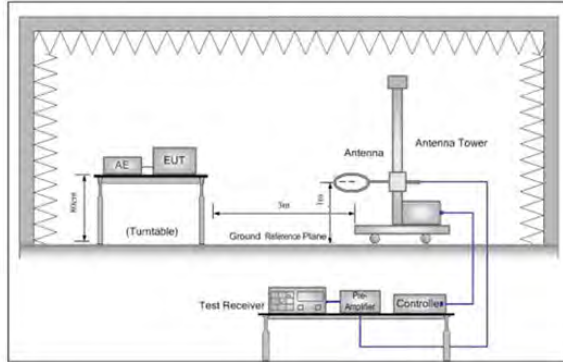


Figure 1. Below 30MHz

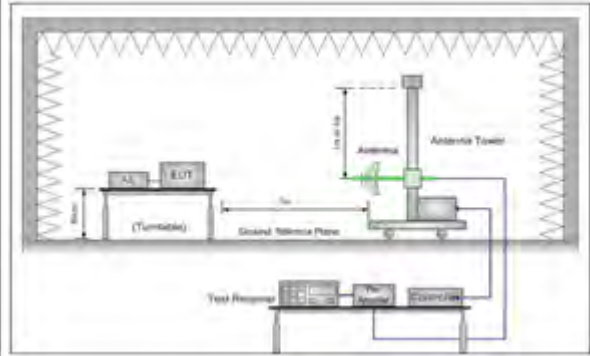


Figure 2. 30MHz to 1GHz

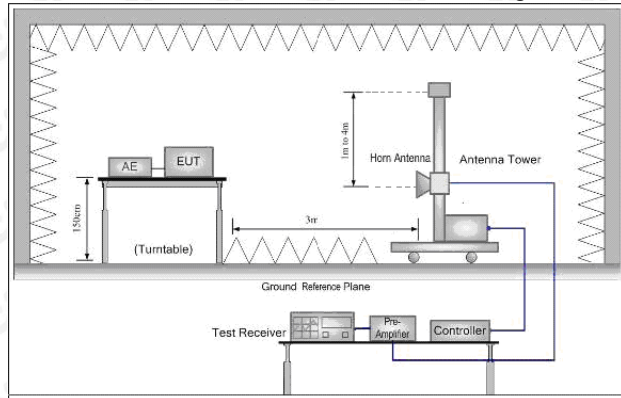


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:


Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement -X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case


Below 1GHz Test Results:
Antenna polarity: H

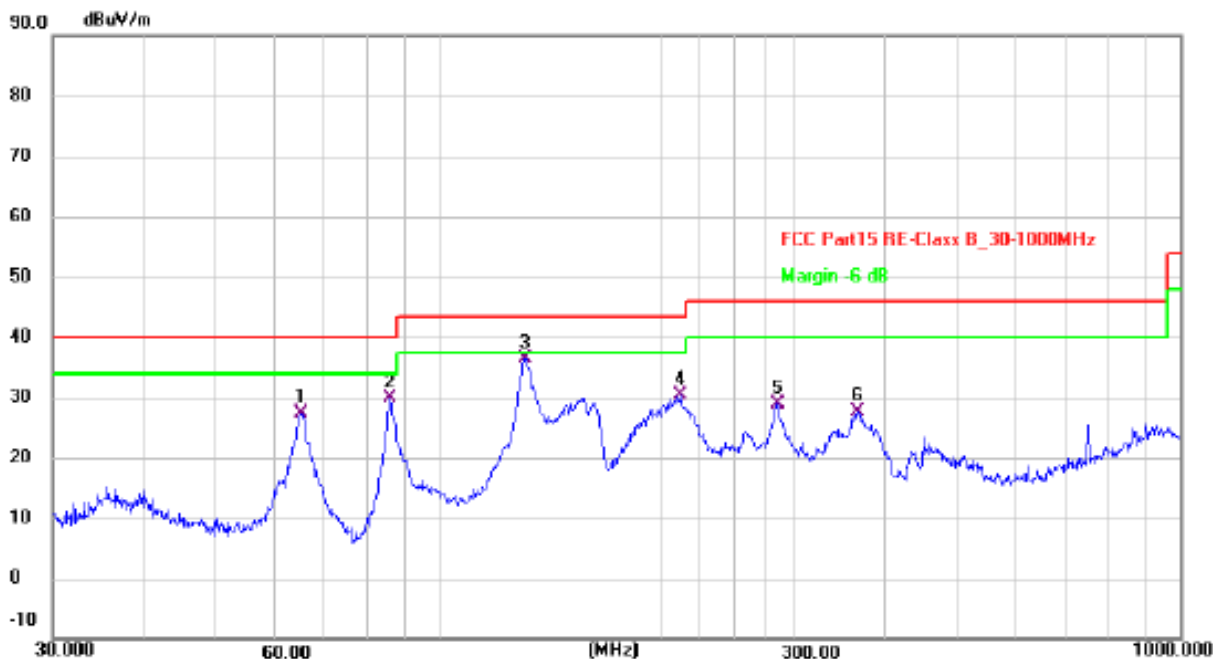

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	65.1144	43.62	-16.26	27.36	40.00	-12.64	QP
2	85.5974	48.40	-18.41	29.99	40.00	-10.01	QP
3 *	130.8369	51.41	-15.04	36.37	43.50	-7.13	QP
4	211.5262	47.24	-16.90	30.34	43.50	-13.16	QP
5	285.9777	43.49	-14.51	28.98	46.00	-17.02	QP
6	366.8231	40.62	-12.87	27.75	46.00	-18.25	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

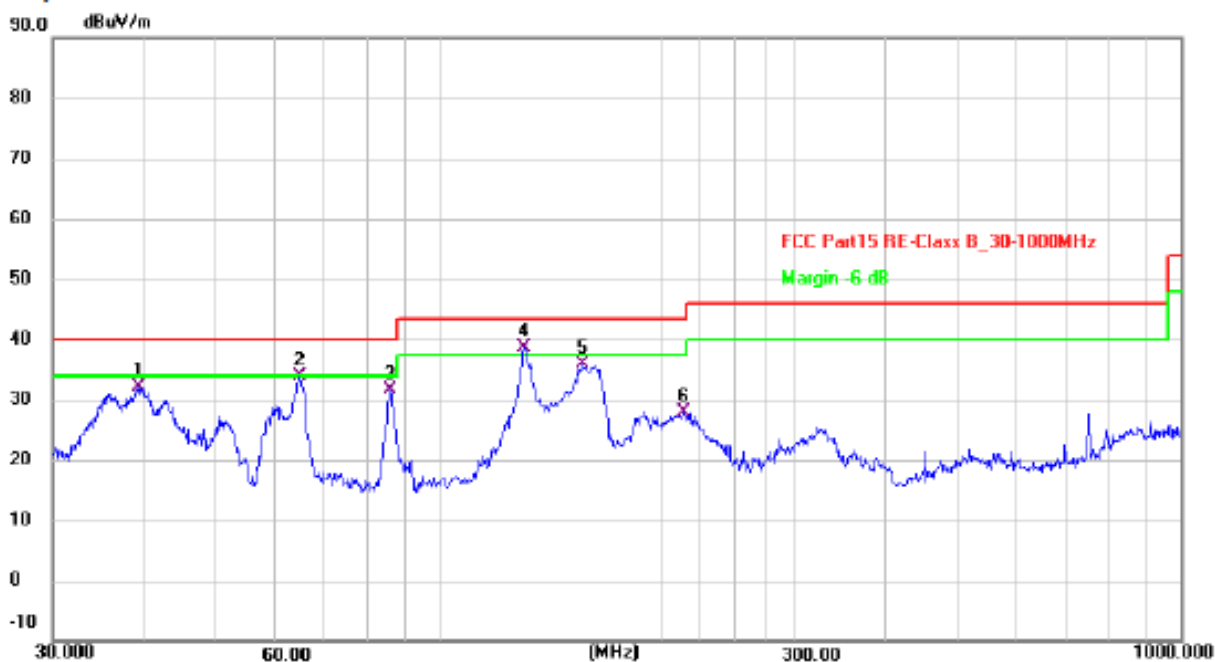

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	39.2991	44.78	-12.68	32.10	40.00	-7.90	QP
2	64.6594	50.06	-16.13	33.93	40.00	-6.07	QP
3	85.5974	50.03	-18.41	31.62	40.00	-8.38	QP
4 *	129.9225	53.83	-15.11	38.72	43.50	-4.78	QP
5	155.9100	49.04	-13.23	35.81	43.50	-7.69	QP
6	213.0150	44.81	-16.89	27.92	43.50	-15.58	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	65.35	-3.64	61.71	74	-12.29	peak
4824	50.84	-3.64	47.20	54	-6.80	AVG
7236	58.23	-0.95	57.28	74	-16.72	peak
7236	46.12	-0.95	45.17	54	-8.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4824	66.26	-3.64	62.62	74	-11.38	peak
4824	48.06	-3.64	44.42	54	-9.58	AVG
7236	58.09	-0.95	57.14	74	-16.86	peak
7236	44.56	-0.95	43.61	54	-10.39	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.78	-3.51	61.27	74	-12.73	peak
4874	48.74	-3.51	45.23	54	-8.77	AVG
7311	57.78	-0.82	56.96	74	-17.04	peak
7311	43.06	-0.82	42.24	54	-11.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	63.25	-3.51	59.74	74	-14.26	peak
4874	49.21	-3.51	45.70	54	-8.30	AVG
7311	58.52	-0.82	57.70	74	-16.30	peak
7311	44.25	-0.82	43.43	54	-10.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.79	-3.43	60.36	74	-13.64	peak
4924	47.58	-3.43	44.15	54	-9.85	AVG
7386	58.75	-0.75	58.00	74	-16.00	peak
7386	44.38	-0.75	43.63	54	-10.37	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.38	-3.43	59.95	74	-14.05	peak
4924	47.52	-3.43	44.09	54	-9.91	AVG
7386	56.52	-0.75	55.77	74	-18.23	peak
7386	42.03	-0.75	41.28	54	-12.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	66.42	-3.64	62.78	74	-11.22	peak
4824	49.71	-3.64	46.07	54	-7.93	AVG
7236	59.54	-0.95	58.59	74	-15.41	peak
7236	45.02	-0.95	44.07	54	-9.93	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4824	65.70	-3.64	62.06	74	-11.94	peak
4824	47.17	-3.64	43.53	54	-10.47	AVG
7236	56.38	-0.95	55.43	74	-18.57	peak
7236	43.03	-0.95	42.08	54	-11.92	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	66.19	-3.51	62.68	74	-11.32	peak
4874	48.62	-3.51	45.11	54	-8.89	AVG
7311	59.59	-0.82	58.77	74	-15.23	peak
7311	43.18	-0.82	42.36	54	-11.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.07	-3.51	59.56	74	-14.44	peak
4874	47.35	-3.51	43.84	54	-10.16	AVG
7311	59.15	-0.82	58.33	74	-15.67	peak
7311	42.37	-0.82	41.55	54	-12.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.10	-3.43	59.67	74	-14.33	peak
4924	46.92	-3.43	43.49	54	-10.51	AVG
7386	58.39	-0.75	57.64	74	-16.36	peak
7386	43.16	-0.75	42.41	54	-11.59	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.56	-3.43	60.13	74	-13.87	peak
4924	47.16	-3.43	43.73	54	-10.27	AVG
7386	57.26	-0.75	56.51	74	-17.49	peak
7386	41.58	-0.75	40.83	54	-13.17	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	63.76	-3.64	60.12	74	-13.88	peak
4824	49.97	-3.64	46.33	54	-7.67	AVG
7236	58.43	-0.95	57.48	74	-16.52	peak
7236	44.48	-0.95	43.53	54	-10.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.24	-3.64	62.60	74	-11.40	peak
4824	48.54	-3.64	44.90	54	-9.10	AVG
7236	58.81	-0.95	57.86	74	-16.14	peak
7236	45.41	-0.95	44.46	54	-9.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	65.11	-3.51	61.60	74	-12.40	peak
4874	49.56	-3.51	46.05	54	-7.95	AVG
7311	58.47	-0.82	57.65	74	-16.35	peak
7311	43.33	-0.82	42.51	54	-11.49	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4874	64.91	-3.51	61.40	74	-12.60	peak
4874	49.01	-3.51	45.50	54	-8.50	AVG
7311	59.73	-0.82	58.91	74	-15.09	peak
7311	42.82	-0.82	42.00	54	-12.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.96	-3.43	59.53	74	-14.47	peak
4924	47.66	-3.43	44.23	54	-9.77	AVG
7386	60.03	-0.75	59.28	74	-14.72	peak
7386	44.36	-0.75	43.61	54	-10.39	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	65.46	-3.43	62.03	74	-11.97	peak
4924	48.25	-3.43	44.82	54	-9.18	AVG
7386	58.27	-0.75	57.52	74	-16.48	peak
7386	42.71	-0.75	41.96	54	-12.04	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	63.05	-3.63	59.42	74	-14.58	peak
4844	48.33	-3.63	44.70	54	-9.30	AVG
7266	58.42	-0.94	57.48	74	-16.52	peak
7266	45.73	-0.94	44.79	54	-9.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4844	65.16	-3.63	61.53	74	-12.47	peak
4844	48.23	-3.63	44.60	54	-9.40	AVG
7266	58.46	-0.94	57.52	74	-16.48	peak
7266	43.97	-0.94	43.03	54	-10.97	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.57	-3.51	61.06	74	-12.94	peak
4874	48.77	-3.51	45.26	54	-8.74	AVG
7311	59.17	-0.82	58.35	74	-15.65	peak
7311	43.87	-0.82	43.05	54	-10.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.27	-3.51	58.76	74	-15.24	peak
4874	46.44	-3.51	42.93	54	-11.07	AVG
7311	56.69	-0.82	55.87	74	-18.13	peak
7311	43.37	-0.82	42.55	54	-11.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	63.85	-3.43	60.42	74	-13.58	peak
4904	49.28	-3.43	45.85	54	-8.15	AVG
7356	57.08	-0.75	56.33	74	-17.67	peak
7356	41.95	-0.75	41.20	54	-12.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4904	62.02	-3.43	58.59	74	-15.41	peak
4904	47.49	-3.43	44.06	54	-9.94	AVG
7356	57.43	-0.75	56.68	74	-17.32	peak
7356	43.97	-0.75	43.22	54	-10.78	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.86	-5.81	52.05	74	-21.95	peak
2390	/	-5.81	/	54	/	AVG
2399	64.45	-5.84	58.61	74	-15.39	peak
2399	49.85	-5.84	44.01	54	-9.99	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.49	-5.81	50.68	74	-23.32	peak
2390	/	-5.81	/	54	/	AVG
2399	63.28	-5.84	57.44	74	-16.56	peak
2399	47.24	-5.84	41.40	54	-12.60	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	56.08	-5.65	50.43	74	-23.57	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2483.5	56.43	-5.65	50.78	74	-23.22	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.90	-5.81	53.09	74	-20.91	peak
2390	/	-5.81	/	54	/	AVG
2399	62.19	-5.84	56.35	74	-17.65	peak
2399	47.01	-5.84	41.17	54	-12.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.06	-5.81	51.25	74	-22.75	peak
2390	/	-5.81	/	54	/	AVG
2399	63.38	-5.84	57.54	74	-16.46	peak
2399	46.63	-5.84	40.79	54	-13.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.24	-5.65	50.59	74	-23.41	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.96	-5.65	51.31	74	-22.69	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.70	-5.81	50.89	74	-23.11	peak
2390	/	-5.81	/	54	/	AVG
2399	63.75	-5.84	57.91	74	-16.09	peak
2399	48.45	-5.84	42.61	54	-11.39	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.52	-5.81	50.71	74	-23.29	peak
2390	/	-5.81	/	54	/	AVG
2399	60.18	-5.84	54.34	74	-19.66	peak
2399	47.38	-5.84	41.54	54	-12.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.98	-5.65	51.33	74	-22.67	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.57	-5.65	50.92	74	-23.08	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.67	-5.81	52.86	74	-21.14	peak
2390	/	-5.81	/	54	/	AVG
2399	63.64	-5.84	57.80	74	-16.20	peak
2399	46.77	-5.84	40.93	54	-13.07	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.86	-5.81	52.05	74	-21.95	peak
2390	/	-5.81	/	54	/	AVG
2399	60.44	-5.84	54.60	74	-19.40	peak
2399	46.59	-5.84	40.75	54	-13.25	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	58.14	-5.65	52.49	74	-21.51	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.46	-5.65	50.81	74	-23.19	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

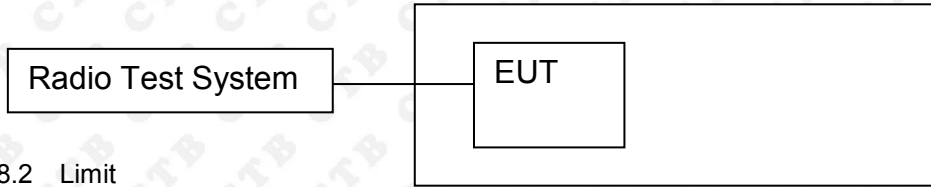


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold

8.4 Test Result
ANT1:

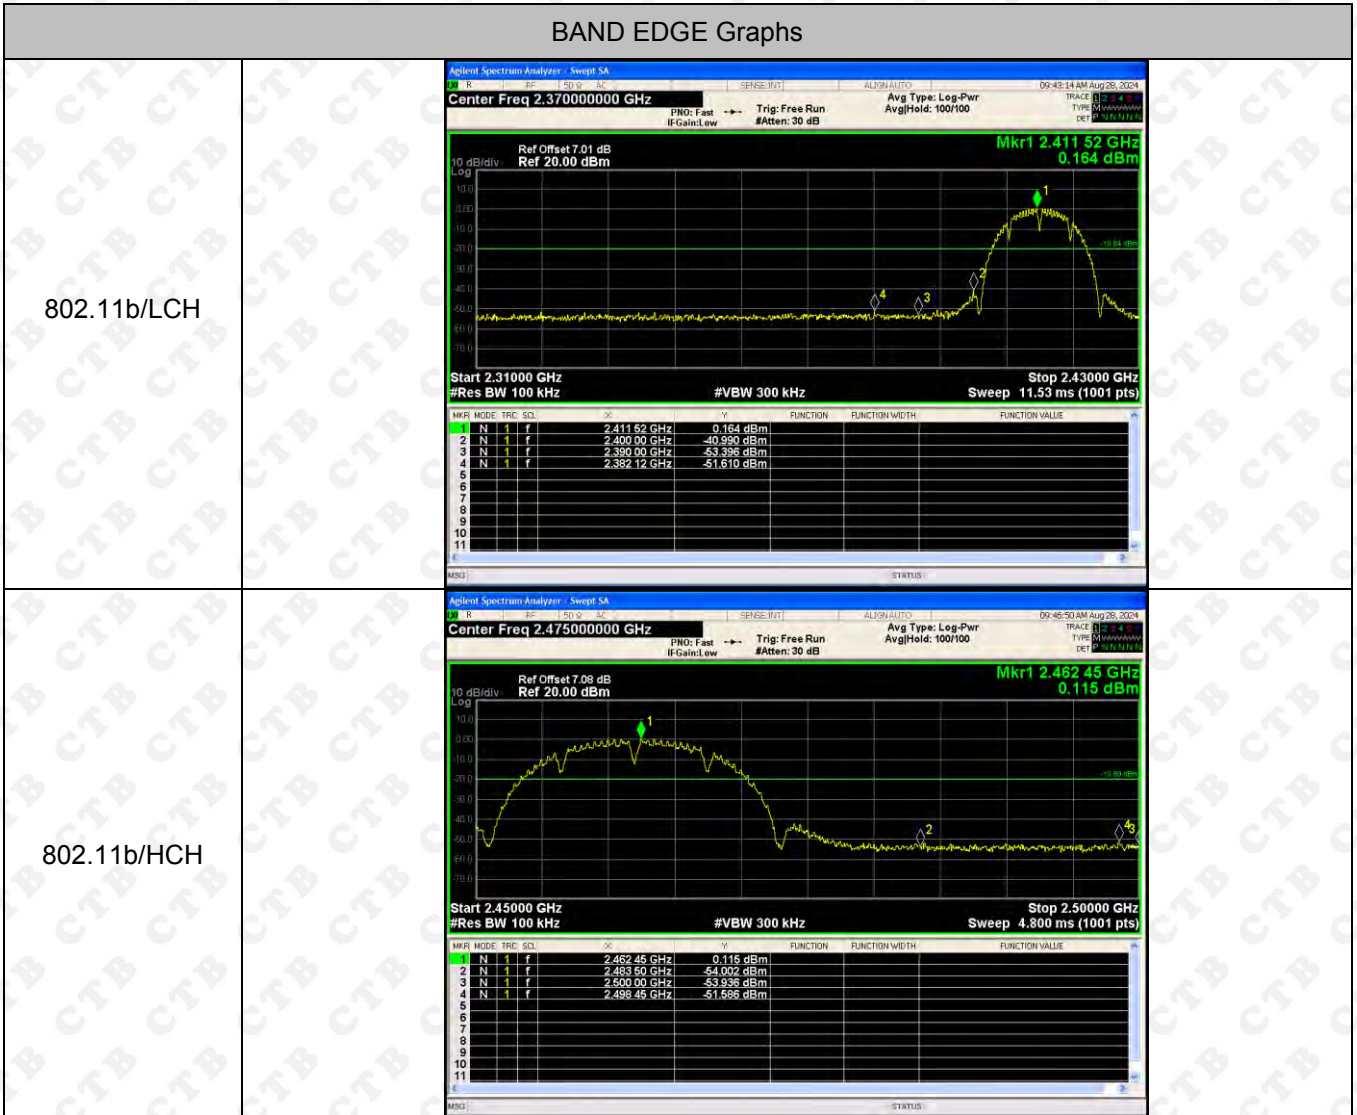


BAND EDGE Graphs

802.11g/LCH



802.11g/HCH

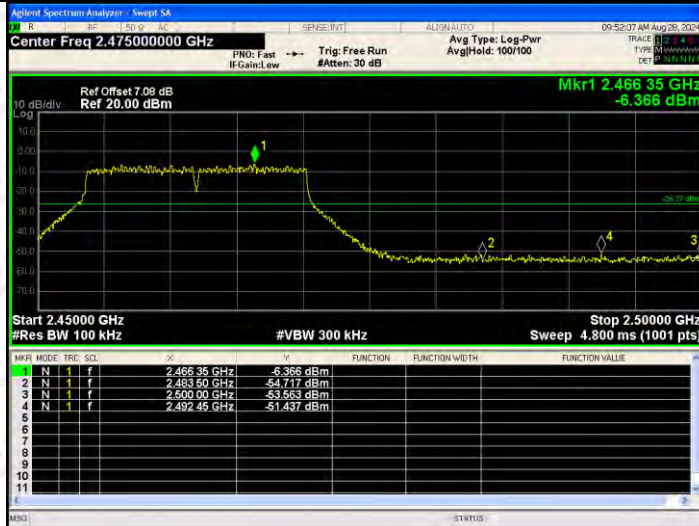


BAND EDGE Graphs

802.11n(HT20)/L
CH



802.11n(HT20)/H
CH

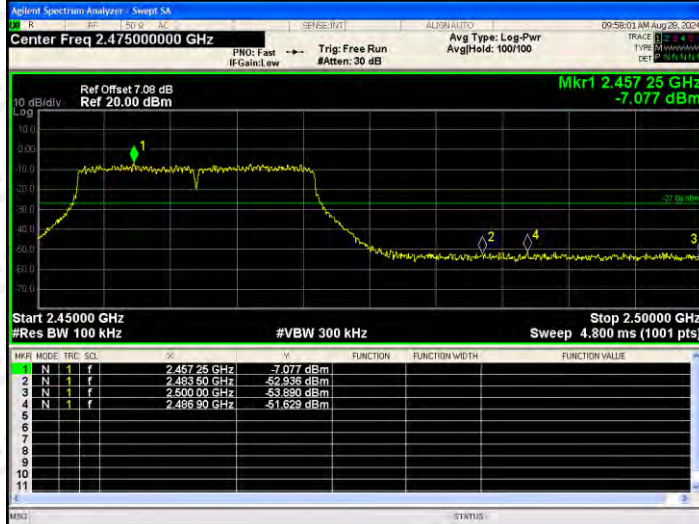


BAND EDGE Graphs

802.11n(HT40)/L
CH




802.11n(HT40)/H
CH

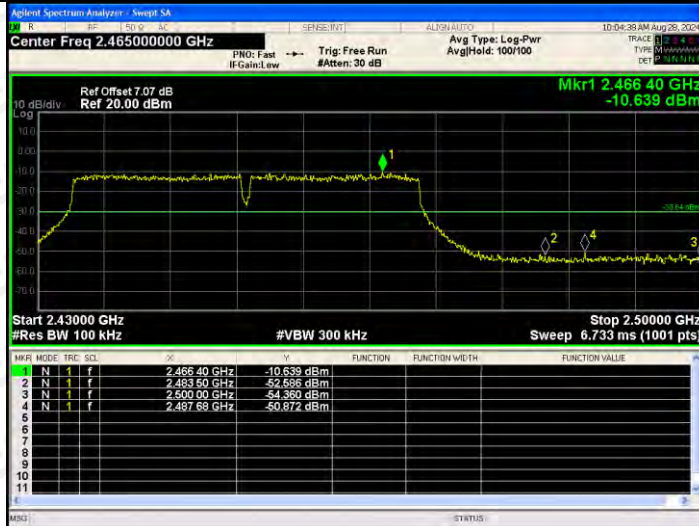


RF Conducted Spurious Emissions Graphs


802.11b/LCH

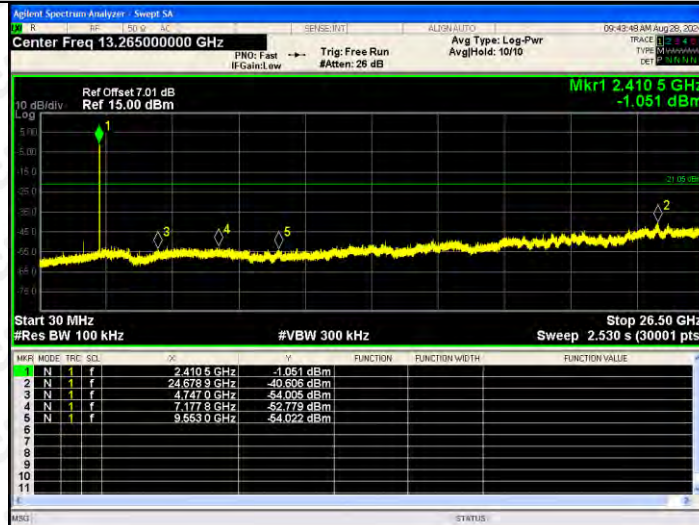

802.11b/MCH

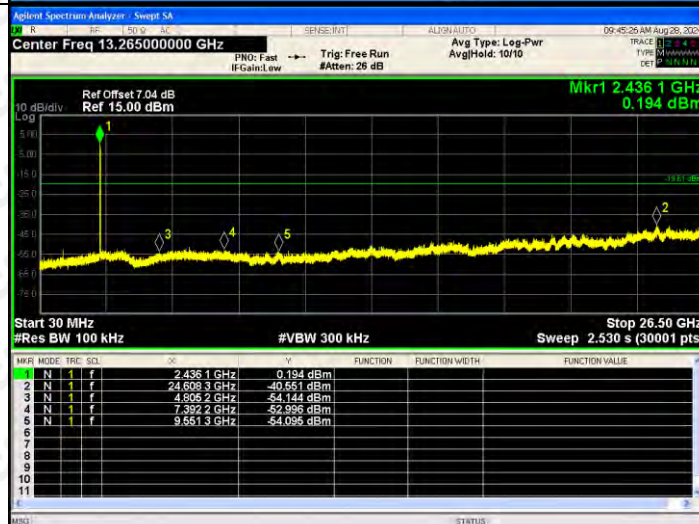


802.11b/HCH

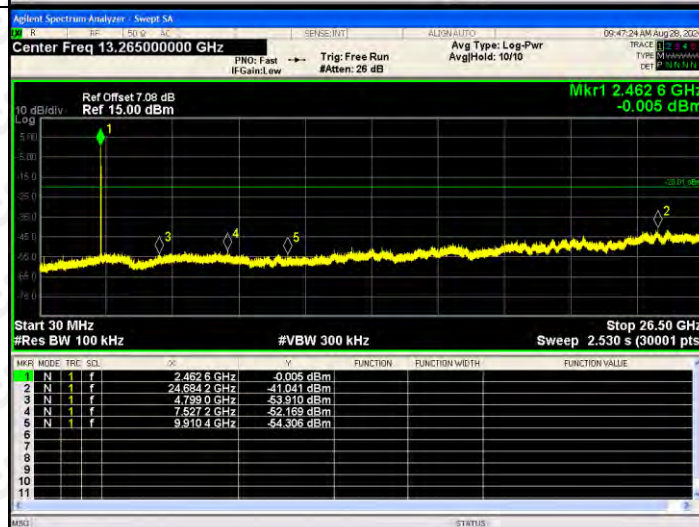


RF Conducted Spurious Emissions Graphs


802.11g/LCH

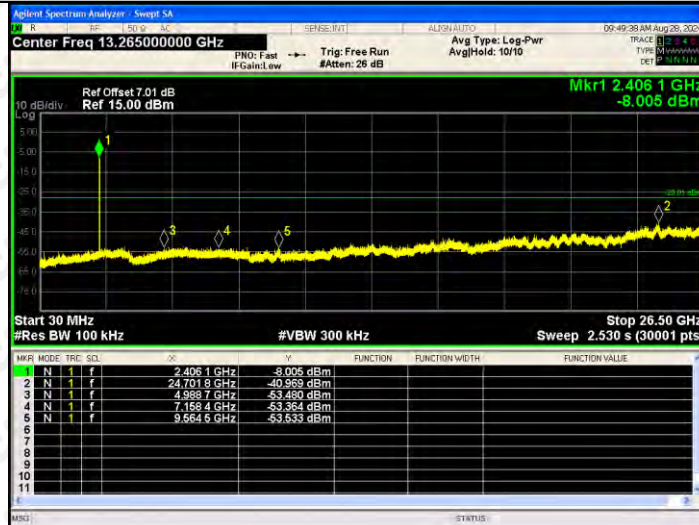

802.11g/MCH



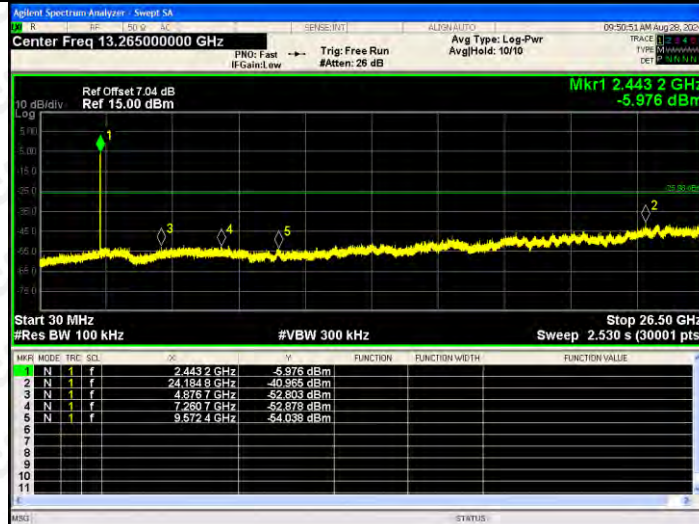


802.11g/HCH

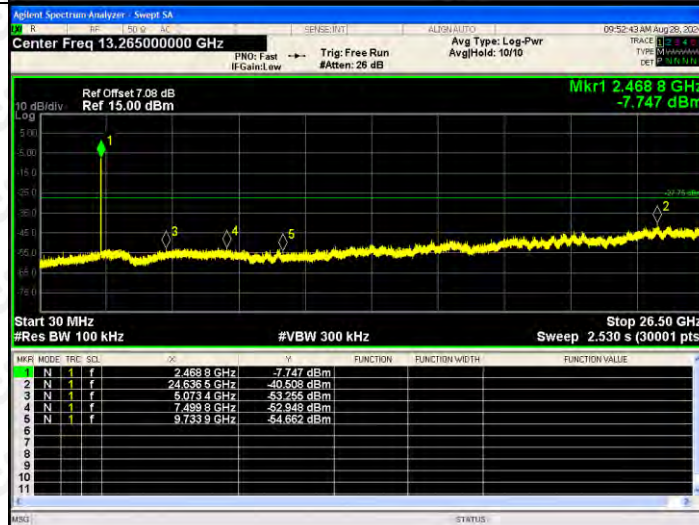


RF Conducted Spurious Emissions Graphs

<p>802.11n(HT20)/LCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4079 GHz</td> <td></td> <td></td> <td>-8.471 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6480 GHz</td> <td></td> <td></td> <td>-40.426 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8511 GHz</td> <td></td> <td></td> <td>-52.554 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.1588 GHz</td> <td></td> <td></td> <td>-52.346 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6585 GHz</td> <td></td> <td></td> <td>-53.703 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4079 GHz			-8.471 dBm	2	N	1	f	24.6480 GHz			-40.426 dBm	3	N	1	f	4.8511 GHz			-52.554 dBm	4	N	1	f	7.1588 GHz			-52.346 dBm	5	N	1	f	9.6585 GHz			-53.703 dBm
MNR	MODE	TRF	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.4079 GHz			-8.471 dBm																																										
2	N	1	f	24.6480 GHz			-40.426 dBm																																										
3	N	1	f	4.8511 GHz			-52.554 dBm																																										
4	N	1	f	7.1588 GHz			-52.346 dBm																																										
5	N	1	f	9.6585 GHz			-53.703 dBm																																										
<p>802.11 n(HT20)/MCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4291 GHz</td> <td></td> <td></td> <td>-7.938 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.7244 GHz</td> <td></td> <td></td> <td>-40.595 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.0090 GHz</td> <td></td> <td></td> <td>-54.317 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.2801 GHz</td> <td></td> <td></td> <td>-53.208 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6485 GHz</td> <td></td> <td></td> <td>-52.598 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4291 GHz			-7.938 dBm	2	N	1	f	25.7244 GHz			-40.595 dBm	3	N	1	f	5.0090 GHz			-54.317 dBm	4	N	1	f	7.2801 GHz			-53.208 dBm	5	N	1	f	9.6485 GHz			-52.598 dBm
MNR	MODE	TRF	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.4291 GHz			-7.938 dBm																																										
2	N	1	f	25.7244 GHz			-40.595 dBm																																										
3	N	1	f	5.0090 GHz			-54.317 dBm																																										
4	N	1	f	7.2801 GHz			-53.208 dBm																																										
5	N	1	f	9.6485 GHz			-52.598 dBm																																										
<p>802.11 n(HT20)/HCH</p>	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4573 GHz</td> <td></td> <td></td> <td>-7.453 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6865 GHz</td> <td></td> <td></td> <td>-38.774 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.9428 GHz</td> <td></td> <td></td> <td>-53.608 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.5563 GHz</td> <td></td> <td></td> <td>-52.926 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9085 GHz</td> <td></td> <td></td> <td>-54.174 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4573 GHz			-7.453 dBm	2	N	1	f	24.6865 GHz			-38.774 dBm	3	N	1	f	4.9428 GHz			-53.608 dBm	4	N	1	f	7.5563 GHz			-52.926 dBm	5	N	1	f	9.9085 GHz			-54.174 dBm
MNR	MODE	TRF	SQL	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																										
1	N	1	f	2.4573 GHz			-7.453 dBm																																										
2	N	1	f	24.6865 GHz			-38.774 dBm																																										
3	N	1	f	4.9428 GHz			-53.608 dBm																																										
4	N	1	f	7.5563 GHz			-52.926 dBm																																										
5	N	1	f	9.9085 GHz			-54.174 dBm																																										

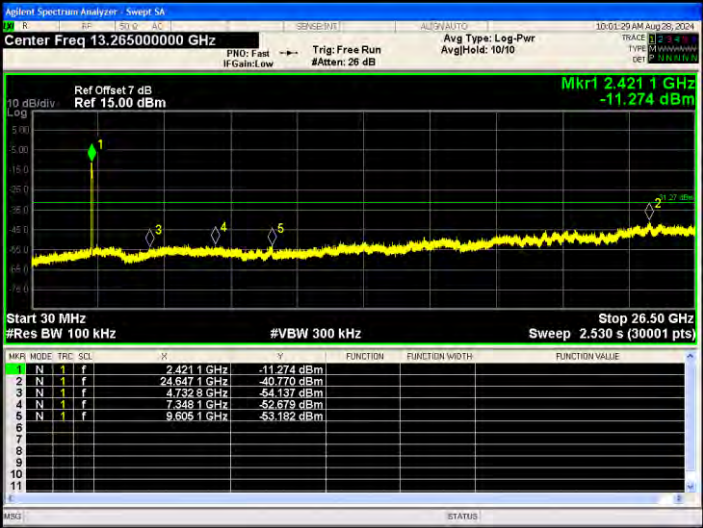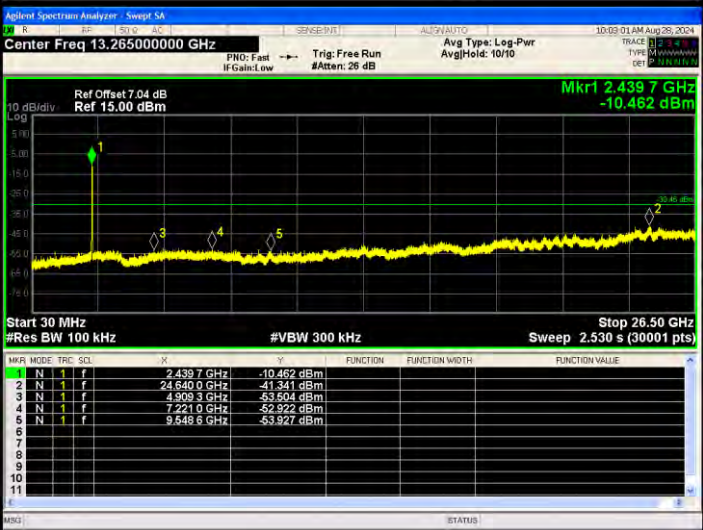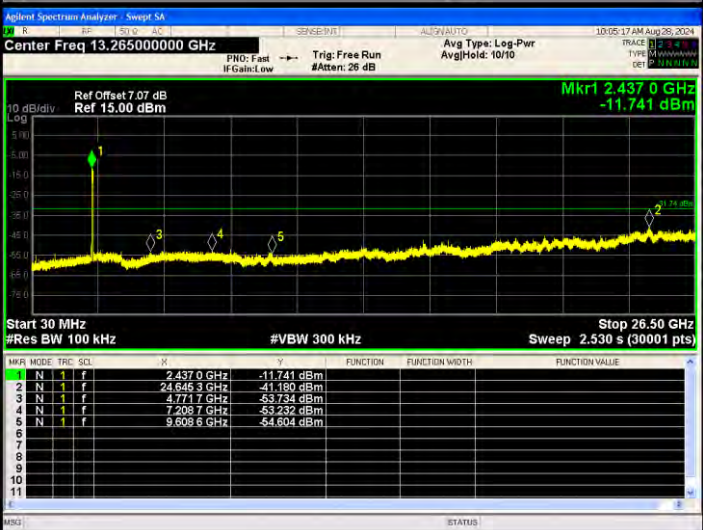
<p>802.11n(HT40)/LCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.421 1 GHz</td><td>-11.274 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.647 1 GHz</td><td>-40.770 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>47.32 3 GHz</td><td>-54.437 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.348 1 GHz</td><td>-52.679 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.606 1 GHz</td><td>-53.182 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.421 1 GHz	-11.274 dBm				2	N	1	f	24.647 1 GHz	-40.770 dBm				3	N	1	f	47.32 3 GHz	-54.437 dBm				4	N	1	f	7.348 1 GHz	-52.679 dBm				5	N	1	f	9.606 1 GHz	-53.182 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.421 1 GHz	-11.274 dBm																																																		
2	N	1	f	24.647 1 GHz	-40.770 dBm																																																		
3	N	1	f	47.32 3 GHz	-54.437 dBm																																																		
4	N	1	f	7.348 1 GHz	-52.679 dBm																																																		
5	N	1	f	9.606 1 GHz	-53.182 dBm																																																		
<p>802.11 n(HT40)/MCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.439 7 GHz</td><td>-10.462 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.640 0 GHz</td><td>-41.341 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>47.308 3 GHz</td><td>-53.604 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.221 0 GHz</td><td>-52.322 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.548 6 GHz</td><td>-53.927 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 7 GHz	-10.462 dBm				2	N	1	f	24.640 0 GHz	-41.341 dBm				3	N	1	f	47.308 3 GHz	-53.604 dBm				4	N	1	f	7.221 0 GHz	-52.322 dBm				5	N	1	f	9.548 6 GHz	-53.927 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.439 7 GHz	-10.462 dBm																																																		
2	N	1	f	24.640 0 GHz	-41.341 dBm																																																		
3	N	1	f	47.308 3 GHz	-53.604 dBm																																																		
4	N	1	f	7.221 0 GHz	-52.322 dBm																																																		
5	N	1	f	9.548 6 GHz	-53.927 dBm																																																		
<p>802.11 n(HT40)/HCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.437 0 GHz</td><td>-11.741 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>24.646 3 GHz</td><td>-41.180 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>47.771 7 GHz</td><td>-53.734 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>7.208 7 GHz</td><td>-53.232 dBm</td><td></td><td></td><td></td></tr> <tr><td>5</td><td>N</td><td>1</td><td>f</td><td>9.608 6 GHz</td><td>-54.604 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 0 GHz	-11.741 dBm				2	N	1	f	24.646 3 GHz	-41.180 dBm				3	N	1	f	47.771 7 GHz	-53.734 dBm				4	N	1	f	7.208 7 GHz	-53.232 dBm				5	N	1	f	9.608 6 GHz	-54.604 dBm			
MKR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.437 0 GHz	-11.741 dBm																																																		
2	N	1	f	24.646 3 GHz	-41.180 dBm																																																		
3	N	1	f	47.771 7 GHz	-53.734 dBm																																																		
4	N	1	f	7.208 7 GHz	-53.232 dBm																																																		
5	N	1	f	9.608 6 GHz	-54.604 dBm																																																		

ANT2:

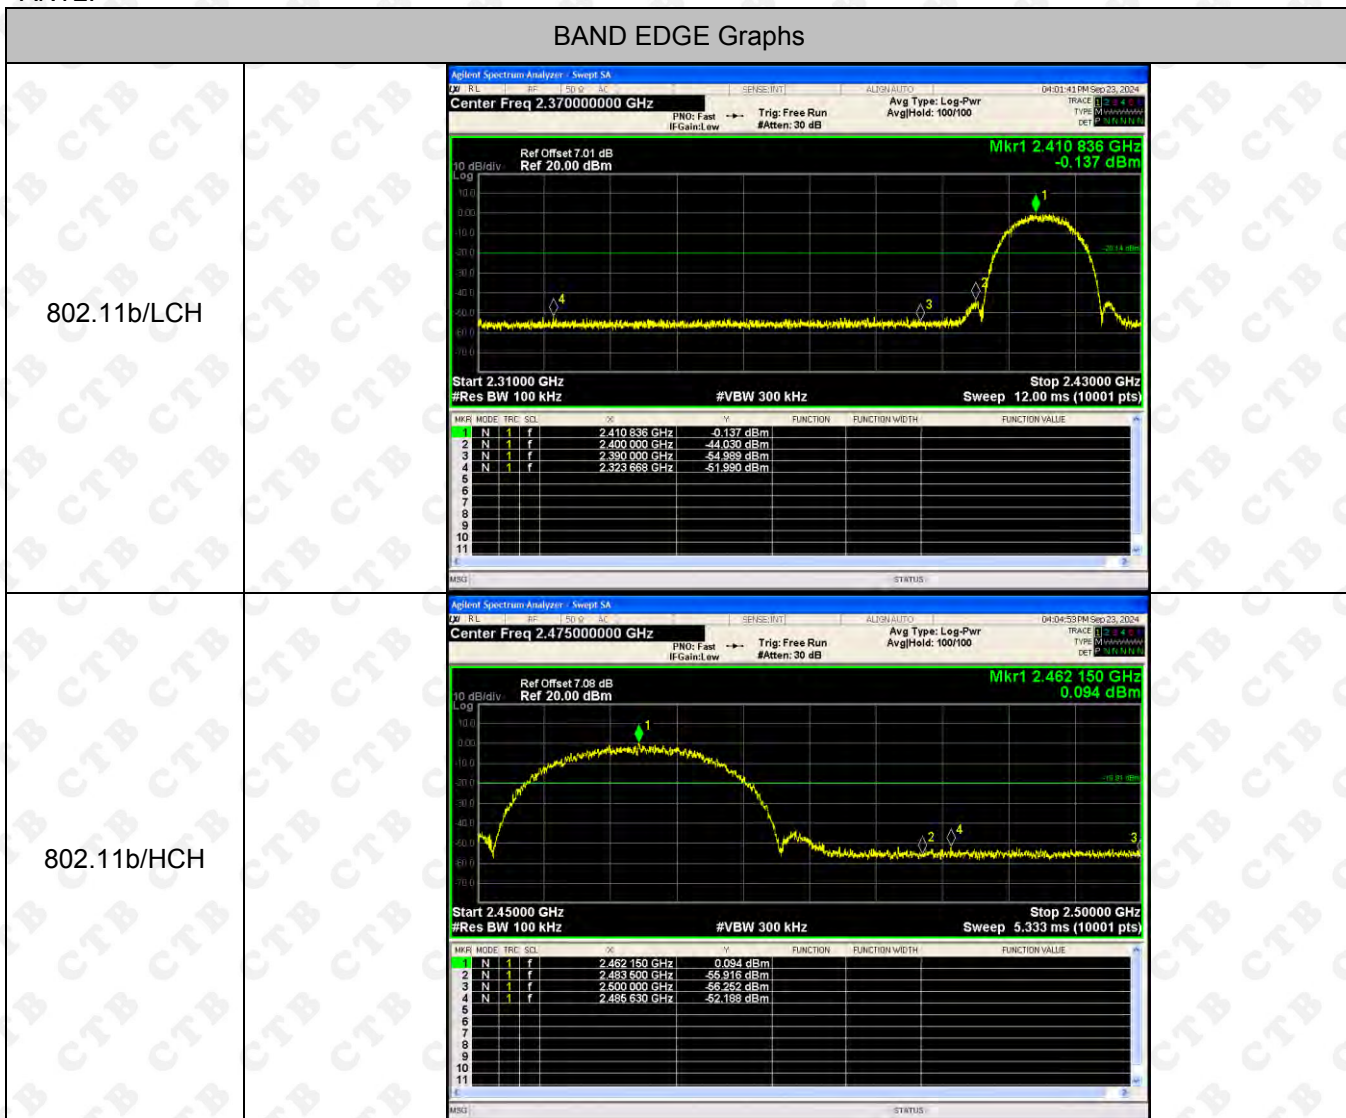


BAND EDGE Graphs

802.11g/LCH

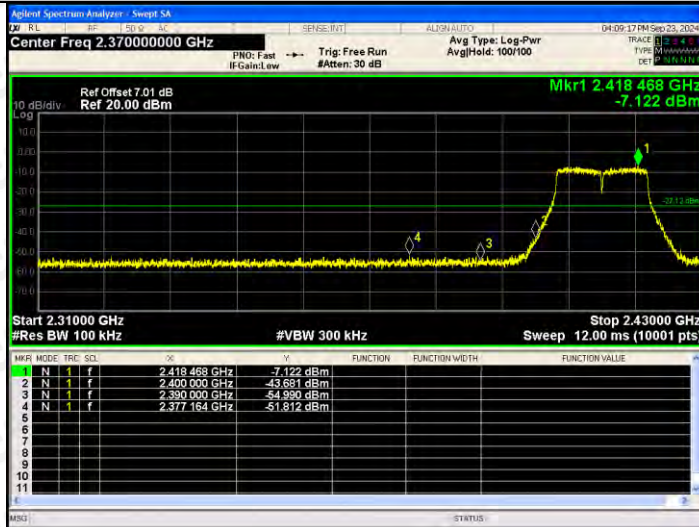


802.11g/HCH

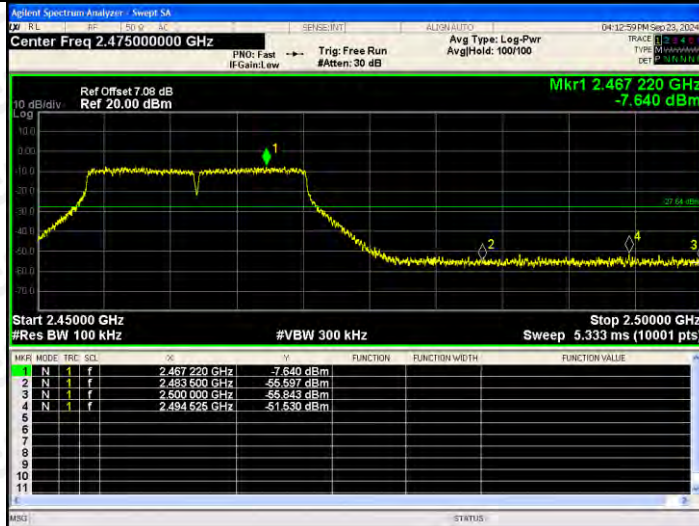


BAND EDGE Graphs

802.11n(HT20)/L
CH

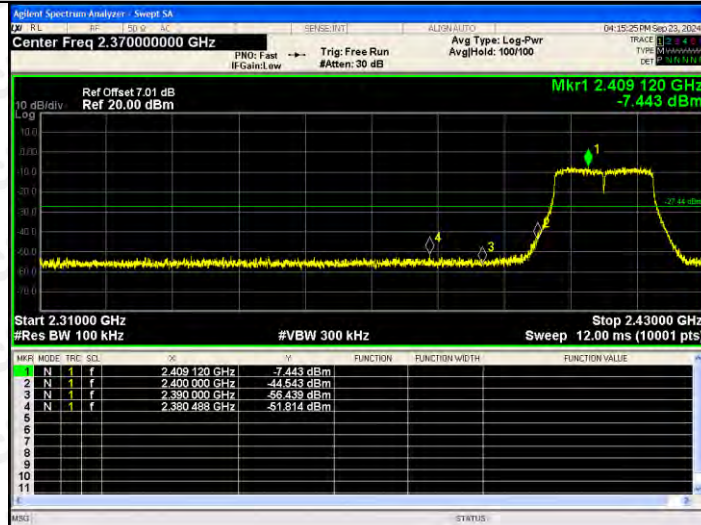

802.11n(HT20)/H
CH

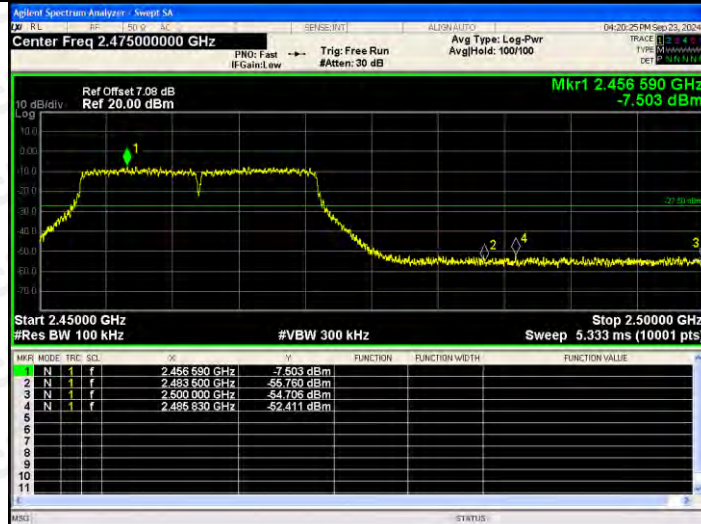


BAND EDGE Graphs

802.11n(HT40)/L
CH



802.11n(HT40)/H
CH

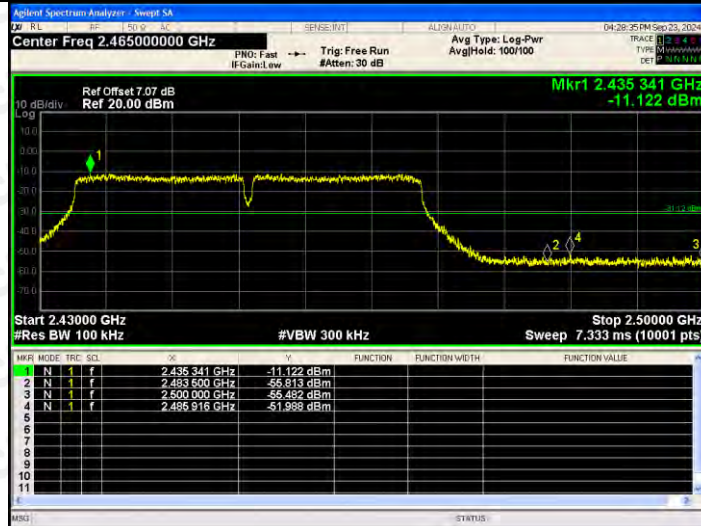




RF Conducted Spurious Emissions Graphs



RF Conducted Spurious Emissions Graphs




RF Conducted Spurious Emissions Graphs

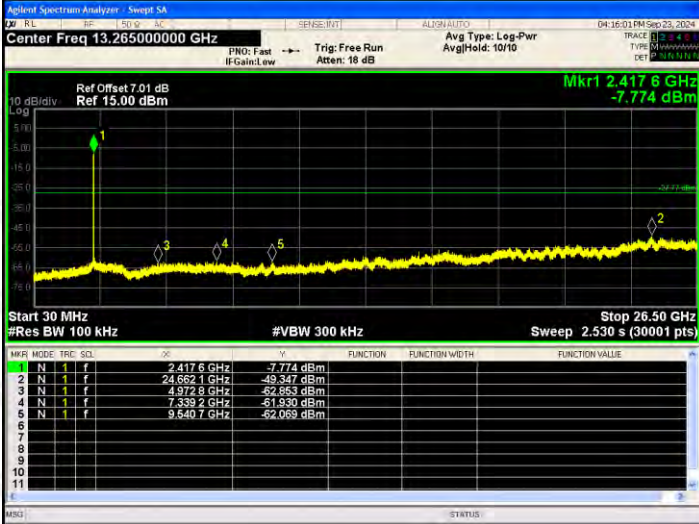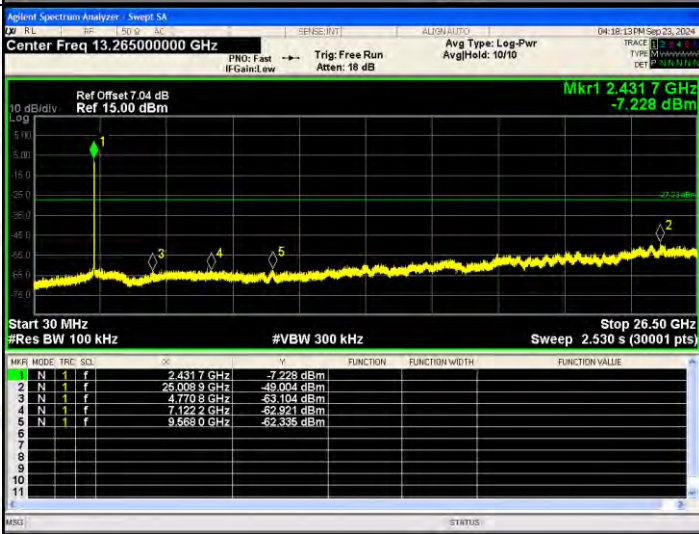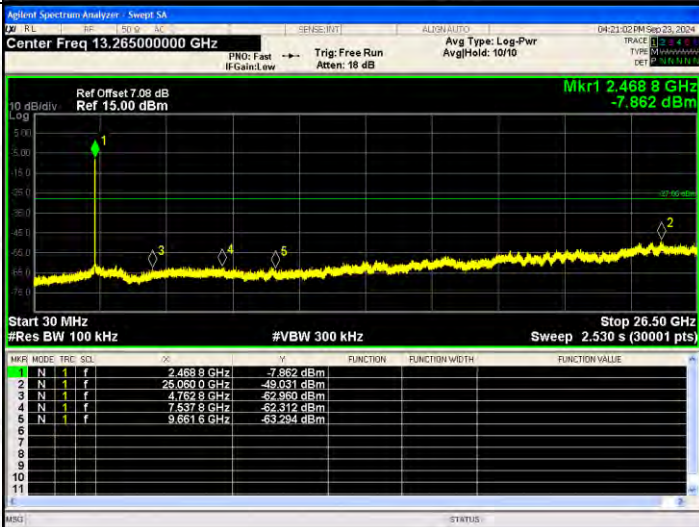
<p>802.11n (HT20)/ LCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 13.26500000 GHz Ref Offset 7.01 dB Ref 15.00 dBm Mkr1 2.417 6 GHz -7.774 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.417 6 GHz</td> <td>-7.774 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.862 1 GHz</td> <td>-49.347 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.972 8 GHz</td> <td>-62.853 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.339 2 GHz</td> <td>-61.830 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.640 7 GHz</td> <td>-62.059 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.417 6 GHz	-7.774 dBm				2	N	1	f	24.862 1 GHz	-49.347 dBm				3	N	1	f	4.972 8 GHz	-62.853 dBm				4	N	1	f	7.339 2 GHz	-61.830 dBm				5	N	1	f	9.640 7 GHz	-62.059 dBm			
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.417 6 GHz	-7.774 dBm																																																		
2	N	1	f	24.862 1 GHz	-49.347 dBm																																																		
3	N	1	f	4.972 8 GHz	-62.853 dBm																																																		
4	N	1	f	7.339 2 GHz	-61.830 dBm																																																		
5	N	1	f	9.640 7 GHz	-62.059 dBm																																																		
<p>802.11 n(HT20) /MCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 13.26500000 GHz Ref Offset 7.04 dB Ref 15.00 dBm Mkr1 2.431 7 GHz -7.228 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.431 7 GHz</td> <td>-7.228 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.008 9 GHz</td> <td>-49.004 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.770 8 GHz</td> <td>-63.104 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.122 2 GHz</td> <td>-62.921 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.668 0 GHz</td> <td>-62.338 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.431 7 GHz	-7.228 dBm				2	N	1	f	25.008 9 GHz	-49.004 dBm				3	N	1	f	4.770 8 GHz	-63.104 dBm				4	N	1	f	7.122 2 GHz	-62.921 dBm				5	N	1	f	9.668 0 GHz	-62.338 dBm			
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.431 7 GHz	-7.228 dBm																																																		
2	N	1	f	25.008 9 GHz	-49.004 dBm																																																		
3	N	1	f	4.770 8 GHz	-63.104 dBm																																																		
4	N	1	f	7.122 2 GHz	-62.921 dBm																																																		
5	N	1	f	9.668 0 GHz	-62.338 dBm																																																		
<p>802.11 n(HT20) /HCH</p>	 <p>Agilent Spectrum Analyzer - Sweep SA Center Freq 13.26500000 GHz Ref Offset 7.08 dB Ref 15.00 dBm Mkr1 2.468 8 GHz -7.862 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 300 kHz Stop 26.50 GHz Sweep 2.530 s (30001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.468 8 GHz</td> <td>-7.862 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.060 0 GHz</td> <td>-49.031 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.762 8 GHz</td> <td>-62.960 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.537 8 GHz</td> <td>-62.312 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.661 6 GHz</td> <td>-63.234 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.468 8 GHz	-7.862 dBm				2	N	1	f	25.060 0 GHz	-49.031 dBm				3	N	1	f	4.762 8 GHz	-62.960 dBm				4	N	1	f	7.537 8 GHz	-62.312 dBm				5	N	1	f	9.661 6 GHz	-63.234 dBm			
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.468 8 GHz	-7.862 dBm																																																		
2	N	1	f	25.060 0 GHz	-49.031 dBm																																																		
3	N	1	f	4.762 8 GHz	-62.960 dBm																																																		
4	N	1	f	7.537 8 GHz	-62.312 dBm																																																		
5	N	1	f	9.661 6 GHz	-63.234 dBm																																																		

RF Conducted Spurious Emissions Graphs


802.11
n(HT40)
/LCH

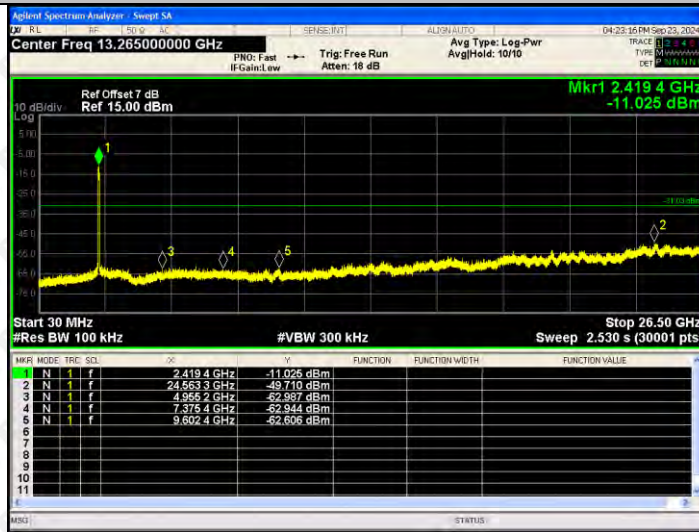

802.11
n(HT40)
/MCH

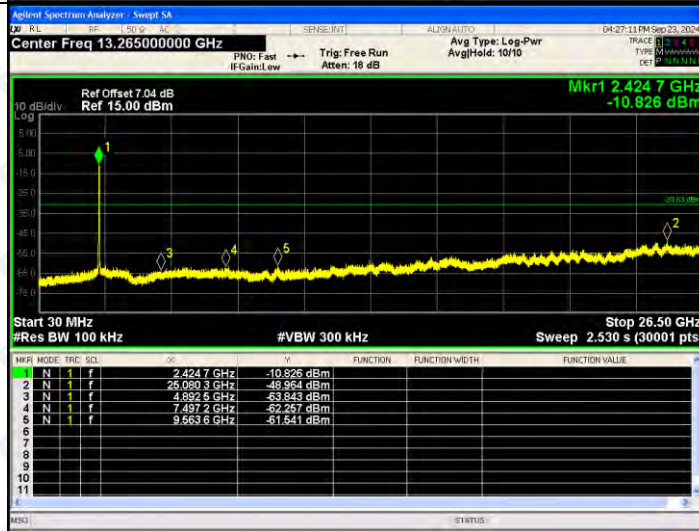

802.11
n(HT40)
/HCH

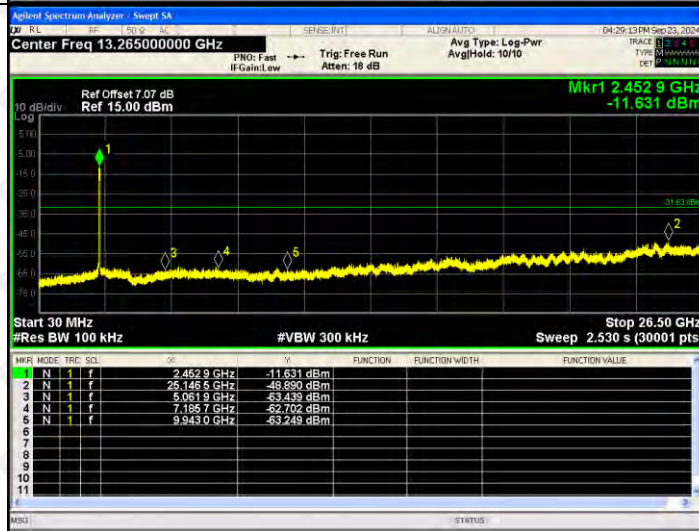

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	13.457	15.845	/	30
	MCH	13.874	15.32	/	30
	HCH	13.774	14.893	/	30
802.11g	LCH	13.666	13.803	/	30
	MCH	14.429	13.902	/	30
	HCH	13.617	13.755	/	30
802.11n(HT20)	LCH	13.704	14.552	17.159	30
	MCH	13.3	14.192	16.779	30
	HCH	13.128	14.174	16.693	30
802.11n(HT40)	LCH	13.688	14.419	17.079	30
	MCH	13.698	14.07	16.898	30
	HCH	12.736	13.496	16.143	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

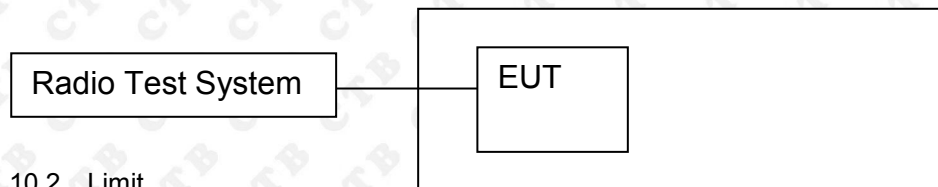

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.129	500	PASS
	MCH	10.123	500	PASS
	HCH	10.132	500	PASS
802.11g	LCH	16.494	500	PASS
	MCH	16.544	500	PASS
	HCH	16.529	500	PASS
802.11n(HT20)	LCH	17.769	500	PASS
	MCH	17.775	500	PASS
	HCH	17.78	500	PASS
802.11n(HT40)	LCH	36.494	500	PASS
	MCH	36.499	500	PASS
	HCH	36.507	500	PASS

ANT2:




Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	9.09	500	PASS
	MCH	10.76	500	PASS
	HCH	10.843	500	PASS
802.11g	LCH	16.546	500	PASS
	MCH	16.575	500	PASS
	HCH	16.579	500	PASS
802.11n(HT20)	LCH	17.674	500	PASS
	MCH	17.699	500	PASS
	HCH	17.758	500	PASS
802.11n(HT40)	LCH	36.548	500	PASS
	MCH	36.504	500	PASS
	HCH	36.505	500	PASS

ANT1:
Test Graph:

Graphs																			
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz Center Freq: 2.41200000 GHz Radio Std: None</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Device: BTS</p> <p>Ref Offset 7.01 dB Ref 27.01 dBm Mkr3 2.417029 GHz -5.7313 dBm</p> <p>Center 2.412 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>17.1 dBm</td> </tr> <tr> <td>14.995 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-35.945 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>10.13 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	17.1 dBm	14.995 MHz			Transmit Freq Error	OBW Power	99.00 %	-35.945 kHz	x dB	-6.00 dB	x dB Bandwidth			10.13 MHz		
Occupied Bandwidth	Total Power	17.1 dBm																	
14.995 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-35.945 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
10.13 MHz																			
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Radio Std: None</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Device: BTS</p> <p>Ref Offset 7.04 dB Ref 27.04 dBm Mkr3 2.442016 GHz -4.2514 dBm</p> <p>Center 2.437 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>17.6 dBm</td> </tr> <tr> <td>15.010 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-44.954 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>10.12 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	17.6 dBm	15.010 MHz			Transmit Freq Error	OBW Power	99.00 %	-44.954 kHz	x dB	-6.00 dB	x dB Bandwidth			10.12 MHz		
Occupied Bandwidth	Total Power	17.6 dBm																	
15.010 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-44.954 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
10.12 MHz																			
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz Center Freq: 2.46200000 GHz Radio Std: None</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Device: BTS</p> <p>Ref Offset 7.08 dB Ref 27.08 dBm Mkr3 2.467067 GHz -7.7240 dBm</p> <p>Center 2.462 GHz Span 30 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>17.1 dBm</td> </tr> <tr> <td>14.988 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>534 Hz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>10.13 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	17.1 dBm	14.988 MHz			Transmit Freq Error	OBW Power	99.00 %	534 Hz	x dB	-6.00 dB	x dB Bandwidth			10.13 MHz		
Occupied Bandwidth	Total Power	17.1 dBm																	
14.988 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
534 Hz	x dB	-6.00 dB																	
x dB Bandwidth																			
10.13 MHz																			

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None Radio Device: BTS</p> <p>10 dB/div Log Ref Offset: 7.01 dB Ref: 27.01 dBm</p> <p>Mkr3 2.420215 GHz -12.682 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td colspan="3">16.445 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	16.445 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.6 dBm											
16.445 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None Radio Device: BTS</p> <p>10 dB/div Log Ref Offset: 7.04 dB Ref: 27.04 dBm</p> <p>Mkr3 2.445228 GHz -10.075 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.4 dBm</td> </tr> <tr> <td colspan="3">16.470 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	13.4 dBm	16.470 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	13.4 dBm											
16.470 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None Radio Device: BTS</p> <p>10 dB/div Log Ref Offset: 7.08 dB Ref: 27.08 dBm</p> <p>Mkr3 2.470233 GHz -10.659 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td colspan="3">16.460 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	16.460 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.6 dBm											
16.460 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											



<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset 7.01 dB Ref 27.01 dBm</p> <p>Mkr3 2.420858 GHz -12.389 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.8 dBm</td> </tr> <tr> <td colspan="3">17.642 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.8 dBm	17.642 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB						
Occupied Bandwidth	Total Power	12.8 dBm																	
17.642 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
x dB Bandwidth	x dB	-6.00 dB																	
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 7.04 dB Ref 27.04 dBm</p> <p>Mkr3 2.445858 GHz -12.552 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td colspan="3">17.647 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	17.647 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB						
Occupied Bandwidth	Total Power	12.6 dBm																	
17.647 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
x dB Bandwidth	x dB	-6.00 dB																	
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 7.08 dB Ref 27.08 dBm</p> <p>Mkr3 2.470862 GHz -12.989 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.5 dBm</td> </tr> <tr> <td colspan="3">17.640 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.5 dBm	17.640 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB						
Occupied Bandwidth	Total Power	12.5 dBm																	
17.640 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
x dB Bandwidth	x dB	-6.00 dB																	

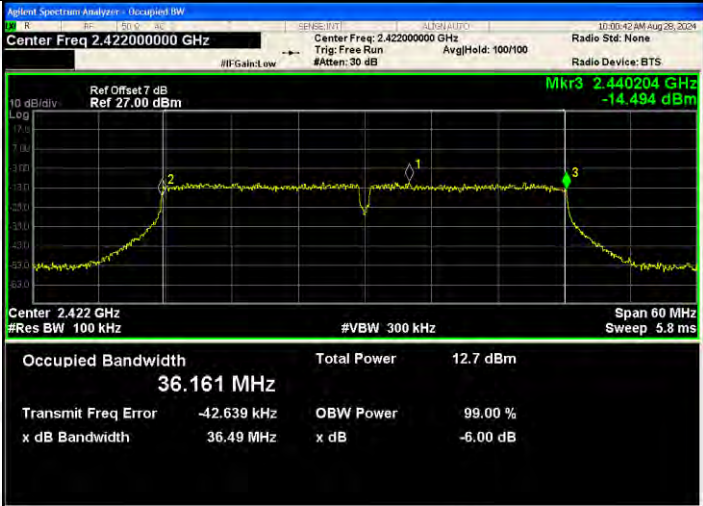
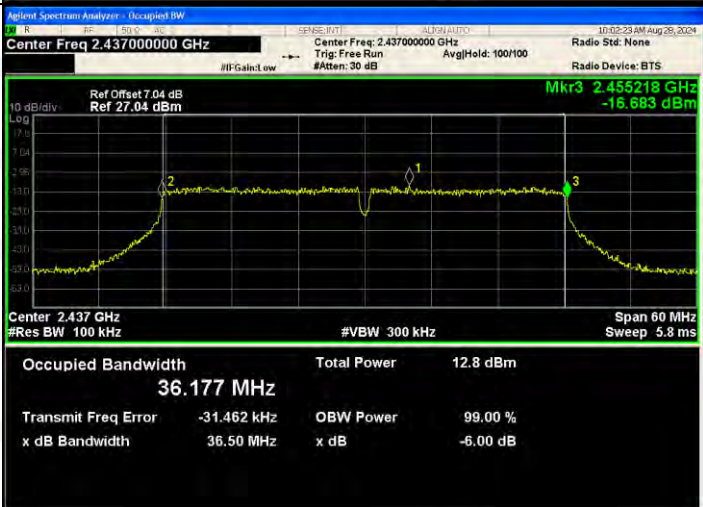
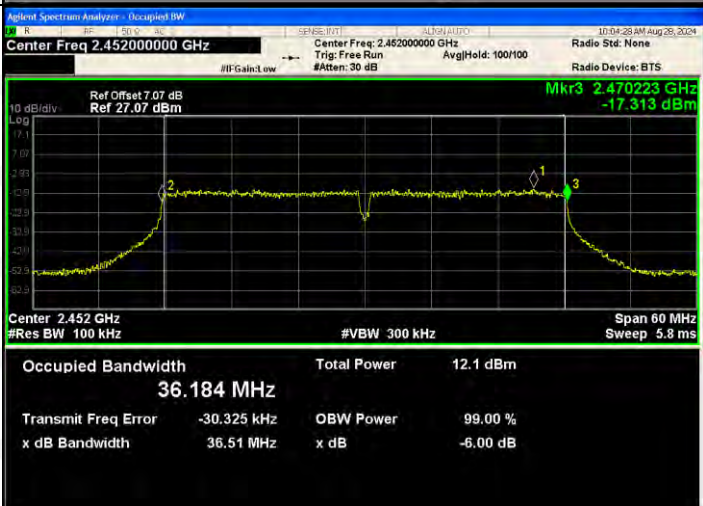
<p>802.11n(HT40)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42200000 GHz</p> <p>Center Freq: 2.42200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7 dB</p> <p>Ref: 27.00 dBm</p> <p>Mkr3 2.440204 GHz</p> <p>-14.494 dBm</p> <p>Center 2.422 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.7 dBm</td> </tr> <tr> <td>36.161 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-42.639 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>36.49 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.7 dBm	36.161 MHz			Transmit Freq Error	OBW Power	99.00 %	-42.639 kHz	x dB	-6.00 dB	x dB Bandwidth			36.49 MHz		
Occupied Bandwidth	Total Power	12.7 dBm																	
36.161 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-42.639 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
36.49 MHz																			
<p>802.11n(HT40)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.04 dB</p> <p>Ref: 27.04 dBm</p> <p>Mkr3 2.455218 GHz</p> <p>-16.683 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.8 dBm</td> </tr> <tr> <td>36.177 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-31.462 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>36.50 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.8 dBm	36.177 MHz			Transmit Freq Error	OBW Power	99.00 %	-31.462 kHz	x dB	-6.00 dB	x dB Bandwidth			36.50 MHz		
Occupied Bandwidth	Total Power	12.8 dBm																	
36.177 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-31.462 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
36.50 MHz																			
<p>802.11n(HT40)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.45200000 GHz</p> <p>Center Freq: 2.45200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.07 dB</p> <p>Ref: 27.07 dBm</p> <p>Mkr3 2.470223 GHz</p> <p>-17.313 dBm</p> <p>Center 2.452 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.1 dBm</td> </tr> <tr> <td>36.184 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-30.325 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>36.51 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.1 dBm	36.184 MHz			Transmit Freq Error	OBW Power	99.00 %	-30.325 kHz	x dB	-6.00 dB	x dB Bandwidth			36.51 MHz		
Occupied Bandwidth	Total Power	12.1 dBm																	
36.184 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-30.325 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
36.51 MHz																			

ANT2:
Test Graph:




<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div</p> <p>Ref Offset: 7.01 dB</p> <p>Ref: 27.01 dBm</p> <p>Mkr3 2.42023 GHz</p> <p>-13.130 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.458 MHz</p> <p>Total Power 12.8 dBm</p> <p>Transmit Freq Error -43.465 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.55 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div</p> <p>Ref Offset: 7.04 dB</p> <p>Ref: 27.04 dBm</p> <p>Mkr3 2.445249 GHz</p> <p>-13.215 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.453 MHz</p> <p>Total Power 12.6 dBm</p> <p>Transmit Freq Error -38.884 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.57 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div</p> <p>Ref Offset: 7.08 dB</p> <p>Ref: 27.08 dBm</p> <p>Mkr3 2.470253 GHz</p> <p>-12.879 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.483 MHz</p> <p>Total Power 12.5 dBm</p> <p>Transmit Freq Error -36.726 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.58 MHz</p> <p>x dB -6.00 dB</p>
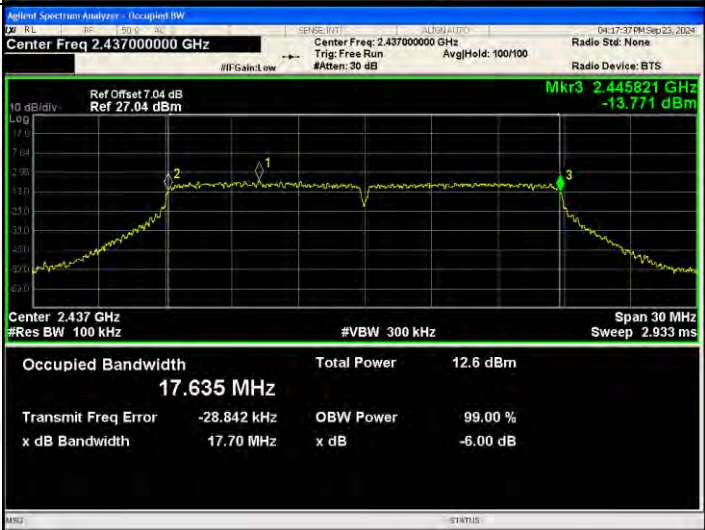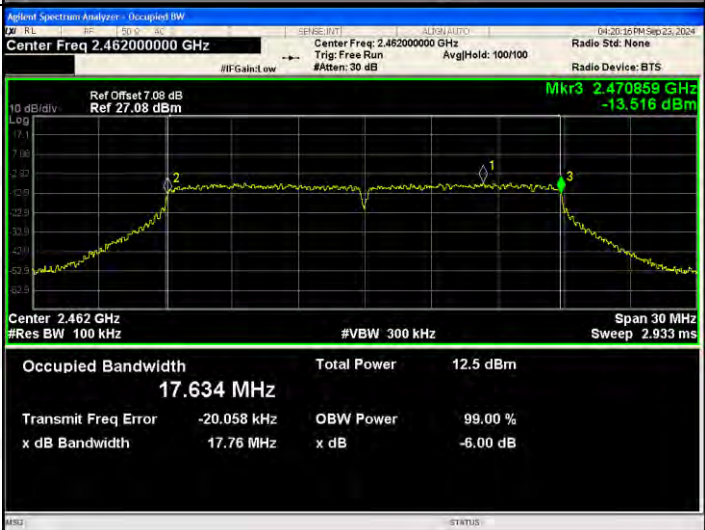
<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div</p> <p>Ref Offset: 7.01 dB</p> <p>Ref: 27.01 dBm</p> <p>Mkr3 2.420815 GHz</p> <p>-13.037 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.0 dBm</td> </tr> <tr> <td>17.637 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-21.582 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.67 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	13.0 dBm	17.637 MHz			Transmit Freq Error	OBW Power	99.00 %	-21.582 kHz	x dB	-6.00 dB	x dB Bandwidth			17.67 MHz		
Occupied Bandwidth	Total Power	13.0 dBm																	
17.637 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-21.582 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.67 MHz																			
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div</p> <p>Ref Offset: 7.04 dB</p> <p>Ref: 27.04 dBm</p> <p>Mkr3 2.445821 GHz</p> <p>-13.771 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td>17.635 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-28.842 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.70 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	17.635 MHz			Transmit Freq Error	OBW Power	99.00 %	-28.842 kHz	x dB	-6.00 dB	x dB Bandwidth			17.70 MHz		
Occupied Bandwidth	Total Power	12.6 dBm																	
17.635 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-28.842 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.70 MHz																			
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>10 dB/div</p> <p>Ref Offset: 7.08 dB</p> <p>Ref: 27.08 dBm</p> <p>Mkr3 2.470859 GHz</p> <p>-13.516 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.5 dBm</td> </tr> <tr> <td>17.634 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-20.058 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.76 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.5 dBm	17.634 MHz			Transmit Freq Error	OBW Power	99.00 %	-20.058 kHz	x dB	-6.00 dB	x dB Bandwidth			17.76 MHz		
Occupied Bandwidth	Total Power	12.5 dBm																	
17.634 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-20.058 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.76 MHz																			
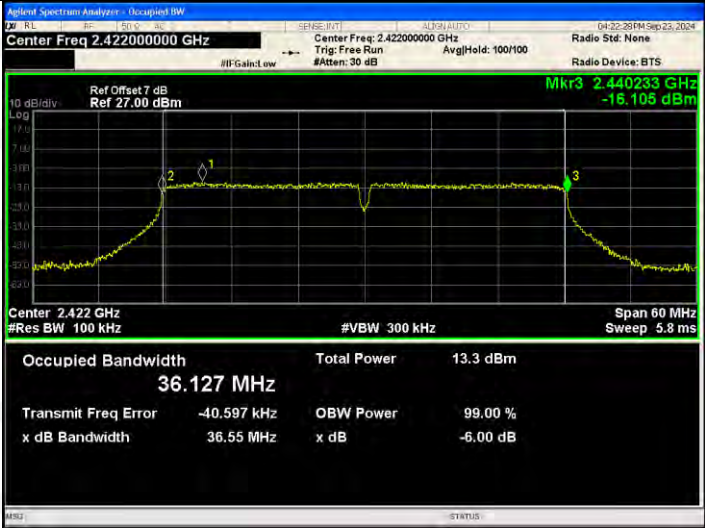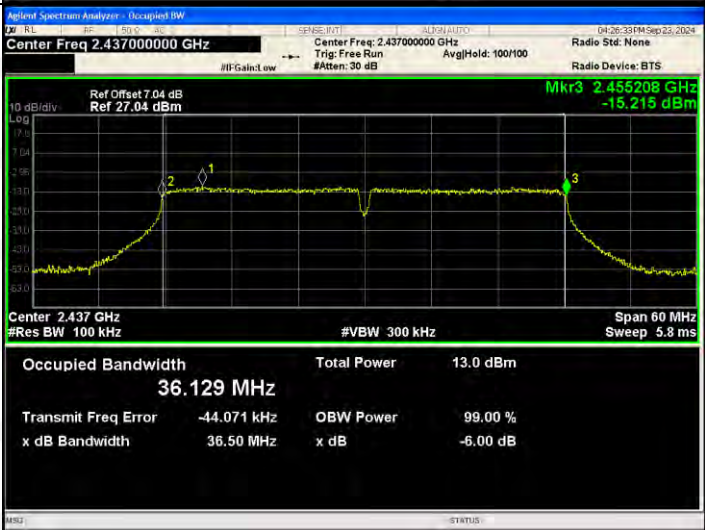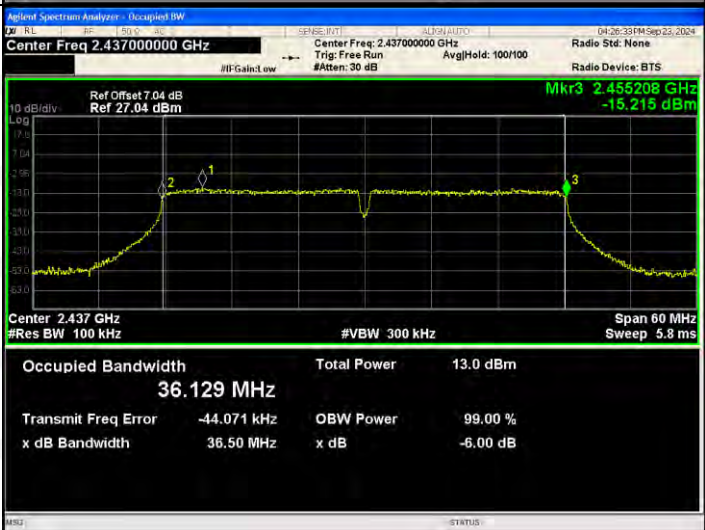
<p>802.11n(HT40)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42200000 GHz</p> <p>Center Freq: 2.42200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7 dB</p> <p>Ref: 27.00 dBm</p> <p>Mkr3 2.440233 GHz</p> <p>-16.105 dBm</p> <p>Center 2.422 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.127 MHz</p> <p>Total Power 13.3 dBm</p> <p>Transmit Freq Error -40.587 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 36.55 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.04 dB</p> <p>Ref: 27.04 dBm</p> <p>Mkr3 2.455208 GHz</p> <p>-15.215 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.129 MHz</p> <p>Total Power 13.0 dBm</p> <p>Transmit Freq Error -44.071 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 36.50 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.04 dB</p> <p>Ref: 27.04 dBm</p> <p>Mkr3 2.455208 GHz</p> <p>-15.215 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.129 MHz</p> <p>Total Power 13.0 dBm</p> <p>Transmit Freq Error -44.071 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 36.50 MHz</p> <p>x dB -6.00 dB</p>

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

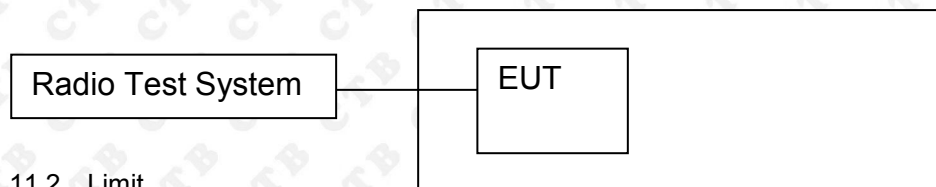

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz]Total	Limit(dBm)
802.11b	LCH	0.396	-14.432	/	8
	MCH	0.574	-14.661	/	8
	HCH	-0.065	-12.778	/	8
802.11g	LCH	-5.942	-18.565	/	8
	MCH	-6.211	-18.959	/	8
	HCH	-6.537	-19.876	/	8
802.11n(H T20)	LCH	-6.344	-19.68	-6.147	8
	MCH	-6.753	-20.09	-6.556	8
	HCH	-7.705	-19.421	-7.422	8
802.11n(H T40)	LCH	-10.052	-23.591	-9.864	8
	MCH	-10.951	-22.865	-10.680	8
	HCH	-10.866	-23.293	-10.624	8

**ANT1:
Test Graph**

Graphs	
802.11b /LCH	<p>Agilent Spectran Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset: 7.01 dB Ref 20.00 dBm Mkr1 2.412 48 GHz 0.396 dBm Span 30.00 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectran Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset: 7.04 dB Ref 20.00 dBm Mkr1 2.436 46 GHz 0.574 dBm Span 30.00 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectran Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset: 7.08 dB Ref 20.00 dBm Mkr1 2.460 98 GHz -0.065 dBm Span 30.00 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 2.933 ms (1001 pts)</p>

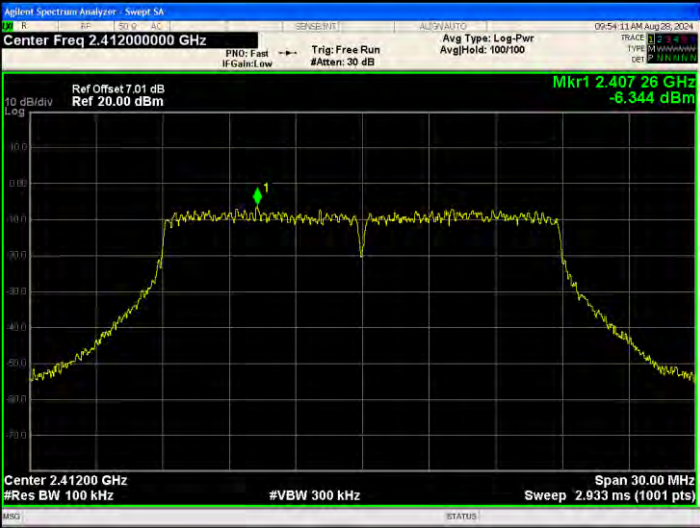


<p>802.11g/LCH</p>	<p>Agilent Spectrain Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset: 7.01 dB Ref 20.00 dBm Mkr1 2.40639 GHz -5.942 dBm Center 2.41200 GHz #Res BW 100 kHz #VBW 300 kHz Span 30.00 MHz Sweep 2.933 ms (1001 pts)</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrain Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset: 7.04 dB Ref 20.00 dBm Mkr1 2.43067 GHz -6.211 dBm Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz Span 30.00 MHz Sweep 2.933 ms (1001 pts)</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrain Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset: 7.09 dB Ref 20.00 dBm Mkr1 2.45639 GHz -6.537 dBm Center 2.46200 GHz #Res BW 100 kHz #VBW 300 kHz Span 30.00 MHz Sweep 2.933 ms (1001 pts)</p>




<p>802.11n(HT20)/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset: 7.01 dB Ref 20.00 dBm Mkr1 2.40726 GHz -6.344 dBm Center 2.41200 GHz #Res BW 100 kHz #VBW 300 kHz Span 30.00 MHz Sweep 2.933 ms (1001 pts)</p>
<p>802.11n(HT20)/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset: 7.04 dB Ref 20.00 dBm Mkr1 2.43226 GHz -6.753 dBm Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz Span 30.00 MHz Sweep 2.933 ms (1001 pts)</p>
<p>802.11n(HT20)/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset: 7.09 dB Ref 20.00 dBm Mkr1 2.45723 GHz -7.705 dBm Center 2.46200 GHz #Res BW 100 kHz #VBW 300 kHz Span 30.00 MHz Sweep 2.933 ms (1001 pts)</p>




<p>802.11n(HT40)/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.42200000 GHz Ref Offset: 7 dB Ref 20.00 dBm Mkr1 2.42476 GHz -10.052 dBm Center 2.42200 GHz #Res BW 100 kHz #VBW 300 kHz Span 60.00 MHz Sweep 5.800 ms (1001 pts)</p>
<p>802.11n(HT40)/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset: 7.04 dB Ref 20.00 dBm Mkr1 2.42746 GHz -10.951 dBm Center 2.43700 GHz #Res BW 100 kHz #VBW 300 kHz Span 60.00 MHz Sweep 5.800 ms (1001 pts)</p>
<p>802.11n(HT40)/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.45200000 GHz Ref Offset: 7.07 dB Ref 20.00 dBm Mkr1 2.46646 GHz -10.866 dBm Center 2.45200 GHz #Res BW 100 kHz #VBW 300 kHz Span 60.00 MHz Sweep 5.800 ms (1001 pts)</p>

**ANT 2:
Test Graph**

Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.01 dB Ref 20.00 dBm Mkr1 2.41374 GHz -14.432 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.43619 GHz -14.661 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.08 dB Ref 20.00 dBm Mkr1 2.46119 GHz -12.778 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
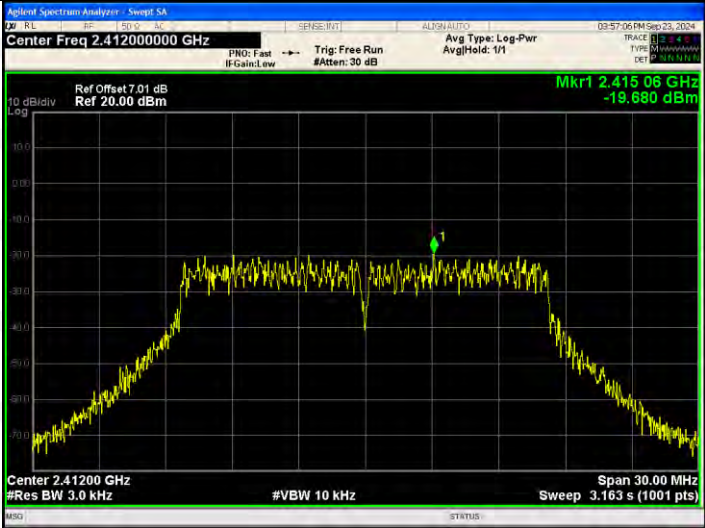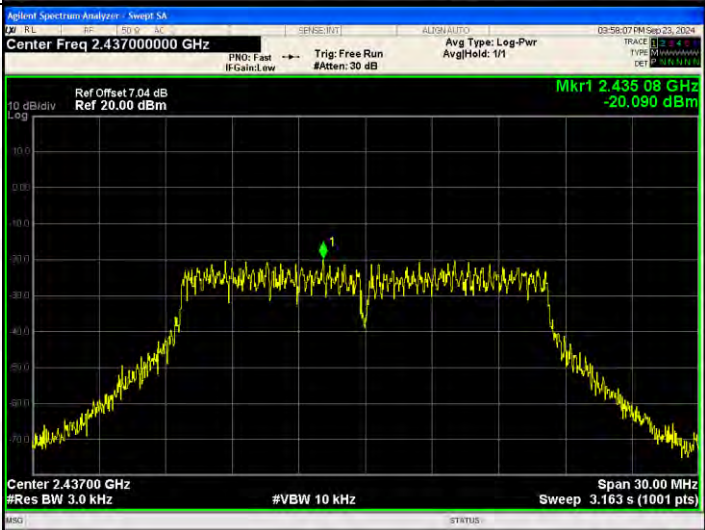
<p>802.11g/LCH</p>	
<p>802.11g/MCH</p>	
<p>802.11g/HCH</p>	
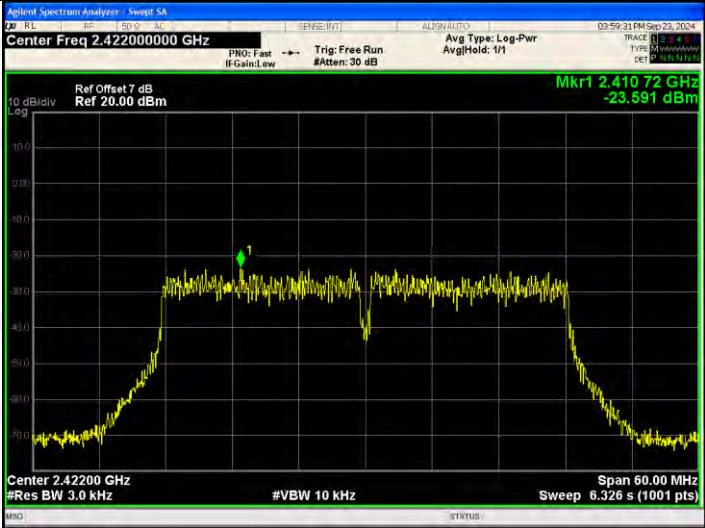
<p>802.11n(HT20)/LC H</p>		
<p>802.11n(HT20)/MC H</p>		
<p>802.11n(HT20)/HC H</p>		

<p>802.11n(HT40)/LC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.42200000 GHz Ref Offset 7 dB Ref 20.00 dBm Mkr1 2.41072 GHz -23.591 dBm Center 2.42200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.44284 GHz -22.965 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.04 dB Ref 20.00 dBm Mkr1 2.44284 GHz -22.965 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is External antenna and no consideration of replacement. The best case gain of the antenna is ANT1: 3.43dBi, ANT2: 3.43dBi

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G

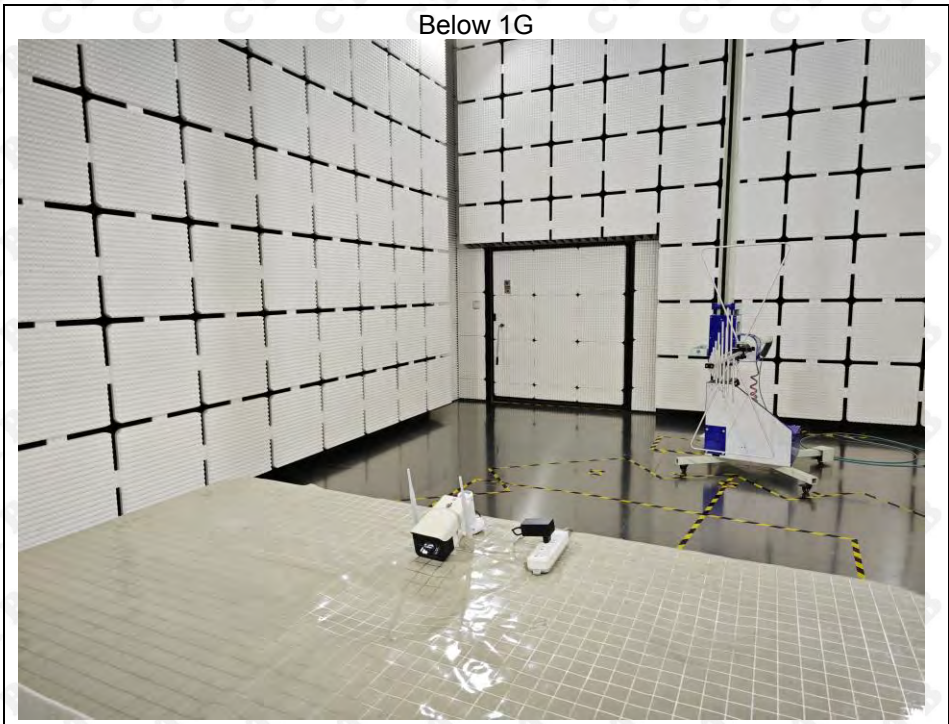

Above 1G



Conducted Emission



※※※※※ END OF REPORT ※※※※※