

TEST REPORT

Reference No..... : WTG19X10073093W-1
FCC ID : 2AT5W-8121N-UH
Applicant : SHENZHEN OFEIXIN TECHNOLOGY LIMITED
Address..... : 903, shifeng building, no.1, villa road, xinzhuan community, matan street, guangming new district, shenzhen city, guangdong province, China
Product Name : WIFI Module
Test Model. : 8121N-UH
Standards : FCC Part 15.407
Date of Receipt sample : Apr. 30, 2021
Date of Test..... : Apr. 30, 2021 to Jun. 02, 2021
Date of Issue : Jun. 01, 2021
Test Result..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road,
Block 70 Bao'an District, Shenzhen, Guangdong, China

Tel.: +86-755-33663308

Fax.: +86-755-33663309

Tested by:

Jack Huang

Jack Huang / Project Engineer

Reviewed By:

Lion Cai

Lion Cai / RF Manager

Approved & Authorized By:

Silin Chen

Silin Chen / Manager

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	5
1.2 TEST STANDARDS.....	6
1.3 TEST METHODOLOGY	6
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	6
1.5 EUT OPERATING DURING TEST	7
1.6 TEST FACILITY	7
1.7 EUT SETUP AND TEST MODE.....	8
1.8 MEASUREMENT UNCERTAINTY	9
1.9 TEST EQUIPMENT LIST AND DETAILS	10
2. SUMMARY OF TEST RESULTS	12
3. ANTENNA REQUIREMENT	13
3.1 STANDARD APPLICABLE.....	13
3.2 EVALUATION INFORMATION.....	13
4. AUTOMATICALLY DISCONTINUE TRANSMISSION	14
4.1 STANDARD APPLICABLE.....	14
4.2 SUMMARY OF TEST RESULTS	14
5. POWER SPECTRAL DENSITY	15
5.1 STANDARD APPLICABLE.....	15
5.2 TEST PROCEDURE.....	15
5.3 SUMMARY OF TEST RESULTS/PLOTS	16
6. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	17
6.1 STANDARD APPLICABLE.....	17
6.2 TEST PROCEDURE.....	17
6.3 SUMMARY OF TEST RESULTS/PLOTS	19
7. MAXIMUM CONDUCTED OUTPUT POWER	20
7.1 STANDARD APPLICABLE.....	20
7.2 TEST PROCEDURE.....	20
7.3 SUMMARY OF TEST RESULTS/PLOTS	21
8. RADIATED SPURIOUS EMISSIONS	22
8.1 STANDARD APPLICABLE.....	22
8.2 TEST PROCEDURE.....	22
8.3 TEST RECEIVER SETUP	24
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	24
8.5 SUMMARY OF TEST RESULTS/PLOTS	25
9. FREQUENCY STABILITY	35
9.1 STANDARD APPLICABLE.....	35
9.2 TEST PROCEDURE.....	35
9.3 SUMMARY OF TEST RESULTS/PLOTS	35
10 CONDUCTED EMISSIONS	36
10.1 TEST PROCEDURE.....	36
10.2 BASIC TEST SETUP BLOCK DIAGRAM.....	36
10.3 TEST RECEIVER SETUP	36
10.4 SUMMARY OF TEST RESULTS/PLOTS	36
APPENDIX SUMMARY	39
APPENDIX A	40
APPENDIX B	49
APPENDIX C	62
APPENDIX D	71

APPENDIX PHOTOGRAPHS.....72

Report version

Version No.	Date of issue	Description
Rev.00	Jun.01, 2021	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: SHENZHEN OFEIXIN TECHNOLOGY LIMITED
 Address of applicant: 903, shifeng building, no.1, villa road, xinzhuan community, matan street, guangming new district, shenzhen city, guangdong province, China

Manufacturer: SHENZHEN OFEIXIN TECHNOLOGY LIMITED
 Address of manufacturer: 903, shifeng building, no.1, villa road, xinzhuan community, matan street, guangming new district, shenzhen city, guangdong province, China

General Description of EUT	
Product Name:	WIFI Module
Trade Name:	/
Model No.:	8121N-UH
Adding Model(s):	/
Rated Voltage:	DC 5V
Battery Capacity:	/
Power Adapter:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20)
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power:	Antenna 0:15.59dBm (Conducted) Antenna 1: 15.86dBm (Conducted)
Type of Modulation:	BPSK, QPSK,16QAM,64QAM
Type of Antenna:	Integral Antenna
Antenna Gain:	Antenna 0: 2dBi Antenna 1: 2dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPARTE.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter “artgui.exe” into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Ant.	Test Frequency (MHz)												
		NCB: 20MHz												
		5180	520	524	526	5300	532	550	558	570	572	574	578	5825
802.11a 6Mbps	ANT 0	58	58	58	/	/	/	/	/	/	/	59	59	59
	ANT 1	57	57	57	/	/	/	/	/	/	/	55	55	55
802.11n-HT20 MCS0	ANT 0	58	58	58	/	/	/	/	/	/	/	71	71	71
	ANT 1	57	57	57	/	/	/	/	/	/	/	55	55	55

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

Address of the test laboratory

Laboratory: Waltek Testing Group (Shenzhen) Co., Ltd.

Address: 1/F., Room 101, Building 1, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

FCC – Registration No.: 125990

Waltek Testing Group (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Waltek Testing Group (Shenzhen) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz

Note: All test modes (different data rate and different modulation) are performed, but only the worst case is recorded in this report.

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	45~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E445	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2021-03-27	2022-03-26
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2021-03-27	2022-03-26
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2021-03-27	2022-03-26
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2021-03-27	2022-03-26
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2021-03-27	2022-03-26
SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2021-03-27	2022-03-26
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2021-03-27	2022-03-26
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2021-03-27	2022-03-26
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2021-03-27	2022-03-26
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2021-03-27	2022-03-26
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2021-04-12	2022-04-11
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2021-04-12	2022-04-11
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2021-03-19	2023-03-18
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2021-03-19	2023-03-18
SEMT-1042	Horn Antenna	ETS	3117	00086197	2021-03-19	2023-03-18
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2021-04-27	2023-04-26
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2021-04-27	2022-04-26
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2021-03-27	2022-03-26
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2021-03-27	2022-03-26
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2021-03-19	2023-03-18
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	/	/
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	/	/
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	/	/
SEMT-C004	Cable	Zheng DI	2M0RFC	/	/	/
SEMT-C005	Cable	Zheng DI	1M0RFC	/	/	/
SEMT-C006	Cable	Zheng DI	1M0RFC	/	/	/

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
15.407 (c)	Automatically Discontinue Transmission	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: Not applicable

3. Antenna Requirement

3.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Evaluation Information

This product has two integral antennas, fulfill the requirement of this section.

4. Automatically Discontinue Transmission

4.1 Standard Applicable

According to FCC Part 15.407(c), the device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

4.2 Summary of Test Results

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

5. Power Spectral Density

5.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

5.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500

kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set RBW $\geq 1/T$, where T is defined in section II.B.1.a).
- b) Set VBW ≥ 3 RBW.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/\text{RBW})$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW=100 kHz is available on nearly all spectrum analyzers.

5.3 Summary of Test Results/Plots

Please refer to Appendix A

6. Emission Bandwidth and Occupied Bandwidth

6.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

6.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.

- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 * RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

6.3 Summary of Test Results/Plots

Please refer to Appendix B

7. Maximum Conducted Output Power

7.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW \geq 3 MHz.
- (iv) Number of points in sweep \geq 2 Span / RBW. (This ensures that bin-to-bin spacing is \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

Waltek Testing Group (Shenzhen) Co., Ltd.

[Http://www.waltek.com.cn](http://www.waltek.com.cn)

- (v) Sweep time = auto.
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

7.3 Summary of Test Results/Plots

Please refer to Appendix C

8. Radiated Spurious Emissions

8.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E*d)^2) / 30$$

where:

- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

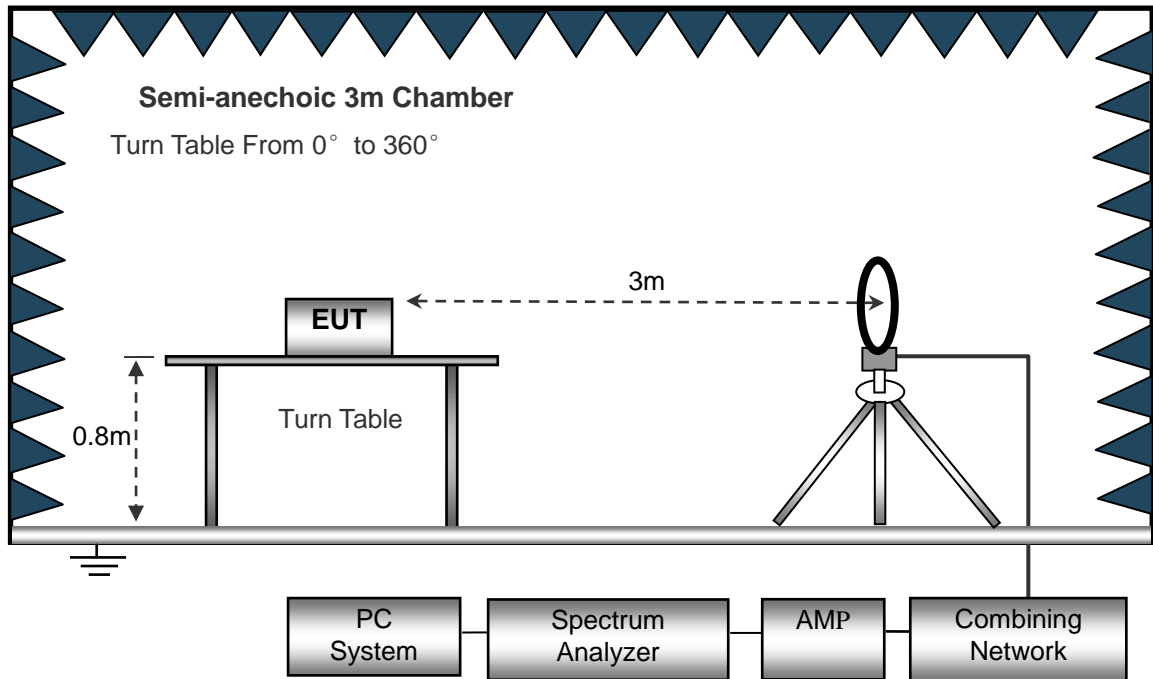
8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

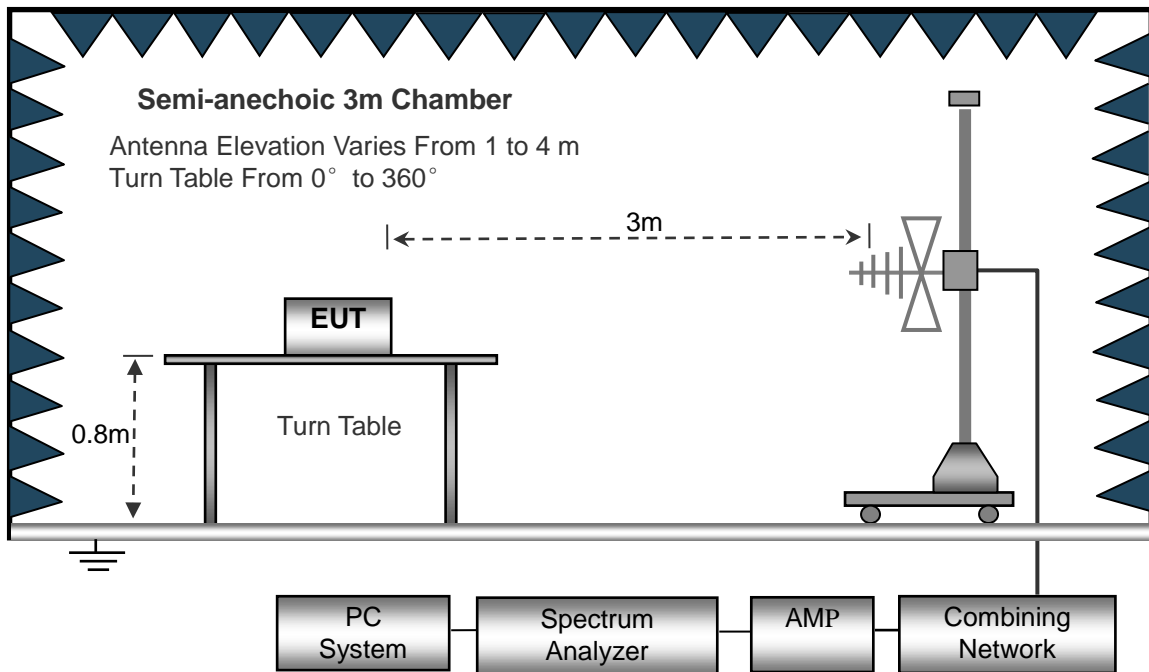
The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

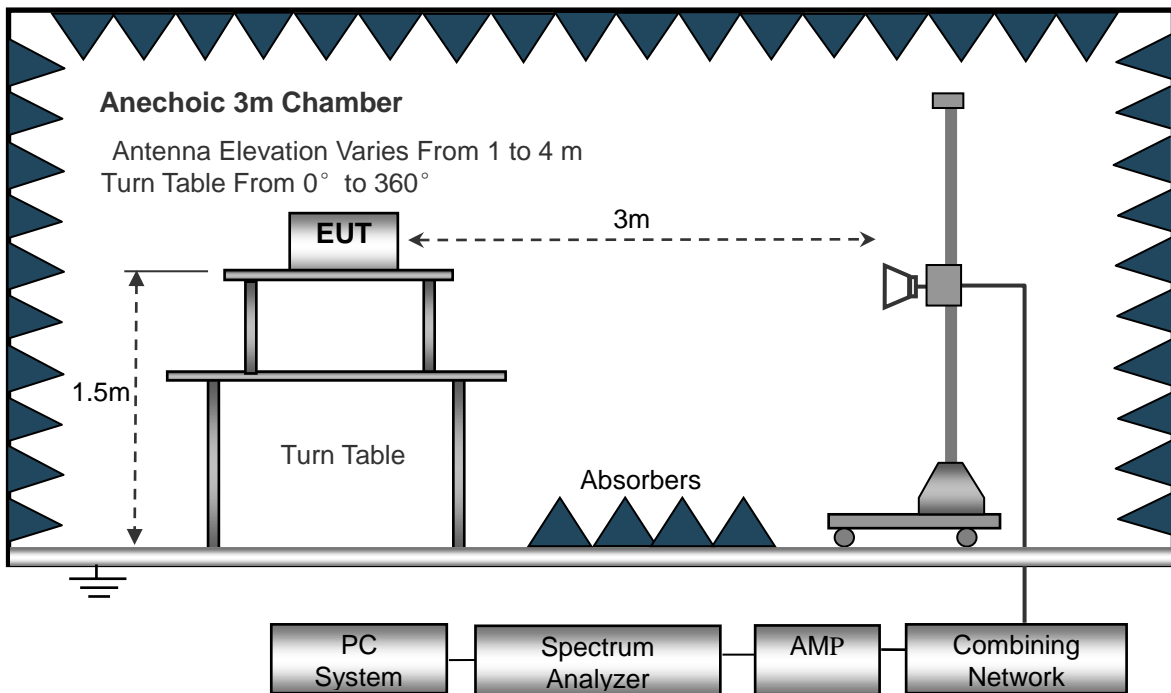
The test setup for emission measurement below 30MHz..



The test setup for emission measurement from 30 MHz to 1 GHz..



The test setup for emission measurement above 1 GHz..



8.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

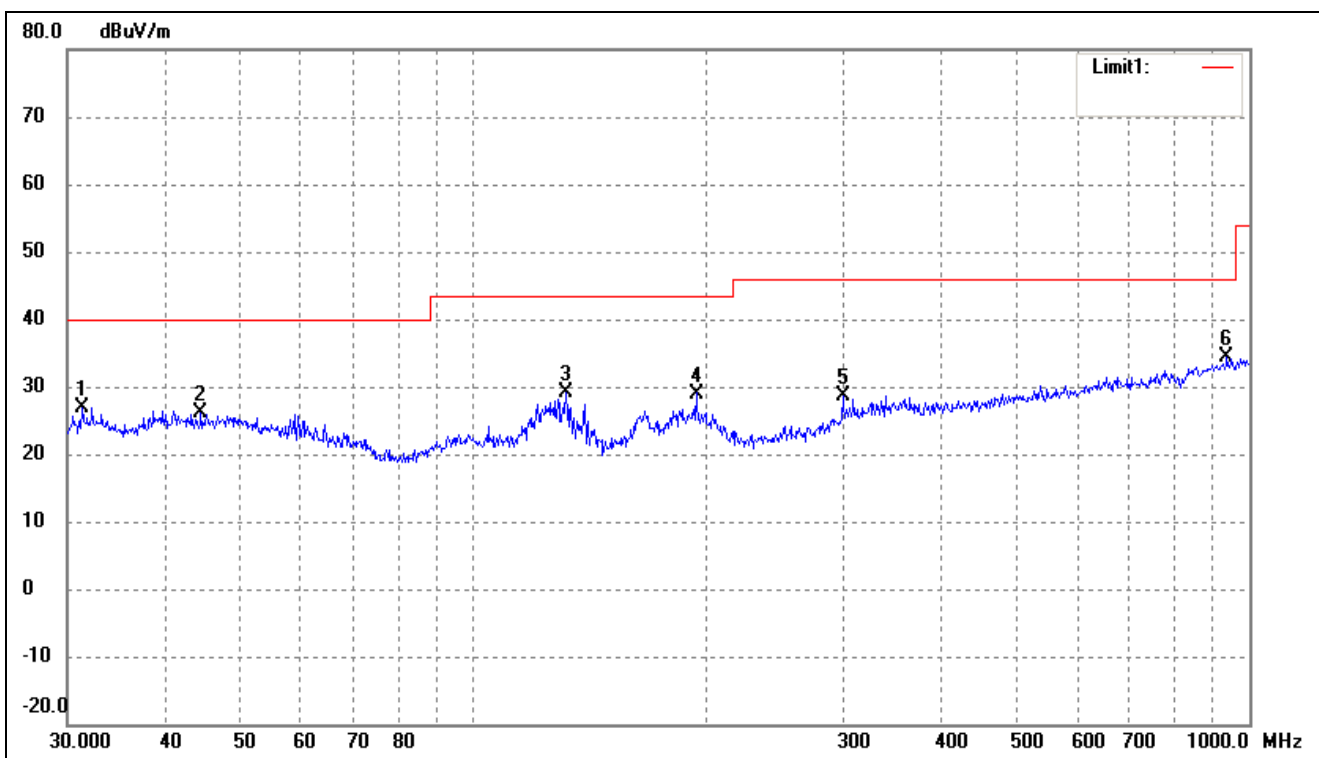
$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

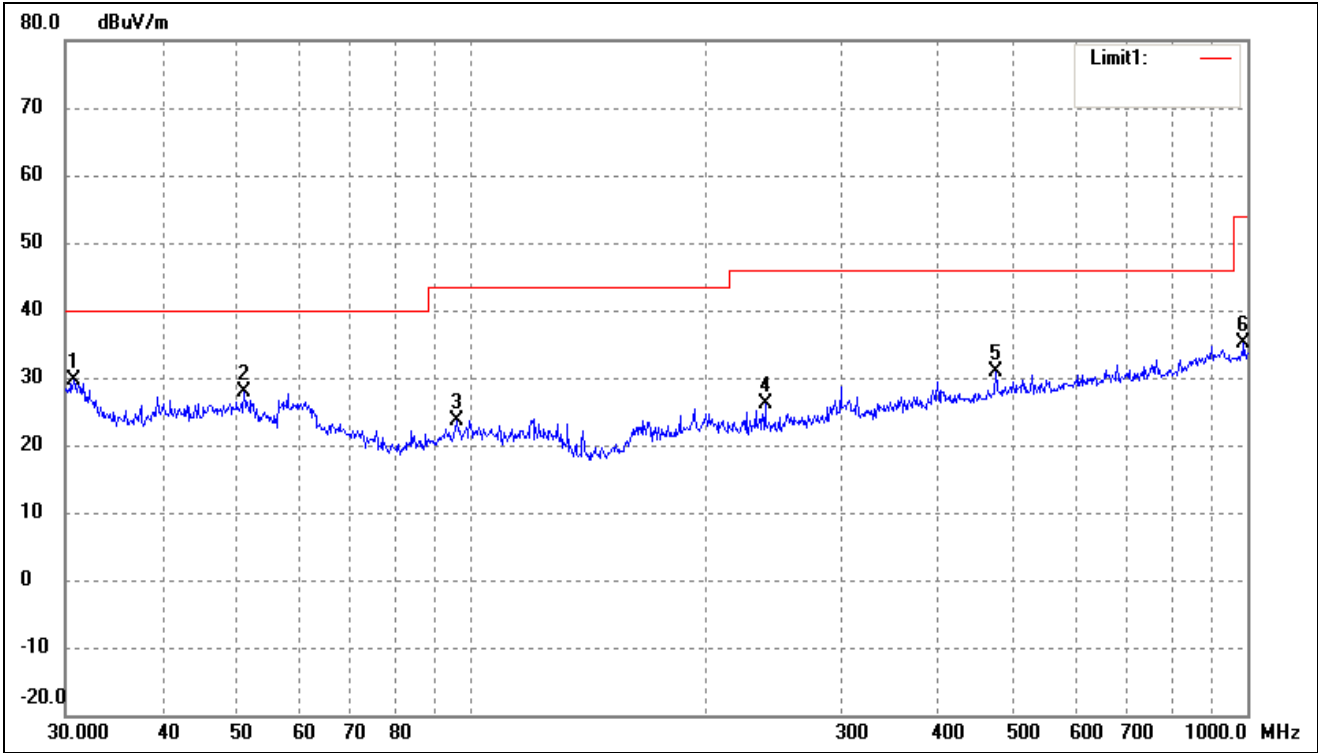
- Spurious Emission From 30 MHz to 1 GHz
- Antenna 0(Worst case)
- 5150-5250MHz

802.11a(Worst case)			
Test Channel	5180MHz(Worst case)	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	31.3992	40.89	-14.06	26.83	40.00	-13.17	-	-	peak
2	44.5868	37.99	-11.82	26.17	40.00	-13.83	-	-	peak
3	131.7577	46.07	-16.83	29.24	43.50	-14.26	-	-	peak
4	193.7728	41.85	-12.85	29.00	43.50	-14.50	-	-	peak
5	299.3158	37.55	-8.96	28.59	46.00	-17.41	-	-	peak
6	935.5463	32.64	1.65	34.29	46.00	-11.71	-	-	peak

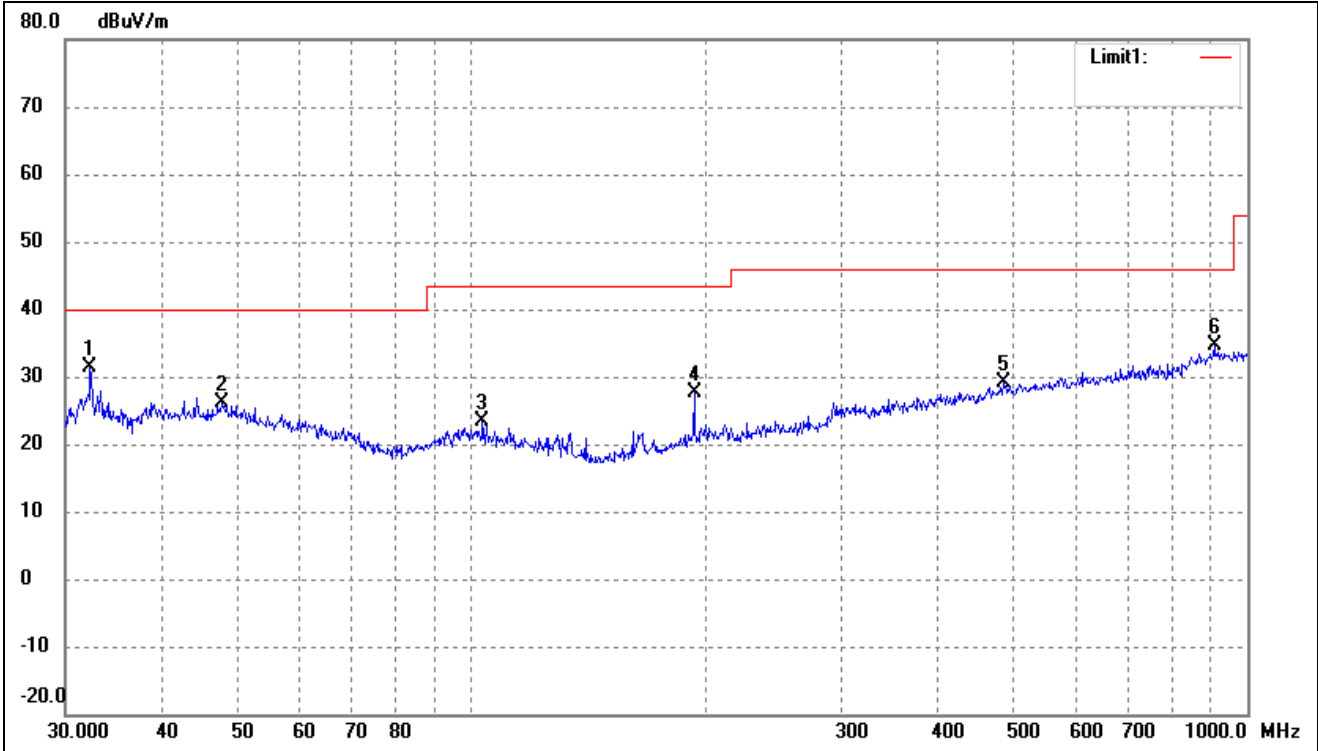
802.11a(Worst case)			
Test Channel	5180MHz(Worst case)	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	30.7455	43.63	-14.11	29.52	40.00	-10.48	-	-	peak
2	50.9420	39.57	-11.80	27.77	40.00	-12.23	-	-	peak
3	95.7622	37.66	-14.03	23.63	43.50	-19.87	-	-	peak
4	239.1473	37.70	-11.46	26.24	46.00	-19.76	-	-	peak
5	473.8347	35.80	-4.85	30.95	46.00	-15.05	-	-	peak
6	989.5355	33.45	1.71	35.16	54.00	-18.84	-	-	peak

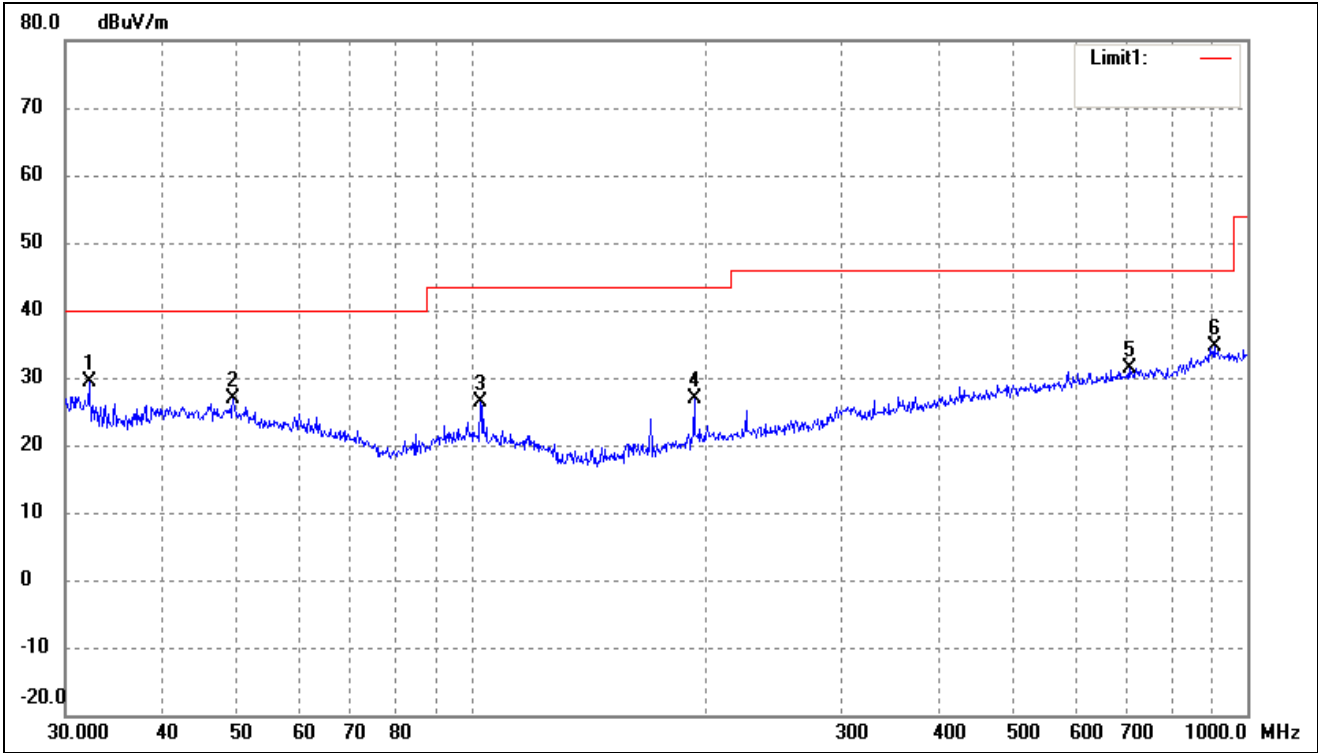
➤ Antenna 0: 5725-5850MHz

802.11a(worst case)			
Test Channel	5745MHz(worst case)	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.2925	45.46	-14.03	31.43	40.00	-8.57	-	-	peak
2	47.6586	37.68	-11.65	26.03	40.00	-13.97	-	-	peak
3	103.4421	36.77	-13.31	23.46	43.50	-20.04	-	-	peak
4	193.7728	40.38	-12.85	27.53	43.50	-15.97	-	-	peak
5	485.6093	33.54	-4.49	29.05	46.00	-16.95	-	-	peak
6	906.4824	33.01	1.62	34.63	46.00	-11.37	-	-	peak

802.11a(worst case)			
Test Channel	5745MHz(worst case)	Polarity:	Vertical

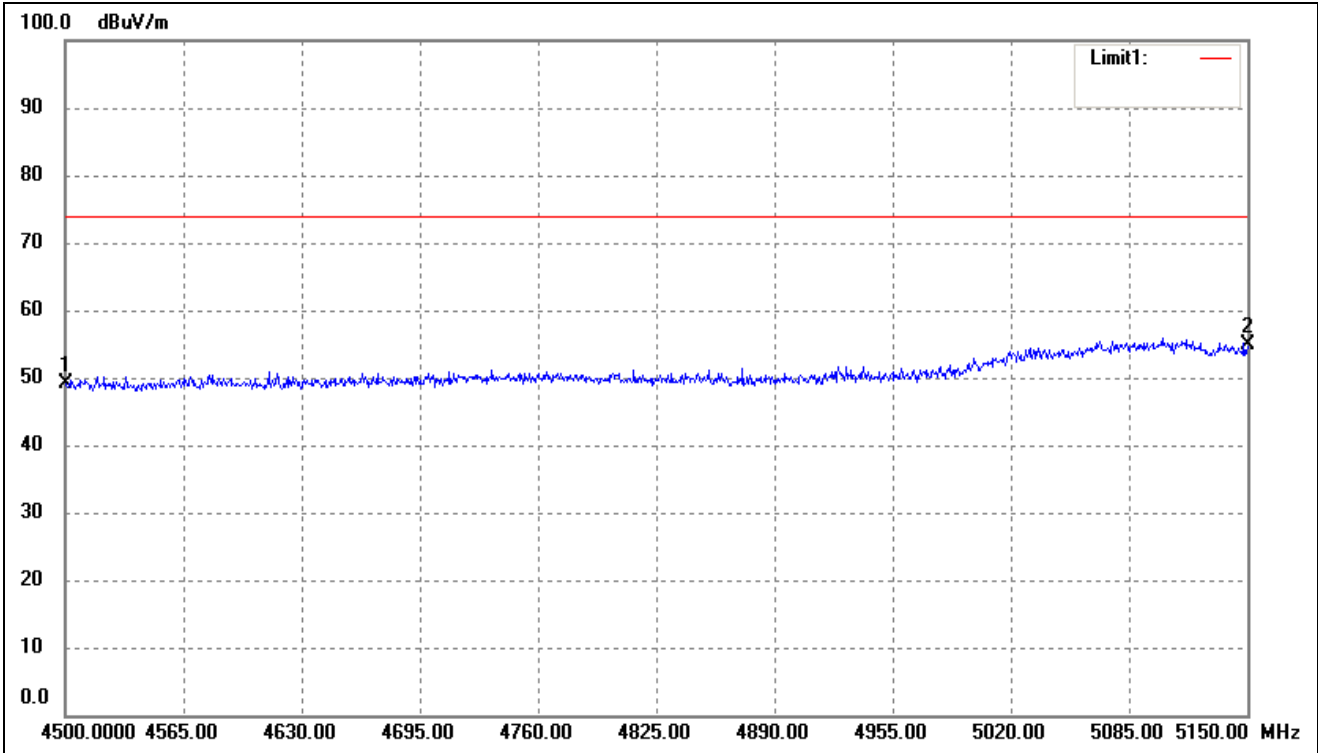


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	32.1795	43.40	-14.03	29.37	40.00	-10.63	-	-	peak
2	49.3594	38.37	-11.57	26.80	40.00	-13.20	-	-	peak
3	102.7192	39.73	-13.32	26.41	43.50	-17.09	-	-	peak
4	193.7728	39.71	-12.85	26.86	43.50	-16.64	-	-	peak
5	704.2261	33.01	-1.71	31.30	46.00	-14.70	-	-	peak

Remark: ‘-’Means’ the test Degree and Height are not recorded by the test software and only show the worst case in the test report.

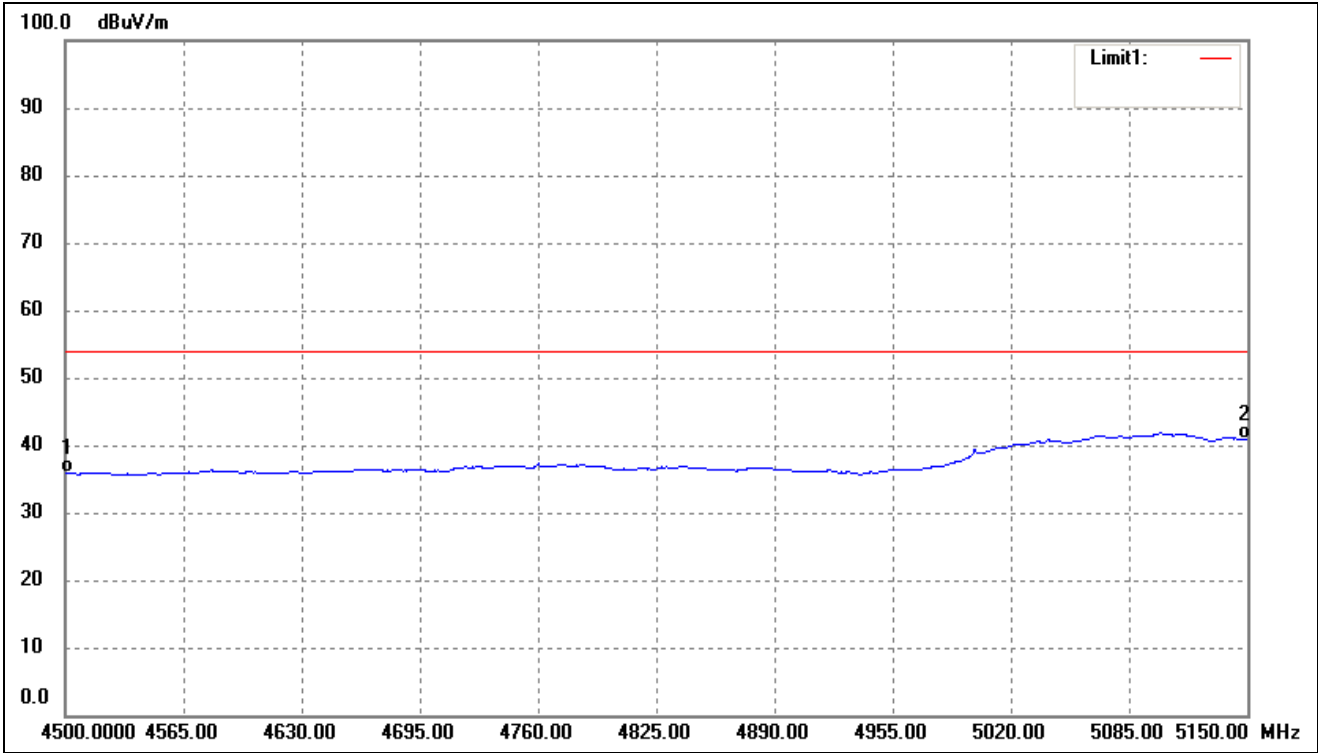
- Spurious Emission above 1GHz
- Antenna 0(worst case)

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 4.50-5.15GHz	Polarity:	Horizontal (worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	53.81	-4.71	49.10	74.00	-24.90	-	-	peak
2	5150.000	59.15	-4.32	54.83	74.00	-19.17	-	-	peak

802.11a- Restricted Bandedge (worst case)			
Test Channel	band 4.50-5.15GHz	Polarity:	Horizontal (worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ()	Height (cm)	Remark
1	4500.000	40.66	-4.71	35.95	54.00	-18.05	-	-	AVG
2	5150.000	45.16	-4.32	40.84	54.00	-13.16	-	-	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

Remark: '-'Means' the test Degree and Height is not recorded by the test software and only show the worst case in the test report.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
- Antenna 0 (worst case)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	57.30	7.11	64.41	74.00	-9.59	H	PK
15540	38.13	8.22	46.35	54.00	-7.65	H	AV
10360	60.72	7.11	67.83	74.00	-6.17	V	PK
15540	37.96	8.22	46.18	54.00	-7.82	V	AV
Middle Channel (5200MHz)							
10400	59.89	7.22	67.11	74.00	-6.89	H	PK
15600	36.64	8.67	45.31	54.00	-8.69	H	AV
10400	57.25	7.22	64.47	74.00	-9.53	V	PK
15600	39.99	8.67	48.66	54.00	-5.34	V	AV
High Channel (5240MHz)							
10480	58.61	7.69	66.30	74.00	-7.70	H	PK
15720	38.10	8.93	47.03	54.00	-6.97	H	AV
10480	57.57	7.69	65.26	74.00	-8.74	V	PK
10360	57.30	7.11	64.41	74.00	-9.59	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	55.75	9.45	65.20	74.00	-8.80	H	PK
17235	34.57	10.36	44.93	54.00	-9.07	H	AV
11490	56.35	9.45	65.80	74.00	-8.20	V	PK
17235	38.57	10.36	48.93	54.00	-5.07	V	AV
Middle Channel (5785MHz)							
11570	56.80	9.62	66.42	74.00	-7.58	H	PK
17355	38.09	10.67	48.76	54.00	-5.24	H	AV
11570	56.63	9.62	66.25	74.00	-7.75	V	PK
17355	35.63	10.67	46.30	54.00	-7.70	V	AV
High Channel (5825MHz)							
11650	54.34	9.84	64.18	74.00	-9.82	H	PK
17475	33.15	10.95	44.10	54.00	-9.90	H	AV
11650	53.97	9.84	63.81	74.00	-10.19	V	PK
17475	38.82	10.95	49.77	54.00	-4.23	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-37.44	-27
Highest	Above 5350	-41.37	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-38.92	-27
	5715 to 5725	-39.82	-17
Highest	5850 to 5860	-42.84	-17
	Above 5860	-43.37	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz5.725-5.850GHz (802.11n HT20)
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	59.27	7.11	66.38	74.00	-7.62	H	PK
15540	36.55	8.22	44.77	54.00	-9.23	H	AV
10360	58.61	7.11	65.72	74.00	-8.28	V	PK
15540	37.57	8.22	45.79	54.00	-8.21	V	AV
Middle Channel (5200MHz)							
10400	59.89	7.22	67.11	74.00	-6.89	H	PK
15600	35.96	8.67	44.63	54.00	-9.37	H	AV
10400	56.92	7.22	64.14	74.00	-9.86	V	PK
15600	36.52	8.67	45.19	54.00	-8.81	V	AV
High Channel (5240MHz)							
10480	55.86	7.69	63.55	74.00	-10.45	H	PK
15720	39.59	8.93	48.52	54.00	-5.48	H	AV
10480	59.29	7.69	66.98	74.00	-7.02	V	PK
15720	39.57	8.93	48.50	54.00	-5.50	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	58.54	9.45	67.99	74.00	-6.01	H	PK
17235	35.67	10.36	46.03	54.00	-7.97	H	AV
11490	55.91	9.45	65.36	74.00	-8.64	V	PK
17235	35.97	10.36	46.33	54.00	-7.67	V	AV
Middle Channel (5785MHz)							
11570	54.84	9.62	64.46	74.00	-9.54	H	PK
17355	34.04	10.67	44.71	54.00	-9.29	H	AV
11570	55.25	9.62	64.87	74.00	-9.13	V	PK
17355	36.72	10.67	47.39	54.00	-6.61	V	AV
High Channel (5825MHz)							
11650	58.08	9.84	67.92	74.00	-6.08	H	PK
17475	35.03	10.95	45.98	54.00	-8.02	H	AV
11650	57.45	9.84	67.29	74.00	-6.71	V	PK
17475	36.25	10.95	47.20	54.00	-6.80	V	AV

➤ Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-32.10	-27
Highest	Above 5350	-39.09	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-44.18	-27
	5715 to 5725	-34.52	-17
Highest	5850 to 5860	-37.67	-17
	Above 5860	-41.78	-27
Note: the data just list the worst cases			

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

9. Frequency Stability

9.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

9.3 Summary of Test Results/Plots

Please refer to Appendix D

10 Conducted Emissions

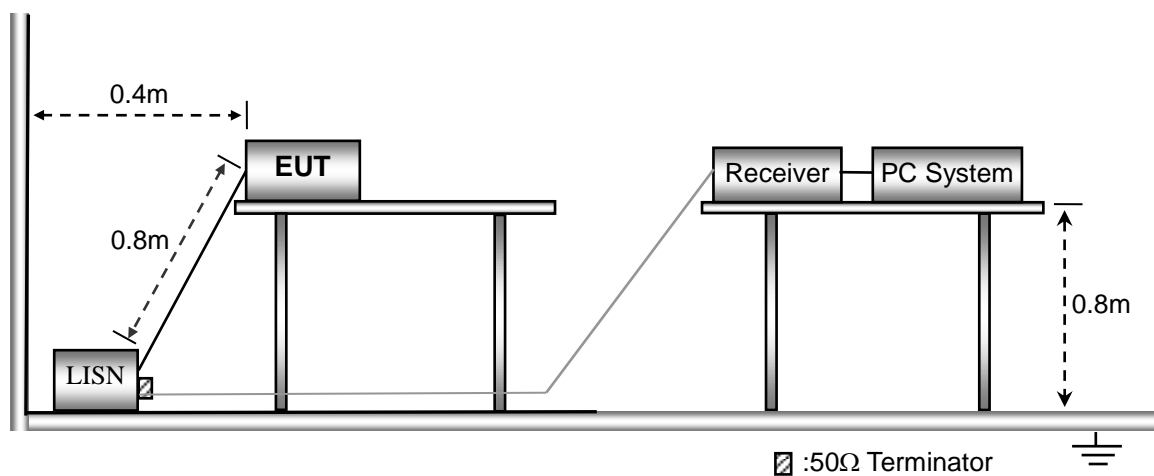
10.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

10.2 Basic Test Setup Block Diagram



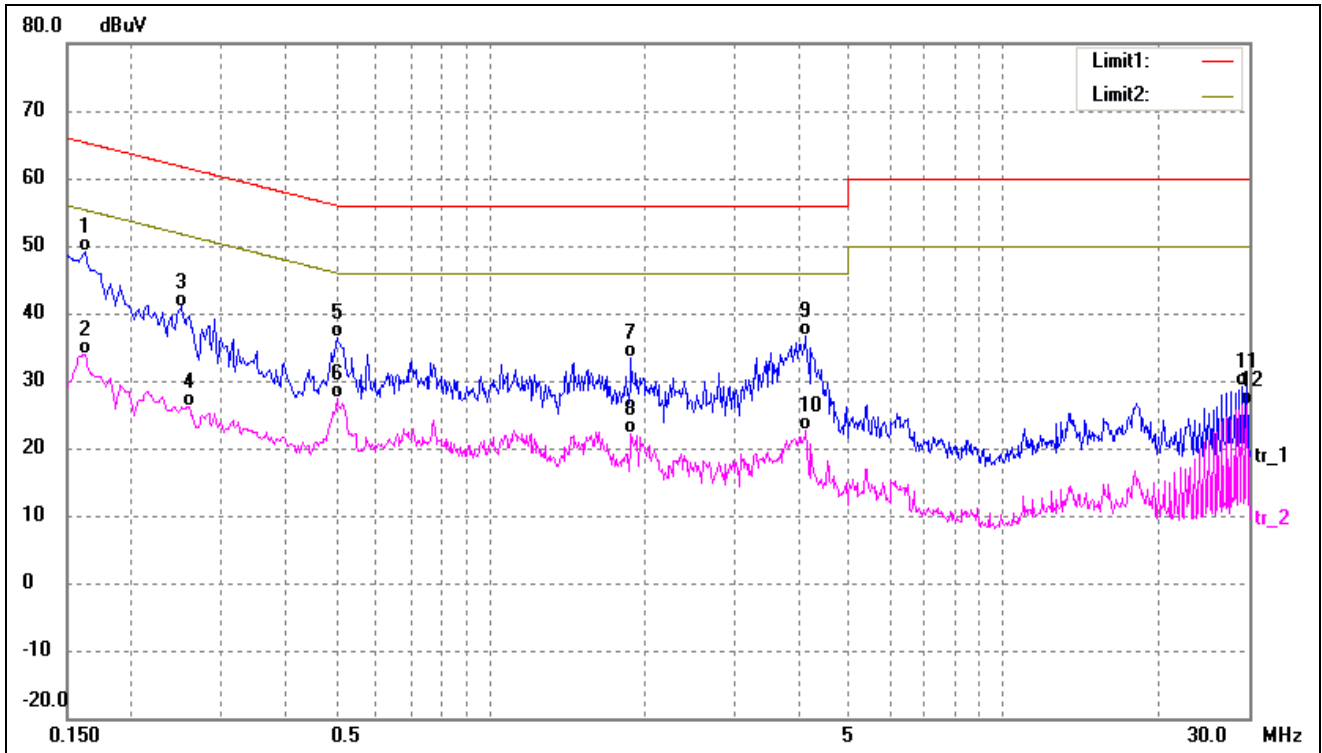
10.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal

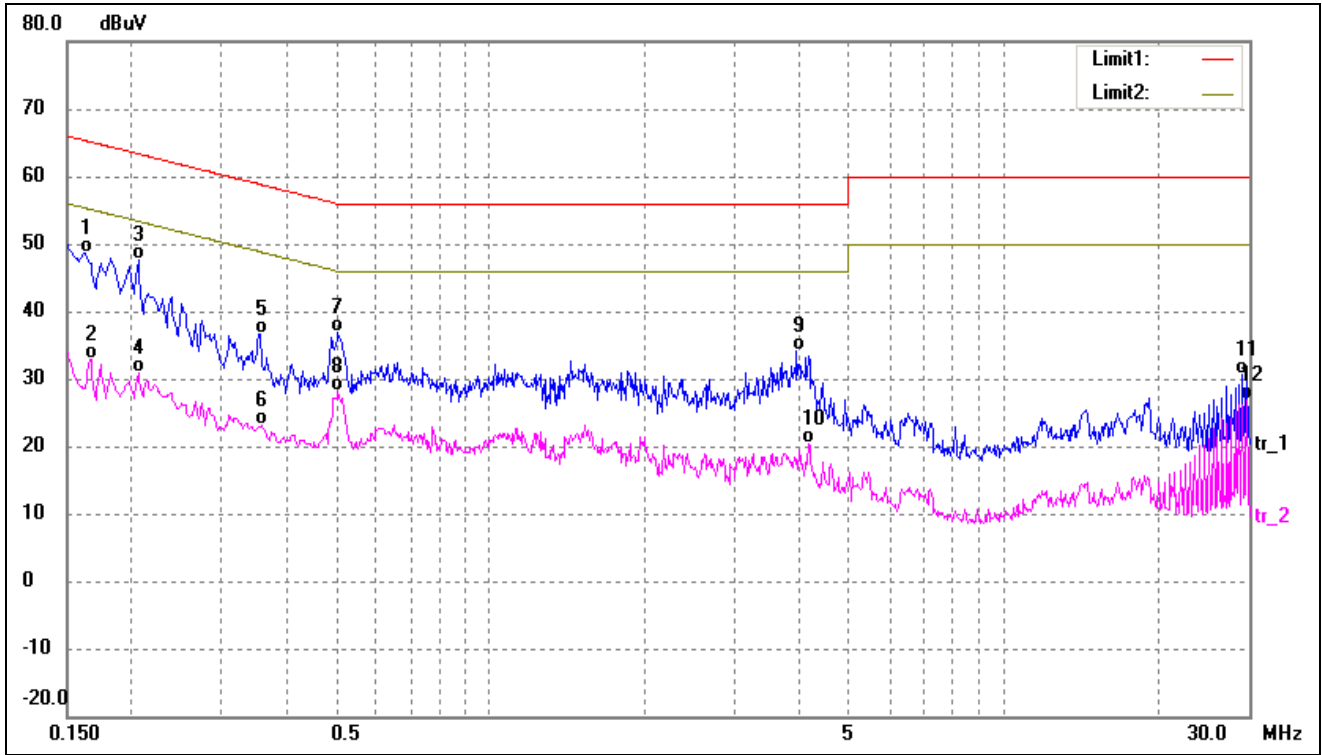
10.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1620	38.77	10.26	49.03	65.36	-16.33	QP
2	0.1620	23.71	10.26	33.97	55.36	-21.39	AVG
3	0.2500	30.74	10.26	41.00	61.75	-20.75	QP
4	0.2580	15.88	10.26	26.14	51.49	-25.35	AVG
5	0.5020	26.22	10.22	36.44	56.00	-19.56	QP
6	0.5020	17.12	10.22	27.34	46.00	-18.66	AVG
7	1.8860	23.21	10.27	33.48	56.00	-22.52	QP
8	1.8860	11.77	10.27	22.04	46.00	-23.96	AVG
9	4.1140	26.34	10.24	36.58	56.00	-19.42	QP
10	4.1140	12.29	10.24	22.53	46.00	-23.47	AVG
11	29.1820	18.40	10.71	29.11	60.00	-30.89	QP
12	29.6900	15.62	10.72	26.34	50.00	-23.66	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1620	38.40	10.26	48.66	65.36	-16.70	QP
2	0.1660	22.71	10.26	32.97	55.15	-22.18	AVG
3*	0.2060	37.35	10.27	47.62	63.36	-15.74	QP
4	0.2060	20.56	10.27	30.83	53.36	-22.53	AVG
5	0.3540	26.33	10.26	36.59	58.87	-22.28	QP
6	0.3580	12.86	10.25	23.11	48.77	-25.66	AVG
7	0.5060	26.75	10.22	36.97	56.00	-19.03	QP
8	0.5060	17.82	10.22	28.04	46.00	-17.96	AVG
9	3.9460	23.99	10.25	34.24	56.00	-21.76	QP
10	4.1740	10.24	10.24	20.48	46.00	-25.52	AVG
11	29.1820	19.83	10.71	30.54	60.00	-29.46	QP
12	29.6900	16.21	10.72	26.93	50.00	-23.07	AVG

APPENDIX SUMMARY

Project No.	WTG19X10073093W	Test Engineer	Moon
Start date	2021/05/09	Finish date	2021/05/27
Temperature	23.6°C	Humidity	47%
RF specifications	U-NII		

APPENDIX	Description of Test Item	Result
A	Power Spectral Density	Compliant
B	Emission Bandwidth and Occupied Bandwidth	Compliant
C	Maximum Conducted Output Power	Compliant
D	Frequency Stability	Compliant

APPENDIX A

Power Spectral Density					
U-NII-1:5150-5250MHz					
Operating mode	Test Channel	ANT 0 dBm/MHz	ANT 1 dBm/MHz	Total dBm/MHz	Limit (dBm/MHz)
802.11a	5180	4.195	4.987	/	11
	5200	4.920	6.018	/	11
	5240	4.399	6.334	/	11
802.11n-HT20	5180	4.224	4.448	7.348	11
	5200	4.515	5.149	7.854	11
	5240	3.857	6.061	8.108	11

Power Spectral Density							
U-NII-3: 5725-5850MHz							
Operating mode	Test Channel	ANT 0 dBm/300kHz	ANT 1 dBm/300kHz	Factor	ANT 0 dBm/500kHz*	ANT 1 dBm/500kHz*	Limit dBm/500kHz
802.11a	5745	-0.244	0.566	2.22	1.976	2.786	30
	5785	-0.365	-0.198	2.22	1.855	2.022	30
	5825	1.095	-0.064	2.22	3.315	2.156	30

*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22

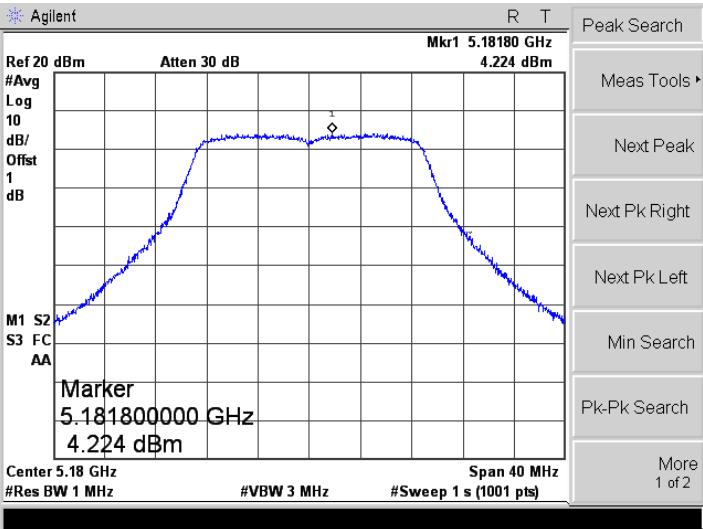
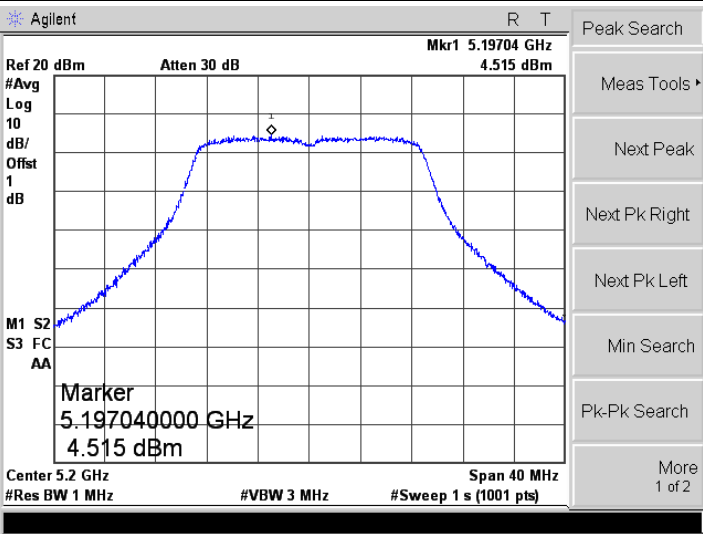
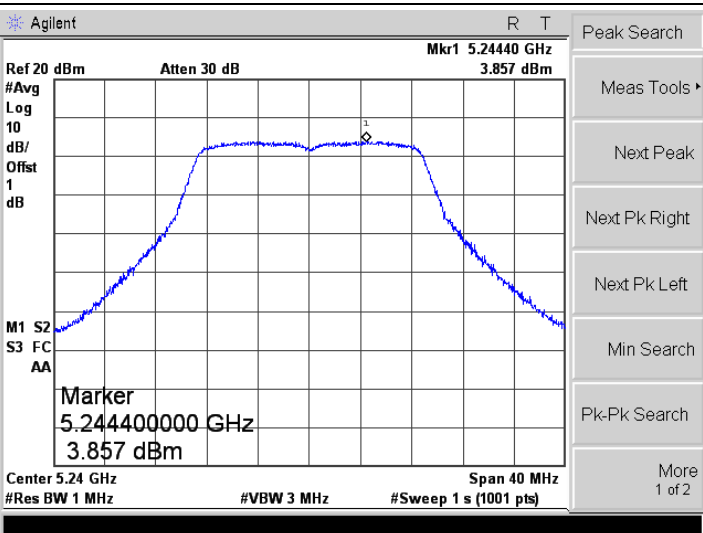
Power Spectral Density							
U-NII-3: 5725-5850MHz							
Operating mode	Test Channel	ANT 0 dBm/300kHz	ANT 1 dBm/300kHz	Factor	Total dBm/500kHz*	Limit dBm/500kHz	
802.11n-HT20	5745	3.792	0.504	2.22	7.682	30	
	5785	3.032	-0.416	2.22	6.872	30	
	5825	4.280	-0.146	2.22	7.838	30	

*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22

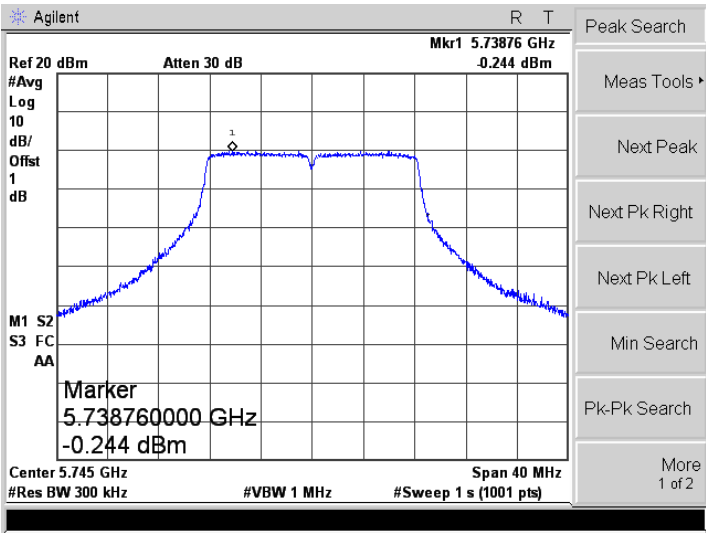
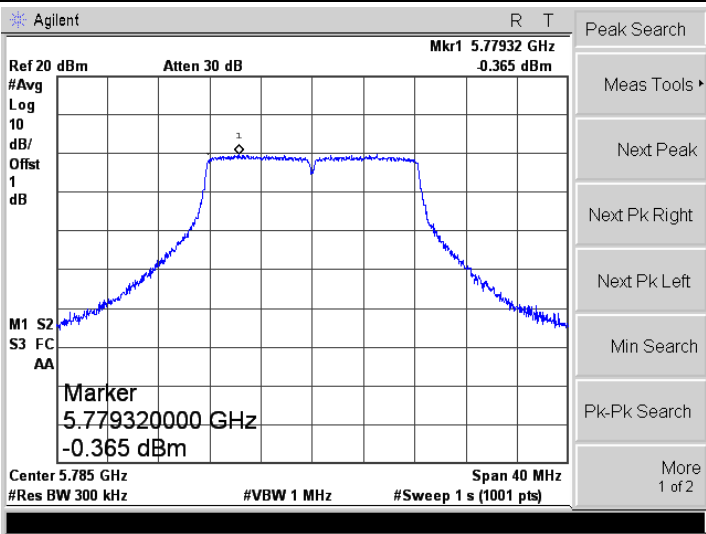
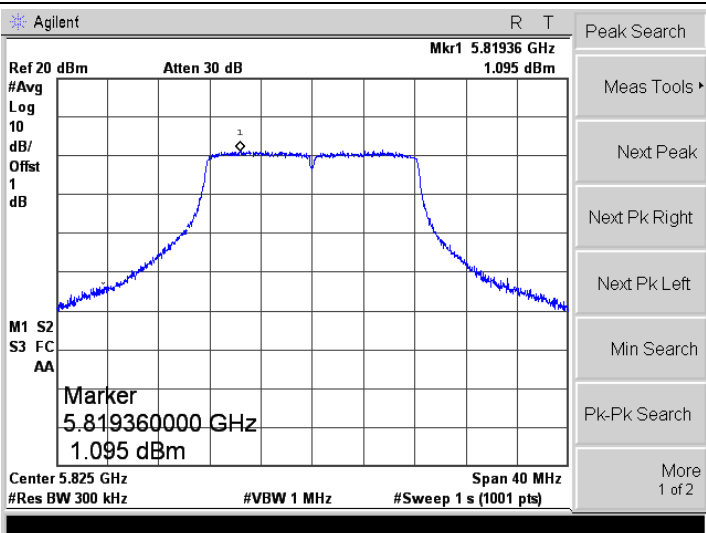
ANT 0

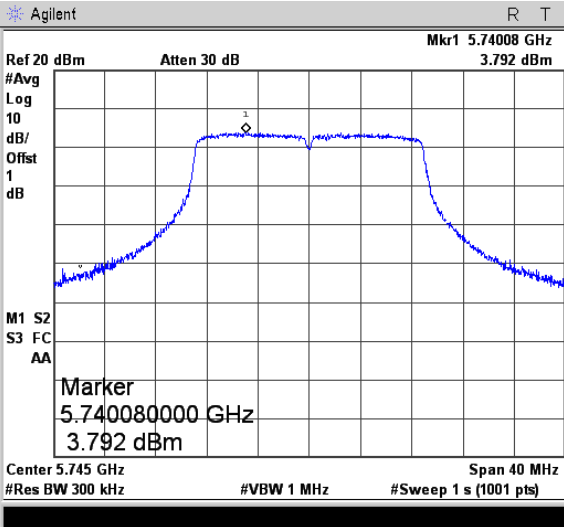
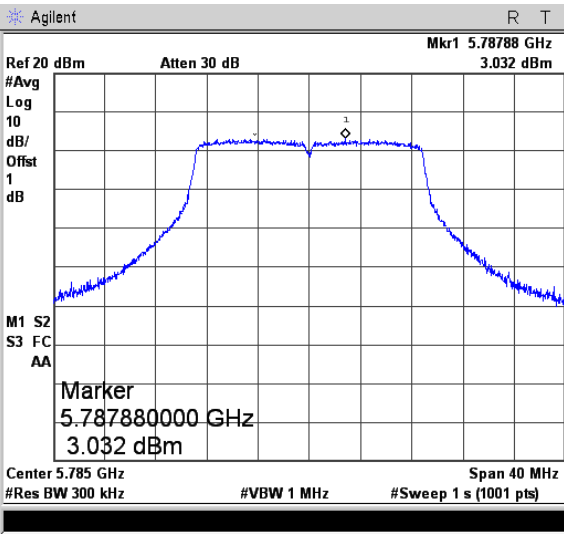
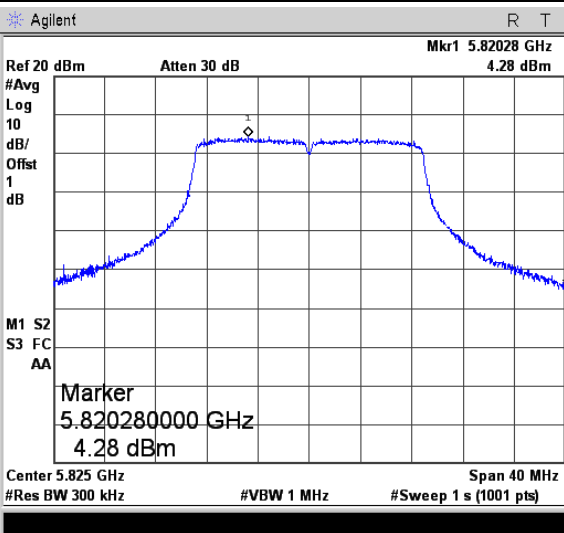
5150-5250MHz

<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.18220 GHz 4.195 dBm</p> <p>#Avg 10 Log dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.18220000 GHz 4.195 dBm</p> <p>Center 5.18 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.20260 GHz 4.92 dBm</p> <p>#Avg 10 Log dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.20260000 GHz 4.92 dBm</p> <p>Center 5.2 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.24228 GHz 4.399 dBm</p> <p>#Avg 10 Log dB/Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.24228000 GHz 4.399 dBm</p> <p>Center 5.24 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>

<p>802.11n-HT20-Low</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.18180 GHz 4.224 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.181800000 GHz 4.224 dBm Center 5.18 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.19704 GHz 4.515 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.197040000 GHz 4.515 dBm Center 5.2 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.24440 GHz 3.857 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.244400000 GHz 3.857 dBm Center 5.24 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>

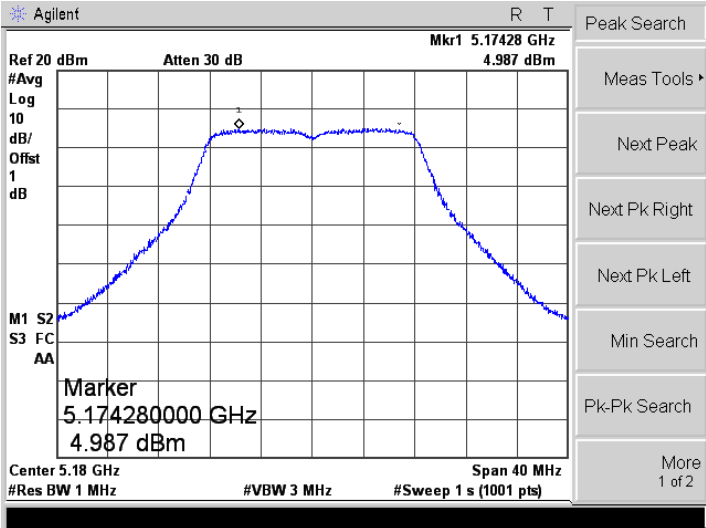
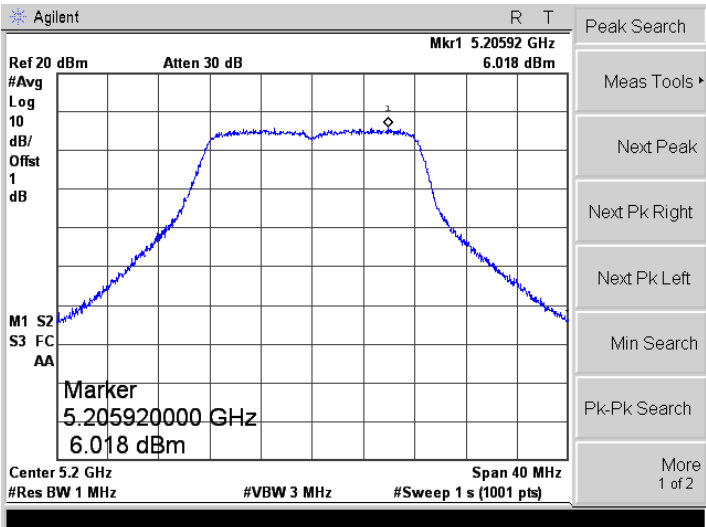
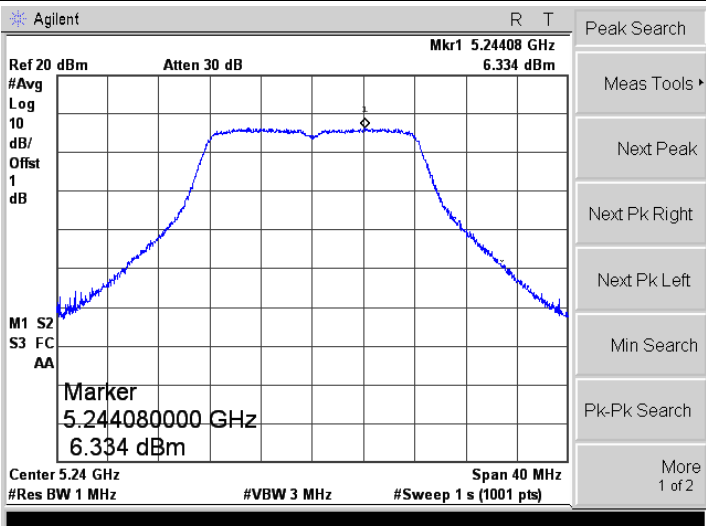
5725-5850MHz

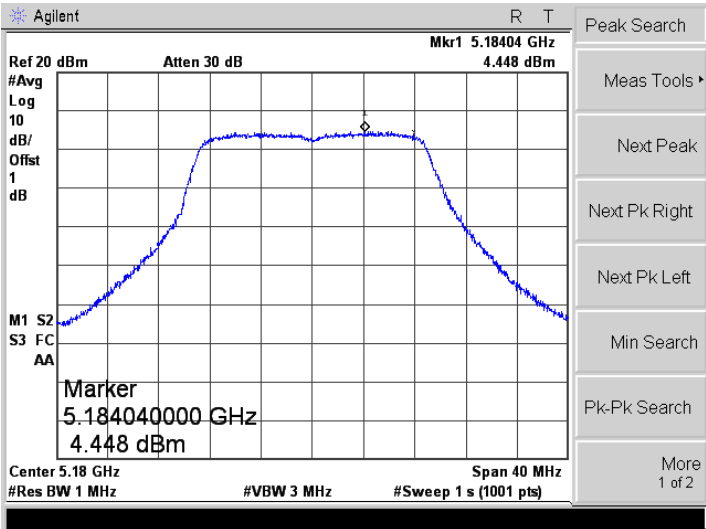
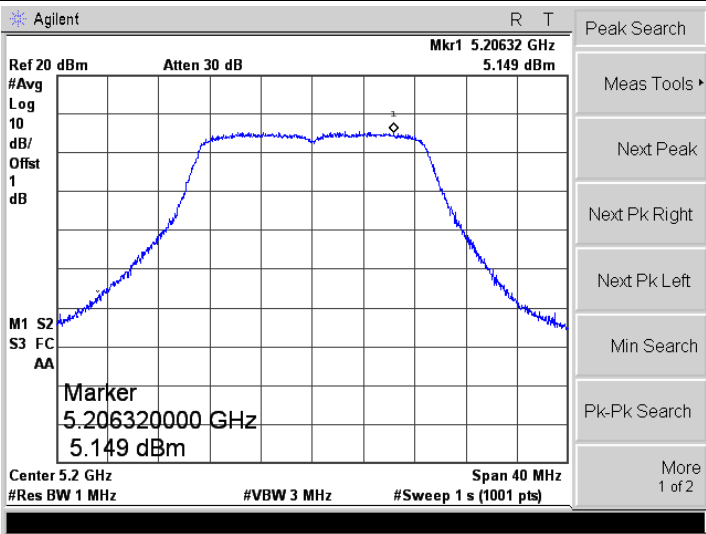
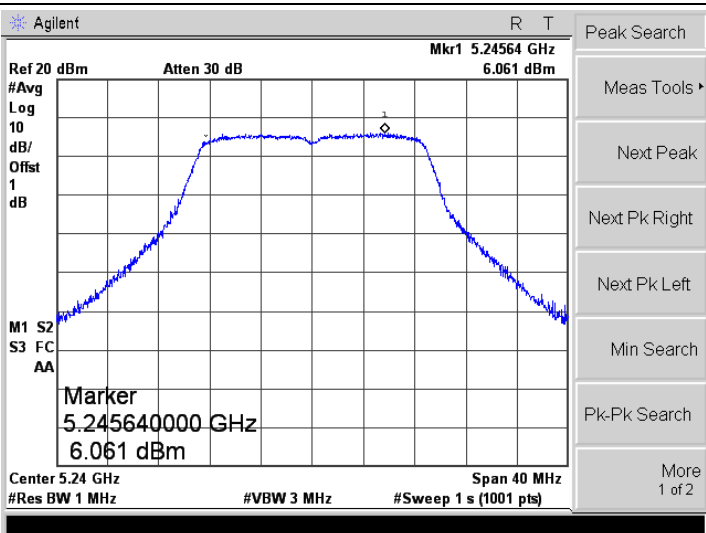
<p>802.11a-Low</p>	 <p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.73876 GHz -0.244 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.738760000 GHz -0.244 dBm</p> <p>Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11a-Middle</p>	 <p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.77932 GHz -0.365 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.779320000 GHz -0.365 dBm</p> <p>Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>
<p>802.11a-High</p>	 <p>Agilent R T</p> <p>Ref 20 dBm Atten 30 dB Mkr1 5.81936 GHz 1.095 dBm</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>M1 S2 S3 FC AA</p> <p>Marker 5.819360000 GHz 1.095 dBm</p> <p>Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p> <p>Peak Search Meas Tools ▶ Next Peak Next Pk Right Next Pk Left Min Search Pk-Pk Search More 1 of 2</p>

<p>802.11n-HT20-Low</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.74008 GHz 3.792 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.740080000 GHz 3.792 dBm Center 5.745 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.78788 GHz 3.032 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.787880000 GHz 3.032 dBm Center 5.785 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.82028 GHz 4.28 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.820280000 GHz 4.28 dBm Center 5.825 GHz Span 40 MHz #Res BW 300 kHz #VBW 1 MHz #Sweep 1 s (1001 pts)</p>

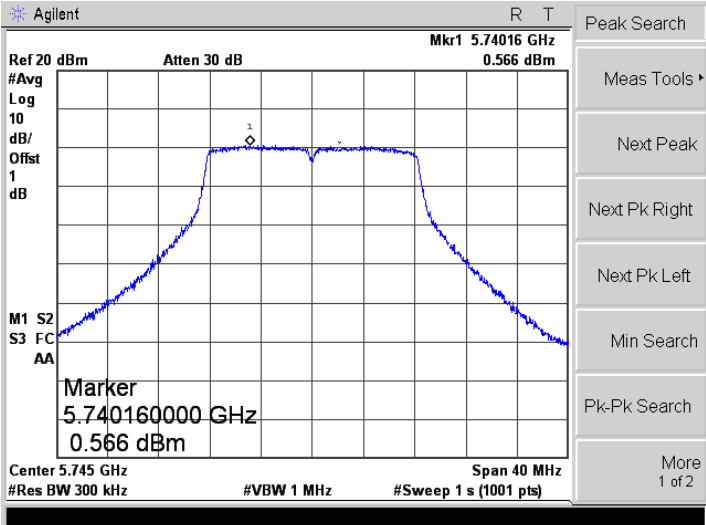
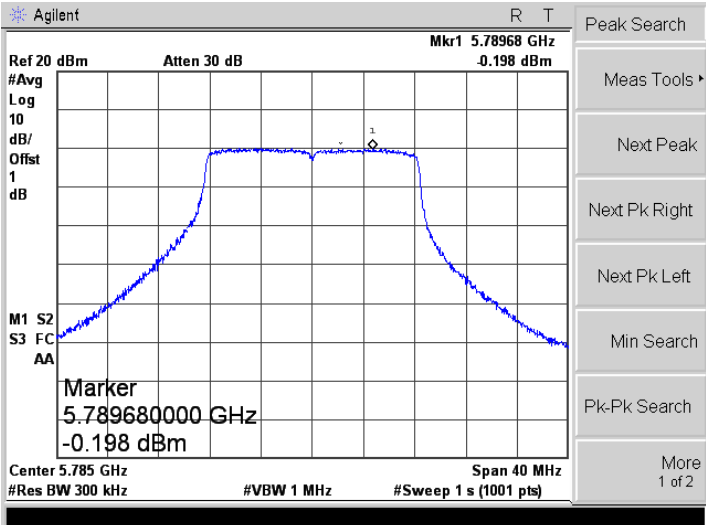
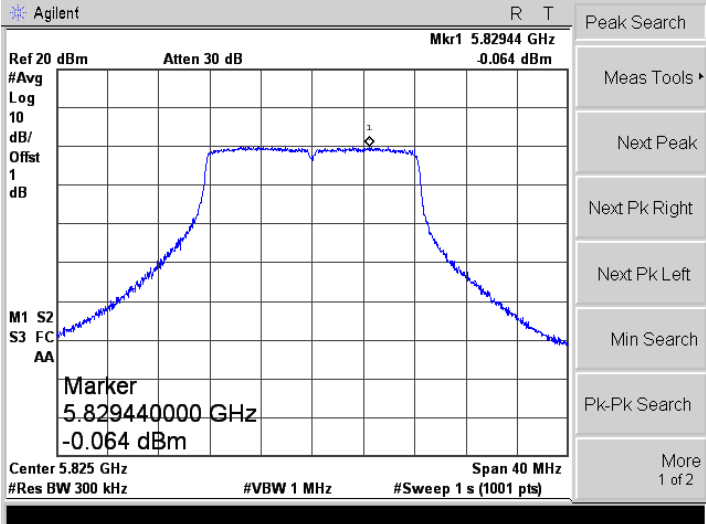
ANT 1

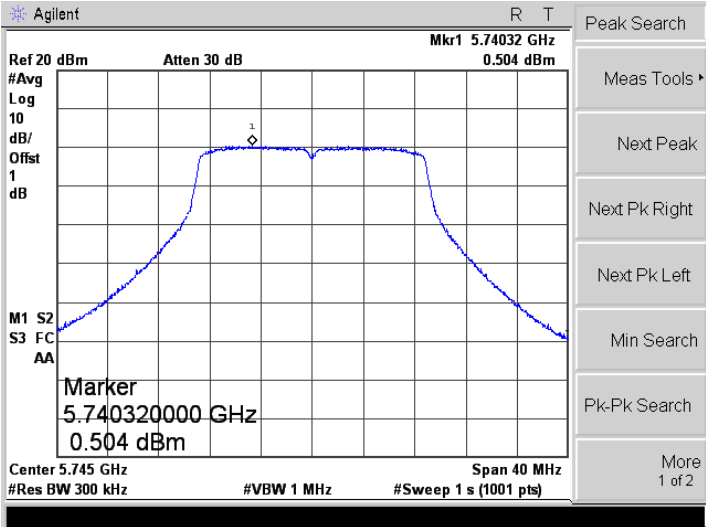
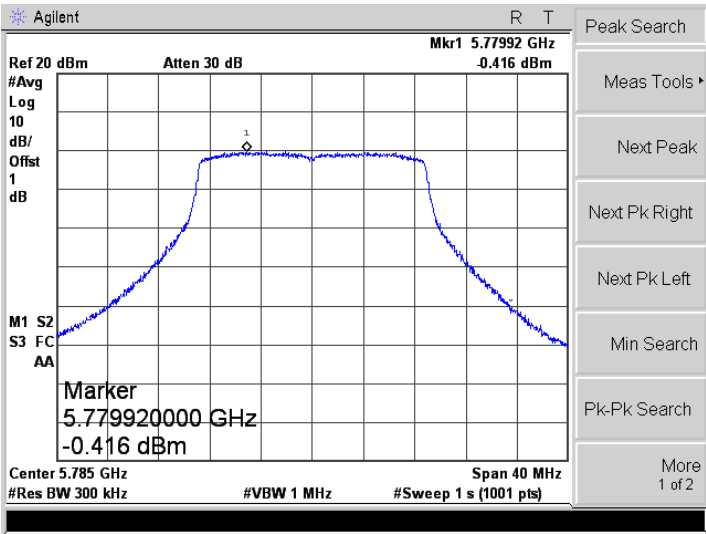
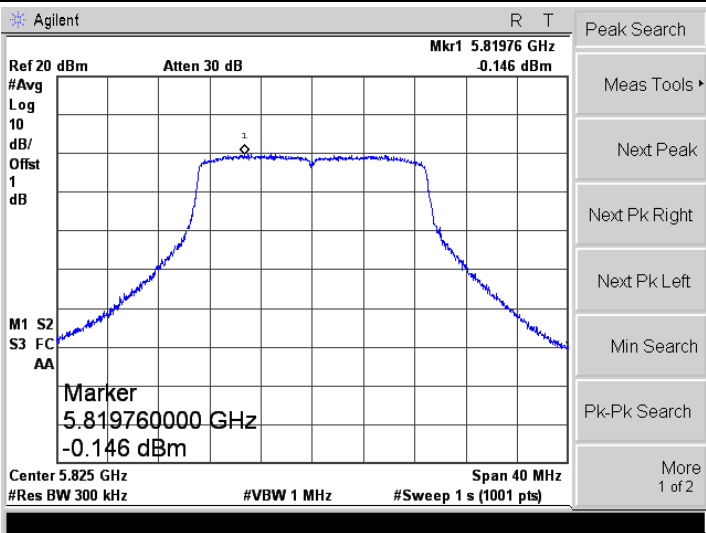
5150-5250MHz

<p>802.11a-Low</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.17428 GHz 4.987 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.174280000 GHz 4.987 dBm Center 5.18 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11a-Middle</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.20592 GHz 6.018 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.205920000 GHz 6.018 dBm Center 5.2 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11a-High</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.24408 GHz 6.334 dBm #Avg 10 Log dB/ Offst 1 dB M1 S2 S3 FC AA Marker 5.244080000 GHz 6.334 dBm Center 5.24 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>

<p>802.11n-HT20-Low</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.18404 GHz #Avg 10 Log dB/Offst 1 dB M1 S2 S3 FC AA Marker 5.184040000 GHz 4.448 dBm Center 5.18 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.20632 GHz #Avg 10 Log dB/Offst 1 dB M1 S2 S3 FC AA Marker 5.206320000 GHz 5.149 dBm Center 5.2 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.24564 GHz #Avg 10 Log dB/Offst 1 dB M1 S2 S3 FC AA Marker 5.245640000 GHz 6.061 dBm Center 5.24 GHz Span 40 MHz #Res BW 1 MHz #VBW 3 MHz #Sweep 1 s (1001 pts)</p>

5725-5850MHz

<p>802.11a-Low</p>	
<p>802.11a-Middle</p>	
<p>802.11a-High</p>	

<p>802.11n-HT20-Low</p>	
<p>802.11n-HT20-Middle</p>	
<p>802.11n-HT20-High</p>	

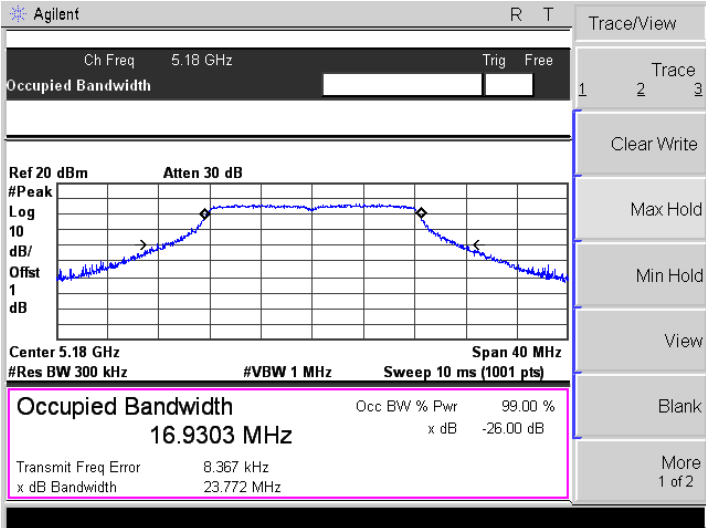
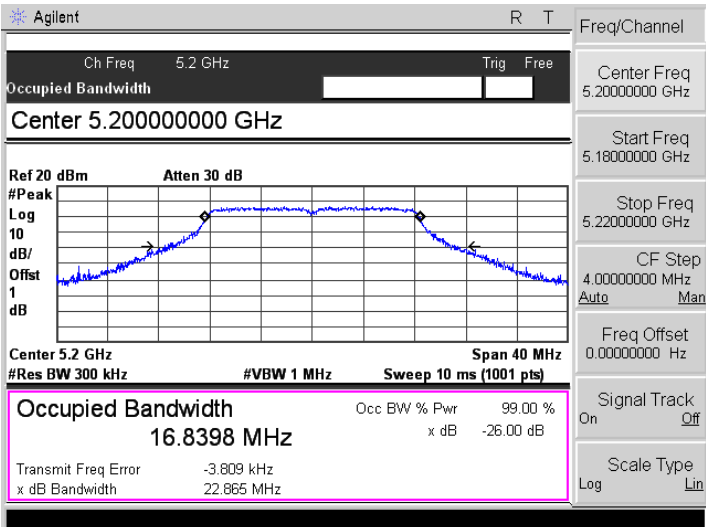
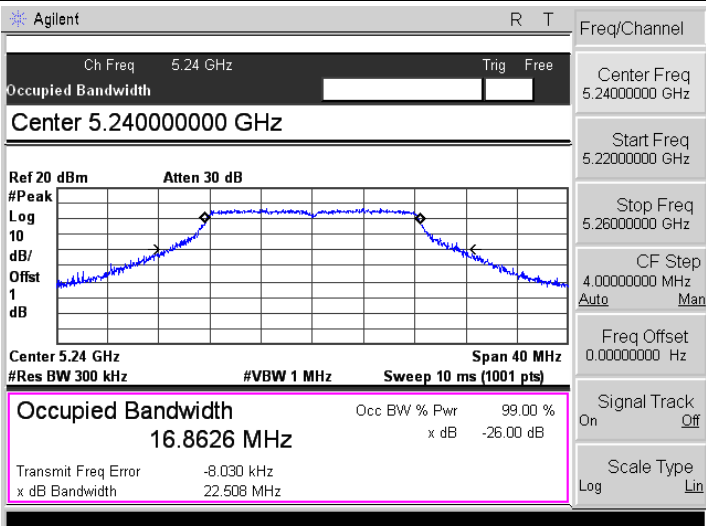
APPENDIX B**Emission Bandwidth and Occupied Bandwidth**

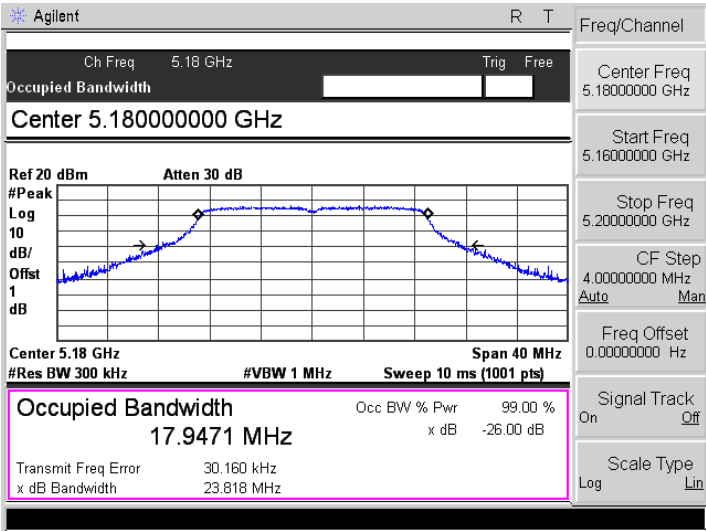
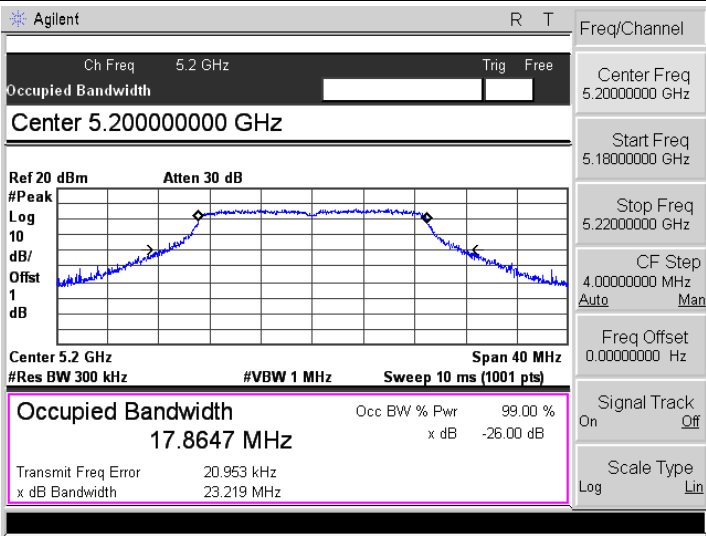
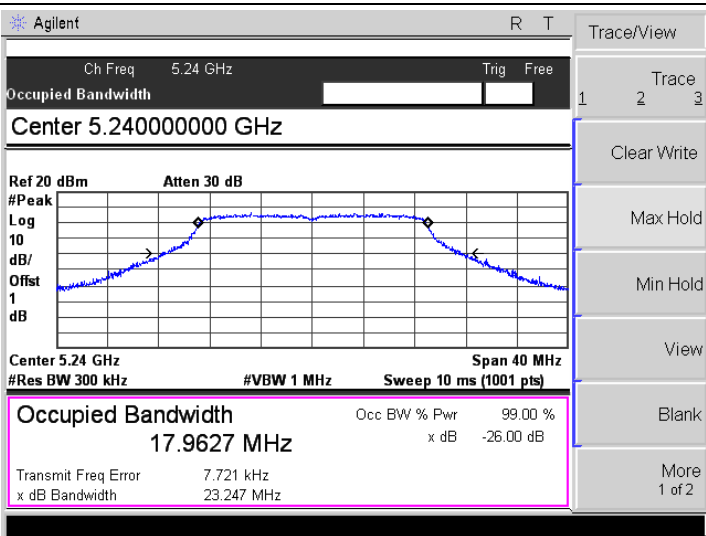
U-NII-1:5150-5250MHz						
Test Mode	Test Channel MHz	ANT 0		ANT 1		Result
		26 dB Bandwidth MHz	99% Bandwidth MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5180	23.772	16.930	23.605	16.913	Pass
	5200	22.865	16.840	22.933	16.836	Pass
	5240	22.508	16.863	23.045	16.909	Pass
802.11n-HT20	5180	23.818	17.947	24.210	17.960	Pass
	5200	23.219	17.865	23.235	17.907	Pass
	5240	23.247	17.963	24.049	17.986	Pass

U-NII-3: 5725-5850MHz						
Test Mode	Test Channel MHz	ANT 0		ANT 1		Limit kHz
		6 dB Bandwidth MHz	99% Bandwidth MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	
802.11a	5745	16.505	17.293	16.534	16.875	≥ 500
	5785	16.474	17.087	16.459	16.870	≥ 500
	5825	16.550	17.274	16.521	16.832	≥ 500
802.11n-HT20	5745	17.643	18.209	17.701	18.030	≥ 500
	5785	17.706	18.086	17.650	17.889	≥ 500
	5825	17.720	18.183	17.632	17.907	≥ 500

ANT 0

5150-5250MHz

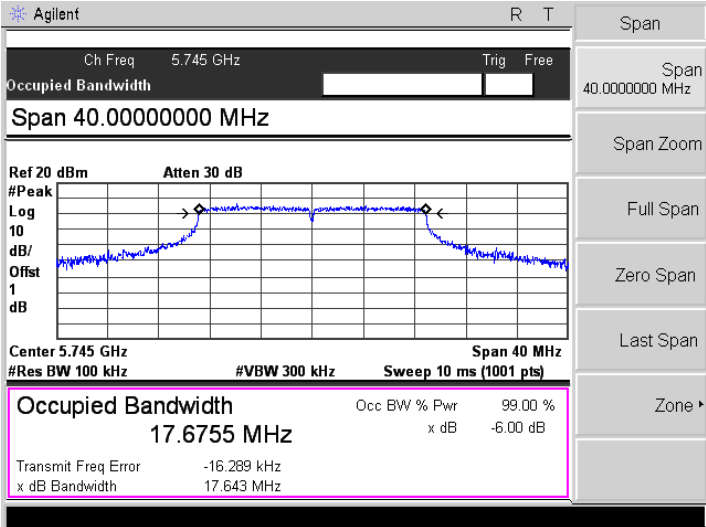
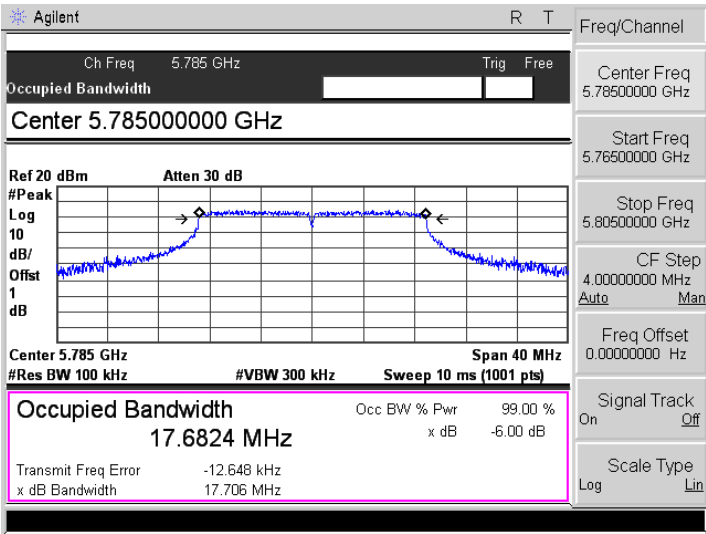
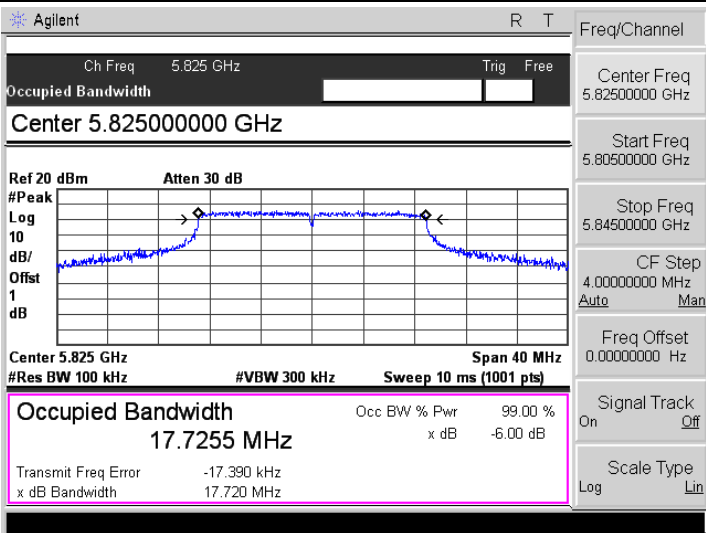
<p>802.11a-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.9303 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 8.367 kHz x dB Bandwidth 23.772 MHz</p> <p>Trace/View: Trace 1 2 3, Clear Write, Max Hold, Min Hold, View, Blank, More 1 of 2</p>
<p>802.11a-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.8398 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -3.809 kHz x dB Bandwidth 22.865 MHz</p> <p>Freq/Channel: Center Freq 5.20000000 GHz, Start Freq 5.18000000 GHz, Stop Freq 5.22000000 GHz, CF Step 4.00000000 MHz (Auto/Man), Freq Offset 0.00000000 Hz, Signal Track On/Off, Scale Type Log/Lin</p>
<p>802.11a-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.8626 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -8.030 kHz x dB Bandwidth 22.508 MHz</p> <p>Freq/Channel: Center Freq 5.24000000 GHz, Start Freq 5.22000000 GHz, Stop Freq 5.26000000 GHz, CF Step 4.00000000 MHz (Auto/Man), Freq Offset 0.00000000 Hz, Signal Track On/Off, Scale Type Log/Lin</p>

<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.18000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst</p> <p>1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.9471 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 30.160 kHz</p> <p>x dB Bandwidth 23.818 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst</p> <p>1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.8647 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 20.953 kHz</p> <p>x dB Bandwidth 23.219 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst</p> <p>1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.9627 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 7.721 kHz</p> <p>x dB Bandwidth 23.247 MHz</p> <p>Trace/View</p> <p>1 Trace 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

5725-5850MHz

6 dB Bandwidth

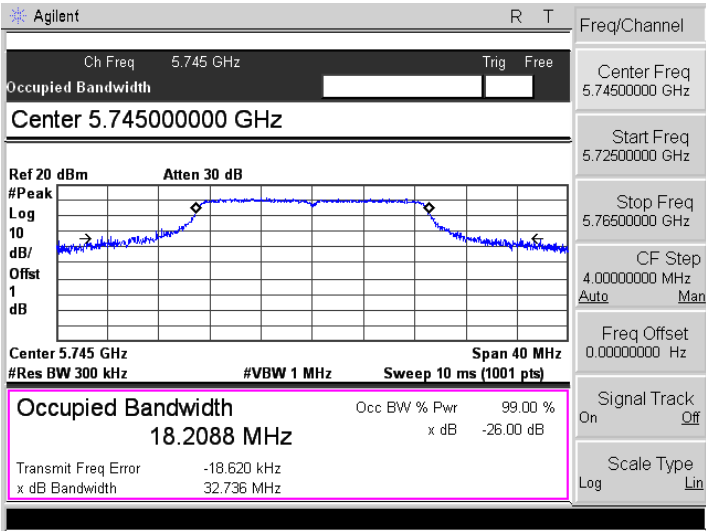
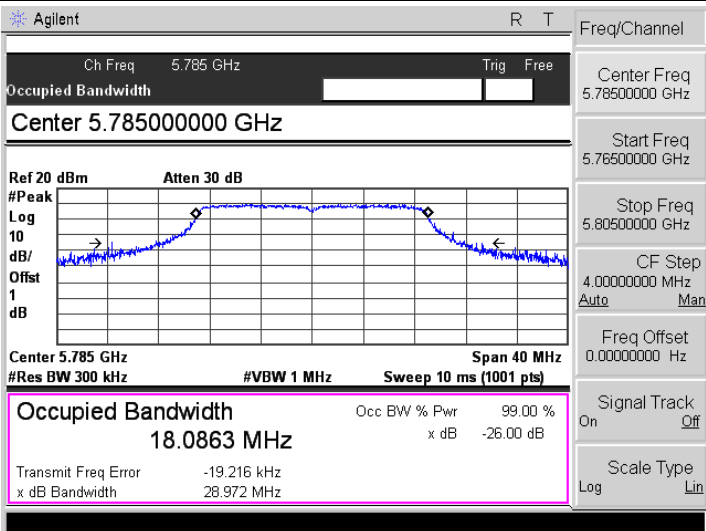
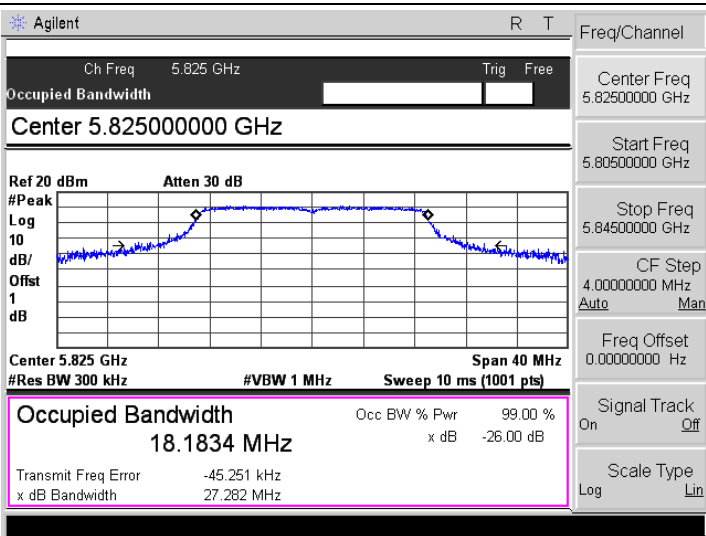
<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.5013 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -17.126 kHz x dB Bandwidth 16.505 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.4930 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -13.223 kHz x dB Bandwidth 16.474 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.5323 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -21.629 kHz x dB Bandwidth 16.550 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Span 40.00000000 MHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6755 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -16.289 kHz x dB Bandwidth 17.643 MHz</p> <p>Span 40.00000000 MHz</p> <p>Span Zoom</p> <p>Full Span</p> <p>Zero Span</p> <p>Last Span</p> <p>Zone ▶</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.785000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6824 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -12.648 kHz x dB Bandwidth 17.706 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.78500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.825000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/</p> <p>Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.7255 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -17.390 kHz x dB Bandwidth 17.720 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.82500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

5725-5850MHz

99% Bandwidth

<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 17.2927 MHz x dB -26.00 dB</p> <p>Transmit Freq Error -37.561 kHz x dB Bandwidth 29.007 MHz</p> <p>Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 17.0869 MHz x dB -26.00 dB</p> <p>Transmit Freq Error -43.388 kHz x dB Bandwidth 24.815 MHz</p> <p>Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 17.2743 MHz x dB -26.00 dB</p> <p>Transmit Freq Error -38.299 kHz x dB Bandwidth 31.816 MHz</p> <p>Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>

<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst</p> <p>1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 18.2088 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -18.620 kHz x dB Bandwidth 32.736 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst</p> <p>1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 18.0863 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -19.216 kHz x dB Bandwidth 28.972 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst</p> <p>1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 18.1834 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -45.251 kHz x dB Bandwidth 27.282 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

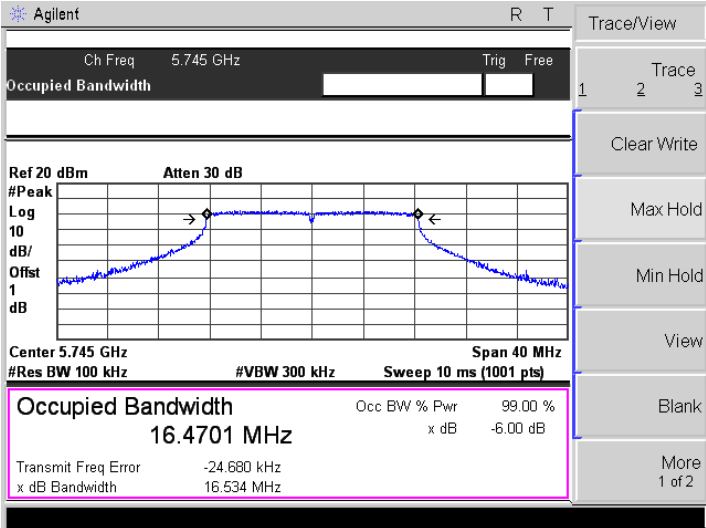
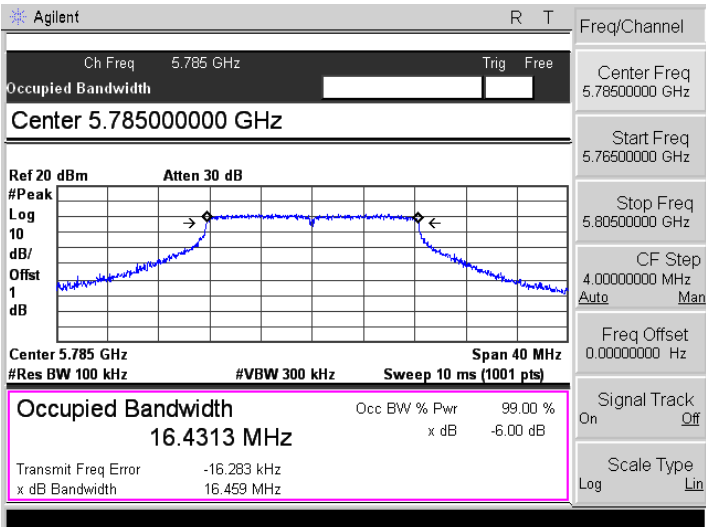
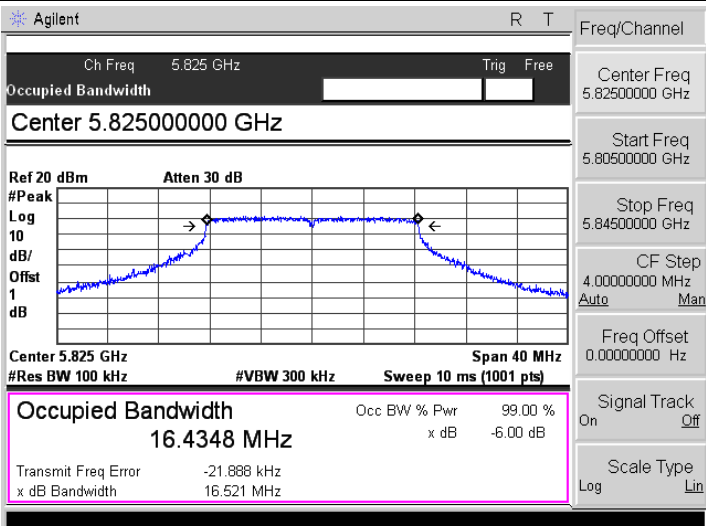
ANT 1

5150-5250MHz

<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.9134 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 28.731 kHz x dB Bandwidth 23.605 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.8361 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 17.807 kHz x dB Bandwidth 22.933 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.9094 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 7.124 kHz x dB Bandwidth 23.045 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT20-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.18000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst</p> <p>1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.9598 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 27.397 kHz x dB Bandwidth 24.210 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst</p> <p>1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.9071 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 40.127 kHz x dB Bandwidth 23.235 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log</p> <p>10 dB/</p> <p>Offst</p> <p>1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.9859 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error 23.966 kHz x dB Bandwidth 24.049 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

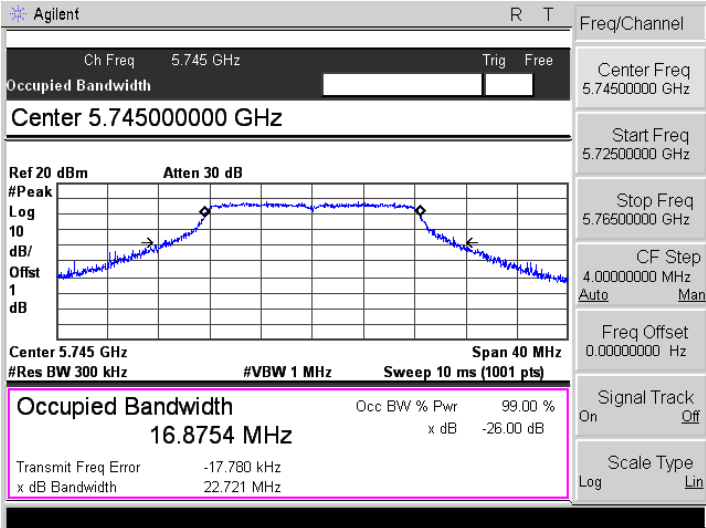
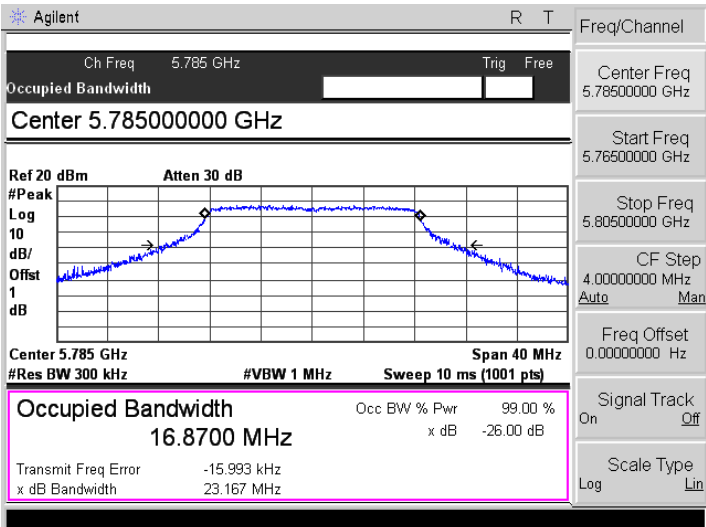
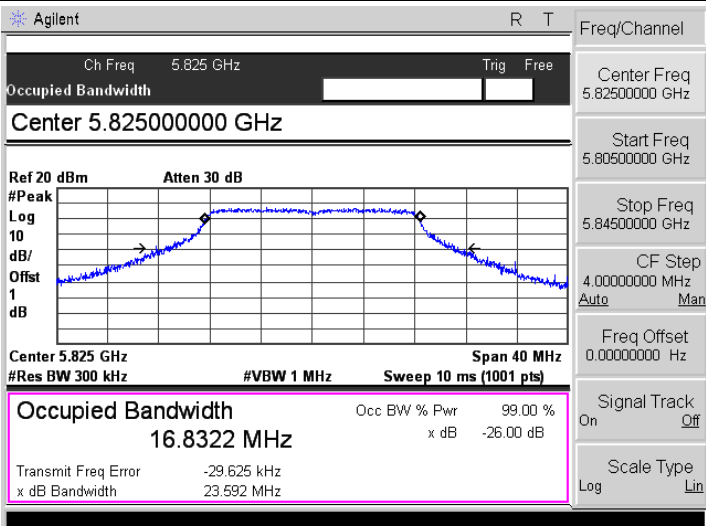
5725-5850MHz
6 dB Bandwidth

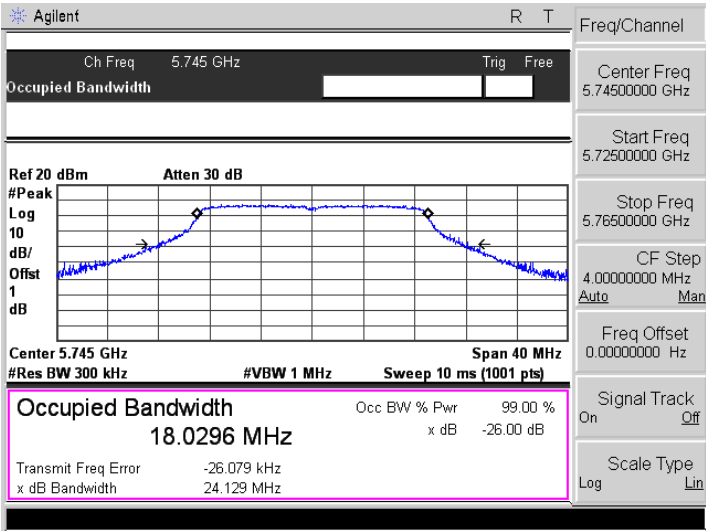
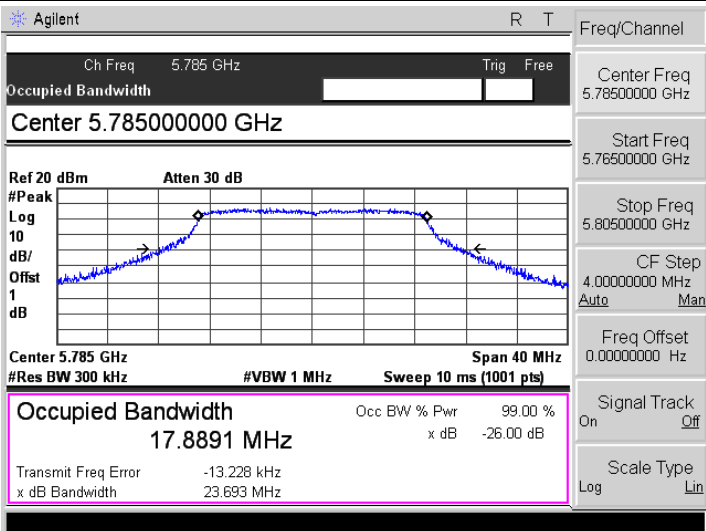
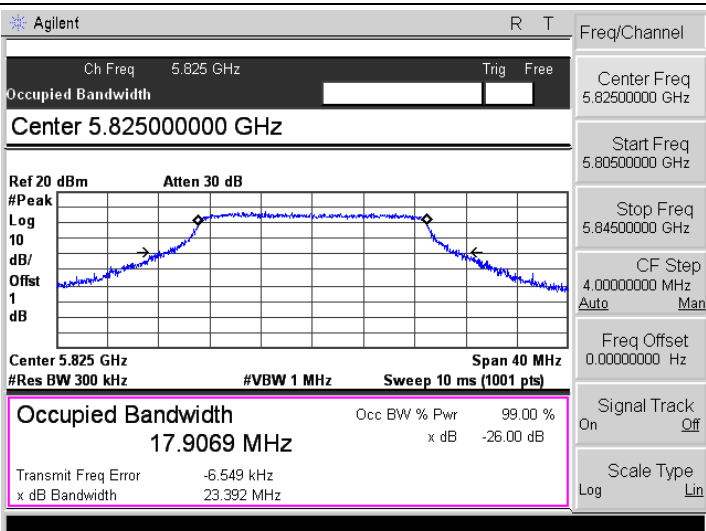
<p>802.11a-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 16.4701 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -24.680 kHz x dB Bandwidth 16.534 MHz</p> <p>Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2</p>
<p>802.11a-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 16.4313 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -16.283 kHz x dB Bandwidth 16.459 MHz</p> <p>Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>
<p>802.11a-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth Occ BW % Pwr 99.00 % 16.4348 MHz x dB -6.00 dB</p> <p>Transmit Freq Error -21.888 kHz x dB Bandwidth 16.521 MHz</p> <p>Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin</p>

<p>802.11n-HT20-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6216 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -15.917 kHz x dB Bandwidth 17.701 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6078 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -8.147 kHz x dB Bandwidth 17.650 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak</p> <p>Log 10 dB/ Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.6092 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -16.892 kHz x dB Bandwidth 17.632 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

5725-5850MHz

99% Bandwidth

<p>802.11a-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.8754 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -17.780 kHz x dB Bandwidth 22.721 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.8700 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -15.993 kHz x dB Bandwidth 23.167 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Peak Log 10 dB/Offset 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 16.8322 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -29.625 kHz x dB Bandwidth 23.592 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 18.0296 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -26.079 kHz x dB Bandwidth 24.129 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.78500000 GHz</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.8891 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -13.228 kHz x dB Bandwidth 23.693 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Center 5.82500000 GHz</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 300 kHz #VBW 1 MHz Sweep 10 ms (1001 pts)</p> <p>Occupied Bandwidth 17.9069 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -26.00 dB</p> <p>Transmit Freq Error -6.549 kHz x dB Bandwidth 23.392 MHz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

APPENDIX C

Maximum Conducted Output Power

U-NII-1:5150-5250MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT 0	ANT 1		
802.11a	5180	15.01	14.43	/	23.98
	5200	15.43	15.09	/	23.98
	5240	15.11	15.65	/	23.98
802.11n-HT20	5180	14.96	14.46	17.73	23.98
	5200	15.15	14.81	17.99	23.98
	5240	14.71	15.86	18.33	23.98

U-NII-3: 5725-5850MHz					
Test mode	Frequency MHz	Output Power dBm		Total dBm	Limit dBm
		ANT 0	ANT 1		
802.11a	5745	14.35	14.86	/	5745
	5785	14.66	14.69	/	5785
	5825	15.24	14.38	/	5825
802.11n-HT20	5745	14.55	15.05	17.82	5745
	5785	13.79	14.79	17.33	5785
	5825	15.59	14.58	18.12	5825

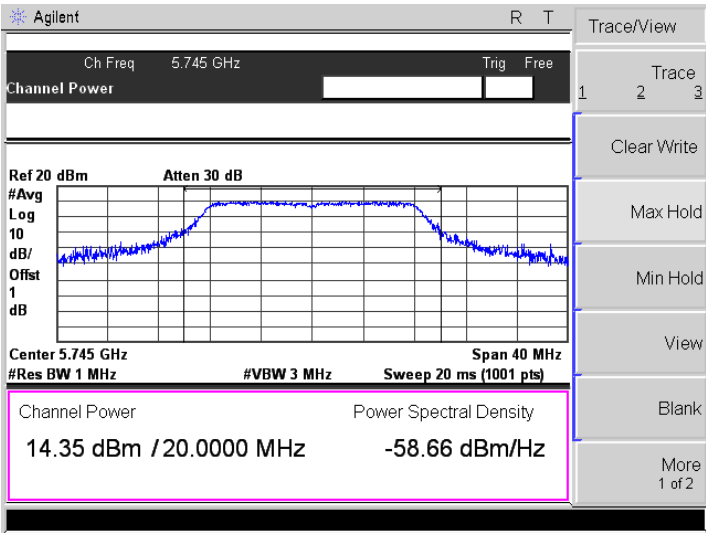
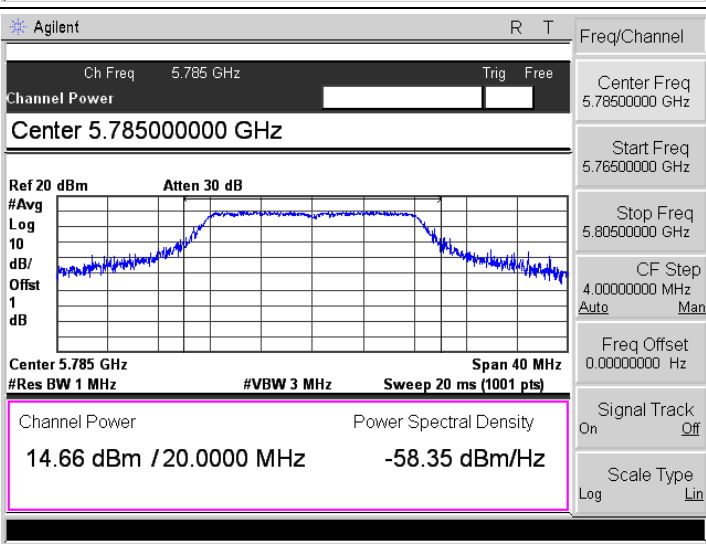
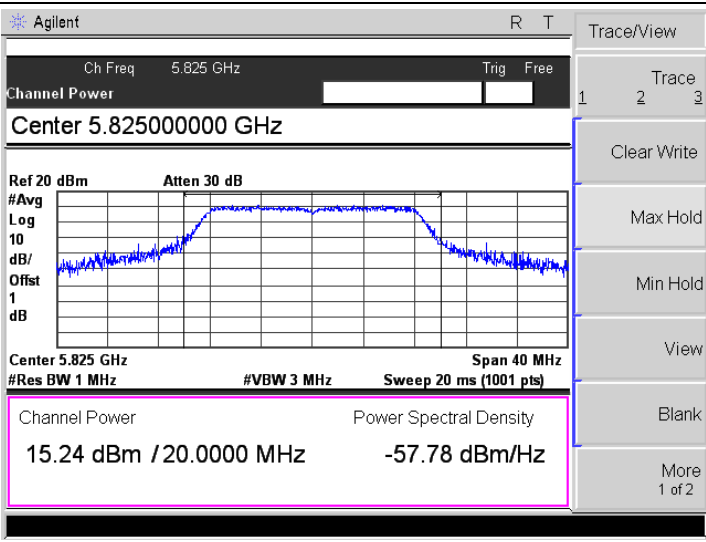
ANT 0

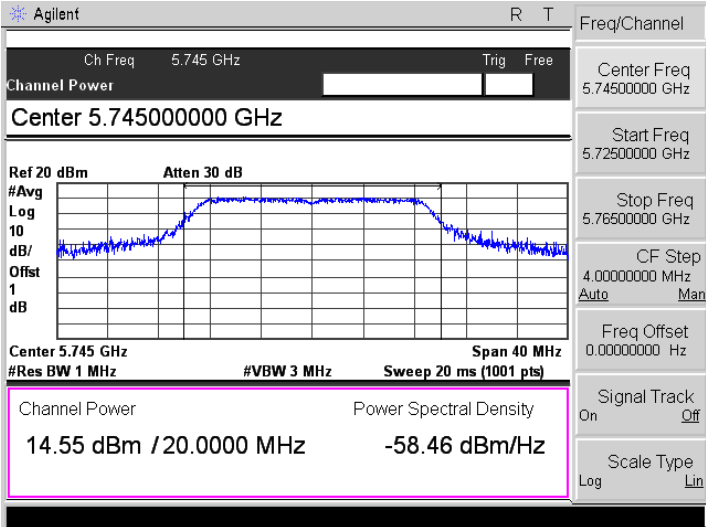
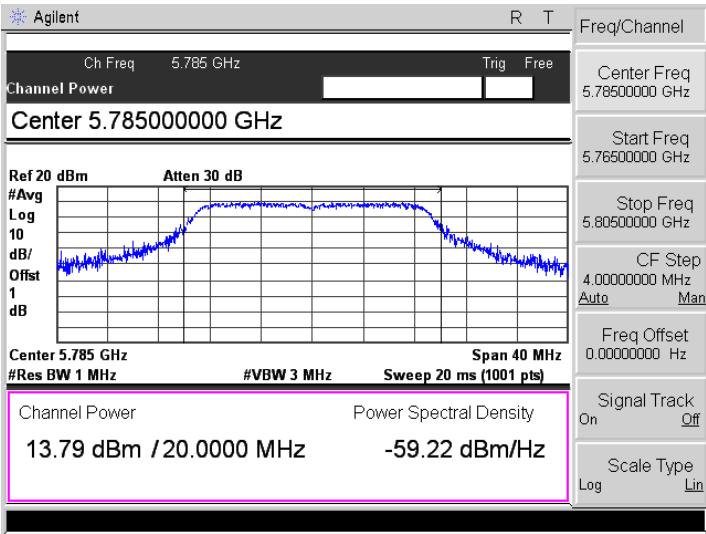
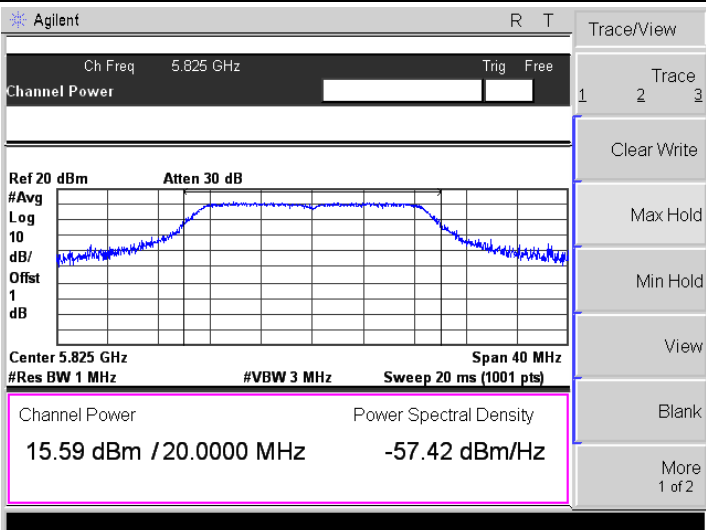
5150-5250MHz

<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.01 dBm / 20.0000 MHz -57.63 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.43 dBm / 20.0000 MHz -57.58 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.11 dBm / 20.0000 MHz -57.90 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT20-Low</p>	<p>Agilent Channel Power</p> <p>Ch Freq 5.18 GHz</p> <p>Center 5.18 GHz</p> <p>Channel Power: 14.96 dBm / 20.0000 MHz</p> <p>Power Spectral Density: -58.05 dBm/Hz</p>
<p>802.11n-HT20-Middle</p>	<p>Agilent Channel Power</p> <p>Ch Freq 5.2 GHz</p> <p>Center 5.20000000 GHz</p> <p>Channel Power: 15.15 dBm / 20.0000 MHz</p> <p>Power Spectral Density: -57.23 dBm/Hz</p>
<p>802.11n-HT20-High</p>	<p>Agilent Channel Power</p> <p>Ch Freq 5.24 GHz</p> <p>Center 5.24000000 GHz</p> <p>Channel Power: 14.71 dBm / 20.0000 MHz</p> <p>Power Spectral Density: -58.30 dBm/Hz</p>

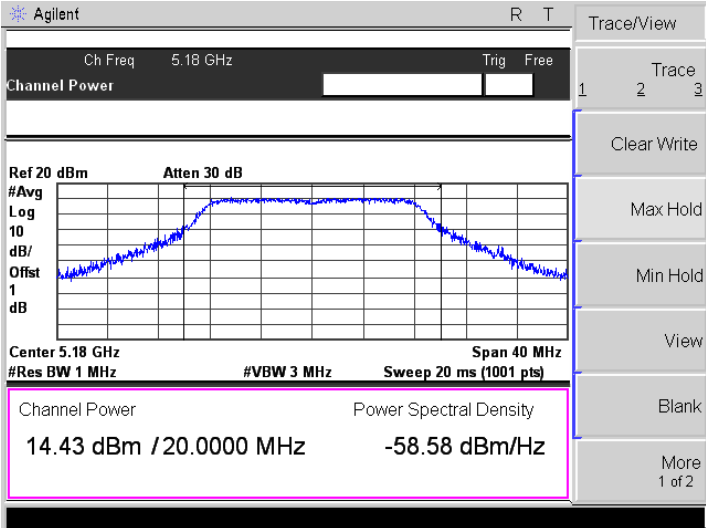
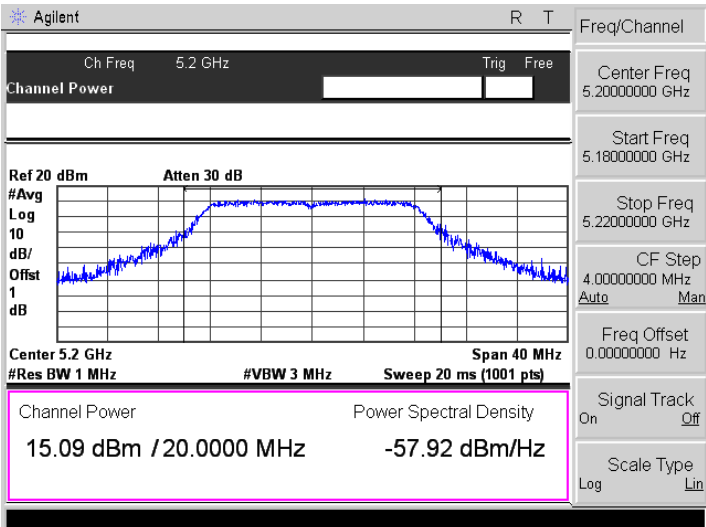
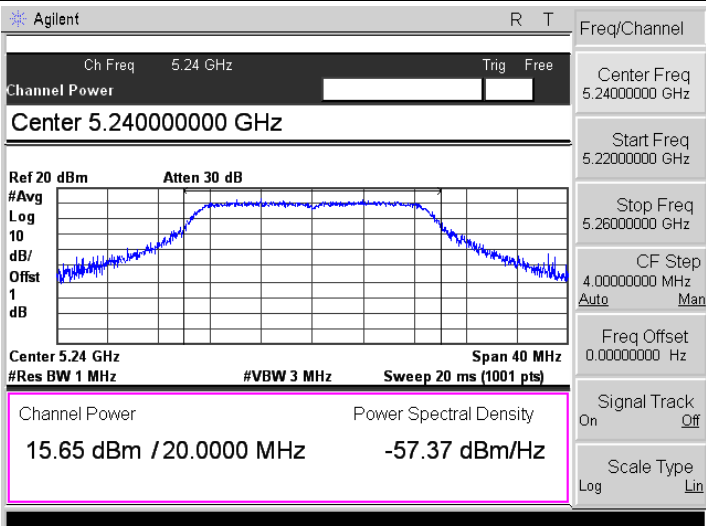
5725-5850MHz

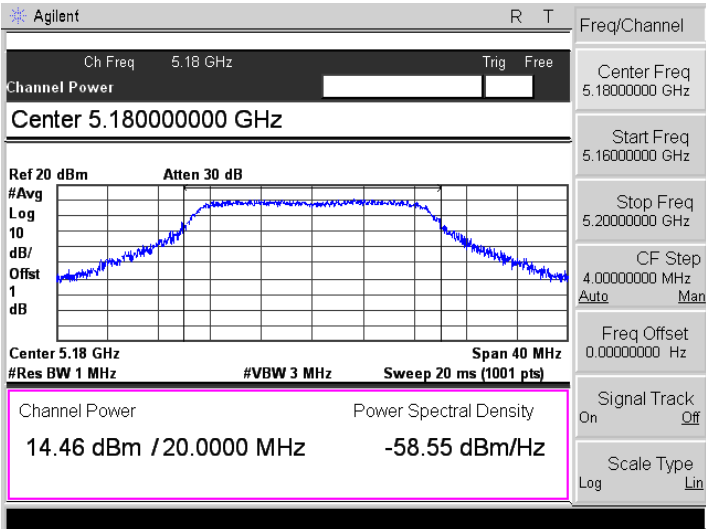
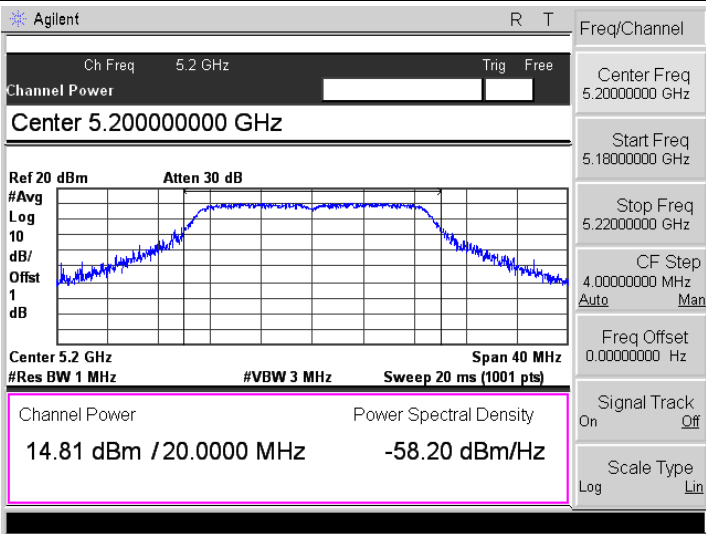
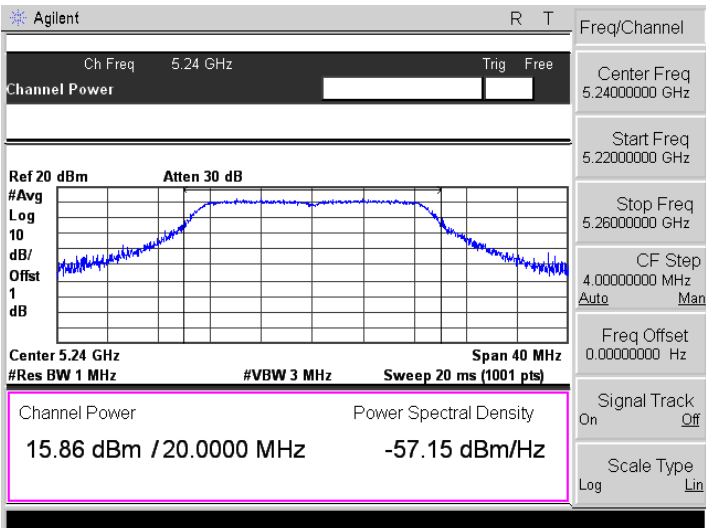
<p>802.11a-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.35 dBm / 20.0000 MHz -58.66 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11a-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.66 dBm / 20.0000 MHz -58.35 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 GHz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.24 dBm / 20.0000 MHz -57.78 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.55 dBm / 20.0000 MHz -58.46 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>13.79 dBm / 20.0000 MHz -59.22 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.825 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.59 dBm / 20.0000 MHz -57.42 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>

ANT 1

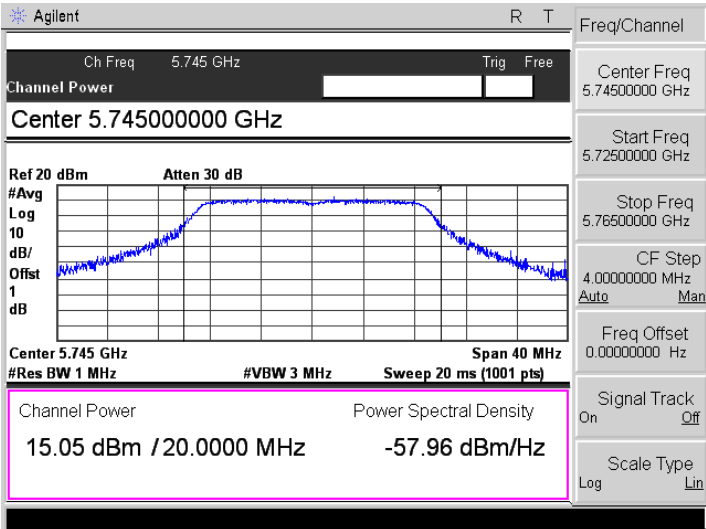
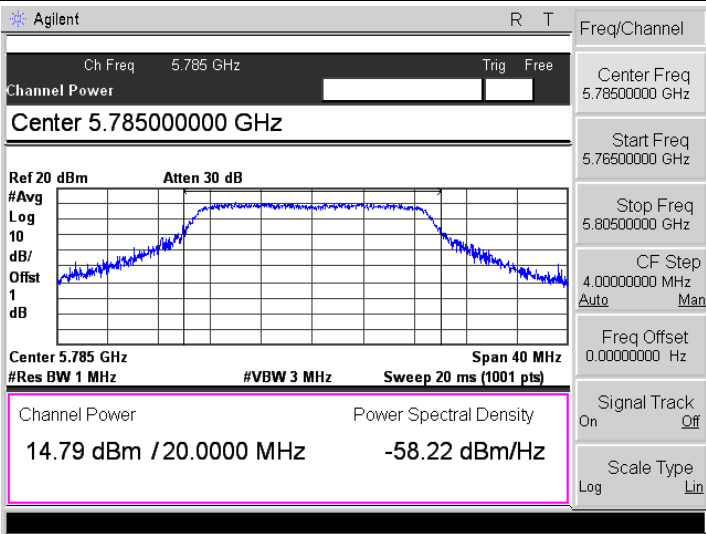
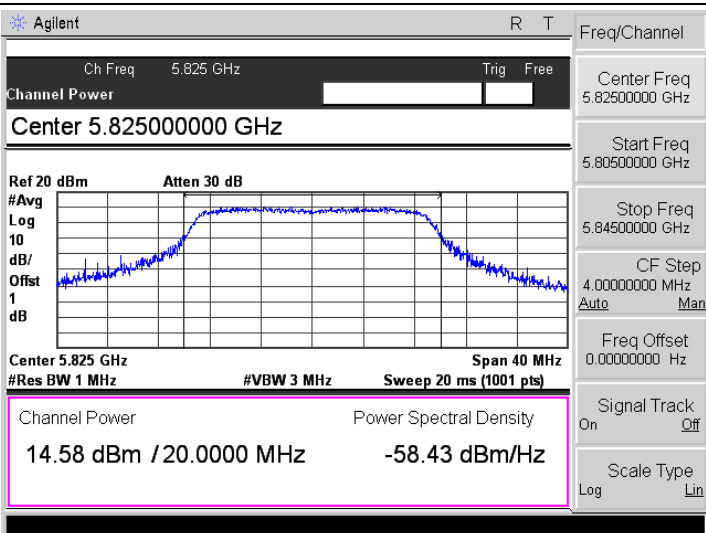
5150-5250MHz

<p>802.11a-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.43 dBm / 20.0000 MHz -58.58 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11a-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.09 dBm / 20.0000 MHz -57.92 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.2000000 GHz</p> <p>Start Freq 5.1800000 GHz</p> <p>Stop Freq 5.2200000 GHz</p> <p>CF Step 4.0000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.65 dBm / 20.0000 MHz -57.37 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.2400000 GHz</p> <p>Start Freq 5.2200000 GHz</p> <p>Stop Freq 5.2600000 GHz</p> <p>CF Step 4.0000000 MHz Auto Man</p> <p>Freq Offset 0.0000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.18 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.18000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.18 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.46 dBm / 20.0000 MHz -58.55 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.18000000 GHz</p> <p>Start Freq 5.16000000 GHz</p> <p>Stop Freq 5.20000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.2 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.20000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.2 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.81 dBm / 20.0000 MHz -58.20 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.20000000 GHz</p> <p>Start Freq 5.18000000 GHz</p> <p>Stop Freq 5.22000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.24 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.24000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.24 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.86 dBm / 20.0000 MHz -57.15 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.24000000 GHz</p> <p>Start Freq 5.22000000 GHz</p> <p>Stop Freq 5.26000000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

5725-5850MHz

<p>802.11a-Low</p>	<p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Channel Power</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.86 dBm / 20.0000 MHz -58.16 dBm/Hz</p> <p>Trace/View</p> <p>Trace 1 2 3</p> <p>Clear Write</p> <p>Max Hold</p> <p>Min Hold</p> <p>View</p> <p>Blank</p> <p>More 1 of 2</p>
<p>802.11a-Middle</p>	<p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.785000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.69 dBm / 20.0000 MHz -58.22 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11a-High</p>	<p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.825000000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.38 dBm / 20.0000 MHz -58.63 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz</p> <p>Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

<p>802.11n-HT20-Low</p>	 <p>Agilent R T</p> <p>Ch Freq 5.745 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.74500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.745 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>15.05 dBm / 20.0000 MHz -57.96 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.74500000 GHz</p> <p>Start Freq 5.72500000 GHz</p> <p>Stop Freq 5.76500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 5.785 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.78500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.785 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.79 dBm / 20.0000 MHz -58.22 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.78500000 GHz</p> <p>Start Freq 5.76500000 GHz</p> <p>Stop Freq 5.80500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>
<p>802.11n-HT20-High</p>	 <p>Agilent R T</p> <p>Ch Freq 5.825 GHz Trig Free</p> <p>Channel Power</p> <p>Center 5.82500000 GHz</p> <p>Ref 20 dBm Atten 30 dB</p> <p>#Avg Log 10 dB/ Offst 1 dB</p> <p>Center 5.825 GHz Span 40 MHz</p> <p>#Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts)</p> <p>Channel Power Power Spectral Density</p> <p>14.58 dBm / 20.0000 MHz -58.43 dBm/Hz</p> <p>Freq/Channel</p> <p>Center Freq 5.82500000 GHz</p> <p>Start Freq 5.80500000 GHz</p> <p>Stop Freq 5.84500000 GHz</p> <p>CF Step 4.00000000 MHz Auto Man</p> <p>Freq Offset 0.00000000 Hz</p> <p>Signal Track On Off</p> <p>Scale Type Log Lin</p>

APPENDIX D

Frequency Stability

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	5.0	-30	1896	0.3646
100%		-20	1900	0.3653
100%		-10	1895	0.3645
100%		0	1898	0.3649
100%		+10	1895	0.3644
100%		+20	1901	0.3655
100%		+30	1901	0.3656
100%		+40	1909	0.3671
100%		+50	1901	0.3655
Low Battery power		5.50	+20	1906
High Battery power	4.50	+20	1901	0.3655

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	5.0	-30	1904	0.3292
100%		-20	1891	0.3268
100%		-10	1897	0.3279
100%		0	1901	0.3286
100%		+10	1901	0.3287
100%		+20	1899	0.3283
100%		+30	1893	0.3272
100%		+40	1897	0.3279
100%		+50	1908	0.3297
Low Battery power		5.50	+20	1899
High Battery power	4.50	+20	1902	0.3287

APPENDIX PHOTOGRAPHS

Please refer to “ANNEX”

******* END OF REPORT *******