



iCloud Control For TranPoster™




1. Find TranPoster™ ID address from your PC. And connected
(take for example: AP40000102)



2. Open the Viplex Express,
(Here is the link for download:
<http://www.en.vnnox.com/#download>)



3.Connected TranPoster™ from the Viplex Express



Viplex Express

Screens


Solutions

Advanced Solutions


Screen Control


Total
1


=


Online
1


+


Not Login
0


+


Offline
0

Refresh


Screen Name	Screen IP	Screen Size
 Taurus-40000102	192.168.43.1	288*972

4. Click "Screen Control" - "Network configuration"

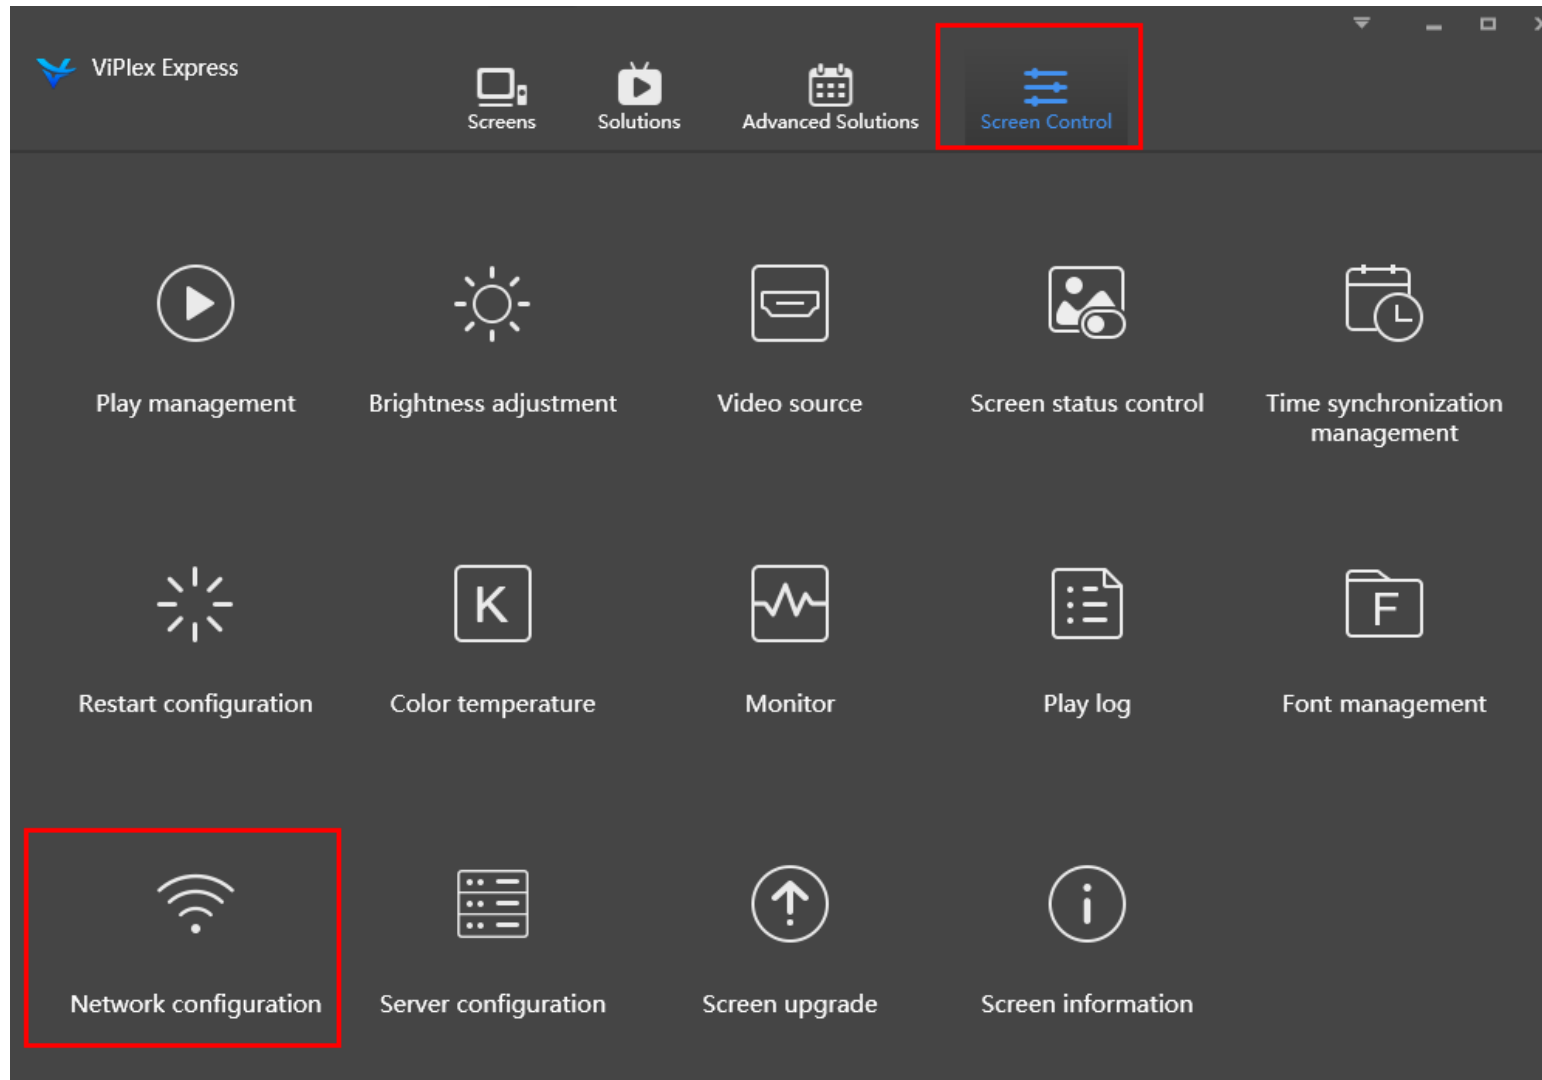


5.Turn on"Wi-Fi" ,

6.Find best wifi in order to make sure TranPoster™ online smoothly

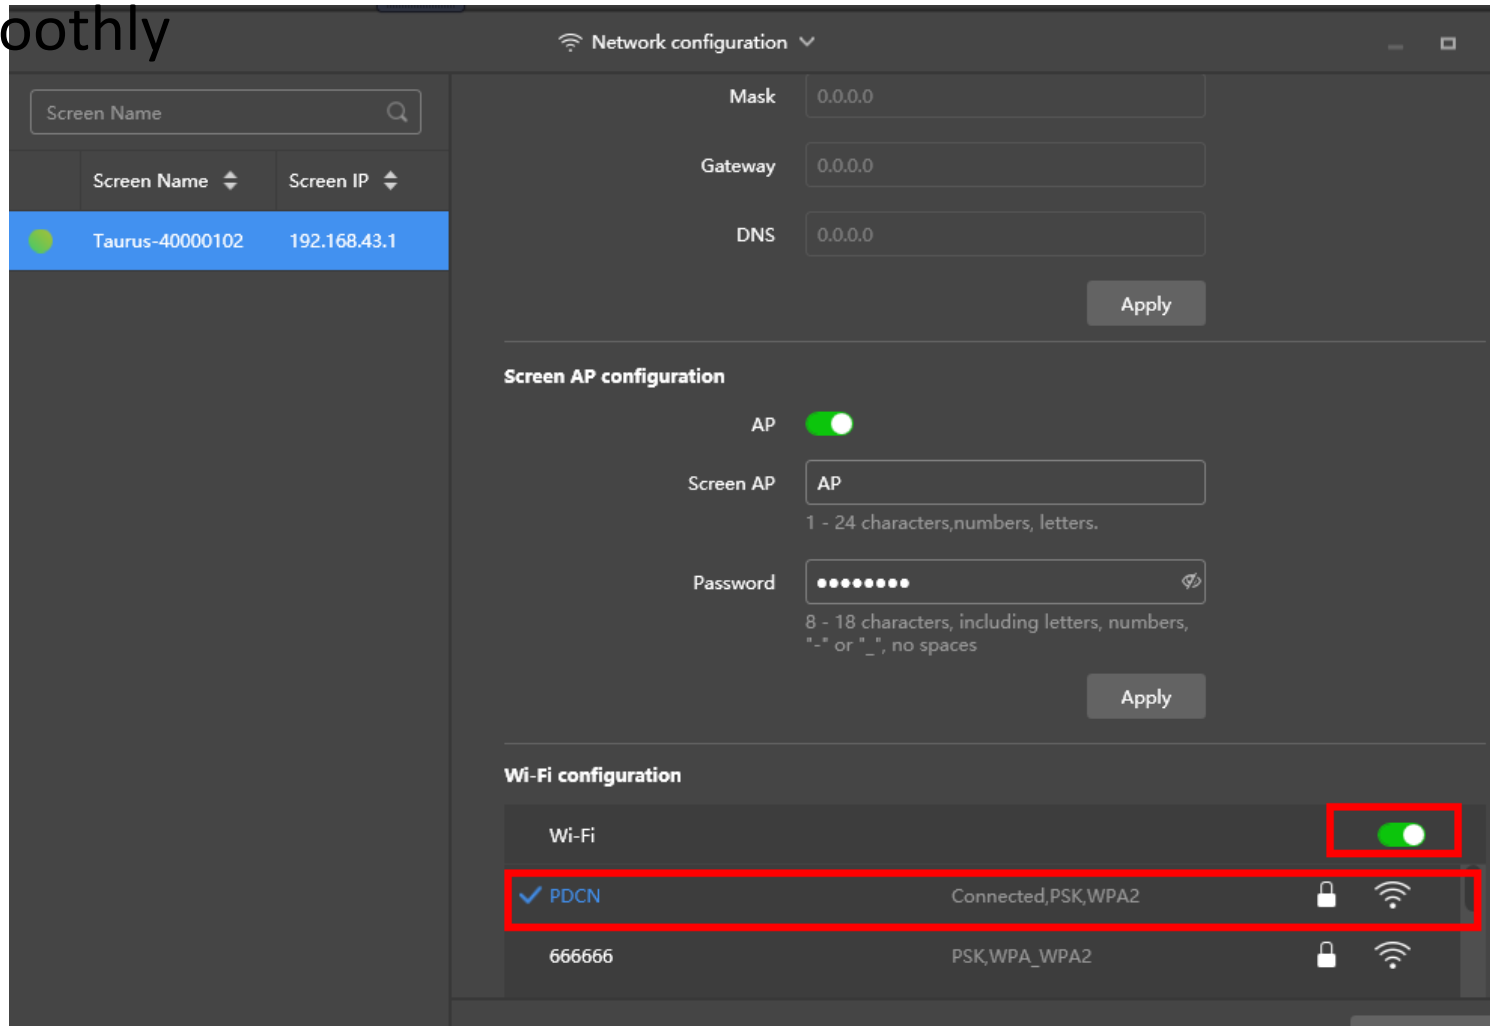

7.Click"Screen Control"- "Server configuration"

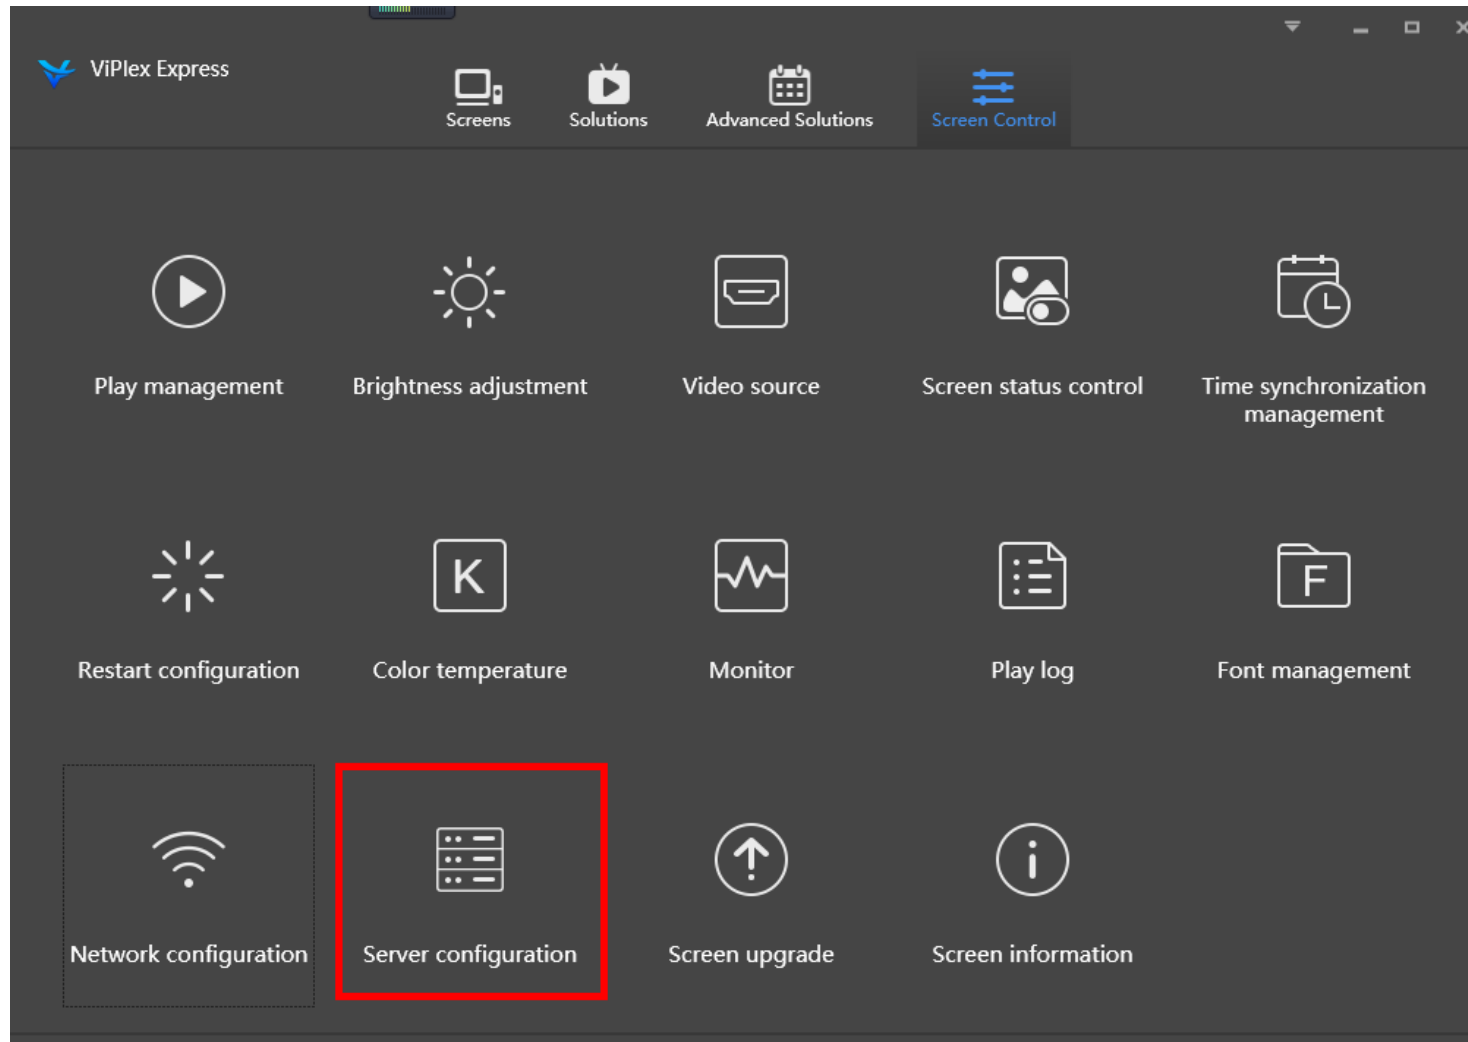

8.Filled in full information as below:

Server address-user name- password,-player-bind

Server configuration

Screen Name

Screen Name	Screen IP
Taurus-40000102	192.168.43.1

Current screen: Taurus-40000102

Current information acquiring time: 2018/11/29 16:46:05

Configure parameters for connecting screens to VNNOX

After a player is bound, please go to VNNOX to unbind the player if you want.

Server address: China

Authentication user name: wxh0913

Authentication password:

Player: Taurus-40000102-51006

Status: Connected

Bind

Configure parameters for connecting screens to NovaiCare

Server address:

Username:

Status: Disconnected

You can find all of information as below:

A. Visit <https://cn.vnnox.com>, and login

B. Click "account " to find information of user name & password

The screenshot displays the VNNOX user interface. At the top left, the VNNOX logo and tagline 'NOVA Cloud-Based Publishing Service' are visible. Below this is a login form with fields for 'wxh0913' and a masked password, along with 'Remember me' and 'Password Reset' options, and a green 'Login' button. A blue navigation bar at the top contains links for 'VNNOX Lite', 'Players', 'Solutions', 'Content', 'Player Control', and 'Logs'. On the right of this bar, a user profile for 'wxh0913' is shown with a dropdown menu containing 'Account' (highlighted with a red box) and 'Exit'. The main content area shows account details: Username 'wxh0913', Login Password '*****' with a 'Modify' link, and Registered date '2018-06-21 16:40:27'. A 'Security Settings' section follows, showing 'Server address' as 'https://api-cn.vnnox.com'. At the bottom, a red box highlights the 'Certified user name' field with the value 'XXXXXX' and the 'Certified password' field with the value 'XXXXXX' and a 'Modify' link.

VNNOX
NOVA Cloud-Based Publishing Service

wxh0913

Remember me Password Reset
Login

VNNOX Lite Players Solutions Content Player Control Logs VNNOX Pro wxh0913 ^

Account
Exit

Username wxh0913

Login Password ***** Modify

Registered 2018-06-21 16:40:27


Security Settings

Server address https://api-cn.vnnox.com

Certified user name XXXXXX

Certified password XXXXXX Modify

9. When you login website, the TranPoster™ already connected successful.


Lite

Players

Solutions

Content

Player Control

Logs

VNNOC Pro

wxh0913

Players

↻ Update status

🛡️ Authorize Player


● Online 1

● Offline 0




Please enter search keywords

Seq.	Name	Resolution	Solution	Details	Operate
1	<div>● Taurus-40000102-51006</div> <div>Asynchronous player</div>	288*972	<div>Transtech i cloud</div> <div>✔ 2018-11-29 16:36:23</div>	<div>Software: V1.3.0.2001</div> <div>System: T6V010300CN2001</div>	<div></div> <div></div> <div></div>

10.Click”Solution”-”+New “ to create a new programming



[Players](#)
[Solutions](#)
[Content](#)
[Player Control](#)
[Logs](#)


VNNOX Pro












 wxh0913

Solutions

+ New

 Delete

Please enter search keywords 

<input type="checkbox"/> Name	Resolution	File Size	Last Modification	Operate
<input type="checkbox"/> 123242424	288*972	198.70KB	2018-11-29 16:25:19	  
<input type="checkbox"/> icould	288*972	4.88MB	2018-11-29 16:15:16	  
<input type="checkbox"/> kathy	288*972	2.83MB	2018-11-27 18:01:52	  



11. Change the resolution to keep the same as TranPoster™

Solution Information ×


Solution Name

Resolution Width Height [Select Player ▼](#)


12. Add new media content needed (pic, video, time, weather...) ^T

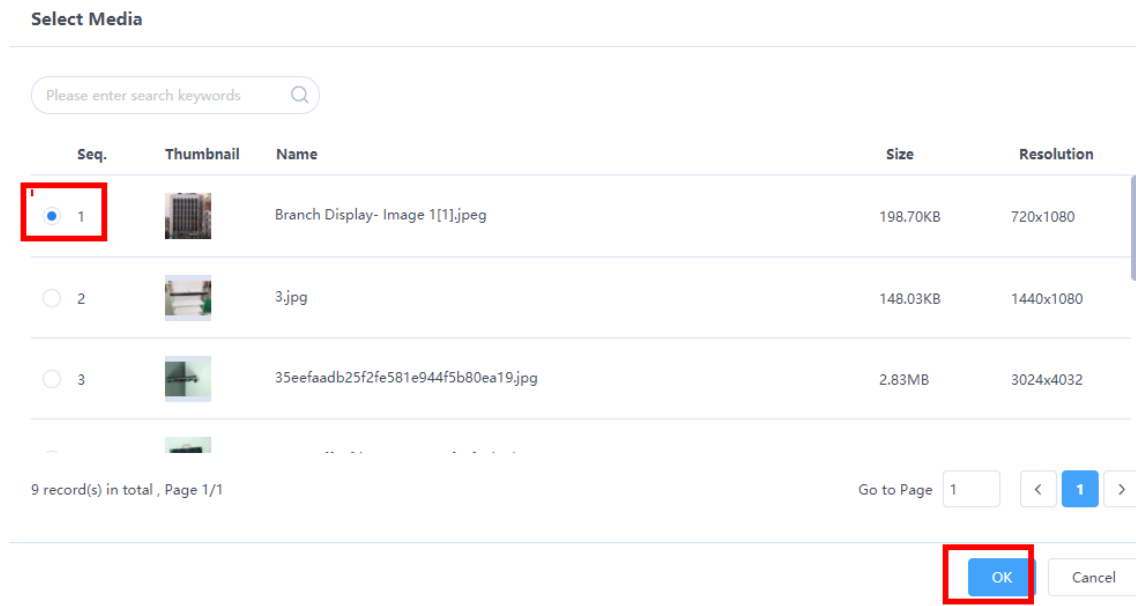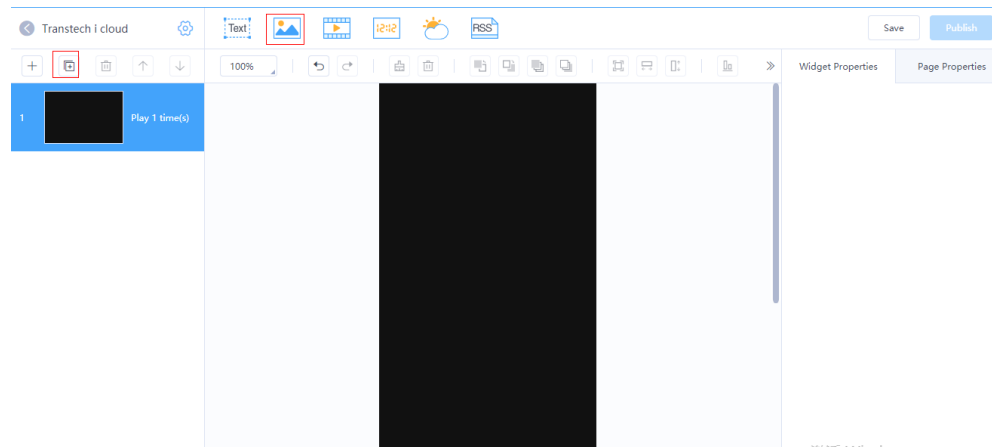

13. Make sure resolution is the same as TranPoster™. And then “publish”

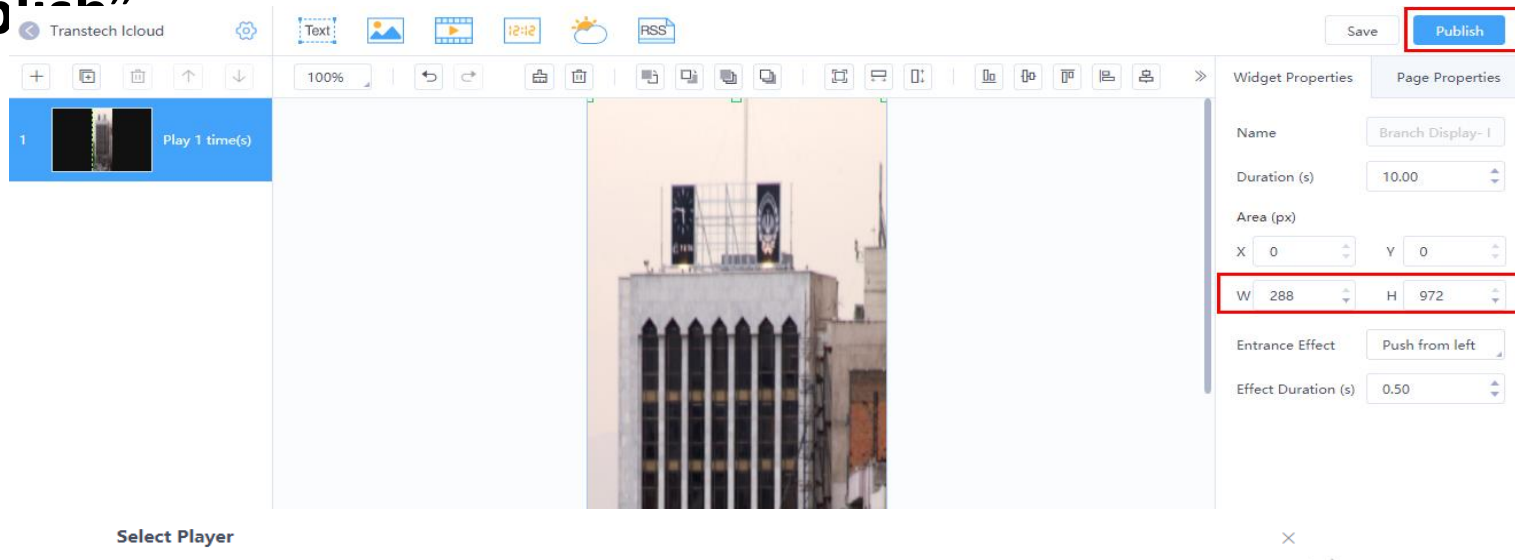

The screenshot shows the TranPoster™ interface. At the top, there is a toolbar with icons for Text, Image, Video, RSS, and other widgets. Below the toolbar is a video player area showing a building. To the right of the video player is a 'Widget Properties' panel. In this panel, the 'Page Properties' tab is selected. The 'W' (Width) is set to 288 and the 'H' (Height) is set to 972, both of which are highlighted with a red box. Other properties like Name, Duration, Area, X, Y, Entrance Effect, and Effect Duration are also visible. At the top right of the interface, there are 'Save' and 'Publish' buttons, with the 'Publish' button highlighted by a red box.

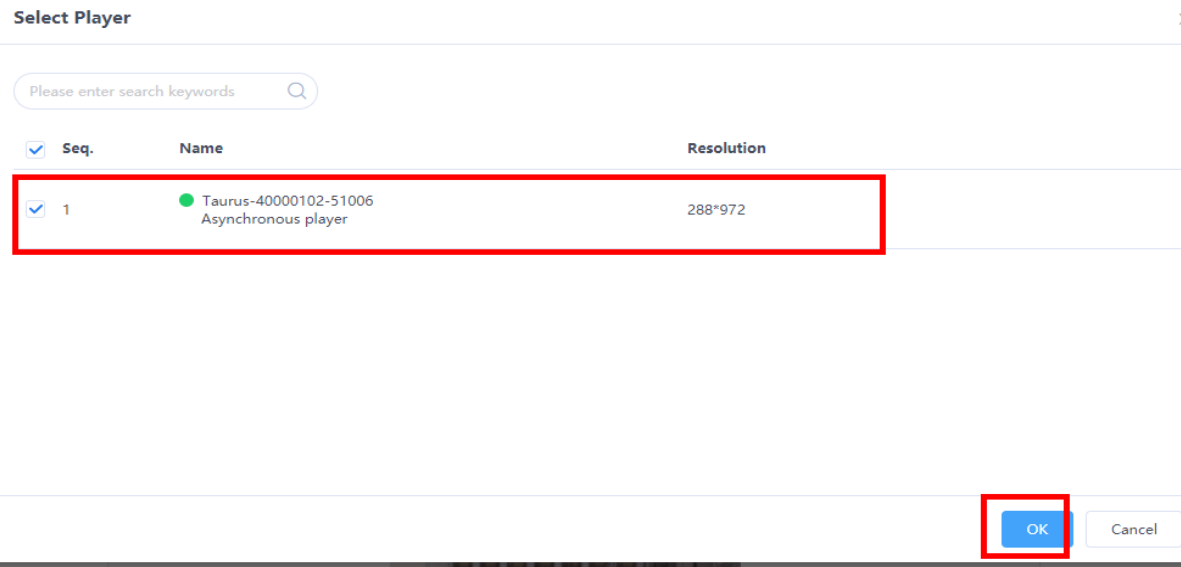


The screenshot shows the 'Select Player' dialog box. It has a search bar at the top with the placeholder text 'Please enter search keywords'. Below the search bar is a table with columns for 'Seq.', 'Name', and 'Resolution'. The table contains one row with the following data:

Seq.	Name	Resolution
1	Taurus-40000102-51006 Asynchronous player	288*972

The first row of the table is highlighted with a red box. At the bottom right of the dialog box, there are 'OK' and 'Cancel' buttons, with the 'OK' button highlighted by a red box.

14. When it shows "The solution was sent", it means the content was sent to TranPoster™ successfully through iCloud.

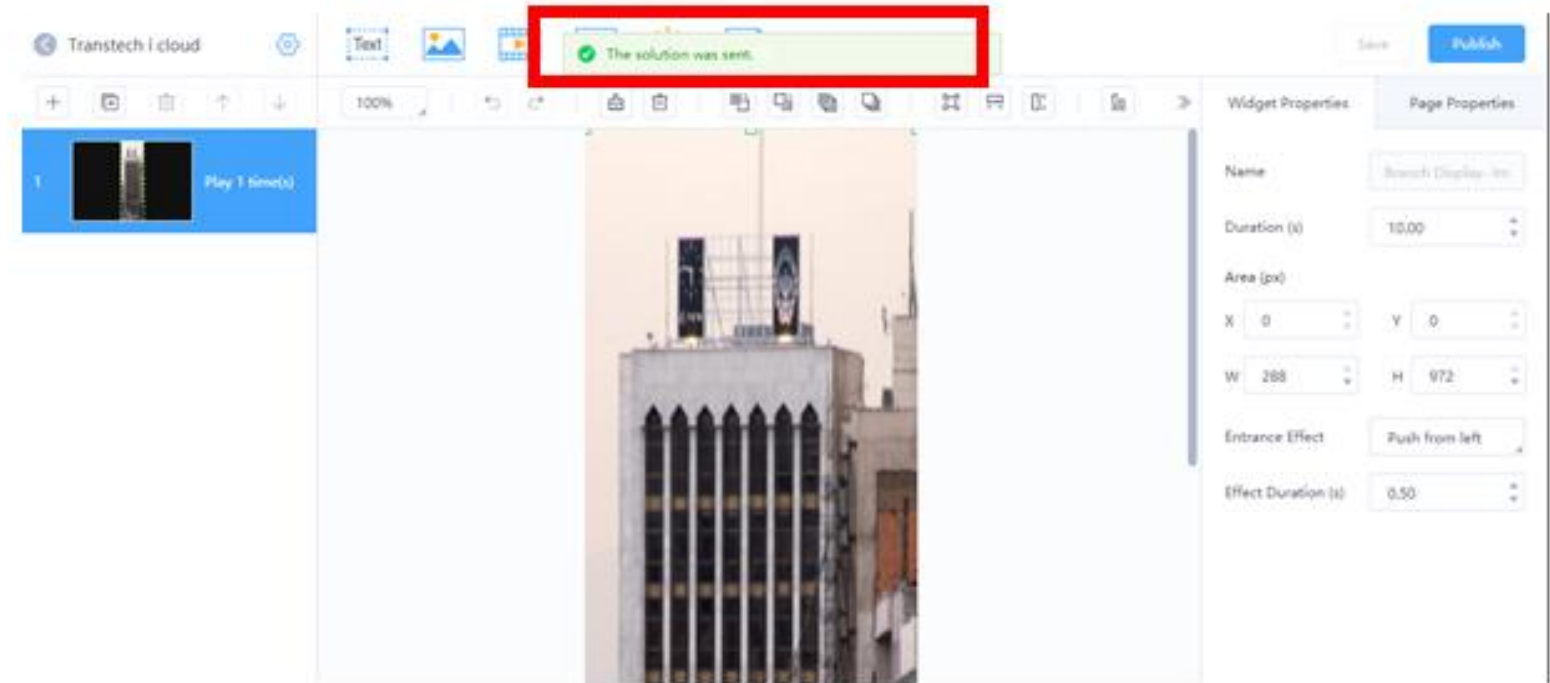

Advertising becomes Easy and simple because of icloud control



●●● Thanks !

Shenzhen Transtech LED Display

Add : Block 12C,Jugao Technology park,Tianliao
town,guangming district,Shenzhen

Tel : 0755-27150899

Website : www.trtled.cn

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC warning:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

IC warning

- English:

This device complies with Industry Canada licence-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

- French:

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.