



FCC RF Test Report

APPLICANT : vivo Mobile Communication Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : vivo
MODEL NAME : V2529
FCC ID : 2AUCY-V2529
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Jul. 26, 2025 ~ Aug. 22, 2025

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	8
1.6 Testing Location	8
1.7 Test Software.....	8
1.8 Applicable Standards.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	13
2.4 Support Unit used in test configuration and system	14
2.5 EUT Operation Test Setup	14
2.6 Measurement Results Explanation Example.....	14
3 TEST RESULT	15
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	20
3.3 Power Spectral Density Measurement	22
3.4 Unwanted Emissions Measurement	26
3.5 AC Conducted Emission Measurement.....	31
3.6 Antenna Requirements	33
4 LIST OF MEASURING EQUIPMENT	34
5 MEASUREMENT UNCERTAINTY	35
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR562603E	Rev. 01	Initial issue of report	Aug. 27, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 2.46 dB at 5149.58 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 11.70 dB at 0.59 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

vivo Mobile Communication Co., Ltd.

No.1, vivo Road, Chang'an, Dongguan, Guangdong, China

1.2 Manufacturer

vivo Mobile Communication Co., Ltd.

No.1, vivo Road, Chang'an, Dongguan, Guangdong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	vivo
Model Name	V2529
FCC ID	2AUCY-V2529
IMEI Code	Conducted: 862902089996676/862902089996668 Conduction: 862902089999530/862902089999522 Radiation: 862902089999639/862902089999621
HW Version	MP_0.1
SW Version	PD2512GF_EX_A_15.0.4.3.W30
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 17.24 dBm / 0.0530 W 802.11n HT20 : 17.17 dBm / 0.0521 W 802.11n HT40 : 17.12 dBm / 0.0515 W 802.11ac VHT20: 17.11 dBm / 0.0514 W 802.11ac VHT40: 17.11 dBm / 0.0514 W 802.11ac VHT80: 12.08 dBm / 0.0161 W 802.11ax HE20: 17.53 dBm / 0.0566 W 802.11ax HE40: 13.22 dBm / 0.0210 W 802.11ax HE80: 12.30 dBm / 0.0170 W <5260 MHz ~ 5320 MHz> 802.11a : 13.28 dBm / 0.0213 W 802.11n HT20 : 13.19 dBm / 0.0208 W 802.11n HT40 : 16.13 dBm / 0.0410 W 802.11ac VHT20: 13.11 dBm / 0.0205 W 802.11ac VHT40: 16.12 dBm / 0.0409 W 802.11ac VHT80: 11.10 dBm / 0.0129 W 802.11ax HE20: 16.23 dBm / 0.0420 W 802.11ax HE40: 13.25 dBm / 0.0211 W 802.11ax HE80: 11.31 dBm / 0.0135 W <5500 MHz ~ 5720 MHz > 802.11a : 17.23 dBm / 0.0528 W 802.11n HT20 : 17.25 dBm / 0.0531 W 802.11n HT40 : 17.21 dBm / 0.0526 W 802.11ac VHT20: 17.14 dBm / 0.0518 W 802.11ac VHT40: 17.11 dBm / 0.0514 W 802.11ac VHT80: 13.08 dBm / 0.0203 W 802.11ax HE20: 17.31 dBm / 0.0538 W 802.11ax HE40: 17.24 dBm / 0.0530 W 802.11ax HE80: 13.38 dBm / 0.0218 W <5745 MHz ~ 5825 MHz> 802.11a : 18.04 dBm / 0.0637 W 802.11n HT20 : 18.16 dBm / 0.0655 W 802.11n HT40 : 17.39 dBm / 0.0548 W 802.11ac VHT20: 18.05 dBm / 0.0638 W 802.11ac VHT40: 17.19 dBm / 0.0524 W 802.11ac VHT80: 13.02 dBm / 0.0200 W 802.11ax HE20: 17.34 dBm / 0.0542 W 802.11ax HE40: 17.52 dBm / 0.0565 W 802.11ax HE80: 13.24 dBm / 0.0211 W

99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 16.95 MHz 802.11n HT20 : 18.18 MHz 802.11n HT40 : 36.96 MHz 802.11ax HE20: 19.15 MHz 802.11ax HE40: 38.03 MHz 802.11ax HE80: 77.08 MHz <5260 MHz ~ 5320 MHz> 802.11a : 16.82 MHz 802.11n HT20 : 18.01 MHz 802.11n HT40 : 36.53 MHz 802.11ax HE20: 19.15 MHz 802.11ax HE40: 38.01 MHz 802.11ax HE80: 77.09 MHz <5500 MHz ~ 5720 MHz> 802.11a : 17.04 MHz 802.11n HT20 : 18.28 MHz 802.11n HT40 : 37.25 MHz 802.11ax HE20: 19.07 MHz 802.11ax HE40: 38.12 MHz 802.11ax HE80: 77.09 MHz <5745 MHz ~ 5825 MHz> 802.11a : 17.49 MHz 802.11n HT20 : 18.55 MHz 802.11ax HE20: 19.22 MHz 802.11ax HE40: 38.09 MHz 802.11ax HE80: 77.10 MHz
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> PIFA Antenna with gain 0.44 dBi <5260 MHz ~ 5320 MHz> PIFA Antenna with gain 0.44 dBi <5500 MHz ~ 5720 MHz> PIFA Antenna with gain 0.99 dBi <5745 MHz ~ 5825 MHz> PIFA Antenna with gain 0.93 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. For 802.11n/ac/ax 20M/40M/80MHz mode of UNII-3, the conducted testing have assessed only 802.11n HT20 & 802.11ax HE20/HE40/HE80 by referring to the higher output power.
2. For 802.11n/ac/ax 20M/40M/80MHz mode of UNII-1/2A/2C, the conducted testing have assessed only 802.11n HT20/HT40 & 802.11ax HE20/HE40/HE80 by referring to the higher output power.
3. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU power/PSD > partial RU, therefore the full RU perform full, and partial RU verify bandedge/spurious.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ CO02-SZ 03CH04-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2020

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z / X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "[#]" are 80MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

SISO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT80	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link + WLAN Link (5G) + USB Cable (Charging from Adapter) + Battery
Remark: For Radiated Test Cases, The tests were performance with Adapter and USB Cable.	

RSE Co-location mode
802.11ax HE20 CH36 5180MHz Tx + LTE Band13 Link 802.11ax HE20 CH36 5180MHz Tx + Bluetooth-LE CH39 2480 MHz 125k Tx + LTE Band13 Link




Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	-	-
H	High	46	62	134	159
Straddle		-	-	142	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-
Straddle		-	-	138	-

2.3 Connection Diagram of Test System

AC Conducted Emission:

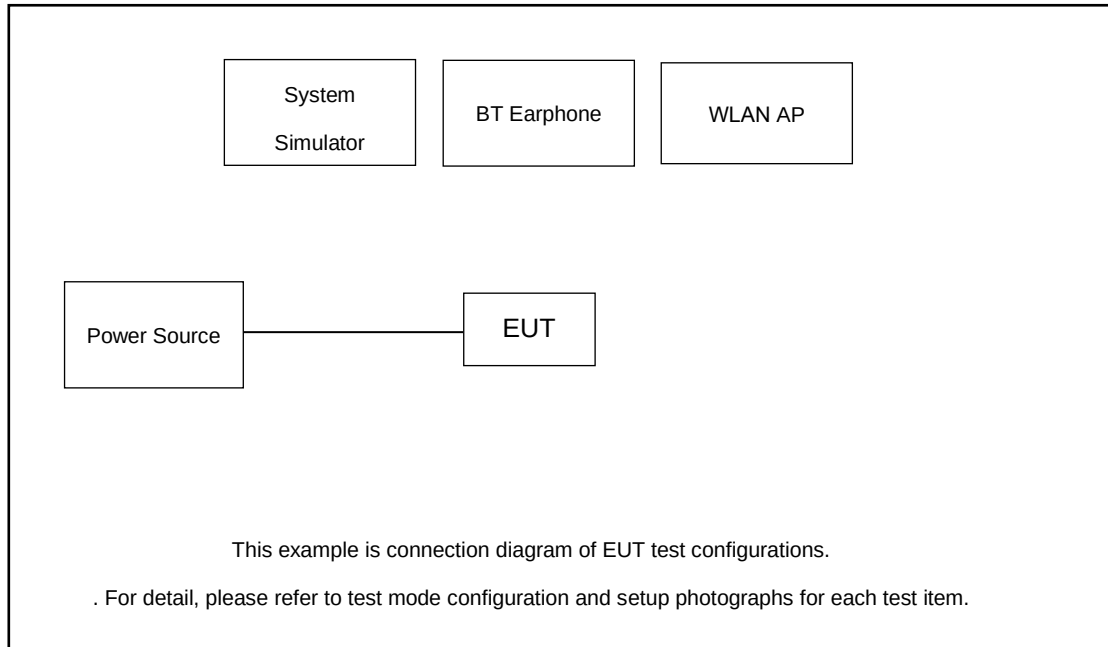

Radiated Emission:

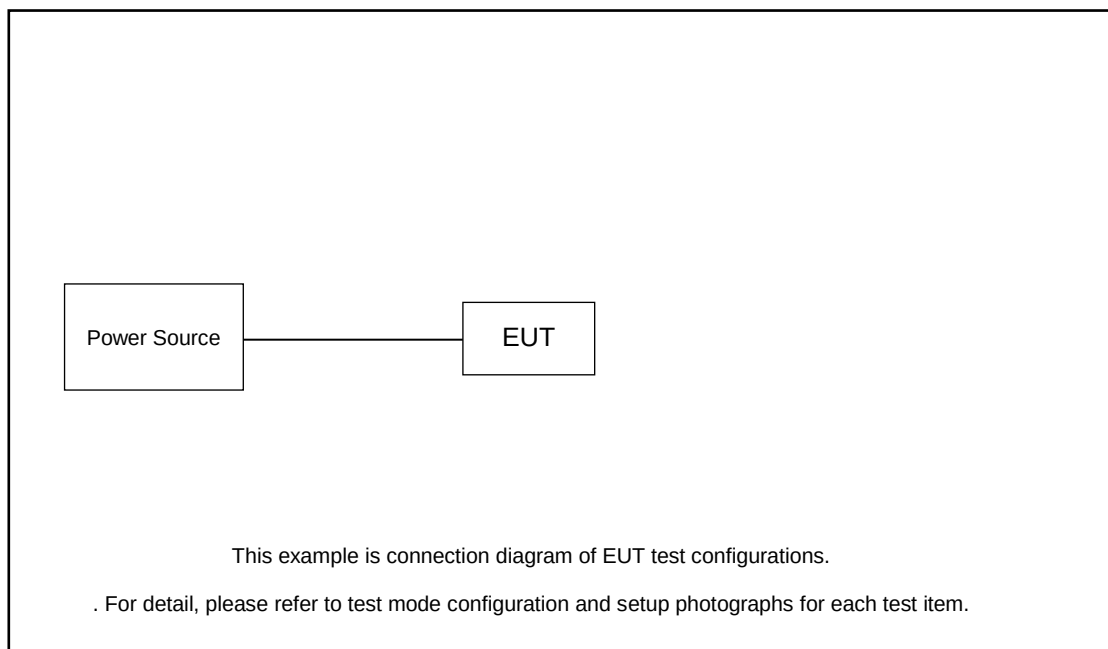

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	Notebook	DELL	Latiude 3400	N/A	N/A	Unshielded,1.8m
4.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.80 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\
 &= 2.80 + 10 = 12.80 \text{ (dB)}
 \end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 & ANSI C63.10-2020 clause 12.5.1 for 6dB BW and 12.5.2 for 26dB BW and 6.9.3 for 99% occupied bandwidth measurements.


☒	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	1. Set RBW = shall be in the range of 1% to 5% of the emission bandwidth. 2. Set the VBW > RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%. 6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) $\geq 3 * RBW$. 7. Measure and record the results in the test report.
☒	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	1. Set RBW = 100 kHz. 2. Set the VBW $\geq 3 \times RBW$. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission. 6. Measure and record the results in the test report.



3.1.4 Test Setup


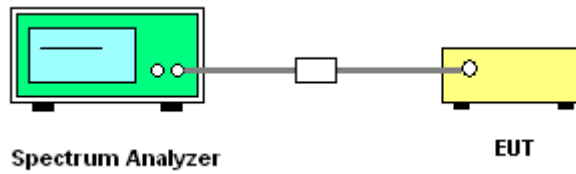




3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

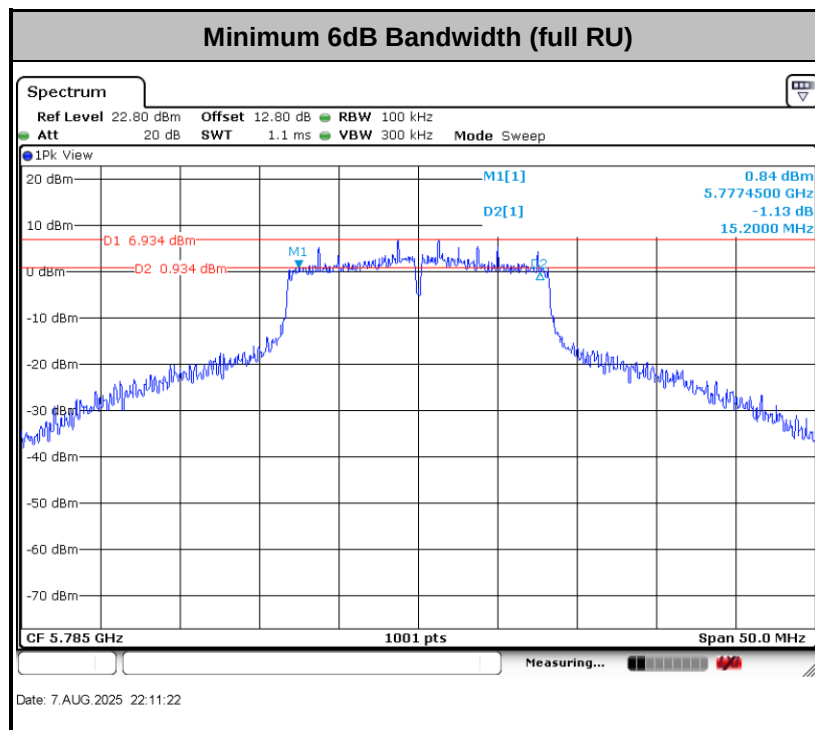

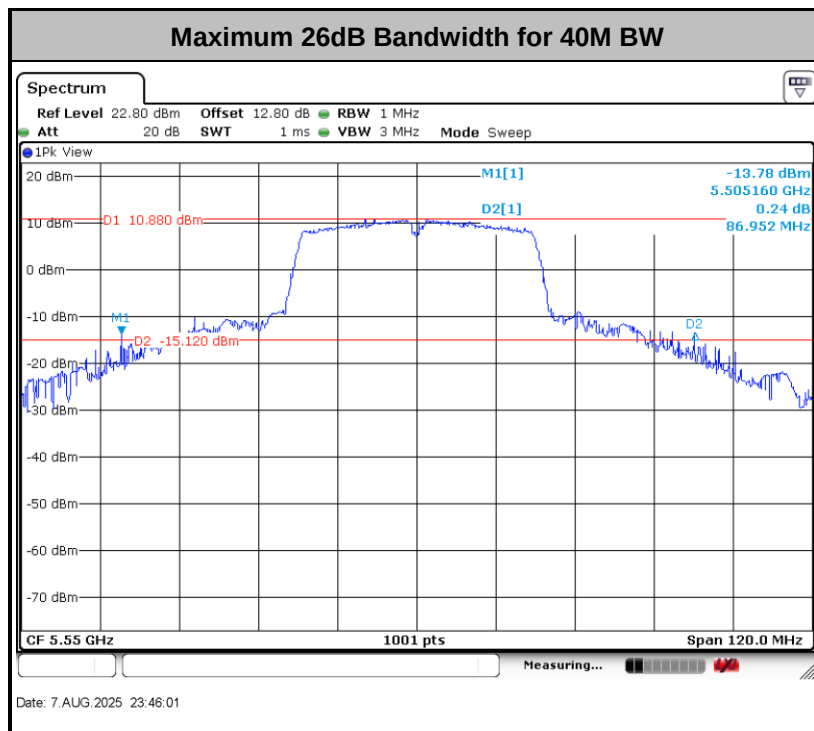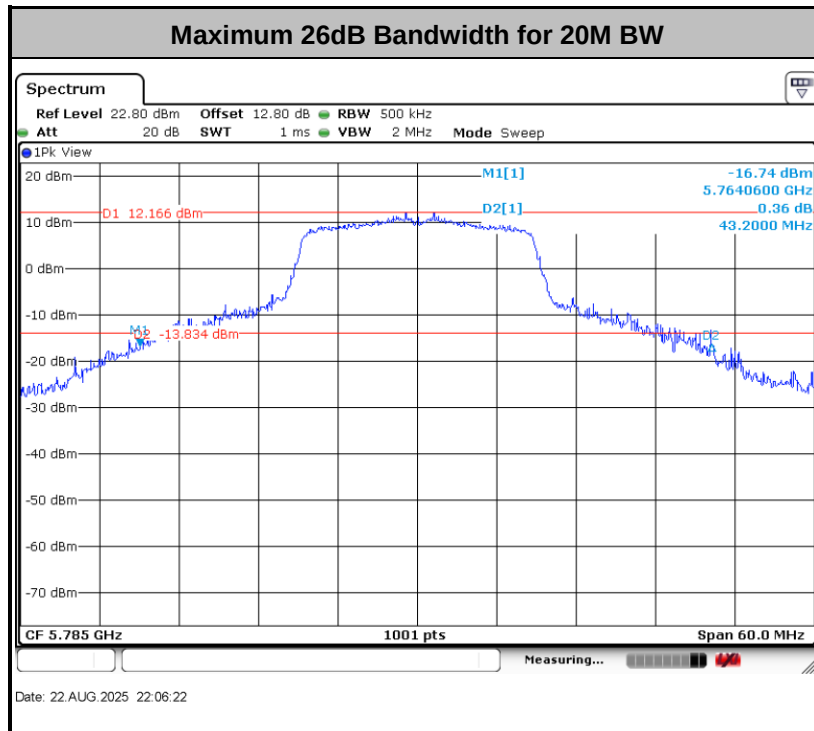

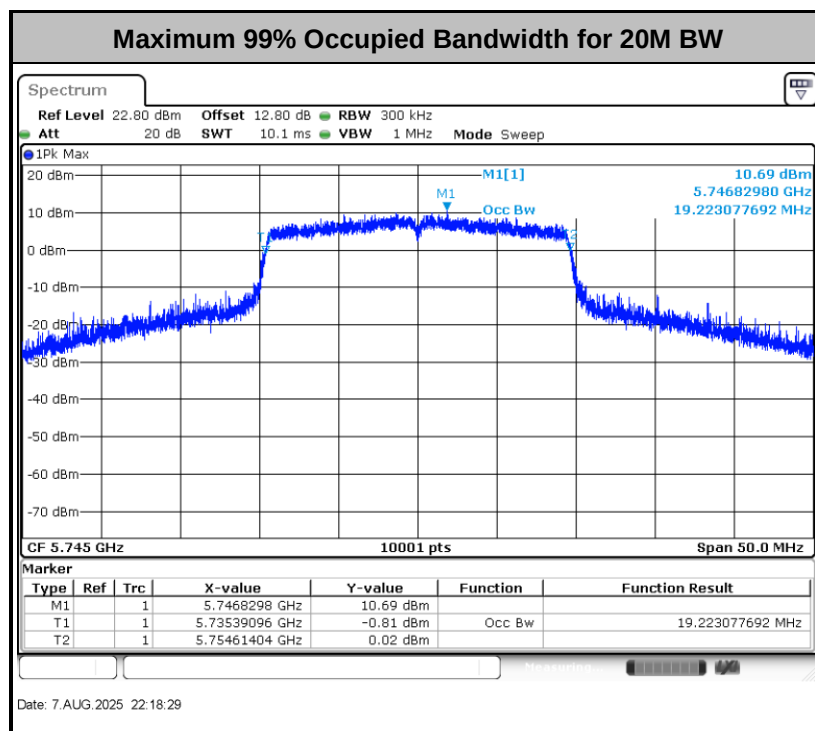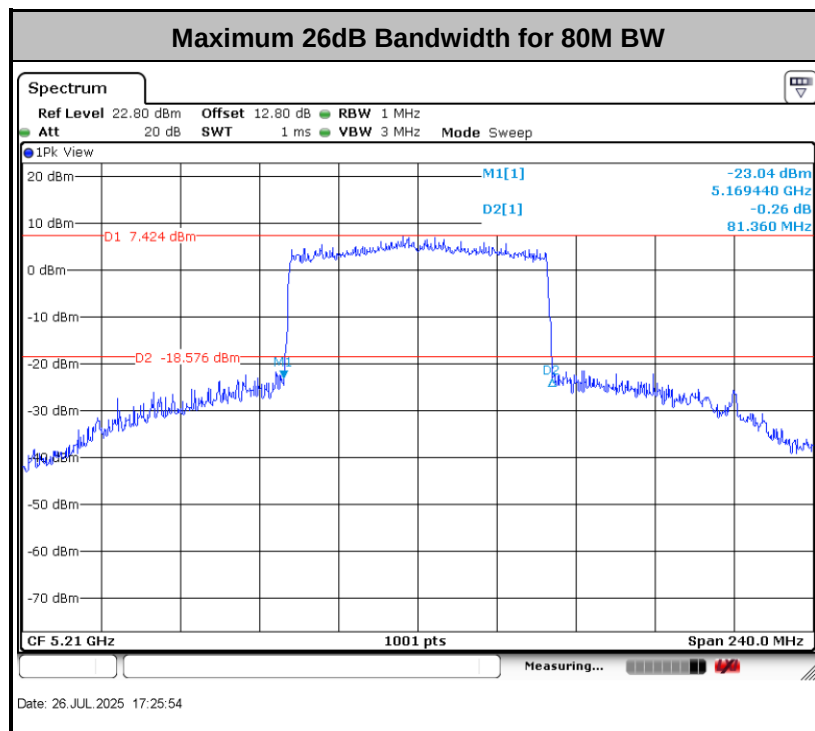

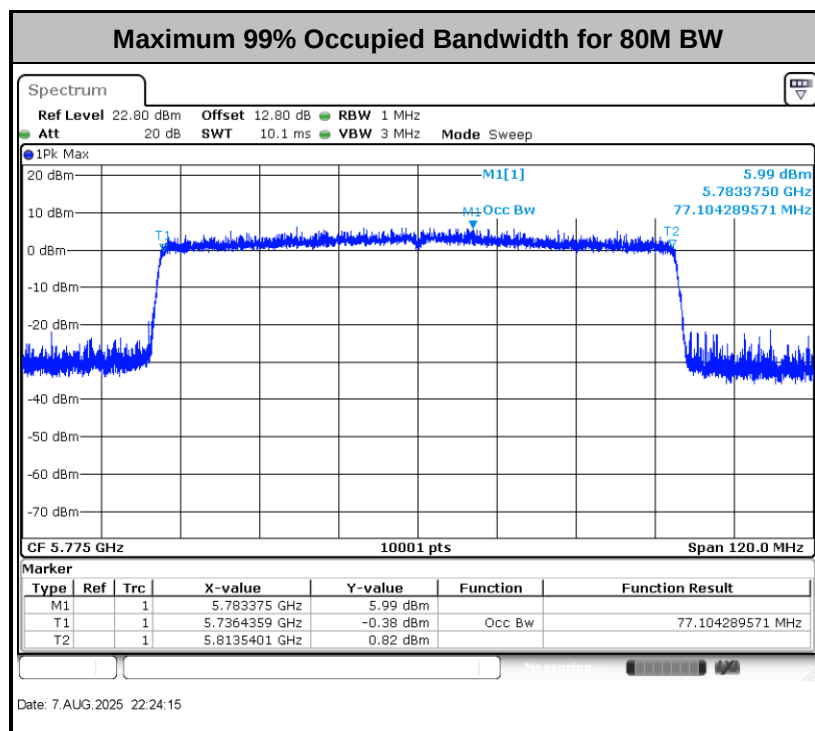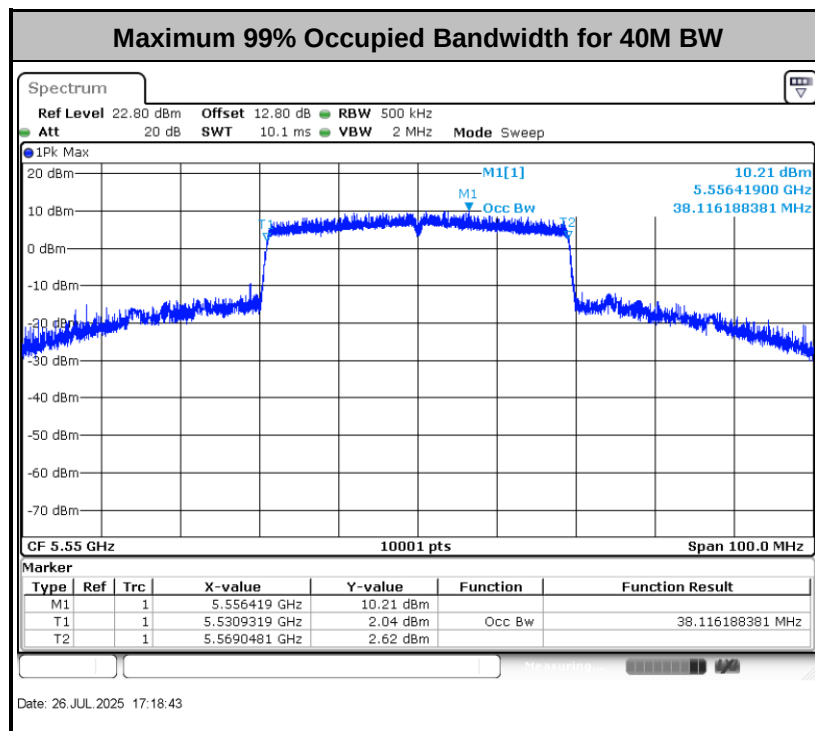

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 log₁₀ B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

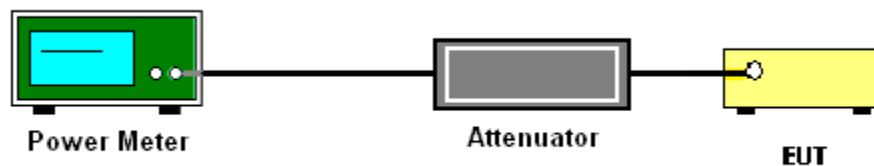

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PSD and record it.


3.3.4 Test Setup

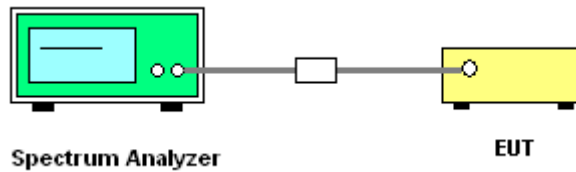

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.


For devices operating in the bands UNII-1/2A/2C

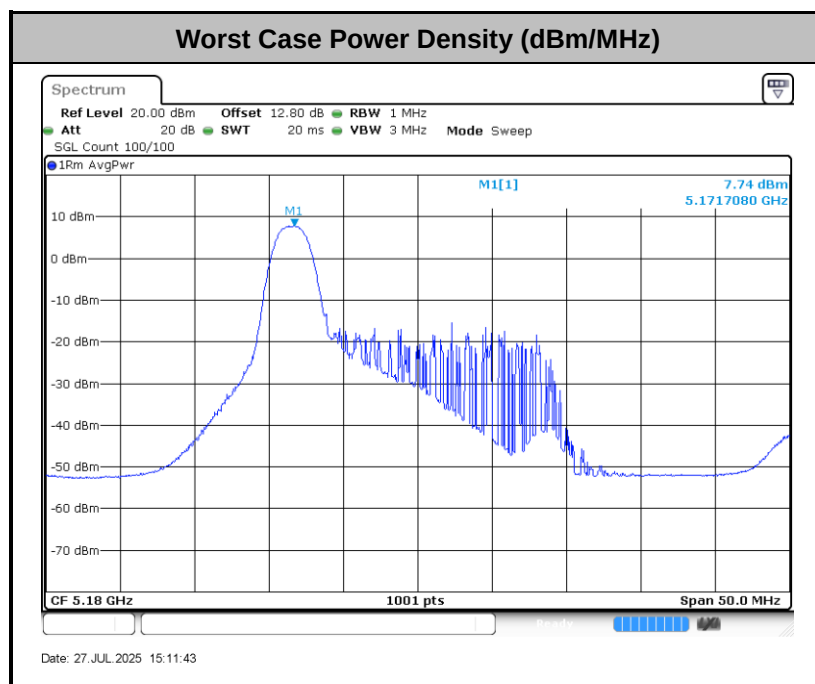

Note: Average Power Density (dB) = Measured value+ Duty Factor



For devices operating in the band UNII-3

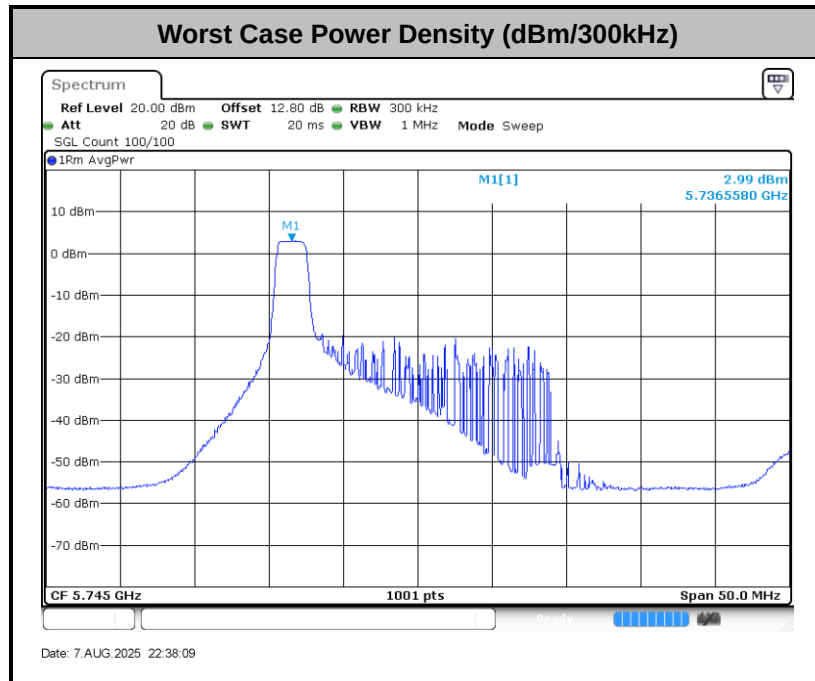

Note: Average Power Density (dB) = Measured value+ Duty Factor + 10 log(500kHz/RBW)

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

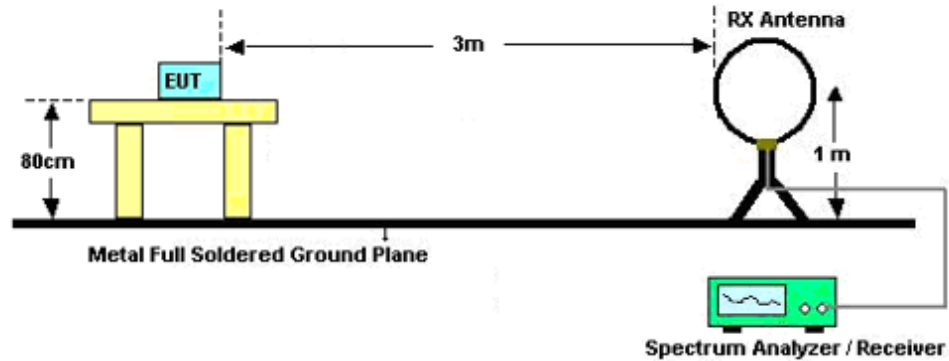

For radiated emissions from 30MHz to 1GHz

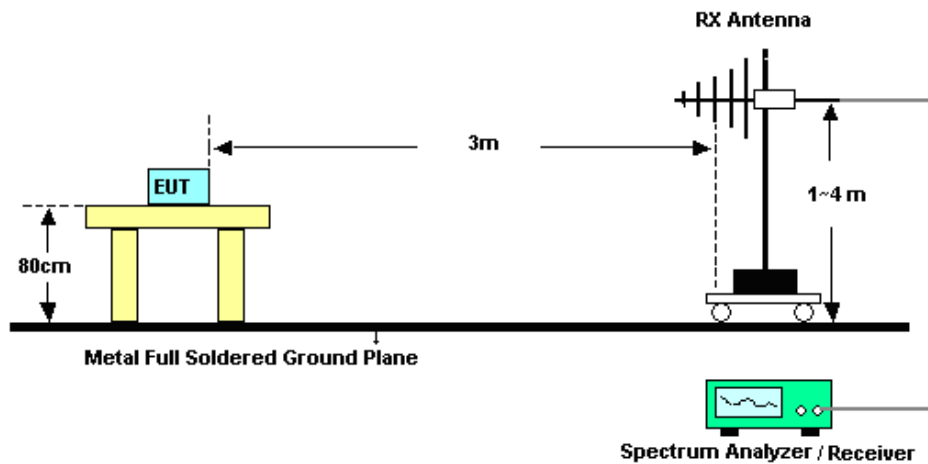

For radiated emissions above 1GHz

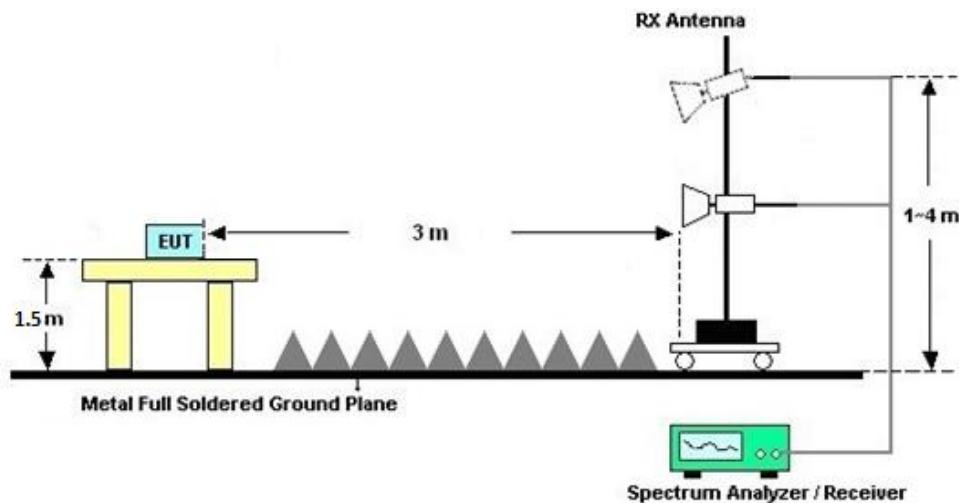

**3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

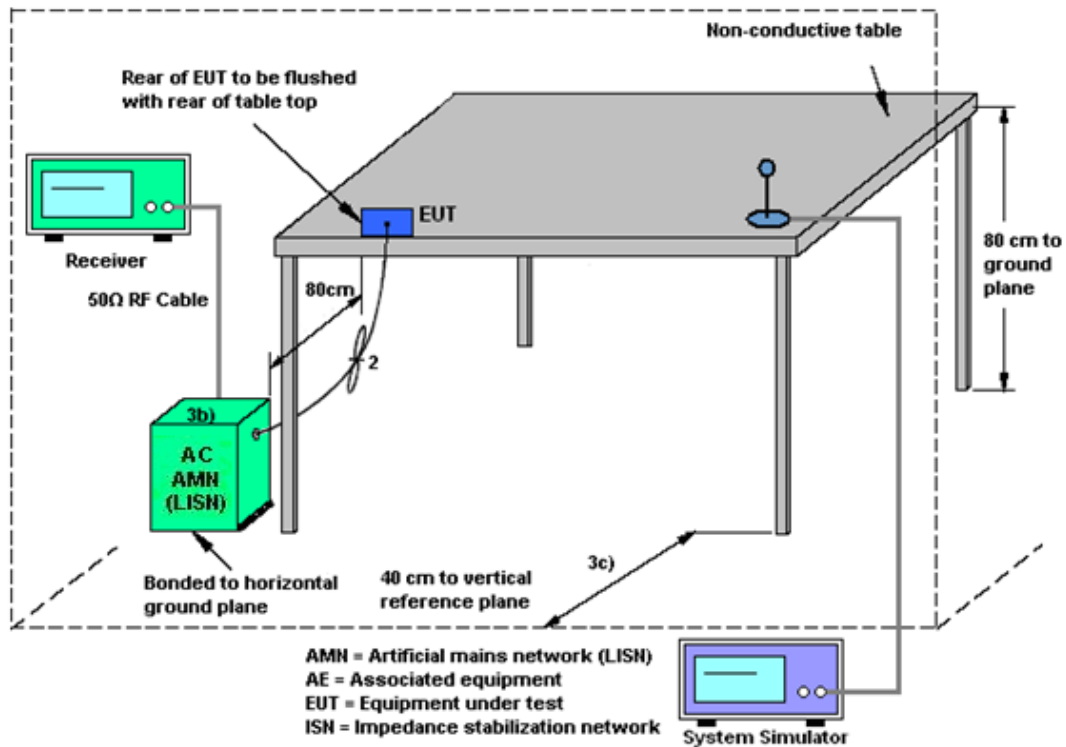

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Jul. 26, 2025~ Aug. 22, 2025	Apr. 01, 2026	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2024	Jul. 26, 2025~ Aug. 22, 2025	Dec. 24, 2025	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct. 14, 2024	Jul. 26, 2025~ Aug. 22, 2025	Oct. 13, 2025	Conducted (TH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2025	Jul. 27, 2025	Jul. 02, 2026	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2025	Jul. 27, 2025	Jul. 02, 2026	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	Jul. 27, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 14, 2024	Jul. 26, 2025~ Aug. 10, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2025	Jul. 26, 2025~ Aug. 10, 2025	Jul. 02, 2026	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Jul. 26, 2025~ Aug. 10, 2025	Dec. 27, 2025	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 09, 2025	Jul. 26, 2025~ Aug. 10, 2025	May 08, 2026	Radiation (03CH04-SZ)
Double Ridge Guide Antenna	ETS-Lindgren	Burgeon-3117	00240057	1GHz~18GHz	Jul. 03, 2025	Jul. 26, 2025~ Aug. 10, 2025	Jul. 02, 2026	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 04, 2025	Jul. 26, 2025~ Aug. 10, 2025	Jul. 03, 2026	Radiation (03CH04-SZ)
LF Amplifier	EM Electronics	EM330	060773	20MHz~3GHz	Apr. 02, 2025	Jul. 26, 2025~ Aug. 10, 2025	Apr. 01, 2026	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Jul. 26, 2025~ Aug. 10, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2025	Jul. 26, 2025~ Aug. 10, 2025	Jul. 02, 2026	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY57280136	500MHz~26.5GHz	Jul. 03, 2025	Jul. 26, 2025~ Aug. 10, 2025	Jul. 02, 2026	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F119050019	N/A	Oct. 14, 2024	Jul. 26, 2025~ Aug. 10, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jul. 26, 2025~ Aug. 10, 2025	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jul. 26, 2025~ Aug. 10, 2025	NCR	Radiation (03CH04-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	HuangKaibiao	Temperature:	21~25	°C
Test Date:	2025/7/26~2025/8/22	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

<U-NII-1>												
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail	Power Setting
						Ant 22	Ant 22	Ant 22	Ant 22			
11a	6Mbps	1	36	Full	5180	0.12	12.16	24.00	0.44		Pass	11
11a	6Mbps	1	44	Full	5220	0.12	17.18	24.00	0.44		Pass	16
11a	6Mbps	1	48	Full	5240	0.12	17.24	24.00	0.44		Pass	16
HT20	MCS0	1	36	Full	5180	0.13	12.16	24.00	0.44		Pass	11
HT20	MCS0	1	44	Full	5220	0.13	17.17	24.00	0.44		Pass	16
HT20	MCS0	1	48	Full	5240	0.13	17.17	24.00	0.44		Pass	16
HT40	MCS0	1	38	Full	5190	0.40	12.18	24.00	0.44		Pass	11
HT40	MCS0	1	46	Full	5230	0.40	17.12	24.00	0.44		Pass	16
VHT20	MCS0	1	36	Full	5180	0.13	12.09	24.00	0.44		Pass	11
VHT20	MCS0	1	44	Full	5220	0.13	17.10	24.00	0.44		Pass	16
VHT20	MCS0	1	48	Full	5240	0.13	17.11	24.00	0.44		Pass	16
VHT40	MCS0	1	38	Full	5190	0.32	12.08	24.00	0.44		Pass	11
VHT40	MCS0	1	46	Full	5230	0.32	17.11	24.00	0.44		Pass	16
VHT80	MCS0	1	42	Full	5210	0.61	12.08	24.00	0.44		Pass	11
HE20	MCS0	1	36	Full	5180	0.21	17.53	24.00	0.44		Pass	16
HE20	MCS0	1	36	26/0	5180	0.21	11.08	24.00	0.44		Pass	10
HE20	MCS0	1	36	52/37	5180	0.21	13.11	24.00	0.44		Pass	12
HE20	MCS0	1	36	106/53	5180	0.21	15.06	24.00	0.44		Pass	14
HE20	MCS0	1	44	Full	5220	0.21	17.19	24.00	0.44		Pass	16
HE20	MCS0	1	48	Full	5240	0.21	17.18	24.00	0.44		Pass	16
HE40	MCS0	1	38	Full	5190	0.39	13.22	24.00	0.44		Pass	12
HE40	MCS0	1	46	Full	5230	0.39	13.20	24.00	0.44		Pass	12
HE80	MCS0	1	42	Full	5210	0.69	12.30	24.00	0.44		Pass	11

TEST RESULTS DATA
Average Power Table

<U-NII-2A>												
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 22	Ant 22	Ant 22	Ant 22			
11a	6Mbps	1	52	Full	5260	0.12	13.28	23.98	0.44	30	Pass	12
11a	6Mbps	1	60	Full	5300	0.12	13.24	23.98	0.44	30	Pass	12
11a	6Mbps	1	64	Full	5320	0.12	13.23	23.98	0.44	30	Pass	12
HT20	MCS0	1	52	Full	5260	0.13	13.19	23.98	0.44	30	Pass	12
HT20	MCS0	1	60	Full	5300	0.13	13.15	23.98	0.44	30	Pass	12
HT20	MCS0	1	64	Full	5320	0.13	13.17	23.98	0.44	30	Pass	12
HT40	MCS0	1	54	Full	5270	0.40	16.13	23.98	0.44	30	Pass	15
HT40	MCS0	1	62	Full	5310	0.40	11.12	23.98	0.44	30	Pass	10
VHT20	MCS0	1	52	Full	5260	0.13	13.07	23.98	0.44	30	Pass	12
VHT20	MCS0	1	60	Full	5300	0.13	13.06	23.98	0.44	30	Pass	12
VHT20	MCS0	1	64	Full	5320	0.13	13.11	23.98	0.44	30	Pass	12
VHT40	MCS0	1	54	Full	5270	0.32	16.12	23.98	0.44	30	Pass	15
VHT40	MCS0	1	62	Full	5310	0.32	11.07	23.98	0.44	30	Pass	10
VHT80	MCS0	1	58	Full	5290	0.61	11.10	23.98	0.44	30	Pass	10
HE20	MCS0	1	52	Full	5260	0.21	16.19	23.98	0.44	30	Pass	15
HE20	MCS0	1	60	Full	5300	0.21	16.18	23.98	0.44	30	Pass	15
HE20	MCS0	1	64	Full	5320	0.21	16.23	23.98	0.44	30	Pass	15
HE20	MCS0	1	64	26/8	5320	0.21	10.09	23.98	0.44	30	Pass	9
HE20	MCS0	1	64	52/40	5320	0.21	12.21	23.98	0.44	30	Pass	11
HE20	MCS0	1	64	106/54	5320	0.21	14.16	23.98	0.44	30	Pass	13
HE40	MCS0	1	54	Full	5270	0.39	13.20	23.98	0.44	30	Pass	12
HE40	MCS0	1	62	Full	5310	0.39	13.25	23.98	0.44	30	Pass	12
HE80	MCS0	1	58	Full	5290	0.69	11.31	23.98	0.44	30	Pass	10

TEST RESULTS DATA
Average Power Table

<U-NII-2C>												
Mod.	Data Rate	NTx	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
						Ant 22	Ant 22	Ant 22	Ant 22			
11a	6Mbps	1	100	Full	5500	0.12	16.15	23.98	0.99	30	Pass	15
11a	6Mbps	1	116	Full	5580	0.12	17.12	23.98	0.99	30	Pass	16
11a	6Mbps	1	140	Full	5700	0.12	14.72	23.98	0.99	30	Pass	13.5
11a	6Mbps	1	144	Full	5720	0.12	17.23	23.98	0.99	30	Pass	16
HT20	MCS0	1	100	Full	5500	0.13	16.16	23.98	0.99	30	Pass	15
HT20	MCS0	1	116	Full	5580	0.13	17.17	23.98	0.99	30	Pass	16
HT20	MCS0	1	140	Full	5700	0.13	14.63	23.98	0.99	30	Pass	13.5
HT20	MCS0	1	144	Full	5720	0.13	17.25	23.98	0.99	30	Pass	16
HT40	MCS0	1	102	Full	5510	0.40	11.15	23.98	0.99	30	Pass	10
HT40	MCS0	1	110	Full	5550	0.40	17.14	23.98	0.99	30	Pass	16
HT40	MCS0	1	134	Full	5670	0.40	11.16	23.98	0.99	30	Pass	10
HT40	MCS0	1	142	Full	5710	0.40	17.21	23.98	0.99	30	Pass	16
VHT20	MCS0	1	100	Full	5500	0.13	16.12	23.98	0.99	30	Pass	15
VHT20	MCS0	1	116	Full	5580	0.13	17.10	23.98	0.99	30	Pass	16
VHT20	MCS0	1	140	Full	5700	0.13	14.61	23.98	0.99	30	Pass	13.5
VHT20	MCS0	1	144	Full	5720	0.13	17.14	23.98	0.99	30	Pass	16
VHT40	MCS0	1	102	Full	5510	0.32	11.11	23.98	0.99	30	Pass	10
VHT40	MCS0	1	110	Full	5550	0.32	17.10	23.98	0.99	30	Pass	16
VHT40	MCS0	1	134	Full	5670	0.32	11.09	23.98	0.99	30	Pass	10
VHT40	MCS0	1	142	Full	5710	0.32	17.11	23.98	0.99	30	Pass	16
VHT80	MCS0	1	106	Full	5530	0.61	10.11	23.98	0.99	30	Pass	9
VHT80	MCS0	1	122	Full	5610	0.61	10.11	23.98	0.99	30	Pass	9
VHT80	MCS0	1	138	Full	5690	0.61	13.08	23.98	0.99	30	Pass	12
HE20	MCS0	1	100	Full	5500	0.21	15.23	23.98	0.99	30	Pass	14
HE20	MCS0	1	100	26/0	5500	0.21	9.11	23.98	0.99	30	Pass	8
HE20	MCS0	1	100	52/37	5500	0.21	11.11	23.98	0.99	30	Pass	10
HE20	MCS0	1	100	106/53	5500	0.21	13.10	23.98	0.99	30	Pass	12
HE20	MCS0	1	116	Full	5580	0.21	15.29	23.98	0.99	30	Pass	14
HE20	MCS0	1	140	Full	5700	0.21	15.21	23.98	0.99	30	Pass	14
HE20	MCS0	1	140	26/8	5700	0.21	9.08	23.98	0.99	30	Pass	8
HE20	MCS0	1	140	52/40	5700	0.21	11.16	23.98	0.99	30	Pass	10
HE20	MCS0	1	140	106/54	5700	0.21	13.31	23.98	0.99	30	Pass	12
HE20	MCS0	1	144	Full	5720	0.21	17.31	23.98	0.99	30	Pass	16
HE40	MCS0	1	102	Full	5510	0.39	14.17	23.98	0.99	30	Pass	13
HE40	MCS0	1	110	Full	5550	0.39	14.15	23.98	0.99	30	Pass	13
HE40	MCS0	1	134	Full	5670	0.39	14.21	23.98	0.99	30	Pass	13
HE40	MCS0	1	142	Full	5710	0.39	17.24	23.98	0.99	30	Pass	16
HE80	MCS0	1	106	Full	5530	0.69	10.48	23.98	0.99	30	Pass	9
HE80	MCS0	1	122	Full	5610	0.69	10.39	23.98	0.99	30	Pass	9
HE80	MCS0	1	138	Full	5690	0.69	13.38	23.98	0.99	30	Pass	12

TEST RESULTS DATA
Average Power Table

<U-NII-3>											
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail	Power Setting
						Ant 22	Ant 22	Ant 22	Ant 22		
11a	6Mbps	1	149	Full	5745	0.12	17.14	30.00	0.93	Pass	16
11a	6Mbps	1	157	Full	5785	0.12	18.04	30.00	0.93	Pass	17
11a	6Mbps	1	165	Full	5825	0.12	17.11	30.00	0.93	Pass	16
HT20	MCS0	1	149	Full	5745	0.13	17.21	30.00	0.93	Pass	16
HT20	MCS0	1	157	Full	5785	0.13	18.16	30.00	0.93	Pass	17
HT20	MCS0	1	165	Full	5825	0.13	17.16	30.00	0.93	Pass	16
HT40	MCS0	1	151	Full	5755	0.40	17.39	30.00	0.93	Pass	16
HT40	MCS0	1	159	Full	5795	0.40	17.33	30.00	0.93	Pass	16
VHT20	MCS0	1	149	Full	5745	0.13	17.06	30.00	0.93	Pass	16
VHT20	MCS0	1	157	Full	5785	0.13	18.05	30.00	0.93	Pass	17
VHT20	MCS0	1	165	Full	5825	0.13	17.03	30.00	0.93	Pass	16
VHT40	MCS0	1	151	Full	5755	0.32	17.19	30.00	0.93	Pass	16
VHT40	MCS0	1	159	Full	5795	0.32	17.18	30.00	0.93	Pass	16
VHT80	MCS0	1	155	Full	5775	0.61	13.02	30.00	0.93	Pass	12
HE20	MCS0	1	149	Full	5745	0.21	17.31	30.00	0.93	Pass	16
HE20	MCS0	1	149	26/0	5745	0.21	11.05	30.00	0.93	Pass	10
HE20	MCS0	1	149	52/37	5745	0.21	13.21	30.00	0.93	Pass	12
HE20	MCS0	1	149	106/53	5745	0.21	15.10	30.00	0.93	Pass	14
HE20	MCS0	1	157	Full	5785	0.21	17.34	30.00	0.93	Pass	16
HE20	MCS0	1	165	Full	5825	0.21	17.33	30.00	0.93	Pass	16
HE20	MCS0	1	165	26/8	5825	0.21	11.03	30.00	0.93	Pass	10
HE20	MCS0	1	165	52/40	5825	0.21	13.12	30.00	0.93	Pass	12
HE20	MCS0	1	165	106/54	5825	0.21	15.14	30.00	0.93	Pass	14
HE40	MCS0	1	151	Full	5755	0.39	17.49	30.00	0.93	Pass	16
HE40	MCS0	1	159	Full	5795	0.39	17.52	30.00	0.93	Pass	16
HE80	MCS0	1	155	Full	5775	0.69	13.24	30.00	0.93	Pass	12

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 22	Ant 22	Ant 22	Ant 22		
11a	6Mbps	1	36	5180	16.53	21.48	-	22.18		
11a	6Mbps	1	44	5220	16.95	27.90	-	22.29		
11a	6Mbps	1	48	5240	16.95	29.82	-	22.29		
HT20	MCS0	1	36	5180	17.83	25.50	-	22.51		
HT20	MCS0	1	44	5220	18.13	38.64	-	22.58		
HT20	MCS0	1	48	5240	18.18	36.84	-	22.60		
HT40	MCS0	1	38	5190	36.32	41.40	-	23.01		
HT40	MCS0	1	46	5230	36.96	70.04	-	23.01		
HE20	MCS0	1	36	5180	19.13	31.86	-	22.82		
HE20	MCS0	1	44	5220	19.08	38.10	-	22.81		
HE20	MCS0	1	48	5240	19.15	29.40	-	22.82		
HE40	MCS0	1	38	5190	38.02	73.49	-	23.01		
HE40	MCS0	1	46	5230	38.03	73.80	-	23.01		
HE80	MCS0	1	42	5210	77.08	81.36	-	23.01		

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
					Ant 22	Ant 22	Ant 22	Ant 22	Ant 22	
11a	6Mbps	1	52	5260	16.79	27.84	23.25	29.25	23.98	
11a	6Mbps	1	60	5300	16.80	28.02	23.25	29.25	23.98	
11a	6Mbps	1	64	5320	16.82	28.86	23.26	29.26	23.98	
HT20	MCS0	1	52	5260	18.01	28.14	23.55	29.55	23.98	
HT20	MCS0	1	60	5300	17.99	23.34	23.55	29.55	23.98	
HT20	MCS0	1	64	5320	18.00	27.72	23.55	29.55	23.98	
HT40	MCS0	1	54	5270	36.53	72.44	23.98	30.00	23.98	
HT40	MCS0	1	62	5310	36.29	41.52	23.98	30.00	23.98	
HE20	MCS0	1	52	5260	19.15	30.24	23.82	29.82	23.98	
HE20	MCS0	1	60	5300	19.11	30.84	23.81	29.81	23.98	
HE20	MCS0	1	64	5320	19.14	31.14	23.82	29.82	23.98	
HE40	MCS0	1	54	5270	38.01	75.36	23.98	30.00	23.98	
HE40	MCS0	1	62	5310	38.00	69.24	23.98	30.00	23.98	
HE80	MCS0	1	58	5290	77.09	80.88	23.98	30.00	23.98	

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
					Ant 22	Ant 22	Ant 22	Ant 22	Ant 22	
11a	6Mbps	1	100	5500	16.81	29.64	23.26	29.26	23.98	
11a	6Mbps	1	116	5580	17.04	32.94	23.31	29.31	23.98	
11a	6Mbps	1	140	5700	16.79	27.06	23.25	29.25	23.98	
11a	6Mbps	1	144	5720	17.02	34.98	23.31	29.31	23.98	
HT20	MCS0	1	100	5500	17.98	38.58	23.55	29.55	23.98	
HT20	MCS0	1	116	5580	18.21	35.64	23.60	29.60	23.98	
HT20	MCS0	1	140	5700	17.96	29.16	23.54	29.54	23.98	
HT20	MCS0	1	144	5720	18.28	36.24	23.62	29.62	23.98	
HT40	MCS0	1	102	5510	36.31	41.40	23.98	30.00	23.98	
HT40	MCS0	1	110	5550	37.25	86.95	23.98	30.00	23.98	
HT40	MCS0	1	134	5670	36.32	41.64	23.98	30.00	23.98	
HT40	MCS0	1	142	5710	36.96	73.88	23.98	30.00	23.98	
HE20	MCS0	1	100	5500	19.05	25.14	23.80	29.80	23.98	
HE20	MCS0	1	116	5580	19.07	25.98	23.80	29.80	23.98	
HE20	MCS0	1	140	5700	19.07	26.88	23.80	29.80	23.98	
HE20	MCS0	1	144	5720	19.05	35.88	23.80	29.80	23.98	
HE40	MCS0	1	102	5510	38.07	81.36	23.98	30.00	23.98	
HE40	MCS0	1	110	5550	38.12	77.28	23.98	30.00	23.98	
HE40	MCS0	1	134	5670	38.09	73.20	23.98	30.00	23.98	
HE40	MCS0	1	142	5710	38.05	74.52	23.98	30.00	23.98	
HE80	MCS0	1	106	5530	77.07	80.88	23.98	30.00	23.98	
HE80	MCS0	1	122	5610	77.01	80.88	23.98	30.00	23.98	
HE80	MCS0	1	138	5690	77.09	80.88	23.98	30.00	23.98	

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)	26dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 22	Ant 22	Ant 22	Ant 22	
11a	6Mbps	1	149	5745	Full	16.94	37.68	16.40	0.5	Pass
11a	6Mbps	1	157	5785	Full	17.49	40.38	15.20	0.5	Pass
11a	6Mbps	1	165	5825	Full	17.09	36.54	15.75	0.5	Pass
HT20	MCS0	1	149	5745	Full	18.14	38.40	15.75	0.5	Pass
HT20	MCS0	1	157	5785	Full	18.55	43.20	17.10	0.5	Pass
HT20	MCS0	1	165	5825	Full	18.10	38.22	15.75	0.5	Pass
HE20	MCS0	1	149	5745	Full	19.22	35.52	18.15	0.5	Pass
HE20	MCS0	1	149	5745	26/0	-	-	2.05	0.5	Pass
HE20	MCS0	1	157	5785	Full	19.14	33.18	17.35	0.5	Pass
HE20	MCS0	1	165	5825	Full	19.10	31.50	16.95	0.5	Pass
HE20	MCS0	1	165	5825	26/8	-	-	2.15	0.5	Pass
HE40	MCS0	1	151	5755	Full	38.09	77.88	37.80	0.5	Pass
HE40	MCS0	1	159	5795	Full	38.05	70.92	37.80	0.5	Pass
HE80	MCS0	1	155	5775	Full	77.10	80.84	77.12	0.5	Pass

TEST RESULTS DATA
Power Spectral Density

<U-NII-1>										
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	Pass /Fail
						Ant 22	Ant 22	Ant 22	Ant 22	
11a	6Mbps	1	36	Full	5180	0.12	3.20	11.00	0.44	Pass
11a	6Mbps	1	44	Full	5220	0.12	6.26	11.00	0.44	Pass
11a	6Mbps	1	48	Full	5240	0.12	6.18	11.00	0.44	Pass
HT20	MCS0	1	36	Full	5180	0.13	2.81	11.00	0.44	Pass
HT20	MCS0	1	44	Full	5220	0.13	5.79	11.00	0.44	Pass
HT20	MCS0	1	48	Full	5240	0.13	5.93	11.00	0.44	Pass
HT40	MCS0	1	38	Full	5190	0.40	-1.83	11.00	0.44	Pass
HT40	MCS0	1	46	Full	5230	0.40	3.11	11.00	0.44	Pass
HE20	MCS0	1	36	Full	5180	0.21	5.42	11.00	0.44	Pass
				26/0	5180	0.21	7.95	11.00	0.44	Pass
				52/37	5180	0.21	7.79	11.00	0.44	Pass
				106/53	5180	0.21	7.46	11.00	0.44	Pass
HE20	MCS0	1	44	Full	5220	0.21	5.72	11.00	0.44	Pass
HE20	MCS0	1	48	Full	5240	0.21	5.81	11.00	0.44	Pass
HE40	MCS0	1	38	Full	5190	0.39	2.55	11.00	0.44	Pass
HE40	MCS0	1	46	Full	5230	0.39	2.58	11.00	0.44	Pass
HE80	MCS0	1	42	Full	5210	0.69	-2.96	11.00	0.44	Pass

TEST RESULTS DATA
Power Spectral Density

<U-NII-2A>										
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	Pass /Fail
						Ant 22	Ant 22	Ant 22	Ant 22	
11a	6Mbps	1	52	Full	5260	0.12	5.41	11.00	0.44	Pass
11a	6Mbps	1	60	Full	5300	0.12	5.05	11.00	0.44	Pass
11a	6Mbps	1	64	Full	5320	0.12	4.96	11.00	0.44	Pass
HT20	MCS0	1	52	Full	5260	0.13	5.05	11.00	0.44	Pass
HT20	MCS0	1	60	Full	5300	0.13	4.85	11.00	0.44	Pass
HT20	MCS0	1	64	Full	5320	0.13	4.64	11.00	0.44	Pass
HT40	MCS0	1	54	Full	5270	0.40	2.33	11.00	0.44	Pass
HT40	MCS0	1	62	Full	5310	0.40	-3.16	11.00	0.44	Pass
HE20	MCS0	1	52	Full	5260	0.21	5.69	11.00	0.44	Pass
HE20	MCS0	1	60	Full	5300	0.21	5.25	11.00	0.44	Pass
HE20	MCS0	1	64	Full	5320	0.21	5.11	11.00	0.44	Pass
				26/8	5320	0.21	7.86	11.00	0.44	Pass
				52/40	5320	0.21	7.86	11.00	0.44	Pass
				106/54	5320	0.21	7.12	11.00	0.44	Pass
HE40	MCS0	1	54	Full	5270	0.39	2.72	11.00	0.44	Pass
HE40	MCS0	1	62	Full	5310	0.00	1.91	11.00	0.44	Pass
HE80	MCS0	1	58	Full	5290	0.69	-6.17	11.00	0.44	Pass

TEST RESULTS DATA
Power Spectral Density

<U-NII-2C>										
Mod.	Data Rate	N _{TX}	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	Pass /Fail
						Ant 22	Ant 22	Ant 22	Ant 22	
11a	6Mbps	1	100	Full	5500	0.12	5.11	11.00	0.99	Pass
11a	6Mbps	1	116	Full	5580	0.12	5.80	11.00	0.99	Pass
11a	6Mbps	1	140	Full	5700	0.12	4.92	11.00	0.99	Pass
11a	6Mbps	1	144	Full	5720	0.12	5.94	11.00	0.99	Pass
HT20	MCS0	1	100	Full	5500	0.13	4.79	11.00	0.99	Pass
HT20	MCS0	1	116	Full	5580	0.13	5.55	11.00	0.99	Pass
HT20	MCS0	1	140	Full	5700	0.13	4.64	11.00	0.99	Pass
HT20	MCS0	1	144	Full	5720	0.13	5.66	11.00	0.99	Pass
HT40	MCS0	1	102	Full	5510	0.40	-3.20	11.00	0.99	Pass
HT40	MCS0	1	110	Full	5550	0.40	2.79	11.00	0.99	Pass
HT40	MCS0	1	134	Full	5670	0.40	-3.49	11.00	0.99	Pass
HT40	MCS0	1	142	Full	5710	0.40	2.88	11.00	0.99	Pass
HE20	MCS0	1	100	Full	5500	0.21	4.53	11.00	0.99	Pass
				26/0	5500	0.21	6.21	11.00	0.99	Pass
				52/37	5500	0.21	5.92	11.00	0.99	Pass
				106/53	5500	0.21	5.27	11.00	0.99	Pass
HE20	MCS0	1	116	Full	5580	0.21	4.34	11.00	0.99	Pass
HE20	MCS0	1	140	Full	5700	0.21	4.45	11.00	0.99	Pass
				26/8	5700	0.21	6.38	11.00	0.99	Pass
				52/40	5700	0.21	5.84	11.00	0.99	Pass
				106/54	5700	0.21	5.26	11.00	0.99	Pass
HE20	MCS0	1	144	Full	5720	0.21	4.44	11.00	0.99	Pass
HE40	MCS0	1	102	Full	5510	0.39	2.59	11.00	0.99	Pass
HE40	MCS0	1	110	Full	5550	0.39	2.37	11.00	0.99	Pass
HE40	MCS0	1	134	Full	5670	0.39	2.17	11.00	0.99	Pass
HE40	MCS0	1	142	Full	5710	0.39	2.49	11.00	0.99	Pass
HE80	MCS0	1	106	Full	5530	0.69	-7.50	11.00	0.99	Pass
HE80	MCS0	1	122	Full	5610	0.69	-7.36	11.00	0.99	Pass
HE80	MCS0	1	138	Full	5690	0.69	-4.19	11.00	0.99	Pass


TEST RESULTS DATA
Power Spectral Density

<U-NII-3>											
Mod.	Data Rate	NTX	CH.	RU Config	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass /Fail
						Ant 22	Ant 22	Ant 22	Ant 22	Ant 22	
11a	6Mbps	1	149	Full	5745	0.12	2.22	3.01	30.00	0.93	Pass
11a	6Mbps	1	157	Full	5785	0.12	2.22	3.69	30.00	0.93	Pass
11a	6Mbps	1	165	Full	5825	0.12	2.22	2.80	30.00	0.93	Pass
HT20	MCS0	1	149	Full	5745	0.13	2.22	2.94	30.00	0.93	Pass
HT20	MCS0	1	157	Full	5785	0.13	2.22	3.48	30.00	0.93	Pass
HT20	MCS0	1	165	Full	5825	0.13	2.22	2.46	30.00	0.93	Pass
HE20	MCS0	1	149	Full	5745	0.21	2.22	2.69	30.00	0.93	Pass
				26/0	5745	0.21	2.22	5.42	30.00	0.93	Pass
				52/37	5745	0.21	2.22	4.50	30.00	0.93	Pass
				106/53	5745	0.21	2.22	3.42	30.00	0.93	Pass
HE20	MCS0	1	157	Full	5785	0.21	2.22	2.43	30.00	0.93	Pass
HE20	MCS0	1	165	Full	5825	0.21	2.22	2.27	30.00	0.93	Pass
				26/8	5825	0.21	2.22	5.28	30.00	0.93	Pass
				52/40	5825	0.21	2.22	4.24	30.00	0.93	Pass
				106/54	5825	0.21	2.22	3.21	30.00	0.93	Pass
HE40	MCS0	1	151	Full	5755	0.39	2.22	-0.38	30.00	0.93	Pass
HE40	MCS0	1	159	Full	5795	0.39	2.22	-0.44	30.00	0.93	Pass
HE80	MCS0	1	155	Full	5775	0.69	2.22	-6.71	30.00	0.93	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

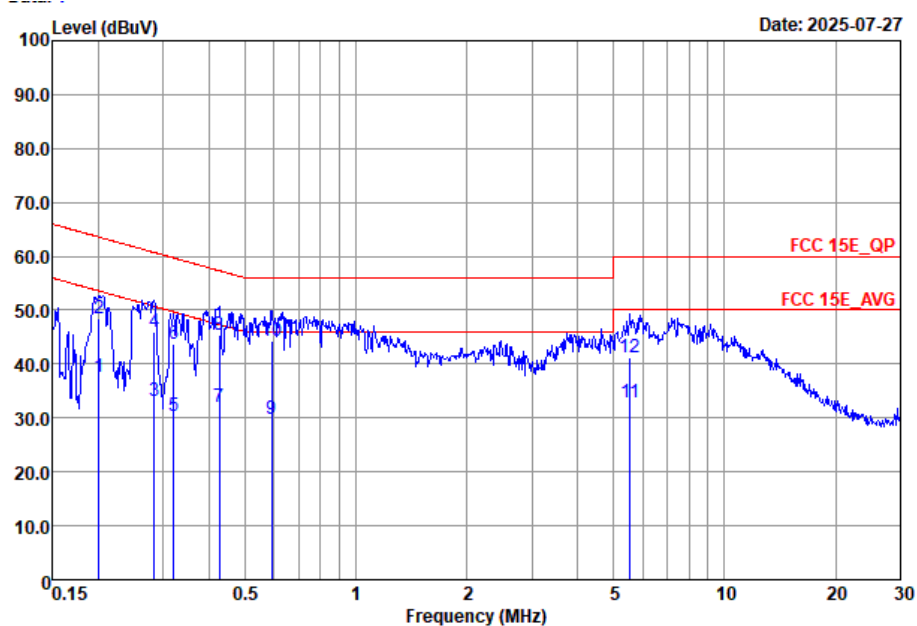


Site : C002-SZ
Condition : FCC 15E_QP LISN_2025-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.20	37.49	-16.09	53.58	17.60	9.71	10.18	Average
2	0.20	48.39	-15.19	63.58	28.50	9.71	10.18	QP
3	0.28	33.05	-17.67	50.72	13.10	9.75	10.20	Average
4	0.28	46.05	-14.67	60.72	26.10	9.75	10.20	QP
5	0.32	30.26	-19.45	49.71	10.30	9.75	10.21	Average
6	0.32	43.66	-16.05	59.71	23.70	9.75	10.21	QP
7	0.43	31.93	-15.40	47.33	12.00	9.70	10.23	Average
8	0.43	45.33	-12.00	57.33	25.40	9.70	10.23	QP
9	0.59	29.90	-16.10	46.00	10.00	9.66	10.24	Average
10 *	0.59	44.30	-11.70	56.00	24.40	9.66	10.24	QP
11	5.53	32.80	-17.20	50.00	12.89	9.65	10.26	Average
12	5.53	41.20	-18.80	60.00	21.29	9.65	10.26	QP



Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

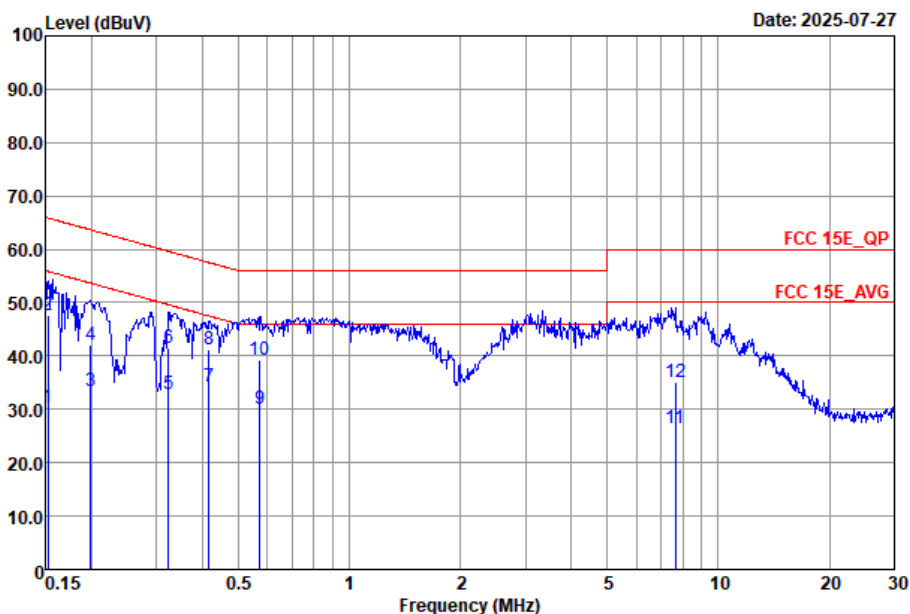

Site : CO02-SZ
Condition : FCC 15E_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15	30.46	-25.41	55.87	10.69	9.58	10.19	Average
2	0.15	47.56	-18.31	65.87	27.79	9.58	10.19	QP
3	0.20	33.33	-20.34	53.67	13.30	9.85	10.18	Average
4	0.20	42.13	-21.54	63.67	22.10	9.85	10.18	QP
5	0.32	32.74	-16.88	49.62	12.80	9.73	10.21	Average
6	0.32	41.64	-17.98	59.62	21.70	9.73	10.21	QP
7	0.42	34.21	-13.30	47.51	14.10	9.88	10.23	Average
8 *	0.42	41.11	-16.40	57.51	21.00	9.88	10.23	QP
9	0.57	30.07	-15.93	46.00	10.20	9.63	10.24	Average
10	0.57	39.27	-16.73	56.00	19.40	9.63	10.24	QP
11	7.65	26.35	-23.65	50.00	6.39	9.74	10.22	Average
12	7.65	35.05	-24.95	60.00	15.09	9.74	10.22	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Winter	Relative Humidity :	48~49%
		Temperature :	24-25℃

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	22	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	22	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	22	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	22	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	22	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	22	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	22	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	22	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	22	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	22	802.11ax HE20	36	5180	MCS0	-	-
Mode 11	U-NII-1	5.15-5.25	22	802.11ax HE20	44	5220	MCS0	-	-
Mode 12	U-NII-1	5.15-5.25	22	802.11ax HE20	48	5240	MCS0	-	-
Mode 13	U-NII-2A	5.25-5.35	22	802.11ax HE20	52	5260	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	22	802.11ax HE20	60	5300	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	22	802.11ax HE20	64	5320	MCS0	-	-
Mode 16	U-NII-2C	5.47-5.725	22	802.11ax HE20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	22	802.11ax HE20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	22	802.11ax HE20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	22	802.11ax HE40	38	5190	MCS0	-	-
Mode 20	U-NII-1	5.15-5.25	22	802.11ax HE40	46	5230	MCS0	-	-
Mode 21	U-NII-2A	5.25-5.35	22	802.11ax HE40	54	5270	MCS0	-	-
Mode 22	U-NII-2A	5.25-5.35	22	802.11ax HE40	62	5310	MCS0	-	-
Mode 23	U-NII-2C	5.47-5.725	22	802.11ax HE40	102	5510	MCS0	-	-
Mode 24	U-NII-2C	5.47-5.725	22	802.11ax HE40	134	5670	MCS0	-	-
Mode 25	U-NII-1	5.15-5.25	22	802.11ax HE80	42	5210	MCS0	-	-
Mode 26	U-NII-2A	5.25-5.35	22	802.11ax HE80	58	5290	MCS0	-	-
Mode 27	U-NII-2C	5.47-5.725	22	802.11ax HE80	106	5530	MCS0	-	-
Mode 28	U-NII-2C	5.47-5.725	22	802.11ax HE80	122	5610	MCS0	-	-
Mode 29	U-NII-2C	5.47-5.85	22	802.11a	144	5720	6Mbps	-	-
Mode 30	U-NII-2C	5.47-5.85	22	802.11ax HE20	144	5720	MCS0	-	-
Mode 31	U-NII-2C	5.47-5.85	22	802.11ax HE40	142	5710	MCS0	-	-
Mode 32	U-NII-2C	5.47-5.85	22	802.11ax HE80	138	5690	MCS0	-	-
Mode 33	U-NII-3	5.725-5.85	22	802.11a	149	5745	6Mbps	-	-
Mode 34	U-NII-3	5.725-5.85	22	802.11a	157	5785	6Mbps	-	-
Mode 35	U-NII-3	5.725-5.85	22	802.11a	165	5825	6Mbps	-	-
Mode 36	U-NII-3	5.725-5.85	22	802.11ax HE20	149	5745	MCS0	-	-
Mode 37	U-NII-3	5.725-5.85	22	802.11ax HE20	157	5785	MCS0	-	-
Mode 38	U-NII-3	5.725-5.85	22	802.11ax HE20	165	5825	MCS0	-	-
Mode 39	U-NII-3	5.725-5.85	22	802.11ax HE40	151	5755	MCS0	-	-



Mode 40	U-NII-3	5.725-5.85	22	802.11ax HE40	159	5795	MCS0	-	-
Mode 41	U-NII-3	5.725-5.85	22	802.11ax HE80	155	5775	MCS0	-	-
Mode 42	U-NII-1	5.15-5.25	22	802.11ax HE20	36	5180	MCS0	Partial RU	-
Mode 43	U-NII-2A	5.25-5.35	22	802.11ax HE20	64	5320	MCS0	Partial RU	-
Mode 44	U-NII-2C	5.47-5.725	22	802.11ax HE20	100	5500	MCS0	Partial RU	-
Mode 45	U-NII-2C	5.47-5.725	22	802.11ax HE20	140	5700	MCS0	Partial RU	-
Mode 46	U-NII-3	5.725-5.85	22	802.11ax HE20	149	5745	MCS0	Partial RU	-
Mode 47	U-NII-3	5.725-5.85	22	802.11ax HE20	165	5825	MCS0	Partial RU	-
Mode 48	U-NII-1	5.15-5.25	22	802.11n HT20	36	5180	MCS0	-	-
Mode 49	U-NII-1	5.15-5.25	22	802.11n HT20	44	5220	MCS0	-	-
Mode 50	U-NII-1	5.15-5.25	22	802.11n HT20	48	5240	MCS0	-	-
Mode 51	U-NII-2A	5.25-5.35	22	802.11n HT20	52	5260	MCS0	-	-
Mode 52	U-NII-2A	5.25-5.35	22	802.11n HT20	60	5300	MCS0	-	-
Mode 53	U-NII-2A	5.25-5.35	22	802.11n HT20	64	5320	MCS0	-	-
Mode 54	U-NII-2C	5.47-5.725	22	802.11n HT20	100	5500	MCS0	-	-
Mode 55	U-NII-2C	5.47-5.725	22	802.11n HT20	116	5580	MCS0	-	-
Mode 56	U-NII-2C	5.47-5.725	22	802.11n HT20	140	5700	MCS0	-	-
Mode 57	U-NII-1	5.15-5.25	22	802.11n HT40	38	5190	MCS0	-	-
Mode 58	U-NII-1	5.15-5.25	22	802.11n HT40	46	5230	MCS0	-	-
Mode 59	U-NII-2A	5.25-5.35	22	802.11n HT40	54	5270	MCS0	-	-
Mode 60	U-NII-2A	5.25-5.35	22	802.11n HT40	62	5310	MCS0	-	-
Mode 61	U-NII-2C	5.47-5.725	22	802.11n HT40	102	5510	MCS0	-	-
Mode 62	U-NII-2C	5.47-5.725	22	802.11n HT40	134	5670	MCS0	-	-
Mode 63	U-NII-1	5.15-5.25	22	802.11ac VHT80	42	5210	MCS0	-	-
Mode 64	U-NII-2A	5.25-5.35	22	802.11ac VHT80	58	5290	MCS0	-	-
Mode 65	U-NII-2C	5.47-5.725	22	802.11ac VHT80	106	5530	MCS0	-	-
Mode 66	U-NII-2C	5.47-5.725	22	802.11ac VHT80	122	5610	MCS0	-	-
Mode 67	U-NII-3	5.725-5.85	22	802.11n HT20	149	5745	MCS0	-	-
Mode 68	U-NII-3	5.725-5.85	22	802.11n HT20	157	5785	MCS0	-	-
Mode 69	U-NII-3	5.725-5.85	22	802.11n HT20	165	5825	MCS0	-	-
Mode 70	U-NII-3	5.725-5.85	22	802.11n HT40	151	5755	MCS0	-	-
Mode 71	U-NII-3	5.725-5.85	22	802.11n HT40	159	5795	MCS0	-	-
Mode 72	U-NII-3	5.725-5.85	22	802.11ac VHT80	155	5775	MCS0	-	-
Mode 73	U-NII-1	5.15-5.25	22	802.11ax HE20	36	5180	MCS0	-	LF
Mode 74	U-NII-3	5.725-5.85	22	802.11ax HE40	159	5795	MCS0	-	LF

Remark: For 802.11n/ac/ax 20M/40M/80MHz mode, the conducted testing have assessed only 802.11n HT20/HT40/ac VHT80 & 802.11ax HE20/HE40/HE80 by referring to the higher output power.



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	-	-	-	-	-	-	-	Band Edge
1	802.11a	36	10360.00	47.61	68.30	-20.69	H	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	46.25	68.30	-22.05	V	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	46.55	68.30	-21.75	H	Peak	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520.00	48.09	68.30	-20.21	V	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	15900.00	47.69	74.00	-26.31	H	Peak	Pass	Harmonic
6	802.11a	64	-	-	-	-	-	-	-	Band Edge
6	802.11a	64	15960.00	48.74	74.00	-25.26	H	Peak	Pass	Harmonic
7	802.11a	100	-	-	-	-	-	-	-	Band Edge
7	802.11a	100	16500.00	48.55	68.30	-19.75	H	Peak	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	16740.00	48.15	68.30	-20.15	V	Peak	Pass	Harmonic
9	802.11a	140	5727.11	63.96	68.30	-4.34	V	PEAK	Pass	Band Edge
9	802.11a	140	17100.00	48.10	68.30	-20.20	V	Peak	Pass	Harmonic
10	802.11ax HE20	36	5149.58	51.54	54.00	-2.46	H	AVERAGE	Pass	Band Edge
10	802.11ax HE20	36	10360.00	46.44	68.30	-21.86	H	Peak	Pass	Harmonic
11	802.11ax HE20	44	-	-	-	-	-	-	-	Band Edge
11	802.11ax HE20	44	10440.00	47.69	68.30	-20.61	V	Peak	Pass	Harmonic
12	802.11ax HE20	48	5104.16	41.48	54.00	-12.52	V	AVERAGE	Pass	Band Edge
12	802.11ax HE20	48	10480.00	48.01	68.30	-20.29	H	Peak	Pass	Harmonic
13	802.11ax HE20	52	5353.00	41.98	54.00	-12.02	H	AVERAGE	Pass	Band Edge
13	802.11ax HE20	52	10520.00	47.11	68.30	-21.19	H	Peak	Pass	Harmonic
14	802.11ax HE20	60	-	-	-	-	-	-	-	Band Edge
14	802.11ax HE20	60	10600.00	48.13	74.00	-25.87	H	Peak	Pass	Harmonic
15	802.11ax HE20	64	5350.52	48.60	54.00	-5.40	H	AVERAGE	Pass	Band Edge
15	802.11ax HE20	64	10640.00	48.30	74.00	-25.70	H	Peak	Pass	Harmonic
16	802.11ax HE20	100	5469.85	62.39	68.30	-5.91	H	PEAK	Pass	Band Edge
16	802.11ax HE20	100	16500.00	46.65	68.30	-21.65	V	Peak	Pass	Harmonic
17	802.11ax HE20	116	-	-	-	-	-	-	-	Band Edge
17	802.11ax HE20	116	16740.00	47.83	68.30	-20.47	V	Peak	Pass	Harmonic
18	802.11ax HE20	140	5725.61	65.06	68.30	-3.24	H	PEAK	Pass	Band Edge
18	802.11ax HE20	140	17100.00	48.48	68.30	-19.82	V	Peak	Pass	Harmonic
19	802.11ax HE40	38	5147.63	51.01	54.00	-2.99	H	AVERAGE	Pass	Band Edge
19	802.11ax HE40	38	-	-	-	-	-	-	-	Harmonic
20	802.11ax HE40	46	5149.73	45.31	54.00	-8.69	H	AVERAGE	Pass	Band Edge
20	802.11ax HE40	46	-	-	-	-	-	-	-	Harmonic
21	802.11ax HE40	54	5351.70	44.86	54.00	-9.14	H	AVERAGE	Pass	Band Edge
21	802.11ax HE40	54	-	-	-	-	-	-	-	Harmonic
22	802.11ax HE40	62	5350.20	50.09	54.00	-3.91	H	AVERAGE	Pass	Band Edge
22	802.11ax HE40	62	-	-	-	-	-	-	-	Harmonic



23	802.11ax HE40	102	5467.76	64.53	68.30	-3.77	H	PEAK	Pass	Band Edge
23	802.11ax HE40	102	-	-	-	-	-	-	-	Harmonic
24	802.11ax HE40	134	5733.94	65.27	68.30	-3.03	H	PEAK	Pass	Band Edge
24	802.11ax HE40	134	-	-	-	-	-	-	-	Harmonic
25	802.11ax HE80	42	5145.32	49.44	54.00	-4.56	H	AVERAGE	Pass	Band Edge
25	802.11ax HE80	42	-	-	-	-	-	-	-	Harmonic
26	802.11ax HE80	58	5350.69	48.17	54.00	-5.83	H	AVERAGE	Pass	Band Edge
26	802.11ax HE80	58	-	-	-	-	-	-	-	Harmonic
27	802.11ax HE80	106	5455.48	46.52	54.00	-7.48	H	AVERAGE	Pass	Band Edge
27	802.11ax HE80	106	-	-	-	-	-	-	-	Harmonic
28	802.11ax HE80	122	5451.40	43.75	54.00	-10.25	V	AVERAGE	Pass	Band Edge
28	802.11ax HE80	122	-	-	-	-	-	-	-	Harmonic
29	802.11a	144	-	-	-	-	-	-	-	Band Edge
29	802.11a	144	17160.00	47.72	68.30	-20.58	H	Peak	Pass	Harmonic
30	802.11ax HE20	144	-	-	-	-	-	-	-	Band Edge
30	802.11ax HE20	144	17160.00	47.47	68.30	-20.83	H	Peak	Pass	Harmonic
31	802.11ax HE40	142	5458.35	42.20	54.00	-11.80	H	Peak	Pass	Band Edge
31	802.11ax HE40	142	-	-	-	-	-	-	-	Harmonic
32	802.11ax HE80	138	5459.45	44.02	54.00	-9.98	H	Peak	Pass	Band Edge
32	802.11ax HE80	138	-	-	-	-	-	-	-	Harmonic
33	802.11a	149	-	-	-	-	-	-	-	Band Edge
33	802.11a	149	17235.00	47.80	68.30	-20.50	V	Peak	Pass	Harmonic
34	802.11a	157	-	-	-	-	-	-	-	Band Edge
34	802.11a	157	17355.00	48.70	68.30	-19.60	H	Peak	Pass	Harmonic
35	802.11a	165	-	-	-	-	-	-	-	Band Edge
35	802.11a	165	17475.00	48.52	68.30	-19.78	H	Peak	Pass	Harmonic
36	802.11ax HE20	149	5646.11	53.01	68.30	-15.29	H	PEAK	Pass	Band Edge
36	802.11ax HE20	149	17235.00	49.93	68.30	-18.37	V	Peak	Pass	Harmonic
37	802.11ax HE20	157	-	-	-	-	-	-	-	Band Edge
37	802.11ax HE20	157	17355.00	50.18	68.30	-18.12	V	Peak	Pass	Harmonic
38	802.11ax HE20	165	5926.63	53.63	68.30	-14.67	H	PEAK	Pass	Band Edge
38	802.11ax HE20	165	17475.00	50.18	68.30	-18.12	V	Peak	Pass	Harmonic
39	802.11ax HE40	151	5649.14	53.91	68.30	-14.39	V	PEAK	Pass	Band Edge
39	802.11ax HE40	151	-	-	-	-	-	-	-	Harmonic
40	802.11ax HE40	159	5929.08	54.55	68.30	-13.75	V	PEAK	Pass	Band Edge
40	802.11ax HE40	159	17385.00	49.51	68.30	-18.79	V	Peak	Pass	Harmonic
41	802.11ax HE80	155	5646.73	53.44	68.30	-14.86	V	PEAK	Pass	Band Edge
41	802.11ax HE80	155	-	-	-	-	-	-	-	Harmonic
42	802.11ax HE20	36	5102.60	41.82	54.00	-12.18	H	AVERAGE	Pass	Band Edge
42	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
43	802.11ax HE20	64	5458.74	41.90	54.00	-12.10	H	AVERAGE	Pass	Band Edge
43	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
44	802.11ax HE20	100	5456.95	42.24	54.00	-11.76	H	AVERAGE	Pass	Band Edge
44	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
45	802.11ax HE20	140	5743.62	53.18	68.30	-15.12	H	PEAK	Pass	Band Edge
45	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic



46	802.11ax HE20	149	5643.21	52.42	68.30	-15.88	V	PEAK	Pass	Band Edge
46	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
47	802.11ax HE20	165	5945.75	53.36	68.30	-14.94	V	PEAK	Pass	Band Edge
47	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
48	802.11n HT20	36	5149.94	42.09	54.00	-11.91	H	AVERAGE	Pass	Band Edge
48	802.11n HT20	36	10360.00	47.17	68.30	-21.13	V	Peak	Pass	Harmonic
49	802.11n HT20	44	-	-	-	-	-	-	-	Band Edge
49	802.11n HT20	44	10440.00	47.98	68.30	-20.32	H	Peak	Pass	Harmonic
50	802.11n HT20	48	5107.52	41.73	54.00	-12.27	H	AVERAGE	Pass	Band Edge
50	802.11n HT20	48	10480.00	48.47	68.30	-19.83	H	Peak	Pass	Harmonic
51	802.11n HT20	52	5459.00	41.64	54.00	-12.36	V	AVERAGE	Pass	Band Edge
51	802.11n HT20	52	10520.00	46.31	68.30	-21.99	H	Peak	Pass	Harmonic
52	802.11n HT20	60	-	-	-	-	-	-	-	Band Edge
52	802.11n HT20	60	10600.00	46.51	74.00	-27.49	H	Peak	Pass	Harmonic
53	802.11n HT20	64	5350.24	43.61	54.00	-10.39	H	AVERAGE	Pass	Band Edge
53	802.11n HT20	64	10640.00	47.42	74.00	-26.58	H	Peak	Pass	Harmonic
54	802.11n HT20	100	5468.65	59.47	68.30	-8.83	V	PEAK	Pass	Band Edge
54	802.11n HT20	100	16500.00	46.59	68.30	-21.71	V	Peak	Pass	Harmonic
55	802.11n HT20	116	-	-	-	-	-	-	-	Band Edge
55	802.11n HT20	116	16740.00	46.95	68.30	-21.35	V	Peak	Pass	Harmonic
56	802.11n HT20	140	5725.03	65.20	68.30	-3.10	H	PEAK	Pass	Band Edge
56	802.11n HT20	140	17100.00	48.78	68.30	-19.52	V	Peak	Pass	Harmonic
57	802.11n HT40	38	5149.72	44.05	54.00	-9.95	H	AVERAGE	Pass	Band Edge
57	802.11n HT40	38	-	-	-	-	-	-	-	Harmonic
58	802.11n HT40	46	5147.20	44.08	54.00	-9.92	H	AVERAGE	Pass	Band Edge
58	802.11n HT40	46	-	-	-	-	-	-	-	Harmonic
59	802.11n HT40	54	5354.93	43.00	54.00	-11.00	H	AVERAGE	Pass	Band Edge
59	802.11n HT40	54	-	-	-	-	-	-	-	Harmonic
60	802.11n HT40	62	5350.65	45.21	54.00	-8.79	H	AVERAGE	Pass	Band Edge
60	802.11n HT40	62	-	-	-	-	-	-	-	Harmonic
61	802.11n HT40	102	5459.92	43.35	54.00	-10.65	H	AVERAGE	Pass	Band Edge
61	802.11n HT40	102	-	-	-	-	-	-	-	Harmonic
62	802.11n HT40	134	5457.84	41.88	54.00	-12.12	V	AVERAGE	Pass	Band Edge
62	802.11n HT40	134	-	-	-	-	-	-	-	Harmonic
63	802.11ac VHT80	42	5149.94	45.97	54.00	-8.03	H	AVERAGE	Pass	Band Edge
63	802.11ac VHT80	42	-	-	-	-	-	-	-	Harmonic
64	802.11ac VHT80	58	5354.26	48.23	54.00	-5.77	H	AVERAGE	Pass	Band Edge
64	802.11ac VHT80	58	-	-	-	-	-	-	-	Harmonic
65	802.11ac VHT80	106	5457.64	47.07	54.00	-6.93	H	AVERAGE	Pass	Band Edge
65	802.11ac VHT80	106	-	-	-	-	-	-	-	Harmonic
66	802.11ac VHT80	122	5459.20	43.77	54.00	-10.23	H	AVERAGE	Pass	Band Edge
66	802.11ac VHT80	122	-	-	-	-	-	-	-	Harmonic
67	802.11n HT20	149	5647.71	53.00	68.30	-15.30	V	PEAK	Pass	Band Edge
67	802.11n HT20	149	17235.00	48.25	68.30	-20.05	V	Peak	Pass	Harmonic
68	802.11n HT20	157	-	-	-	-	-	-	-	Band Edge
68	802.11n HT20	157	17355.00	49.22	68.30	-19.08	V	Peak	Pass	Harmonic

69	802.11n HT20	165	5936.38	53.65	68.30	-14.65	H	PEAK	Pass	Band Edge
69	802.11n HT20	165	17475.00	49.46	68.30	-18.84	V	Peak	Pass	Harmonic
70	802.11n HT40	151	5627.75	53.64	68.30	-14.66	V	PEAK	Pass	Band Edge
70	802.11n HT40	151	-	-	-	-	-	-	-	Harmonic
71	802.11n HT40	159	5933.73	53.15	68.30	-15.15	H	PEAK	Pass	Band Edge
71	802.11n HT40	159	-	-	-	-	-	-	-	Harmonic
72	802.11ac VHT80	155	5941.25	52.97	68.30	-15.33	H	PEAK	Pass	Band Edge
72	802.11ac VHT80	155	-	-	-	-	-	-	-	Harmonic
73	802.11ax HE20	(36)	33.88	30.55	40	-9.45	V	PEAK	PASS	LF
74	802.11ax HE40	(159)	33.88	30.81	40	-9.19	V	PEAK	PASS	LF

Co-location



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 75	U-NII-1	5.15-5.25	22	802.11ax HE20	36	5180	MCS0	-	-
	LTE B13 link							-	-
Mode 76	U-NII-1	5.15-5.25	22	802.11ax HE20	36	5180	MCS0	-	-
	2.4G	2400-2483.5	22	Bluetooth-LE	39	2480	125kbps	-	-
	LTE B13 link							-	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
75	802.11ax HE20	36	5149.76	50.83	54.00	-3.17	H	AVERAGE	Pass	Band Edge
75	802.11ax HE20	36	10360.00	47.73	68.30	-20.57	H	Peak	Pass	Harmonic
76	802.11ax HE20	36	5149.94	51.51	54.00	-2.49	H	AVERAGE	Pass	Band Edge
76	802.11ax HE20	36	10360.00	47.27	68.30	-21.03	H	Peak	Pass	Harmonic

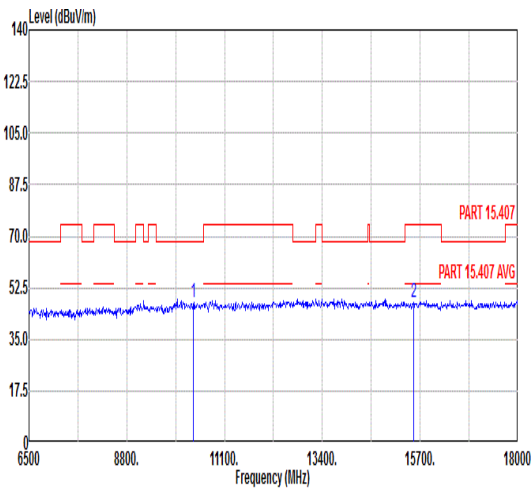
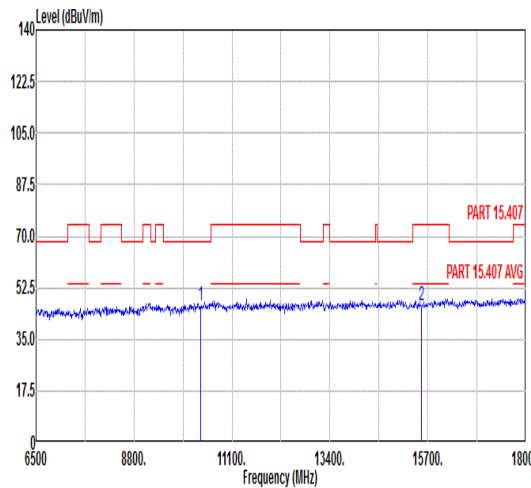


Mode	1																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																																	
ANT	22																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10360.00</td><td>47.61</td><td>68.30</td><td>-20.69</td><td>61.27</td><td>38.04</td><td>12.06</td><td>63.76</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.33</td><td>74.00</td><td>-26.67</td><td>56.22</td><td>40.91</td><td>14.58</td><td>64.38</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10360.00	47.61	68.30	-20.69	61.27	38.04	12.06	63.76	---	---	Peak	2	15540.00	47.33	74.00	-26.67	56.22	40.91	14.58	64.38	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10360.00</td><td>46.61</td><td>68.30</td><td>-21.69</td><td>60.27</td><td>38.04</td><td>12.06</td><td>63.76</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>46.24</td><td>74.00</td><td>-27.76</td><td>55.13</td><td>40.91</td><td>14.58</td><td>64.38</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10360.00	46.61	68.30	-21.69	60.27	38.04	12.06	63.76	---	---	Peak	2	15540.00	46.24	74.00	-27.76	55.13	40.91	14.58	64.38	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10360.00	47.61	68.30	-20.69	61.27	38.04	12.06	63.76	---	---	Peak																																																																																																																							
2	15540.00	47.33	74.00	-26.67	56.22	40.91	14.58	64.38	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10360.00	46.61	68.30	-21.69	60.27	38.04	12.06	63.76	---	---	Peak																																																																																																																							
2	15540.00	46.24	74.00	-27.76	55.13	40.91	14.58	64.38	---	---	Peak																																																																																																																							

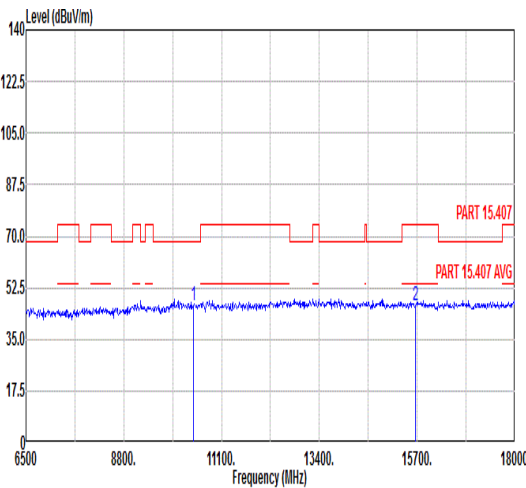
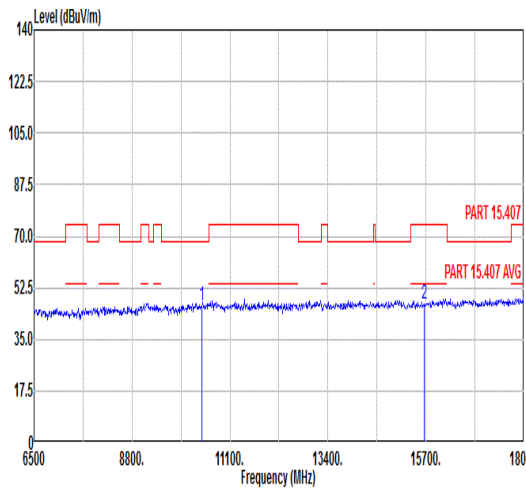


Mode	2																																																																																																																	
	Harmonic																																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																																	
ANT	22																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																											
Peak Avg																																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>46.23</td><td>68.30</td><td>-22.07</td><td>59.75</td><td>38.08</td><td>12.12</td><td>63.72</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>46.67</td><td>74.00</td><td>-27.33</td><td>55.44</td><td>41.05</td><td>14.64</td><td>64.46</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	46.23	68.30	-22.07	59.75	38.08	12.12	63.72	---	---	Peak	2	15660.00	46.67	74.00	-27.33	55.44	41.05	14.64	64.46	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>46.25</td><td>68.30</td><td>-22.05</td><td>59.77</td><td>38.08</td><td>12.12</td><td>63.72</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>46.95</td><td>74.00</td><td>-27.05</td><td>55.72</td><td>41.05</td><td>14.64</td><td>64.46</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	46.25	68.30	-22.05	59.77	38.08	12.12	63.72	---	---	Peak	2	15660.00	46.95	74.00	-27.05	55.72	41.05	14.64	64.46	---	---
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	10440.00	46.23	68.30	-22.07	59.75	38.08	12.12	63.72	---	---	Peak																																																																																																							
2	15660.00	46.67	74.00	-27.33	55.44	41.05	14.64	64.46	---	---	Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	10440.00	46.25	68.30	-22.05	59.77	38.08	12.12	63.72	---	---	Peak																																																																																																							
2	15660.00	46.95	74.00	-27.05	55.72	41.05	14.64	64.46	---	---	Peak																																																																																																							

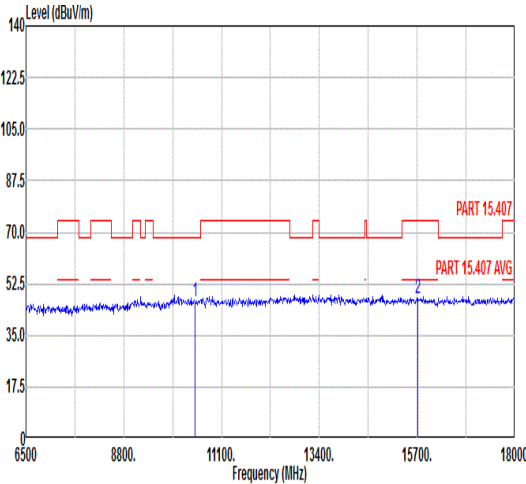
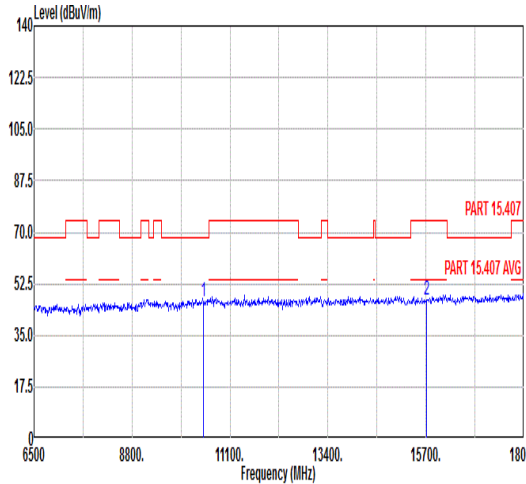


Mode	3																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																																																
ANT	22																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg																																																																																																																																	
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10480.00</td><td>46.55</td><td>68.30</td><td>-21.75</td><td>60.02</td><td>38.09</td><td>12.15</td><td>63.71</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>56.53</td><td>41.12</td><td>14.66</td><td>64.50</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10480.00	46.55	68.30	-21.75	60.02	38.09	12.15	63.71	---	---	Peak	2	15720.00	47.81	74.00	-26.19	56.53	41.12	14.66	64.50	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10480.00</td><td>46.40</td><td>68.30</td><td>-21.90</td><td>59.87</td><td>38.09</td><td>12.15</td><td>63.71</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.03</td><td>74.00</td><td>-26.97</td><td>55.75</td><td>41.12</td><td>14.66</td><td>64.50</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10480.00	46.40	68.30	-21.90	59.87	38.09	12.15	63.71	---	---	Peak	2	15720.00	47.03	74.00	-26.97	55.75	41.12	14.66	64.50	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	10480.00	46.55	68.30	-21.75	60.02	38.09	12.15	63.71	---	---	Peak																																																																																																																						
2	15720.00	47.81	74.00	-26.19	56.53	41.12	14.66	64.50	---	---	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	10480.00	46.40	68.30	-21.90	59.87	38.09	12.15	63.71	---	---	Peak																																																																																																																						
2	15720.00	47.03	74.00	-26.97	55.75	41.12	14.66	64.50	---	---	Peak																																																																																																																						



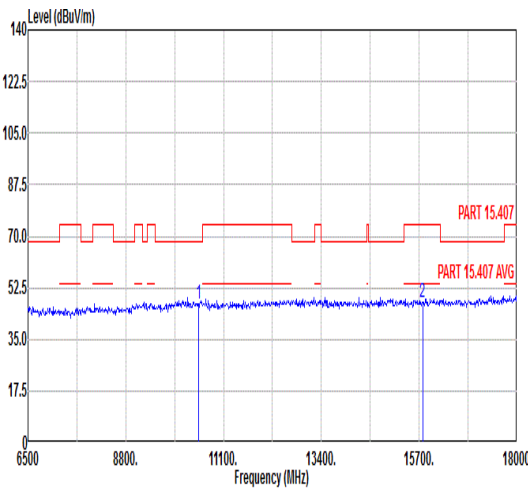
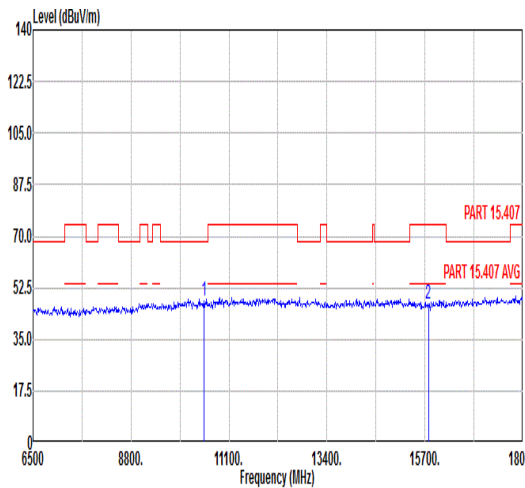


Mode	4																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																																																	
ANT	22																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10520.00</td><td>46.81</td><td>68.30</td><td>-21.49</td><td>60.21</td><td>38.11</td><td>12.18</td><td>63.69</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.61</td><td>74.00</td><td>-26.39</td><td>56.29</td><td>41.18</td><td>14.69</td><td>64.55</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10520.00	46.81	68.30	-21.49	60.21	38.11	12.18	63.69	---	---	Peak	2	15780.00	47.61	74.00	-26.39	56.29	41.18	14.69	64.55	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10520.00</td><td>48.09</td><td>68.30</td><td>-20.21</td><td>61.49</td><td>38.11</td><td>12.18</td><td>63.69</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.04</td><td>74.00</td><td>-26.96</td><td>55.72</td><td>41.18</td><td>14.69</td><td>64.55</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10520.00	48.09	68.30	-20.21	61.49	38.11	12.18	63.69	---	---	Peak	2	15780.00	47.04	74.00	-26.96	55.72	41.18	14.69	64.55	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10520.00	46.81	68.30	-21.49	60.21	38.11	12.18	63.69	---	---	Peak																																																																																																																							
2	15780.00	47.61	74.00	-26.39	56.29	41.18	14.69	64.55	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10520.00	48.09	68.30	-20.21	61.49	38.11	12.18	63.69	---	---	Peak																																																																																																																							
2	15780.00	47.04	74.00	-26.96	55.72	41.18	14.69	64.55	---	---	Peak																																																																																																																							

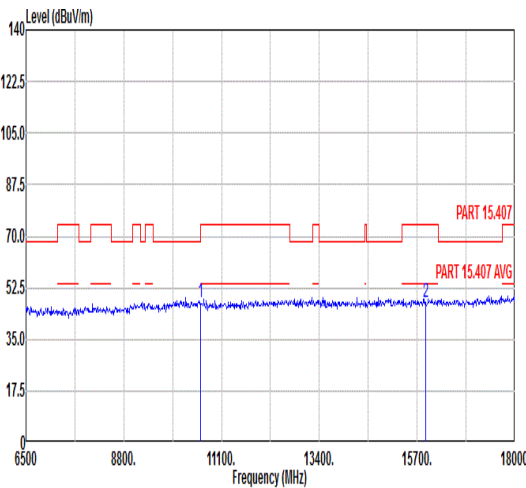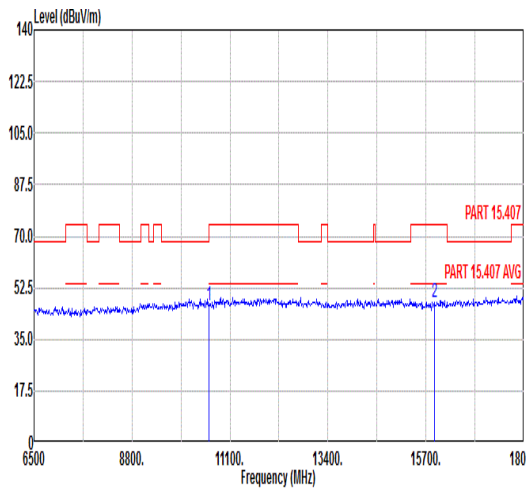

Mode	5																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																																																
ANT	22																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg																																																																																																																																	
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10600.00</td><td>47.29</td><td>74.00</td><td>-26.71</td><td>60.58</td><td>38.14</td><td>12.23</td><td>63.66</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>47.69</td><td>74.00</td><td>-26.31</td><td>56.25</td><td>41.32</td><td>14.75</td><td>64.63</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10600.00	47.29	74.00	-26.71	60.58	38.14	12.23	63.66	---	---	Peak	2	15900.00	47.69	74.00	-26.31	56.25	41.32	14.75	64.63	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10600.00</td><td>46.68</td><td>74.00</td><td>-27.32</td><td>59.97</td><td>38.14</td><td>12.23</td><td>63.66</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>47.29</td><td>74.00</td><td>-26.71</td><td>55.85</td><td>41.32</td><td>14.75</td><td>64.63</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10600.00	46.68	74.00	-27.32	59.97	38.14	12.23	63.66	---	---	Peak	2	15900.00	47.29	74.00	-26.71	55.85	41.32	14.75	64.63	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	10600.00	47.29	74.00	-26.71	60.58	38.14	12.23	63.66	---	---	Peak																																																																																																																						
2	15900.00	47.69	74.00	-26.31	56.25	41.32	14.75	64.63	---	---	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	10600.00	46.68	74.00	-27.32	59.97	38.14	12.23	63.66	---	---	Peak																																																																																																																						
2	15900.00	47.29	74.00	-26.71	55.85	41.32	14.75	64.63	---	---	Peak																																																																																																																						

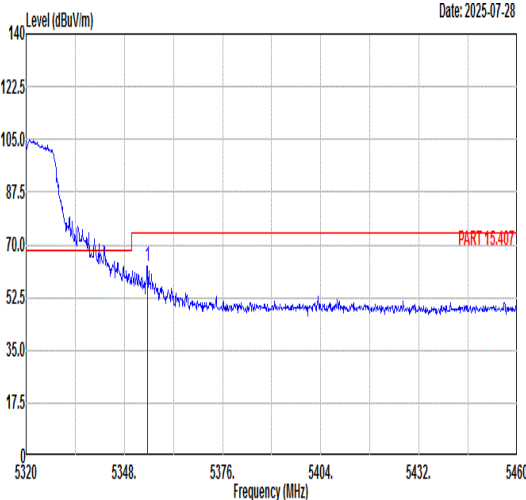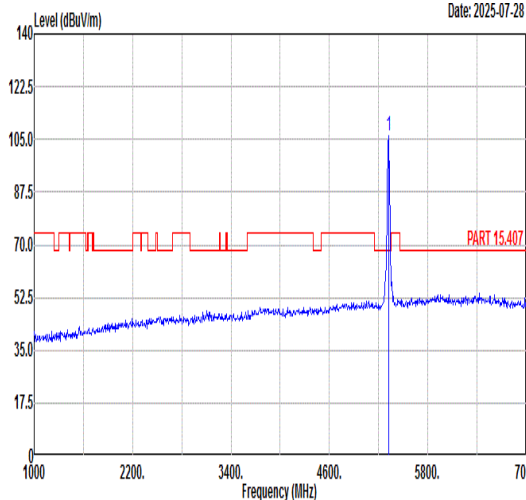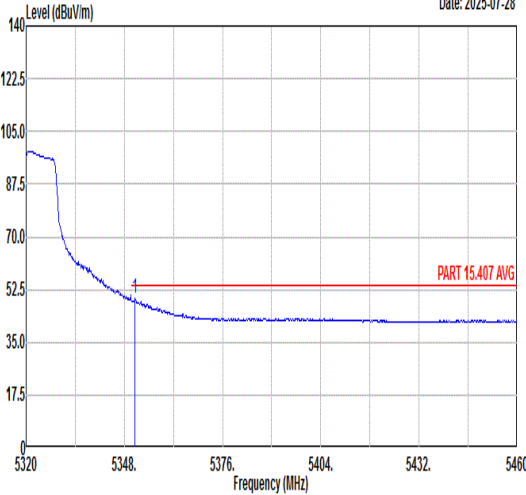
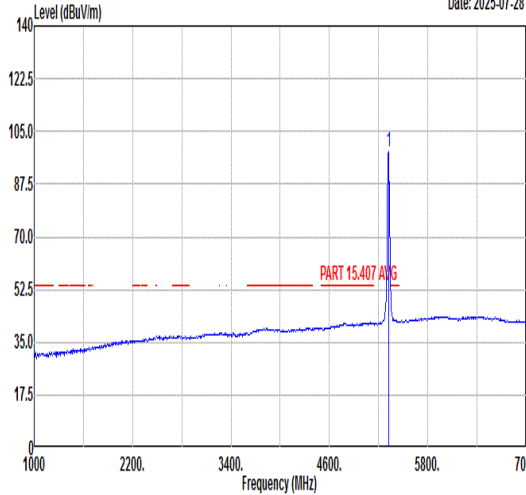


Mode	6																																																																																											
	Band Edge																																																																																											
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																											
ANT	22																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak																																																																																												
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5354.58</td><td>62.85</td><td>74.00</td><td>-11.15</td><td>51.48</td><td>35.41</td><td>9.39</td><td>33.43</td><td>100</td><td>73 PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5354.58	62.85	74.00	-11.15	51.48	35.41	9.39	33.43	100	73 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>106.07</td><td>-----</td><td>-----</td><td>94.91</td><td>35.39</td><td>9.21</td><td>33.44</td><td>100</td><td>73 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	106.07	-----	-----	94.91	35.39	9.21	33.44	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5354.58	62.85	74.00	-11.15	51.48	35.41	9.39	33.43	100	73 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5320.00	106.07	-----	-----	94.91	35.39	9.21	33.44	100	73 PEAK																																																																																		
Avg																																																																																												
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.08</td><td>49.69</td><td>54.00</td><td>-4.31</td><td>38.34</td><td>35.41</td><td>9.37</td><td>33.43</td><td>100</td><td>73 AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5351.08	49.69	54.00	-4.31	38.34	35.41	9.37	33.43	100	73 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>98.35</td><td>-----</td><td>-----</td><td>87.19</td><td>35.39</td><td>9.21</td><td>33.44</td><td>100</td><td>73 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	98.35	-----	-----	87.19	35.39	9.21	33.44	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5351.08	49.69	54.00	-4.31	38.34	35.41	9.37	33.43	100	73 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5320.00	98.35	-----	-----	87.19	35.39	9.21	33.44	100	73 AVERAGE																																																																																		





Mode	6																																									
	Band Edge																																									
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																									
ANT	22																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-07-28 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5351.08</td><td>52.69</td><td>74.00</td><td>-21.31</td><td>41.34</td><td>35.41</td><td>9.37</td><td>33.43</td><td>297</td><td>255 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5351.08	52.69	74.00	-21.31	41.34	35.41	9.37	33.43	297	255 PEAK	Level (dBuV/m) Date: 2025-07-28 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5320.00</td><td>95.37</td><td>-----</td><td>-----</td><td>84.21</td><td>35.39</td><td>9.21</td><td>33.44</td><td>297</td><td>255 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5320.00	95.37	-----	-----	84.21	35.39	9.21	33.44	297	255 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 5351.08	52.69	74.00	-21.31	41.34	35.41	9.37	33.43	297	255 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 5320.00	95.37	-----	-----	84.21	35.39	9.21	33.44	297	255 PEAK																																	
Avg	Level (dBuV/m) Date: 2025-07-28 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5350.80</td><td>42.33</td><td>54.00</td><td>-11.67</td><td>30.98</td><td>35.41</td><td>9.37</td><td>33.43</td><td>297</td><td>255 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5350.80	42.33	54.00	-11.67	30.98	35.41	9.37	33.43	297	255 AVERAGE	Level (dBuV/m) Date: 2025-07-28 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5320.00</td><td>88.06</td><td>-----</td><td>-----</td><td>76.90</td><td>35.39</td><td>9.21</td><td>33.44</td><td>297</td><td>255 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 5320.00	88.06	-----	-----	76.90	35.39	9.21	33.44	297	255 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 5350.80	42.33	54.00	-11.67	30.98	35.41	9.37	33.43	297	255 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 5320.00	88.06	-----	-----	76.90	35.39	9.21	33.44	297	255 AVERAGE																																	

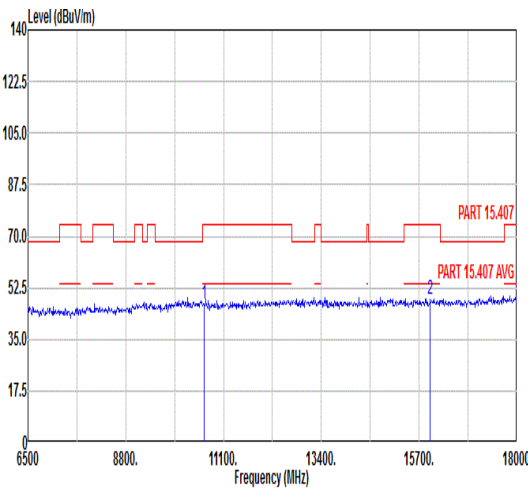
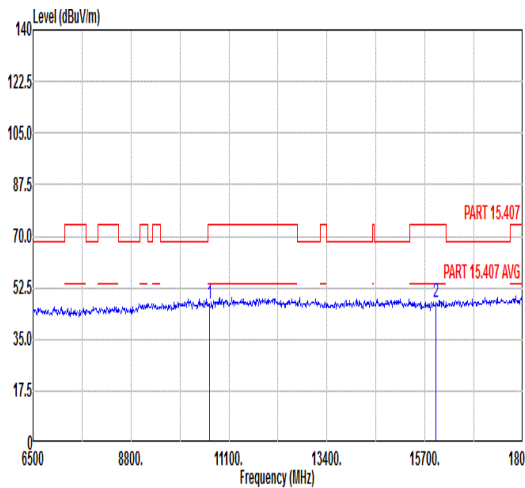


Mode	6																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																																																	
ANT	22																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10640.00</td><td>47.19</td><td>74.00</td><td>-26.81</td><td>60.41</td><td>38.16</td><td>12.26</td><td>63.64</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 15960.00</td><td>48.74</td><td>74.00</td><td>-25.26</td><td>57.25</td><td>41.39</td><td>14.77</td><td>64.67</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10640.00	47.19	74.00	-26.81	60.41	38.16	12.26	63.64	---	---	Peak		2 15960.00	48.74	74.00	-25.26	57.25	41.39	14.77	64.67	---	---	Peak		<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10640.00</td><td>47.08</td><td>74.00</td><td>-26.92</td><td>60.30</td><td>38.16</td><td>12.26</td><td>63.64</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 15960.00</td><td>47.31</td><td>74.00</td><td>-26.69</td><td>55.82</td><td>41.39</td><td>14.77</td><td>64.67</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10640.00	47.08	74.00	-26.92	60.30	38.16	12.26	63.64	---	---	Peak		2 15960.00	47.31	74.00	-26.69	55.82	41.39	14.77	64.67	---	---	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 10640.00	47.19	74.00	-26.81	60.41	38.16	12.26	63.64	---	---	Peak																																																																																																																								
2 15960.00	48.74	74.00	-25.26	57.25	41.39	14.77	64.67	---	---	Peak																																																																																																																								
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 10640.00	47.08	74.00	-26.92	60.30	38.16	12.26	63.64	---	---	Peak																																																																																																																								
2 15960.00	47.31	74.00	-26.69	55.82	41.39	14.77	64.67	---	---	Peak																																																																																																																								




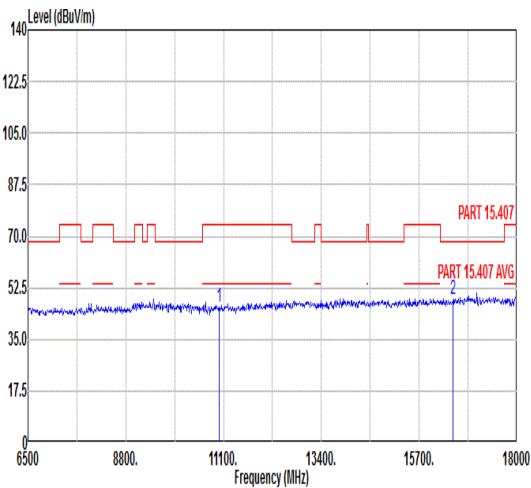
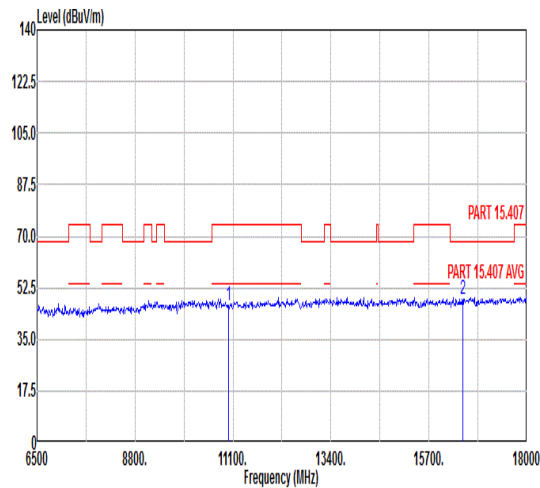


Mode	7																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																																																
ANT	22																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg																																																																																																																																	
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>45.87</td><td>74.00</td><td>-28.13</td><td>58.55</td><td>38.30</td><td>12.52</td><td>63.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.55</td><td>68.30</td><td>-19.75</td><td>56.13</td><td>42.00</td><td>15.17</td><td>64.75</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11000.00	45.87	74.00	-28.13	58.55	38.30	12.52	63.50	---	---	Peak	2	16500.00	48.55	68.30	-19.75	56.13	42.00	15.17	64.75	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>46.72</td><td>74.00</td><td>-27.28</td><td>59.40</td><td>38.30</td><td>12.52</td><td>63.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.35</td><td>68.30</td><td>-19.95</td><td>55.93</td><td>42.00</td><td>15.17</td><td>64.75</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11000.00	46.72	74.00	-27.28	59.40	38.30	12.52	63.50	---	---	Peak	2	16500.00	48.35	68.30	-19.95	55.93	42.00	15.17	64.75	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11000.00	45.87	74.00	-28.13	58.55	38.30	12.52	63.50	---	---	Peak																																																																																																																						
2	16500.00	48.55	68.30	-19.75	56.13	42.00	15.17	64.75	---	---	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11000.00	46.72	74.00	-27.28	59.40	38.30	12.52	63.50	---	---	Peak																																																																																																																						
2	16500.00	48.35	68.30	-19.95	55.93	42.00	15.17	64.75	---	---	Peak																																																																																																																						

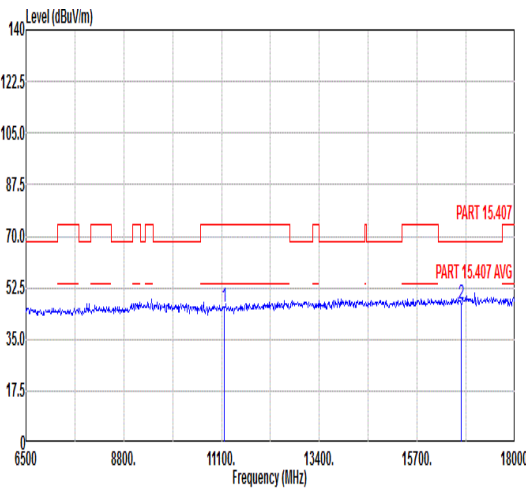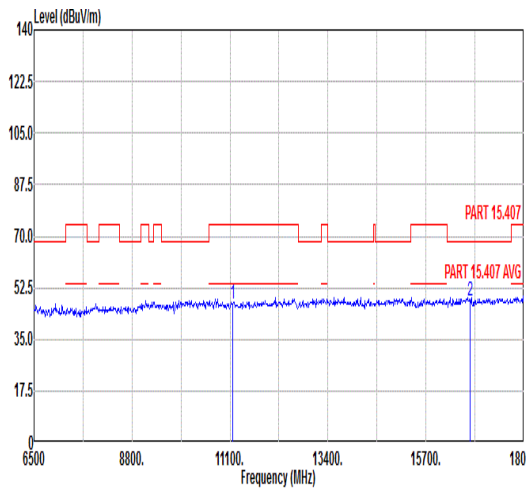

Mode	8																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																																																
ANT	22																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg																																																																																																																																	
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11160.00</td><td>46.22</td><td>74.00</td><td>-27.78</td><td>58.84</td><td>38.35</td><td>12.64</td><td>63.61</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>47.08</td><td>68.30</td><td>-21.22</td><td>54.23</td><td>42.27</td><td>15.35</td><td>64.77</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11160.00	46.22	74.00	-27.78	58.84	38.35	12.64	63.61	---	---	Peak	2	16740.00	47.08	68.30	-21.22	54.23	42.27	15.35	64.77	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11160.00</td><td>47.18</td><td>74.00</td><td>-26.82</td><td>59.80</td><td>38.35</td><td>12.64</td><td>63.61</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>48.15</td><td>68.30</td><td>-20.15</td><td>55.30</td><td>42.27</td><td>15.35</td><td>64.77</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11160.00	47.18	74.00	-26.82	59.80	38.35	12.64	63.61	---	---	Peak	2	16740.00	48.15	68.30	-20.15	55.30	42.27	15.35	64.77	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11160.00	46.22	74.00	-27.78	58.84	38.35	12.64	63.61	---	---	Peak																																																																																																																						
2	16740.00	47.08	68.30	-21.22	54.23	42.27	15.35	64.77	---	---	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11160.00	47.18	74.00	-26.82	59.80	38.35	12.64	63.61	---	---	Peak																																																																																																																						
2	16740.00	48.15	68.30	-20.15	55.30	42.27	15.35	64.77	---	---	Peak																																																																																																																						

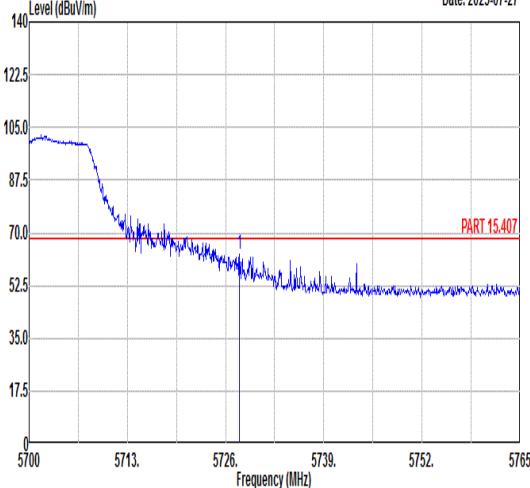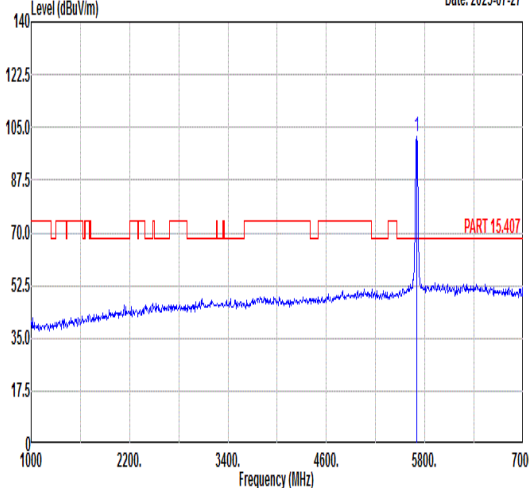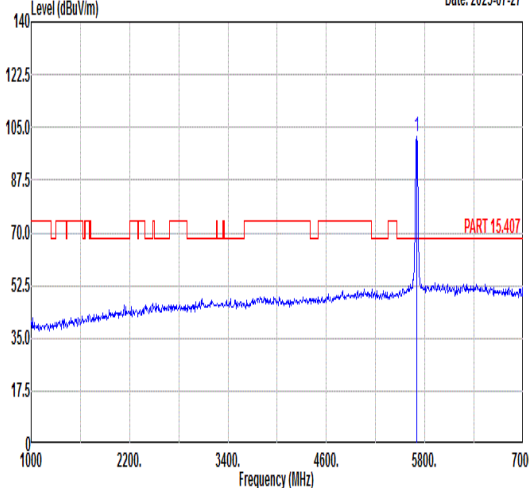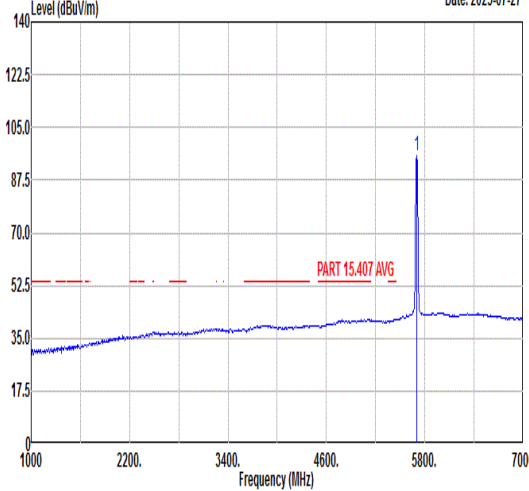
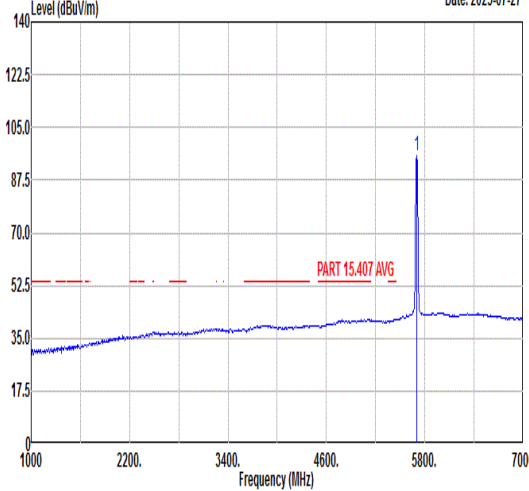


Mode	9																																																																																													
	Band Edge																																																																																													
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																													
ANT	22																																																																																													
Pol.	Horizontal						Fundamental																																																																																							
Peak	Level (dBuV/m) Date: 2025-07-27  Frequency (MHz) 570057135726573957525765 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5727.82</td><td>63.11</td><td>68.30</td><td>-5.19</td><td>50.72</td><td>35.82</td><td>10.02</td><td>33.45</td><td>100</td><td>78 PEAK</td></tr></table> <td colspan="6"> Level (dBuV/m) Date: 2025-07-27  Frequency (MHz) 100022003400460058007000 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>101.73</td><td>-----</td><td>-----</td><td>89.43</td><td>35.78</td><td>9.96</td><td>33.44</td><td>100</td><td>78 PEAK</td></tr></table> </td>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5727.82	63.11	68.30	-5.19	50.72	35.82	10.02	33.45	100	78 PEAK	Level (dBuV/m) Date: 2025-07-27  Frequency (MHz) 100022003400460058007000 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>101.73</td><td>-----</td><td>-----</td><td>89.43</td><td>35.78</td><td>9.96</td><td>33.44</td><td>100</td><td>78 PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	101.73	-----	-----	89.43	35.78	9.96	33.44	100	78 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5727.82	63.11	68.30	-5.19	50.72	35.82	10.02	33.45	100	78 PEAK																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5700.00	101.73	-----	-----	89.43	35.78	9.96	33.44	100	78 PEAK																																																																																				
Avg	Blank <td colspan="6"> Level (dBuV/m) Date: 2025-07-27  Frequency (MHz) 100022003400460058007000 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>95.38</td><td>-----</td><td>-----</td><td>83.08</td><td>35.78</td><td>9.96</td><td>33.44</td><td>100</td><td>78 AVERAGE</td></tr></table> </td>						Level (dBuV/m) Date: 2025-07-27  Frequency (MHz) 100022003400460058007000 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>95.38</td><td>-----</td><td>-----</td><td>83.08</td><td>35.78</td><td>9.96</td><td>33.44</td><td>100</td><td>78 AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	95.38	-----	-----	83.08	35.78	9.96	33.44	100	78 AVERAGE																																									
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5700.00	95.38	-----	-----	83.08	35.78	9.96	33.44	100	78 AVERAGE																																																																																				







Mode	9																																																																																			
	Band Edge																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																			
ANT	22																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5727.11</td><td>63.96</td><td>68.30</td><td>-4.34</td><td>51.57</td><td>35.82</td><td>10.02</td><td>33.45</td><td>309</td><td>250 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5727.11	63.96	68.30	-4.34	51.57	35.82	10.02	33.45	309	250 PEAK	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>98.74</td><td>-----</td><td>-----</td><td>86.44</td><td>35.78</td><td>9.96</td><td>33.44</td><td>309</td><td>250 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	98.74	-----	-----	86.44	35.78	9.96	33.44	309	250 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5727.11	63.96	68.30	-4.34	51.57	35.82	10.02	33.45	309	250 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	98.74	-----	-----	86.44	35.78	9.96	33.44	309	250 PEAK																																																																										
Avg	Blank	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>92.00</td><td>-----</td><td>-----</td><td>79.70</td><td>35.78</td><td>9.96</td><td>33.44</td><td>309</td><td>250 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	92.00	-----	-----	79.70	35.78	9.96	33.44	309	250 AVERAGE																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5700.00	92.00	-----	-----	79.70	35.78	9.96	33.44	309	250 AVERAGE																																																																										



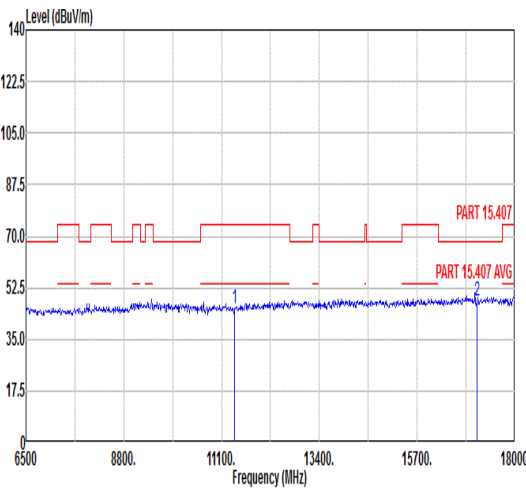
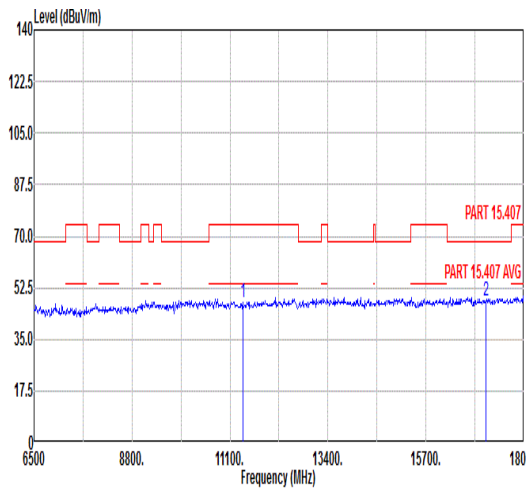


Mode	9																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																																																
ANT	22																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg																																																																																																																																	
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11400.00</td><td>45.35</td><td>74.00</td><td>-28.65</td><td>57.90</td><td>38.42</td><td>12.81</td><td>63.78</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>48.06</td><td>68.30</td><td>-20.24</td><td>54.67</td><td>42.68</td><td>15.62</td><td>64.91</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11400.00	45.35	74.00	-28.65	57.90	38.42	12.81	63.78	---	---	Peak	2	17100.00	48.06	68.30	-20.24	54.67	42.68	15.62	64.91	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11400.00</td><td>47.30</td><td>74.00</td><td>-26.70</td><td>59.85</td><td>38.42</td><td>12.81</td><td>63.78</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>48.10</td><td>68.30</td><td>-20.20</td><td>54.71</td><td>42.68</td><td>15.62</td><td>64.91</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11400.00	47.30	74.00	-26.70	59.85	38.42	12.81	63.78	---	---	Peak	2	17100.00	48.10	68.30	-20.20	54.71	42.68	15.62	64.91	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11400.00	45.35	74.00	-28.65	57.90	38.42	12.81	63.78	---	---	Peak																																																																																																																						
2	17100.00	48.06	68.30	-20.24	54.67	42.68	15.62	64.91	---	---	Peak																																																																																																																						
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	11400.00	47.30	74.00	-26.70	59.85	38.42	12.81	63.78	---	---	Peak																																																																																																																						
2	17100.00	48.10	68.30	-20.20	54.71	42.68	15.62	64.91	---	---	Peak																																																																																																																						

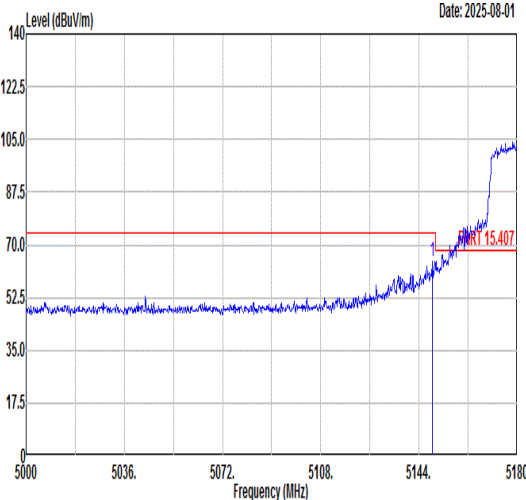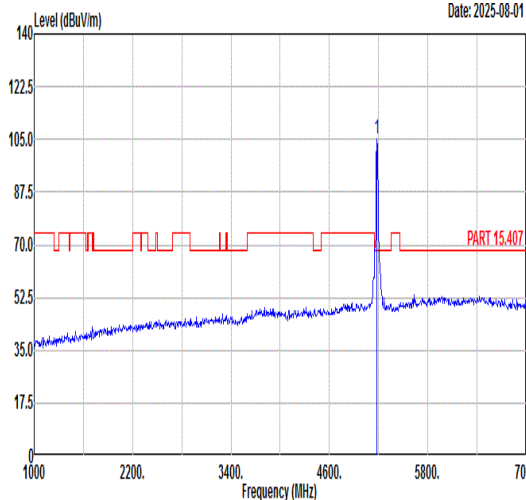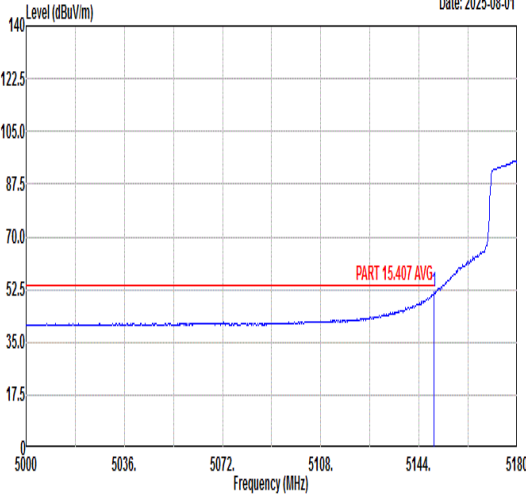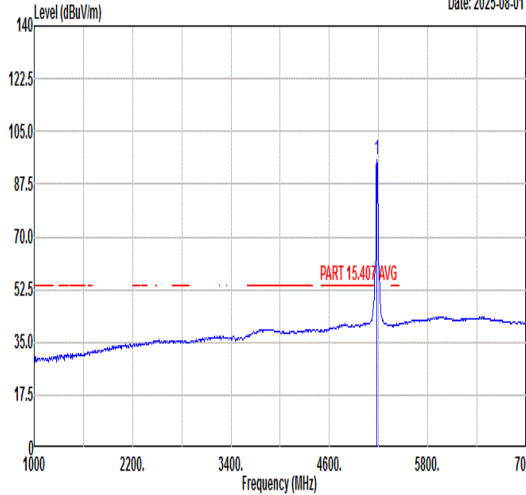

Mode	10																																																																																										
	Band Edge																																																																																										
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_5180MHz																																																																																										
ANT	22																																																																																										
Pol.	Horizontal					Fundamental																																																																																					
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.86</td><td>64.49</td><td>74.00</td><td>-9.51</td><td>54.14</td><td>35.29</td><td>8.53</td><td>33.47</td><td>100</td><td>51 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5148.86	64.49	74.00	-9.51	54.14	35.29	8.53	33.47	100	51 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>105.23</td><td>-----</td><td>-----</td><td>94.79</td><td>35.31</td><td>8.59</td><td>33.46</td><td>100</td><td>51 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	105.23	-----	-----	94.79	35.31	8.59	33.46	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5148.86	64.49	74.00	-9.51	54.14	35.29	8.53	33.47	100	51 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5180.00	105.23	-----	-----	94.79	35.31	8.59	33.46	100	51 PEAK																																																																																	
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.58</td><td>51.54</td><td>54.00</td><td>-2.46</td><td>41.19</td><td>35.29</td><td>8.53</td><td>33.47</td><td>100</td><td>51 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.58	51.54	54.00	-2.46	41.19	35.29	8.53	33.47	100	51 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>95.49</td><td>-----</td><td>-----</td><td>85.05</td><td>35.31</td><td>8.59</td><td>33.46</td><td>100</td><td>51 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	95.49	-----	-----	85.05	35.31	8.59	33.46	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5149.58	51.54	54.00	-2.46	41.19	35.29	8.53	33.47	100	51 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5180.00	95.49	-----	-----	85.05	35.31	8.59	33.46	100	51 AVERAGE																																																																																	

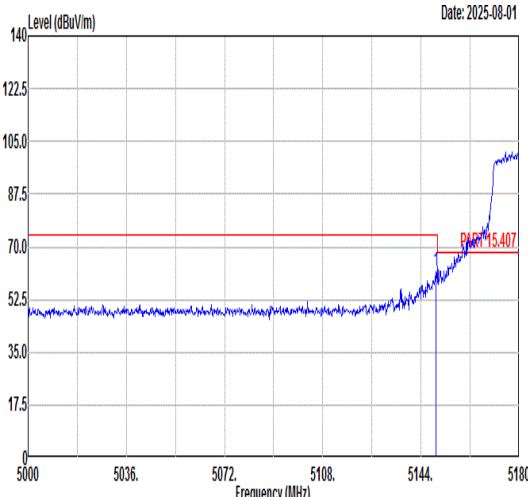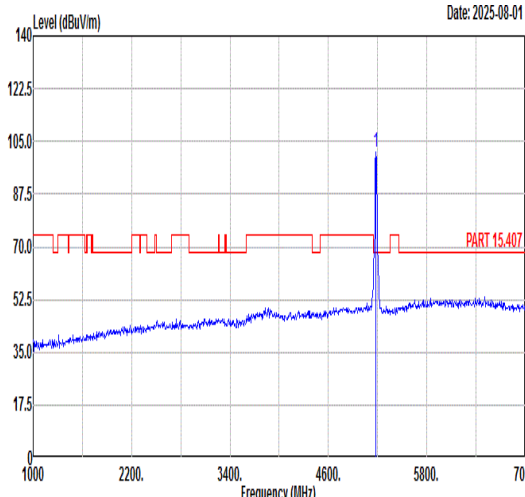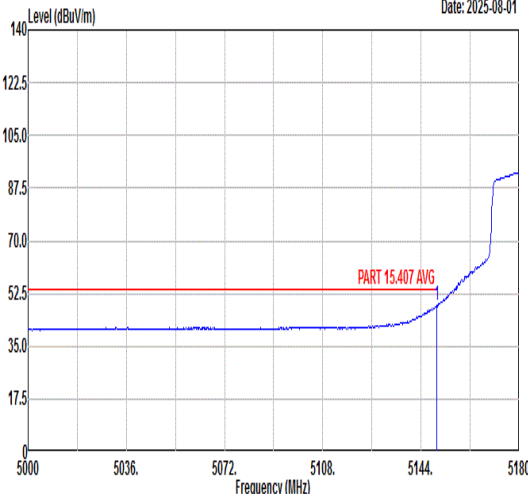
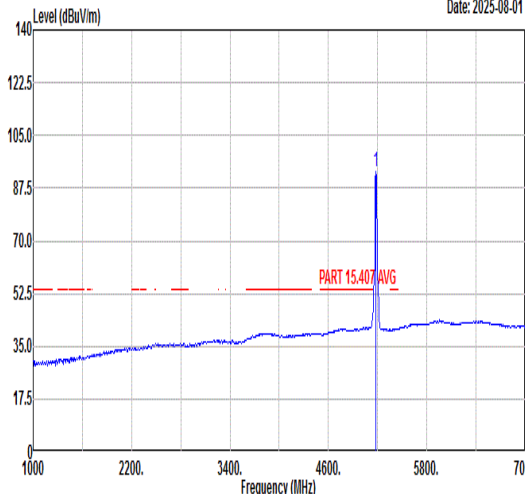


Mode	10																																																																																										
	Band Edge																																																																																										
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_5180MHz																																																																																										
ANT	22																																																																																										
Pol.	Vertical					Fundamental																																																																																					
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.58</td><td>62.02</td><td>74.00</td><td>-11.98</td><td>51.67</td><td>35.29</td><td>8.53</td><td>33.47</td><td>400</td><td>297 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.58	62.02	74.00	-11.98	51.67	35.29	8.53	33.47	400	297 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>101.49</td><td>-----</td><td>-----</td><td>91.05</td><td>35.31</td><td>8.59</td><td>33.46</td><td>400</td><td>297 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.49	-----	-----	91.05	35.31	8.59	33.46	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5149.58	62.02	74.00	-11.98	51.67	35.29	8.53	33.47	400	297 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5180.00	101.49	-----	-----	91.05	35.31	8.59	33.46	400	297 PEAK																																																																																	
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.76</td><td>48.41</td><td>54.00</td><td>-5.59</td><td>38.05</td><td>35.29</td><td>8.54</td><td>33.47</td><td>400</td><td>297 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.76	48.41	54.00	-5.59	38.05	35.29	8.54	33.47	400	297 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>92.74</td><td>-----</td><td>-----</td><td>82.30</td><td>35.31</td><td>8.59</td><td>33.46</td><td>400</td><td>297 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	92.74	-----	-----	82.30	35.31	8.59	33.46	400
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5149.76	48.41	54.00	-5.59	38.05	35.29	8.54	33.47	400	297 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5180.00	92.74	-----	-----	82.30	35.31	8.59	33.46	400	297 AVERAGE																																																																																	



Mode	10																																																																																																																																					
	Harmonic																																																																																																																																					
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_5180MHz																																																																																																																																					
ANT	22																																																																																																																																					
Pol.	Horizontal								Vertical																																																																																																																													
Peak Avg																																																																																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.44</td><td>68.30</td><td>-21.86</td><td>59.67</td><td>38.47</td><td>12.06</td><td>63.76</td><td>---</td><td>---</td><td>Peak</td><td></td><td></td></tr><tr><td>2</td><td>15540.00</td><td>47.56</td><td>74.00</td><td>-26.44</td><td>56.04</td><td>41.32</td><td>14.58</td><td>64.38</td><td>---</td><td>---</td><td>Peak</td><td></td><td></td></tr></table>										Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg	1	10360.00	46.44	68.30	-21.86	59.67	38.47	12.06	63.76	---	---	Peak			2	15540.00	47.56	74.00	-26.44	56.04	41.32	14.58	64.38	---	---	Peak			<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable</th><th colspan="2">Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.20</td><td>68.30</td><td>-22.10</td><td>59.43</td><td>38.47</td><td>12.06</td><td>63.76</td><td>---</td><td>---</td><td>Peak</td><td></td><td></td></tr><tr><td>2</td><td>15540.00</td><td>46.96</td><td>74.00</td><td>-27.04</td><td>55.44</td><td>41.32</td><td>14.58</td><td>64.38</td><td>---</td><td>---</td><td>Peak</td><td></td><td></td></tr></table>										Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg	1	10360.00	46.20	68.30	-22.10	59.43	38.47	12.06	63.76	---	---	Peak			2	15540.00	46.96	74.00	-27.04	55.44	41.32	14.58	64.38	---	---	Peak		
			Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg																																																																																																																									
1	10360.00	46.44	68.30	-21.86	59.67	38.47	12.06	63.76	---	---	Peak																																																																																																																											
2	15540.00	47.56	74.00	-26.44	56.04	41.32	14.58	64.38	---	---	Peak																																																																																																																											
		Limit		Read		Ant		Cable		Preamp		APos		TPos		Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Loss	Factor	Loss	Factor	cm	deg																																																																																																																									
1	10360.00	46.20	68.30	-22.10	59.43	38.47	12.06	63.76	---	---	Peak																																																																																																																											
2	15540.00	46.96	74.00	-27.04	55.44	41.32	14.58	64.38	---	---	Peak																																																																																																																											
	<table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.44</td><td>68.30</td><td>-21.86</td><td>59.67</td><td>38.47</td><td>12.06</td><td>63.76</td><td>---</td></tr><tr><td>2</td><td>15540.00</td><td>47.56</td><td>74.00</td><td>-26.44</td><td>56.04</td><td>41.32</td><td>14.58</td><td>64.38</td><td>---</td></tr></table>								MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.44	68.30	-21.86	59.67	38.47	12.06	63.76	---	2	15540.00	47.56	74.00	-26.44	56.04	41.32	14.58	64.38	---	<table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.20</td><td>68.30</td><td>-22.10</td><td>59.43</td><td>38.47</td><td>12.06</td><td>63.76</td><td>---</td></tr><tr><td>2</td><td>15540.00</td><td>46.96</td><td>74.00</td><td>-27.04</td><td>55.44</td><td>41.32</td><td>14.58</td><td>64.38</td><td>---</td></tr></table>								MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.20	68.30	-22.10	59.43	38.47	12.06	63.76	---	2	15540.00	46.96	74.00	-27.04	55.44	41.32	14.58	64.38	---																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																													
1	10360.00	46.44	68.30	-21.86	59.67	38.47	12.06	63.76	---																																																																																																																													
2	15540.00	47.56	74.00	-26.44	56.04	41.32	14.58	64.38	---																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																													
1	10360.00	46.20	68.30	-22.10	59.43	38.47	12.06	63.76	---																																																																																																																													
2	15540.00	46.96	74.00	-27.04	55.44	41.32	14.58	64.38	---																																																																																																																													

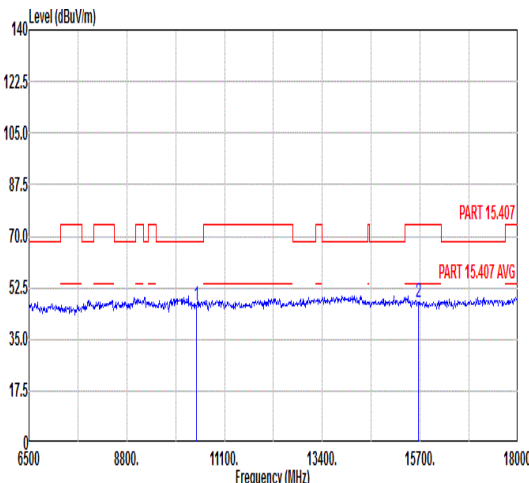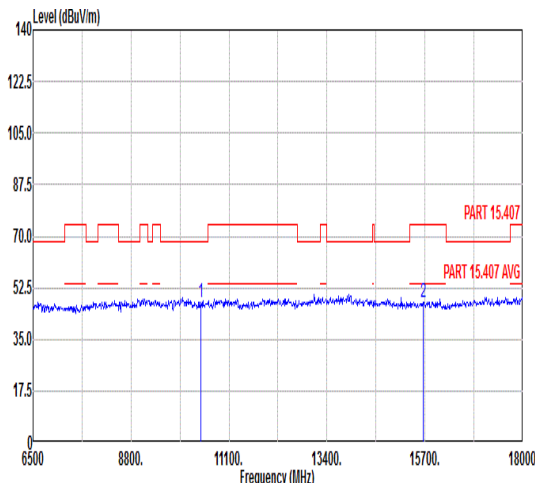

Mode	11																																																																						
	Harmonic																																																																						
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_5220MHz																																																																						
ANT	22																																																																						
Pol.	Horizontal						Vertical																																																																
Peak Avg																																																																							
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10440.00</td><td>46.51</td><td>68.30</td><td>-21.79</td><td>59.62</td><td>38.49</td><td>12.12</td><td>63.72</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.33</td><td>74.00</td><td>-26.67</td><td>55.75</td><td>41.40</td><td>14.64</td><td>64.46</td><td>---</td><td>---</td><td>Peak</td></tr></table>														Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10440.00	46.51	68.30	-21.79	59.62	38.49	12.12	63.72	---	---	Peak	2	15660.00	47.33	74.00	-26.67	55.75	41.40	14.64	64.46	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1	10440.00	46.51	68.30	-21.79	59.62	38.49	12.12	63.72	---	---	Peak																																																												
2	15660.00	47.33	74.00	-26.67	55.75	41.40	14.64	64.46	---	---	Peak																																																												
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10440.00</td><td>47.69</td><td>68.30</td><td>-20.61</td><td>60.80</td><td>38.49</td><td>12.12</td><td>63.72</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.44</td><td>74.00</td><td>-26.56</td><td>55.86</td><td>41.40</td><td>14.64</td><td>64.46</td><td>---</td><td>---</td><td>Peak</td></tr></table>														Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10440.00	47.69	68.30	-20.61	60.80	38.49	12.12	63.72	---	---	Peak	2	15660.00	47.44	74.00	-26.56	55.86	41.40	14.64	64.46	---	---	Peak	
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1	10440.00	47.69	68.30	-20.61	60.80	38.49	12.12	63.72	---	---	Peak																																																												
2	15660.00	47.44	74.00	-26.56	55.86	41.40	14.64	64.46	---	---	Peak																																																												







Mode	12																																																																									
	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_5240MHz																																																																									
ANT	22																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-08-01 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5055.44</td><td>50.96</td><td>74.00</td><td>-23.04</td><td>40.86</td><td>35.23</td><td>8.36</td><td>33.49</td><td>200 167 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5055.44	50.96	74.00	-23.04	40.86	35.23	8.36	33.49	200 167 PEAK	Level (dBuV/m) Date: 2025-08-01 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5240.00</td><td>96.63</td><td>-----</td><td>-----</td><td>85.89</td><td>35.35</td><td>8.84</td><td>33.45</td><td>200 167 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5240.00	96.63	-----	-----	85.89	35.35	8.84	33.45	200 167 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5055.44	50.96	74.00	-23.04	40.86	35.23	8.36	33.49	200 167 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5240.00	96.63	-----	-----	85.89	35.35	8.84	33.45	200 167 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2025-08-01 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5104.16</td><td>41.40</td><td>54.00</td><td>-12.60</td><td>31.17</td><td>35.26</td><td>8.45</td><td>33.48</td><td>200 167 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5104.16	41.40	54.00	-12.60	31.17	35.26	8.45	33.48	200 167 AVERAGE	Level (dBuV/m) Date: 2025-08-01 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5240.00</td><td>88.20</td><td>-----</td><td>-----</td><td>77.49</td><td>35.35</td><td>8.81</td><td>33.45</td><td>200 167 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5240.00	88.20	-----	-----	77.49	35.35	8.81	33.45	200 167 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5104.16	41.40	54.00	-12.60	31.17	35.26	8.45	33.48	200 167 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5240.00	88.20	-----	-----	77.49	35.35	8.81	33.45	200 167 AVERAGE																																																																		



Mode	12																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_5240MHz																																									
ANT	22																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-08-01 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5366.72</td><td>50.51</td><td>74.00</td><td>-23.49</td><td>39.07</td><td>35.42</td><td>9.45</td><td>33.43</td><td>200 167 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5366.72	50.51	74.00	-23.49	39.07	35.42	9.45	33.43	200 167 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5366.72	50.51	74.00	-23.49	39.07	35.42	9.45	33.43	200 167 PEAK																																	
Avg	Date: 2025-08-01 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5458.02</td><td>41.43</td><td>54.00</td><td>-12.57</td><td>29.68</td><td>35.47</td><td>9.69</td><td>33.41</td><td>200 167 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5458.02	41.43	54.00	-12.57	29.68	35.47	9.69	33.41	200 167 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5458.02	41.43	54.00	-12.57	29.68	35.47	9.69	33.41	200 167 AVERAGE																																	

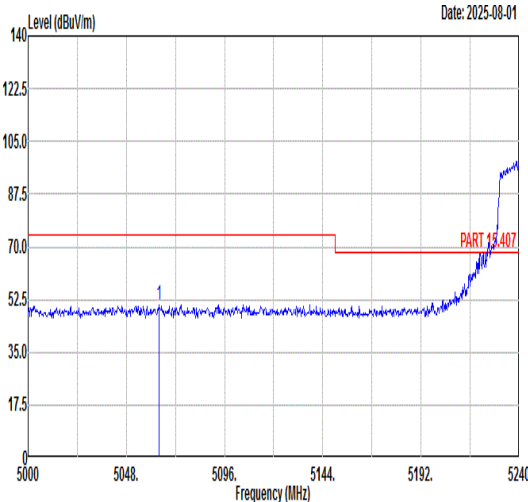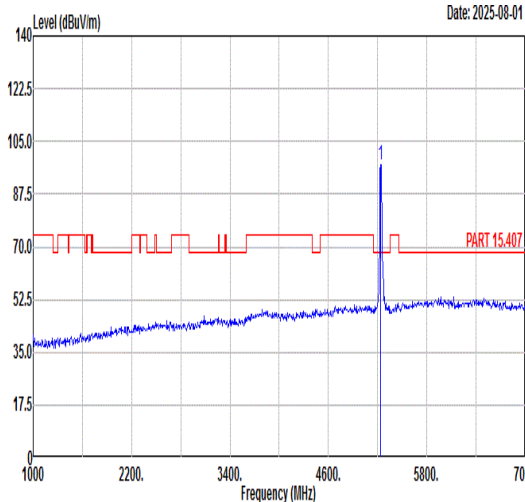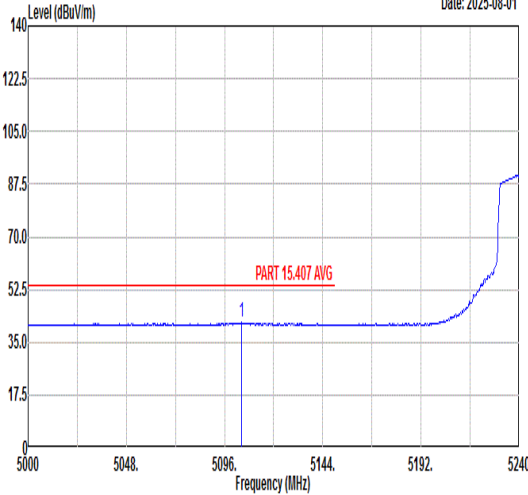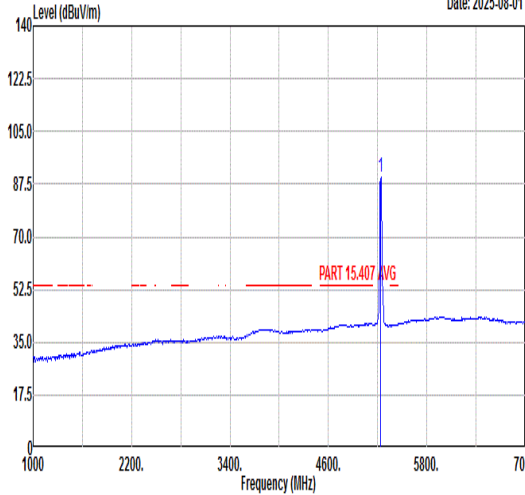

Mode	12																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_5240MHz																																																																																									
ANT	22																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5063.84</td><td>50.83</td><td>74.00</td><td>-23.17</td><td>40.70</td><td>35.24</td><td>8.38</td><td>33.49</td><td>366 265 PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5063.84	50.83	74.00	-23.17	40.70	35.24	8.38	33.49	366 265 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>97.26</td><td>-----</td><td>-----</td><td>86.55</td><td>35.35</td><td>8.81</td><td>33.45</td><td>366 265 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5240.00	97.26	-----	-----	86.55	35.35	8.81	33.45
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5063.84	50.83	74.00	-23.17	40.70	35.24	8.38	33.49	366 265 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5240.00	97.26	-----	-----	86.55	35.35	8.81	33.45	366 265 PEAK																																																																																	
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5104.16</td><td>41.48</td><td>54.00</td><td>-12.52</td><td>31.25</td><td>35.26</td><td>8.45</td><td>33.48</td><td>366 265 AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5104.16	41.48	54.00	-12.52	31.25	35.26	8.45	33.48	366 265 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>89.68</td><td>-----</td><td>-----</td><td>78.97</td><td>35.35</td><td>8.81</td><td>33.45</td><td>366 265 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5240.00	89.68	-----	-----	78.97	35.35	8.81	33.45
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5104.16	41.48	54.00	-12.52	31.25	35.26	8.45	33.48	366 265 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5240.00	89.68	-----	-----	78.97	35.35	8.81	33.45	366 265 AVERAGE																																																																																	



Mode	12																																																	
	Band Edge - R																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_5240MHz																																																	
ANT	22																																																	
Pol.	Vertical					Fundamental																																												
Peak	Date: 2025-08-01 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5359.68</td><td>50.92</td><td>74.00</td><td>-23.08</td><td>39.52</td><td>35.42</td><td>9.41</td><td>33.66</td><td>265 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5359.68	50.92	74.00	-23.08	39.52	35.42	9.41	33.66	265 PEAK	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																									
1	5359.68	50.92	74.00	-23.08	39.52	35.42	9.41	33.66	265 PEAK																																									
Avg	Date: 2025-08-01 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.72</td><td>41.45</td><td>54.00</td><td>-12.55</td><td>29.71</td><td>35.47</td><td>9.68</td><td>33.66</td><td>265 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5454.72	41.45	54.00	-12.55	29.71	35.47	9.68	33.66	265 AVERAGE	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																									
1	5454.72	41.45	54.00	-12.55	29.71	35.47	9.68	33.66	265 AVERAGE																																									



Mode	12																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_5240MHz																																																																																																																																	
ANT	22																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10480.00</td><td>48.01</td><td>68.30</td><td>-20.29</td><td>61.07</td><td>38.50</td><td>12.15</td><td>63.71</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 15720.00</td><td>46.91</td><td>74.00</td><td>-27.09</td><td>55.32</td><td>41.43</td><td>14.66</td><td>64.50</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10480.00	48.01	68.30	-20.29	61.07	38.50	12.15	63.71	---	---	Peak		2 15720.00	46.91	74.00	-27.09	55.32	41.43	14.66	64.50	---	---	Peak		<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10480.00</td><td>47.91</td><td>68.30</td><td>-20.39</td><td>60.97</td><td>38.50</td><td>12.15</td><td>63.71</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 15720.00</td><td>46.95</td><td>74.00</td><td>-27.05</td><td>55.36</td><td>41.43</td><td>14.66</td><td>64.50</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10480.00	47.91	68.30	-20.39	60.97	38.50	12.15	63.71	---	---	Peak		2 15720.00	46.95	74.00	-27.05	55.36	41.43	14.66	64.50	---	---	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 10480.00	48.01	68.30	-20.29	61.07	38.50	12.15	63.71	---	---	Peak																																																																																																																								
2 15720.00	46.91	74.00	-27.09	55.32	41.43	14.66	64.50	---	---	Peak																																																																																																																								
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 10480.00	47.91	68.30	-20.39	60.97	38.50	12.15	63.71	---	---	Peak																																																																																																																								
2 15720.00	46.95	74.00	-27.05	55.36	41.43	14.66	64.50	---	---	Peak																																																																																																																								



Mode	13																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_5260MHz																																																																									
ANT	22																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5088.66</td><td>50.83</td><td>74.00</td><td>-23.17</td><td>40.64</td><td>35.25</td><td>8.42</td><td>33.48</td><td>100 69 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5088.66	50.83	74.00	-23.17	40.64	35.25	8.42	33.48	100 69 PEAK	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5260.00</td><td>104.22</td><td>-----</td><td>-----</td><td>93.45</td><td>35.35</td><td>8.87</td><td>33.45</td><td>100 69 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5260.00	104.22	-----	-----	93.45	35.35	8.87	33.45	100 69 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5088.66	50.83	74.00	-23.17	40.64	35.25	8.42	33.48	100 69 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5260.00	104.22	-----	-----	93.45	35.35	8.87	33.45	100 69 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5104.52</td><td>41.76</td><td>54.00</td><td>-12.24</td><td>31.53</td><td>35.26</td><td>8.45</td><td>33.48</td><td>100 69 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5104.52	41.76	54.00	-12.24	31.53	35.26	8.45	33.48	100 69 AVERAGE	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5260.00</td><td>95.60</td><td>-----</td><td>-----</td><td>84.79</td><td>35.36</td><td>8.90</td><td>33.45</td><td>100 69 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5260.00	95.60	-----	-----	84.79	35.36	8.90	33.45	100 69 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5104.52	41.76	54.00	-12.24	31.53	35.26	8.45	33.48	100 69 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5260.00	95.60	-----	-----	84.79	35.36	8.90	33.45	100 69 AVERAGE																																																																		





Mode	13																																																			
	Band Edge - R																																																			
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_5260MHz																																																			
ANT	22																																																			
Pol.	Horizontal	Fundamental																																																		
Peak	Date: 2025-07-27 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5391.00</td><td>51.50</td><td>74.00</td><td>-22.50</td><td>39.91</td><td>35.43</td><td>9.58</td><td>33.42</td><td>100</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>69 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5391.00	51.50	74.00	-22.50	39.91	35.43	9.58	33.42	100										69 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																											
1	5391.00	51.50	74.00	-22.50	39.91	35.43	9.58	33.42	100																																											
									69 PEAK																																											
Avg	Date: 2025-07-27 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5353.00</td><td>41.98</td><td>54.00</td><td>-12.02</td><td>30.62</td><td>35.41</td><td>9.38</td><td>33.43</td><td>100</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>69 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5353.00	41.98	54.00	-12.02	30.62	35.41	9.38	33.43	100										69 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																											
1	5353.00	41.98	54.00	-12.02	30.62	35.41	9.38	33.43	100																																											
									69 AVERAGE																																											





Mode	13																																											
	Band Edge - L																																											
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_5260MHz																																											
ANT	22																																											
Pol.	Vertical	Fundamental																																										
Peak	Level (dBuV/m) Date: 2025-07-27 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5096.46</td><td>51.91</td><td>74.00</td><td>-22.09</td><td>41.69</td><td>35.26</td><td>8.44</td><td>33.48</td><td>400</td><td>201 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5096.46	51.91	74.00	-22.09	41.69	35.26	8.44	33.48	400	201 PEAK	Level (dBuV/m) Date: 2025-07-27 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5260.00</td><td>95.95</td><td>-----</td><td>-----</td><td>85.14</td><td>35.36</td><td>8.90</td><td>33.45</td><td>400</td><td>201 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5260.00	95.95	-----	-----	85.14	35.36	8.90	33.45	400	201 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																		
1	5096.46	51.91	74.00	-22.09	41.69	35.26	8.44	33.48	400	201 PEAK																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																			
1	5260.00	95.95	-----	-----	85.14	35.36	8.90	33.45	400	201 PEAK																																		
Avg	Level (dBuV/m) Date: 2025-07-27 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5100.62</td><td>41.70</td><td>54.00</td><td>-12.30</td><td>31.48</td><td>35.26</td><td>8.44</td><td>33.48</td><td>400</td><td>201 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5100.62	41.70	54.00	-12.30	31.48	35.26	8.44	33.48	400	201 AVERAGE	Level (dBuV/m) Date: 2025-07-27 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5260.00</td><td>87.83</td><td>-----</td><td>-----</td><td>77.02</td><td>35.36</td><td>8.90</td><td>33.45</td><td>400</td><td>201 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5260.00	87.83	-----	-----	77.02	35.36	8.90	33.45	400	201 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																			
1	5100.62	41.70	54.00	-12.30	31.48	35.26	8.44	33.48	400	201 AVERAGE																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																			
1	5260.00	87.83	-----	-----	77.02	35.36	8.90	33.45	400	201 AVERAGE																																		



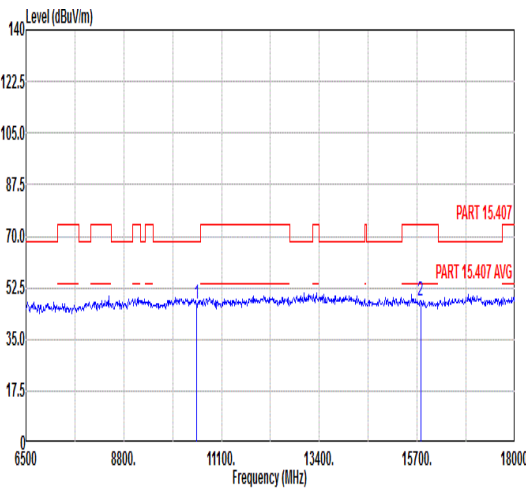
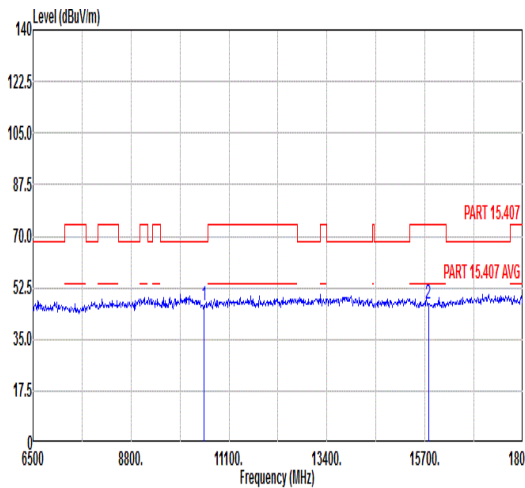


Mode	13																																																																																			
	Harmonic																																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_5260MHz																																																																																			
ANT	22																																																																																			
Pol.	Horizontal						Vertical																																																																													
Peak Avg																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1 10520.00</td><td>47.11</td><td>68.30</td><td>-21.19</td><td>60.12</td><td>38.50</td><td>12.18</td><td>63.69</td><td>--- --- Peak</td></tr><tr><td>2 15780.00</td><td>47.97</td><td>74.00</td><td>-26.03</td><td>56.36</td><td>41.47</td><td>14.69</td><td>64.55</td><td>--- --- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1 10520.00	47.11	68.30	-21.19	60.12	38.50	12.18	63.69	--- --- Peak	2 15780.00	47.97	74.00	-26.03	56.36	41.47	14.69	64.55	--- --- Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr></thead><tbody><tr><td>1 10520.00</td><td>46.48</td><td>68.30</td><td>-21.82</td><td>59.49</td><td>38.50</td><td>12.18</td><td>63.69</td><td>--- --- Peak</td></tr><tr><td>2 15780.00</td><td>47.23</td><td>74.00</td><td>-26.77</td><td>55.62</td><td>41.47</td><td>14.69</td><td>64.55</td><td>--- --- Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	1 10520.00	46.48	68.30	-21.82	59.49	38.50	12.18	63.69	--- --- Peak	2 15780.00	47.23	74.00	-26.77	55.62	41.47	14.69	64.55	--- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
1 10520.00	47.11	68.30	-21.19	60.12	38.50	12.18	63.69	--- --- Peak																																																																												
2 15780.00	47.97	74.00	-26.03	56.36	41.47	14.69	64.55	--- --- Peak																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																												
1 10520.00	46.48	68.30	-21.82	59.49	38.50	12.18	63.69	--- --- Peak																																																																												
2 15780.00	47.23	74.00	-26.77	55.62	41.47	14.69	64.55	--- --- Peak																																																																												
<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>10520.00</td><td>47.11</td><td>68.30</td><td>-21.19</td><td>60.12</td><td>38.50</td><td>12.18</td><td>63.69</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.97</td><td>74.00</td><td>-26.03</td><td>56.36</td><td>41.47</td><td>14.69</td><td>64.55</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10520.00	47.11	68.30	-21.19	60.12	38.50	12.18	63.69	---	---	Peak	2	15780.00	47.97	74.00	-26.03	56.36	41.47	14.69	64.55	---	---	Peak	<table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>10520.00</td><td>46.48</td><td>68.30</td><td>-21.82</td><td>59.49</td><td>38.50</td><td>12.18</td><td>63.69</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.23</td><td>74.00</td><td>-26.77</td><td>55.62</td><td>41.47</td><td>14.69</td><td>64.55</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10520.00	46.48	68.30	-21.82	59.49	38.50	12.18	63.69	---	---	Peak	2	15780.00	47.23	74.00	-26.77	55.62	41.47	14.69	64.55	---	---	Peak	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	10520.00	47.11	68.30	-21.19	60.12	38.50	12.18	63.69	---	---	Peak																																																																									
2	15780.00	47.97	74.00	-26.03	56.36	41.47	14.69	64.55	---	---	Peak																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																										
1	10520.00	46.48	68.30	-21.82	59.49	38.50	12.18	63.69	---	---	Peak																																																																									
2	15780.00	47.23	74.00	-26.77	55.62	41.47	14.69	64.55	---	---	Peak																																																																									



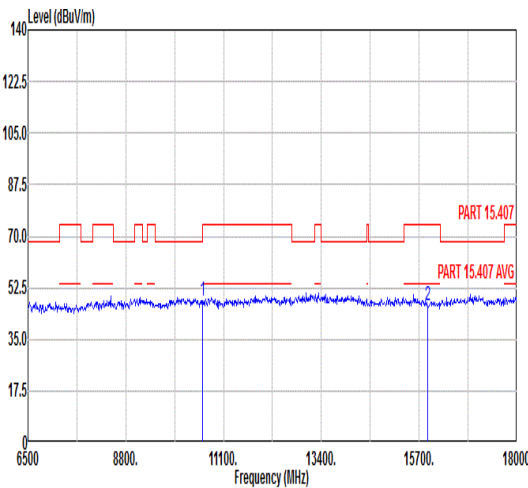
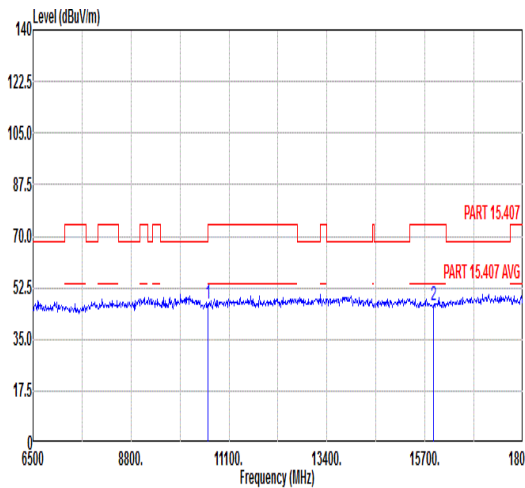


Mode	14																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_5300MHz																																																																																																																																	
ANT	22																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10600.00</td><td>48.13</td><td>74.00</td><td>-25.87</td><td>61.04</td><td>38.52</td><td>12.23</td><td>63.66</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>46.63</td><td>74.00</td><td>-27.37</td><td>54.97</td><td>41.54</td><td>14.75</td><td>64.63</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10600.00	48.13	74.00	-25.87	61.04	38.52	12.23	63.66	---	---	Peak	2	15900.00	46.63	74.00	-27.37	54.97	41.54	14.75	64.63	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10600.00</td><td>47.07</td><td>74.00</td><td>-26.93</td><td>59.98</td><td>38.52</td><td>12.23</td><td>63.66</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>46.74</td><td>74.00</td><td>-27.26</td><td>55.08</td><td>41.54</td><td>14.75</td><td>64.63</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10600.00	47.07	74.00	-26.93	59.98	38.52	12.23	63.66	---	---	Peak	2	15900.00	46.74	74.00	-27.26	55.08	41.54	14.75	64.63	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10600.00	48.13	74.00	-25.87	61.04	38.52	12.23	63.66	---	---	Peak																																																																																																																							
2	15900.00	46.63	74.00	-27.37	54.97	41.54	14.75	64.63	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10600.00	47.07	74.00	-26.93	59.98	38.52	12.23	63.66	---	---	Peak																																																																																																																							
2	15900.00	46.74	74.00	-27.26	55.08	41.54	14.75	64.63	---	---	Peak																																																																																																																							

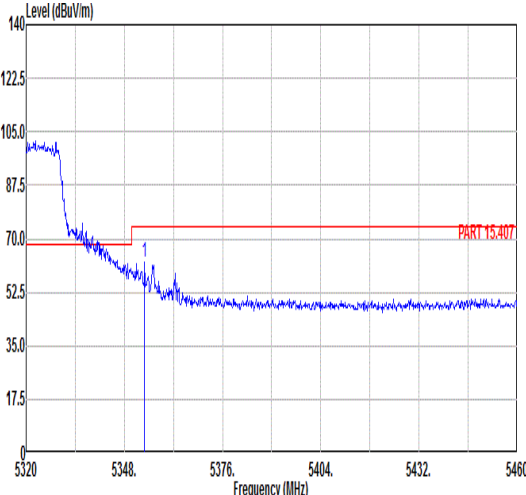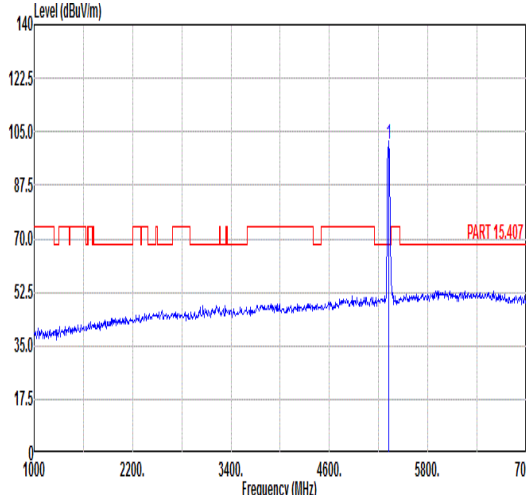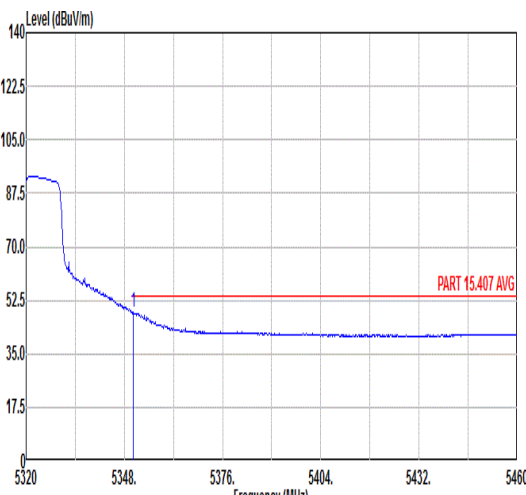
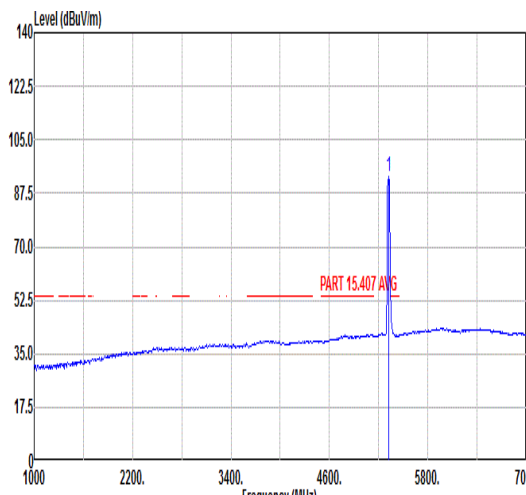


Mode	15																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz																																																																																									
ANT	22																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5353.74</td><td>62.22</td><td>74.00</td><td>-11.78</td><td>50.86</td><td>35.41</td><td>9.38</td><td>33.43</td><td>400</td><td>43</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5353.74	62.22	74.00	-11.78	50.86	35.41	9.38	33.43	400	43	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>100.79</td><td>-----</td><td>-----</td><td>89.58</td><td>35.40</td><td>9.24</td><td>33.43</td><td>400</td><td>43</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	100.79	-----	-----	89.58	35.40	9.24	33.43	400	43
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5353.74	62.22	74.00	-11.78	50.86	35.41	9.38	33.43	400	43	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5320.00	100.79	-----	-----	89.58	35.40	9.24	33.43	400	43	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.52</td><td>48.60</td><td>54.00</td><td>-5.40</td><td>37.25</td><td>35.41</td><td>9.37</td><td>33.43</td><td>400</td><td>43</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.52	48.60	54.00	-5.40	37.25	35.41	9.37	33.43	400	43	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>93.02</td><td>-----</td><td>-----</td><td>81.86</td><td>35.39</td><td>9.21</td><td>33.44</td><td>400</td><td>43</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	93.02	-----	-----	81.86	35.39	9.21	33.44	400	43
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5350.52	48.60	54.00	-5.40	37.25	35.41	9.37	33.43	400	43	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5320.00	93.02	-----	-----	81.86	35.39	9.21	33.44	400	43	AVERAGE																																																																															

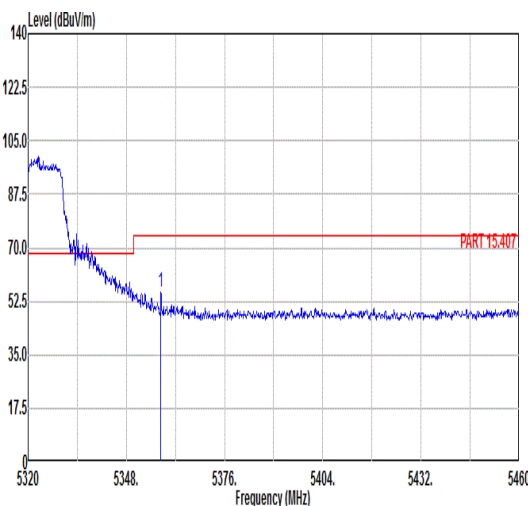
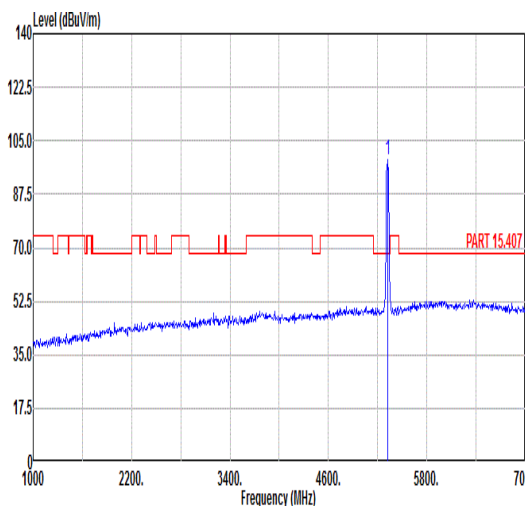
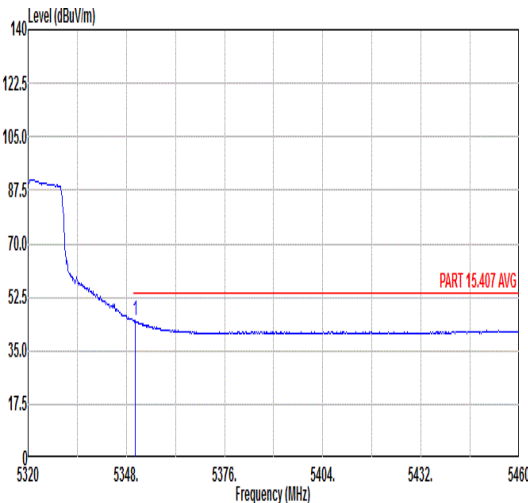
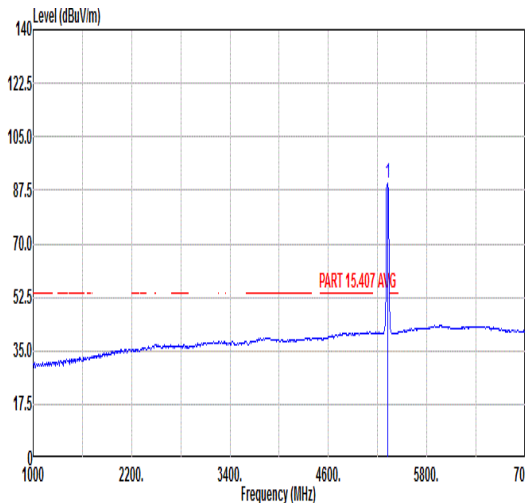


Mode	15																																																																																										
	Band Edge																																																																																										
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz																																																																																										
ANT	22																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5357.80</td><td>55.29</td><td>74.00</td><td>-18.71</td><td>43.90</td><td>35.41</td><td>9.41</td><td>33.43</td><td>400</td><td>275</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5357.80	55.29	74.00	-18.71	43.90	35.41	9.41	33.43	400	275	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>98.95</td><td>-----</td><td>-----</td><td>87.74</td><td>35.40</td><td>9.24</td><td>33.43</td><td>400</td><td>275</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	98.95	-----	-----	87.74	35.40	9.24	33.43	400	275
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5357.80	55.29	74.00	-18.71	43.90	35.41	9.41	33.43	400	275	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5320.00	98.95	-----	-----	87.74	35.40	9.24	33.43	400	275	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.52</td><td>44.94</td><td>54.00</td><td>-9.06</td><td>33.59</td><td>35.41</td><td>9.37</td><td>33.43</td><td>400</td><td>275</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.52	44.94	54.00	-9.06	33.59	35.41	9.37	33.43	400	275	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>89.87</td><td>-----</td><td>-----</td><td>78.71</td><td>35.39</td><td>9.21</td><td>33.44</td><td>400</td><td>275</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	89.87	-----	-----	78.71	35.39	9.21	33.44	400	275
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5350.52	44.94	54.00	-9.06	33.59	35.41	9.37	33.43	400	275	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5320.00	89.87	-----	-----	78.71	35.39	9.21	33.44	400	275	AVERAGE																																																																																



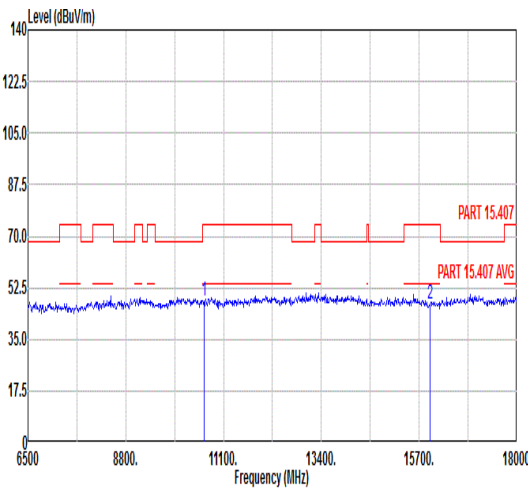
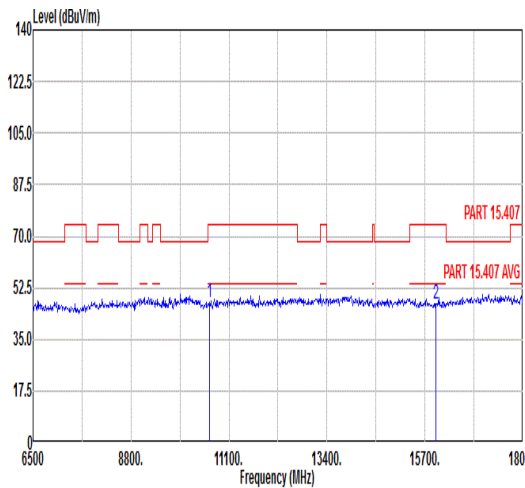


Mode	15																																																																						
	Harmonic																																																																						
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_5320MHz																																																																						
ANT	22																																																																						
Pol.	Horizontal						Vertical																																																																
Peak Avg																																																																							
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10640.00</td><td>48.30</td><td>74.00</td><td>-25.70</td><td>61.15</td><td>38.53</td><td>12.26</td><td>63.64</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 15960.00</td><td>47.00</td><td>74.00</td><td>-27.00</td><td>55.32</td><td>41.58</td><td>14.77</td><td>64.67</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>														Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10640.00	48.30	74.00	-25.70	61.15	38.53	12.26	63.64	---	---	Peak		2 15960.00	47.00	74.00	-27.00	55.32	41.58	14.77	64.67	---	---	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1 10640.00	48.30	74.00	-25.70	61.15	38.53	12.26	63.64	---	---	Peak																																																													
2 15960.00	47.00	74.00	-27.00	55.32	41.58	14.77	64.67	---	---	Peak																																																													
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10640.00</td><td>47.77</td><td>74.00</td><td>-26.23</td><td>60.62</td><td>38.53</td><td>12.26</td><td>63.64</td><td>---</td><td>---</td><td>Peak</td><td></td></tr><tr><td>2 15960.00</td><td>46.76</td><td>74.00</td><td>-27.24</td><td>55.08</td><td>41.58</td><td>14.77</td><td>64.67</td><td>---</td><td>---</td><td>Peak</td><td></td></tr></table>														Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10640.00	47.77	74.00	-26.23	60.62	38.53	12.26	63.64	---	---	Peak		2 15960.00	46.76	74.00	-27.24	55.08	41.58	14.77	64.67	---	---	Peak		
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1 10640.00	47.77	74.00	-26.23	60.62	38.53	12.26	63.64	---	---	Peak																																																													
2 15960.00	46.76	74.00	-27.24	55.08	41.58	14.77	64.67	---	---	Peak																																																													

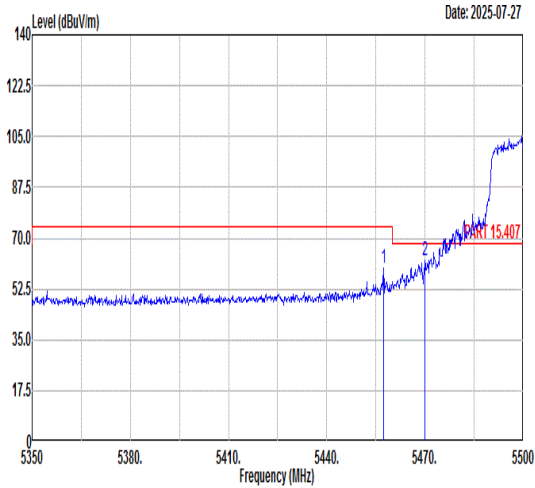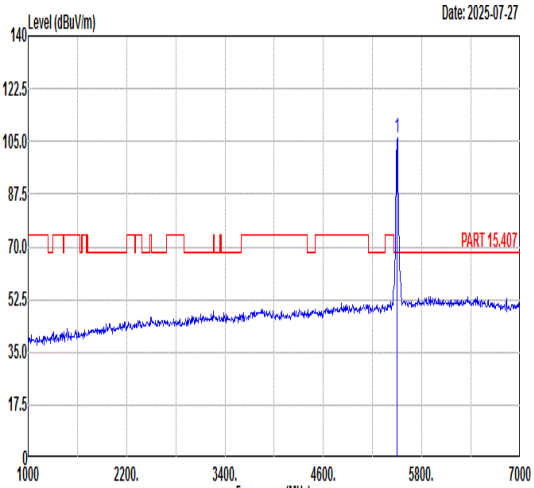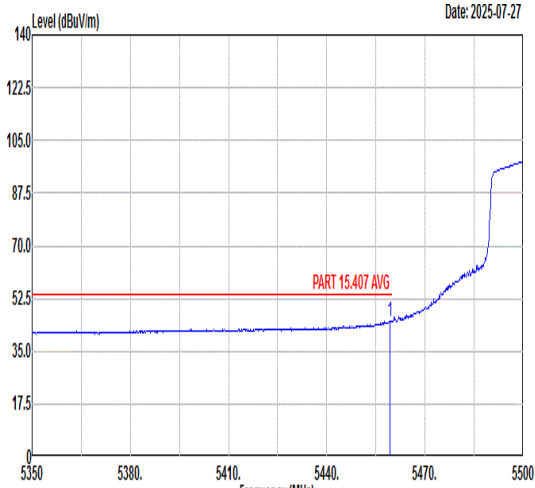
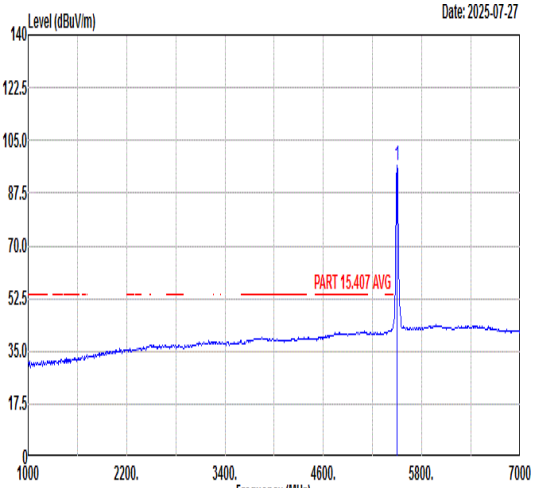


Mode	16																																																																																																						
	Band Edge																																																																																																						
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz																																																																																																						
ANT	22																																																																																																						
Pol.	Horizontal					Fundamental																																																																																																	
Peak	 Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5457.25</td><td>59.58</td><td>74.00</td><td>-14.42</td><td>47.83</td><td>35.47</td><td>9.69</td><td>33.41</td><td>100</td><td>71 PEAK</td></tr><tr><td>2</td><td>5469.85</td><td>62.39</td><td>68.30</td><td>-5.91</td><td>50.63</td><td>35.48</td><td>9.69</td><td>33.41</td><td>100</td><td>71 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5457.25	59.58	74.00	-14.42	47.83	35.47	9.69	33.41	100	71 PEAK	2	5469.85	62.39	68.30	-5.91	50.63	35.48	9.69	33.41	100	71 PEAK	 Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>106.33</td><td>-----</td><td>-----</td><td>94.51</td><td>35.51</td><td>9.71</td><td>33.40</td><td>100</td><td>71 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	106.33	-----	-----	94.51	35.51	9.71	33.40	100	71 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5457.25	59.58	74.00	-14.42	47.83	35.47	9.69	33.41	100	71 PEAK																																																																																													
2	5469.85	62.39	68.30	-5.91	50.63	35.48	9.69	33.41	100	71 PEAK																																																																																													
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5500.00	106.33	-----	-----	94.51	35.51	9.71	33.40	100	71 PEAK																																																																																													
Avg	 Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.35</td><td>44.93</td><td>54.00</td><td>-9.07</td><td>33.17</td><td>35.48</td><td>9.69</td><td>33.41</td><td>100</td><td>71 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.35	44.93	54.00	-9.07	33.17	35.48	9.69	33.41	100	71 AVERAGE	 Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>96.48</td><td>-----</td><td>-----</td><td>84.67</td><td>35.50</td><td>9.71</td><td>33.40</td><td>100</td><td>71 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	96.48	-----	-----	84.67	35.50	9.71	33.40	100	71 AVERAGE											
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5459.35	44.93	54.00	-9.07	33.17	35.48	9.69	33.41	100	71 AVERAGE																																																																																													
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5500.00	96.48	-----	-----	84.67	35.50	9.71	33.40	100	71 AVERAGE																																																																																													

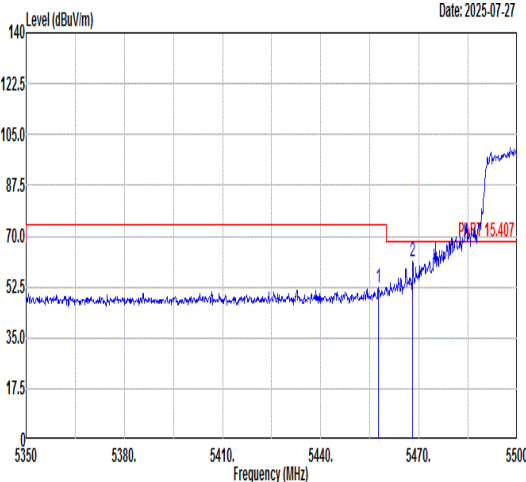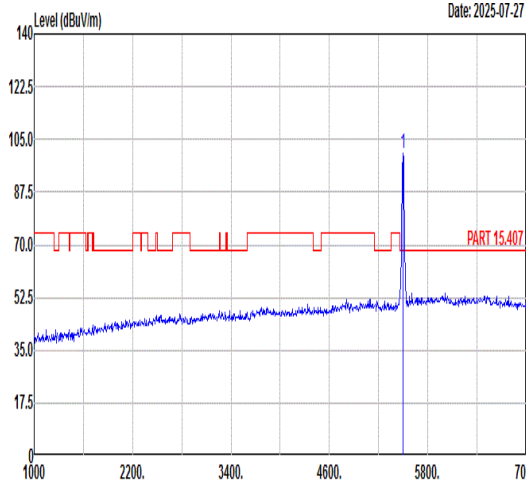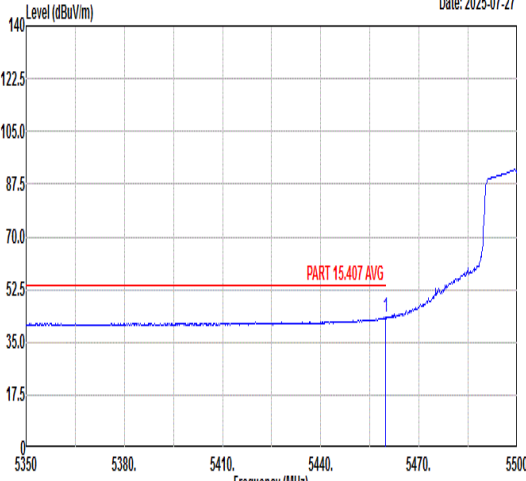
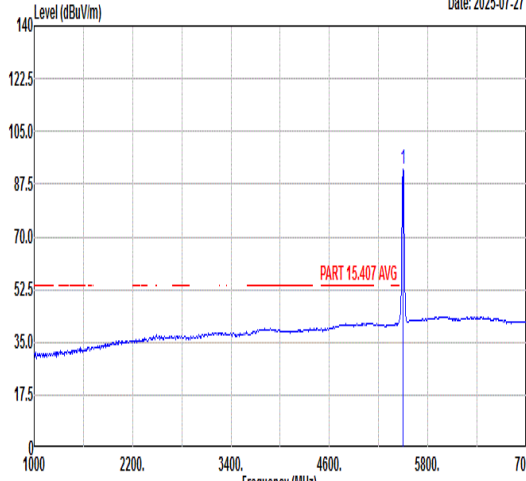


Mode	16																																																																																																																																																																												
	Band Edge																																																																																																																																																																												
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz																																																																																																																																																																												
ANT	22																																																																																																																																																																												
Pol.	Vertical	Fundamental																																																																																																																																																																											
Peak	Level (dBuV/m) Date: 2025-07-27  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.70</td><td>52.36</td><td>74.00</td><td>-21.64</td><td>40.61</td><td>35.47</td><td>9.69</td><td>33.41</td><td>378 242 PEAK</td></tr><tr><td>2</td><td>5468.05</td><td>61.30</td><td>68.30</td><td>-7.00</td><td>49.54</td><td>35.48</td><td>9.69</td><td>33.41</td><td>378 242 PEAK</td></tr></table> Level (dBuV/m) Date: 2025-07-27  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>100.60</td><td>-----</td><td>88.79</td><td>35.50</td><td>9.71</td><td>33.40</td><td>378</td><td>242 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5457.70	52.36	74.00	-21.64	40.61	35.47	9.69	33.41	378 242 PEAK	2	5468.05	61.30	68.30	-7.00	49.54	35.48	9.69	33.41	378 242 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	100.60	-----	88.79	35.50	9.71	33.40	378	242 PEAK	Avg	Level (dBuV/m) Date: 2025-07-27  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.80</td><td>43.14</td><td>54.00</td><td>-10.86</td><td>31.38</td><td>35.48</td><td>9.69</td><td>33.41</td><td>378 242 AVERAGE</td></tr></table> Level (dBuV/m) Date: 2025-07-27  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>92.30</td><td>-----</td><td>80.49</td><td>35.50</td><td>9.71</td><td>33.40</td><td>378</td><td>242 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.80	43.14	54.00	-10.86	31.38	35.48	9.69	33.41	378 242 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	92.30	-----	80.49	35.50	9.71	33.40	378	242 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5457.70	52.36	74.00	-21.64	40.61	35.47	9.69	33.41	378 242 PEAK																																																																																																																																																																				
2	5468.05	61.30	68.30	-7.00	49.54	35.48	9.69	33.41	378 242 PEAK																																																																																																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5500.00	100.60	-----	88.79	35.50	9.71	33.40	378	242 PEAK																																																																																																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5459.80	43.14	54.00	-10.86	31.38	35.48	9.69	33.41	378 242 AVERAGE																																																																																																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																				
1	5500.00	92.30	-----	80.49	35.50	9.71	33.40	378	242 AVERAGE																																																																																																																																																																				

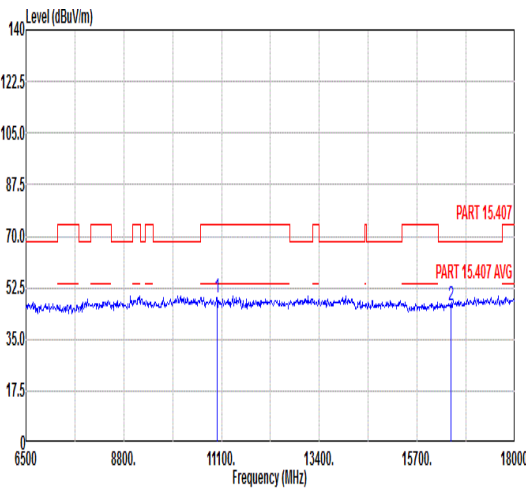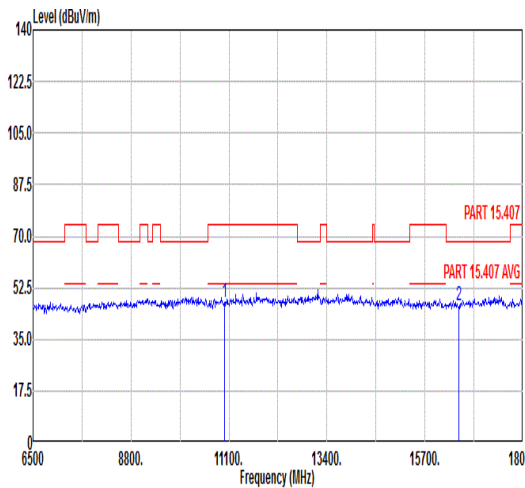

Mode	16																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_5500MHz																																																																																																																																	
ANT	22																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>49.15</td><td>74.00</td><td>-24.85</td><td>61.53</td><td>38.60</td><td>12.52</td><td>63.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>46.32</td><td>68.30</td><td>-21.98</td><td>53.95</td><td>41.95</td><td>15.17</td><td>64.75</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11000.00	49.15	74.00	-24.85	61.53	38.60	12.52	63.50	---	---	Peak	2	16500.00	46.32	68.30	-21.98	53.95	41.95	15.17	64.75	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>47.78</td><td>74.00</td><td>-26.22</td><td>60.16</td><td>38.60</td><td>12.52</td><td>63.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>46.65</td><td>68.30</td><td>-21.65</td><td>54.28</td><td>41.95</td><td>15.17</td><td>64.75</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11000.00	47.78	74.00	-26.22	60.16	38.60	12.52	63.50	---	---	Peak	2	16500.00	46.65	68.30	-21.65	54.28	41.95	15.17	64.75	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11000.00	49.15	74.00	-24.85	61.53	38.60	12.52	63.50	---	---	Peak																																																																																																																							
2	16500.00	46.32	68.30	-21.98	53.95	41.95	15.17	64.75	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11000.00	47.78	74.00	-26.22	60.16	38.60	12.52	63.50	---	---	Peak																																																																																																																							
2	16500.00	46.65	68.30	-21.65	54.28	41.95	15.17	64.75	---	---	Peak																																																																																																																							
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>49.15</td><td>74.00</td><td>-24.85</td><td>61.53</td><td>38.60</td><td>12.52</td><td>63.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>46.32</td><td>68.30</td><td>-21.98</td><td>53.95</td><td>41.95</td><td>15.17</td><td>64.75</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11000.00	49.15	74.00	-24.85	61.53	38.60	12.52	63.50	---	---	Peak	2	16500.00	46.32	68.30	-21.98	53.95	41.95	15.17	64.75	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11000.00</td><td>47.78</td><td>74.00</td><td>-26.22</td><td>60.16</td><td>38.60</td><td>12.52</td><td>63.50</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>46.65</td><td>68.30</td><td>-21.65</td><td>54.28</td><td>41.95</td><td>15.17</td><td>64.75</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11000.00	47.78	74.00	-26.22	60.16	38.60	12.52	63.50	---	---	Peak	2	16500.00	46.65	68.30	-21.65	54.28	41.95	15.17	64.75	---	---	Peak
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11000.00	49.15	74.00	-24.85	61.53	38.60	12.52	63.50	---	---	Peak																																																																																																																							
2	16500.00	46.32	68.30	-21.98	53.95	41.95	15.17	64.75	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11000.00	47.78	74.00	-26.22	60.16	38.60	12.52	63.50	---	---	Peak																																																																																																																							
2	16500.00	46.65	68.30	-21.65	54.28	41.95	15.17	64.75	---	---	Peak																																																																																																																							

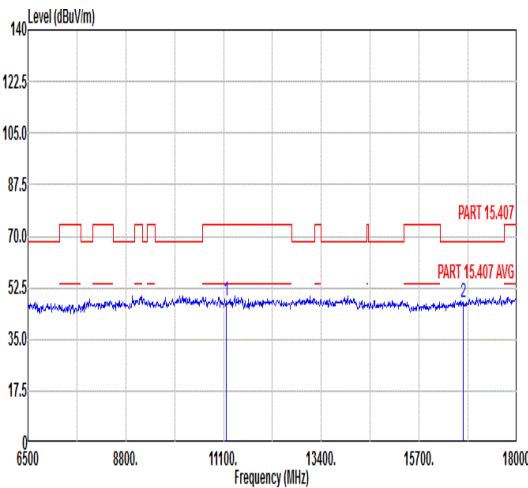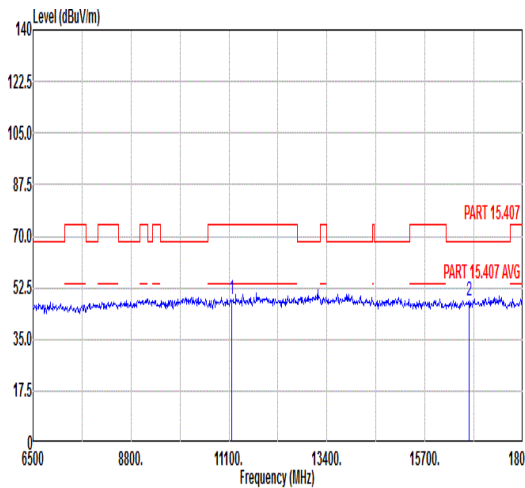

Mode	17																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_5580MHz																																																																																																																																	
ANT	22																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11160.00</td><td>47.97</td><td>74.00</td><td>-26.03</td><td>60.15</td><td>38.79</td><td>12.64</td><td>63.61</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>47.54</td><td>68.30</td><td>-20.76</td><td>54.84</td><td>42.12</td><td>15.35</td><td>64.77</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11160.00	47.97	74.00	-26.03	60.15	38.79	12.64	63.61	---	---	Peak	2	16740.00	47.54	68.30	-20.76	54.84	42.12	15.35	64.77	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11160.00</td><td>48.36</td><td>74.00</td><td>-25.64</td><td>60.54</td><td>38.79</td><td>12.64</td><td>63.61</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>47.83</td><td>68.30</td><td>-20.47</td><td>55.13</td><td>42.12</td><td>15.35</td><td>64.77</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11160.00	48.36	74.00	-25.64	60.54	38.79	12.64	63.61	---	---	Peak	2	16740.00	47.83	68.30	-20.47	55.13	42.12	15.35	64.77	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11160.00	47.97	74.00	-26.03	60.15	38.79	12.64	63.61	---	---	Peak																																																																																																																							
2	16740.00	47.54	68.30	-20.76	54.84	42.12	15.35	64.77	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11160.00	48.36	74.00	-25.64	60.54	38.79	12.64	63.61	---	---	Peak																																																																																																																							
2	16740.00	47.83	68.30	-20.47	55.13	42.12	15.35	64.77	---	---	Peak																																																																																																																							





Mode	18																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHz																																																																																	
ANT	22																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5725.61</td><td>65.06</td><td>68.30</td><td>-3.24</td><td>52.67</td><td>35.82</td><td>10.02</td><td>33.45</td><td>108</td><td>99 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5725.61	65.06	68.30	-3.24	52.67	35.82	10.02	33.45	108	99 PEAK	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5700.00</td><td>105.26</td><td>-----</td><td>-----</td><td>92.96</td><td>35.78</td><td>9.96</td><td>33.44</td><td>108</td><td>99 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5700.00	105.26	-----	-----	92.96	35.78	9.96	33.44	108	99 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5725.61	65.06	68.30	-3.24	52.67	35.82	10.02	33.45	108	99 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5700.00	105.26	-----	-----	92.96	35.78	9.96	33.44	108	99 PEAK																																																																									
Avg	Blank	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5700.00</td><td>97.77</td><td>-----</td><td>-----</td><td>85.47</td><td>35.78</td><td>9.96</td><td>33.44</td><td>108</td><td>99 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5700.00	97.77	-----	-----	85.47	35.78	9.96	33.44	108	99 AVERAGE																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5700.00	97.77	-----	-----	85.47	35.78	9.96	33.44	108	99 AVERAGE																																																																									







Mode	18																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHz																																																																																											
ANT	22																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5726.65</td><td>62.62</td><td>68.30</td><td>-5.68</td><td>50.23</td><td>35.82</td><td>10.02</td><td>33.45</td><td>400</td><td>215</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5726.65	62.62	68.30	-5.68	50.23	35.82	10.02	33.45	400	215	PEAK	Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>102.29</td><td>-----</td><td>-----</td><td>89.99</td><td>35.78</td><td>9.96</td><td>33.44</td><td>400</td><td>215</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	102.29	-----	-----	89.99	35.78	9.96	33.44	400	215	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5726.65	62.62	68.30	-5.68	50.23	35.82	10.02	33.45	400	215	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5700.00	102.29	-----	-----	89.99	35.78	9.96	33.44	400	215	PEAK																																																																																	
Avg	Blank						Level (dBuV/m) Date: 2025-07-27 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>91.78</td><td>-----</td><td>-----</td><td>79.48</td><td>35.78</td><td>9.96</td><td>33.44</td><td>400</td><td>215</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	91.78	-----	-----	79.48	35.78	9.96	33.44	400	215	AVERAGE																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5700.00	91.78	-----	-----	79.48	35.78	9.96	33.44	400	215	AVERAGE																																																																																	

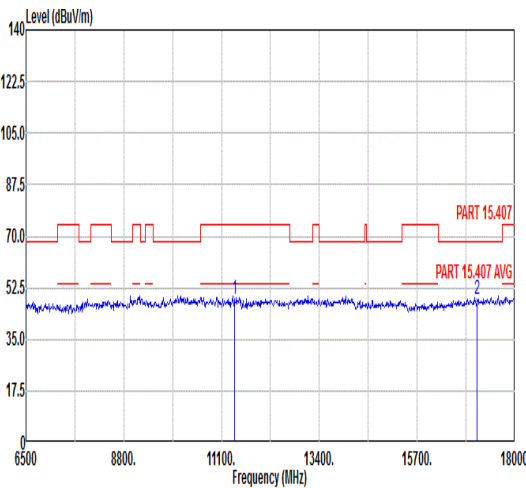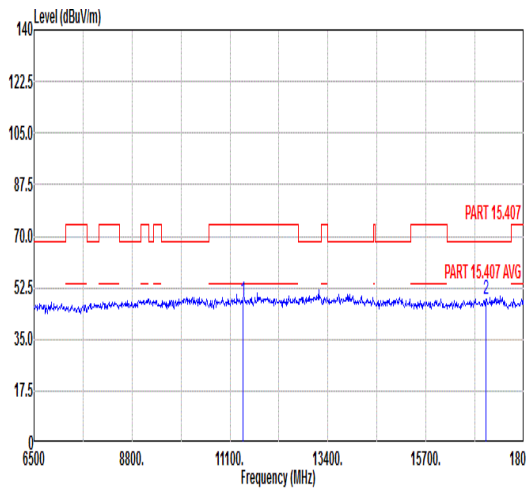

Mode	18																																																																																																																															
	Harmonic																																																																																																																															
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_5700MHz																																																																																																																															
ANT	22																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																									
Peak Avg																																																																																																																																
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11400.00</td><td>48.41</td><td>74.00</td><td>-25.59</td><td>60.30</td><td>39.08</td><td>12.81</td><td>63.78</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>48.44</td><td>68.30</td><td>-19.86</td><td>55.32</td><td>42.41</td><td>15.62</td><td>64.91</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11400.00	48.41	74.00	-25.59	60.30	39.08	12.81	63.78	---	---	Peak	2	17100.00	48.44	68.30	-19.86	55.32	42.41	15.62	64.91	---	---	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11400.00</td><td>47.94</td><td>74.00</td><td>-26.06</td><td>59.83</td><td>39.08</td><td>12.81</td><td>63.78</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>48.48</td><td>68.30</td><td>-19.82</td><td>55.36</td><td>42.41</td><td>15.62</td><td>64.91</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11400.00	47.94	74.00	-26.06	59.83	39.08	12.81	63.78	---	---	Peak	2	17100.00	48.48	68.30	-19.82	55.36	42.41	15.62	64.91	---	---
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	11400.00	48.41	74.00	-25.59	60.30	39.08	12.81	63.78	---	---	Peak																																																																																																																					
2	17100.00	48.44	68.30	-19.86	55.32	42.41	15.62	64.91	---	---	Peak																																																																																																																					
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	11400.00	47.94	74.00	-26.06	59.83	39.08	12.81	63.78	---	---	Peak																																																																																																																					
2	17100.00	48.48	68.30	-19.82	55.36	42.41	15.62	64.91	---	---	Peak																																																																																																																					

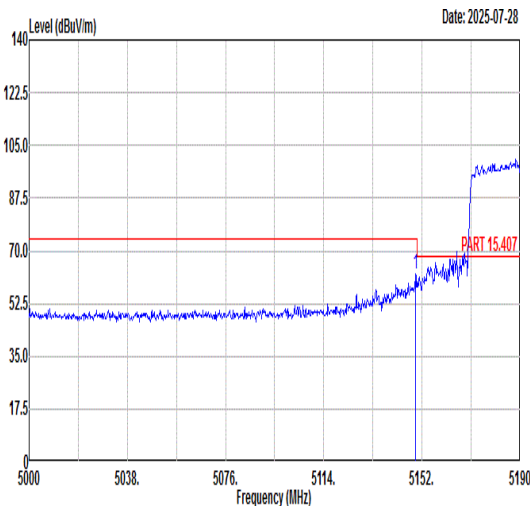
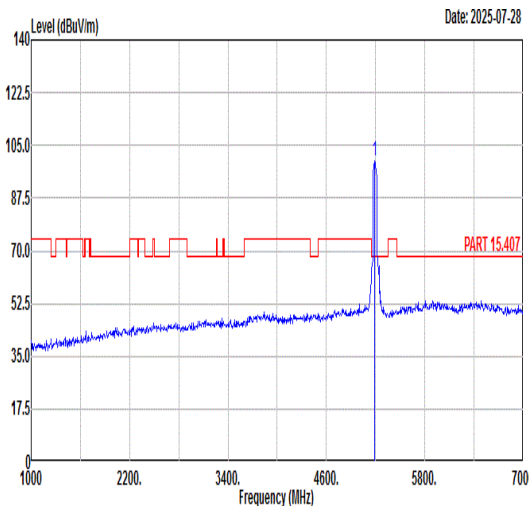
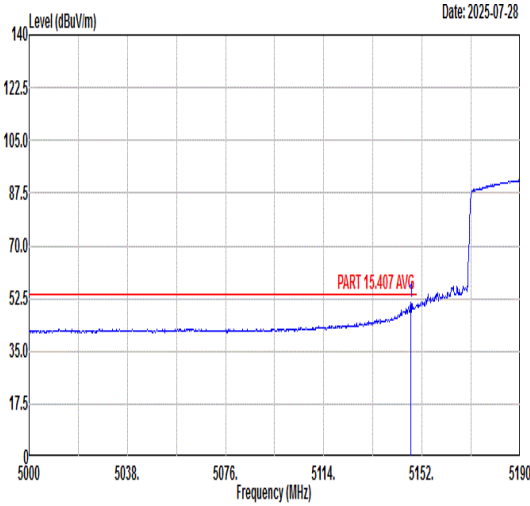
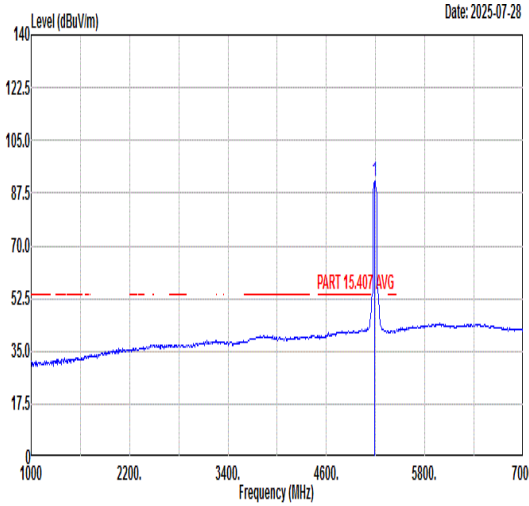


		19																																																																																														
Mode		Band Edge - L																																																																																														
		U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz																																																																																														
ANT		22																																																																																														
Pol.		Horizontal					Fundamental																																																																																									
Peak	 Level (dBuV/m) vs Frequency (MHz). Date: 2025-07-28. A red line at 70.0 dBuV/m is labeled PART 15.407. A blue trace shows a sharp peak at 5152 MHz.					 Level (dBuV/m) vs Frequency (MHz). Date: 2025-07-28. A red line at 70.0 dBuV/m is labeled PART 15.407. A blue trace shows a sharp peak at 5190 MHz.																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.53</td><td>62.45</td><td>74.00</td><td>-11.55</td><td>52.10</td><td>35.29</td><td>8.53</td><td>33.47</td><td>100</td><td>45 PEAK</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.53	62.45	74.00	-11.55	52.10	35.29	8.53	33.47	100	45 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>99.89</td><td>-----</td><td>-----</td><td>89.43</td><td>35.31</td><td>8.61</td><td>33.46</td><td>100</td><td>45 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5190.00	99.89	-----	-----	89.43	35.31	8.61	33.46	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5149.53	62.45	74.00	-11.55	52.10	35.29	8.53	33.47	100	45 PEAK																																																																																						
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5190.00	99.89	-----	-----	89.43	35.31	8.61	33.46	100	45 PEAK																																																																																						
Avg	 Level (dBuV/m) vs Frequency (MHz). Date: 2025-07-28. A red line at 52.5 dBuV/m is labeled PART 15.407 AVG. A blue trace shows a sharp peak at 5152 MHz.					 Level (dBuV/m) vs Frequency (MHz). Date: 2025-07-28. A red line at 52.5 dBuV/m is labeled PART 15.407 AVG. A blue trace shows a sharp peak at 5190 MHz.																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5147.63</td><td>51.01</td><td>54.00</td><td>-2.99</td><td>40.66</td><td>35.29</td><td>8.53</td><td>33.47</td><td>100</td><td>45 AVERAGE</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5147.63	51.01	54.00	-2.99	40.66	35.29	8.53	33.47	100	45 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>91.33</td><td>-----</td><td>-----</td><td>80.85</td><td>35.32</td><td>8.62</td><td>33.46</td><td>100</td><td>45 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5190.00	91.33	-----	-----	80.85	35.32	8.62	33.46	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5147.63	51.01	54.00	-2.99	40.66	35.29	8.53	33.47	100	45 AVERAGE																																																																																						
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5190.00	91.33	-----	-----	80.85	35.32	8.62	33.46	100	45 AVERAGE																																																																																						







Mode	19																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz																																									
ANT	22																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-07-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5354.43</td><td>50.59</td><td>74.00</td><td>-23.41</td><td>39.22</td><td>35.41</td><td>9.39</td><td>33.43</td><td>100 45 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5354.43	50.59	74.00	-23.41	39.22	35.41	9.39	33.43	100 45 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5354.43	50.59	74.00	-23.41	39.22	35.41	9.39	33.43	100 45 PEAK																																	
Avg	Date: 2025-07-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5428.68</td><td>42.41</td><td>54.00</td><td>-11.59</td><td>30.69</td><td>35.46</td><td>9.67</td><td>33.41</td><td>100 45 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5428.68	42.41	54.00	-11.59	30.69	35.46	9.67	33.41	100 45 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5428.68	42.41	54.00	-11.59	30.69	35.46	9.67	33.41	100 45 AVERAGE																																	

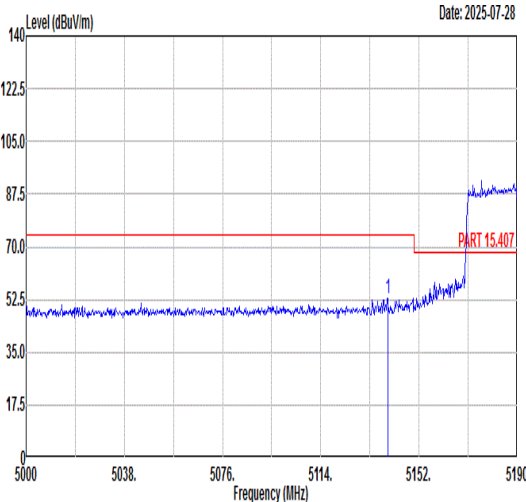
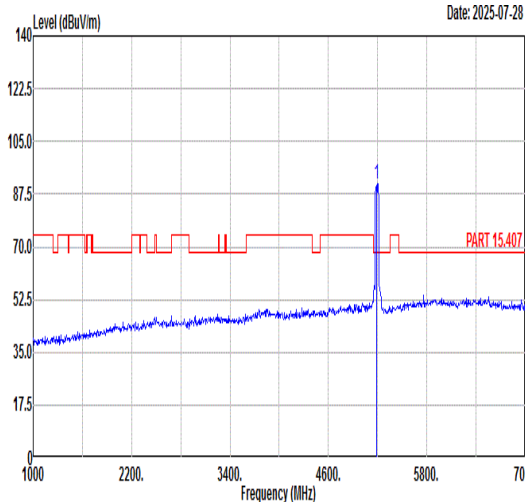
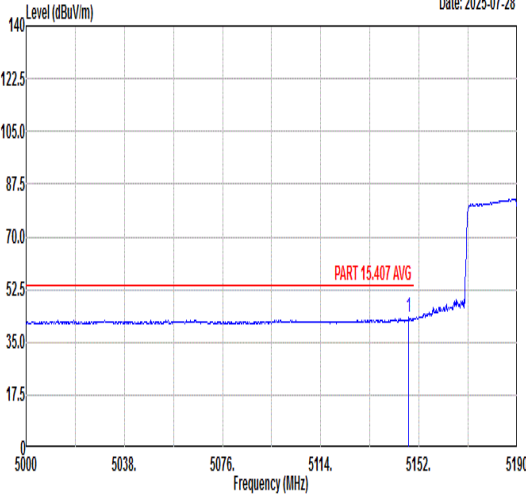
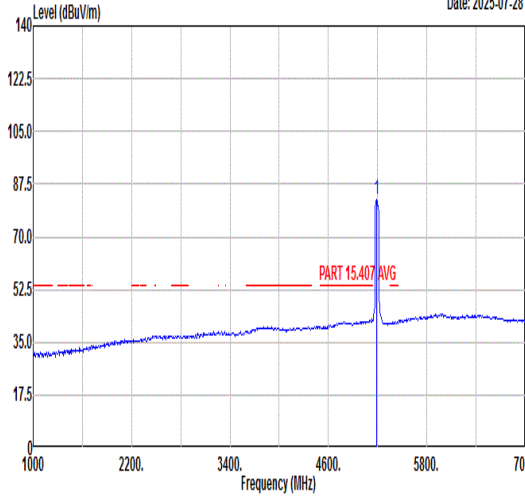


Mode	19																																																																															
	Band Edge - L																																																																															
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_5190MHz																																																																															
ANT	22																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	Date: 2025-07-28 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5139.84</td><td>52.84</td><td>74.00</td><td>-21.16</td><td>42.51</td><td>35.28</td><td>8.52</td><td>33.47</td><td>101</td><td>74</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	5139.84	52.84	74.00	-21.16	42.51	35.28	8.52	33.47	101	74	PEAK	Date: 2025-07-28 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>91.01</td><td>-----</td><td>-----</td><td>80.53</td><td>35.32</td><td>8.62</td><td>33.46</td><td>101</td><td>74</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	5190.00	91.01	-----	-----	80.53	35.32	8.62	33.46	101	74	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																								
1	5139.84	52.84	74.00	-21.16	42.51	35.28	8.52	33.47	101	74	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																								
1	5190.00	91.01	-----	-----	80.53	35.32	8.62	33.46	101	74	PEAK																																																																					
Avg	Date: 2025-07-28 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.01</td><td>43.47</td><td>54.00</td><td>-10.53</td><td>33.12</td><td>35.29</td><td>8.53</td><td>33.47</td><td>101</td><td>74</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	5148.01	43.47	54.00	-10.53	33.12	35.29	8.53	33.47	101	74	AVERAGE	Date: 2025-07-28 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>82.24</td><td>-----</td><td>-----</td><td>71.78</td><td>35.31</td><td>8.61</td><td>33.46</td><td>101</td><td>74</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg	1	5190.00	82.24	-----	-----	71.78	35.31	8.61	33.46	101	74	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																								
1	5148.01	43.47	54.00	-10.53	33.12	35.29	8.53	33.47	101	74	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	cm	deg																																																																								
1	5190.00	82.24	-----	-----	71.78	35.31	8.61	33.46	101	74	AVERAGE																																																																					

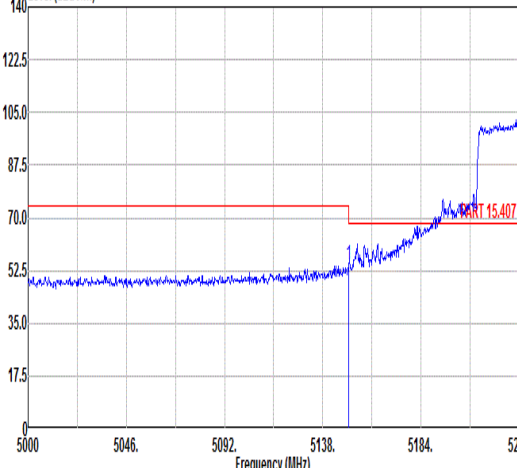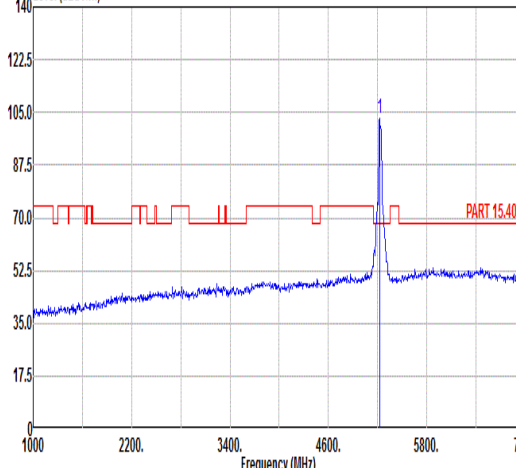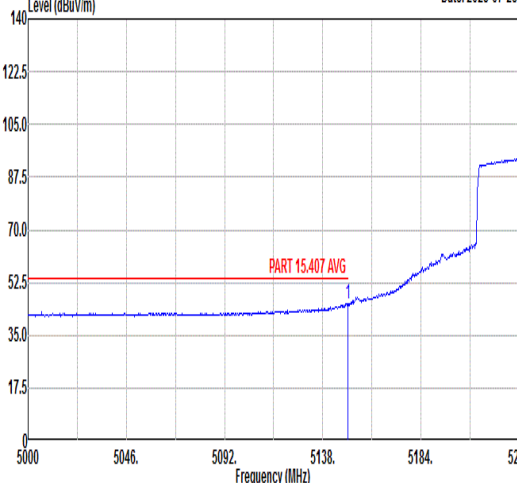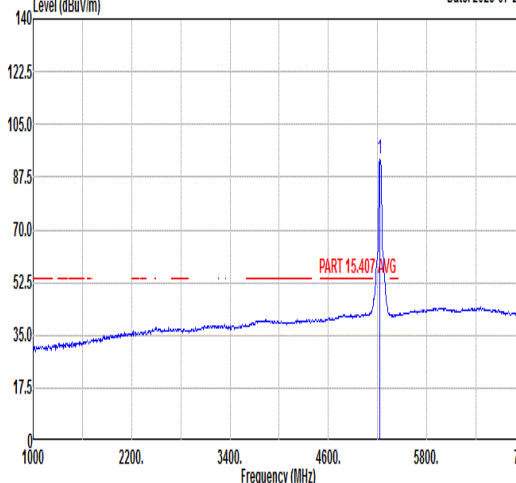

Mode	20																																																																																					
	Band Edge - L																																																																																					
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz																																																																																					
ANT	22																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-07-28  500050465092513851845230 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.96</td><td>54.34</td><td>74.00</td><td>-19.66</td><td>43.98</td><td>35.29</td><td>8.54</td><td>33.47</td><td>100</td><td>48</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.96	54.34	74.00	-19.66	43.98	35.29	8.54	33.47	100	48	PEAK	Level (dBuV/m) Date: 2025-07-28  100022003400460058007000 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>103.17</td><td>-----</td><td>-----</td><td>92.59</td><td>35.33</td><td>8.71</td><td>33.46</td><td>100</td><td>48</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5230.00	103.17	-----	-----	92.59	35.33	8.71	33.46	100	48	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5149.96	54.34	74.00	-19.66	43.98	35.29	8.54	33.47	100	48	PEAK																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5230.00	103.17	-----	-----	92.59	35.33	8.71	33.46	100	48	PEAK																																																																											
Avg	Level (dBuV/m) Date: 2025-07-28  500050465092513851845230 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.73</td><td>45.31</td><td>54.00</td><td>-8.69</td><td>34.95</td><td>35.29</td><td>8.54</td><td>33.47</td><td>100</td><td>48</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.73	45.31	54.00	-8.69	34.95	35.29	8.54	33.47	100	48	AVERAGE	Level (dBuV/m) Date: 2025-07-28  100022003400460058007000 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>93.33</td><td>-----</td><td>-----</td><td>82.70</td><td>35.34</td><td>8.74</td><td>33.45</td><td>100</td><td>48</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5230.00	93.33	-----	-----	82.70	35.34	8.74	33.45	100	48	AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5149.73	45.31	54.00	-8.69	34.95	35.29	8.54	33.47	100	48	AVERAGE																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																													
1	5230.00	93.33	-----	-----	82.70	35.34	8.74	33.45	100	48	AVERAGE																																																																											

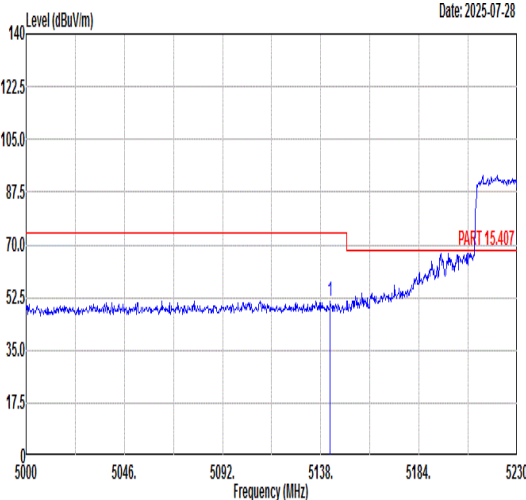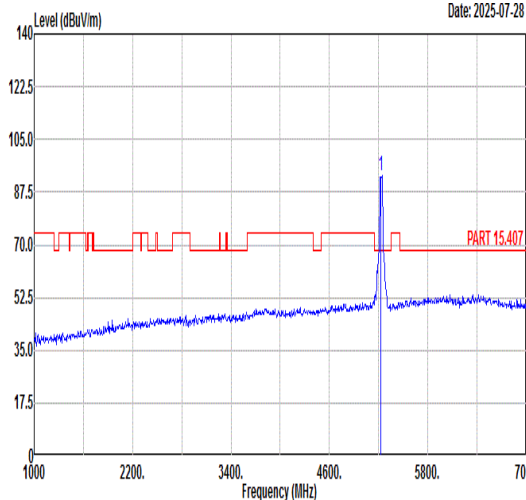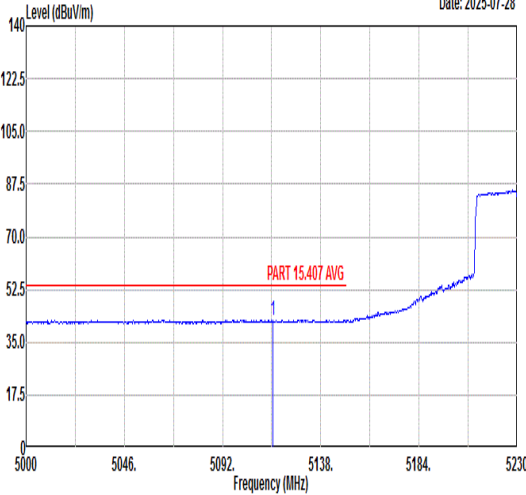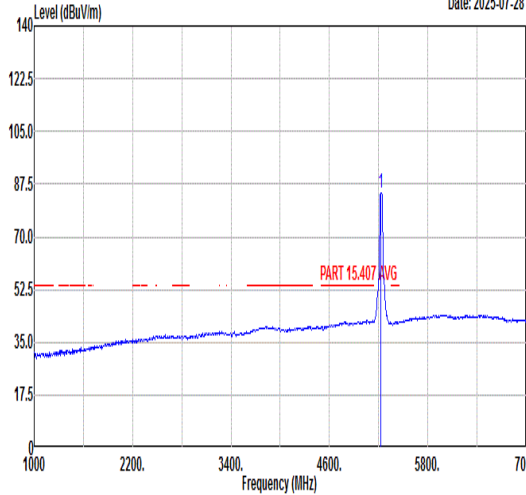

Mode	20																																																																																																																																																																		
	Band Edge - L																																																																																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz																																																																																																																																																																		
ANT	22																																																																																																																																																																		
Pol.	Vertical	Fundamental																																																																																																																																																																	
Peak	Level (dBuV/m) Date: 2025-07-28  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5142.37</td><td>51.31</td><td>74.00</td><td>-22.69</td><td>40.97</td><td>35.29</td><td>8.52</td><td>33.47</td><td>101</td><td>74 PEAK</td></tr></table> Level (dBuV/m) Date: 2025-07-28  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5230.00</td><td>93.16</td><td>-----</td><td>-----</td><td>82.45</td><td>35.35</td><td>8.81</td><td>33.45</td><td>101</td><td>74 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5142.37	51.31	74.00	-22.69	40.97	35.29	8.52	33.47	101	74 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5230.00	93.16	-----	-----	82.45	35.35	8.81	33.45	101	74 PEAK	Avg	Level (dBuV/m) Date: 2025-07-28  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5115.46</td><td>42.35</td><td>54.00</td><td>-11.65</td><td>32.09</td><td>35.27</td><td>8.47</td><td>33.48</td><td>101</td><td>74 AVERAGE</td></tr></table> Level (dBuV/m) Date: 2025-07-28  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5230.00</td><td>84.67</td><td>-----</td><td>-----</td><td>74.01</td><td>35.34</td><td>8.77</td><td>33.45</td><td>101</td><td>74 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5115.46	42.35	54.00	-11.65	32.09	35.27	8.47	33.48	101	74 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5230.00	84.67	-----	-----	74.01	35.34	8.77	33.45	101	74 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1 5142.37	51.31	74.00	-22.69	40.97	35.29	8.52	33.47	101	74 PEAK																																																																																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1 5230.00	93.16	-----	-----	82.45	35.35	8.81	33.45	101	74 PEAK																																																																																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1 5115.46	42.35	54.00	-11.65	32.09	35.27	8.47	33.48	101	74 AVERAGE																																																																																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																										
1 5230.00	84.67	-----	-----	74.01	35.34	8.77	33.45	101	74 AVERAGE																																																																																																																																																										





Mode	20																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_5230MHz																																										
ANT	22																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2025-07-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5431.94</td><td>51.64</td><td>74.00</td><td>-22.36</td><td>39.92</td><td>35.46</td><td>9.67</td><td>33.41</td><td>101</td><td>74 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5431.94	51.64	74.00	-22.36	39.92	35.46	9.67	33.41	101	74 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5431.94	51.64	74.00	-22.36	39.92	35.46	9.67	33.41	101	74 PEAK																																	
Avg	Date: 2025-07-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.62</td><td>42.37</td><td>54.00</td><td>-11.63</td><td>30.61</td><td>35.48</td><td>9.69</td><td>33.41</td><td>101</td><td>74 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5458.62	42.37	54.00	-11.63	30.61	35.48	9.69	33.41	101	74 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5458.62	42.37	54.00	-11.63	30.61	35.48	9.69	33.41	101	74 AVERAGE																																	







Mode	21																																																																																																					
	Band Edge - L																																																																																																					
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz																																																																																																					
ANT	22																																																																																																					
Pol.	Horizontal	Fundamental																																																																																																				
Peak	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5128.79</td><td>51.40</td><td>74.00</td><td>-22.60</td><td>41.09</td><td>35.28</td><td>8.50</td><td>33.47</td><td>100</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>48 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5128.79	51.40	74.00	-22.60	41.09	35.28	8.50	33.47	100										48 PEAK	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5270.00</td><td>101.57</td><td>-----</td><td>-----</td><td>90.70</td><td>35.36</td><td>8.96</td><td>33.45</td><td>100</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>48 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5270.00	101.57	-----	-----	90.70	35.36	8.96	33.45	100										48 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5128.79	51.40	74.00	-22.60	41.09	35.28	8.50	33.47	100																																																																																													
									48 PEAK																																																																																													
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5270.00	101.57	-----	-----	90.70	35.36	8.96	33.45	100																																																																																													
									48 PEAK																																																																																													
Avg	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5100.44</td><td>42.47</td><td>54.00</td><td>-11.53</td><td>32.25</td><td>35.26</td><td>8.44</td><td>33.48</td><td>100</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>48 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5100.44	42.47	54.00	-11.53	32.25	35.26	8.44	33.48	100										48 AVERAGE	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5270.00</td><td>92.38</td><td>-----</td><td>-----</td><td>81.51</td><td>35.36</td><td>8.96</td><td>33.45</td><td>100</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>48 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5270.00	92.38	-----	-----	81.51	35.36	8.96	33.45	100										48 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5100.44	42.47	54.00	-11.53	32.25	35.26	8.44	33.48	100																																																																																													
									48 AVERAGE																																																																																													
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	5270.00	92.38	-----	-----	81.51	35.36	8.96	33.45	100																																																																																													
									48 AVERAGE																																																																																													

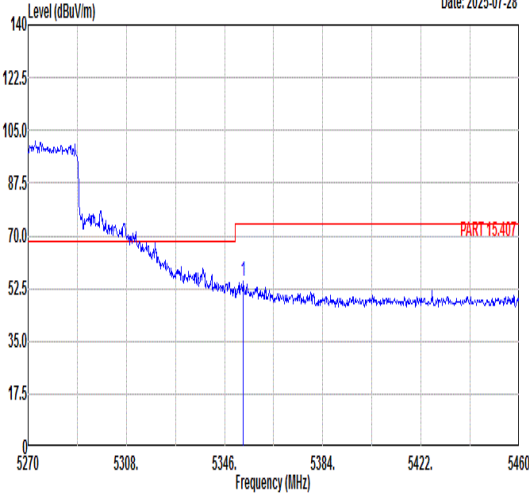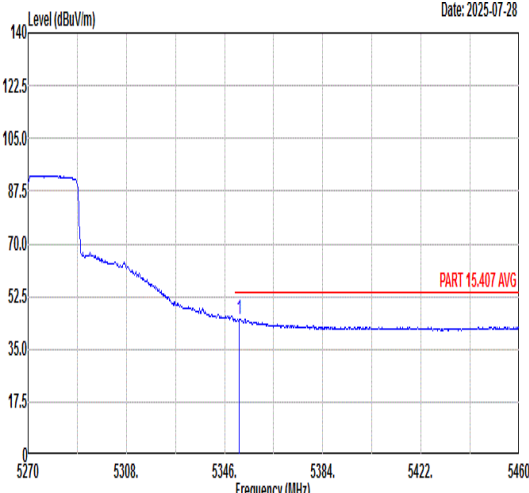

Mode	21																																										
	Band Edge - R																																										
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz																																										
ANT	22																																										
Pol.	Horizontal	Fundamental																																									
Peak	Date: 2025-07-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5353.22</td><td>54.83</td><td>74.00</td><td>-19.17</td><td>43.47</td><td>35.41</td><td>9.38</td><td>33.43</td><td>100</td><td>48 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5353.22	54.83	74.00	-19.17	43.47	35.41	9.38	33.43	100	48 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5353.22	54.83	74.00	-19.17	43.47	35.41	9.38	33.43	100	48 PEAK																																	
Avg	Date: 2025-07-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.70</td><td>44.86</td><td>54.00</td><td>-9.14</td><td>33.51</td><td>35.41</td><td>9.37</td><td>33.43</td><td>100</td><td>48 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5351.70	44.86	54.00	-9.14	33.51	35.41	9.37	33.43	100	48 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5351.70	44.86	54.00	-9.14	33.51	35.41	9.37	33.43	100	48 AVERAGE																																	

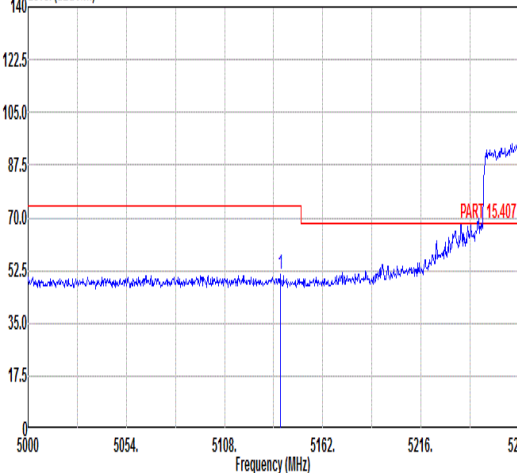
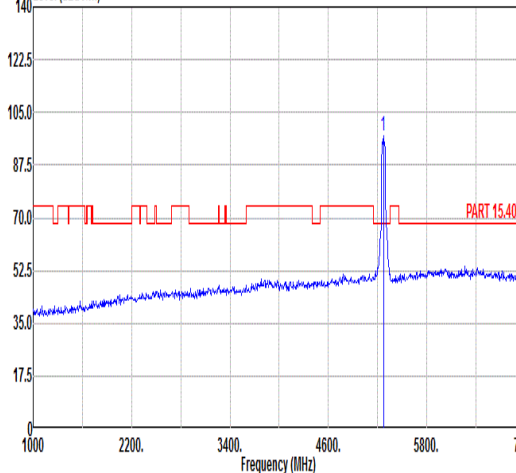
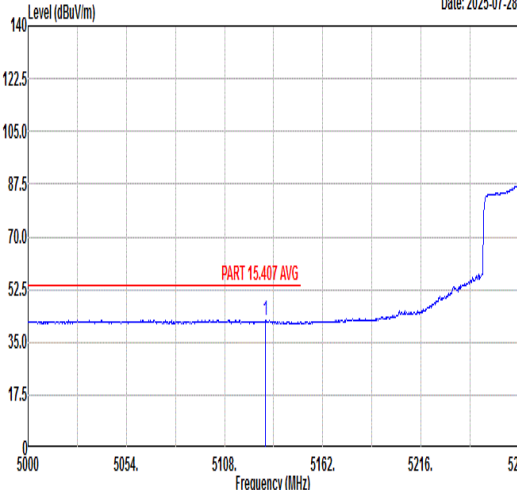
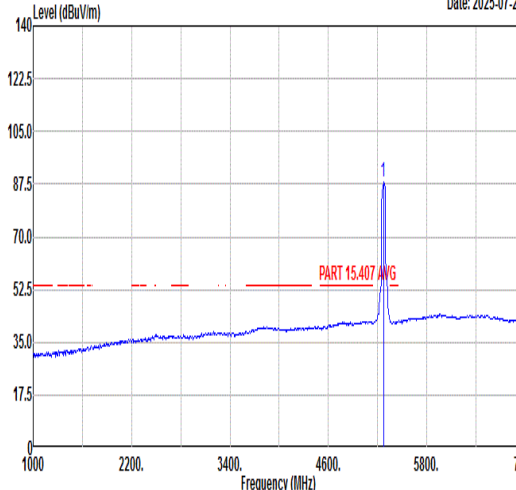


Mode	21																						
	Band Edge - L																						
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz																						
ANT	22																						
Pol.	Vertical																						
Peak	Level (dBuV/m) Date: 2025-07-28  1 5138.51 51.35 74.00 -22.65 41.03 35.28 8.51 33.47 385 253 PEAK											Level (dBuV/m) Date: 2025-07-28  1 5270.00 97.33 ----- 86.46 35.36 8.96 33.45 385 253 PEAK											
	Avg	Level (dBuV/m) Date: 2025-07-28  1 5130.41 42.41 54.00 -11.59 32.10 35.28 8.50 33.47 385 253 AVERAGE											Level (dBuV/m) Date: 2025-07-28  1 5270.00 88.49 ----- 77.57 35.37 8.99 33.44 385 253 AVERAGE										



Mode	21																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_5270MHz																																									
ANT	22																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2025-07-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5409.27</td><td>51.14</td><td>74.00</td><td>-22.86</td><td>39.45</td><td>35.45</td><td>9.66</td><td>33.42</td><td>385 253 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5409.27	51.14	74.00	-22.86	39.45	35.45	9.66	33.42	385 253 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5409.27	51.14	74.00	-22.86	39.45	35.45	9.66	33.42	385 253 PEAK																																	
Avg	Date: 2025-07-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5352.46</td><td>42.78</td><td>54.00</td><td>-11.22</td><td>31.42</td><td>35.41</td><td>9.38</td><td>33.43</td><td>385 253 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5352.46	42.78	54.00	-11.22	31.42	35.41	9.38	33.43	385 253 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5352.46	42.78	54.00	-11.22	31.42	35.41	9.38	33.43	385 253 AVERAGE																																	

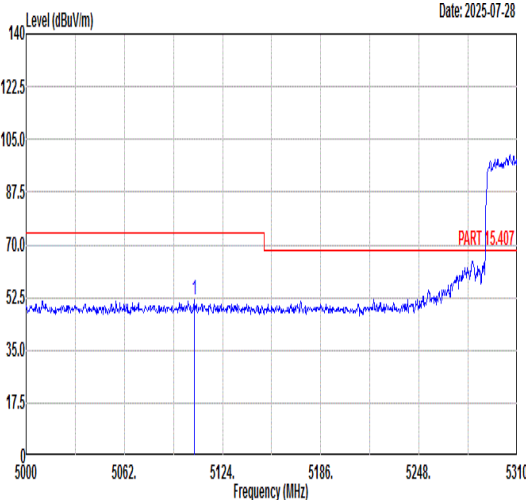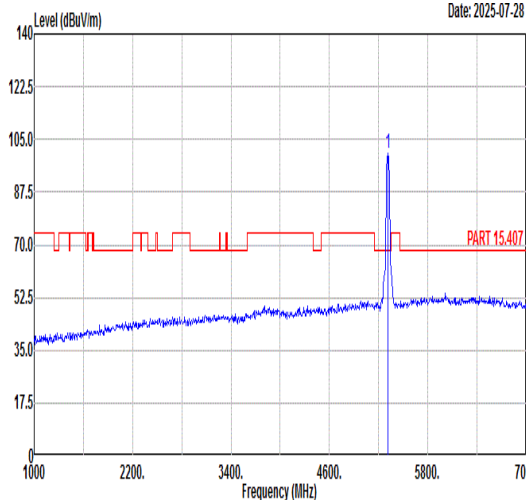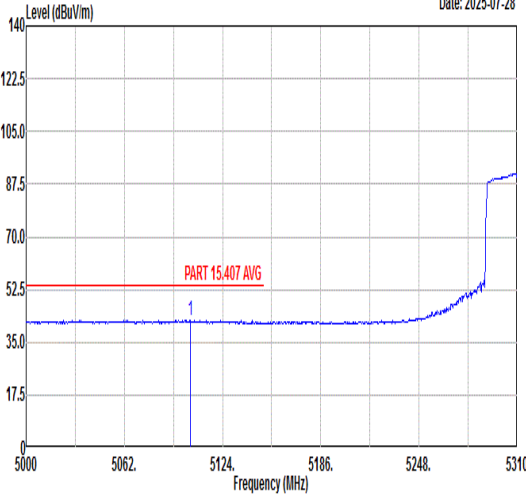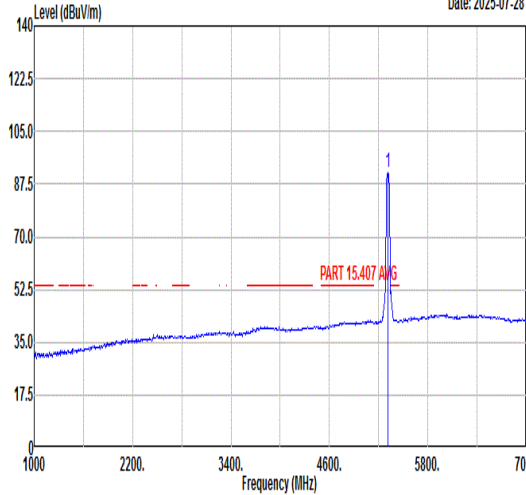

Mode	22																																																																																														
	Band Edge - L																																																																																														
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz																																																																																														
ANT	22																																																																																														
Pol.	Horizontal						Fundamental																																																																																								
Peak																																																																																															
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5106.02</td><td>51.60</td><td>74.00</td><td>-22.40</td><td>41.37</td><td>35.26</td><td>8.45</td><td>33.48</td><td>100</td><td>74</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5106.02	51.60	74.00	-22.40	41.37	35.26	8.45	33.48	100	74	PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>100.53</td><td>-----</td><td>-----</td><td>89.40</td><td>35.39</td><td>9.18</td><td>33.44</td><td>100</td><td>74</td><td>PEAK</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5310.00	100.53	-----	-----	89.40	35.39	9.18	33.44	100	74
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5106.02	51.60	74.00	-22.40	41.37	35.26	8.45	33.48	100	74	PEAK																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5310.00	100.53	-----	-----	89.40	35.39	9.18	33.44	100	74	PEAK																																																																																				
Avg																																																																																															
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5103.85</td><td>42.29</td><td>54.00</td><td>-11.71</td><td>32.06</td><td>35.26</td><td>8.45</td><td>33.48</td><td>100</td><td>74</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5103.85	42.29	54.00	-11.71	32.06	35.26	8.45	33.48	100	74	AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>91.41</td><td>-----</td><td>-----</td><td>80.28</td><td>35.39</td><td>9.18</td><td>33.44</td><td>100</td><td>74</td><td>AVERAGE</td></tr></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5310.00	91.41	-----	-----	80.28	35.39	9.18	33.44	100	74
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5103.85	42.29	54.00	-11.71	32.06	35.26	8.45	33.48	100	74	AVERAGE																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5310.00	91.41	-----	-----	80.28	35.39	9.18	33.44	100	74	AVERAGE																																																																																				





Mode	22									
	Band Edge - R									
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz									
ANT	22									
Pol.	Horizontal					Fundamental				
Peak										







Mode	22																																																																																			
	Band Edge - L																																																																																			
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz																																																																																			
ANT	22																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2025-07-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5022.01</td><td>51.14</td><td>74.00</td><td>-22.86</td><td>41.13</td><td>35.21</td><td>8.30</td><td>33.50</td><td>400</td><td>271 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5022.01	51.14	74.00	-22.86	41.13	35.21	8.30	33.50	400	271 PEAK	Level (dBuV/m) Date: 2025-07-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>92.59</td><td>-----</td><td>-----</td><td>81.46</td><td>35.39</td><td>9.18</td><td>33.44</td><td>400</td><td>271 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	92.59	-----	-----	81.46	35.39	9.18	33.44	400	271 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5022.01	51.14	74.00	-22.86	41.13	35.21	8.30	33.50	400	271 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5310.00	92.59	-----	-----	81.46	35.39	9.18	33.44	400	271 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2025-07-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5037.20</td><td>42.40</td><td>54.00</td><td>-11.60</td><td>32.34</td><td>35.22</td><td>8.33</td><td>33.49</td><td>400</td><td>271 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5037.20	42.40	54.00	-11.60	32.34	35.22	8.33	33.49	400	271 AVERAGE	Level (dBuV/m) Date: 2025-07-28 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>85.17</td><td>-----</td><td>-----</td><td>74.04</td><td>35.39</td><td>9.18</td><td>33.44</td><td>400</td><td>271 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	85.17	-----	-----	74.04	35.39	9.18	33.44	400	271 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5037.20	42.40	54.00	-11.60	32.34	35.22	8.33	33.49	400	271 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5310.00	85.17	-----	-----	74.04	35.39	9.18	33.44	400	271 AVERAGE																																																																										

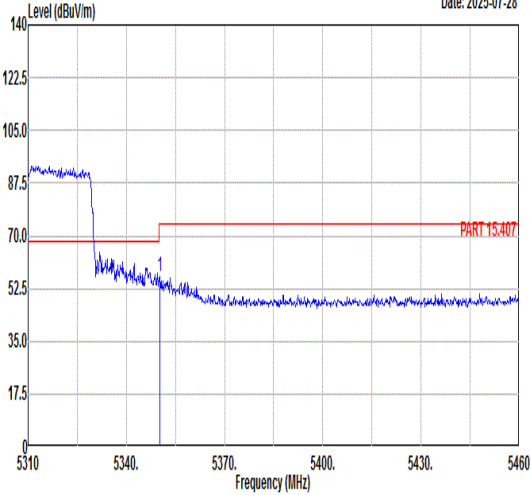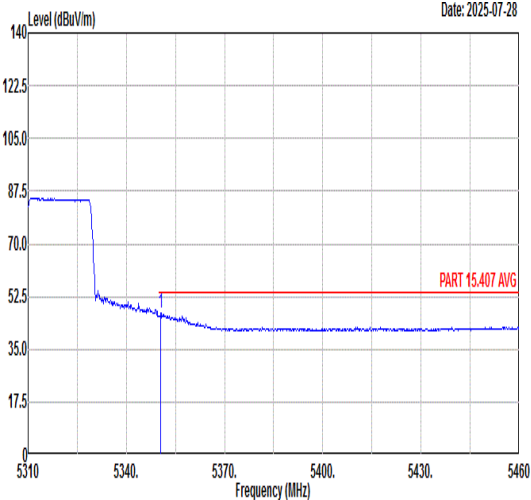


Mode	22																																																		
	Band Edge - R																																																		
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_5310MHz																																																		
ANT	22																																																		
Pol.	Vertical					Fundamental																																													
Peak	Date: 2025-07-28 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.20</td><td>56.34</td><td>74.00</td><td>-17.66</td><td>44.99</td><td>35.41</td><td>9.37</td><td>33.43</td><td>400</td><td>271 PEAK</td></tr></tbody></table> Blank						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.20	56.34	74.00	-17.66	44.99	35.41	9.37	33.43	400	271 PEAK					
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	5350.20	56.34	74.00	-17.66	44.99	35.41	9.37	33.43	400	271 PEAK																																									
Avg	Date: 2025-07-28 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.50</td><td>46.90</td><td>54.00</td><td>-7.10</td><td>35.55</td><td>35.41</td><td>9.37</td><td>33.43</td><td>400</td><td>271 AVERAGE</td></tr></tbody></table> Blank						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.50	46.90	54.00	-7.10	35.55	35.41	9.37	33.43	400	271 AVERAGE					
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	5350.50	46.90	54.00	-7.10	35.55	35.41	9.37	33.43	400	271 AVERAGE																																									

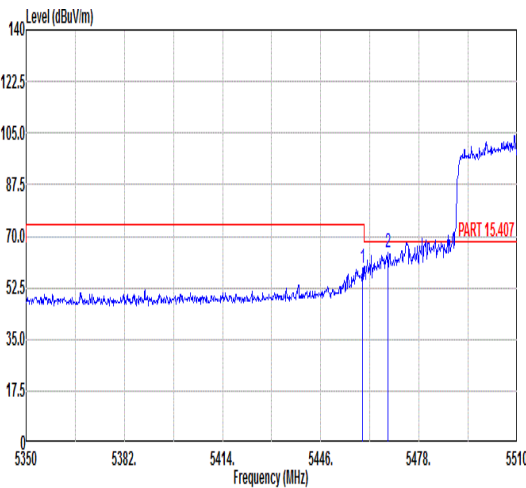
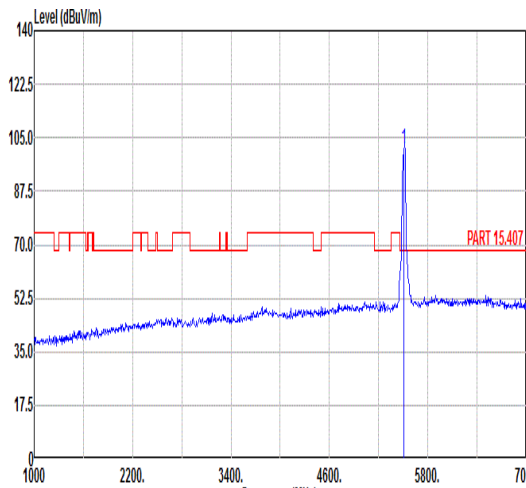
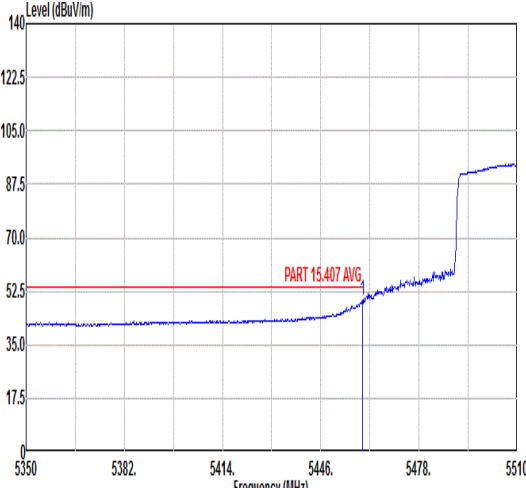
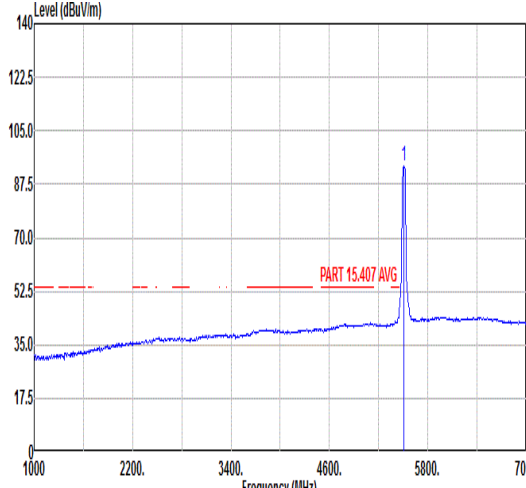


Mode	23																																																																																																							
	Band Edge - L																																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_5510MHz																																																																																																							
ANT	22																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																	
Peak																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.60</td><td>59.04</td><td>74.00</td><td>-14.96</td><td>47.28</td><td>35.48</td><td>9.69</td><td>33.41</td><td>108</td><td>79</td><td>PEAK</td></tr><tr><td>2</td><td>5467.76</td><td>64.53</td><td>68.30</td><td>-3.77</td><td>52.77</td><td>35.48</td><td>9.69</td><td>33.41</td><td>108</td><td>79</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.60	59.04	74.00	-14.96	47.28	35.48	9.69	33.41	108	79	PEAK	2	5467.76	64.53	68.30	-3.77	52.77	35.48	9.69	33.41	108	79	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>101.46</td><td>-----</td><td>-----</td><td>89.61</td><td>35.53</td><td>9.72</td><td>33.40</td><td>108</td><td>79</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	101.46	-----	-----	89.61	35.53	9.72	33.40	108	79
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5459.60	59.04	74.00	-14.96	47.28	35.48	9.69	33.41	108	79	PEAK																																																																																													
2	5467.76	64.53	68.30	-3.77	52.77	35.48	9.69	33.41	108	79	PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5510.00	101.46	-----	-----	89.61	35.53	9.72	33.40	108	79	PEAK																																																																																													
Avg																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.60</td><td>49.78</td><td>54.00</td><td>-4.22</td><td>38.02</td><td>35.48</td><td>9.69</td><td>33.41</td><td>108</td><td>79</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.60	49.78	54.00	-4.22	38.02	35.48	9.69	33.41	108	79	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>93.74</td><td>-----</td><td>-----</td><td>81.91</td><td>35.52</td><td>9.71</td><td>33.40</td><td>108</td><td>79</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	93.74	-----	-----	81.91	35.52	9.71	33.40	108	79	AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5459.60	49.78	54.00	-4.22	38.02	35.48	9.69	33.41	108	79	AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5510.00	93.74	-----	-----	81.91	35.52	9.71	33.40	108	79	AVERAGE																																																																																													

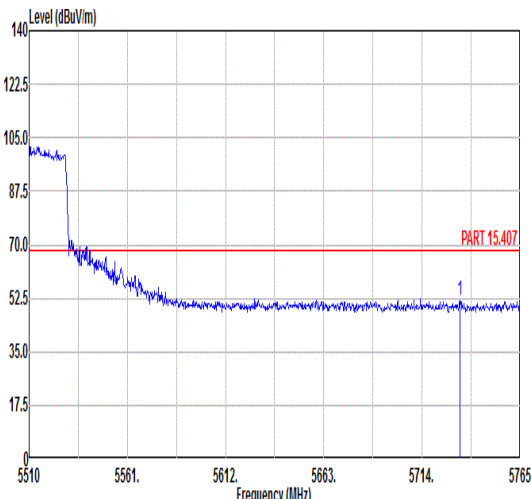


Mode	23																																																																		
	Band Edge - R																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_5510MHz																																																																		
ANT	22																																																																		
Pol.	Horizontal						Fundamental																																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5733.64</td><td>51.56</td><td>68.30</td><td>-16.74</td><td>39.14</td><td>35.83</td><td>10.04</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>33.45</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>108</td><td>79</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5733.64	51.56	68.30	-16.74	39.14	35.83	10.04							33.45								108	79								PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																												
1	5733.64	51.56	68.30	-16.74	39.14	35.83	10.04																																																												
						33.45																																																													
						108	79																																																												
							PEAK																																																												

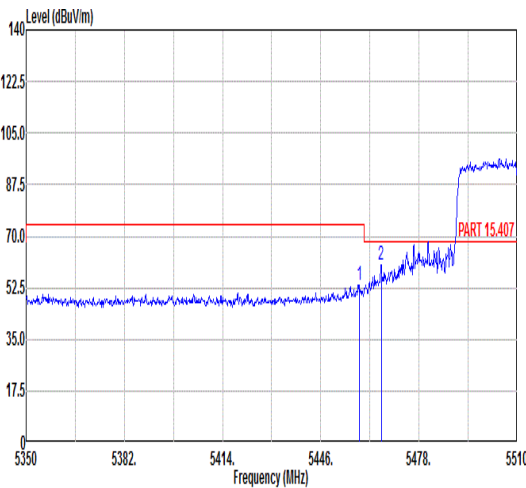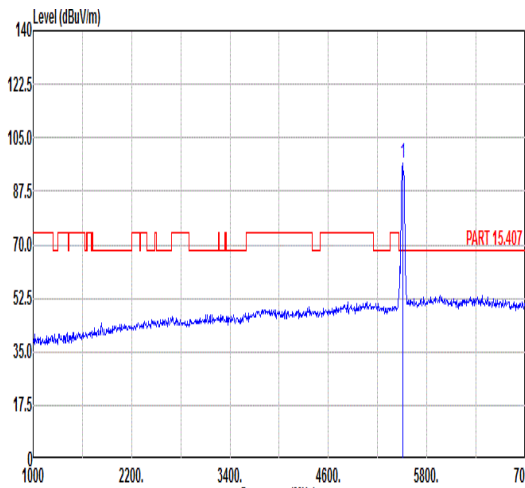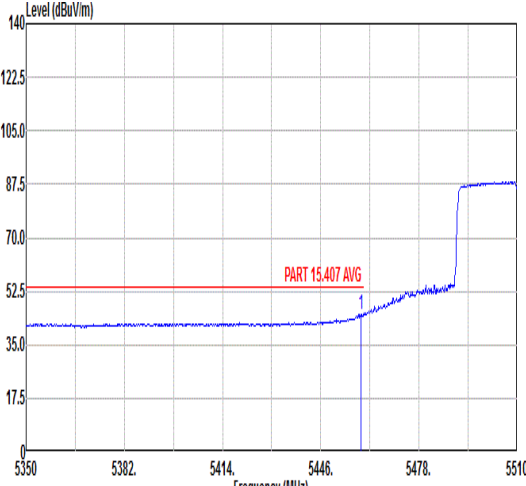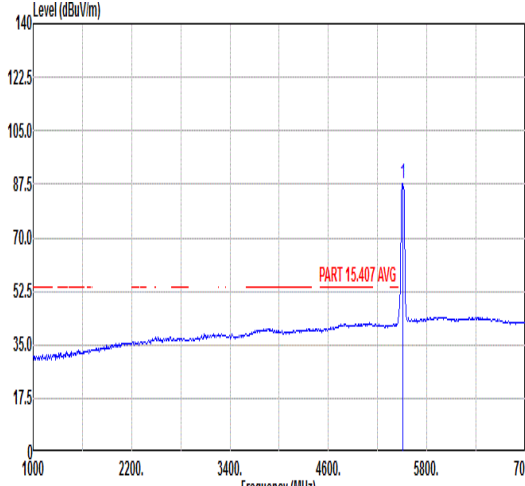

Mode	23																																																																																																							
	Band Edge - L																																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_5510MHz																																																																																																							
ANT	22																																																																																																							
Pol.	Vertical						Fundamental																																																																																																	
Peak																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.64</td><td>53.20</td><td>74.00</td><td>-20.80</td><td>41.44</td><td>35.48</td><td>9.69</td><td>33.41</td><td>400</td><td>254</td><td>PEAK</td></tr><tr><td>2</td><td>5465.68</td><td>60.41</td><td>68.30</td><td>-7.89</td><td>48.65</td><td>35.48</td><td>9.69</td><td>33.41</td><td>400</td><td>254</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.64	53.20	74.00	-20.80	41.44	35.48	9.69	33.41	400	254	PEAK	2	5465.68	60.41	68.30	-7.89	48.65	35.48	9.69	33.41	400	254	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>96.45</td><td>-----</td><td>-----</td><td>84.63</td><td>35.51</td><td>9.71</td><td>33.40</td><td>400</td><td>254</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	96.45	-----	-----	84.63	35.51	9.71	33.40	400	254
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5458.64	53.20	74.00	-20.80	41.44	35.48	9.69	33.41	400	254	PEAK																																																																																													
2	5465.68	60.41	68.30	-7.89	48.65	35.48	9.69	33.41	400	254	PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5510.00	96.45	-----	-----	84.63	35.51	9.71	33.40	400	254	PEAK																																																																																													
Avg																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.12</td><td>44.98</td><td>54.00</td><td>-9.02</td><td>33.22</td><td>35.48</td><td>9.69</td><td>33.41</td><td>400</td><td>254</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.12	44.98	54.00	-9.02	33.22	35.48	9.69	33.41	400	254	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>87.87</td><td>-----</td><td>-----</td><td>76.05</td><td>35.51</td><td>9.71</td><td>33.40</td><td>400</td><td>254</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	87.87	-----	-----	76.05	35.51	9.71	33.40	400	254	AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5459.12	44.98	54.00	-9.02	33.22	35.48	9.69	33.41	400	254	AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5510.00	87.87	-----	-----	76.05	35.51	9.71	33.40	400	254	AVERAGE																																																																																													

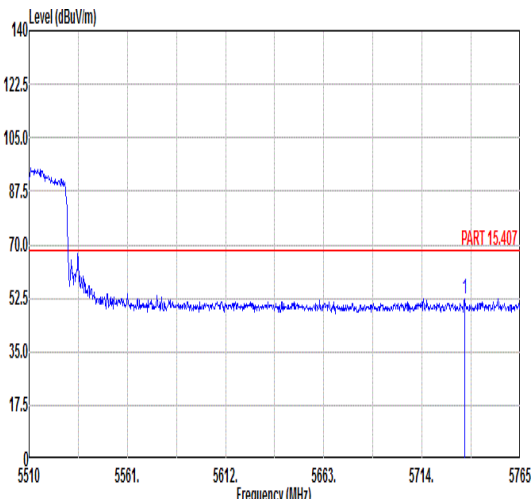

Mode	23																																																									
	Band Edge - R																																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_5510MHz																																																									
ANT	22																																																									
Pol.	Vertical	Fundamental																																																								
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5736.19</td><td>52.47</td><td>68.30</td><td>-15.83</td><td>40.05</td><td>35.83</td><td>10.04</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>33.45</td><td></td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td><td>254</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5736.19	52.47	68.30	-15.83	40.05	35.83	10.04							33.45								400	254								PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																			
1	5736.19	52.47	68.30	-15.83	40.05	35.83	10.04																																																			
						33.45																																																				
						400	254																																																			
							PEAK																																																			



Mode	24																																																																																													
	Band Edge - L																																																																																													
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_5670MHz																																																																																													
ANT	22																																																																																													
Pol.	Horizontal	Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5375.60</td><td>51.18</td><td>74.00</td><td>-22.82</td><td>39.67</td><td>35.43</td><td>9.50</td><td>33.42</td><td>100</td><td>95 PEAK</td></tr><tr><td>2</td><td>5461.68</td><td>50.28</td><td>68.30</td><td>-18.02</td><td>38.52</td><td>35.48</td><td>9.69</td><td>33.41</td><td>100</td><td>95 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5375.60	51.18	74.00	-22.82	39.67	35.43	9.50	33.42	100	95 PEAK	2	5461.68	50.28	68.30	-18.02	38.52	35.48	9.69	33.41	100	95 PEAK	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>105.52</td><td>-----</td><td>93.30</td><td>35.74</td><td>9.91</td><td>33.43</td><td>100</td><td>95 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	105.52	-----	93.30	35.74	9.91	33.43	100	95 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5375.60	51.18	74.00	-22.82	39.67	35.43	9.50	33.42	100	95 PEAK																																																																																				
2	5461.68	50.28	68.30	-18.02	38.52	35.48	9.69	33.41	100	95 PEAK																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5670.00	105.52	-----	93.30	35.74	9.91	33.43	100	95 PEAK																																																																																					
Avg	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5445.36</td><td>42.34</td><td>54.00</td><td>-11.66</td><td>30.60</td><td>35.47</td><td>9.68</td><td>33.41</td><td>100</td><td>95 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5445.36	42.34	54.00	-11.66	30.60	35.47	9.68	33.41	100	95 AVERAGE	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>96.81</td><td>-----</td><td>84.60</td><td>35.74</td><td>9.90</td><td>33.43</td><td>100</td><td>95 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	96.81	-----	84.60	35.74	9.90	33.43	100	95 AVERAGE											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5445.36	42.34	54.00	-11.66	30.60	35.47	9.68	33.41	100	95 AVERAGE																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5670.00	96.81	-----	84.60	35.74	9.90	33.43	100	95 AVERAGE																																																																																					



Mode	24	
	Band Edge - L	
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_5670MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2025-07-28 1 5443.12 50.94 74.00 -23.06 39.20 35.47 9.68 33.41 100 294 PEAK 2 5464.88 50.07 68.30 -18.23 38.31 35.48 9.69 33.41 100 294 PEAK	Level (dBuV/m) Date: 2025-07-28 1 5670.00 96.88 ----- 84.66 35.74 9.91 33.43 100 294 PEAK
	Level (dBuV/m) Date: 2025-07-28 1 5452.40 42.16 54.00 -11.84 30.42 35.47 9.68 33.41 100 294 AVERAGE	Level (dBuV/m) Date: 2025-07-28 1 5670.00 87.83 ----- 75.62 35.74 9.90 33.43 100 294 AVERAGE



Mode	24																																										
	Band Edge - R																																										
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_5670MHz																																										
ANT	22																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2025-07-28 Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5737.74</td><td>58.95</td><td>68.30</td><td>-9.35</td><td>46.52</td><td>35.83</td><td>10.05</td><td>33.45</td><td>100</td><td>294 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5737.74	58.95	68.30	-9.35	46.52	35.83	10.05	33.45	100	294 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																		
1	5737.74	58.95	68.30	-9.35	46.52	35.83	10.05	33.45	100	294 PEAK																																	



Mode	25																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_5210MHz																																																																																									
ANT	22																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5136.08</td><td>58.38</td><td>74.00</td><td>-15.62</td><td>48.06</td><td>35.28</td><td>8.51</td><td>33.47</td><td>100</td><td>61</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5136.08	58.38	74.00	-15.62	48.06	35.28	8.51	33.47	100	61	PEAK	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>97.45</td><td>-----</td><td>-----</td><td>86.96</td><td>35.32</td><td>8.63</td><td>33.46</td><td>100</td><td>61</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5210.00	97.45	-----	-----	86.96	35.32	8.63	33.46	100	61	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	5136.08	58.38	74.00	-15.62	48.06	35.28	8.51	33.47	100	61	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	5210.00	97.45	-----	-----	86.96	35.32	8.63	33.46	100	61	PEAK																																																																															
Avg	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5145.32</td><td>49.44</td><td>54.00</td><td>-4.56</td><td>39.09</td><td>35.29</td><td>8.53</td><td>33.47</td><td>100</td><td>61</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5145.32	49.44	54.00	-4.56	39.09	35.29	8.53	33.47	100	61	AVERAGE	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>89.18</td><td>-----</td><td>-----</td><td>78.66</td><td>35.33</td><td>8.65</td><td>33.46</td><td>100</td><td>61</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5210.00	89.18	-----	-----	78.66	35.33	8.65	33.46	100	61	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	5145.32	49.44	54.00	-4.56	39.09	35.29	8.53	33.47	100	61	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	5210.00	89.18	-----	-----	78.66	35.33	8.65	33.46	100	61	AVERAGE																																																																															



Mode	25																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_5210MHz																																																		
ANT	22																																																		
Pol.	Horizontal						Fundamental																																												
Peak	Date: 2025-07-28 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5357.25</td><td>50.92</td><td>74.00</td><td>-23.08</td><td>39.54</td><td>35.41</td><td>9.40</td><td>33.43</td><td>100</td><td>61</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5357.25	50.92	74.00	-23.08	39.54	35.41	9.40	33.43	100	61	PEAK	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																										
1	5357.25	50.92	74.00	-23.08	39.54	35.41	9.40	33.43	100	61	PEAK																																								
Avg	Date: 2025-07-28 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5355.75</td><td>44.71</td><td>54.00</td><td>-9.29</td><td>33.34</td><td>35.41</td><td>9.39</td><td>33.43</td><td>100</td><td>61</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5355.75	44.71	54.00	-9.29	33.34	35.41	9.39	33.43	100	61	AVERAGE	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																												
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																										
1	5355.75	44.71	54.00	-9.29	33.34	35.41	9.39	33.43	100	61	AVERAGE																																								







Mode	25	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_5210MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2025-07-28 <	





Mode	25																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_5210MHz																																										
ANT	22																																										
Pol.	Vertical					Fundamental																																					
Peak	Date: 2025-07-28 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5450.25</td><td>51.36</td><td>74.00</td><td>-22.64</td><td>39.62</td><td>35.47</td><td>9.68</td><td>33.41</td><td>399</td><td>347</td><td>PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 5450.25	51.36	74.00	-22.64	39.62	35.47	9.68	33.41	399	347	PEAK	Blank				
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																		
1 5450.25	51.36	74.00	-22.64	39.62	35.47	9.68	33.41	399	347	PEAK																																	
Avg	Date: 2025-07-28 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5456.50</td><td>43.72</td><td>54.00</td><td>-10.28</td><td>31.97</td><td>35.47</td><td>9.69</td><td>33.41</td><td>399</td><td>347</td><td>AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 5456.50	43.72	54.00	-10.28	31.97	35.47	9.69	33.41	399	347	AVERAGE	Blank				
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																		
1 5456.50	43.72	54.00	-10.28	31.97	35.47	9.69	33.41	399	347	AVERAGE																																	

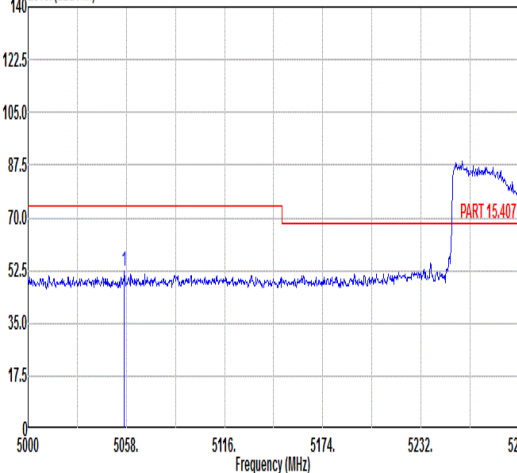
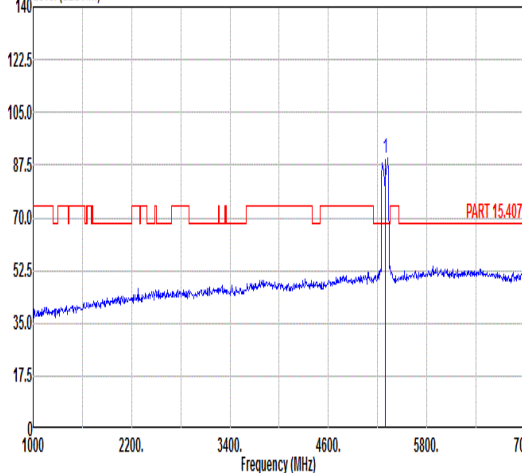
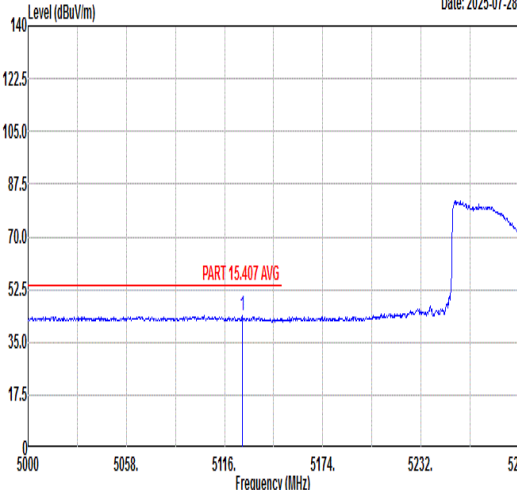
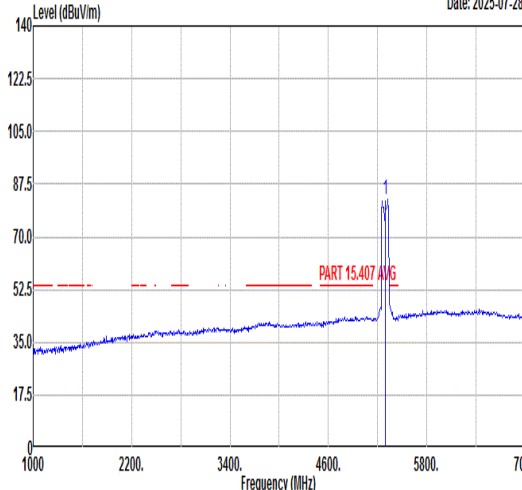


Mode	26																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_5290MHz																																																																									
ANT	22																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-07-28  PART 15.407 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5056.84</td><td>52.05</td><td>74.00</td><td>-21.95</td><td>41.95</td><td>35.23</td><td>8.36</td><td>33.49</td><td>400 44 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5056.84	52.05	74.00	-21.95	41.95	35.23	8.36	33.49	400 44 PEAK	Level (dBuV/m) Date: 2025-07-28  PART 15.407 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5290.00</td><td>89.64</td><td>-----</td><td>-----</td><td>78.43</td><td>35.40</td><td>9.24</td><td>33.43</td><td>400 44 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5290.00	89.64	-----	-----	78.43	35.40	9.24	33.43	400 44 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5056.84	52.05	74.00	-21.95	41.95	35.23	8.36	33.49	400 44 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5290.00	89.64	-----	-----	78.43	35.40	9.24	33.43	400 44 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2025-07-28  PART 15.407 AVG <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5126.44</td><td>43.76</td><td>54.00</td><td>-10.24</td><td>33.46</td><td>35.28</td><td>8.49</td><td>33.47</td><td>400 44 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5126.44	43.76	54.00	-10.24	33.46	35.28	8.49	33.47	400 44 AVERAGE	Level (dBuV/m) Date: 2025-07-28  PART 15.407 AVG <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5290.00</td><td>82.31</td><td>-----</td><td>-----</td><td>71.10</td><td>35.40</td><td>9.24</td><td>33.43</td><td>400 44 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1 5290.00	82.31	-----	-----	71.10	35.40	9.24	33.43	400 44 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5126.44	43.76	54.00	-10.24	33.46	35.28	8.49	33.47	400 44 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																		
1 5290.00	82.31	-----	-----	71.10	35.40	9.24	33.43	400 44 AVERAGE																																																																		

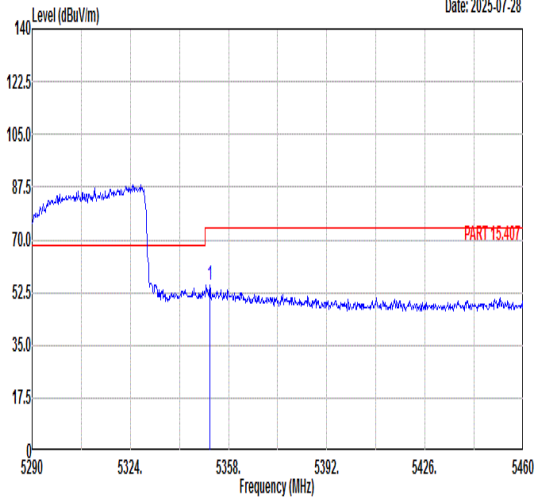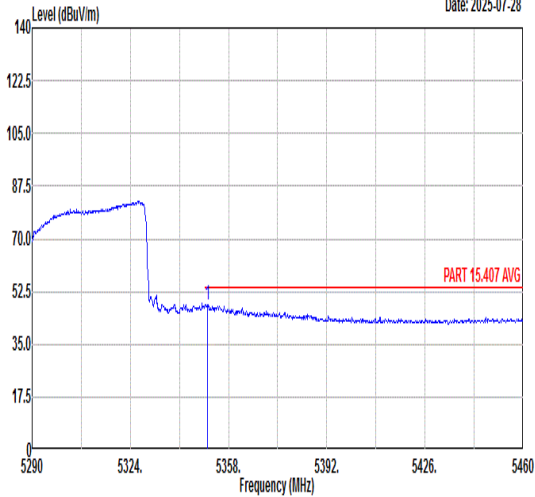

Mode	26																																											
	Band Edge - R																																											
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_5290MHz																																											
ANT	22																																											
Pol.	Horizontal	Fundamental																																										
Peak	Date: 2025-07-28 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5351.54</td><td>55.11</td><td>74.00</td><td>-18.89</td><td>43.76</td><td>35.41</td><td>9.37</td><td>33.43</td><td>400</td><td>44</td><td>PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5351.54	55.11	74.00	-18.89	43.76	35.41	9.37	33.43	400	44	PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																			
1	5351.54	55.11	74.00	-18.89	43.76	35.41	9.37	33.43	400	44	PEAK																																	
Avg	Date: 2025-07-28 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.69</td><td>48.17</td><td>54.00</td><td>-5.83</td><td>36.82</td><td>35.41</td><td>9.37</td><td>33.43</td><td>400</td><td>44</td><td>AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.69	48.17	54.00	-5.83	36.82	35.41	9.37	33.43	400	44	AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																			
1	5350.69	48.17	54.00	-5.83	36.82	35.41	9.37	33.43	400	44	AVERAGE																																	

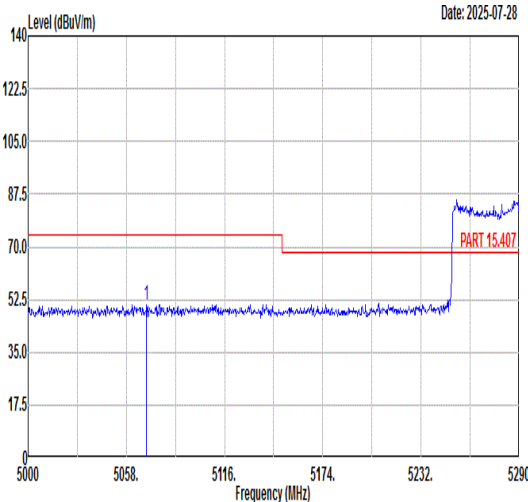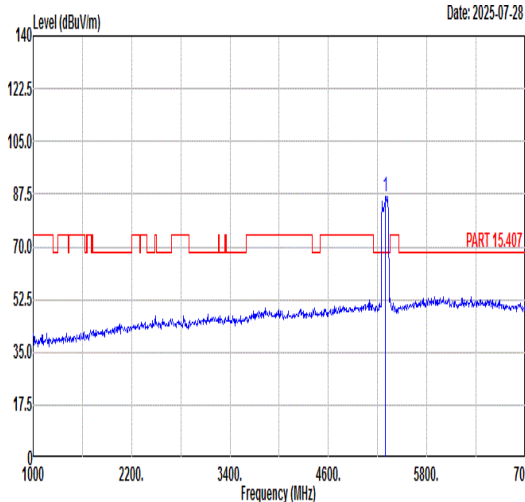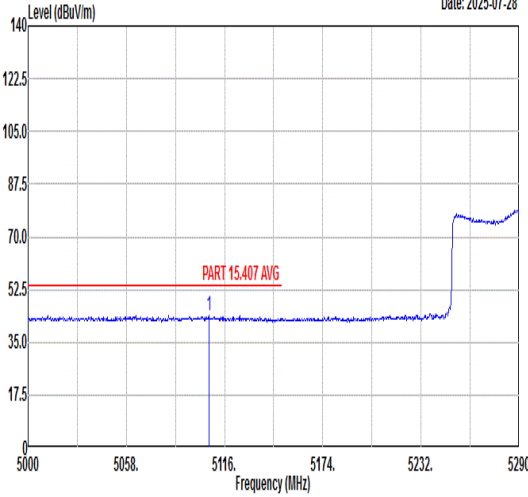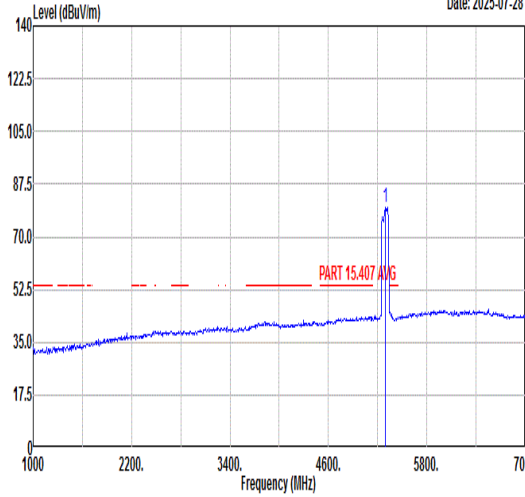

Mode	26																																																																																									
	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_5290MHz																																																																																									
ANT	22																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5069.89</td><td>50.89</td><td>74.00</td><td>-23.11</td><td>40.75</td><td>35.24</td><td>8.39</td><td>33.49</td><td>398</td><td>281</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5069.89	50.89	74.00	-23.11	40.75	35.24	8.39	33.49	398	281	PEAK	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>86.71</td><td>-----</td><td>-----</td><td>75.55</td><td>35.39</td><td>9.21</td><td>33.44</td><td>398</td><td>281</td><td>PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5290.00	86.71	-----	-----	75.55	35.39	9.21	33.44	398	281
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5069.89	50.89	74.00	-23.11	40.75	35.24	8.39	33.49	398	281	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5290.00	86.71	-----	-----	75.55	35.39	9.21	33.44	398	281	PEAK																																																																															
Avg																																																																																										
	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5106.72</td><td>43.88</td><td>54.00</td><td>-10.12</td><td>33.64</td><td>35.26</td><td>8.46</td><td>33.48</td><td>398</td><td>281</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5106.72	43.88	54.00	-10.12	33.64	35.26	8.46	33.48	398	281	AVERAGE	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5290.00</td><td>79.87</td><td>-----</td><td>-----</td><td>68.89</td><td>35.37</td><td>9.05</td><td>33.44</td><td>398</td><td>281</td><td>AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5290.00	79.87	-----	-----	68.89	35.37	9.05	33.44	398	281
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5106.72	43.88	54.00	-10.12	33.64	35.26	8.46	33.48	398	281	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5290.00	79.87	-----	-----	68.89	35.37	9.05	33.44	398	281	AVERAGE																																																																															



Mode	26	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_5290MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	</	



Mode	27																																																																																														
	Band Edge - L																																																																																														
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_5530MHz																																																																																														
ANT	22																																																																																														
Pol.	Horizontal	Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5453.86</td><td>53.18</td><td>74.00</td><td>-20.82</td><td>41.44</td><td>35.47</td><td>9.68</td><td>33.41</td><td>100</td><td>78 PEAK</td></tr><tr><td>2</td><td>5466.46</td><td>54.48</td><td>68.30</td><td>-13.82</td><td>42.72</td><td>35.48</td><td>9.69</td><td>33.41</td><td>100</td><td>78 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5453.86	53.18	74.00	-20.82	41.44	35.47	9.68	33.41	100	78 PEAK	2	5466.46	54.48	68.30	-13.82	42.72	35.48	9.69	33.41	100	78 PEAK	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>94.95</td><td>-----</td><td>-----</td><td>83.10</td><td>35.54</td><td>9.72</td><td>33.41</td><td>100</td><td>78 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	94.95	-----	-----	83.10	35.54	9.72	33.41	100	78 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5453.86	53.18	74.00	-20.82	41.44	35.47	9.68	33.41	100	78 PEAK																																																																																					
2	5466.46	54.48	68.30	-13.82	42.72	35.48	9.69	33.41	100	78 PEAK																																																																																					
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5530.00	94.95	-----	-----	83.10	35.54	9.72	33.41	100	78 PEAK																																																																																					
Avg	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5455.48</td><td>46.52</td><td>54.00</td><td>-7.48</td><td>34.78</td><td>35.47</td><td>9.68</td><td>33.41</td><td>100</td><td>78 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5455.48	46.52	54.00	-7.48	34.78	35.47	9.68	33.41	100	78 AVERAGE	Level (dBuV/m) Date: 2025-07-28 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>88.09</td><td>-----</td><td>-----</td><td>76.24</td><td>35.54</td><td>9.72</td><td>33.41</td><td>100</td><td>78 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	88.09	-----	-----	76.24	35.54	9.72	33.41	100	78 AVERAGE											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5455.48	46.52	54.00	-7.48	34.78	35.47	9.68	33.41	100	78 AVERAGE																																																																																					
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5530.00	88.09	-----	-----	76.24	35.54	9.72	33.41	100	78 AVERAGE																																																																																					