



# FCC TEST REPORT

## FCC ID: 2A5BCHT-S08

Product	:	Portable Speaker
Model Name	:	HT-S08
Brand	:	N/A
Report No.	:	PTC22021603202E-FC02
<b>Prepared for</b>		
Shenzhen Eifer Commerce and Trade Co., Ltd.		
No. 401, Elevator B, Building No. 2, Baoyunda Logistics Center, District 115, Xixiang Street, Baoan District, Shenzhen, China		
<b>Prepared by</b>		
Precise Testing & Certification Co., Ltd.		
Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China		



## 1 TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Eifer Commerce and Trade Co., Ltd.  
Address : No. 401, Elevator B, Building No. 2, Baoyunda Logistics Center,  
District 115, Xixiang Street, Baoan District, Shenzhen, China  
Manufacture's name : Guangzhou Fenwei Audio Equipment Co., Ltd.  
Address : Building B NO.9, Bangshen 3rd road, Xinya street, Huadu,  
Guangzhou, China  
Product name : Portable Speaker  
Model name : HT-S08  
Standards : FCC CFR47 Part 15 Section 15.247  
Test procedure : ANSI C63.10:2013  
Test Date : Feb. 21, 2022 to Mar. 09, 2022  
Date of Issue : Mar. 10, 2022  
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

A handwritten signature in black ink that reads "Abel Yu".

Abel Yu / Engineer

Technical Manager:

A handwritten signature in black ink that reads "Wu Weimin".

Wu Weimin / Manager



## Contents

	<b>Page</b>
<b>1 TEST RESULT CERTIFICATION.....</b>	<b>2</b>
<b>2 TEST SUMMARY.....</b>	<b>5</b>
2.1 TEST SITE.....	6
<b>3 GENERAL INFORMATION.....</b>	<b>7</b>
3.1 GENERAL DESCRIPTION OF E.U.T.....	7
3.2 CHANNEL LIST.....	8
<b>4 EQUIPMENT DURING TEST.....</b>	<b>9</b>
4.1 EQUIPMENTS LIST.....	9
4.2 MEASUREMENT UNCERTAINTY.....	11
4.3 DESCRIPTION OF SUPPORT UNITS.....	12
<b>5 CONDUCTED EMISSION.....</b>	<b>13</b>
5.1 E.U.T. OPERATION.....	13
5.2 EUT SETUP.....	13
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	14
5.4 MEASUREMENT PROCEDURE.....	14
5.5 CONDUCTED EMISSION LIMIT.....	14
5.6 MEASUREMENT DESCRIPTION.....	14
5.7 CONDUCTED EMISSION TEST RESULT.....	14
<b>6 RADIATED SPURIOUS EMISSIONS.....</b>	<b>17</b>
6.1 EUT OPERATION.....	17
6.2 TEST SETUP.....	18
6.3 SPECTRUM ANALYZER SETUP.....	19
6.4 TEST PROCEDURE.....	20
6.5 SUMMARY OF TEST RESULTS.....	22
<b>7 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT.....</b>	<b>28</b>
7.1 TEST PROCEDURE.....	28
7.2 TEST RESULT.....	29
<b>8 6DB BANDWIDTH MEASUREMENT.....</b>	<b>34</b>



8.1 TEST PROCEDURE.....	34
8.2 TEST RESULT.....	34
<b>9 MAXIMUM PEAK OUTPUT POWER.....</b>	<b>36</b>
9.1 TEST PROCEDURE.....	36
9.2 TEST RESULT.....	36
<b>10 POWER SPECTRAL DENSITY.....</b>	<b>38</b>
10.1 TEST PROCEDURE.....	38
10.2 TEST RESULT.....	38
<b>11 ANTENNA APPLICATION.....</b>	<b>41</b>
11.1 ANTENNA REQUIREMENT.....	41
11.2 RESULT.....	41
<b>12 TEST SETUP.....</b>	<b>42</b>
<b>13 APPENDIX II -- EUT PHOTOGRAPH.....</b>	<b>44</b>



## 2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Conducted Spurious Emission	15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Power Spectral Density	15.247(e)	PASS
Antenna Requirement	15.203	PASS

Remark:N/A



Report No.: PTC22021603202E-FC02

## 2.1 Test Site

Precise Testing & Certification Co., Ltd.

Address: Building 1, No. 6, Tongxin Road, Dongcheng Street, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A



### 3 General Information

#### 3.1 General Description of E.U.T.

Product Name	:	Portable Speaker
Model Name	:	HT-S08
Additional model	:	HT-F2,NB-8,NB-7,NB-10,NB-14,NF-2,NB-7A,C-S08,C-F2,F2
Specification	:	BT 5.0 BDR+EDR, BLE
Operation Frequency	:	2402-2480MHz for BT
Number of Channel	:	79 channels for BDR+EDR 40 channels for BLE
Type of Modulation	:	GFSK, $\pi/4$ -DQPSK,8DPSK For DSS; GFSK For BLE;
Antenna installation	:	PCB antenna
Antenna Gain	:	-42 dBi
Rated Power Supply	:	DC 5V via Adapter or DC 3.7V via Battery
Test Power Supply	:	AC 120V/60Hz or DC 3.7V
Hardware Version	:	Y-2059L V3.0
Software Version	:	AB536X



### 3.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	<b>2402</b>	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	<b>19</b>	<b>2440</b>	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	<b>2480</b>
12	2426	26	2454		
13	2428	27	2456		

Note:

1. Test of channel was included the lowest 2402MHz, middle 2440MHz and highest frequency 2480MHz in highest data rate and to perform the test, then record on this report.



## 4 Equipment During Test

### 4.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	SER MY5111038	10Hz-30GHz	Aug. 21, 2022
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	Aug. 21, 2022
Power Meter	Anritsu	ML2495A	0949003	300MHz-40GHz	Aug. 21, 2022
Power Sensor	Anritsu	MA2411B	0917017	300MHz-40GHz	Aug. 21, 2022

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Name of Equipment	Manufacturer	Model	Serial No.	Characteristics	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2022
Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	Aug. 21, 2022
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	25MHz-2GHz	Aug. 21, 2022
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	1MHz-1GHz	Aug. 21, 2022
Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	Aug. 21, 2022
Spectrum Analyzer	Agilent	E4407B	MY45109572	9KHz-40GHz	Aug. 21, 2022
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	1GHz-18GHz	Aug. 21, 2022
Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	Aug. 21, 2022
Horn Antenna	SCHWARZBECK	BBHA 9170	9170-181	14GHz-40GHz	Aug. 21, 2022
Amplifier	SCHWARZBECK	BBV 9721	9721-205	18GHz-40GHz	Aug. 21, 2022
Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	Aug. 21, 2022
RF Cable	R&S	R204	R21X	1GHz-40GHz	Aug. 21, 2022



Conducted Emissions

<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Characteristics</b>	<b>Calibration Due</b>
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	9KHz-3GHz	Aug. 21, 2022
Artificial Mains Network	Rohde&Schwarz	ENV216	102453	9KHz-300MHz	Aug. 21, 2022
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	9KHz-300MHz	Aug. 21, 2022



## 4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 <sup>-6</sup>
Bandwidth	± 1.5 x 10 <sup>-6</sup>
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9kHz~30MHz)	±3.15dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	



### 4.3 Description of Support Units

Equipment	Model No.	Series No.	Parameters
Adapter	HW-110600C00	N/A	Input: AC 100-240V, 50/60Hz Output: DC 5V/2A, DC 10V/4A, DC11V/6A

## 5 Conducted Emission

Test Requirement	:	FCC CFR 47 Part 15 Section 15.207
Test Method	:	ANSI C63.10: 2013
Test Result	:	PASS
Frequency Range	:	150kHz to 30MHz
Class/Severity	:	Class B


### 5.1 E.U.T. Operation

Operating Environment :

Temperature	:	25.5 °C
Humidity	:	51 % RH
Atmospheric Pressure	:	101.2kPa


### 5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10:2013.

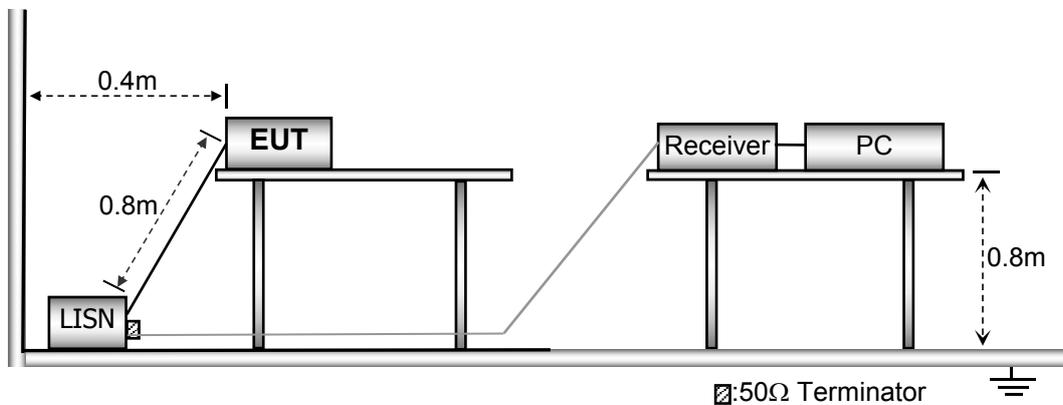



### 5.3 Test SET-UP (Block Diagram of Configuration)

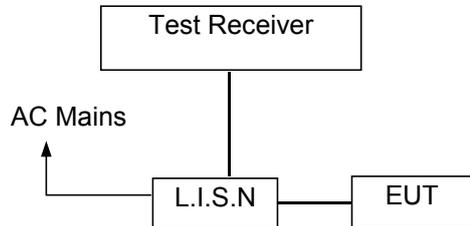

### 5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

### 5.5 Conducted Emission Limit

#### Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

#### Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 5.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


### 5.7 Conducted Emission Test Result

Pass.

All the modulation modes were tested the data of the worst mode (AC 120V/60Hz, GFSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.




Line-AC 120V/60Hz

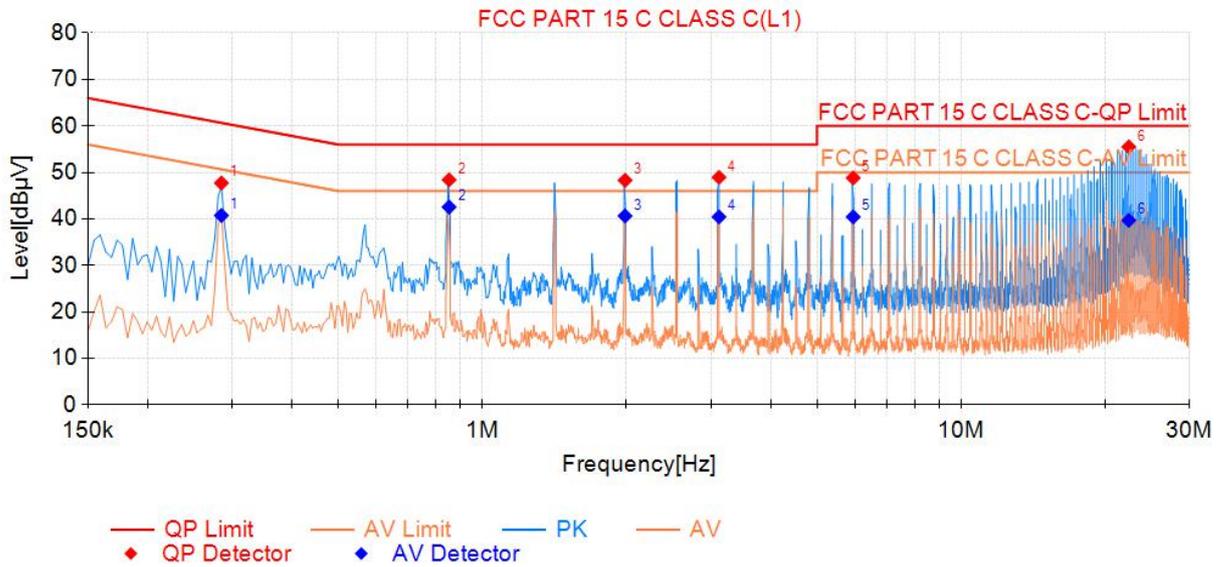

Final Data List								
NO.	Freq. [MHz]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.285	47.73	60.67	12.94	40.75	50.67	9.92	PASS
2	0.852	48.41	56.00	7.59	42.56	46.00	3.44	PASS
3	1.986	48.32	56.00	7.68	40.65	46.00	5.35	PASS
4	3.12	48.96	56.00	7.04	40.44	46.00	5.56	PASS
5	5.9505	48.83	60.00	11.17	40.45	50.00	9.55	PASS
6	22.398	55.51	60.00	4.49	39.71	50.00	10.29	PASS



Neutral-AC 120V/60Hz

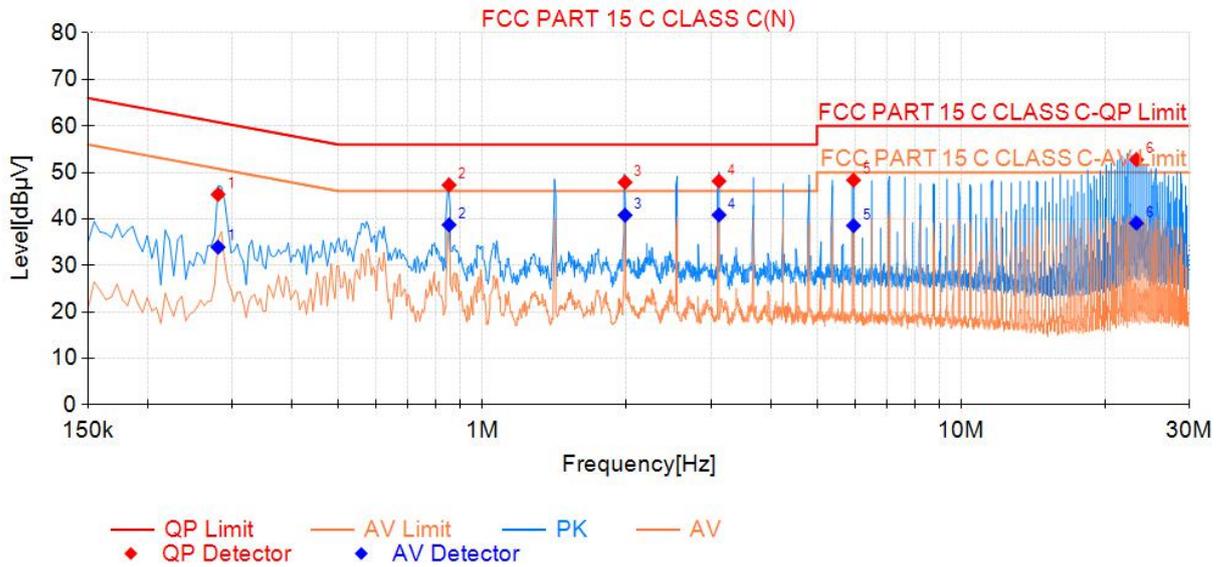

Final Data List								
NO.	Freq. [MHz]	QP Value [dBµV]	QP Limit [dBµV]	QP Margin [dB]	AV Value [dBµV]	AV Limit [dBµV]	AV Margin [dB]	Verdict
1	0.2805	45.28	60.80	15.52	33.92	50.80	16.88	PASS
2	0.852	47.29	56.00	8.71	38.74	46.00	7.26	PASS
3	1.986	47.87	56.00	8.13	40.81	46.00	5.19	PASS
4	3.12	48.13	56.00	7.87	40.85	46.00	5.15	PASS
5	5.9595	48.34	60.00	11.66	38.57	50.00	11.43	PASS
6	23.2395	52.75	60.00	7.25	39.08	50.00	10.92	PASS



## 6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247  
 Test Method : ANSI C63.10:2013  
 Test Result : PASS  
 Measurement Distance : 3m  
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 6.1 EUT Operation


Operating Environment :

Temperature : 23.5 °C  
 Humidity : 51.1 % RH  
 Atmospheric Pressure : 101.2kPa


## 6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

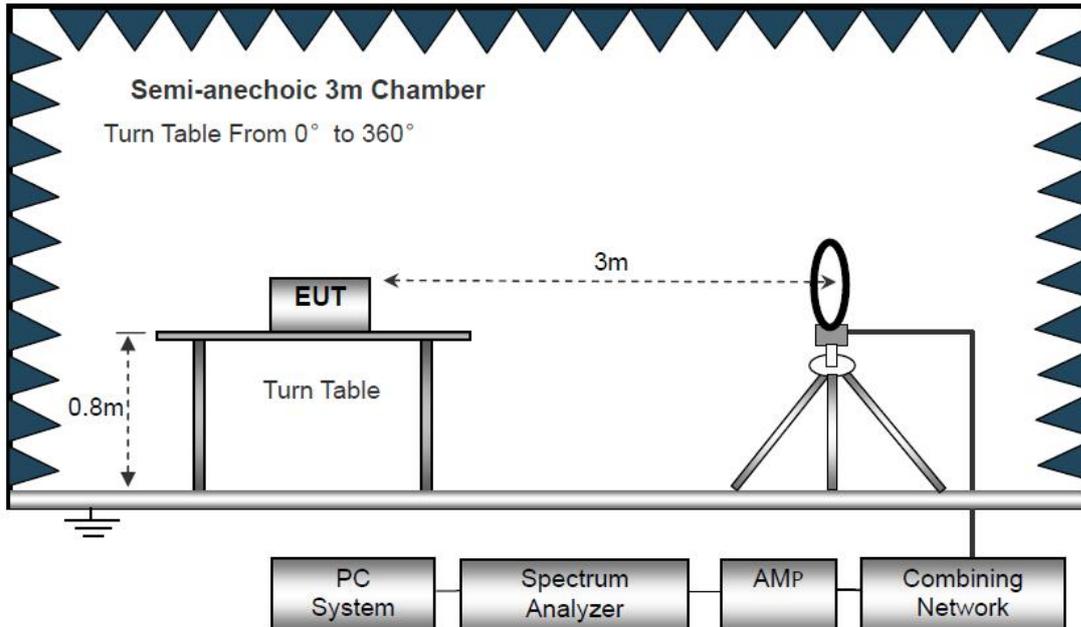

The test setup for emission measurement from 30 MHz to 1 GHz.

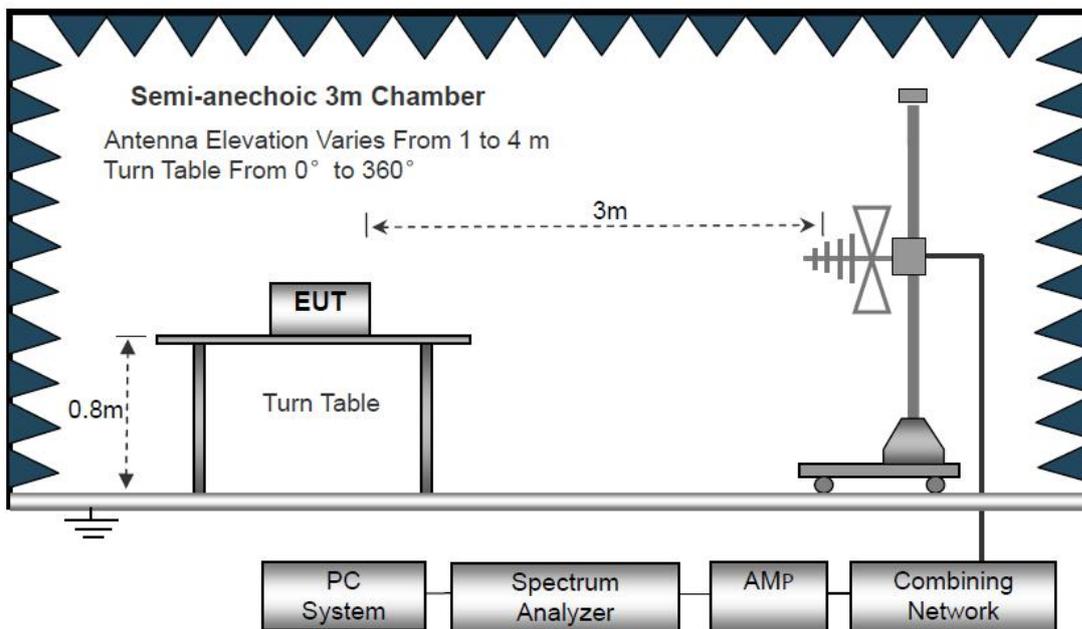

The test setup for emission measurement above 1 GHz

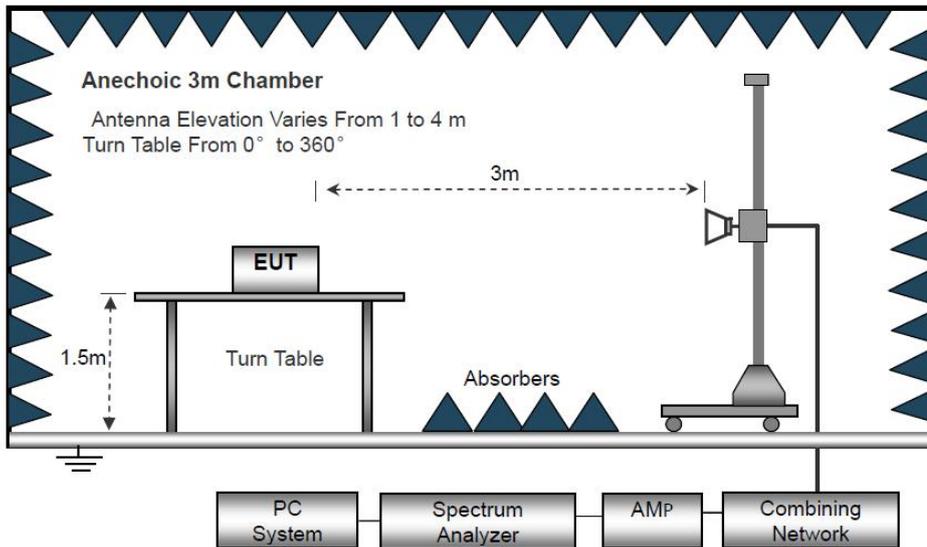

### 6.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value



## 6.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
  - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
  - 2) Change the antenna polarization and repeat 1) with vertical polarization.
  - 3) Make a hardcopy of the spectrum.
  - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
  - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
  - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
  - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
  - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
8. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



For Average Measurement:

VBW=10Hz, when duty cycle is no less than 98 percent.

VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T( $\mu$ s)	1/T(KHz)	Average Correction Factor	VBW Setting
2402-2480	100	-	-	0	10Hz



## 6.5 Summary of Test Results

### Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =  $40\log(\text{Specific distance} / \text{test distance})$  (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.


### Test Frequency: 30MHz ~ 1GHz

Pass.

Please refer to the following test plots for the worst test mode (GFSK (CH00: 2402MHz)).



Antenna Polarization: Horizontal GFSK(CH00: 2402MHz)

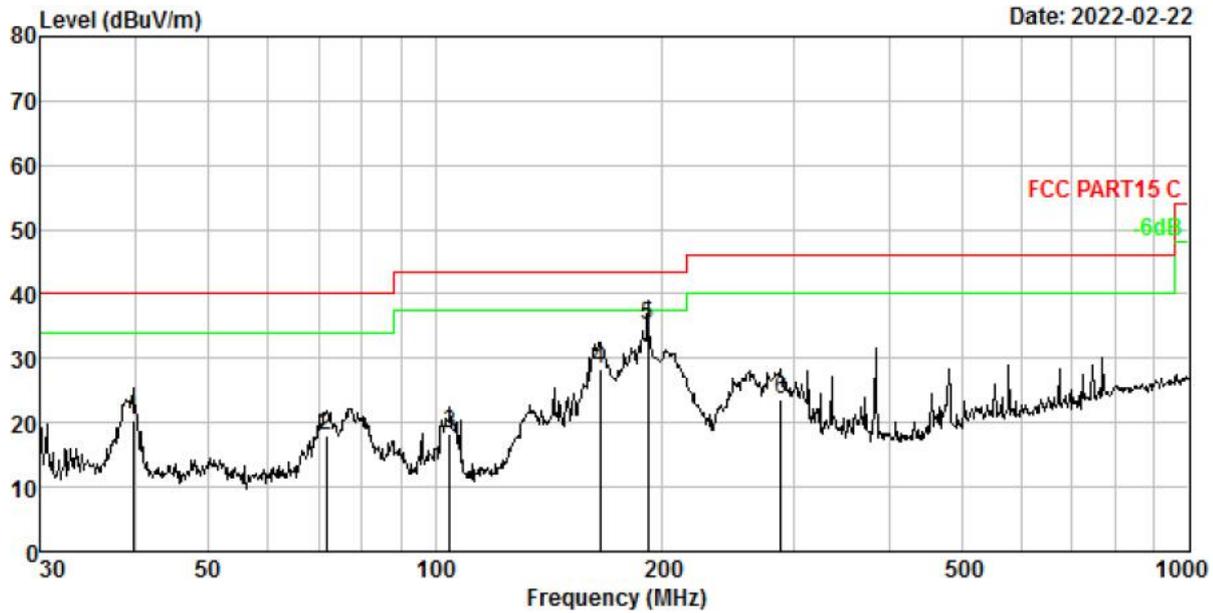


No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBUV	Preamp Factor dB	Emission Level dBUV/m	Limit dBUV/m	Over Limit dB	Remark
1.	39.715	1.69	12.11	36.40	29.91	20.29	40.00	-19.71	QP
2.	71.832	2.70	9.84	35.32	29.96	17.90	40.00	-22.10	QP
3.	104.536	3.35	10.16	34.85	29.99	18.37	43.50	-25.13	QP
4.	165.487	4.14	13.64	40.65	30.03	28.40	43.50	-15.10	QP
5.	191.745	4.39	11.60	49.12	30.04	35.07	43.50	-8.43	QP
6.	287.990	5.09	13.04	35.64	30.29	23.48	46.00	-22.52	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



Antenna Polarization: Vertical GFSK(CH00: 2402MHz)

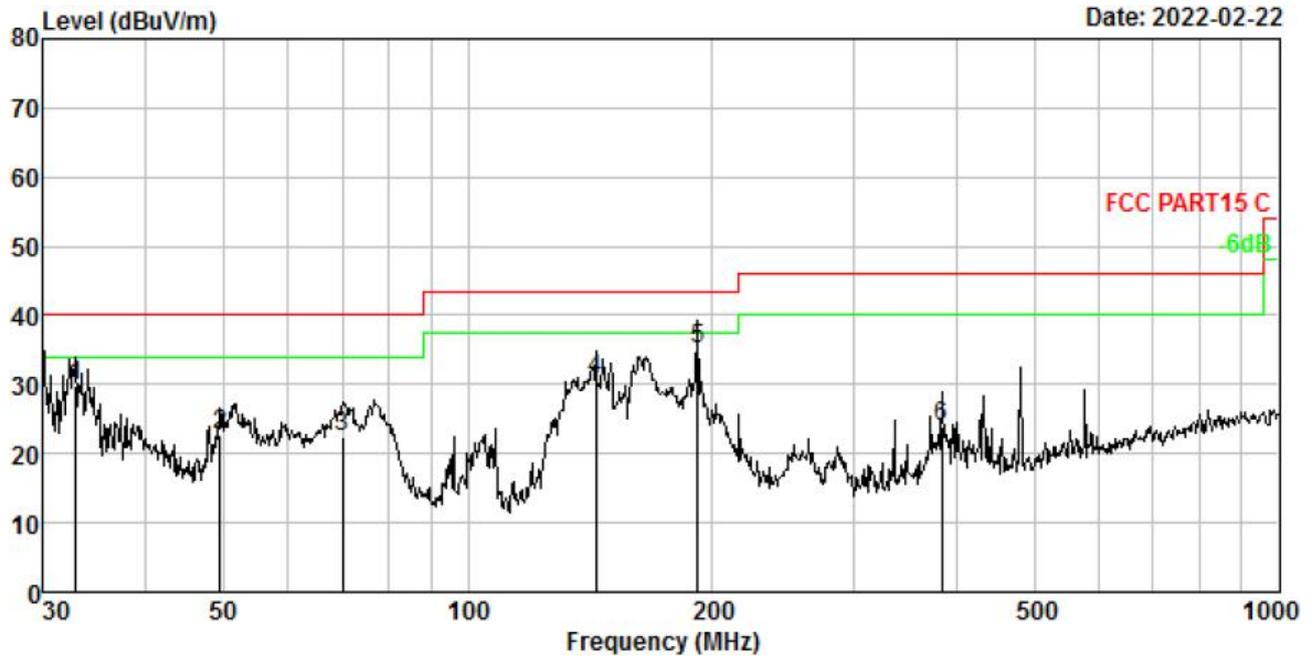

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBUV	Preamp Factor dB	Emission Level dBUV/m	Limit dBUV/m	Over Limit dB	Remark
1.	32.864	1.36	12.00	46.36	29.90	29.82	40.00	-10.18	QP
2.	49.533	2.06	12.12	38.35	29.92	22.61	40.00	-17.39	QP
3.	70.090	2.66	10.09	39.60	29.95	22.40	40.00	-17.60	QP
4.	143.830	3.90	13.46	43.43	30.02	30.77	43.50	-12.73	QP
5.	192.419	4.39	11.55	49.37	30.04	35.27	43.50	-8.23	QP
6.	383.932	5.59	14.68	34.29	30.65	23.91	46.00	-22.09	QP

Remark: Emission Level = Reading + Cable Loss + ANT Factor - AMP Factor



**Test Frequency 1GHz-25GHz:**

GFSK Low Channel (2402MHz)								
Detector: Peak Value								
Frequency (MHz)	Reading Level (dBuV)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity (H/V)
4804	42.45	34.04	6.58	34.09	48.98	74.00	-25.02	V
7206	37.46	37.11	7.73	34.50	47.80	74.00	-26.20	V
9608	35.70	39.31	9.23	34.79	49.45	74.00	-24.55	V
4804	41.54	34.04	6.58	34.09	48.07	74.00	-25.93	H
7206	35.71	37.11	7.73	34.50	46.05	74.00	-27.95	H
9608	34.91	39.31	9.23	34.79	48.66	74.00	-25.34	H
Detector: Average Value								
4804	38.90	34.04	6.58	34.09	45.43	54.00	-8.57	V
7206	33.27	37.11	7.73	34.50	43.61	54.00	-10.39	V
9608	31.46	39.31	9.23	34.79	45.21	54.00	-8.79	V
4804	36.84	34.04	6.58	34.09	43.37	54.00	-10.63	H
7206	30.70	37.11	7.73	34.50	41.04	54.00	-12.96	H
9608	30.06	39.31	9.23	34.79	43.81	54.00	-10.19	H
GFSK Middle Channel (2440MHz)								
Detector: Peak Value								
Frequency (MHz)	Reading Level (dBuV)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity (H/V)
4880	42.01	34.38	6.69	34.09	48.99	74.00	-25.01	V
7320	36.97	37.22	7.78	34.53	47.44	74.00	-26.56	V
9760	34.82	39.46	9.35	34.80	48.83	74.00	-25.17	V
4880	41.35	34.38	6.69	34.09	48.33	74.00	-25.67	H
7320	36.88	37.22	7.78	34.53	47.35	74.00	-26.65	H
9760	35.94	39.46	9.35	34.80	49.95	74.00	-24.05	H



Detector: Average Value								
4880	38.87	34.38	6.69	34.09	45.85	54.00	-8.15	V
7320	32.61	37.22	7.78	34.53	43.08	54.00	-10.92	V
9760	30.30	39.46	9.35	34.80	44.31	54.00	-9.69	V
4880	36.46	34.38	6.69	34.09	43.44	54.00	-10.56	H
7320	31.75	37.22	7.78	34.53	42.22	54.00	-11.78	H
9760	30.74	39.46	9.35	34.80	44.75	54.00	-9.25	H
GFSK High Channel (2480MHz)								
Detector: Peak Value								
Frequency (MHz)	Reading Level (dBuV)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polarity (H/V)
4960	43.15	34.72	6.79	34.09	50.57	74.00	-23.43	V
7440	36.44	37.34	7.82	34.57	47.03	74.00	-26.97	V
9920	35.72	39.62	9.46	34.81	49.99	74.00	-24.01	V
4960	42.34	34.72	6.79	34.09	49.76	74.00	-24.24	H
7440	36.07	37.34	7.82	34.57	46.66	74.00	-27.34	H
9920	36.43	39.62	9.46	34.81	50.70	74.00	-23.30	H
Detector: Average Value								
4960	39.03	34.04	6.58	34.09	45.56	54.00	-8.44	V
7440	31.89	37.11	7.73	34.50	42.23	54.00	-11.77	V
9920	31.11	39.31	9.23	34.79	44.86	54.00	-9.14	V
4960	37.40	34.04	6.58	34.09	43.93	54.00	-10.07	H
7440	30.73	37.11	7.73	34.50	41.07	54.00	-12.93	H
9920	31.36	39.31	9.23	34.79	45.11	54.00	-8.89	H

Note: 1. The testing has been conformed to 10\*2480MHz=24800MHz.

- 2. All other emissions more than 30dB below the limit.
- 3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
 Emission Level = Reading + Factor  
 Margin=Emission Level-Limit



**Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz**

Test Mode: BLE Low Channel 2402MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2390	42.35	29.15	3.41	34.01	40.90	74.00	-33.10	H	Peak
2400	53.10	29.16	3.43	34.01	51.68	74.00	-22.32	H	Peak
2390	43.40	29.15	3.41	34.01	41.95	74.00	-32.05	V	Peak
2400	55.22	29.16	3.43	34.01	53.80	74.00	-20.20	V	Peak
2390	36.29	29.15	3.41	34.01	34.84	54.00	-19.16	H	AV
2400	48.17	29.16	3.43	34.01	46.75	54.00	-7.25	H	AV
2390	35.58	29.15	3.41	34.01	34.13	54.00	-19.87	V	AV
2400	48.23	29.16	3.43	34.01	46.81	54.00	-7.19	V	AV

Test Mode:BLE High Channel 2480MHz									
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	Polarity H/V	Test Value
2483.5	49.28	29.28	3.53	34.03	48.06	74.00	-25.94	H	Peak
2500	42.25	29.30	3.56	34.03	41.08	74.00	-32.92	H	Peak
2483.5	50.34	29.28	3.53	34.03	49.12	74.00	-24.88	V	Peak
2500	41.67	29.30	3.56	34.03	40.50	74.00	-33.50	V	Peak
2483.5	40.15	29.28	3.53	34.03	38.93	54.00	-15.07	H	AV
2500	35.66	29.30	3.56	34.03	34.49	54.00	-19.51	H	AV
2483.5	40.98	29.28	3.53	34.03	39.76	54.00	-14.24	V	AV
2500	36.40	29.30	3.56	34.03	35.23	54.00	-18.77	V	AV



## 7 Conduct Band Edge And Spurious Emissions Measurement

- Test Requirement : Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 7.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold




### 7.2 Test Result

TestMode	Antenna	ChName	Channel	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	-2.00	-40.9	≤-22	PASS
		High	2480	-1.63	-45.79	≤-21.63	PASS

### Test Graphs

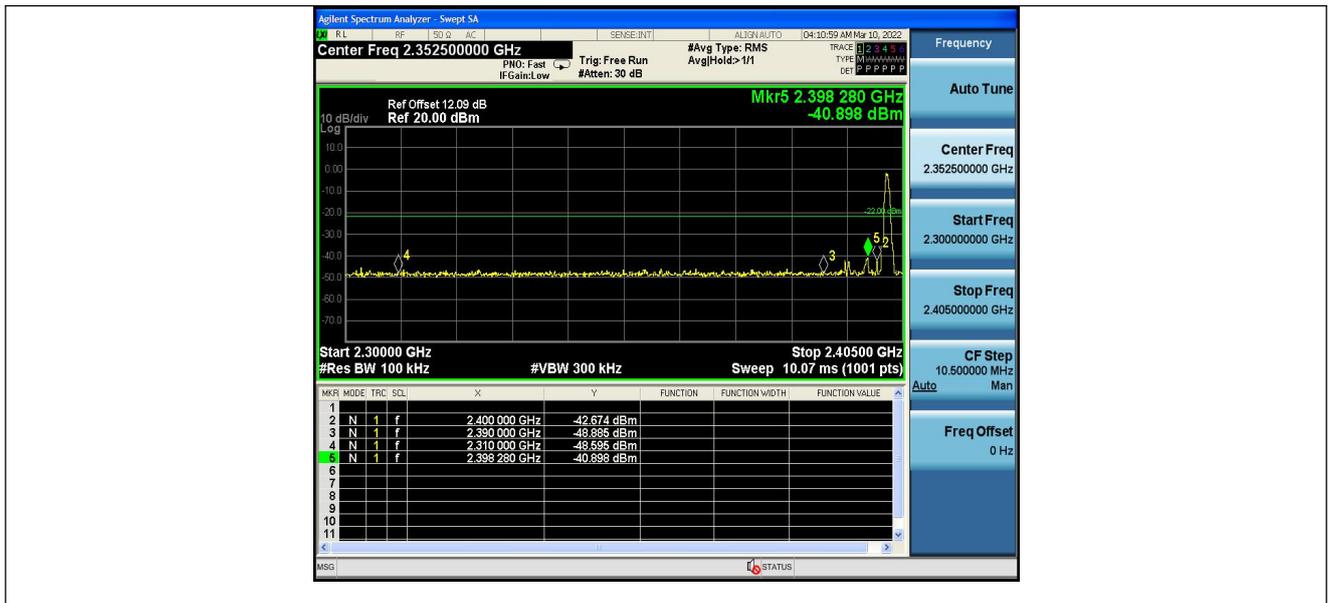


BLE\_1M\_Ant1\_Low\_2402

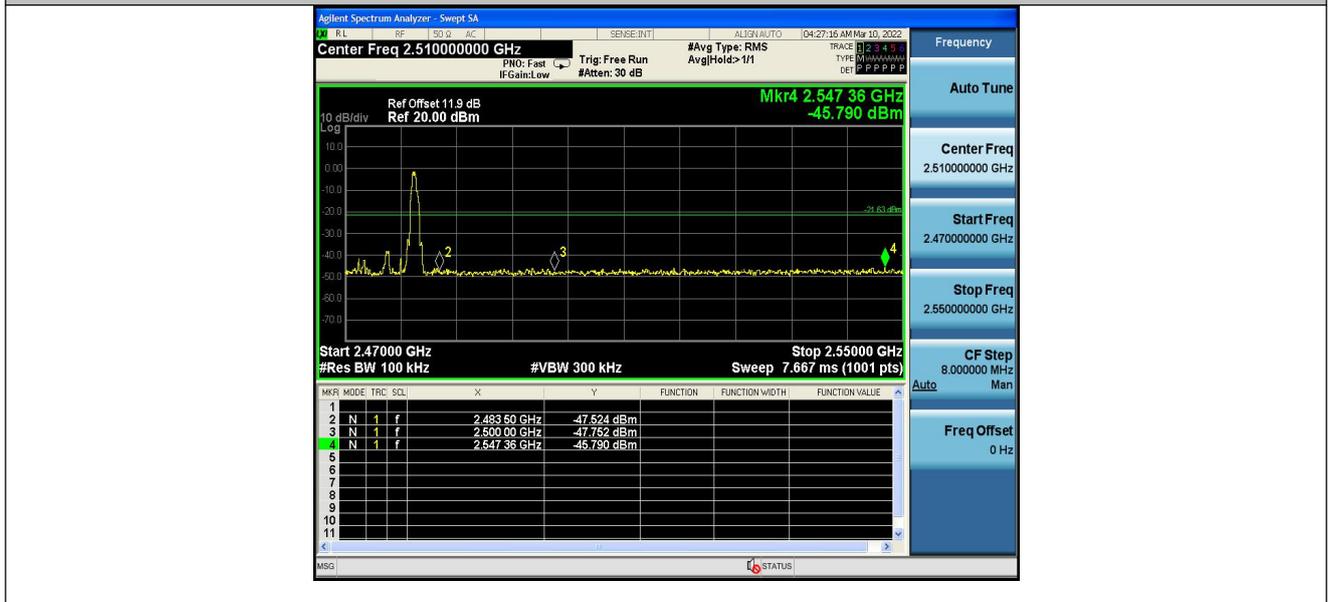



For Conduct spurious emissions


TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	30~1000	-2.00	-57.43	≤-22	PASS
			1000~26500	-2.00	-43.48	≤-22	PASS
		2440	30~1000	-1.84	-57.6	≤-21.84	PASS
			1000~26500	-1.84	-44.29	≤-21.84	PASS
		2480	30~1000	-1.63	-57.27	≤-21.63	PASS
			1000~26500	-1.63	-44.83	≤-21.63	PASS

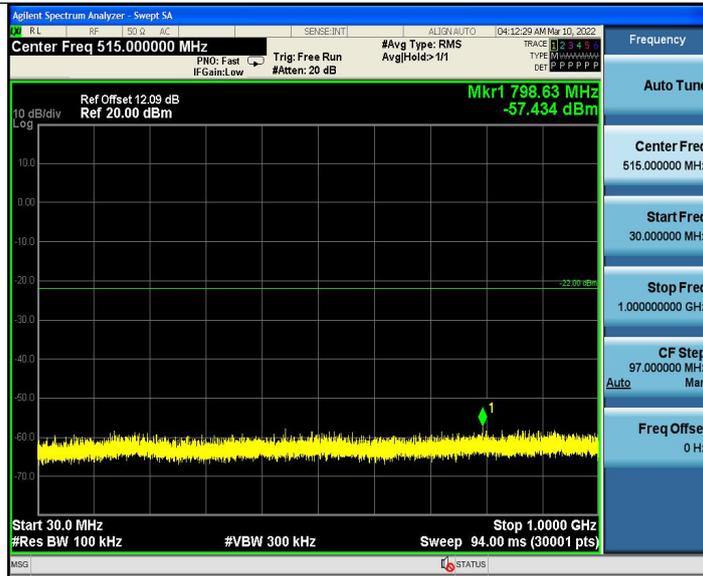

BLE\_1M\_Ant1\_2402\_30~1000




BLE\_1M\_Ant1\_2402\_1000~26500

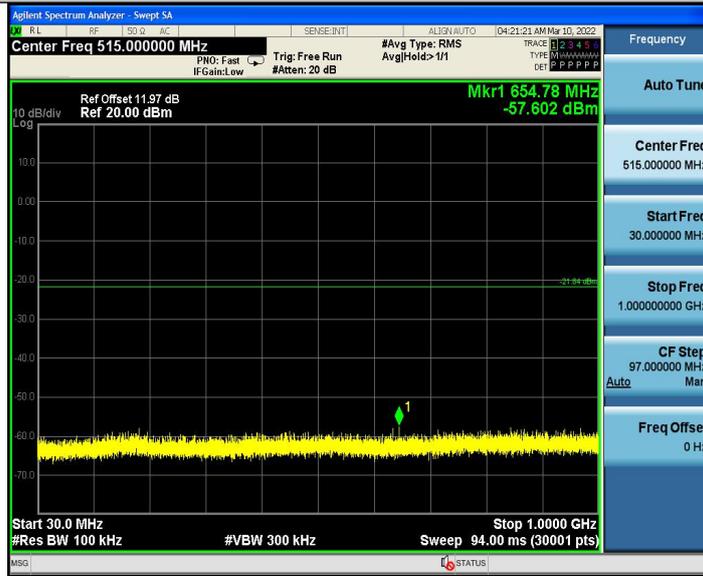


BLE\_1M\_Ant1\_2440\_30~1000



BLE\_1M\_Ant1\_2440\_1000~26500

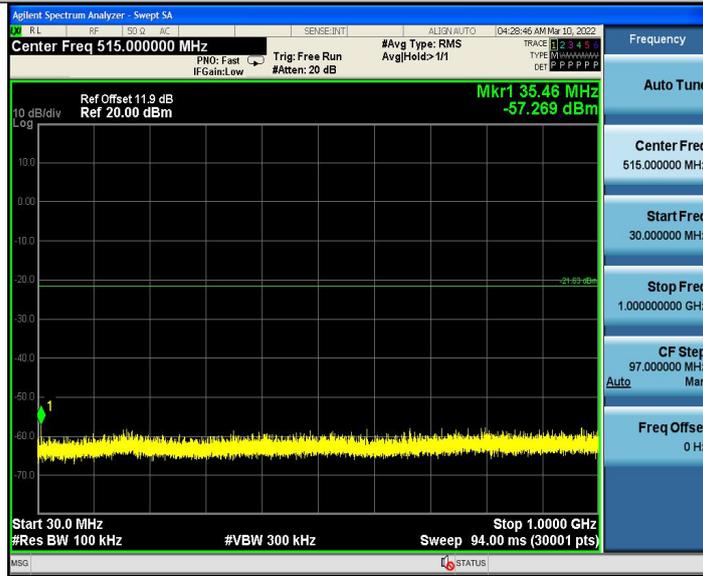

BLE\_1M\_Ant1\_2480\_30~1000

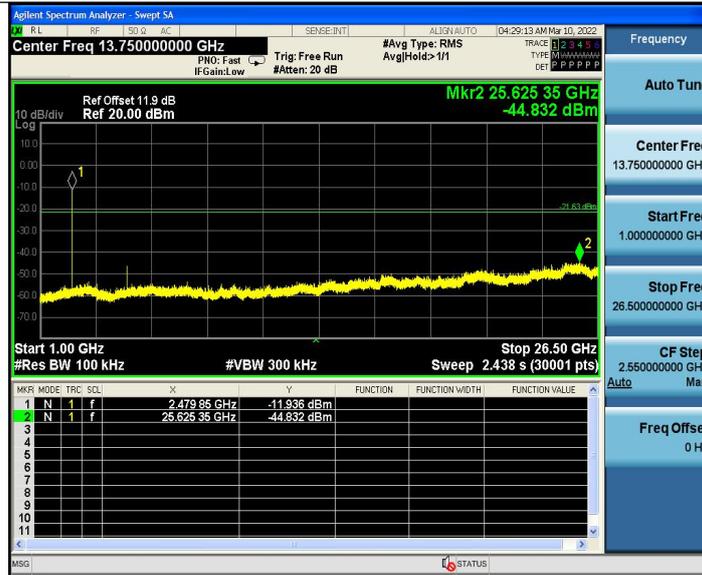

BLE\_1M\_Ant1\_2480\_1000~26500



## 8 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit : Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

### 8.2 Test Result

TestMode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.504	2401.672	2402.176	0.5	PASS
		2440	0.504	2439.672	2440.176	0.5	PASS
		2480	0.504	2479.672	2480.176	0.5	PASS



BLE\_1M\_Ant1\_2402



BLE\_1M\_Ant1\_2440



BLE\_1M\_Ant1\_2480



## 9 Maximum Peak Output Power


- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

### 9.1 Test Procedure

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 D01 15.247 Meas Guidance v05 section 8.3.1.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.


### 9.2 Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	-1.46	≤30	PASS
		2440	-1.39	≤30	PASS
		2480	-1.13	≤30	PASS

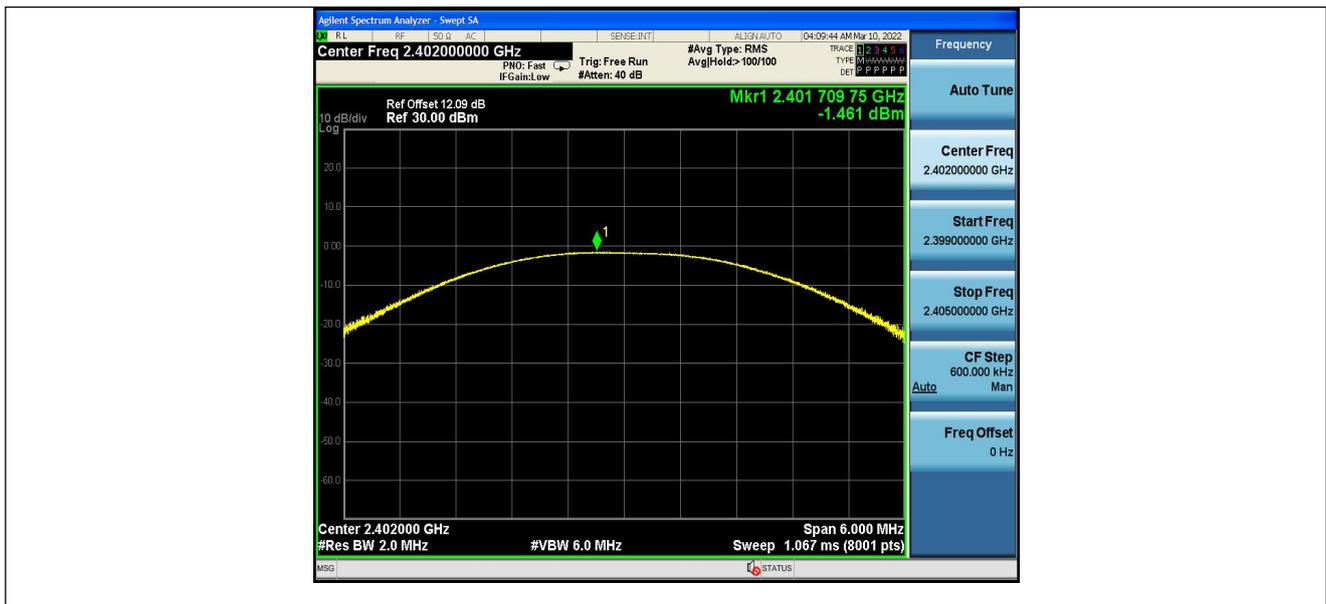



BLE\_1M\_Ant1\_2402

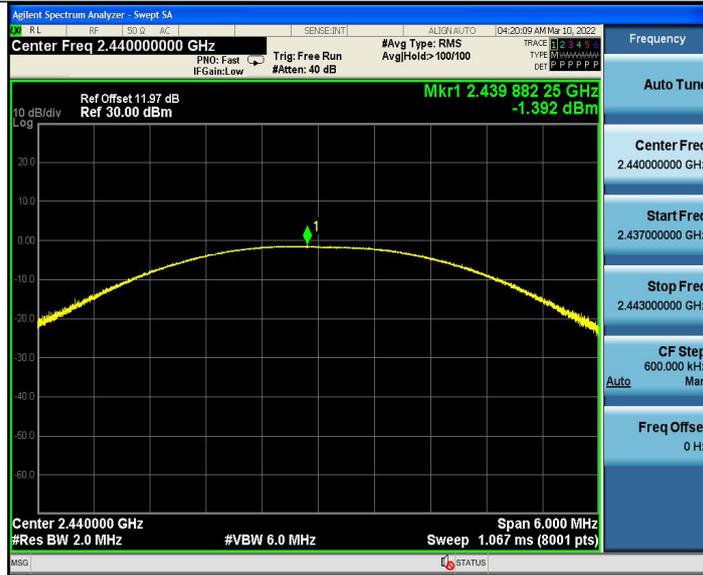

BLE\_1M\_Ant1\_2440



BLE\_1M\_Ant1\_2480



## 10 Power Spectral density

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 10.2 Test Result

TestMode	Antenna	Channel	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-20.35	≤8.00	PASS
		2440	-20.11	≤8.00	PASS
		2480	-20	≤8.00	PASS



BLE\_1M\_Ant1\_2402



BLE\_1M\_Ant1\_2440



BLE\_1M\_Ant1\_2480


## 11 Antenna Application

### 11.1 Antenna Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement:</p> <p>Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

### 11.2 Result

The antenna is PCB Antenna which permanently attached, and the best case gain of the antenna is -42dBi. It complies with the standard requirement.

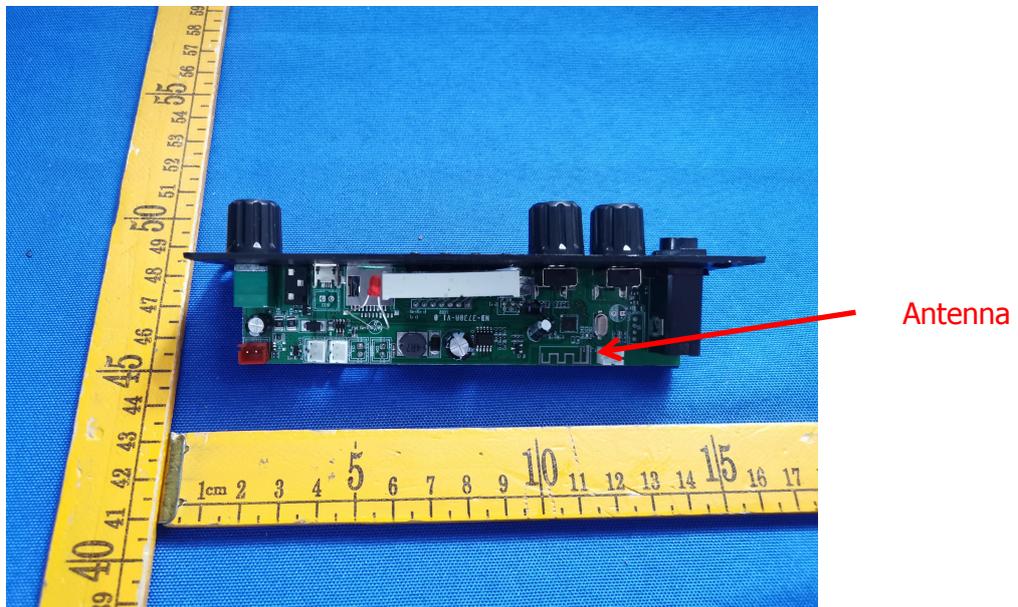


## 12 Test Setup

Conducted Emissions




Radiated Spurious Emissions  
From 30M-1GHz

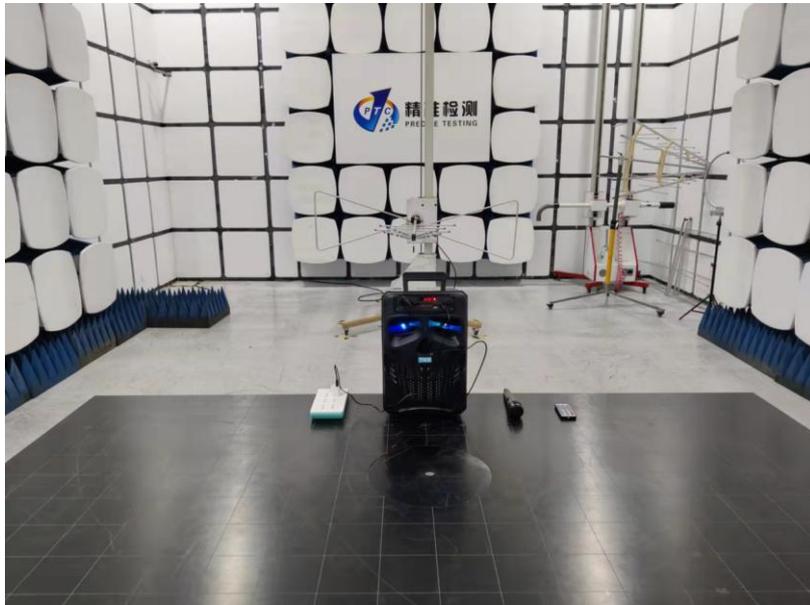




Test frequency from Above 1GHz

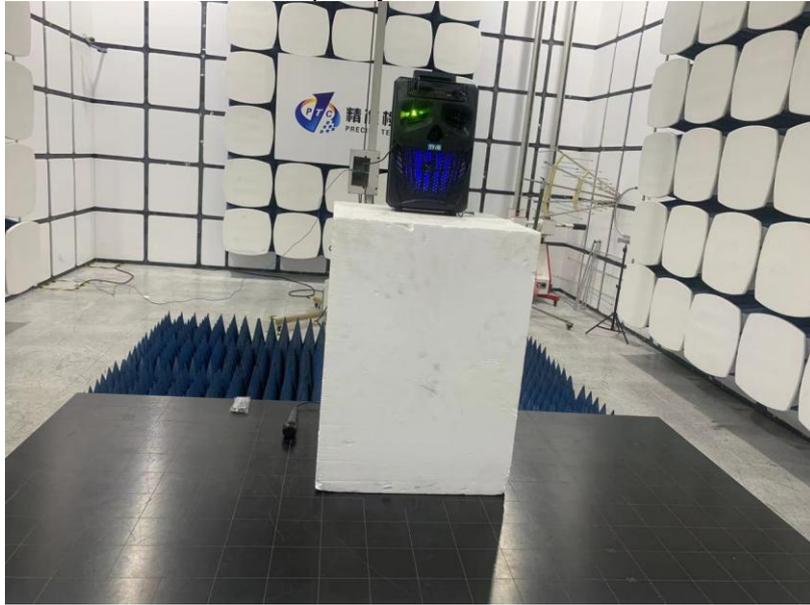



### 13 APPENDIX II -- EUT PHOTOGRAPH

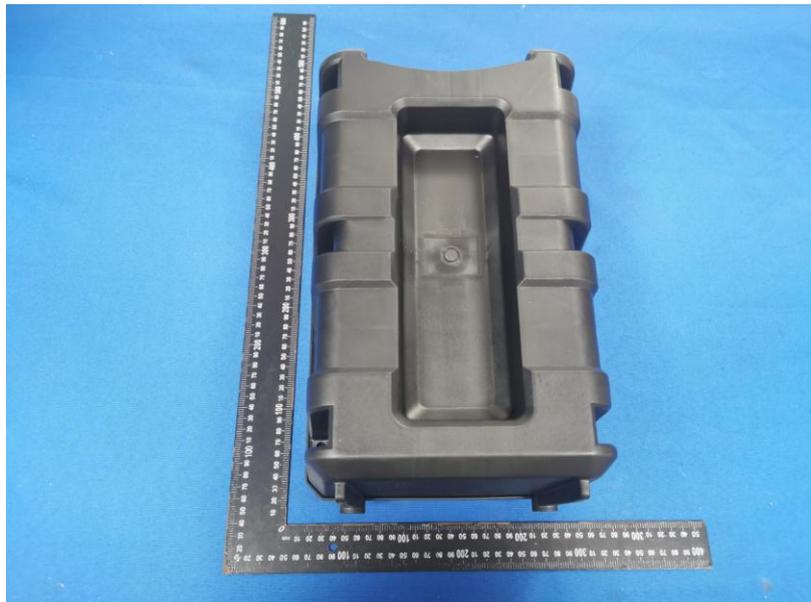





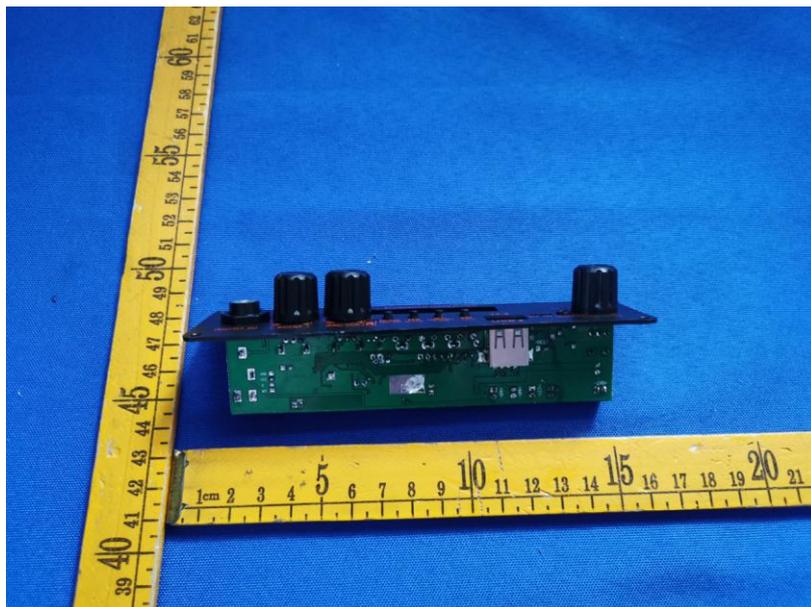

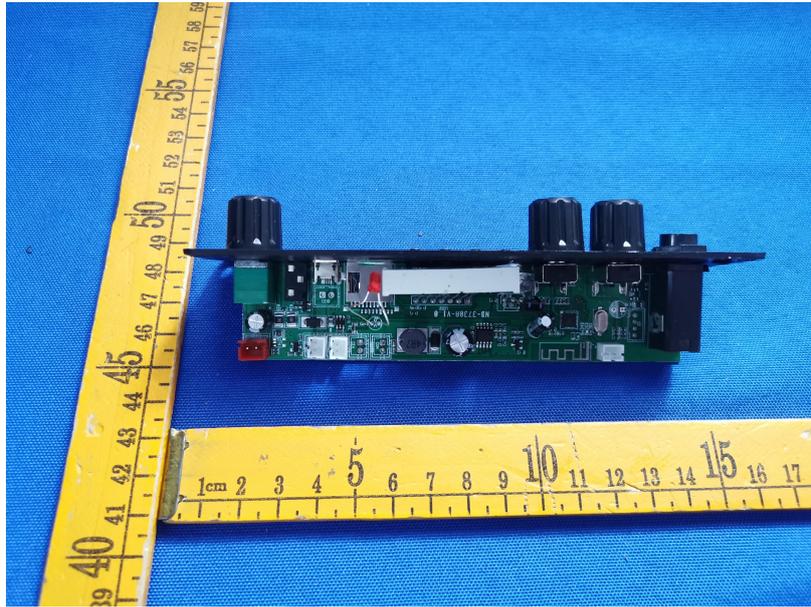

**\*\*\*\*\*THE END REPORT\*\*\*\*\***