

TEST REPORT

Product Name : Wireless Headphones
Brand Mark : TRUEEFREE
Model No. : T2
Extension model : T3/T4/T5/T6/T7/T8 /A2/A3/A4/A5
FCC ID : 2A5BOHQY002
Report Number : BLA-EMC-202212-A5202
Date of Sample Receipt : 2022/12/6
Date of Test : 2022/12/6 to 2023/1/4
Date of Issue : 2023/1/5
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

shenzhenshihanqiyuankejijiyouxiangongsi
1309, block B, Huihai Plaza, Chuangye Road, Longhua street, Longhua
District, Shenzhen, Guangdong, China

Prepared by:

BlueAsia Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District,
Shenzhen, Guangdong, 518000 P.R.C.
TEL: +86-755-23059481

Compiled by: *charlie*
Approved by: *Bluezhong*

Review by: *Sueels*
Date: 2023/1/5



REPORT REVISE RECORD

Version No.	Date	Description
00	2023/1/5	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	6
2	GENERAL INFORMATION	7
3	GENERAL DESCRIPTION OF E.U.T.	7
4	TEST ENVIRONMENT	8
5	TEST MODE	8
6	MEASUREMENT UNCERTAINTY	8
7	DESCRIPTION OF SUPPORT UNIT.....	9
8	LABORATORY LOCATION.....	9
9	TEST INSTRUMENTS LIST	10
10	DWELL TIME.....	12
10.1	LIMITS	12
10.2	BLOCK DIAGRAM OF TEST SETUP	12
10.3	TEST DATA.....	13
11	HOPPING CHANNEL NUMBER	14
11.1	LIMITS	14
11.2	BLOCK DIAGRAM OF TEST SETUP	14
11.3	TEST DATA.....	14
12	CARRIER FREQUENCIES SEPARATION	15
12.1	LIMITS	15
12.2	BLOCK DIAGRAM OF TEST SETUP	15
12.3	TEST DATA.....	15
13	20DB BANDWIDTH.....	16
13.1	BLOCK DIAGRAM OF TEST SETUP	16
13.2	TEST DATA.....	16
14	CONDUCTED PEAK OUTPUT POWER	17
14.1	LIMITS	17
14.2	BLOCK DIAGRAM OF TEST SETUP	17
14.3	TEST DATA.....	18
15	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....	19

15.1	LIMITS	19
15.2	BLOCK DIAGRAM OF TEST SETUP	19
15.3	PROCEDURE	19
15.4	TEST DATA.....	21
16	RADIATED SPURIOUS EMISSIONS.....	23
16.1	LIMITS	23
16.2	BLOCK DIAGRAM OF TEST SETUP	24
16.3	PROCEDURE	24
16.4	TEST DATA.....	26
17	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	34
17.1	LIMITS	34
17.2	BLOCK DIAGRAM OF TEST SETUP	35
17.3	PROCEDURE	35
17.4	TEST DATA.....	37
18	ANTENNA REQUIREMENT.....	41
18.1	CONCLUSION	41
19	CONDUCTED SPURIOUS EMISSIONS.....	42
19.1	LIMITS	42
19.2	BLOCK DIAGRAM OF TEST SETUP	42
19.3	TEST DATA.....	43
20	CONDUCTED BAND EDGES MEASUREMENT.....	44
20.1	LIMITS	44
20.2	BLOCK DIAGRAM OF TEST SETUP	44
20.3	TEST DATA.....	45
21	APPENDIX.....	46
21.1	MAXIMUM CONDUCTED OUTPUT POWER	46
21.2	-20DB BANDWIDTH.....	51
21.3	OCCUPIED CHANNEL BANDWIDTH.....	56
21.4	BAND EDGE.....	61
21.5	BAND EDGE(HOPPING).....	68
21.6	CONDUCTED RF SPURIOUS EMISSION	75
21.7	DWELL TIME.....	89
	APPENDIX A: PHOTOGRAPHS OF TEST SETUP	97

APPENDIX B: PHOTOGRAPHS OF EUT 99

BlueAsia

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass

2 GENERAL INFORMATION

Applicant	shenzhenshihanqiyuankejijiyouxiangongsi
Address	1309, block B, Huihai Plaza, Chuangye Road, Longhua street, Longhua District, Shenzhen, Guangdong, China
Manufacturer	Shenzhen Soundsoul Information Technology Co.,Ltd
Address	Room 1308-1309, Building B,Huihai Square,Chuangye Road, Longhua District,Shenzhen,Guangdong,China
Factory	Shenzhen Soundsoul Information Technology Co.,Ltd
Address	Room 1308-1309, Building B,Huihai Square,Chuangye Road, Longhua District,Shenzhen,Guangdong,China
Product Name	Wireless Headphones
Test Model No.	T2
Extension model	T3/T4/T5/T6/T7/T8 /A2/A3/A4/A5

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	N/A
Software Version	N/A
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK, pi/4DQPSK,8DPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	Internal Antenna
Antenna Gain:	-0.3dBi(Provided by the customer)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	3.7Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in continuously transmitting mode with modulation. (hopping and non hopping mode all have been tested, non hopping mode is worse case for RE)
Remark: Full battery is used during all test except ac conducted emission, DH1, DH3, DH5 all have been tested, during the test, GFSK, Pi/4QPSK, 8-DPSK modulation were all pre-scanned Only the 8-DPSK of the worst mode would be recorded in this report.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
AC Adapter	UGREEN	CD112	N/A	N/A
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia Technical Services (Shenzhen) Co.,Ltd.

Building C, No. 107, Shihuan Road, Shiyuan Sub-District, Baoan District, Shenzhen, Guangdong, 518000
P.R.C.

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber 1	SKET	966	N/A	2020/11/10	2023/11/9
Chamber 2	SKET	966	N/A	2021/07/20	2024/07/19
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Receiver	R&S	ESR7	101199	2022/09/15	2023/09/14
Receiver	R&S	ESPI7	101477	2022/07/16	2023/07/15
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2022/09/15	2023/09/14
Horn Antenna	Schwarzbeck	BBHA9120D	01892 P:00331	2022/09/13	2025/09/12
Amplifier	SKET	LNPA_30M01G-30	SK2021060801	2022/07/16	2023/07/15
Amplifier	SKET	PA-000318G-45	N/A	2022/09/13	2023/09/12
Amplifier	SKET	LNPA_18G40G-50	SK2022071301	2022/07/14	2023/07/13
Filter group	SKET	2.4G/5G Filter group r	N/A	2022/07/16	2023/07/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2022/9/14	2025/9/13
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2022/09/14	2023/09/13
LISN	R&S	ENV216	3560.6550.15	2022/09/14	2023/09/13
LISN	AT	AT166-2	AKK1806000003	2022/09/14	2023/09/13
ISN	TESEQ	ISNT8-cat6	53580	2022/09/14	2023/09/13
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01045	2022/08/17	2023/08/16
Single-channel vehicle artificial power network	Schwarzbeck	NNBM 8124	01075	2022/08/17	2023/08/16
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of RF Conducted Test					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2022/09/15	2023/09/14
Spectrum	Agilent	N9020A	MY49100060	2022/09/07	2023/09/06
Spectrum	KEYSIGHT	N9030A	MY52350152	2022/07/01	2023/06/30
Spectrum	KEYSIGHT	N9010A	MY54330814	2022/07/01	2023/06/30
Signal Generator	Agilent	N5182A	MY47420955	2022/09/07	2023/09/06
Signal Generator	Agilent	E8257D	MY44320250	2022/07/01	2023/06/30
Signal Generator	Agilent	N5181A	MY46240904	2022/08/02	2023/08/01
Signal Generator	R&S	CMW500	132429	2022/09/07	2023/09/06
BluetoothTester	Anritsu	MT8852B	06262047872	2022/09/07	2023/09/06
Power probe	DARE	RPR3006W	14I00889SN042	2022/09/07	2023/09/06
DCPowersupply	zhaoxin	KXN-305D	20K305D1221363	2022/09/14	2023/09/13
DCPowersupply	zhaoxin	RXN-1505D	19R1505D050168	2022/09/14	2023/09/13
Audio Analyzer	Audioprecision	N/A	ATSI-41094	2022/7/1	2023/6/30
2.4GHz/5GHz RF Test software	MTS	MTS 8310	Version 2.0.0.0	N/A	N/A


10 DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

10.1 LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

10.2 BLOCK DIAGRAM OF TEST SETUP

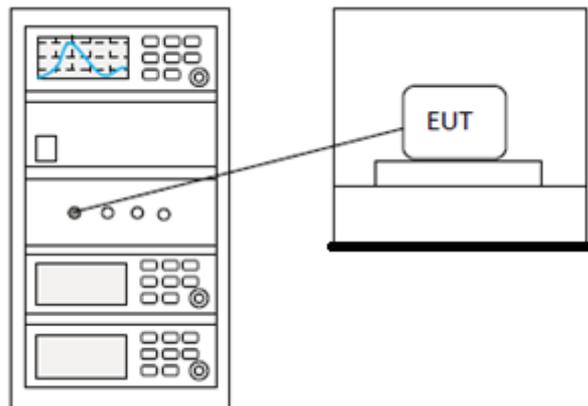

10.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


11 HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

11.1 LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

11.2 BLOCK DIAGRAM OF TEST SETUP

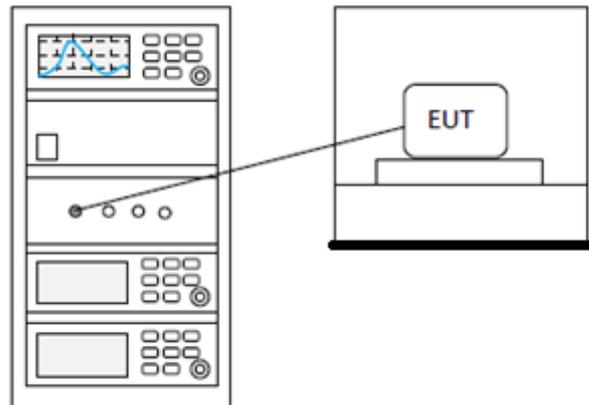

11.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


12 CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

12.1 LIMITS

Limit:	2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W
---------------	--

12.2 BLOCK DIAGRAM OF TEST SETUP

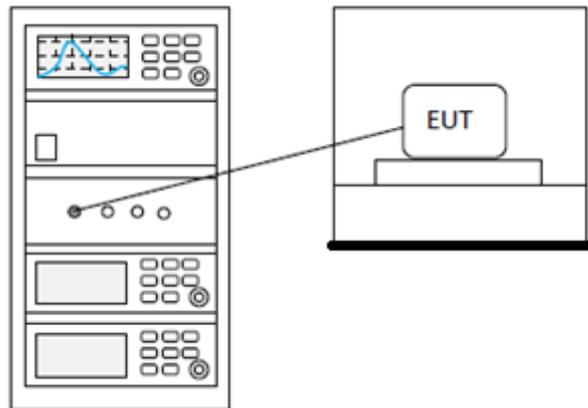


12.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

13 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

13.1 BLOCK DIAGRAM OF TEST SETUP

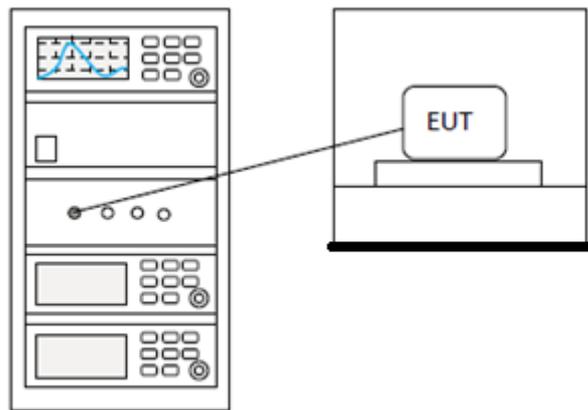

13.2 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


14 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

14.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

14.2 BLOCK DIAGRAM OF TEST SETUP

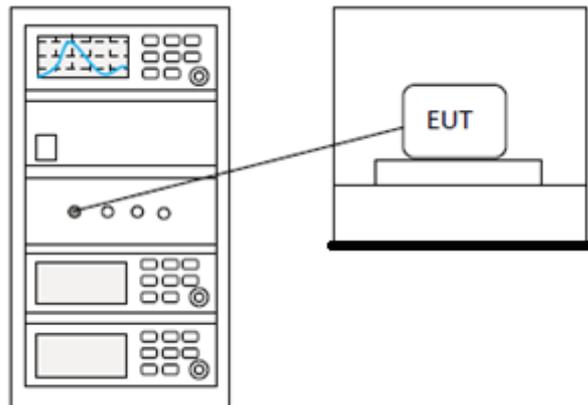

14.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

15 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

15.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

15.2 BLOCK DIAGRAM OF TEST SETUP

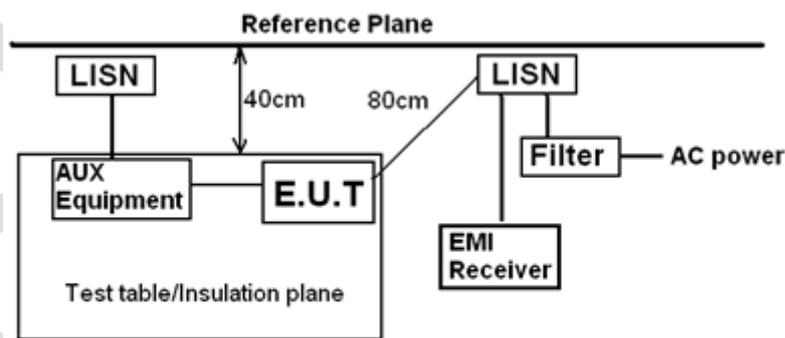

Remark
 E.U.T: Equipment Under Test
 LISN: Line Impedance Stabilization Network
 Test table height=0.8m

15.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,


4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

15.4 TEST DATA

[TestMode: TX mode]; [Line: Nutral]; [Power:120V/60Hz]

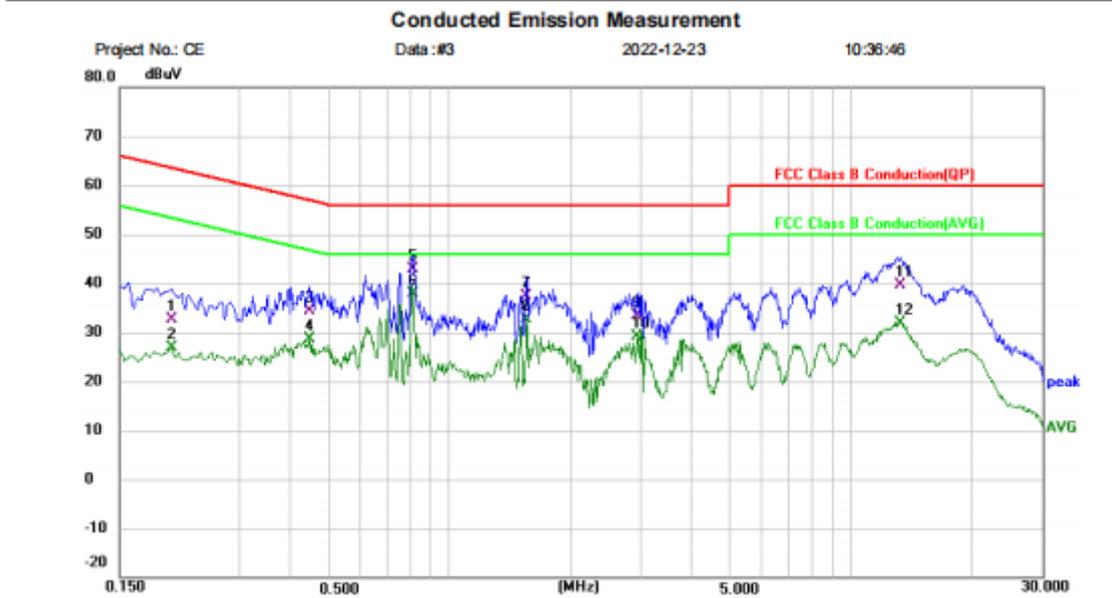


Site: _____ Phase: **L1** Temperature: _____ (C)
 Limit: FCC Class B Conduction(QP) Power: _____ Humidity: _____ %RH
 EUT: Wireless Headphones
 M/N: Truefree T2
 Mode: TX mode
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.2020	22.21	10.54	32.75	63.53	-30.78	QP	
2		0.2020	16.36	10.54	26.90	53.53	-26.63	AVG	
3		0.4460	24.24	10.07	34.31	56.95	-22.64	QP	
4		0.4460	18.44	10.07	28.51	46.95	-18.44	AVG	
5		0.8100	32.75	10.10	42.85	56.00	-13.15	QP	
6	*	0.8100	27.72	10.10	37.82	46.00	-8.18	AVG	
7		1.5580	27.23	10.22	37.45	56.00	-18.55	QP	
8		1.5580	22.31	10.22	32.53	46.00	-13.47	AVG	
9		2.9539	23.22	10.22	33.44	56.00	-22.56	QP	
10		2.9539	18.94	10.22	29.16	46.00	-16.84	AVG	
11		13.3140	29.56	10.01	39.57	60.00	-20.43	QP	
12		13.3140	21.88	10.01	31.89	50.00	-18.11	AVG	

Test Result: Pass

[TestMode: TX mode]; [Line: Line]; [Power:120V/60Hz]

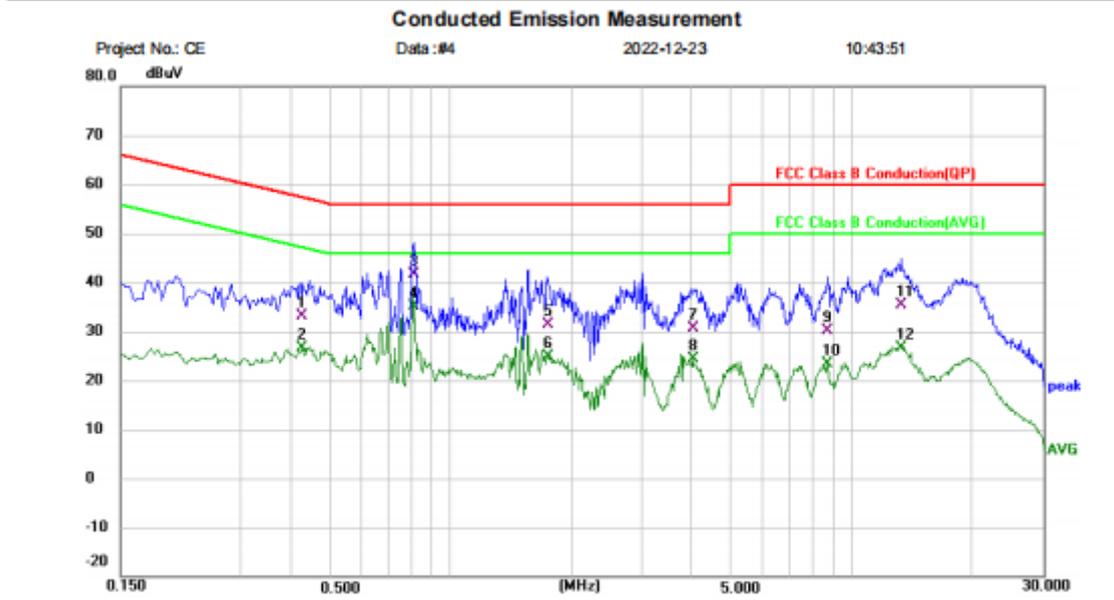

Site: _____ Phase: **N** Temperature: _____ (C)
 Limit: FCC Class B Conduction(QP) Power: _____ Humidity: %RH
 EUT: Wireless Headphones
 M/N: Truefree T2
 Mode: TX mode
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4260	23.16	10.05	33.21	57.33	-24.12	QP	
2		0.4260	16.58	10.05	26.63	47.33	-20.70	AVG	
3		0.8100	31.54	10.03	41.57	56.00	-14.43	QP	
4	*	0.8100	25.13	10.03	35.16	46.00	-10.84	AVG	
5		1.7500	21.32	10.08	31.40	56.00	-24.60	QP	
6		1.7500	14.75	10.08	24.83	46.00	-21.17	AVG	
7		4.0220	20.69	9.90	30.59	56.00	-25.41	QP	
8		4.0220	14.41	9.90	24.31	46.00	-21.69	AVG	
9		8.6980	20.29	9.90	30.19	60.00	-29.81	QP	
10		8.6980	13.41	9.90	23.31	50.00	-26.69	AVG	
11		13.3300	25.45	10.01	35.46	60.00	-24.54	QP	
12		13.3300	16.62	10.01	26.63	50.00	-23.37	AVG	

Test Result: Pass

16 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

16.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

16.2 BLOCK DIAGRAM OF TEST SETUP

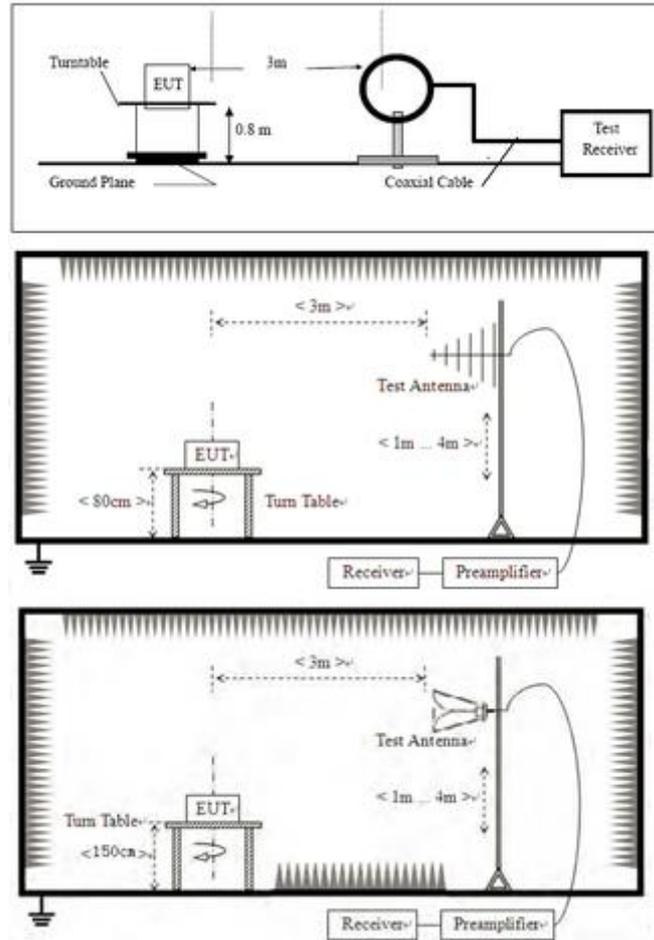

16.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

16.4 TEST DATA


Below 1GHz

[TestMode: TX]; [Polarity: Horizontal]

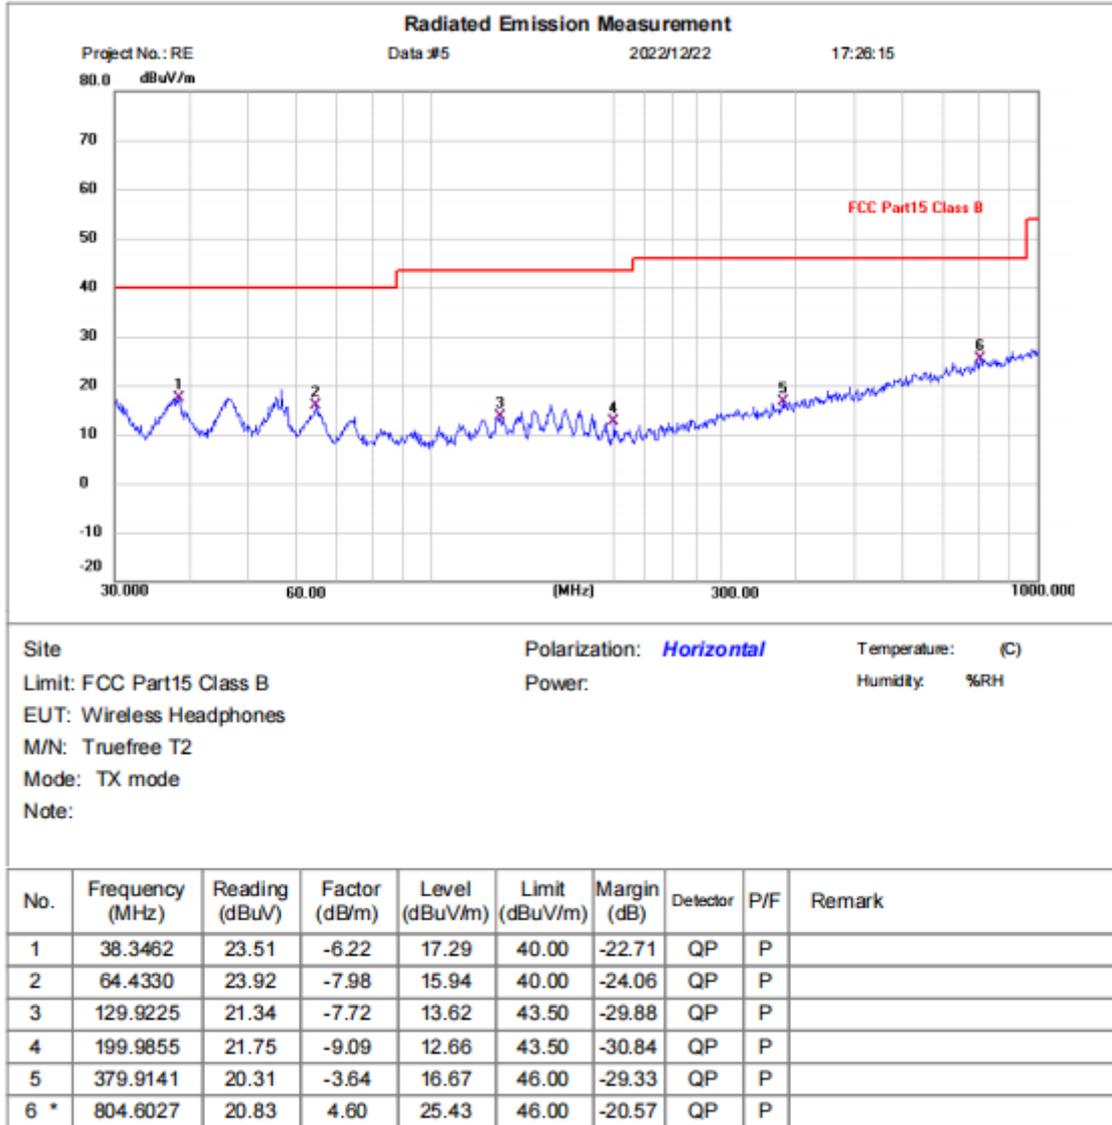

Test Result: Pass


[TestMode: TX]; [Polarity: Vertical]

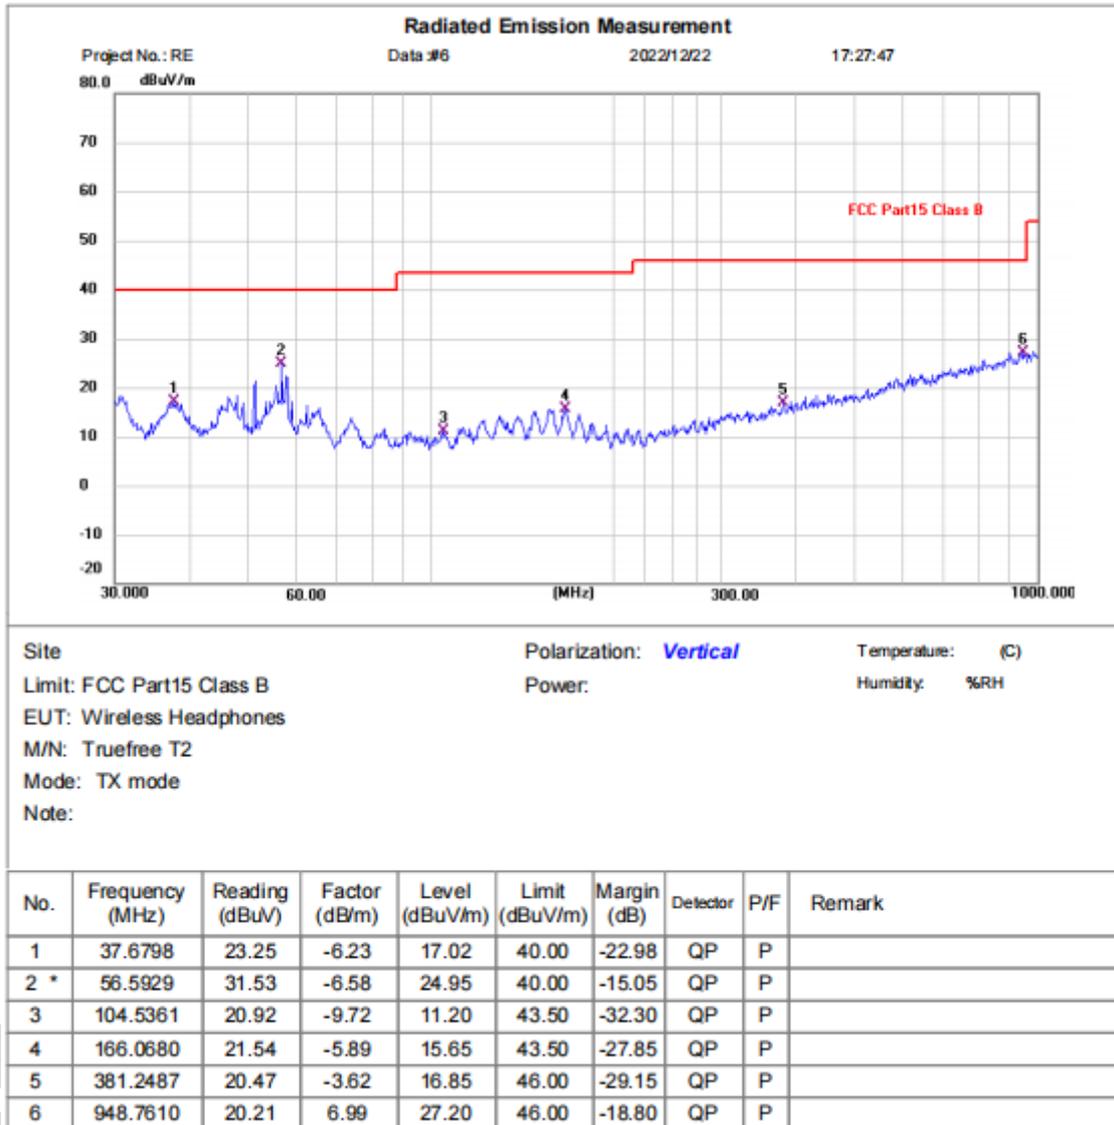

Test Result: Pass

Above 1GHz

[TestMode: TX lowest channel]; [Polarity: Horizontal]

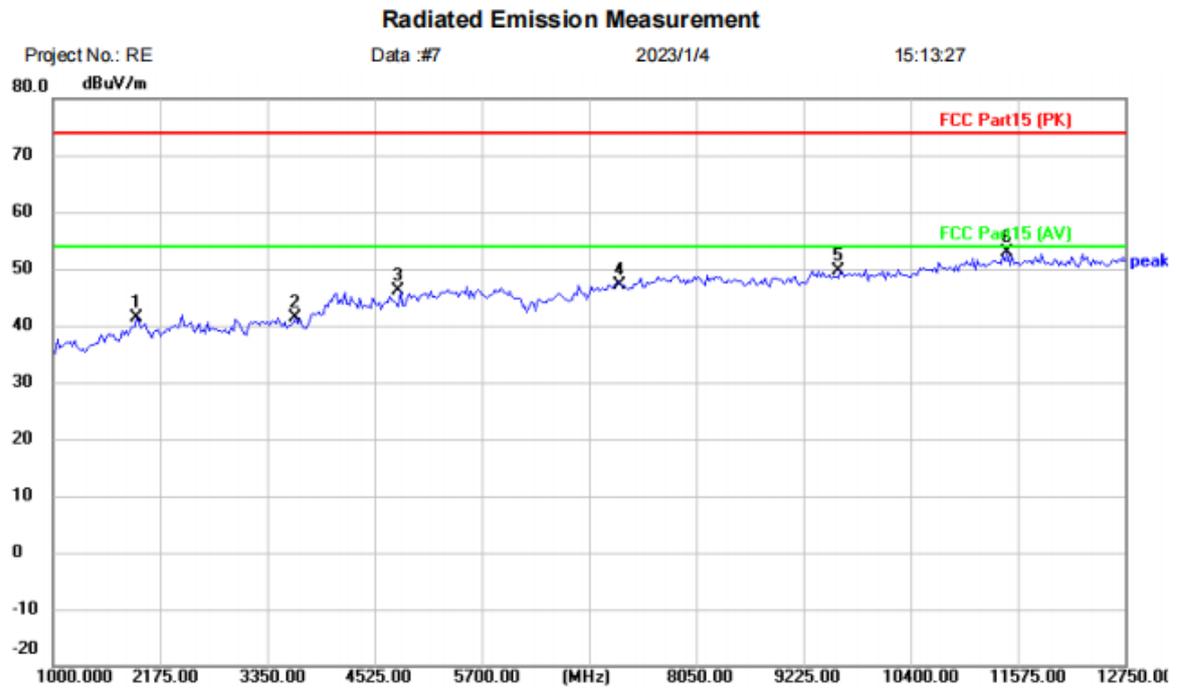


Site Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 M/N: Truefree T2
 Mode: TX-L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		1916.500	46.05	-4.74	41.31	74.00	-32.69	peak	
2		3655.500	41.71	-0.32	41.39	74.00	-32.61	peak	
3		4804.000	42.17	4.05	46.22	74.00	-27.78	peak	
4		7206.000	39.27	7.93	47.20	74.00	-26.80	peak	
5		9608.000	38.64	10.90	49.54	74.00	-24.46	peak	
6	*	11457.500	39.18	13.66	52.84	74.00	-21.16	peak	

Test Result: Pass

[TestMode:TX lowest channel]; [Polarity: Vertical]

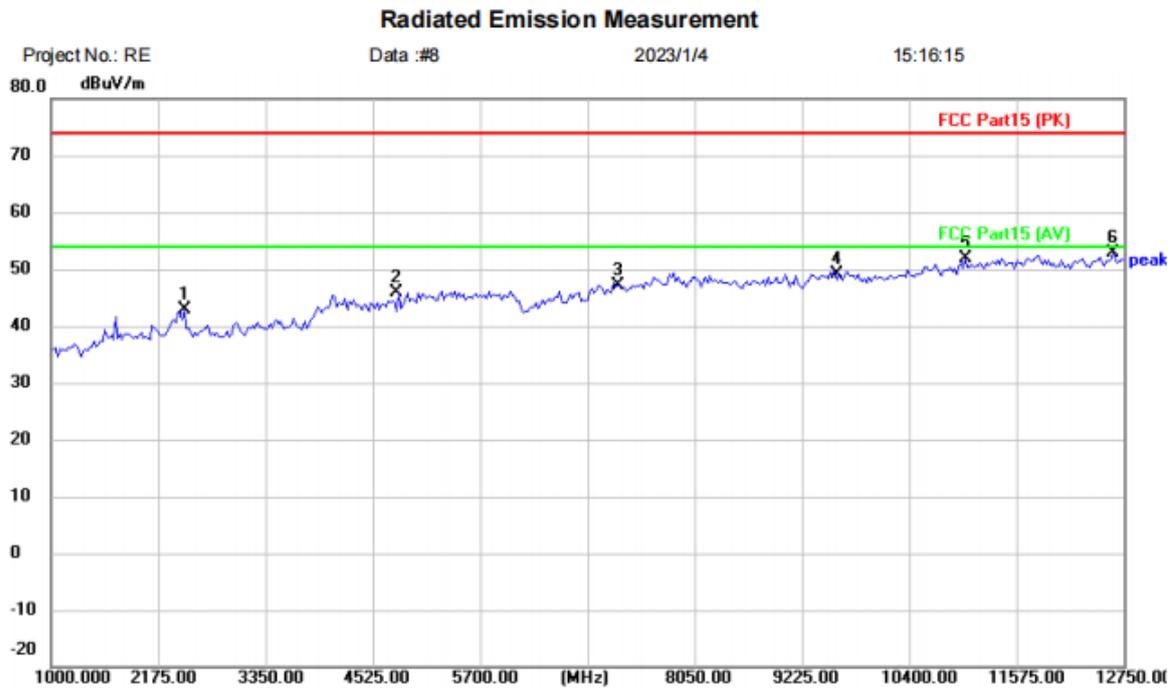


Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 M/N: Truefree T2
 Mode: TX-L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2457.000	44.56	-1.78	42.78	74.00	-31.22	peak	
2		4804.000	41.83	4.05	45.88	74.00	-28.12	peak	
3		7206.000	39.24	7.93	47.17	74.00	-26.83	peak	
4		9608.000	38.17	10.90	49.07	74.00	-24.93	peak	
5		11011.000	38.42	13.45	51.87	74.00	-22.13	peak	
6	*	12632.500	38.96	13.86	52.82	74.00	-21.18	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

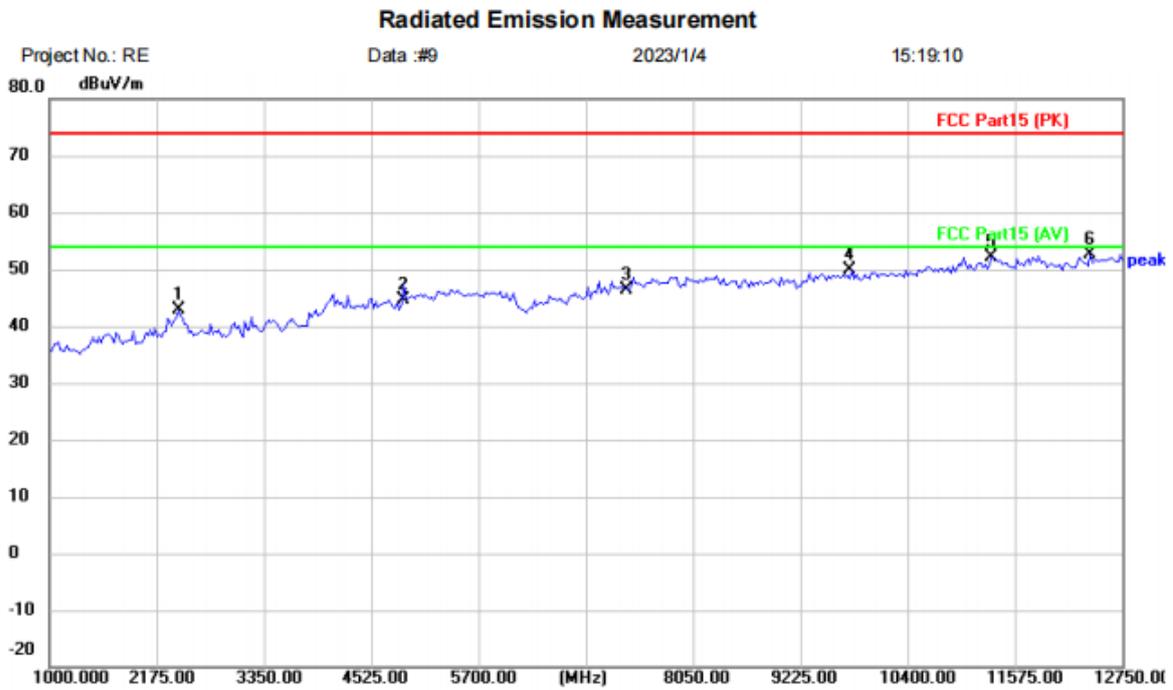


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 M/N: Truefree T2
 Mode: TX-M
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2410.000	44.15	-1.26	42.89	74.00	-31.11	peak	
2		4884.000	40.34	4.37	44.71	74.00	-29.29	peak	
3		7326.000	38.26	8.21	46.47	74.00	-27.53	peak	
4		9768.000	38.66	11.31	49.97	74.00	-24.03	peak	
5		11316.500	38.52	13.59	52.11	74.00	-21.89	peak	
6	*	12397.500	38.68	13.88	52.56	74.00	-21.44	peak	

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

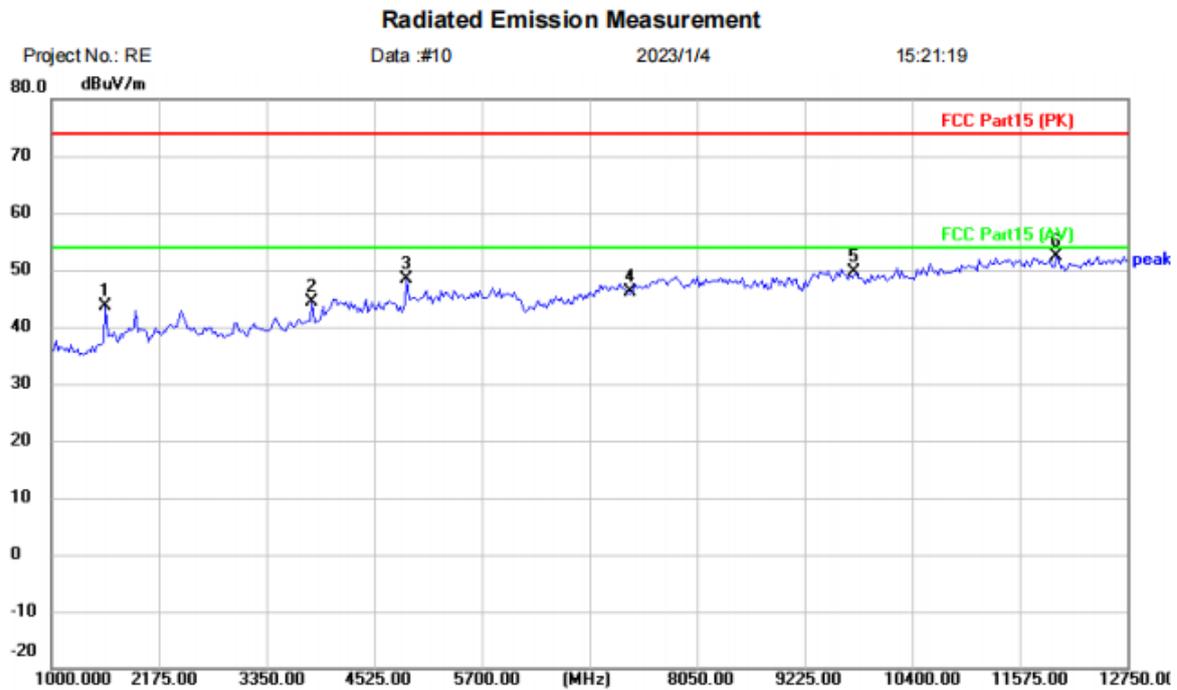


Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 M/N: Truefree T2
 Mode: TX-M
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		1587.500	49.22	-5.56	43.66	74.00	-30.34	peak	
2		3843.500	44.53	-0.08	44.45	74.00	-29.55	peak	
3		4877.500	44.14	4.35	48.49	74.00	-25.51	peak	
4		7326.000	37.82	8.21	46.03	74.00	-27.97	peak	
5		9768.000	38.28	11.31	49.59	74.00	-24.41	peak	
6	*	11974.500	38.41	13.89	52.30	74.00	-21.70	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

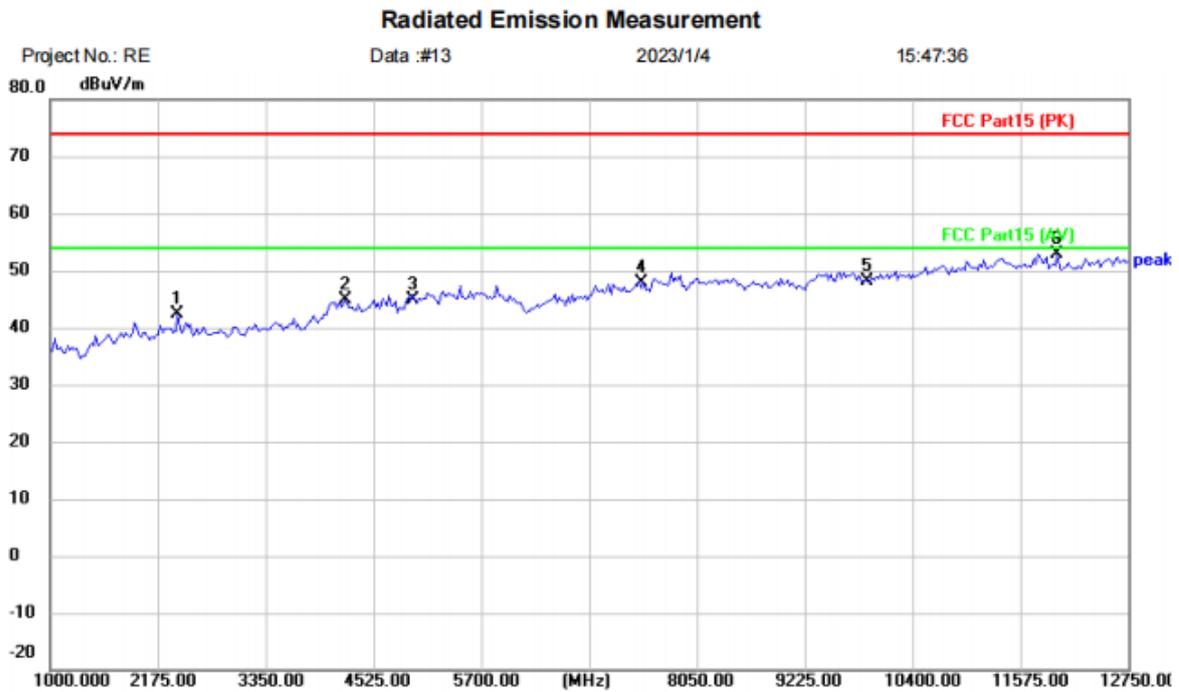


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 M/N: Truefree T2
 Mode: TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2386.500	43.40	-1.11	42.29	74.00	-31.71	peak	
2		4219.500	40.04	4.81	44.85	74.00	-29.15	peak	
3		4960.000	39.50	5.42	44.92	74.00	-29.08	peak	
4		7440.000	39.51	8.48	47.99	74.00	-26.01	peak	
5		9920.000	36.40	11.69	48.09	74.00	-25.91	peak	
6	*	11974.500	39.11	13.89	53.00	74.00	-21.00	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

Radiated Emission Measurement

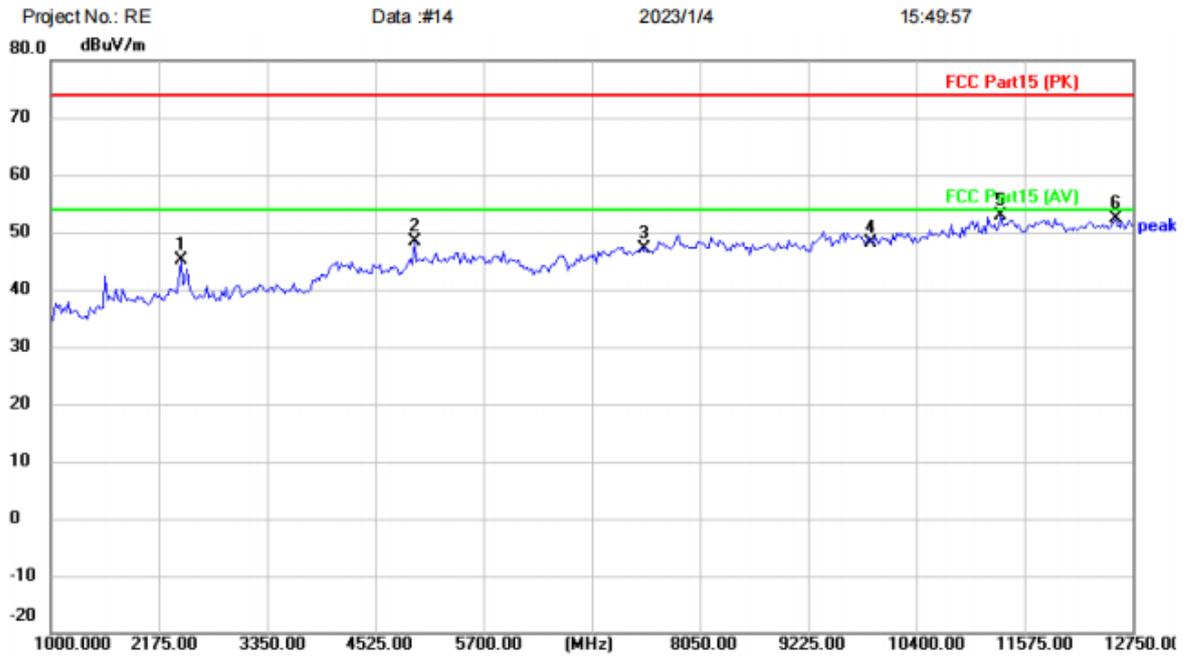

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 MN: Truefree T2
 Mode: TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2410.000	46.28	-1.26	45.02	74.00	-28.98	peak	
2		4948.000	43.23	5.22	48.45	74.00	-25.55	peak	
3		7440.000	38.77	8.48	47.25	74.00	-26.75	peak	
4		9920.000	36.34	11.69	48.03	74.00	-25.97	peak	
5	*	11316.500	39.18	13.59	52.77	74.00	-21.23	peak	
6		12562.000	38.61	13.88	52.49	74.00	-21.51	peak	

Test Result: Pass

17 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

17.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

17.2 BLOCK DIAGRAM OF TEST SETUP

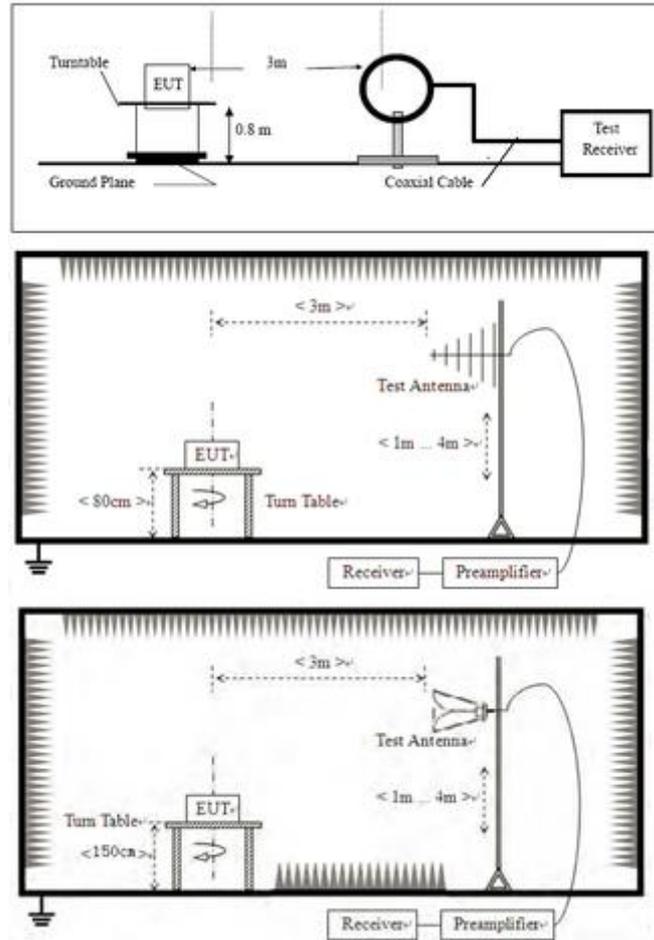

17.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $Level = Read\ Level + Cable\ Loss + Antenna\ Factor - Preamp\ Factor$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

17.4 TEST DATA

[TestMode: TX lowest channel]; [Polarity: Horizontal]

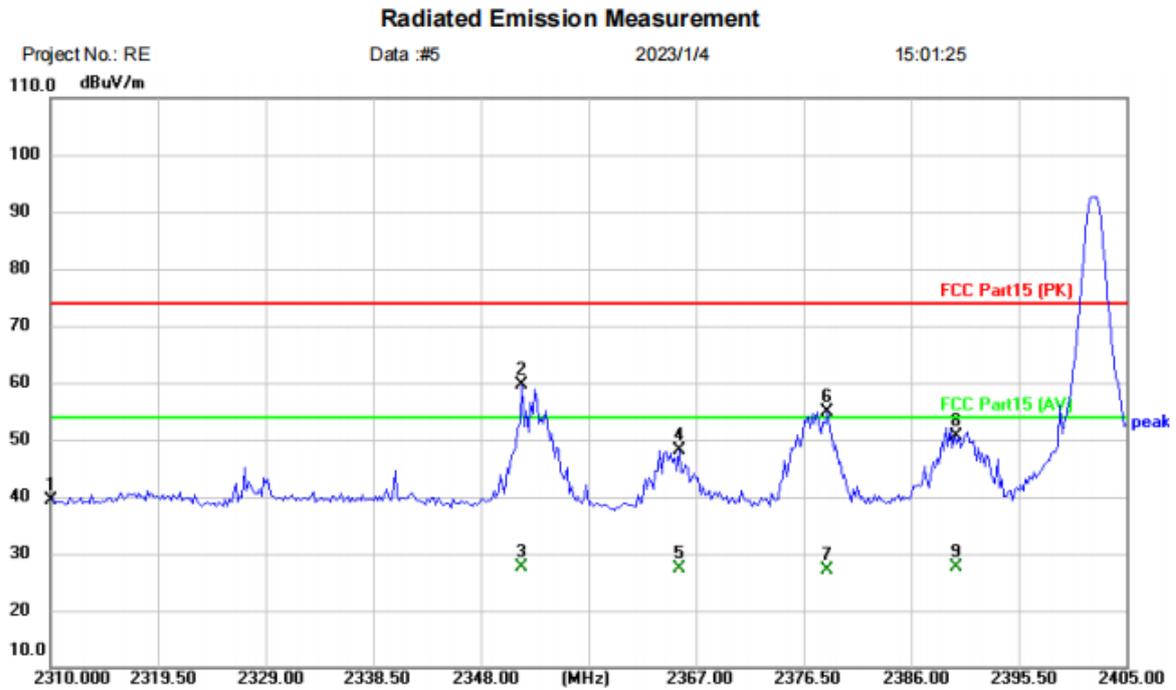


Site: Polarization: **Horizontal** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 M/N: Truefree T2
 Mode: TX-L
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2310.000	43.62	-4.27	39.35	74.00	-34.65	peak	
2	*	2351.610	63.66	-4.04	59.62	74.00	-14.38	peak	
3		2351.610	31.75	-4.04	27.71	54.00	-26.29	AVG	
4		2365.480	52.09	-3.95	48.14	74.00	-25.86	peak	
5		2365.480	31.23	-3.95	27.28	54.00	-26.72	AVG	
6		2378.590	58.87	-3.88	54.99	74.00	-19.01	peak	
7		2378.590	31.03	-3.88	27.15	54.00	-26.85	AVG	
8		2390.000	54.51	-3.82	50.69	74.00	-23.31	peak	
9		2390.000	31.41	-3.82	27.59	54.00	-26.41	AVG	

Test Result: Pass

[TestMode: TX lowest channel]; [Polarity: Vertical]

Radiated Emission Measurement

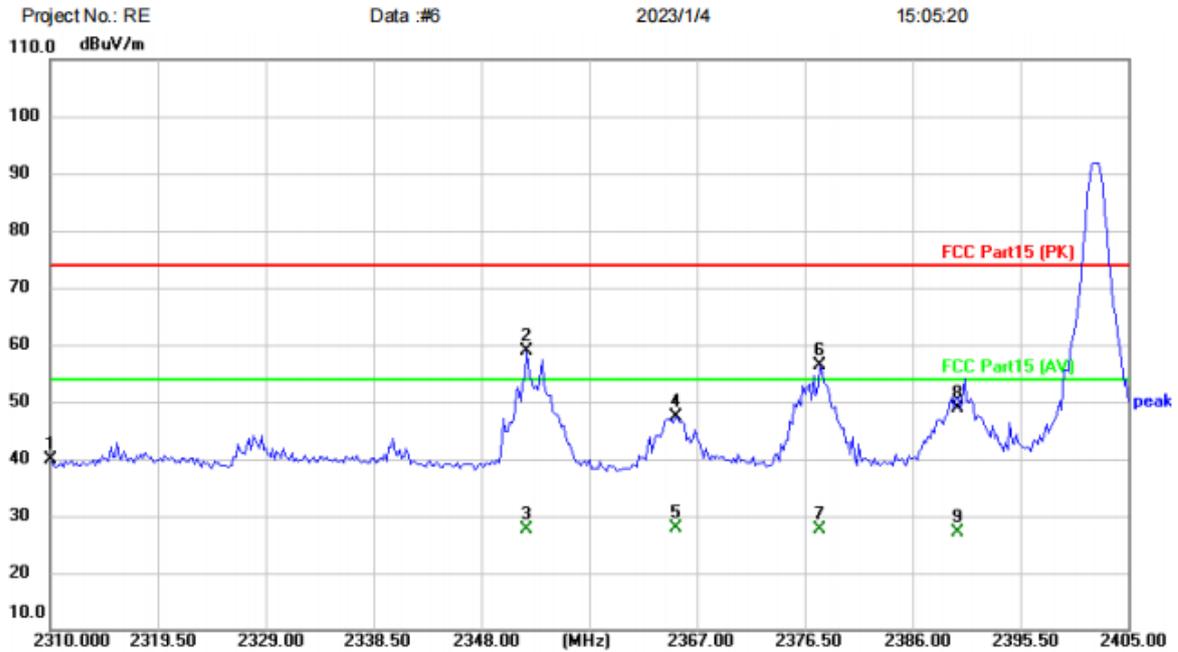

Site: Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 M/N: Truefree T2
 Mode: TX-L
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	44.15	-4.27	39.88	74.00	-34.12	peak	
2	*	2351.990	63.02	-4.04	58.98	74.00	-15.02	peak	
3		2351.990	31.68	-4.04	27.64	54.00	-26.36	AVG	
4		2365.100	51.44	-3.95	47.49	74.00	-26.51	peak	
5		2365.100	31.82	-3.95	27.87	54.00	-26.13	AVG	
6		2377.830	60.29	-3.89	56.40	74.00	-17.60	peak	
7		2377.830	31.45	-3.89	27.56	54.00	-26.44	AVG	
8		2390.000	52.74	-3.82	48.92	74.00	-25.08	peak	
9		2390.000	30.98	-3.82	27.16	54.00	-26.84	AVG	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Horizontal]

Radiated Emission Measurement



Site Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Wireless Headphones

M/N: Truefree T2

Mode: TX-H


Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1		2483.500	53.08	-3.96	49.12	74.00	-24.88	peak	
2	*	2491.288	54.92	-3.97	50.95	74.00	-23.05	peak	
3		2491.288	31.00	-3.97	27.03	54.00	-26.97	AVG	
4		2500.000	43.94	-4.00	39.94	74.00	-34.06	peak	

Test Result: Pass

[TestMode: TX highest channel]; [Polarity: Vertical]

Radiated Emission Measurement

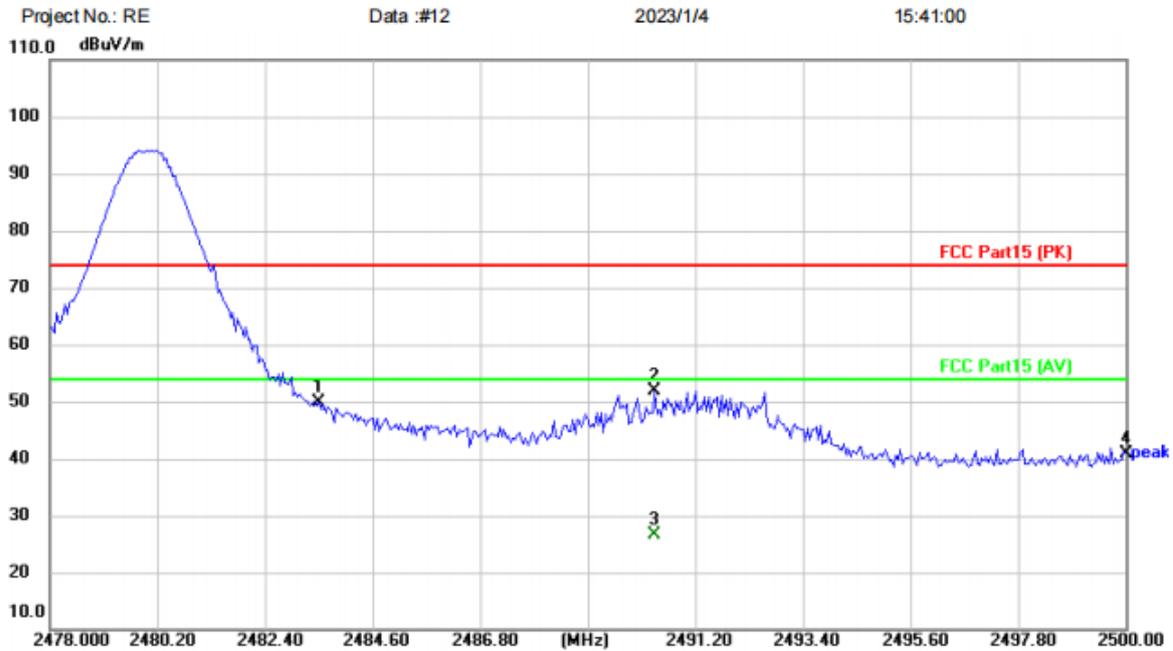

Site Polarization: **Vertical** Temperature: (C)
 Limit: FCC Part15 (PK) Power: Humidity: %RH
 EUT: Wireless Headphones
 M/N: Truefree T2
 Mode: TX-H
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2483.500	53.94	-3.96	49.98	74.00	-24.02	peak	
2	*	2490.364	55.87	-3.97	51.90	74.00	-22.10	peak	
3		2490.364	30.55	-3.97	26.58	54.00	-27.42	AVG	
4		2500.000	44.87	-4.00	40.87	74.00	-33.13	peak	

Test Result: Pass

18 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


18.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The max peak gain of the antenna is -0.3dBi.

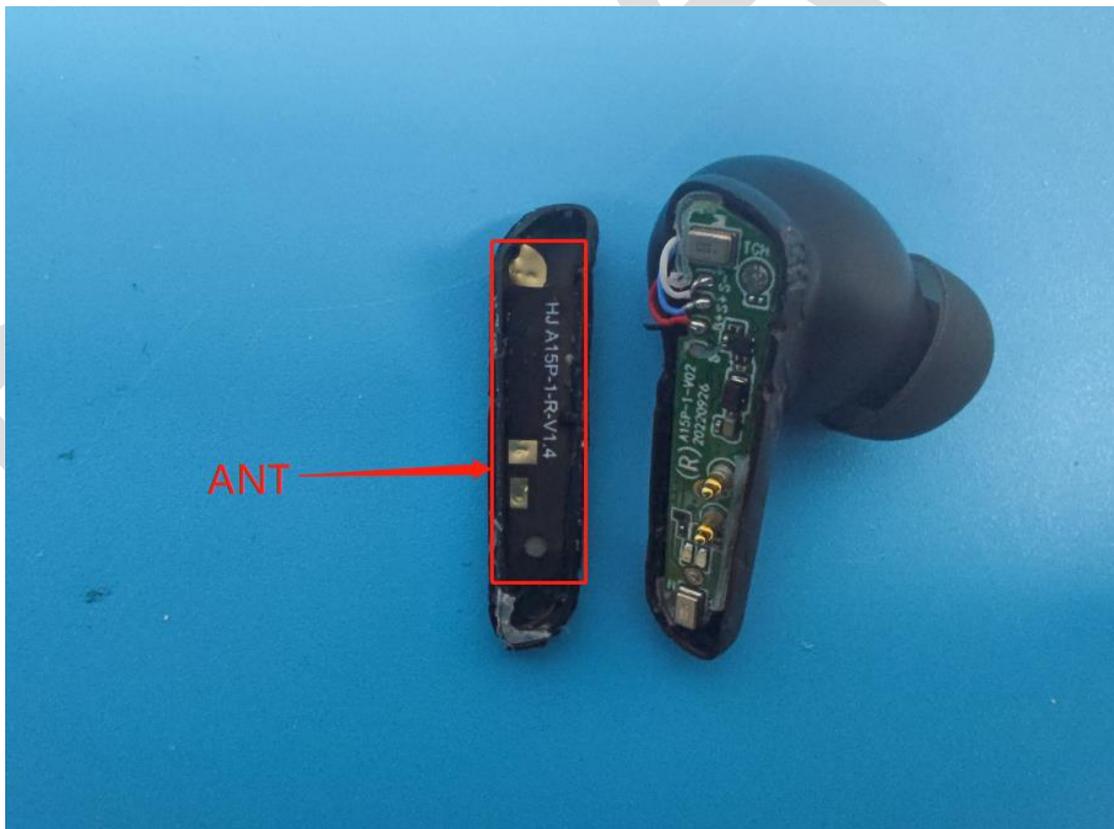


19 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

19.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

19.2 BLOCK DIAGRAM OF TEST SETUP

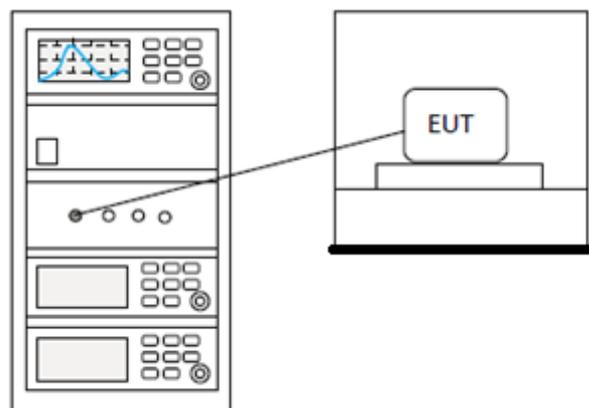

19.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


20 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

20.1 LIMITS

Limit:	<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>
---------------	---

20.2 BLOCK DIAGRAM OF TEST SETUP

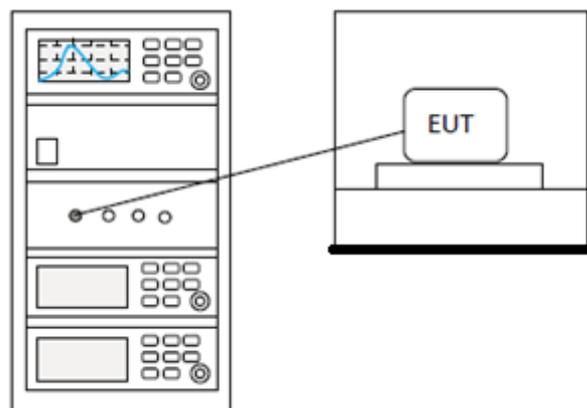

20.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


21 APPENDIX

Appendix1


21.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-0.599	21	Pass
NVNT	1-DH1	2441	Ant1	-0.23	21	Pass
NVNT	1-DH1	2480	Ant1	-2.314	21	Pass
NVNT	2-DH1	2402	Ant1	1.513	21	Pass
NVNT	2-DH1	2441	Ant1	1.824	21	Pass
NVNT	2-DH1	2480	Ant1	-0.253	21	Pass
NVNT	3-DH1	2402	Ant1	2.025	21	Pass
NVNT	3-DH1	2441	Ant1	2.398	21	Pass
NVNT	3-DH1	2480	Ant1	0.283	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

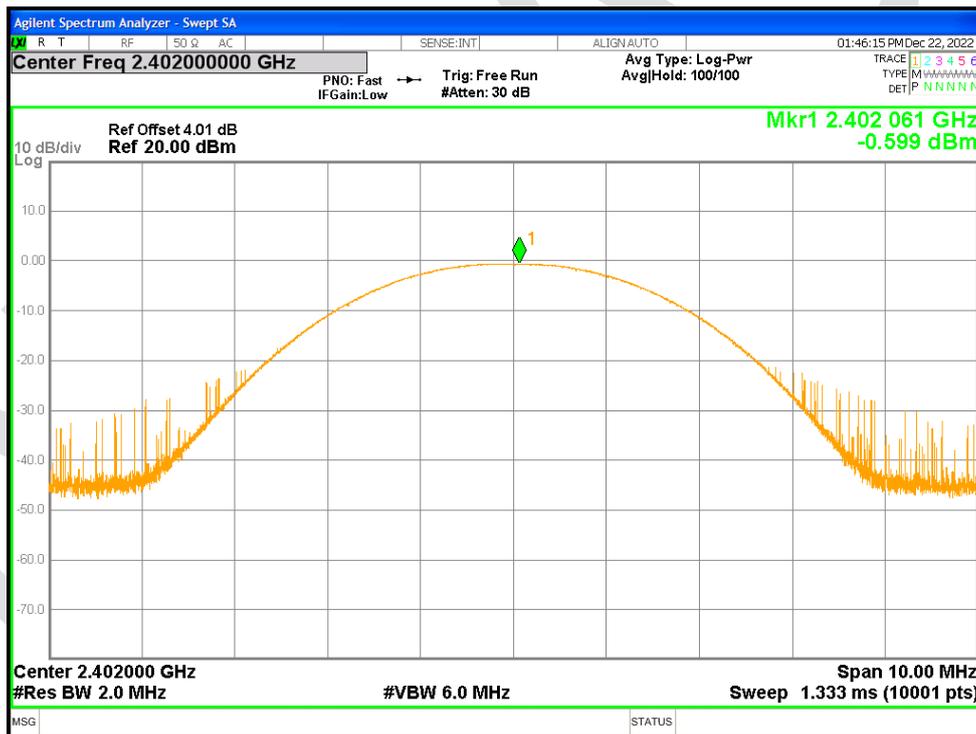


Power NVNT 1-DH1 2441MHz Ant1

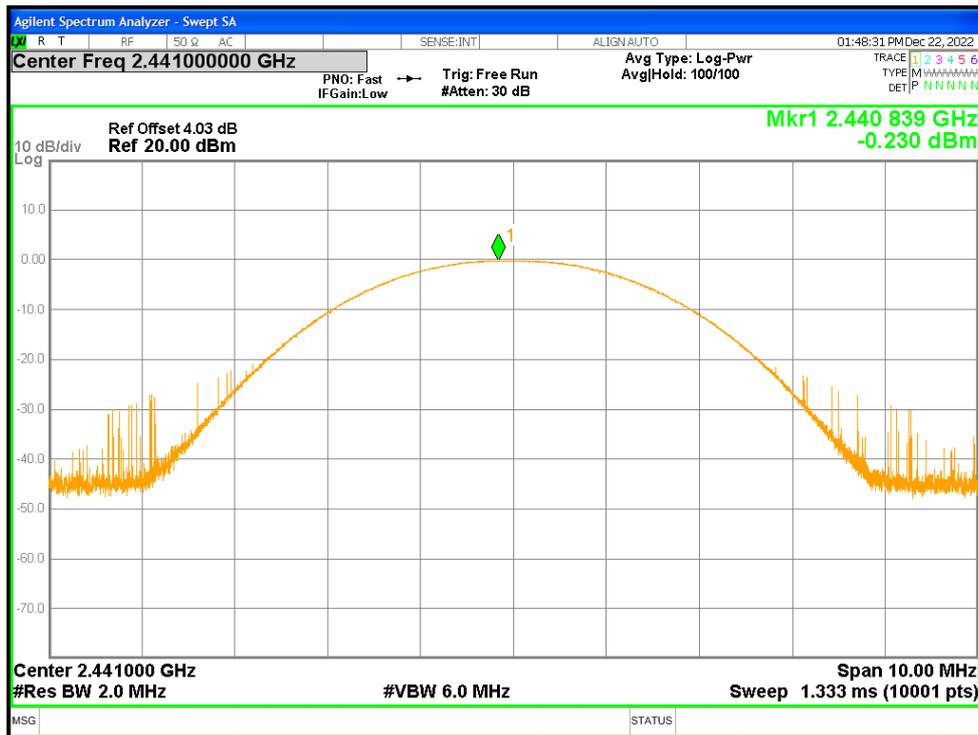


Power NVNT 1-DH1 2480MHz Ant1

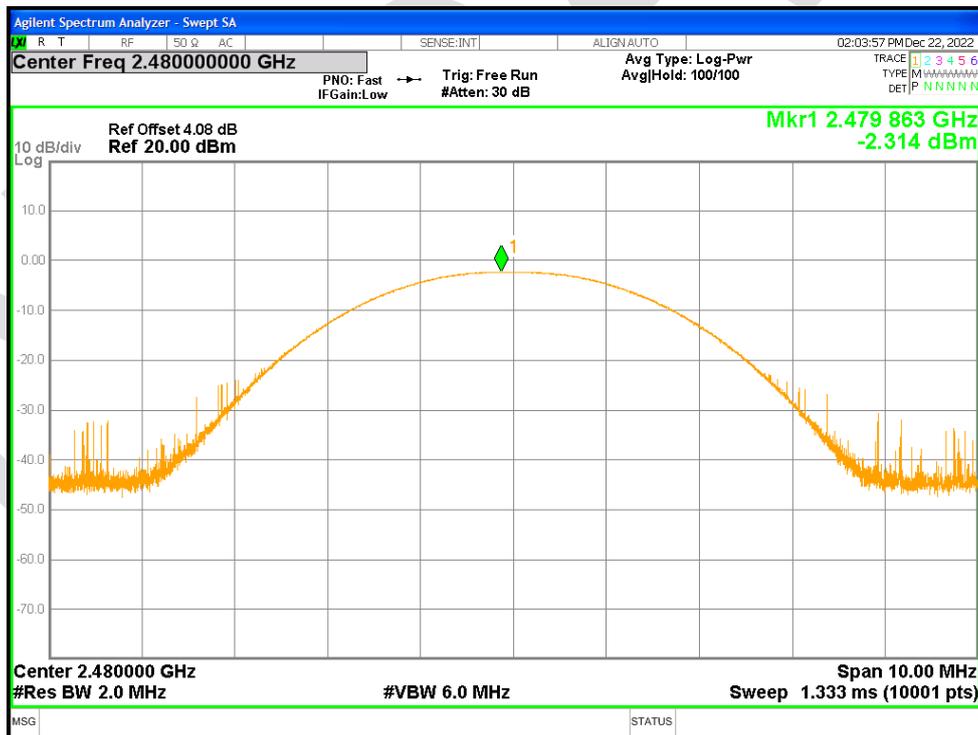


Power NVNT 2-DH1 2402MHz Ant1

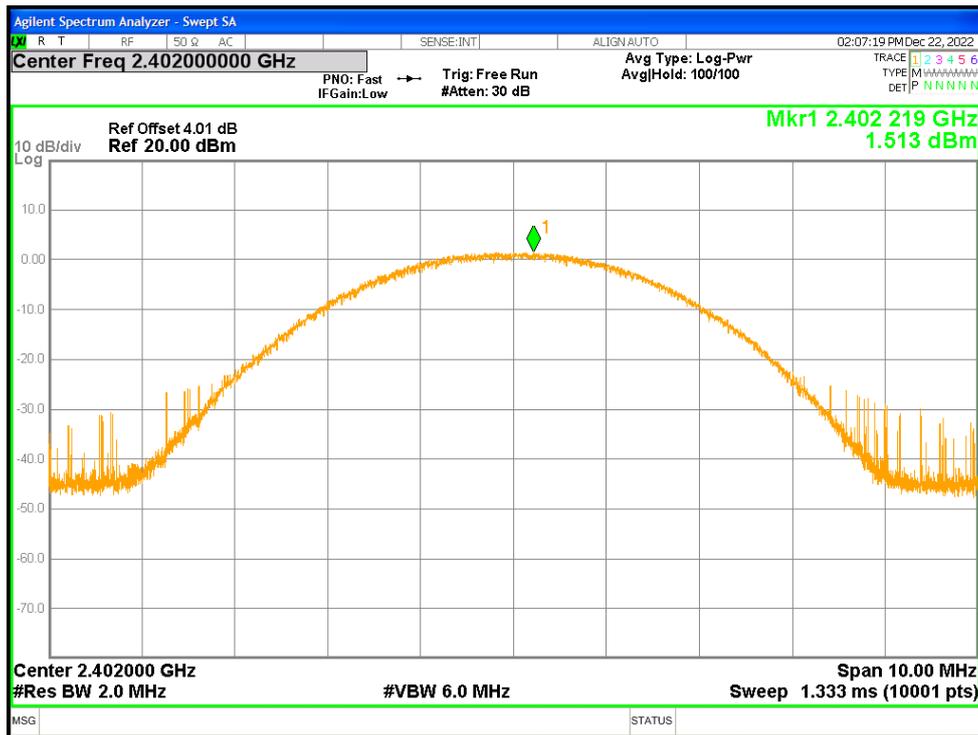


Power NVNT 2-DH1 2441MHz Ant1

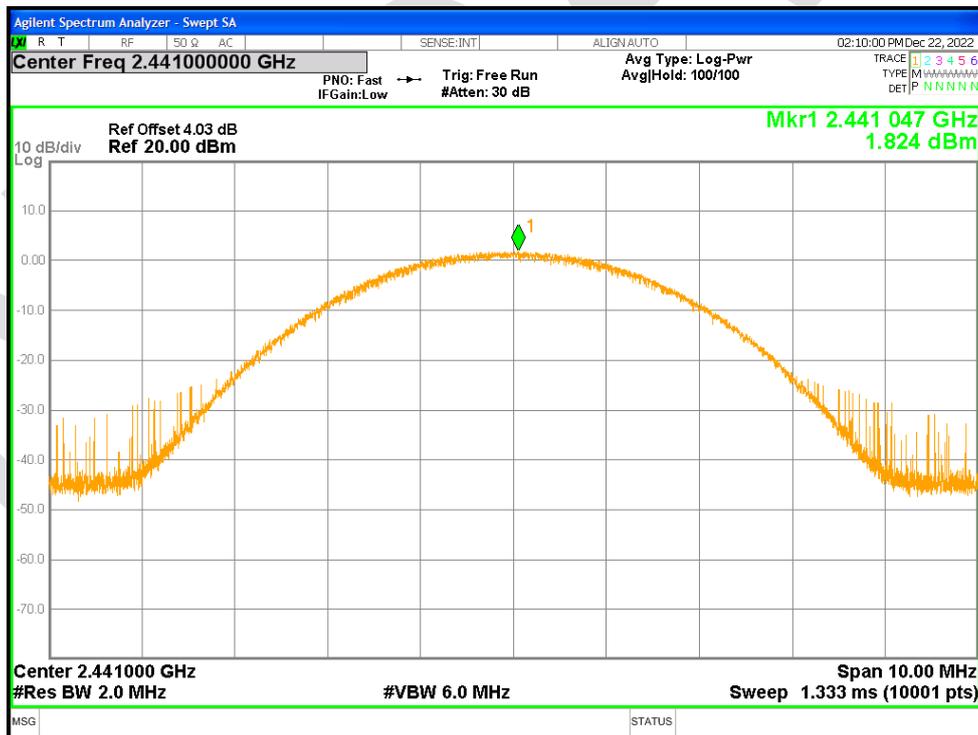


Power NVNT 2-DH1 2480MHz Ant1

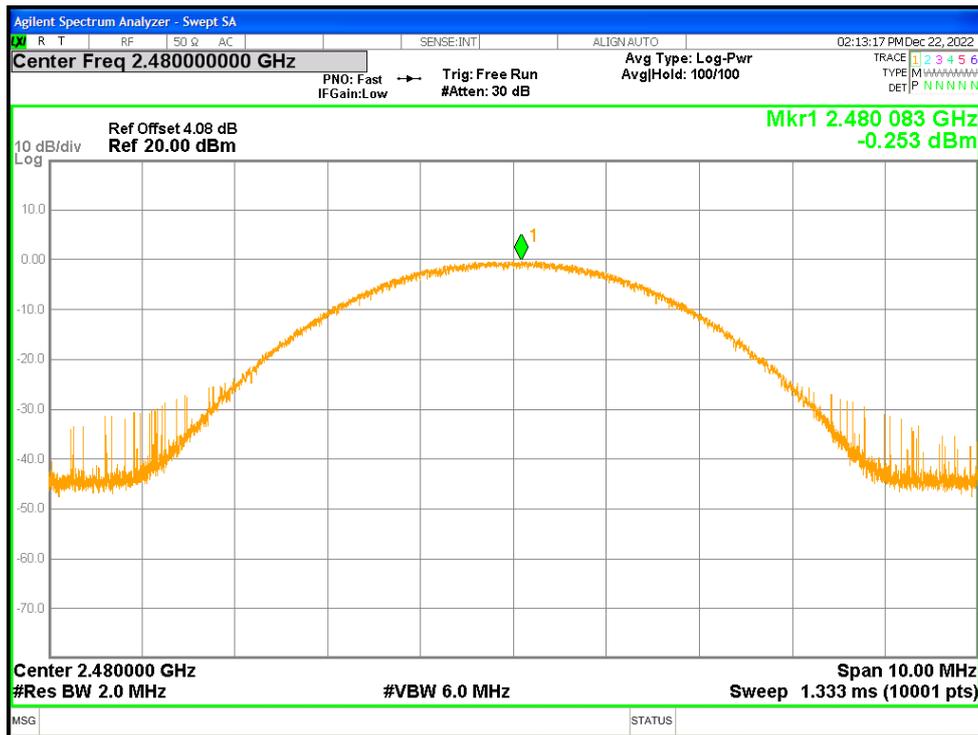

Power NVNT 3-DH1 2402MHz Ant1

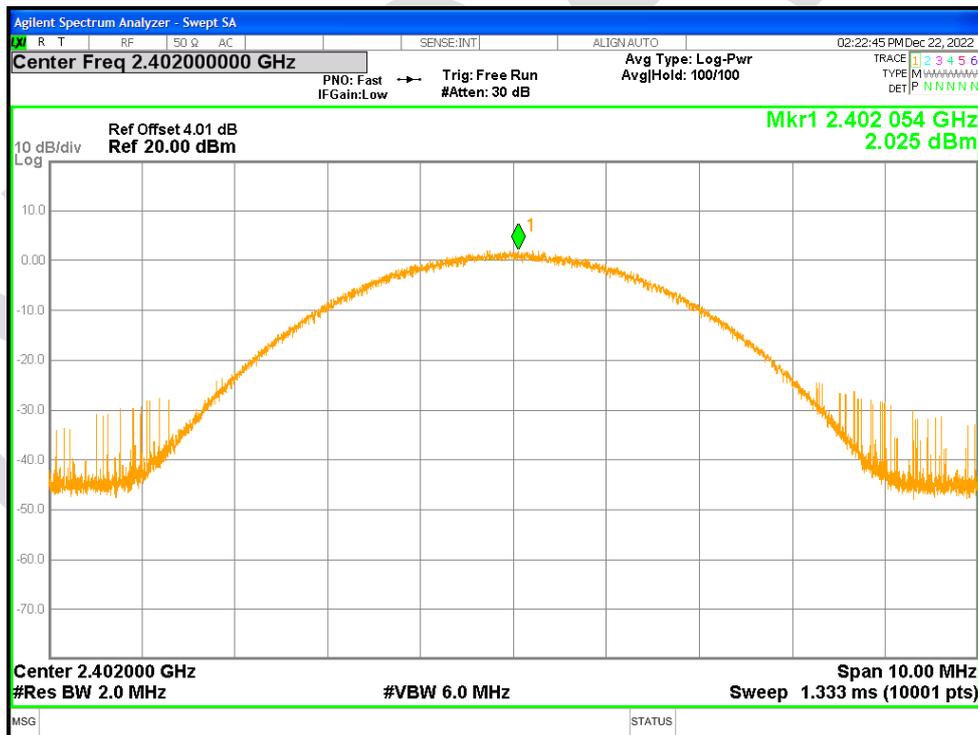

Power NVNT 3-DH1 2441MHz Ant1

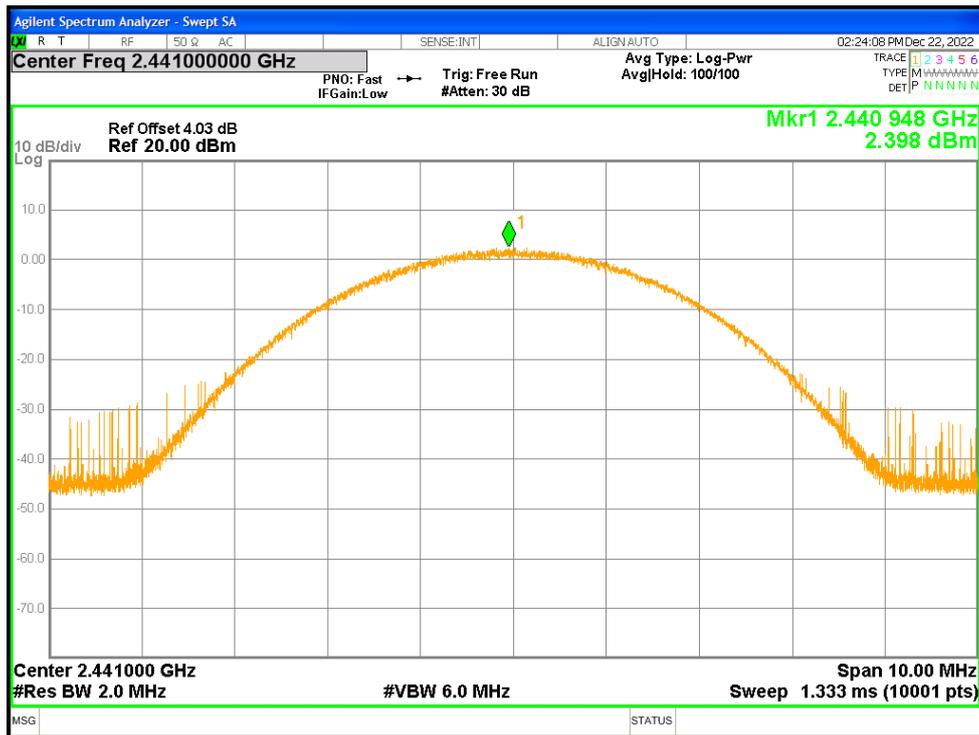

Power NVNT 3-DH1 2480MHz Ant1

