

## DFS MEASUREMENT REPORT

---

**FCC ID** : 2AXJ4AX3000PRO  
**Applicant** : TP-Link Corporation Limited  
**Application Type** : Certification  
**Product** : AX3000 Gigabit Wi-Fi 6 Router  
**Model No.** : Archer AX3000 Pro  
**Brand Name** : tp-link  
**FCC Classification** : Unlicensed National Information Infrastructure (NII)  
**FCC Rule Part(s)** : Part 15 Subpart E - 15.407 Section (h)(2)  
**Type of Device** : Master Device  
**Received Date** : May 3, 2022  
**Test Date** : May 4, 2022 ~ May 10, 2022  
**Test By** :   
( Owen Tsai )  
**Reviewed By** :   
( Paddy Chen )  
**Approved By** :   
( Chenz Ker )



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 905462 D02v02. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

## Revision History

| Report No.    | Version | Description     | Issue Date | Note  |
|---------------|---------|-----------------|------------|-------|
| 2205TW0104-U3 | V1.0    | Original Report | 2022-06-09 | Valid |
|               |         |                 |            |       |

## CONTENTS

| Description   | Page      |
|---|-----------|
| <b>General Information</b> .....  | <b>5</b>  |
| <b>1. INTRODUCTION</b> .....  | <b>6</b>  |
| 1.1. Scope.....   | 6         |
| 1.2. MRT Test Location .....  | 6         |
| <b>2. PRODUCT INFORMATION</b> .....   | <b>7</b>  |
| 2.1. Equipment Description.....   | 7         |
| 2.2. Description of Available Antennas.....   | 8         |
| 2.3. Operating Frequency and Channel List for this Report .....                         | 9         |
| 2.4. Test Channels for this Report .....  | 9         |
| 2.5. Test Mode .....  | 10        |
| 2.6. Applied Standards .....  | 10        |
| <b>3. DFS DETECTION THRESHOLDS AND RADAR TEST WAVEFORMS</b> .....                       | <b>11</b> |
| 3.1. Applicability .....  | 11        |
| 3.2. DFS Devices Requirements.....  | 12        |
| 3.3. DFS Detection Threshold Values .....   | 13        |
| 3.4. Parameters of DFS Test Signals.....  | 14        |
| 3.5. Conducted Test Setup .....   | 17        |
| <b>4. TEST EQUIPMENT CALIBRATION DATE</b> .....   | <b>18</b> |
| <b>5. TEST RESULT</b> .....   | <b>19</b> |
| 5.1. Summary .....  | 19        |
| 5.2. Radar Waveform Calibration.....  | 20        |
| 5.2.1. Calibration Setup .....  | 20        |
| 5.2.2. Calibration Procedure .....  | 20        |
| 5.2.3. Calibration Result .....   | 21        |
| 5.2.4. Channel Loading Test Result .....  | 23        |
| 5.3. UNII Detection Bandwidth Measurement .....   | 25        |
| 5.3.1. Test Limit .....   | 25        |
| 5.3.2. Test Procedure .....   | 25        |
| 5.3.3. Test Result.....   | 26        |
| 5.4. Initial Channel Availability Check Time Measurement .....                          | 32        |
| 5.4.1. Test Limit .....   | 32        |
| 5.4.2. Test Procedure .....   | 32        |
| 5.4.3. Test Result.....   | 33        |
| 5.5. Radar Burst at the Beginning of the Channel Availability Check Time Measurement .. | 34        |
| 5.5.1. Test Limit .....   | 34        |
| 5.5.2. Test Procedure .....   | 34        |
| 5.5.3. Test Result.....   | 35        |

---

|           |  |            |
|-----------|--|------------|
| 5.6.      | Radar Burst at the End of the Channel Availability Check Time Measurement .....  | 36         |
| 5.6.1.    | Test Limit .....   | 36         |
| 5.6.2.    | Test Procedure .....   | 36         |
| 5.6.3.    | Test Result.....   | 37         |
| 5.7.      | In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Measurement..... | 38         |
| 5.7.1.    | Test Limit .....   | 38         |
| 5.7.2.    | Test Procedure Used .....  | 38         |
| 5.7.3.    | Test Result.....   | 39         |
| 5.8.      | Statistical Performance Check Measurement .....  | 41         |
| 5.8.1.    | Test Limit .....   | 41         |
| 5.8.2.    | Test Procedure .....   | 41         |
| 5.8.3.    | Test Result.....   | 42         |
| <b>6.</b> | <b>CONCLUSION.....</b>   | <b>177</b> |
|           | <b>Appendix A : Test Setup Photograph .....</b>  | <b>178</b> |
|           | <b>Appendix B : External Photograph.....</b>   | <b>179</b> |
|           | <b>Appendix C : Internal Photograph .....</b>  | <b>180</b> |

## General Information

|                                 |   |
|---------------------------------|---|
| <b>Applicant</b>                | TP-Link Corporation Limited   |
| <b>Applicant Address</b>        | Room 901, 9/F., New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hongkong                                  |
| <b>Manufacturer</b>             | TP-Link Corporation Limited   |
| <b>Manufacturer Address</b>     | Room 901, 9/F., New East Ocean Centre, 9 Science Museum Road, Tsim Sha Tsui, Kowloon, Hongkong                                  |
| <b>Test Site</b>                | MRT Technology (Taiwan) Co., Ltd  |
| <b>Test Site Address</b>        | No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)  |
| <b>MRT FCC Registration No.</b> | 291082  |
| <b>FCC Rule Part(s)</b>         | Part 15.407   |
| <b>Test Device Serial No.</b>   | N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering |

## Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Taiwan, EU and TELEC Rules.


# 1. INTRODUCTION

## 1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

## 1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

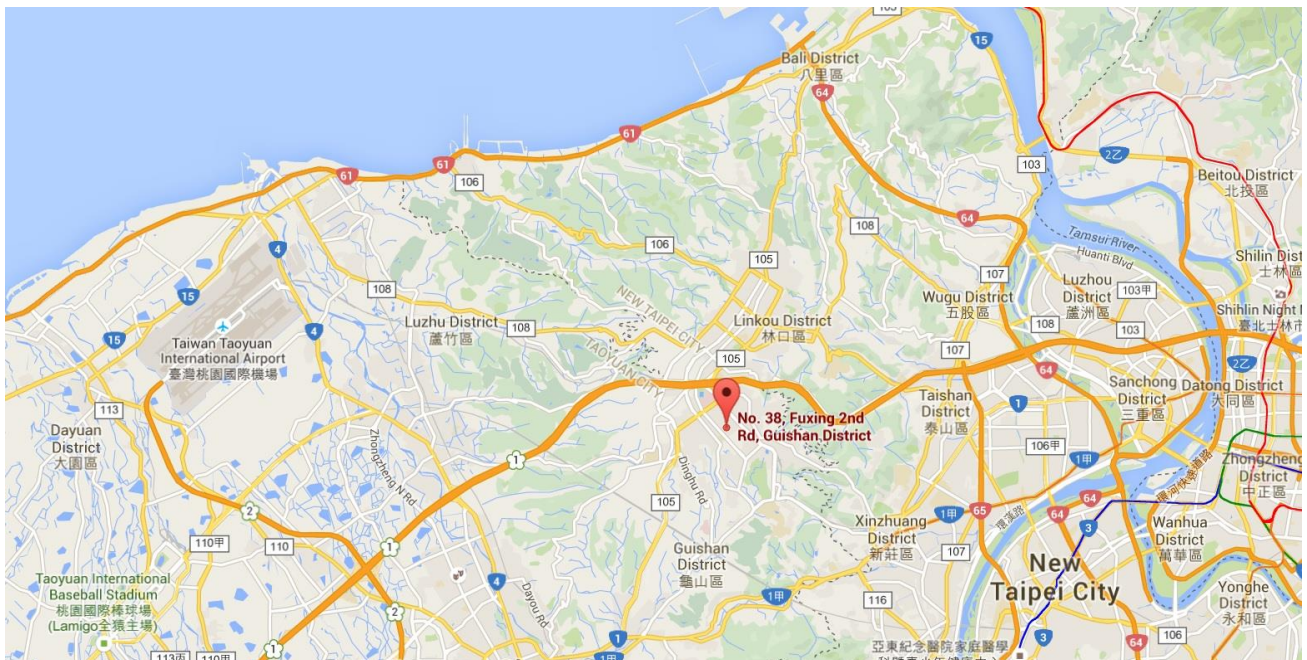

## 2. PRODUCT INFORMATION

### 2.1. Equipment Description

|   |   |
|---|---|
| Product Name:                               | AX3000 Gigabit Wi-Fi 6 Router   |
| Model No.:                                  | Archer AX3000 Pro   |
| Brand Name:                                 | tp-link   |
| Wi-Fi Specification:                        | 802.11a/b/g/n/ac/ax   |
| EUT Identification No.:                     | DFS 1-3   |
| Frequency Range:                            | <p><b><u>2.4GHz:</u></b><br/>           For 802.11b/g/n-HT20/ax-HE20: 2412 ~ 2462 MHz<br/>           For 802.11n-HT40/ax-HE40: 2422 ~ 2452 MHz</p> <p><b><u>5GHz:</u></b><br/>           For 802.11a/n-HT20/ac-VHT20/ax-HE20:<br/>           5180~5240MHz, 5260~5320 MHz, 5500~5720MHz, 5745~5825MHz<br/>           For 802.11n-HT40/ac-VHT40/ax-HE40:<br/>           5190~5230MHz, 5270~5310 MHz, 5510~5710MHz, 5755~5795MHz<br/>           For 802.11ac-VHT80/ax-HE80:<br/>           5210MHz, 5290MHz, 5530MHz, 5610MHz, 5690MHz, 5775MHz<br/>           For 802.11ac-VHT160/ax-HE160:<br/>           5250MHz, 5570MHz</p> |
| Type of Modulation:                         | 802.11b: DSSS, 802.11a/g/n/ac: OFDM,<br>802.11ax: OFDMA   |
| TPC mechanism:                              | Support (Details refer to operational description)  |
| Power-on cycle:                             | Requires 73.3 seconds to complete its power-on cycle  |
| Uniform Spreading (For DFS Frequency Band): | For the 5250 -5350MHz & 5470-5725MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.   |
| Adapter                                     | BRAND: tp-link<br>MODEL: T120200-2B1<br>INPUT: 100 - 240V ~ 50/60Hz 0.8A.<br>OUTPUT: DC 12.0V 2.0A<br>Cable Out: Non-shielding, 1.5m  |

## 2.2. Description of Available Antennas

| Antenna Type   | Frequency Band (MHz) | T <sub>x</sub> Paths | Max Antenna Gain (dBi) | Beamforming Directional Gain (dBi) | CDD Directional Gain (dBi) |         |
|----------------|----------------------|----------------------|------------------------|------------------------------------|----------------------------|---------|
|                |                      |                      |                        |                                    | For Power                  | For PSD |
| Dipole Antenna | 2412 ~ 2462          | 2                    | 2.0                    | 5.01                               | 2.0                        | 5.01    |
|                | 5150 ~ 5850          | 2                    | 2.5                    | 5.51                               | 2.5                        | 5.51    |

Note:

- The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.  
 If all antennas have the same gain,  $G_{ANT}$ , Directional gain =  $G_{ANT}$  + Array Gain, where Array Gain is as follows.
  - For power spectral density (PSD) measurements on all devices,  
 Array Gain =  $10 \log (N_{ANT} / N_{SS})$  dB;
  - For power measurements on IEEE 802.11 devices,  
 Array Gain = 0 dB for  $N_{ANT} \leq 4$ ;
- The EUT also supports Beam Forming mode, and the Beam Forming support 802.11ac/ax, not include 802.11a/b/g/n. BF Directional gain =  $G_{ANT} + 10 \log (N_{ANT})$ .
- All messages of antenna were declared by manufacturer.



### 2.3. Operating Frequency and Channel List for this Report

802.11a/n-HT20/ac-VHT20/ax-HE20

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 52      | 5260 MHz  | 56      | 5280 MHz  | 60      | 5300 MHz  |
| 64      | 5320 MHz  | 100     | 5500 MHz  | 104     | 5520 MHz  |
| 108     | 5540 MHz  | 112     | 5560 MHz  | 116     | 5580 MHz  |
| 132     | 5660 MHz  | 136     | 5680 MHz  | 140     | 5700 MHz  |
| 144     | 5720 MHz  | --      | --        | --      | --        |

802.11n-HT40/ac-VHT40/ax-HE40

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 54      | 5270 MHz  | 62      | 5310 MHz  | 102     | 5510 MHz  |
| 110     | 5550 MHz  | 134     | 5670 MHz  | 142     | 5710 MHz  |

802.11ac-VHT80/ax-HE80

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 58      | 5290 MHz  | 106     | 5530 MHz  | 122     | 5610 MHz  |
| 138     | 5690 MHz  | --      | --        | --      | --        |

802.11ac-VHT160/ax-HE160

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| 50      | 5250MHz   | 114     | 5570 MHz  | --      | --        |

### 2.4. Test Channels for this Report

| Test Mode      | Test Channel | Test Frequency |
|----------------|--------------|----------------|
| 802.11ax-HE20  | 100          | 5500 MHz       |
| 802.11ax-HE40  | 102          | 5510 MHz       |
| 802.11ax-HE80  | 106          | 5530 MHz       |
| 802.11ax-HE160 | 50           | 5250 MHz       |
| 802.11ax-HE160 | 114          | 5570 MHz       |

## 2.5. Test Mode

|           |   |
|-----------|---|
| Test Mode | Make the EUT communicate with notebook at DFS channel |
|-----------|---|

## 2.6. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part15 Subpart E (Section 15.407 Section (h)(2))
- KDB 905462 D02v02
- KDB 905462 D04v01

### 3. DFS DETECTION THRESHOLDS AND RADAR TEST WAVEFORMS

#### 3.1. Applicability

The following table from FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 lists the applicable requirements for the DFS testing.

| Requirement                     | Operational Mode |                                |                             |
|---------------------------------|------------------|--------------------------------|-----------------------------|
|                                 | Master           | Client Without Radar Detection | Client With Radar Detection |
| Non-Occupancy Period            | Yes              | Not required                   | Yes                         |
| DFS Detection Threshold         | Yes              | Not required                   | Yes                         |
| Channel Availability Check Time | Yes              | Not required                   | Not required                |
| U-NII Detection Bandwidth       | Yes              | Not required                   | Yes                         |

**Table 3-1: Applicability of DFS Requirements Prior to Use of a Channel**

| Requirement                       | Operational Mode                             |                                |
|-----------------------------------|--|--------------------------------|
|                                   | Master Device or Client With Radar Detection | Client Without Radar Detection |
| DFS Detection Threshold           | Yes  | Not required                   |
| Channel Closing Transmission Time | Yes  | Yes                            |
| Channel Move Time                 | Yes  | Yes                            |
| U-NII Detection Bandwidth         | Yes  | Not required                   |

| Additional requirements for devices with multiple bandwidth modes | Master Device or Client with Radar Detection | Client Without Radar Detection                       |
|---|--|--|
| U-NII Detection Bandwidth and Statistical Performance Check       | All BW modes must be tested                  | Not required   |
| Channel Move Time and Channel Closing Transmission Time           | Test using widest BW mode available          | Test using the widest BW mode available for the link |
| All other tests   | Any single BW mode                           | Not required   |

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

**Table 3-2: Applicability of DFS Requirements during normal operation**

### 3.2. DFS Devices Requirements

**Per FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 the following are the requirements for Master Devices:**

- (a) The Master Device will use DFS in order to detect Radar Waveforms with received signal strength above the DFS Detection Threshold in the 5250 ~ 5350 MHz and 5470 ~ 5725 MHz bands. DFS is not required in the 5150 ~ 5250 MHz or 5725 ~ 5825 MHz bands.
- (b) Before initiating a network on a Channel, the Master Device will perform a Channel Availability Check for a specified time duration (Channel Availability Check Time) to ensure that there is no radar system operating on the Channel, using DFS described under subsection a) above.
- (c) The Master Device initiates a U-NII network by transmitting control signals that will enable other U-NII devices to Associate with the Master Device.
- (d) During normal operation, the Master Device will monitor the Channel (In-Service Monitoring) to ensure that there is no radar system operating on the Channel, using DFS described under a).
- (e) If the Master Device has detected a Radar Waveform during In-Service Monitoring as described under d), the Operating Channel of the U-NII network is no longer an Available Channel. The Master Device will instruct all associated Client Device(s) to stop transmitting on this Channel within the Channel Move Time. The transmissions during the Channel Move Time will be limited to the Channel Closing Transmission Time.
- (f) Once the Master Device has detected a Radar Waveform it will not utilize the Channel for the duration of the Non-Occupancy Period.
- (g) If the Master Device delegates the In-Service Monitoring to a Client Device, then the combination will be tested to the requirements described under d) through f) above.

**Channel Move Time and Channel Closing Transmission Time requirements are listed in the following table.**

| Parameter  | Value   |
|--|---|
| Non-occupancy period   | Minimum 30 minutes  |
| Channel Availability Check Time  | 60 seconds  |
| Channel Move Time  | 10 seconds<br>See Note 1.   |
| Channel Closing Transmission Time  | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period.<br>See Notes 1 and 2. |
| U-NII Detection Bandwidth  | Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.                                   |
| Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. |   |

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

**Table 3-3: DFS Response Requirements**

### 3.3. DFS Detection Threshold Values

The DFS detection thresholds are defined for Master devices and Client Devices with In-service monitoring. These detection thresholds are listed in the following table.

| Maximum Transmit Power  | Value<br>(See Notes 1, 2, and 3) |
|---|----------------------------------|
| EIRP $\geq$ 200 milliwatt   | -64 dBm                          |
| EIRP < 200 milliwatt and<br>power spectral density < 10 dBm/MHz                 | -62 dBm                          |
| EIRP < 200 milliwatt that do not meet the power<br>spectral density requirement | -64 dBm                          |

**Note 1:** This is the level at the input of the receiver assuming a 0 dBi receive antenna.

**Note 2:** Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

**Note3:** EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

**Table 3-4: Detection Thresholds for Master Devices and Client Devices with Radar Detection**

### 3.4. Parameters of DFS Test Signals

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

#### Short Pulse Radar Test Waveforms

| Radar Type  | Pulse Width (μsec) | PRI (μsec)  | Number of Pulses  | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|---|--------------------|---|---|--|--------------------------|
| 0   | 1                  | 1428  | 18  | See Note 1                                 | See Note 1               |
| 1   | 1                  | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 3-6  | $\text{Roundup} \left\{ \left( \frac{1}{360} \right), \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$ | 60%  | 30                       |
|   |                    | Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A |   |  |                          |
| 2   | 1-5                | 150-230   | 23-29   | 60%  | 30                       |
| 3   | 6-10               | 200-500   | 16-18   | 60%  | 30                       |
| 4   | 11-20              | 200-500   | 12-16   | 60%  | 30                       |
| Aggregate (Radar Types 1-4)   |                    |   |   | 80%  | 120                      |
| <b>Note 1:</b> Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. |                    |   |   |  |                          |

**Table 3-5: Parameters for Short Pulse Radar Waveforms**

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

| Pulse Repetition Frequency Number | Pulse Repetition Frequency (Pulses Per Second) | Pulse Repetition Interval (Microseconds) |
|-----------------------------------|--|--|
| 1                                 | 1930.5   | 518                                      |
| 2                                 | 1858.7   | 538                                      |
| 3                                 | 1792.1   | 558                                      |
| 4                                 | 1730.1   | 578                                      |
| 5                                 | 1672.2   | 598                                      |
| 6                                 | 1618.1   | 618                                      |
| 7                                 | 1567.4   | 638                                      |
| 8                                 | 1519.8   | 658                                      |
| 9                                 | 1474.9   | 678                                      |
| 10                                | 1432.7   | 698                                      |
| 11                                | 1392.8   | 718                                      |
| 12                                | 1355   | 738                                      |
| 13                                | 1319.3   | 758                                      |
| 14                                | 1285.3   | 778                                      |
| 15                                | 1253.1   | 798                                      |
| 16                                | 1222.5   | 818                                      |
| 17                                | 1193.3   | 838                                      |
| 18                                | 1165.6   | 858                                      |
| 19                                | 1139   | 878                                      |
| 20                                | 1113.6   | 898                                      |
| 21                                | 1089.3   | 918                                      |
| 22                                | 1066.1   | 938                                      |
| 23                                | 326.2  | 3066                                     |

**Table 3-6: Pulse Repetition Intervals Values for Test A**

### Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec)  | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|-------------------|-------------|----------------------------|------------------|--|--------------------------|
| 5          | 50 - 100           | 5 - 20            | 1000 - 2000 | 1 - 3                      | 8 - 20           | 80%  | 30                       |

**Table 3-7: Parameters for Long Pulse Radar Waveforms**

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

### Frequency Hopping Radar Test Waveform

| Radar Type | Pulse Width (μsec) | PRI (μsec) | Pulses Per Hop | Hopping Rate (kHz) | Hopping Sequence Length (msec) | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|------------|--------------------|------------|----------------|--------------------|--------------------------------|--|--------------------------|
| 6          | 1                  | 333        | 9              | 0.333              | 300                            | 70%  | 30                       |

**Table 3-8: Parameters for Frequency Hopping Radar Waveforms**


For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.




### 3.5. Conducted Test Setup

The FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 describes a radiated test setup and a conducted test setup. The conducted test setup was used for this testing. Figure 3-1 shows the typical test setup.

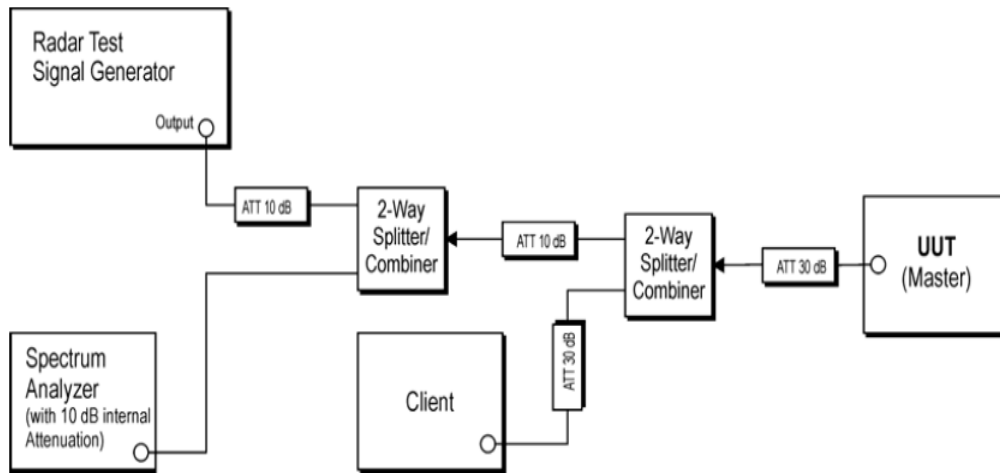

**Figure 3-1: Conducted Test Setup where UUT is a Master and Radar Test Waveforms are injected into the Masters**

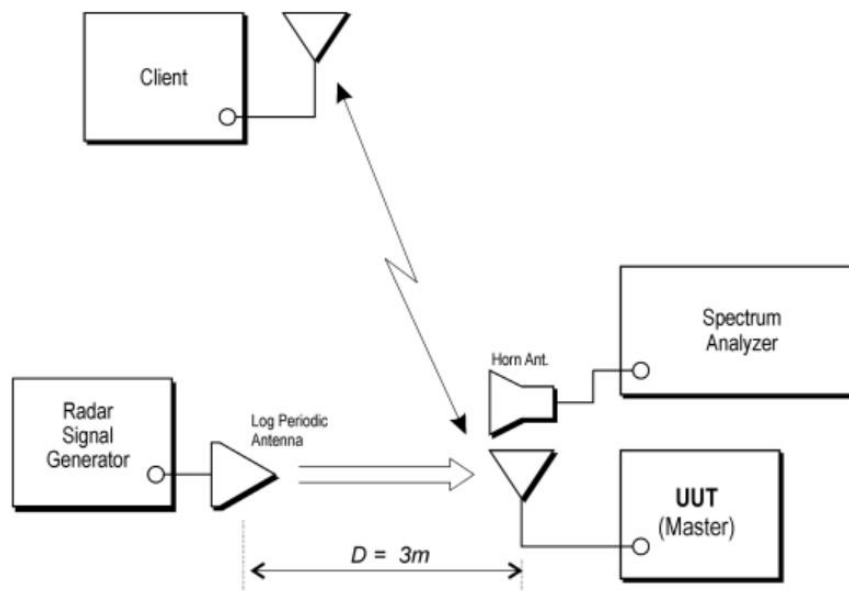

**Figure 3-2: Radiated Test Setup where UUT is a Master and Radar Test Waveforms are injected into the UUT**

## 4. TEST EQUIPMENT CALIBRATION DATE

### Dynamic Frequency Selection (DFS)

| Instrument              | Manufacturer | Type No.       | Asset No.   | Cali. Interval | Cali. Due Date |
|-------------------------|--------------|----------------|-------------|----------------|----------------|
| EXA Signal Analyzer     | KEYSIGHT     | N9010A         | MRTTWA00012 | 1 year         | 2022/10/18     |
| EXA Signal Analyzer     | KEYSIGHT     | N9010B         | MRTTWA00074 | 1 year         | 2022/7/19      |
| Vector Signal Generator | Keysight     | N5182B         | MRTTWA00010 | 1 year         | 2022/6/1       |
| Combiner                | WOKEN        | 0120A04208001S | MRTTWE00008 | 1 year         | 2022/6/17      |

### Client Information

| Instrument   | Manufacturer | Type No. | Certification Number |
|--------------|--------------|----------|----------------------|
| Wi-Fi Module | Intel        | AX200NGW | FCC ID: PD9AX200NG   |

| Software               | Version | Manufacturer | Function                         |
|------------------------|---------|--------------|----------------------------------|
| Pulse Building(N7607B) | V3.0.0  | Keysight     | Radar Signal Generation Software |
| DFS Tool               | V6.7    | Keysight     | DFS Test Software                |

## 5. TEST RESULT

### 5.1. Summary

| Parameter  | Limit           | Test Result | Reference   |
|--|-----------------|-------------|-------------|
| UNII Detection Bandwidth Measurement   | Refer Table 3-3 | Pass        | Section 5.4 |
| Initial Channel Availability Check Time  | Refer Table 3-3 | Pass        | Section 5.5 |
| Radar Burst at the Beginning of the Channel Availability Check Time            | Refer Table 3-3 | Pass        | Section 5.6 |
| Radar Burst at the End of the Channel Availability Check Time                  | Refer Table 3-3 | Pass        | Section 5.7 |
| In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time | Refer Table 3-3 | Pass        | Section 5.8 |
| Non-Occupancy Period   | Refer Table 3-3 | Pass        | Section 5.8 |
| Statistical Performance Check  | Refer Table 3-3 | Pass        | Section 5.9 |

**Note:**

- 1) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.

## 5.2. Radar Waveform Calibration

### 5.2.1. Calibration Setup

The conducted test setup was used for this calibration testing. Figure 3-2 shows the typical test setup.

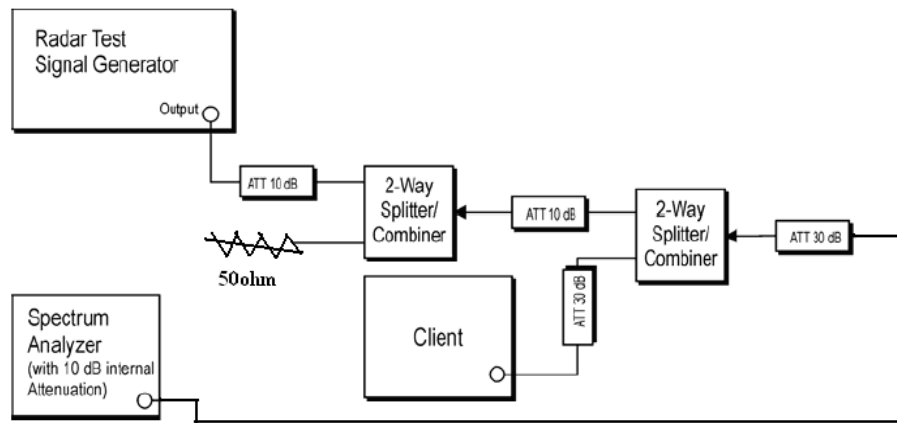



Figure 3-2: Conducted Test Setup


### 5.2.2. Calibration Procedure

The Interference Radar Detection Threshold Level is  $(-64\text{dBm}) + (0) [\text{dBi}] + 1 \text{ dB} = -63 \text{ dBm}$  that had been taken into account the output power range and antenna gain. The above equipment setup was used to calibrate the conducted Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to at least 3MHz. The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was  $(-64\text{dBm}) + (0) [\text{dBi}] + 1 \text{ dB} = -63\text{dBm}$ . Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

### 5.2.3. Calibration Result


|               |                               |                   |          |
|---------------|-------------------------------|-------------------|----------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router | Temperature       | 25°C     |
| Test Engineer | Peter                         | Relative Humidity | 65%      |
| Test Site     | SR5                           | Test Date         | 2022/5/4 |
| Test Item     | Radar Waveform Calibration    |                   |          |

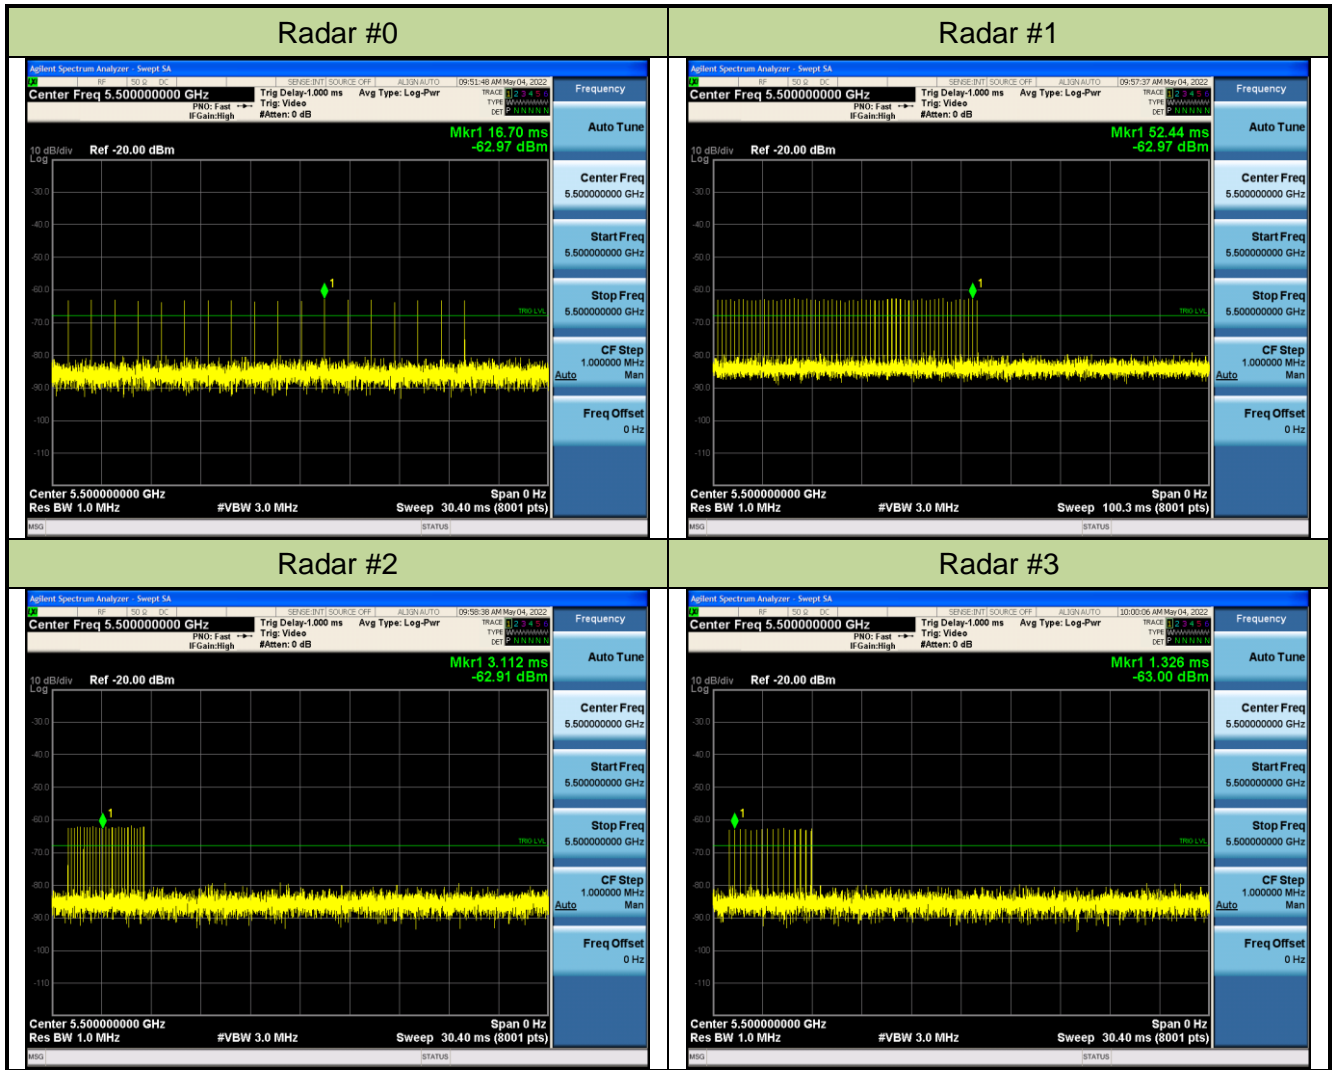

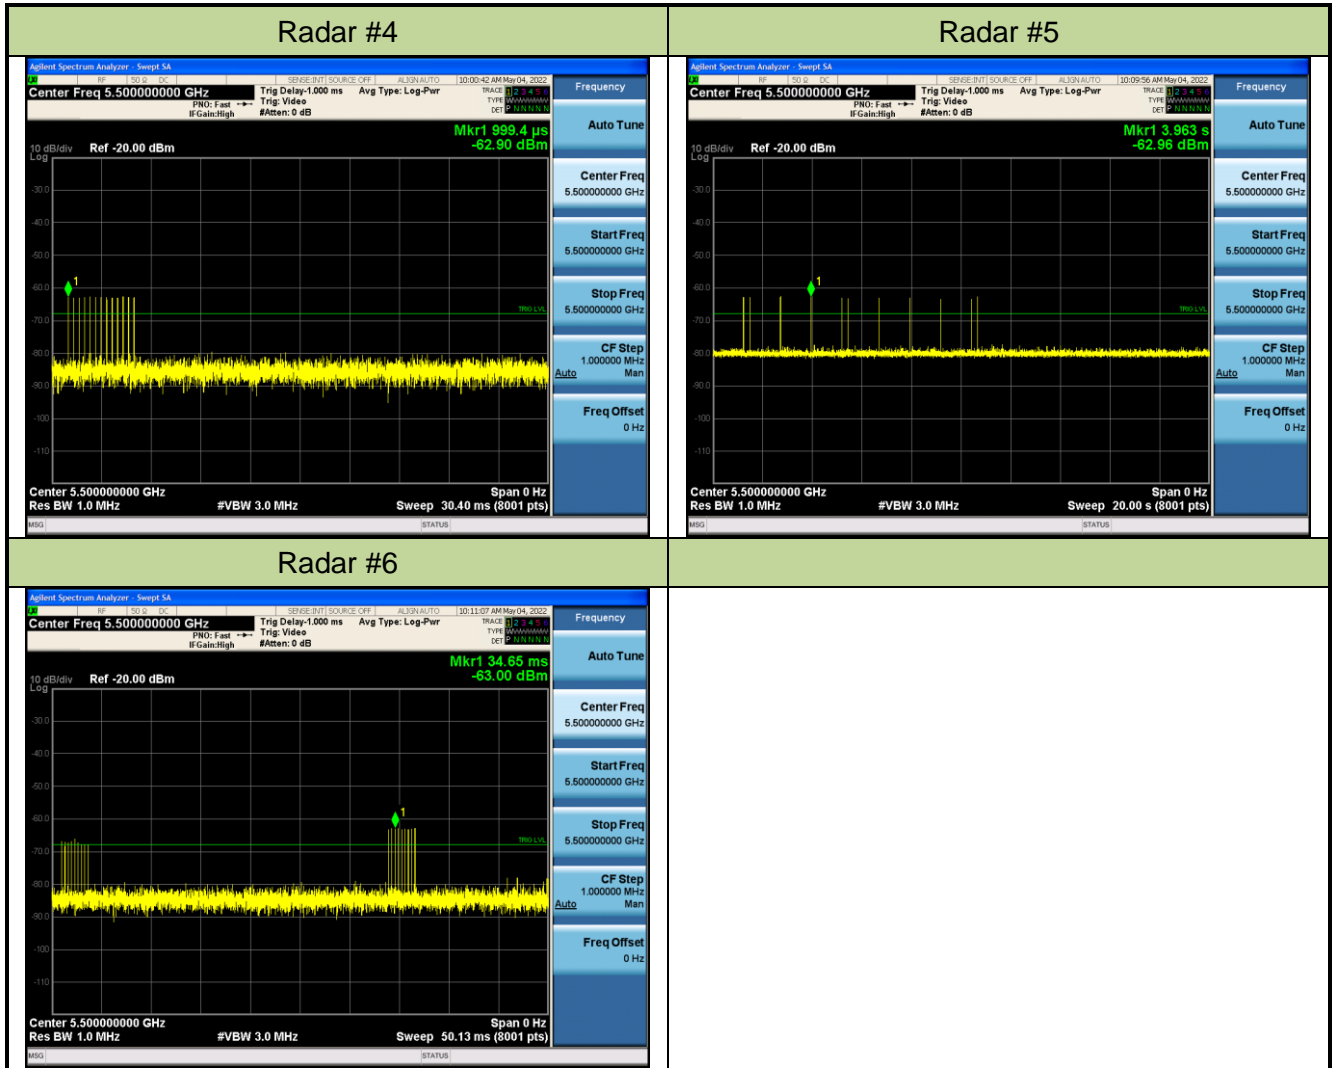

### 5.2.4. Channel Loading Test Result

|               |                               |                   |          |
|---------------|-------------------------------|-------------------|----------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router | Temperature       | 25°C     |
| Test Engineer | Peter                         | Relative Humidity | 65%      |
| Test Site     | SR5                           | Test Date         | 2022/5/4 |
| Test Item     | Channel Loading               |                   |          |

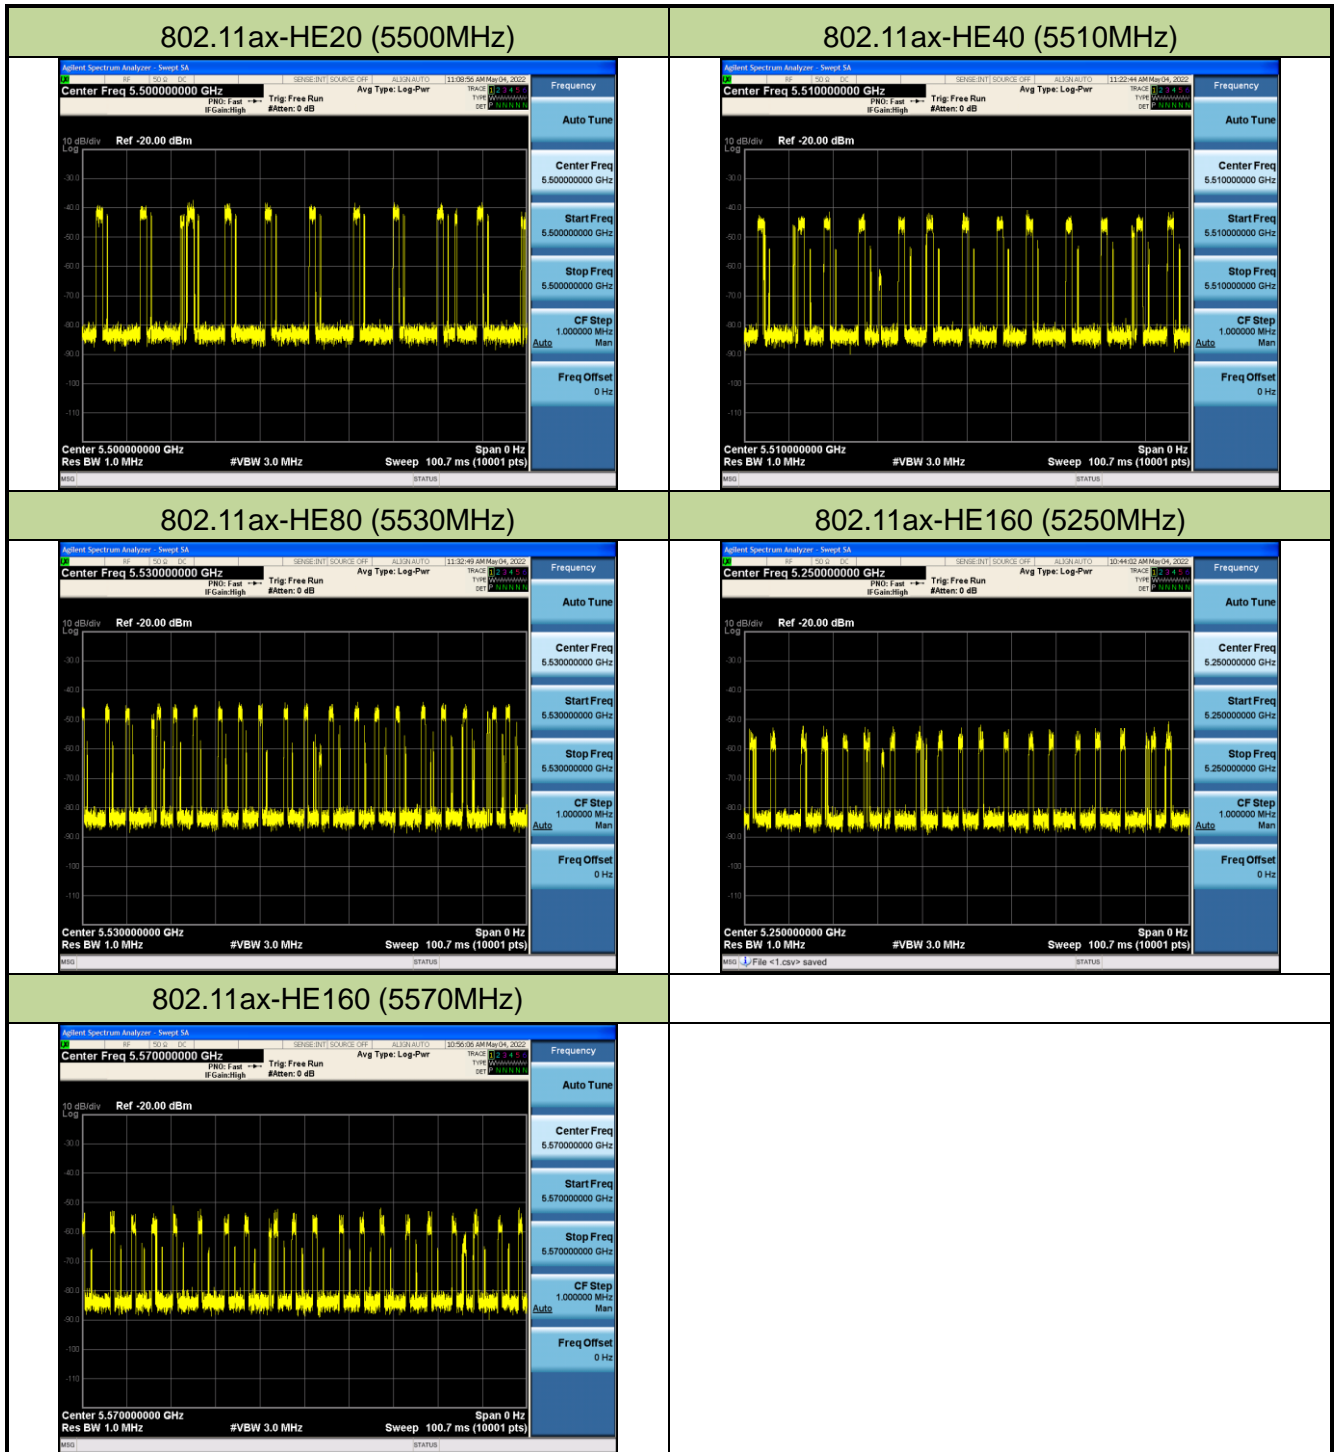

| Test Mode      | Test Frequency | Packet ratio | Requirement ratio | Test Result |
|----------------|----------------|--------------|-------------------|-------------|
| 802.11ax-HE20  | 5500 MHz       | 18%          | ≥ 17%             | Pass        |
| 802.11ax-HE40  | 5510 MHz       | 21%          | ≥ 17%             | Pass        |
| 802.11ax-HE80  | 5530 MHz       | 22%          | ≥ 17%             | Pass        |
| 802.11ax-HE160 | 5250 MHz       | 19%          | ≥ 17%             | Pass        |
| 802.11ax-HE160 | 5570 MHz       | 21%          | ≥ 17%             | Pass        |

Note: System testing was performed with the designated iperf test file. This file is used by IP and Frame based systems for loading the test channel during the In-service compliance testing of the U-NII device. Packet ratio = Time On / (Time On + Off Time).



### 5.3. UNII Detection Bandwidth Measurement

#### 5.3.1. Test Limit

Minimum 100% of the UNII 99% transmission power bandwidth. During the U-NII Detection Bandwidth detection test, each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

#### 5.3.2. Test Procedure

1. Adjust the equipment to produce a single Burst of any one of the Short Pulse Radar Types 0-4 in Table 3-5 at the center frequency of the EUT Operating Channel at the specified DFS Detection Threshold level.
2. The generating equipment is configured as shown in the Conducted Test Setup above section 3.5.
3. The EUT is set up as a stand-alone device (no associated Client or Master, as appropriate) and no traffic. Frame based systems will be set to a talk/listen ratio reflecting the worst case (maximum) that is user configurable during this test.
4. Generate a single radar Burst, and note the response of the EUT. Repeat for a minimum of 10 trials. The EUT must detect the Radar Waveform using the specified U-NII Detection Bandwidth criterion shown in Table 3-5. In cases where the channel bandwidth may exceed past the DFS band edge on specific channels (i.e., 802.11ac or wideband frame based systems) select a channel that has the entire emission bandwidth within the DFS band. If this is not possible, test the detection BW to the DFS band edge.
5. Starting at the center frequency of the UUT operating Channel, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion specified in Table 3-3. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as FH) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies above FH is not required to demonstrate compliance.
6. Starting at the center frequency of the EUT operating Channel, decrease the radar frequency in 1 MHz steps, repeating the above item 4 test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion. Record the lowest frequency (denote as FL) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies below FL is not required to demonstrate compliance.
7. The U-NII Detection Bandwidth is calculated as follows:  $U\text{-NII Detection Bandwidth} = FH - FL$
8. The U-NII Detection Bandwidth must be at least 100% of the EUT transmitter 99% power, otherwise, the EUT does not comply with DFS requirements.

### 5.3.3. Test Result

|               |  |                   |          |
|---------------|--|-------------------|----------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                      | Temperature       | 25 °C    |
| Test Engineer | Peter  | Relative Humidity | 55 %     |
| Test Site     | SR5  | Test Date         | 2022/5/5 |
| Test Item     | Detection Bandwidth (802.11ax-HE20 mode - 5500MHz) |                   |          |

| Radar Frequency<br>(MHz) | DFS Detection Trials (1=Detection, 0= No Detection) |   |   |   |   |   |   |   |   |    | Detection Rate (%) |
|--------------------------|---|---|---|---|---|---|---|---|---|----|--------------------|
|                          | 1   | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |                    |
| 5490                     | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5491 FL                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5492                     | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5493                     | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5494                     | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5495                     | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5500                     | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5505                     | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5506                     | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5507                     | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5508                     | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5509 FH                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5510                     | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5500MHz. The 99% channel bandwidth is 17.57MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = FH - FL = 5509MHz – 5491MHz = 18MHz

Note 3: NII Detection Bandwidth Min. Limit (MHz): 17.57MHz x 100% = 17.57MHz.



|               |  |                   |          |
|---------------|--|-------------------|----------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                      | Temperature       | 25 °C    |
| Test Engineer | Peter  | Relative Humidity | 55 %     |
| Test Site     | SR5  | Test Date         | 2022/5/5 |
| Test Item     | Detection Bandwidth (802.11ax-HE40 mode - 5510MHz) |                   |          |

| Radar Frequency (MHz) | DFS Detection Trials (1=Detection, 0= No Detection) |   |   |   |   |   |   |   |   |    | Detection Rate (%) |
|-----------------------|---|---|---|---|---|---|---|---|---|----|--------------------|
|                       | 1   | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |                    |
| 5490                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5491 FL               | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5492                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5493                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5494                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5495                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5500                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5505                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5510                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5515                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5520                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5525                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5526                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5527                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5528                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5529 FH               | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5530                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5510MHz. The 99% channel bandwidth is 36.11MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = FH - FL = 5529MHz - 5491MHz = 38MHz.

Note 3: NII Detection Bandwidth Min. Limit (MHz): 36.11MHz x 100% = 36.11MHz.



|               |  |                   |          |
|---------------|--|-------------------|----------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                      | Temperature       | 25 °C    |
| Test Engineer | Peter  | Relative Humidity | 55 %     |
| Test Site     | SR5  | Test Date         | 2022/5/5 |
| Test Item     | Detection Bandwidth (802.11ax-HE80 mode - 5530MHz) |                   |          |

| Radar Frequency (MHz) | DFS Detection Trials (1=Detection, 0= No Detection) |   |   |   |   |   |   |   |   |    | Detection Rate (%) |
|-----------------------|---|---|---|---|---|---|---|---|---|----|--------------------|
|                       | 1   | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |                    |
| 5490                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5491 FL               | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5492                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5493                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5494                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5495                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5500                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5505                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5510                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5515                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5520                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5525                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5530                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5535                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5540                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5545                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5550                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5555                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5560                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5565                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5566                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5567                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5568                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5569 FH               | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5570                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5530MHz. The 99% channel bandwidth is 75.36MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = FH - FL = 5569MHz - 5491MHz = 78MHz.

Note 3: NII Detection Bandwidth Min. Limit (MHz): 75.36MHz x 100% = 75.36MHz.



|               |  |                   |          |
|---------------|--|-------------------|----------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                      | Temperature       | 25 °C    |
| Test Engineer | Peter  | Relative Humidity | 55 %     |
| Test Site     | SR5  | Test Date         | 2022/5/5 |
| Test Item     | Detection Bandwidth (802.11ax-H160 mode - 5250MHz) |                   |          |

| Radar Frequency (MHz) | DFS Detection Trials (1=Detection, 0= No Detection) |   |   |   |   |   |   |   |   |    | Detection Rate (%) |
|-----------------------|---|---|---|---|---|---|---|---|---|----|--------------------|
|                       | 1   | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |                    |
| 5249                  | 0   | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0  | 0%                 |
| 5250 FL               | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5251                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5252                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5253                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5254                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5255                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5260                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5265                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5270                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5275                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5280                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5285                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5290                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5295                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5300                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5305                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5310                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5315                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5320                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5325                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5326                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5327                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5328FH                | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5329                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5250MHz. The 99% channel bandwidth is 154.49MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = FH - FL = 5328MHz - 5250MHz = 78MHz.

Note 3: NII Detection Bandwidth Min. Limit (MHz): 154.49MHz x 100% / 2 = 77.25MHz.



|               |   |                   |          |
|---------------|---|-------------------|----------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                       | Temperature       | 25 °C    |
| Test Engineer | Peter   | Relative Humidity | 55 %     |
| Test Site     | SR5   | Test Date         | 2022/5/5 |
| Test Item     | Detection Bandwidth (802.11ax-HE160 mode - 5570MHz) |                   |          |

| Radar Frequency (MHz) | DFS Detection Trials (1=Detection, 0= No Detection) |   |   |   |   |   |   |   |   |    | Detection Rate (%) |
|-----------------------|---|---|---|---|---|---|---|---|---|----|--------------------|
|                       | 1   | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |                    |
| 5490                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5491 FL               | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5492                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5493                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5494                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5495                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5500                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5505                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5510                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5515                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5520                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5525                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5530                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5535                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5540                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5545                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5550                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5555                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5560                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5565                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5570                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5575                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5580                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5585                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5590                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5595                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5600                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5605                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5610                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5615                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |
| 5620                  | 1   | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1  | 100%               |

|         |   |   |   |   |   |   |   |   |   |   |      |
|---------|---|---|---|---|---|---|---|---|---|---|------|
| 5625    | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5630    | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5635    | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5640    | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5645    | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5646    | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5647    | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5648    | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5649 FH | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |
| 5650    | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 100% |

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5530MHz. The 99% channel bandwidth is 155.13MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = FH - FL = 5649MHz - 5491MHz = 158MHz.

Note 3: NII Detection Bandwidth Min. Limit (MHz): 155.13MHz x 100% = 155.13MHz.

## **5.4. Initial Channel Availability Check Time Measurement**

### **5.4.1. Test Limit**

The EUT shall perform a Channel Availability Check to ensure that there is no radar operating on the channel. After power-up sequence, receive at least 1 minute on the intended operating frequency.

### **5.4.2. Test Procedure**


1. The U-NII devices will be powered on and be instructed to operate on the appropriate U-NII Channel that must incorporate DFS functions. At the same time the EUT is powered on, the spectrum analyzer will be set to zero span mode with a 3 MHz RBW and 3 MHz VBW on the Channel occupied by the radar (Chr) with a 2.5 minute sweep time. The spectrum analyzer's sweep will be started at the same time power is applied to the U-NII device.
2. The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.
3. Confirm that the EUT initiates transmission on the channel. Measurement system showing its nominal noise floor is marker1.



### 5.4.3. Test Result

|               |  |                   |          |
|---------------|--|-------------------|----------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router  | Temperature       | 25°C     |
| Test Engineer | Peter  | Relative Humidity | 65%      |
| Test Site     | SR5  | Test Date         | 2022/5/4 |
| Test Item     | Initial Channel Availability Check Time (802.11ax-HE20 mode - 5500MHz) |                   |          |

#### Initial Channel Availability Check Time

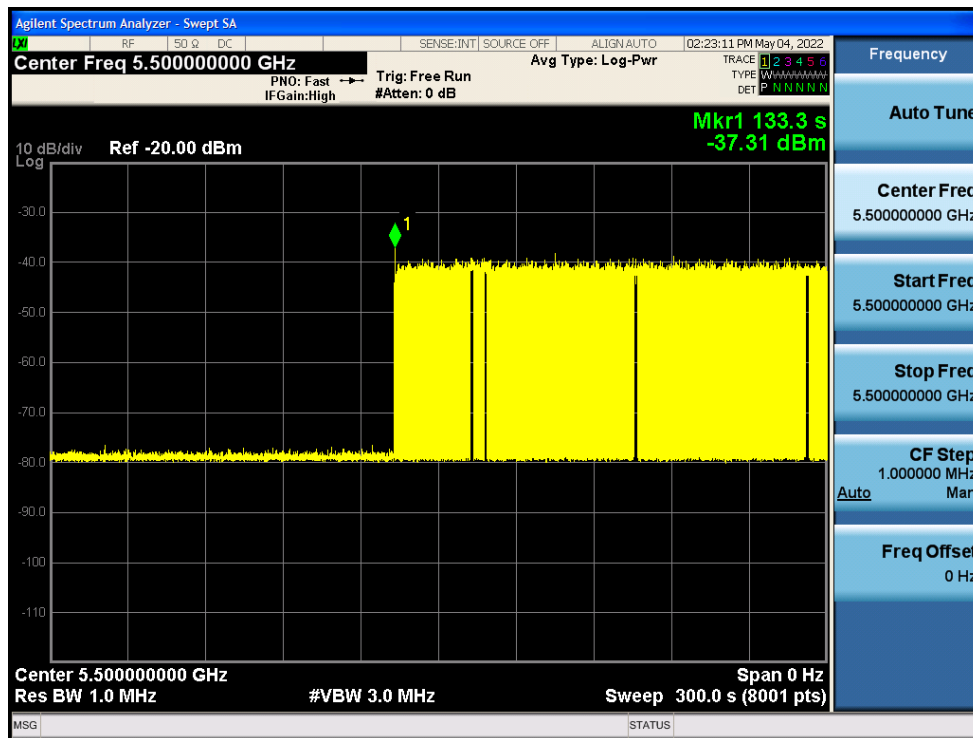

Note: The EUT does not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle (73.3 sec). Initial beacons/data transmissions are indicated by marker 1 (133.3 sec).

## **5.5. Radar Burst at the Beginning of the Channel Availability Check Time Measurement**

### **5.5.1. Test Limit**

In beginning of the Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC on that channel.


### **5.5.2. Test Procedure**

1. The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time.
2. The EUT is in completion power-up cycle (from T0 to T1). T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds. A single Burst of one of Short Pulse Radar Types 0-4 at DFS Detection Threshold + 1 dB will commence within a 6 second window starting at T1.
3. Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions will continue for 2.5 minutes after the radar Burst has been generated. Verify that during the 2.5 minutes measurement window no EUT transmissions occurred.

### 5.5.3. Test Result

|               |   |                   |          |
|---------------|---|-------------------|----------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router   | Temperature       | 25°C     |
| Test Engineer | Peter   | Relative Humidity | 65%      |
| Test Site     | SR5   | Test Date         | 2022/5/4 |
| Test Item     | Beginning of the Channel Availability Check Time (802.11ax-HE20 mode - 5500MHz) |                   |          |

#### Beginning of the Channel Availability Check Time

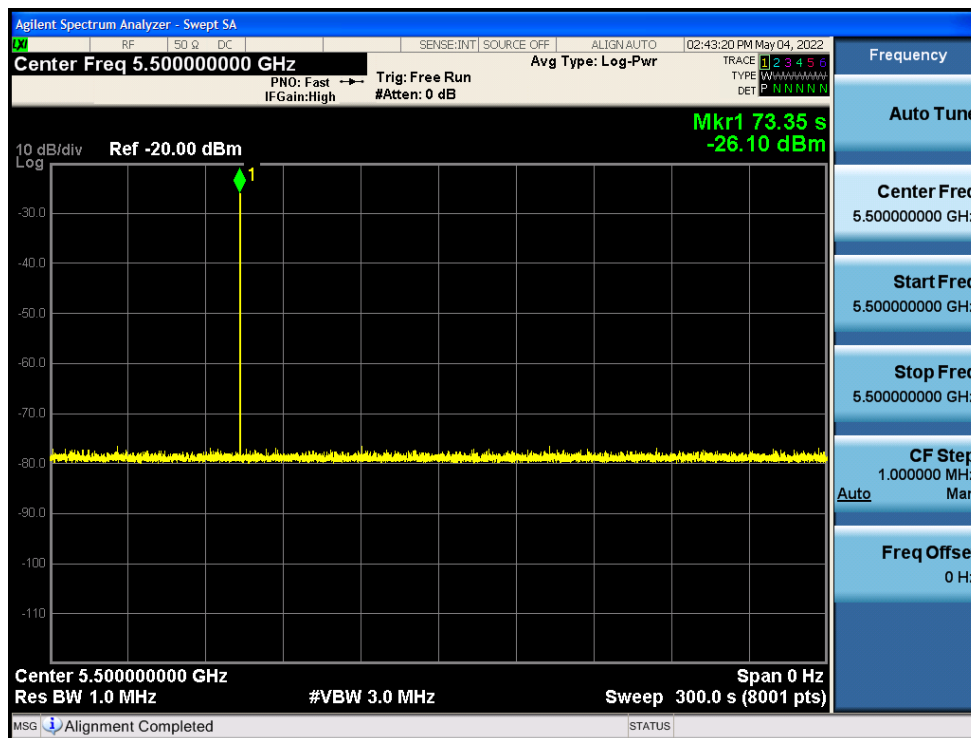

## **5.6. Radar Burst at the End of the Channel Availability Check Time Measurement**

### **5.6.1. Test Limit**


In the end of Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC on that channel.

### **5.6.2. Test Procedure**

1. The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time.
2. The EUT is powered on at T0. T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds. A single Burst of one of Short Pulse Radar Types 0-4 at DFS Detection Threshold + 1 dB will commence within a 6 second window starting at T1+ 54 seconds.
3. Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions will continue for 2.5 minutes after the radar Burst has been generated. Verify that during the 2.5 minutes measurement window no EUT transmissions occurred.

### 5.6.3. Test Result

|               |   |                   |          |
|---------------|---|-------------------|----------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router   | Temperature       | 25°C     |
| Test Engineer | Peter   | Relative Humidity | 65%      |
| Test Site     | SR5   | Test Date         | 2022/5/4 |
| Test Item     | End of the Channel Availability Check Time (802.11ax-HE20 mode - 5500MHz) |                   |          |

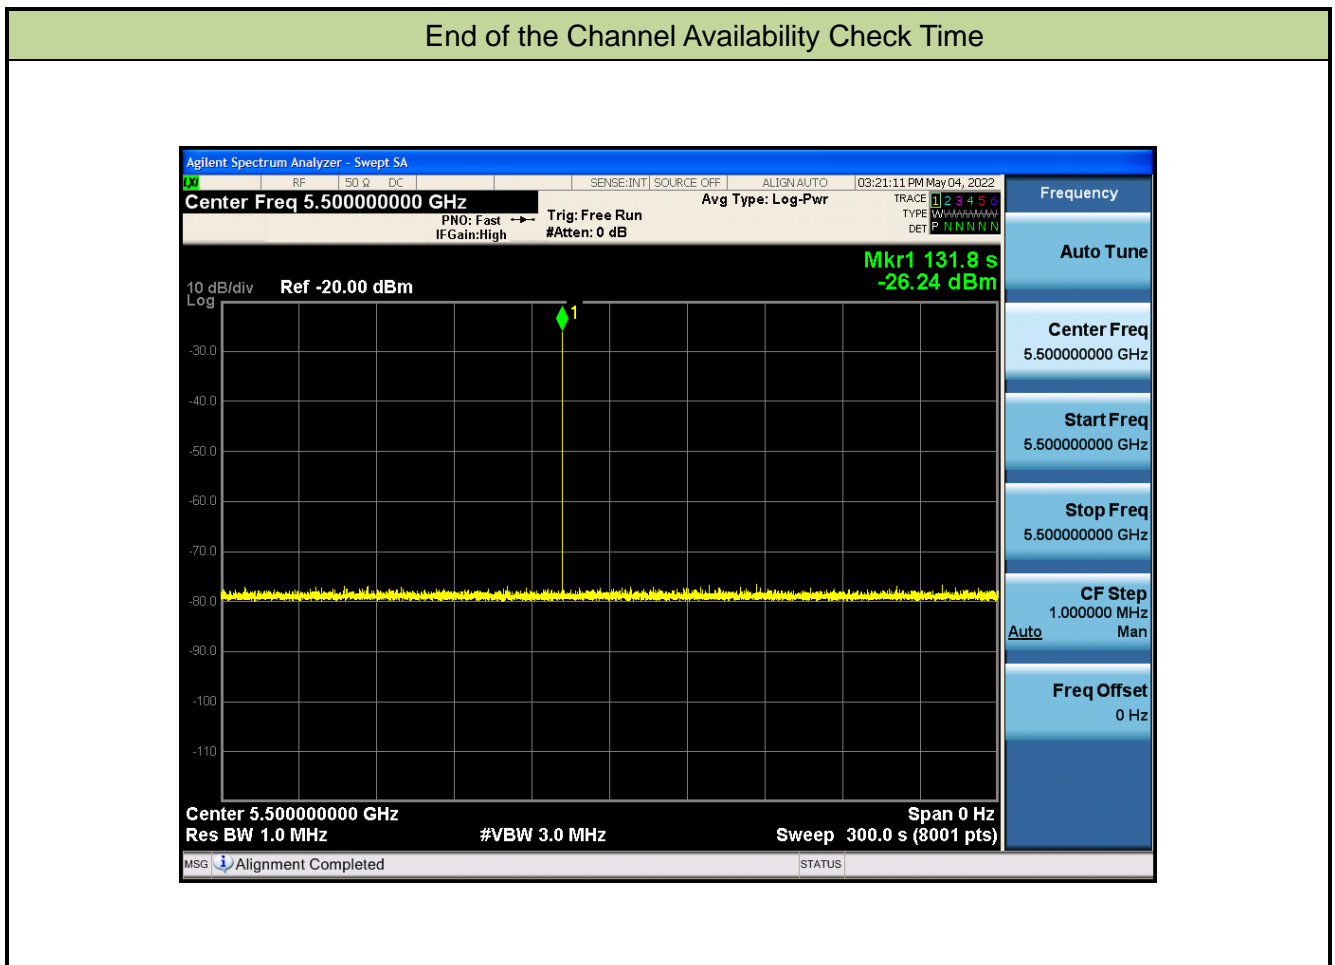

## **5.7. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Measurement**

### **5.7.1. Test Limit**

The EUT has In-Service Monitoring function to continuously monitor the radar signals. If the radar is detected, must leave the channel (Shutdown). The Channel Move Time to cease all transmissions on the current channel upon detection of a Radar Waveform above the DFS Detection Threshold within 10 sec. The total duration of Channel Closing Transmission Time is 260ms, consisting of data signals and the aggregate of control signals, by a U-NII device during the Channel Move Time. The Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.



### **5.7.2. Test Procedure Used**

1. The test should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0.
2. When the radar burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the U-NII device. A U-NII device operating as a Master Device will associate with the Client Device at Channel. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test. At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at Detection Threshold + 1dB.
3. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the EUT during the observation time (Channel Move Time).
4. Measurement of the aggregate duration of the Channel Closing Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by:  $Dwell (1.5ms) = S (12 \text{ sec}) / B (8000)$ ; where Dwell is the dwell time per spectrum analyzer sampling bin, S is the sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by:  $C = N \times Dwell$ ; where C is the Closing Time, N is the number of spectrum analyzer sampling bins showing a U-NII transmission and Dwell is the dwell time per bin.
5. Measure the EUT for more than 30 minutes following the channel close/move time to verify that the EUT does not resume any transmissions on this Channel.


### 5.7.3. Test Result

|               |   |                   |                     |
|---------------|---|-------------------|---------------------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router   | Temperature       | 25°C                |
| Test Engineer | Peter   | Relative Humidity | 65%                 |
| Test Site     | SR5   | Test Date         | 2022/5/4~ 2022/5/10 |
| Test Item     | Channel Move Time and Channel Closing Transmission Time (802.11ax-HE160 mode - 5250MHz) |                   |                     |

#### Channel Move Time and Channel Closing Transmission Time

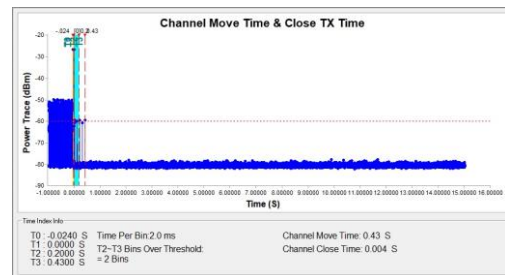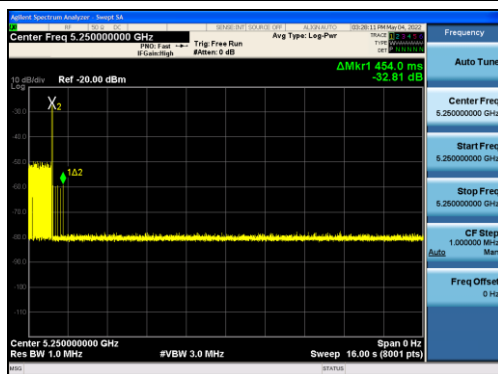

#### Non-Occupancy Period

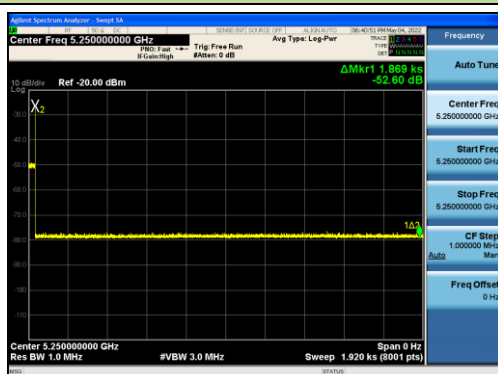


| Parameter  | Test Result | Limit    |
|--|-------------|----------|
|  | Type 0      |          |
| Channel Move Time (s)                            | 0.43s       | <10s     |
| Channel Closing Transmission Time (ms)<br>(Note) | 4ms         | < 60ms   |
| Non-Occupancy Period (min)                       | ≥ 30min     | ≥ 30 min |


Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

|               |   |                   |                     |
|---------------|---|-------------------|---------------------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router   | Temperature       | 25°C                |
| Test Engineer | Peter   | Relative Humidity | 65%                 |
| Test Site     | SR5   | Test Date         | 2022/5/4~ 2022/5/10 |
| Test Item     | Channel Move Time and Channel Closing Transmission Time (802.11ax-HE160 mode - 5570MHz) |                   |                     |

### Channel Move Time and Channel Closing Transmission Time

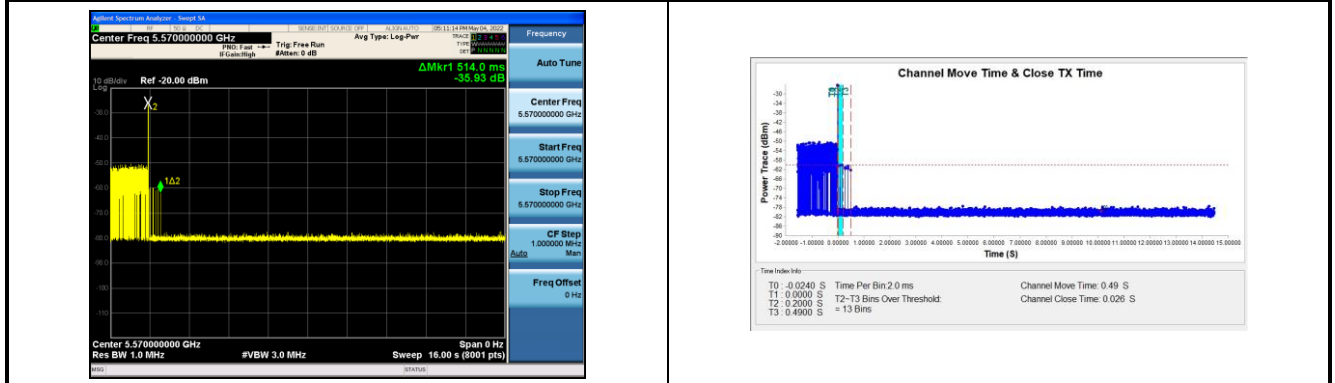

### Non-Occupancy Period

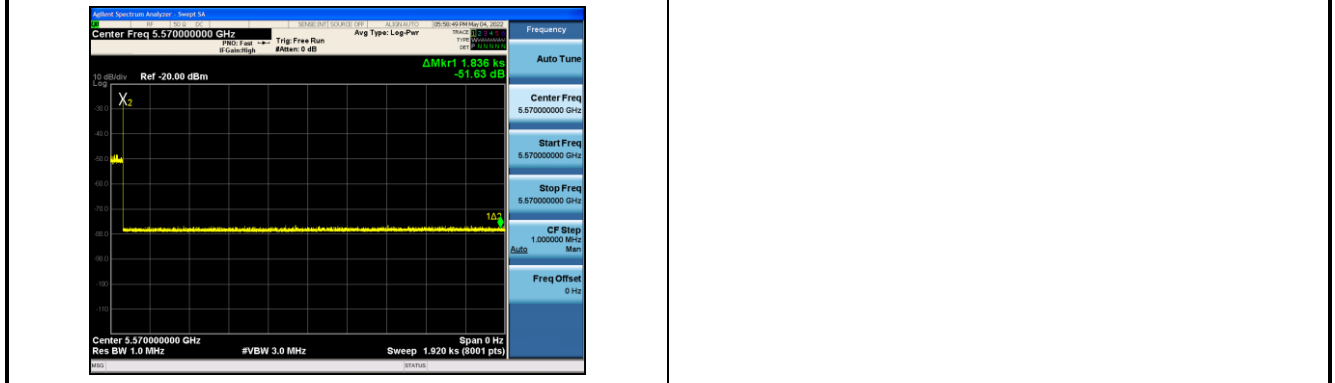

| Parameter  | Test Result | Limit    |
|--|-------------|----------|
|  | Type 0      |          |
| Channel Move Time (s)                            | 0.49s       | <10s     |
| Channel Closing Transmission Time (ms)<br>(Note) | 26ms        | < 60ms   |
| Non-Occupancy Period (min)                       | ≥ 30min     | ≥ 30 min |

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.



## 5.8. Statistical Performance Check Measurement

### 5.8.1. Test Limit

The minimum percentage of successful detection requirements found in below table when a radar burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the U-NII device (In- Service Monitoring).

| Radar Type                  | Minimum Number of Trails          | Detection Probability |
|-----------------------------|-----------------------------------|-----------------------|
| 0                           | 30                                | Pd > 60%              |
| 1                           | 30(15 of test A and 15 of test B) | Pd > 60%              |
| 2                           | 30                                | Pd > 60%              |
| 3                           | 30                                | Pd > 60%              |
| 4                           | 30                                | Pd > 60%              |
| Aggregate (Radar Types 1-4) | 120                               | Pd > 80%              |
| 5                           | 30                                | Pd > 80%              |
| 6                           | 30                                | Pd > 70%              |

The percentage of successful detection is calculated by:

$(\text{Total Waveform Detections} / \text{Total Waveform Trails}) * 100 = \text{Probability of Detection Radar}$

Waveform In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows:  $(Pd1 + Pd2 + Pd3 + Pd4) / 4$ .

### 5.8.2. Test Procedure

1. Stream the MPEG test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
2. At time T0 the Radar Waveform generator sends the individual waveform for each of the Radar Types 1-6, at levels equal to the DFS Detection Threshold + 1dB, on the Operating Channel.
3. Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types 0 to ensure detection occurs.
4. Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.
5. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.
6. The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in below table.

### 5.8.3. Test Result

|               |   |                   |            |
|---------------|---|-------------------|------------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                                 | Temperature       | 22°C       |
| Test Engineer | Peter   | Relative Humidity | 60%        |
| Test Site     | SR5   | Test Date         | 2022/05/07 |
| Test Item     | Radar Statistical Performance Check (802.11ax-HE20 – 5500MHz) |                   |            |

#### Radar Type 1-4 - Radar Statistical Performance

| Trial | Frequency<br>(MHz) | 1=Detection, 0=No Detection |              |              |              |
|-------|--------------------|-----------------------------|--------------|--------------|--------------|
|       |                    | Radar Type 1                | Radar Type 2 | Radar Type 3 | Radar Type 4 |
| 0     | 5490.4             | 1                           | 1            | 1            | 1            |
| 1     | 5491.1             | 1                           | 1            | 1            | 1            |
| 2     | 5491.7             | 1                           | 1            | 1            | 1            |
| 3     | 5492.4             | 1                           | 0            | 1            | 1            |
| 4     | 5493.1             | 1                           | 1            | 1            | 1            |
| 5     | 5493.7             | 1                           | 1            | 0            | 1            |
| 6     | 5494.4             | 1                           | 1            | 1            | 1            |
| 7     | 5495.0             | 1                           | 1            | 1            | 1            |
| 8     | 5495.7             | 1                           | 1            | 1            | 1            |
| 9     | 5496.4             | 1                           | 1            | 1            | 1            |
| 10    | 5497.0             | 1                           | 1            | 0            | 1            |
| 11    | 5497.7             | 1                           | 1            | 1            | 1            |
| 12    | 5498.4             | 1                           | 1            | 1            | 1            |
| 13    | 5499.0             | 1                           | 0            | 1            | 1            |
| 14    | 5499.7             | 1                           | 1            | 1            | 1            |
| 15    | 5500.0             | 1                           | 1            | 1            | 1            |
| 16    | 5500.7             | 1                           | 1            | 1            | 0            |
| 17    | 5501.3             | 1                           | 0            | 0            | 1            |
| 18    | 5502.0             | 1                           | 1            | 0            | 0            |
| 19    | 5502.7             | 1                           | 1            | 1            | 1            |
| 20    | 5503.3             | 1                           | 1            | 1            | 1            |
| 21    | 5504.0             | 1                           | 1            | 1            | 1            |
| 22    | 5504.6             | 1                           | 1            | 1            | 1            |
| 23    | 5505.3             | 1                           | 1            | 1            | 0            |
| 24    | 5506.0             | 1                           | 1            | 0            | 1            |
| 25    | 5506.6             | 1                           | 1            | 1            | 1            |
| 26    | 5507.3             | 1                           | 1            | 0            | 1            |



| Trial        | Frequency | 1=Detection,<br>0=No Detection | Trial | Frequency | 1=Detection,<br>0=No Detection |
|--------------|-----------|--------------------------------|-------|-----------|--------------------------------|
| 27           | 5508.0    | 1                              | 1     | 1         | 1                              |
| 28           | 5508.6    | 1                              | 1     | 1         | 1                              |
| 29           | 5509.6    | 1                              | 1     | 1         | 0                              |
| Probability: |           | 100%                           | 90%   | 83.3%     | 86.7%                          |
| Type1-4      |           | 90% (>80%)                     |       |           |                                |

Radar Type 1 - Radar Waveform

|          | Trial Id | Radar Type | Pulse Width (us) | PRI (us) | Number of Pulses | Waveform Length (us) |
|----------|----------|------------|------------------|----------|------------------|----------------------|
| Download | 0        | Type 1     | 1.0              | 3066.0   | 18               | 55188.0              |
| Download | 1        | Type 1     | 1.0              | 638.0    | 83               | 52954.0              |
| Download | 2        | Type 1     | 1.0              | 738.0    | 72               | 53136.0              |
| Download | 3        | Type 1     | 1.0              | 518.0    | 102              | 52836.0              |
| Download | 4        | Type 1     | 1.0              | 538.0    | 99               | 53262.0              |
| Download | 5        | Type 1     | 1.0              | 898.0    | 59               | 52982.0              |
| Download | 6        | Type 1     | 1.0              | 658.0    | 81               | 53298.0              |
| Download | 7        | Type 1     | 1.0              | 618.0    | 86               | 53148.0              |
| Download | 8        | Type 1     | 1.0              | 578.0    | 92               | 53176.0              |
| Download | 9        | Type 1     | 1.0              | 678.0    | 78               | 52884.0              |
| Download | 10       | Type 1     | 1.0              | 758.0    | 70               | 53060.0              |
| Download | 11       | Type 1     | 1.0              | 878.0    | 61               | 53558.0              |
| Download | 12       | Type 1     | 1.0              | 798.0    | 67               | 53466.0              |
| Download | 13       | Type 1     | 1.0              | 718.0    | 74               | 53132.0              |
| Download | 14       | Type 1     | 1.0              | 938.0    | 57               | 53466.0              |
| Download | 15       | Type 1     | 1.0              | 1965.0   | 27               | 53055.0              |
| Download | 16       | Type 1     | 1.0              | 1672.0   | 32               | 53504.0              |
| Download | 17       | Type 1     | 1.0              | 2163.0   | 25               | 54075.0              |
| Download | 18       | Type 1     | 1.0              | 1631.0   | 33               | 53823.0              |
| Download | 19       | Type 1     | 1.0              | 1163.0   | 46               | 53498.0              |
| Download | 20       | Type 1     | 1.0              | 1865.0   | 29               | 54085.0              |
| Download | 21       | Type 1     | 1.0              | 2629.0   | 21               | 55209.0              |
| Download | 22       | Type 1     | 1.0              | 1658.0   | 32               | 53056.0              |
| Download | 23       | Type 1     | 1.0              | 2982.0   | 18               | 53676.0              |
| Download | 24       | Type 1     | 1.0              | 2237.0   | 24               | 53688.0              |
| Download | 25       | Type 1     | 1.0              | 613.0    | 87               | 53331.0              |
| Download | 26       | Type 1     | 1.0              | 2289.0   | 24               | 54936.0              |
| Download | 27       | Type 1     | 1.0              | 1568.0   | 34               | 53312.0              |
| Download | 28       | Type 1     | 1.0              | 1720.0   | 31               | 53320.0              |
| Download | 29       | Type 1     | 1.0              | 1129.0   | 47               | 53063.0              |

## Radar Type 2 - Radar Waveform

|          | Trial Id | Radar Type | Pulse Width (us) | PRI (us) | Number of Pulses | Waveform Length (us) |
|----------|----------|------------|------------------|----------|------------------|----------------------|
| Download | 0        | Type 2     | 1.2              | 227.0    | 23               | 5221.0               |
| Download | 1        | Type 2     | 4.0              | 155.0    | 28               | 4340.0               |
| Download | 2        | Type 2     | 2.1              | 176.0    | 25               | 4400.0               |
| Download | 3        | Type 2     | 3.8              | 211.0    | 27               | 5697.0               |
| Download | 4        | Type 2     | 4.8              | 150.0    | 29               | 4350.0               |
| Download | 5        | Type 2     | 3.9              | 167.0    | 27               | 4509.0               |
| Download | 6        | Type 2     | 4.9              | 152.0    | 29               | 4408.0               |
| Download | 7        | Type 2     | 2.7              | 203.0    | 26               | 5278.0               |
| Download | 8        | Type 2     | 2.0              | 229.0    | 24               | 5496.0               |
| Download | 9        | Type 2     | 3.9              | 165.0    | 27               | 4455.0               |
| Download | 10       | Type 2     | 4.0              | 228.0    | 28               | 6384.0               |
| Download | 11       | Type 2     | 2.4              | 221.0    | 25               | 5525.0               |
| Download | 12       | Type 2     | 2.2              | 223.0    | 25               | 5575.0               |
| Download | 13       | Type 2     | 2.9              | 214.0    | 26               | 5564.0               |
| Download | 14       | Type 2     | 4.9              | 207.0    | 29               | 6003.0               |
| Download | 15       | Type 2     | 1.8              | 230.0    | 24               | 5520.0               |
| Download | 16       | Type 2     | 1.5              | 170.0    | 24               | 4080.0               |
| Download | 17       | Type 2     | 2.5              | 159.0    | 25               | 3975.0               |
| Download | 18       | Type 2     | 4.7              | 183.0    | 29               | 5307.0               |
| Download | 19       | Type 2     | 3.3              | 174.0    | 26               | 4524.0               |
| Download | 20       | Type 2     | 3.1              | 216.0    | 26               | 5616.0               |
| Download | 21       | Type 2     | 3.3              | 197.0    | 27               | 5319.0               |
| Download | 22       | Type 2     | 4.3              | 199.0    | 28               | 5572.0               |
| Download | 23       | Type 2     | 1.7              | 186.0    | 24               | 4464.0               |
| Download | 24       | Type 2     | 2.1              | 192.0    | 24               | 4608.0               |
| Download | 25       | Type 2     | 2.3              | 164.0    | 25               | 4100.0               |
| Download | 26       | Type 2     | 4.0              | 166.0    | 28               | 4648.0               |
| Download | 27       | Type 2     | 1.0              | 179.0    | 23               | 4117.0               |
| Download | 28       | Type 2     | 2.4              | 177.0    | 25               | 4425.0               |
| Download | 29       | Type 2     | 1.7              | 162.0    | 24               | 3888.0               |

## Radar Type 3 - Radar Waveform

|          | Trial Id | Radar Type | Pulse Width (us) | PRI (us) | Number of Pulses | Waveform Length (us) |
|----------|----------|------------|------------------|----------|------------------|----------------------|
| Download | 0        | Type 3     | 6.2              | 462.0    | 16               | 7392.0               |
| Download | 1        | Type 3     | 9.0              | 265.0    | 18               | 4770.0               |
| Download | 2        | Type 3     | 7.1              | 442.0    | 16               | 7072.0               |
| Download | 3        | Type 3     | 8.8              | 278.0    | 18               | 5004.0               |
| Download | 4        | Type 3     | 9.8              | 233.0    | 18               | 4194.0               |
| Download | 5        | Type 3     | 8.9              | 311.0    | 18               | 5598.0               |
| Download | 6        | Type 3     | 9.9              | 306.0    | 18               | 5508.0               |
| Download | 7        | Type 3     | 7.7              | 477.0    | 17               | 8109.0               |
| Download | 8        | Type 3     | 7.0              | 368.0    | 16               | 5888.0               |
| Download | 9        | Type 3     | 8.9              | 205.0    | 18               | 3690.0               |
| Download | 10       | Type 3     | 9.0              | 377.0    | 18               | 6786.0               |
| Download | 11       | Type 3     | 7.4              | 293.0    | 17               | 4981.0               |
| Download | 12       | Type 3     | 7.2              | 246.0    | 16               | 3936.0               |
| Download | 13       | Type 3     | 7.9              | 385.0    | 17               | 6545.0               |
| Download | 14       | Type 3     | 9.9              | 271.0    | 18               | 4878.0               |
| Download | 15       | Type 3     | 6.8              | 277.0    | 16               | 4432.0               |
| Download | 16       | Type 3     | 6.5              | 262.0    | 16               | 4192.0               |
| Download | 17       | Type 3     | 7.5              | 478.0    | 17               | 8126.0               |
| Download | 18       | Type 3     | 9.7              | 313.0    | 18               | 5634.0               |
| Download | 19       | Type 3     | 8.3              | 228.0    | 17               | 3876.0               |
| Download | 20       | Type 3     | 8.1              | 499.0    | 17               | 8483.0               |
| Download | 21       | Type 3     | 8.3              | 208.0    | 17               | 3536.0               |
| Download | 22       | Type 3     | 9.3              | 247.0    | 18               | 4446.0               |
| Download | 23       | Type 3     | 6.7              | 261.0    | 16               | 4176.0               |
| Download | 24       | Type 3     | 7.1              | 219.0    | 16               | 3504.0               |
| Download | 25       | Type 3     | 7.3              | 389.0    | 17               | 6613.0               |
| Download | 26       | Type 3     | 9.0              | 421.0    | 18               | 7578.0               |
| Download | 27       | Type 3     | 6.0              | 300.0    | 16               | 4800.0               |
| Download | 28       | Type 3     | 7.4              | 460.0    | 17               | 7820.0               |
| Download | 29       | Type 3     | 6.7              | 470.0    | 16               | 7520.0               |

## Radar Type 4 - Radar Waveform

|          | Trial Id | Radar Type | Pulse Width (us) | PRI (us) | Number of Pulses | Waveform Length (us) |
|----------|----------|------------|------------------|----------|------------------|----------------------|
| Download | 0        | Type 4     | 11.5             | 462.0    | 12               | 5544.0               |
| Download | 1        | Type 4     | 17.8             | 265.0    | 15               | 3975.0               |
| Download | 2        | Type 4     | 13.6             | 442.0    | 13               | 5746.0               |
| Download | 3        | Type 4     | 17.4             | 278.0    | 15               | 4170.0               |
| Download | 4        | Type 4     | 19.5             | 233.0    | 16               | 3728.0               |
| Download | 5        | Type 4     | 17.4             | 311.0    | 15               | 4665.0               |
| Download | 6        | Type 4     | 19.7             | 306.0    | 16               | 4896.0               |
| Download | 7        | Type 4     | 14.9             | 477.0    | 14               | 6678.0               |
| Download | 8        | Type 4     | 13.3             | 368.0    | 13               | 4784.0               |
| Download | 9        | Type 4     | 17.4             | 205.0    | 15               | 3075.0               |
| Download | 10       | Type 4     | 17.8             | 377.0    | 15               | 5655.0               |
| Download | 11       | Type 4     | 14.1             | 293.0    | 13               | 3809.0               |
| Download | 12       | Type 4     | 13.8             | 246.0    | 13               | 3198.0               |
| Download | 13       | Type 4     | 15.3             | 385.0    | 14               | 5390.0               |
| Download | 14       | Type 4     | 19.6             | 271.0    | 16               | 4336.0               |
| Download | 15       | Type 4     | 12.9             | 277.0    | 13               | 3601.0               |
| Download | 16       | Type 4     | 12.3             | 262.0    | 12               | 3144.0               |
| Download | 17       | Type 4     | 14.4             | 478.0    | 13               | 6214.0               |
| Download | 18       | Type 4     | 19.2             | 313.0    | 16               | 5008.0               |
| Download | 19       | Type 4     | 16.1             | 228.0    | 14               | 3192.0               |
| Download | 20       | Type 4     | 15.6             | 499.0    | 14               | 6986.0               |
| Download | 21       | Type 4     | 16.2             | 208.0    | 14               | 2912.0               |
| Download | 22       | Type 4     | 18.5             | 247.0    | 16               | 3952.0               |
| Download | 23       | Type 4     | 12.7             | 261.0    | 12               | 3132.0               |
| Download | 24       | Type 4     | 13.4             | 219.0    | 13               | 2847.0               |
| Download | 25       | Type 4     | 14.0             | 389.0    | 13               | 5057.0               |
| Download | 26       | Type 4     | 17.8             | 421.0    | 15               | 6315.0               |
| Download | 27       | Type 4     | 11.1             | 300.0    | 12               | 3600.0               |
| Download | 28       | Type 4     | 14.1             | 460.0    | 13               | 5980.0               |
| Download | 29       | Type 4     | 12.6             | 470.0    | 12               | 5640.0               |



Radar Type 5 - Radar Statistical Performance

| Trail #                  | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection | Trail # | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection |
|--------------------------|---------------------|-------------------------------|---------|---------------------|-------------------------------|
| 0                        | 5500.0              | 1                             | 15      | 5493.0              | 1                             |
| 1                        | 5500.0              | 1                             | 16      | 5493.0              | 1                             |
| 2                        | 5500.0              | 1                             | 17      | 5494.0              | 1                             |
| 3                        | 5500.0              | 1                             | 18      | 5498.0              | 1                             |
| 4                        | 5500.0              | 1                             | 19      | 5496.0              | 1                             |
| 5                        | 5500.0              | 1                             | 20      | 5505.0              | 1                             |
| 6                        | 5500.0              | 1                             | 21      | 5504.0              | 1                             |
| 7                        | 5500.0              | 1                             | 22      | 5503.0              | 1                             |
| 8                        | 5500.0              | 1                             | 23      | 5507.0              | 1                             |
| 9                        | 5500.0              | 1                             | 24      | 5506.0              | 1                             |
| 10                       | 5497.0              | 1                             | 25      | 5506.0              | 1                             |
| 11                       | 5494.0              | 1                             | 26      | 5503.0              | 1                             |
| 12                       | 5494.0              | 1                             | 27      | 5508.0              | 1                             |
| 13                       | 5495.0              | 1                             | 28      | 5506.0              | 1                             |
| 14                       | 5498.0              | 1                             | 29      | 5507.0              | 1                             |
| Detection Percentage (%) |                     |                               |         |                     | 100%                          |

| Type 5 Radar Waveform_0 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 453270.0                | 53.0             | 5                 | 1                          | 1608.0     | -          | -          |
| 815150.0                | 87.6             | 5                 | 3                          | 1527.0     | 1104.0     | 1778.0     |
| 1179952.0               | 64.4             | 5                 | 1                          | 1777.0     | -          | -          |
| 44997.0                 | 85.3             | 5                 | 3                          | 1803.0     | 1536.0     | 1659.0     |
| 407664.0                | 97.1             | 5                 | 3                          | 1760.0     | 1359.0     | 1579.0     |
| 770665.0                | 85.7             | 5                 | 3                          | 1093.0     | 1662.0     | 1277.0     |
| 1132830.0               | 97.9             | 5                 | 3                          | 1457.0     | 1597.0     | 1842.0     |
| 335.0                   | 71.7             | 5                 | 2                          | 1549.0     | 1810.0     | -          |



| Type 5 Radar Waveform_1 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 170913.0                | 62.7             | 17                | 1                          | 1831.0     | -          | -          |
| 340037.0                | 85.5             | 17                | 3                          | 1768.0     | 1669.0     | 1753.0     |
| 510227.0                | 87.6             | 17                | 3                          | 1909.0     | 1051.0     | 1887.0     |
| 681884.0                | 67.2             | 17                | 2                          | 1931.0     | 1232.0     | -          |
| 150043.0                | 65.6             | 17                | 1                          | 1066.0     | -          | -          |
| 320027.0                | 73.7             | 17                | 2                          | 1960.0     | 1204.0     | -          |
| 490265.0                | 97.7             | 17                | 3                          | 1165.0     | 1179.0     | 1097.0     |
| 662015.0                | 60.9             | 17                | 1                          | 1968.0     | -          | -          |
| 128853.0                | 57.2             | 17                | 1                          | 1796.0     | -          | -          |
| 299093.0                | 68.7             | 17                | 2                          | 1095.0     | 1930.0     | -          |
| 468658.0                | 95.5             | 17                | 3                          | 1852.0     | 1237.0     | 1284.0     |
| 640648.0                | 78.5             | 17                | 2                          | 1100.0     | 1239.0     | -          |
| 107620.0                | 75.8             | 17                | 2                          | 1366.0     | 1728.0     | -          |
| 278258.0                | 79.0             | 17                | 2                          | 1106.0     | 1510.0     | -          |
| 448114.0                | 91.5             | 17                | 3                          | 1210.0     | 1389.0     | 1126.0     |
| 620525.0                | 59.6             | 17                | 1                          | 1323.0     | -          | -          |
| 86822.0                 | 63.4             | 17                | 1                          | 1491.0     | -          | -          |

| Type 5 Radar Waveform_2 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 397800.0                | 66.7             | 9                 | 2                          | 1940.0     | 1461.0     | -          |
| 660987.0                | 87.7             | 9                 | 3                          | 1111.0     | 1353.0     | 1871.0     |
| 926735.0                | 51.0             | 9                 | 1                          | 1726.0     | -          | -          |
| 101614.0                | 67.5             | 9                 | 2                          | 1169.0     | 1607.0     | -          |
| 365974.0                | 59.0             | 9                 | 1                          | 1427.0     | -          | -          |
| 628301.0                | 91.9             | 9                 | 3                          | 1694.0     | 1654.0     | 1375.0     |
| 893012.0                | 71.6             | 9                 | 2                          | 1736.0     | 1433.0     | -          |
| 69216.0                 | 59.8             | 9                 | 1                          | 1054.0     | -          | -          |
| 332891.0                | 67.6             | 9                 | 2                          | 2000.0     | 1176.0     | -          |
| 596648.0                | 76.3             | 9                 | 2                          | 1699.0     | 1573.0     | -          |
| 860480.0                | 74.7             | 9                 | 2                          | 1547.0     | 1668.0     | -          |

| Type 5 Radar Waveform_3 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 23640.0                 | 82.0             | 16                | 2                          | 1430.0     | 1640.0     | -          |
| 194285.0                | 67.5             | 16                | 2                          | 1181.0     | 1198.0     | -          |
| 365295.0                | 61.6             | 16                | 1                          | 1630.0     | -          | -          |
| 535002.0                | 67.3             | 16                | 2                          | 1974.0     | 1096.0     | -          |
| 2644.0                  | 75.6             | 16                | 2                          | 1193.0     | 1637.0     | -          |
| 173067.0                | 74.5             | 16                | 2                          | 1715.0     | 1480.0     | -          |
| 343597.0                | 69.2             | 16                | 2                          | 1973.0     | 1004.0     | -          |
| 515441.0                | 59.1             | 16                | 1                          | 1108.0     | -          | -          |
| 682719.0                | 90.7             | 16                | 3                          | 1443.0     | 1479.0     | 1936.0     |
| 152358.0                | 59.6             | 16                | 1                          | 1885.0     | -          | -          |
| 321621.0                | 93.8             | 16                | 3                          | 1859.0     | 1408.0     | 1840.0     |
| 491363.0                | 99.3             | 16                | 3                          | 1993.0     | 1800.0     | 1625.0     |
| 663721.0                | 77.3             | 16                | 2                          | 1077.0     | 1721.0     | -          |
| 130958.0                | 92.0             | 16                | 3                          | 1335.0     | 1381.0     | 1147.0     |
| 301842.0                | 79.3             | 16                | 2                          | 1045.0     | 1367.0     | -          |
| 472789.0                | 60.2             | 16                | 1                          | 1916.0     | -          | -          |
| 643736.0                | 66.4             | 16                | 1                          | 1683.0     | -          | -          |





**Type 5 Radar Waveform\_4**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 93256.0           | 83.7             | 20                | 3                          | 1690.0     | 1528.0     | 1541.0     |
| 238236.0          | 75.3             | 20                | 2                          | 1635.0     | 1584.0     | -          |
| 383261.0          | 74.0             | 20                | 2                          | 1754.0     | 1017.0     | -          |
| 526228.0          | 96.1             | 20                | 3                          | 1703.0     | 1765.0     | 1429.0     |
| 75870.0           | 54.8             | 20                | 1                          | 1636.0     | -          | -          |
| 220345.0          | 71.8             | 20                | 2                          | 1613.0     | 1774.0     | -          |
| 365000.0          | 80.4             | 20                | 2                          | 1943.0     | 1513.0     | -          |
| 508467.0          | 98.1             | 20                | 3                          | 1592.0     | 1902.0     | 1383.0     |
| 57704.0           | 96.9             | 20                | 3                          | 1828.0     | 1553.0     | 1253.0     |
| 203073.0          | 54.2             | 20                | 1                          | 1763.0     | -          | -          |
| 348571.0          | 53.7             | 20                | 1                          | 1065.0     | -          | -          |
| 491024.0          | 93.7             | 20                | 3                          | 1490.0     | 1923.0     | 1057.0     |
| 40105.0           | 66.0             | 20                | 1                          | 1832.0     | -          | -          |
| 185211.0          | 57.4             | 20                | 1                          | 1730.0     | -          | -          |
| 328817.0          | 98.1             | 20                | 3                          | 1791.0     | 1395.0     | 1250.0     |
| 473206.0          | 97.4             | 20                | 3                          | 1823.0     | 1331.0     | 1350.0     |
| 22164.0           | 73.0             | 20                | 2                          | 1862.0     | 1903.0     | -          |
| 166966.0          | 78.9             | 20                | 2                          | 1338.0     | 1724.0     | -          |
| 311181.0          | 89.7             | 20                | 3                          | 1428.0     | 1282.0     | 1426.0     |
| 457922.0          | 57.1             | 20                | 1                          | 1226.0     | -          | -          |

**Type 5 Radar Waveform\_5**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 5133.0            | 78.1             | 16                | 2                          | 1167.0     | 1344.0     | -          |
| 176021.0          | 52.9             | 16                | 1                          | 1319.0     | -          | -          |
| 346906.0          | 51.2             | 16                | 1                          | 1307.0     | -          | -          |
| 517311.0          | 59.8             | 16                | 1                          | 1955.0     | -          | -          |
| 687383.0          | 82.3             | 16                | 2                          | 1241.0     | 1382.0     | -          |
| 154444.0          | 69.0             | 16                | 2                          | 1942.0     | 1782.0     | -          |
| 325539.0          | 53.8             | 16                | 1                          | 1994.0     | -          | -          |
| 495157.0          | 72.9             | 16                | 2                          | 1590.0     | 1961.0     | -          |
| 665122.0          | 88.4             | 16                | 3                          | 1599.0     | 1209.0     | 1136.0     |
| 133599.0          | 73.7             | 16                | 2                          | 1985.0     | 1043.0     | -          |
| 303939.0          | 75.5             | 16                | 2                          | 1623.0     | 1693.0     | -          |
| 474292.0          | 79.7             | 16                | 2                          | 1606.0     | 1771.0     | -          |
| 645149.0          | 81.6             | 16                | 2                          | 1571.0     | 1286.0     | -          |
| 112892.0          | 55.1             | 16                | 1                          | 1219.0     | -          | -          |
| 282848.0          | 76.1             | 16                | 2                          | 1652.0     | 1917.0     | -          |
| 453188.0          | 92.4             | 16                | 3                          | 1039.0     | 1458.0     | 1062.0     |
| 625002.0          | 52.3             | 16                | 1                          | 1894.0     | -          | -          |

**Type 5 Radar Waveform\_6**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 77841.0           | 78.6             | 20                | 2                          | 1084.0     | 1665.0     | -          |
| 222600.0          | 77.2             | 20                | 2                          | 1336.0     | 1664.0     | -          |
| 366702.0          | 95.7             | 20                | 3                          | 1484.0     | 1229.0     | 1407.0     |
| 511687.0          | 81.2             | 20                | 2                          | 1870.0     | 1707.0     | -          |
| 59947.0           | 69.3             | 20                | 2                          | 1969.0     | 1294.0     | -          |
| 204999.0          | 78.7             | 20                | 2                          | 1013.0     | 1304.0     | -          |
| 349283.0          | 70.3             | 20                | 2                          | 1568.0     | 1879.0     | -          |
| 495684.0          | 65.4             | 20                | 1                          | 1385.0     | -          | -          |
| 42215.0           | 65.5             | 20                | 1                          | 1914.0     | -          | -          |
| 186758.0          | 74.6             | 20                | 2                          | 1988.0     | 1560.0     | -          |
| 332519.0          | 52.2             | 20                | 1                          | 1563.0     | -          | -          |
| 475236.0          | 95.8             | 20                | 3                          | 1575.0     | 1750.0     | 1274.0     |
| 24345.0           | 51.9             | 20                | 1                          | 1989.0     | -          | -          |
| 169422.0          | 54.3             | 20                | 1                          | 1844.0     | -          | -          |
| 314559.0          | 63.0             | 20                | 1                          | 1720.0     | -          | -          |
| 456835.0          | 89.7             | 20                | 3                          | 1784.0     | 1737.0     | 1877.0     |
| 6488.0            | 53.1             | 20                | 1                          | 1187.0     | -          | -          |
| 150727.0          | 88.4             | 20                | 3                          | 1875.0     | 1727.0     | 1501.0     |
| 296407.0          | 80.8             | 20                | 2                          | 1067.0     | 1216.0     | -          |
| 440260.0          | 74.0             | 20                | 2                          | 1825.0     | 1963.0     | -          |



| Type 5 Radar Waveform_7 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 903646.0                | 64.2             | 11                | 1                          | 1892.0     | -          | -          |
| 205857.0                | 63.8             | 11                | 1                          | 1981.0     | -          | -          |
| 428222.0                | 85.8             | 11                | 3                          | 1526.0     | 1318.0     | 1348.0     |
| 651754.0                | 68.0             | 11                | 2                          | 1788.0     | 1453.0     | -          |
| 876422.0                | 57.5             | 11                | 1                          | 1581.0     | -          | -          |
| 178350.0                | 59.6             | 11                | 1                          | 1932.0     | -          | -          |
| 400881.0                | 73.1             | 11                | 2                          | 1982.0     | 1956.0     | -          |
| 625038.0                | 78.7             | 11                | 2                          | 1102.0     | 1014.0     | -          |
| 847624.0                | 74.1             | 11                | 2                          | 1463.0     | 1495.0     | -          |
| 150850.0                | 62.1             | 11                | 1                          | 1818.0     | -          | -          |
| 374453.0                | 60.9             | 11                | 1                          | 1403.0     | -          | -          |
| 596685.0                | 81.3             | 11                | 2                          | 1925.0     | 1485.0     | -          |
| 821143.0                | 55.6             | 11                | 1                          | 1829.0     | -          | -          |

| Type 5 Radar Waveform_8 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 145485.0                | 95.1             | 9                 | 3                          | 1492.0     | 1365.0     | 1279.0     |
| 409116.0                | 94.4             | 9                 | 3                          | 1370.0     | 1509.0     | 1114.0     |
| 674346.0                | 51.7             | 9                 | 1                          | 1378.0     | -          | -          |
| 935655.0                | 94.1             | 9                 | 3                          | 1698.0     | 1163.0     | 1926.0     |
| 113228.0                | 75.9             | 9                 | 2                          | 1098.0     | 1022.0     | -          |
| 377682.0                | 58.8             | 9                 | 1                          | 1001.0     | -          | -          |
| 640743.0                | 74.2             | 9                 | 2                          | 1671.0     | 1496.0     | -          |
| 904619.0                | 81.0             | 9                 | 2                          | 1934.0     | 1156.0     | -          |
| 80479.0                 | 94.4             | 9                 | 3                          | 1790.0     | 1373.0     | 1949.0     |
| 344587.0                | 66.8             | 9                 | 2                          | 1604.0     | 1085.0     | -          |
| 608080.0                | 94.4             | 9                 | 3                          | 1112.0     | 1064.0     | 1291.0     |

| Type 5 Radar Waveform_9 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 145485.0                | 95.1             | 9                 | 3                          | 1492.0     | 1365.0     | 1279.0     |
| 409116.0                | 94.4             | 9                 | 3                          | 1370.0     | 1509.0     | 1114.0     |
| 674346.0                | 51.7             | 9                 | 1                          | 1378.0     | -          | -          |
| 935655.0                | 94.1             | 9                 | 3                          | 1698.0     | 1163.0     | 1926.0     |
| 113228.0                | 75.9             | 9                 | 2                          | 1098.0     | 1022.0     | -          |
| 377682.0                | 58.8             | 9                 | 1                          | 1001.0     | -          | -          |
| 640743.0                | 74.2             | 9                 | 2                          | 1671.0     | 1496.0     | -          |
| 904619.0                | 81.0             | 9                 | 2                          | 1934.0     | 1156.0     | -          |
| 80479.0                 | 94.4             | 9                 | 3                          | 1790.0     | 1373.0     | 1949.0     |
| 344587.0                | 66.8             | 9                 | 2                          | 1604.0     | 1085.0     | -          |
| 608080.0                | 94.4             | 9                 | 3                          | 1112.0     | 1064.0     | 1291.0     |



**Type 5 Radar Waveform\_10**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 647772.0          | 91.6             | 17                | 3                          | 1838.0     | 1905.0     | 1656.0     |
| 117474.0          | 91.3             | 17                | 3                          | 1196.0     | 1172.0     | 1254.0     |
| 288479.0          | 53.4             | 17                | 1                          | 1953.0     | -          | -          |
| 459535.0          | 63.7             | 17                | 1                          | 1446.0     | -          | -          |
| 629714.0          | 71.0             | 17                | 2                          | 1078.0     | 1115.0     | -          |
| 96298.0           | 90.1             | 17                | 3                          | 1745.0     | 1617.0     | 1695.0     |
| 267475.0          | 56.9             | 17                | 1                          | 1884.0     | -          | -          |
| 438273.0          | 59.9             | 17                | 1                          | 1795.0     | -          | -          |
| 609405.0          | 61.3             | 17                | 1                          | 1369.0     | -          | -          |
| 75497.0           | 95.6             | 17                | 3                          | 1121.0     | 1303.0     | 1368.0     |
| 246033.0          | 77.2             | 17                | 2                          | 1865.0     | 1194.0     | -          |
| 416599.0          | 79.5             | 17                | 2                          | 1806.0     | 1069.0     | -          |
| 588141.0          | 56.5             | 17                | 1                          | 1629.0     | -          | -          |
| 54479.0           | 93.1             | 17                | 3                          | 1454.0     | 1131.0     | 1764.0     |
| 225120.0          | 69.8             | 17                | 2                          | 1716.0     | 1082.0     | -          |
| 395319.0          | 97.0             | 17                | 3                          | 1268.0     | 1076.0     | 1024.0     |
| 564914.0          | 91.5             | 17                | 3                          | 1199.0     | 1839.0     | 1308.0     |

**Type 5 Radar Waveform\_11**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 47694.0           | 66.5             | 10                | 1                          | 1855.0     | -          | -          |
| 289281.0          | 80.4             | 10                | 2                          | 1562.0     | 1997.0     | -          |
| 531150.0          | 73.2             | 10                | 2                          | 1224.0     | 1958.0     | -          |
| 774359.0          | 53.7             | 10                | 1                          | 1313.0     | -          | -          |
| 17876.0           | 66.2             | 10                | 1                          | 1780.0     | -          | -          |
| 259351.0          | 84.1             | 10                | 3                          | 1135.0     | 1593.0     | 1451.0     |
| 500672.0          | 83.7             | 10                | 3                          | 1505.0     | 1836.0     | 1230.0     |
| 741747.0          | 94.1             | 10                | 3                          | 1364.0     | 1813.0     | 1860.0     |
| 984161.0          | 85.9             | 10                | 3                          | 1000.0     | 1220.0     | 1700.0     |
| 229609.0          | 87.4             | 10                | 3                          | 1029.0     | 1928.0     | 1190.0     |
| 472545.0          | 56.9             | 10                | 1                          | 1166.0     | -          | -          |
| 713751.0          | 79.6             | 10                | 2                          | 1140.0     | 1483.0     | -          |

**Type 5 Radar Waveform\_12**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 956412.0          | 60.3             | 10                | 1                          | 1824.0     | -          | -          |
| 200328.0          | 66.3             | 10                | 1                          | 1808.0     | -          | -          |
| 442588.0          | 52.2             | 10                | 1                          | 1432.0     | -          | -          |
| 682861.0          | 99.3             | 10                | 3                          | 1189.0     | 1910.0     | 1120.0     |
| 925107.0          | 68.6             | 10                | 2                          | 1906.0     | 1518.0     | -          |
| 170131.0          | 89.4             | 10                | 3                          | 1596.0     | 1074.0     | 1342.0     |
| 412598.0          | 53.0             | 10                | 1                          | 1815.0     | -          | -          |
| 655205.0          | 63.4             | 10                | 1                          | 1028.0     | -          | -          |
| 895538.0          | 80.7             | 10                | 2                          | 1334.0     | 1864.0     | -          |
| 140593.0          | 80.5             | 10                | 2                          | 1387.0     | 1090.0     | -          |
| 381254.0          | 87.0             | 10                | 3                          | 1939.0     | 1950.0     | 1899.0     |
| 624596.0          | 79.6             | 10                | 2                          | 1200.0     | 1052.0     | -          |



| Type 5 Radar Waveform_13 |                  |                   |                            |            |            |            |
|--------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)        | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 742979.0                 | 59.4             | 12                | 1                          | 1705.0     | -          | -          |
| 95023.0                  | 51.1             | 12                | 1                          | 1605.0     | -          | -          |
| 301277.0                 | 94.5             | 12                | 3                          | 1225.0     | 1979.0     | 1911.0     |
| 510209.0                 | 51.1             | 12                | 1                          | 1275.0     | -          | -          |
| 715247.0                 | 87.3             | 12                | 3                          | 1212.0     | 1704.0     | 1384.0     |
| 69252.0                  | 88.8             | 12                | 3                          | 1116.0     | 1149.0     | 1962.0     |
| 276501.0                 | 75.3             | 12                | 2                          | 1132.0     | 1888.0     | -          |
| 484139.0                 | 68.3             | 12                | 2                          | 1071.0     | 1091.0     | -          |
| 691513.0                 | 67.8             | 12                | 2                          | 1088.0     | 1056.0     | -          |
| 43766.0                  | 100.0            | 12                | 3                          | 1233.0     | 1649.0     | 1444.0     |
| 251366.0                 | 61.1             | 12                | 1                          | 1723.0     | -          | -          |
| 457088.0                 | 93.3             | 12                | 3                          | 1487.0     | 1739.0     | 1748.0     |
| 664546.0                 | 86.4             | 12                | 3                          | 1018.0     | 1388.0     | 1567.0     |
| 18348.0                  | 51.8             | 12                | 1                          | 1566.0     | -          | -          |

| Type 5 Radar Waveform_14 |                  |                   |                            |            |            |            |
|--------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)        | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 157588.0                 | 75.3             | 20                | 2                          | 1783.0     | 1240.0     | -          |
| 303375.0                 | 57.2             | 20                | 1                          | 1046.0     | -          | -          |
| 447507.0                 | 69.7             | 20                | 2                          | 1386.0     | 1173.0     | -          |
| 591525.0                 | 69.6             | 20                | 2                          | 1660.0     | 1787.0     | -          |
| 139349.0                 | 85.2             | 20                | 3                          | 1891.0     | 1178.0     | 1684.0     |
| 285363.0                 | 52.7             | 20                | 1                          | 1295.0     | -          | -          |
| 430334.0                 | 50.0             | 20                | 1                          | 1620.0     | -          | -          |
| 573605.0                 | 80.4             | 20                | 2                          | 1886.0     | 1663.0     | -          |
| 122320.0                 | 50.9             | 20                | 1                          | 1061.0     | -          | -          |
| 266896.0                 | 79.2             | 20                | 2                          | 1128.0     | 1467.0     | -          |
| 412035.0                 | 75.0             | 20                | 2                          | 1186.0     | 1048.0     | -          |
| 555866.0                 | 80.3             | 20                | 2                          | 1685.0     | 1779.0     | -          |
| 103908.0                 | 88.0             | 20                | 3                          | 1410.0     | 1033.0     | 1598.0     |
| 249585.0                 | 53.7             | 20                | 1                          | 1311.0     | -          | -          |
| 393771.0                 | 66.8             | 20                | 2                          | 1316.0     | 1533.0     | -          |
| 537818.0                 | 83.6             | 20                | 3                          | 1205.0     | 1415.0     | 1317.0     |
| 86533.0                  | 60.8             | 20                | 1                          | 1070.0     | -          | -          |
| 230486.0                 | 86.0             | 20                | 3                          | 1473.0     | 1333.0     | 1639.0     |
| 374565.0                 | 93.5             | 20                | 3                          | 1966.0     | 1901.0     | 1153.0     |
| 519635.0                 | 93.7             | 20                | 3                          | 1921.0     | 1059.0     | 1159.0     |

| Type 5 Radar Waveform_15 |                  |                   |                            |            |            |            |
|--------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)        | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 137026.0                 | 94.4             | 8                 | 3                          | 1355.0     | 1610.0     | 1398.0     |
| 427989.0                 | 65.1             | 8                 | 1                          | 1609.0     | -          | -          |
| 716678.0                 | 89.7             | 8                 | 3                          | 1290.0     | 1965.0     | 1619.0     |
| 1007923.0                | 82.5             | 8                 | 2                          | 1626.0     | 1600.0     | -          |
| 101589.0                 | 56.7             | 8                 | 1                          | 1032.0     | -          | -          |
| 391117.0                 | 97.1             | 8                 | 3                          | 1951.0     | 1577.0     | 1352.0     |
| 682891.0                 | 62.0             | 8                 | 1                          | 1511.0     | -          | -          |
| 970528.0                 | 88.6             | 8                 | 3                          | 1918.0     | 1937.0     | 1392.0     |
| 65740.0                  | 61.7             | 8                 | 1                          | 1591.0     | -          | -          |
| 356457.0                 | 60.4             | 8                 | 1                          | 1374.0     | -          | -          |

**Type 5 Radar Waveform\_16**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 718895.0          | 55.2             | 7                 | 1                          | 1848.0     | -          | -          |
| 1041731.0         | 58.9             | 7                 | 1                          | 1964.0     | -          | -          |
| 33284.0           | 62.8             | 7                 | 1                          | 1020.0     | -          | -          |
| 355988.0          | 66.8             | 7                 | 2                          | 1305.0     | 1297.0     | -          |
| 679496.0          | 64.0             | 7                 | 1                          | 1105.0     | -          | -          |
| 1000336.0         | 95.9             | 7                 | 3                          | 1144.0     | 1363.0     | 1611.0     |
| 1322974.0         | 93.7             | 7                 | 3                          | 1837.0     | 1003.0     | 1016.0     |
| 316422.0          | 61.0             | 7                 | 1                          | 1811.0     | -          | -          |
| 638413.0          | 95.4             | 7                 | 3                          | 1543.0     | 1227.0     | 1009.0     |

**Type 5 Radar Waveform\_17**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 719340.0          | 84.2             | 10                | 3                          | 1747.0     | 1545.0     | 1360.0     |
| 962243.0          | 79.6             | 10                | 2                          | 1154.0     | 1944.0     | -          |
| 207017.0          | 79.0             | 10                | 2                          | 1984.0     | 1616.0     | -          |
| 449750.0          | 50.2             | 10                | 1                          | 1214.0     | -          | -          |
| 692030.0          | 65.2             | 10                | 1                          | 1151.0     | -          | -          |
| 933301.0          | 76.2             | 10                | 2                          | 1023.0     | 1177.0     | -          |
| 177663.0          | 57.0             | 10                | 1                          | 1278.0     | -          | -          |
| 419633.0          | 50.8             | 10                | 1                          | 1876.0     | -          | -          |
| 661004.0          | 71.5             | 10                | 2                          | 1792.0     | 1148.0     | -          |
| 904327.0          | 51.4             | 10                | 1                          | 1280.0     | -          | -          |
| 147405.0          | 84.3             | 10                | 3                          | 1756.0     | 1042.0     | 1330.0     |
| 389055.0          | 89.2             | 10                | 3                          | 1080.0     | 1421.0     | 1320.0     |

**Type 5 Radar Waveform\_18**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 398002.0          | 75.2             | 19                | 2                          | 1482.0     | 1420.0     | -          |
| 548866.0          | 99.8             | 19                | 3                          | 1476.0     | 1854.0     | 1411.0     |
| 74008.0           | 92.8             | 19                | 3                          | 1542.0     | 1710.0     | 1895.0     |
| 227426.0          | 57.4             | 19                | 1                          | 1021.0     | -          | -          |
| 380005.0          | 60.2             | 19                | 1                          | 1603.0     | -          | -          |
| 530987.0          | 67.6             | 19                | 2                          | 1935.0     | 1804.0     | -          |
| 55397.0           | 87.3             | 19                | 3                          | 1634.0     | 1265.0     | 1081.0     |
| 208449.0          | 62.8             | 19                | 1                          | 1440.0     | -          | -          |
| 359279.0          | 88.1             | 19                | 3                          | 1438.0     | 1622.0     | 1867.0     |
| 510995.0          | 90.7             | 19                | 3                          | 1904.0     | 1580.0     | 1770.0     |
| 36782.0           | 61.4             | 19                | 1                          | 1679.0     | -          | -          |
| 189158.0          | 68.7             | 19                | 2                          | 1465.0     | 1525.0     | -          |
| 341182.0          | 90.5             | 19                | 3                          | 1079.0     | 1468.0     | 1231.0     |
| 493763.0          | 74.0             | 19                | 2                          | 1731.0     | 1641.0     | -          |
| 17960.0           | 66.0             | 19                | 1                          | 1817.0     | -          | -          |
| 170387.0          | 67.5             | 19                | 2                          | 1442.0     | 1520.0     | -          |
| 322702.0          | 71.1             | 19                | 2                          | 1882.0     | 1361.0     | -          |
| 474445.0          | 89.8             | 19                | 3                          | 1475.0     | 1345.0     | 1281.0     |
| 628331.0          | 71.0             | 19                | 2                          | 1119.0     | 1276.0     | -          |



**Type 5 Radar Waveform\_19**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 191820.0          | 89.9             | 14                | 3                          | 1657.0     | 1058.0     | 1933.0     |
| 384661.0          | 99.9             | 14                | 3                          | 1841.0     | 1394.0     | 1532.0     |
| 577623.0          | 90.6             | 14                | 3                          | 1506.0     | 1612.0     | 1521.0     |
| 773549.0          | 59.2             | 14                | 1                          | 1515.0     | -          | -          |
| 168649.0          | 64.1             | 14                | 1                          | 1857.0     | -          | -          |
| 362255.0          | 65.3             | 14                | 1                          | 1789.0     | -          | -          |
| 556300.0          | 64.9             | 14                | 1                          | 1138.0     | -          | -          |
| 748939.0          | 74.4             | 14                | 2                          | 1053.0     | 1267.0     | -          |
| 144847.0          | 56.2             | 14                | 1                          | 1627.0     | -          | -          |
| 337464.0          | 99.8             | 14                | 3                          | 1554.0     | 1134.0     | 1329.0     |
| 529802.0          | 96.3             | 14                | 3                          | 1477.0     | 1843.0     | 1767.0     |
| 724012.0          | 90.6             | 14                | 3                          | 1206.0     | 1221.0     | 1099.0     |
| 120441.0          | 87.1             | 14                | 3                          | 1729.0     | 1941.0     | 1621.0     |
| 314030.0          | 77.5             | 14                | 2                          | 1643.0     | 1499.0     | -          |
| 507229.0          | 71.3             | 14                | 2                          | 1719.0     | 1523.0     | -          |

**Type 5 Radar Waveform\_20**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 751390.0          | 80.0             | 13                | 2                          | 1260.0     | 1203.0     | -          |
| 104135.0          | 59.2             | 13                | 1                          | 1326.0     | -          | -          |
| 310988.0          | 70.0             | 13                | 2                          | 1927.0     | 1346.0     | -          |
| 519325.0          | 59.3             | 13                | 1                          | 1218.0     | -          | -          |
| 726808.0          | 53.8             | 13                | 1                          | 1343.0     | -          | -          |
| 78359.0           | 78.2             | 13                | 2                          | 1601.0     | 1995.0     | -          |
| 286081.0          | 56.4             | 13                | 1                          | 1472.0     | -          | -          |
| 491368.0          | 98.2             | 13                | 3                          | 1759.0     | 1821.0     | 1776.0     |
| 701489.0          | 57.3             | 13                | 1                          | 1041.0     | -          | -          |
| 52822.0           | 93.5             | 13                | 3                          | 1667.0     | 1288.0     | 1256.0     |
| 259802.0          | 68.1             | 13                | 2                          | 1948.0     | 1880.0     | -          |
| 468209.0          | 60.3             | 13                | 1                          | 1174.0     | -          | -          |
| 675357.0          | 59.7             | 13                | 1                          | 1746.0     | -          | -          |
| 27311.0           | 91.2             | 13                | 3                          | 1900.0     | 1514.0     | 1732.0     |

**Type 5 Radar Waveform\_21**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 219253.0          | 60.1             | 14                | 1                          | 1517.0     | -          | -          |
| 411638.0          | 89.6             | 14                | 3                          | 1019.0     | 1405.0     | 1555.0     |
| 605247.0          | 79.7             | 14                | 2                          | 1263.0     | 1992.0     | -          |
| 1739.0            | 81.8             | 14                | 2                          | 1967.0     | 1049.0     | -          |
| 195145.0          | 80.5             | 14                | 2                          | 1007.0     | 1551.0     | -          |
| 387562.0          | 94.4             | 14                | 3                          | 1324.0     | 1441.0     | 1819.0     |
| 580931.0          | 89.4             | 14                | 3                          | 1546.0     | 1354.0     | 1060.0     |
| 773614.0          | 84.6             | 14                | 3                          | 1412.0     | 1141.0     | 1799.0     |
| 170775.0          | 90.6             | 14                | 3                          | 1717.0     | 1913.0     | 1470.0     |
| 364753.0          | 78.7             | 14                | 2                          | 1285.0     | 1213.0     | -          |
| 557093.0          | 92.2             | 14                | 3                          | 1766.0     | 1118.0     | 1157.0     |
| 750539.0          | 95.3             | 14                | 3                          | 1142.0     | 1015.0     | 1459.0     |
| 147271.0          | 93.2             | 14                | 3                          | 1287.0     | 1005.0     | 1497.0     |
| 340704.0          | 81.0             | 14                | 2                          | 1380.0     | 1644.0     | -          |
| 535291.0          | 63.1             | 14                | 1                          | 1092.0     | -          | -          |

**Type 5 Radar Waveform\_22**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 604537.0          | 91.8             | 18                | 3                          | 1192.0     | 1424.0     | 1587.0     |
| 103237.0          | 50.1             | 18                | 1                          | 1011.0     | -          | -          |
| 263884.0          | 74.3             | 18                | 2                          | 1314.0     | 1697.0     | -          |
| 424156.0          | 91.2             | 18                | 3                          | 1735.0     | 1208.0     | 1139.0     |
| 585722.0          | 69.2             | 18                | 2                          | 1881.0     | 1217.0     | -          |
| 82824.0           | 94.1             | 18                | 3                          | 1952.0     | 1486.0     | 1781.0     |
| 244750.0          | 56.8             | 18                | 1                          | 1129.0     | -          | -          |
| 404548.0          | 97.5             | 18                | 3                          | 1055.0     | 1031.0     | 1691.0     |
| 567371.0          | 61.8             | 18                | 1                          | 1371.0     | -          | -          |
| 63102.0           | 85.9             | 18                | 3                          | 1262.0     | 1642.0     | 1908.0     |
| 223691.0          | 92.8             | 18                | 3                          | 1830.0     | 1507.0     | 1272.0     |
| 384283.0          | 83.5             | 18                | 3                          | 1678.0     | 1633.0     | 1261.0     |
| 547001.0          | 51.6             | 18                | 1                          | 1972.0     | -          | -          |
| 43422.0           | 83.3             | 18                | 2                          | 1987.0     | 1413.0     | -          |
| 204949.0          | 65.8             | 18                | 1                          | 1245.0     | -          | -          |
| 364477.0          | 96.0             | 18                | 3                          | 1402.0     | 1919.0     | 1299.0     |
| 527222.0          | 54.9             | 18                | 1                          | 1874.0     | -          | -          |
| 23688.0           | 55.2             | 18                | 1                          | 1125.0     | -          | -          |

**Type 5 Radar Waveform\_23**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 332821.0          | 83.3             | 8                 | 2                          | 1751.0     | 1586.0     | -          |
| 622657.0          | 96.1             | 8                 | 3                          | 1524.0     | 1259.0     | 1306.0     |
| 914483.0          | 60.2             | 8                 | 1                          | 1758.0     | -          | -          |
| 6855.0            | 66.5             | 8                 | 1                          | 1246.0     | -          | -          |
| 297626.0          | 58.7             | 8                 | 1                          | 1101.0     | -          | -          |
| 588206.0          | 56.6             | 8                 | 1                          | 1489.0     | -          | -          |
| 877966.0          | 83.1             | 8                 | 2                          | 1236.0     | 1504.0     | -          |
| 1168044.0         | 82.0             | 8                 | 2                          | 1321.0     | 1722.0     | -          |
| 261011.0          | 95.4             | 8                 | 3                          | 1401.0     | 1907.0     | 1450.0     |
| 551641.0          | 68.6             | 8                 | 2                          | 1897.0     | 1242.0     | -          |

**Type 5 Radar Waveform\_24**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 764971.0          | 91.3             | 9                 | 3                          | 1030.0     | 1026.0     | 1379.0     |
| 1028918.0         | 67.2             | 9                 | 2                          | 1522.0     | 1702.0     | -          |
| 205392.0          | 58.5             | 9                 | 1                          | 1300.0     | -          | -          |
| 468238.0          | 85.1             | 9                 | 3                          | 1266.0     | 1481.0     | 1845.0     |
| 732272.0          | 75.5             | 9                 | 2                          | 1835.0     | 1915.0     | -          |
| 996113.0          | 85.0             | 9                 | 3                          | 1168.0     | 1083.0     | 1312.0     |
| 172858.0          | 65.5             | 9                 | 1                          | 1191.0     | -          | -          |
| 435802.0          | 93.3             | 9                 | 3                          | 1462.0     | 1223.0     | 1866.0     |
| 699429.0          | 93.9             | 9                 | 3                          | 1201.0     | 1269.0     | 1846.0     |
| 964079.0          | 69.1             | 9                 | 2                          | 1568.0     | 1488.0     | -          |
| 139864.0          | 90.6             | 9                 | 3                          | 1812.0     | 1010.0     | 1785.0     |



**Type 5 Radar Waveform\_25**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 369946.0          | 97.2             | 10                | 3                          | 1035.0     | 1130.0     | 1437.0     |
| 612651.0          | 53.3             | 10                | 1                          | 1896.0     | -          | -          |
| 853011.0          | 92.1             | 10                | 3                          | 1283.0     | 1235.0     | 1377.0     |
| 98567.0           | 67.9             | 10                | 2                          | 1672.0     | 1469.0     | -          |
| 339880.0          | 95.9             | 10                | 3                          | 1624.0     | 1769.0     | 1087.0     |
| 581559.0          | 87.8             | 10                | 3                          | 1638.0     | 1406.0     | 1034.0     |
| 824938.0          | 60.9             | 10                | 1                          | 1856.0     | -          | -          |
| 68700.0           | 87.7             | 10                | 3                          | 1195.0     | 1339.0     | 1872.0     |
| 311057.0          | 51.3             | 10                | 1                          | 1535.0     | -          | -          |
| 552315.0          | 74.7             | 10                | 2                          | 1328.0     | 1833.0     | -          |
| 794045.0          | 82.8             | 10                | 2                          | 1686.0     | 1519.0     | -          |
| 38982.0           | 87.2             | 10                | 3                          | 1615.0     | 1025.0     | 1133.0     |

**Type 5 Radar Waveform\_26**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 197720.0          | 90.1             | 17                | 3                          | 1047.0     | 1325.0     | 1531.0     |
| 369250.0          | 59.9             | 17                | 1                          | 1466.0     | -          | -          |
| 537594.0          | 84.9             | 17                | 3                          | 1647.0     | 1850.0     | 1228.0     |
| 6516.0            | 52.9             | 17                | 1                          | 1861.0     | -          | -          |
| 177001.0          | 75.3             | 17                | 2                          | 1215.0     | 1689.0     | -          |
| 346251.0          | 91.5             | 17                | 3                          | 1924.0     | 1734.0     | 1762.0     |
| 518171.0          | 67.6             | 17                | 2                          | 1211.0     | 1447.0     | -          |
| 689810.0          | 58.1             | 17                | 1                          | 1550.0     | -          | -          |
| 155612.0          | 87.2             | 17                | 3                          | 1834.0     | 1110.0     | 1706.0     |
| 326010.0          | 98.7             | 17                | 3                          | 1089.0     | 1008.0     | 1849.0     |
| 495216.0          | 88.2             | 17                | 3                          | 1725.0     | 1912.0     | 1775.0     |
| 668761.0          | 56.1             | 17                | 1                          | 1558.0     | -          | -          |
| 134660.0          | 94.7             | 17                | 3                          | 1251.0     | 1556.0     | 1863.0     |
| 305485.0          | 77.4             | 17                | 2                          | 1182.0     | 1740.0     | -          |
| 476609.0          | 57.6             | 17                | 1                          | 1986.0     | -          | -          |
| 648082.0          | 58.0             | 17                | 1                          | 1164.0     | -          | -          |
| 113829.0          | 66.7             | 17                | 2                          | 1999.0     | 1945.0     | -          |

**Type 5 Radar Waveform\_27**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 605786.0          | 67.7             | 5                 | 2                          | 1559.0     | 1544.0     | -          |
| 968745.0          | 72.5             | 5                 | 2                          | 1661.0     | 1576.0     | -          |
| 1333078.0         | 52.0             | 5                 | 1                          | 1752.0     | -          | -          |
| 197847.0          | 85.8             | 5                 | 3                          | 2000.0     | 1188.0     | 1247.0     |
| 561688.0          | 64.7             | 5                 | 1                          | 1449.0     | -          | -          |
| 923787.0          | 86.1             | 5                 | 3                          | 1243.0     | 1301.0     | 1086.0     |
| 1286110.0         | 92.8             | 5                 | 3                          | 1631.0     | 1273.0     | 1416.0     |
| 153257.0          | 68.1             | 5                 | 2                          | 1990.0     | 1570.0     | -          |



**Type 5 Radar Waveform\_28**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 343060.0          | 98.7             | 10                | 3                          | 1675.0     | 1822.0     | 1971.0     |
| 586420.0          | 62.8             | 10                | 1                          | 1801.0     | —          | —          |
| 827281.0          | 68.8             | 10                | 2                          | 1998.0     | 1289.0     | —          |
| 72324.0           | 72.2             | 10                | 2                          | 1337.0     | 1645.0     | —          |
| 313893.0          | 94.4             | 10                | 3                          | 1127.0     | 1503.0     | 1113.0     |
| 554966.0          | 94.1             | 10                | 3                          | 1868.0     | 1068.0     | 1793.0     |
| 795792.0          | 94.0             | 10                | 3                          | 1773.0     | 1853.0     | 1802.0     |
| 42595.0           | 58.5             | 10                | 1                          | 1670.0     | —          | —          |
| 284424.0          | 80.0             | 10                | 2                          | 1249.0     | 1464.0     | —          |
| 526235.0          | 68.4             | 10                | 2                          | 1396.0     | 1434.0     | —          |
| 767228.0          | 75.2             | 10                | 2                          | 1959.0     | 1978.0     | —          |
| 12736.0           | 90.6             | 10                | 3                          | 1349.0     | 1309.0     | 1674.0     |

**Type 5 Radar Waveform\_29**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 305492.0          | 82.1             | 7                 | 2                          | 1920.0     | 1589.0     | —          |
| 595367.0          | 90.3             | 7                 | 3                          | 1376.0     | 1409.0     | 1351.0     |
| 887594.0          | 51.8             | 7                 | 1                          | 1175.0     | —          | —          |
| 1176439.0         | 76.2             | 7                 | 2                          | 1310.0     | 1805.0     | —          |
| 270100.0          | 61.0             | 7                 | 1                          | 1946.0     | —          | —          |
| 560702.0          | 53.3             | 7                 | 1                          | 1869.0     | —          | —          |
| 849552.0          | 98.5             | 7                 | 3                          | 1448.0     | 1692.0     | 1170.0     |
| 1142595.0         | 65.1             | 7                 | 1                          | 1109.0     | —          | —          |
| 233956.0          | 86.0             | 7                 | 3                          | 1027.0     | 1012.0     | 1714.0     |
| 524312.0          | 73.3             | 7                 | 2                          | 1673.0     | 1557.0     | —          |



Radar Type 6 - Radar Statistical Performance

| Trail #                  | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection | Trail # | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection |
|--------------------------|---------------------|-------------------------------|---------|---------------------|-------------------------------|
| 0                        | 5490.4              | 1                             | 15      | 5500.0              | 1                             |
| 1                        | 5491.1              | 1                             | 16      | 5500.7              | 1                             |
| 2                        | 5491.7              | 1                             | 17      | 5501.3              | 1                             |
| 3                        | 5492.4              | 1                             | 18      | 5502.0              | 1                             |
| 4                        | 5493.1              | 1                             | 19      | 5502.7              | 1                             |
| 5                        | 5493.7              | 1                             | 20      | 5503.3              | 1                             |
| 6                        | 5494.4              | 1                             | 21      | 5504.0              | 1                             |
| 7                        | 5495.0              | 1                             | 22      | 5504.6              | 1                             |
| 8                        | 5495.7              | 1                             | 23      | 5505.3              | 1                             |
| 9                        | 5496.4              | 1                             | 24      | 5506.0              | 1                             |
| 10                       | 5497.0              | 1                             | 25      | 5506.6              | 1                             |
| 11                       | 5497.7              | 1                             | 26      | 5507.3              | 1                             |
| 12                       | 5498.4              | 1                             | 27      | 5508.0              | 1                             |
| 13                       | 5499.0              | 1                             | 28      | 5508.6              | 1                             |
| 14                       | 5499.7              | 1                             | 29      | 5509.6              | 1                             |
| Detection Percentage (%) |                     |                               |         |                     | 100%                          |

| Type 6 Radar Waveform_0 |      |      |      |      |      |
|-------------------------|------|------|------|------|------|
| Frequency List (MHz)    | 0    | 1    | 2    | 3    | 4    |
| 0                       | 5322 | 5556 | 5546 | 5296 | 5384 |
| 5                       | 5645 | 5666 | 5440 | 5396 | 5647 |
| 10                      | 5419 | 5270 | 5489 | 5404 | 5286 |
| 15                      | 5521 | 5351 | 5543 | 5475 | 5499 |
| 20                      | 5545 | 5469 | 5339 | 5355 | 5602 |
| 25                      | 5571 | 5323 | 5288 | 5403 | 5692 |
| 30                      | 5632 | 5365 | 5462 | 5494 | 5330 |
| 35                      | 5553 | 5686 | 5263 | 5477 | 5265 |
| 40                      | 5576 | 5479 | 5386 | 5582 | 5681 |
| 45                      | 5679 | 5392 | 5627 | 5416 | 5301 |
| 50                      | 5335 | 5381 | 5706 | 5675 | 5564 |
| 55                      | 5441 | 5563 | 5421 | 5593 | 5402 |
| 60                      | 5718 | 5302 | 5512 | 5630 | 5374 |
| 65                      | 5257 | 5315 | 5487 | 5318 | 5272 |
| 70                      | 5530 | 5618 | 5585 | 5316 | 5687 |
| 75                      | 5714 | 5278 | 5483 | 5334 | 5641 |
| 80                      | 5547 | 5331 | 5578 | 5544 | 5588 |
| 85                      | 5362 | 5614 | 5259 | 5664 | 5583 |
| 90                      | 5524 | 5599 | 5677 | 5654 | 5672 |
| 95                      | 5436 | 5562 | 5276 | 5708 | 5695 |



**Type 6 Radar Waveform\_1**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5577 | 5320 | 5482 | 5457 | 5604 |
| 5                    | 5687 | 5591 | 5515 | 5559 | 5379 |
| 10                   | 5253 | 5534 | 5530 | 5599 | 5307 |
| 15                   | 5609 | 5478 | 5646 | 5423 | 5691 |
| 20                   | 5553 | 5538 | 5280 | 5444 | 5575 |
| 25                   | 5434 | 5526 | 5392 | 5437 | 5259 |
| 30                   | 5521 | 5322 | 5677 | 5625 | 5692 |
| 35                   | 5302 | 5368 | 5416 | 5391 | 5579 |
| 40                   | 5659 | 5417 | 5529 | 5676 | 5513 |
| 45                   | 5562 | 5475 | 5588 | 5469 | 5663 |
| 50                   | 5686 | 5557 | 5282 | 5289 | 5290 |
| 55                   | 5385 | 5607 | 5517 | 5514 | 5315 |
| 60                   | 5373 | 5372 | 5467 | 5675 | 5678 |
| 65                   | 5407 | 5264 | 5426 | 5257 | 5550 |
| 70                   | 5699 | 5701 | 5640 | 5721 | 5586 |
| 75                   | 5398 | 5626 | 5418 | 5657 | 5587 |
| 80                   | 5645 | 5704 | 5585 | 5576 | 5724 |
| 85                   | 5634 | 5297 | 5367 | 5660 | 5706 |
| 90                   | 5318 | 5671 | 5293 | 5288 | 5679 |
| 95                   | 5405 | 5410 | 5524 | 5567 | 5611 |

**Type 6 Radar Waveform\_2**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5357 | 5559 | 5418 | 5618 | 5446 |
| 5                    | 5254 | 5613 | 5590 | 5722 | 5586 |
| 10                   | 5659 | 5420 | 5571 | 5319 | 5328 |
| 15                   | 5697 | 5605 | 5274 | 5468 | 5408 |
| 20                   | 5464 | 5704 | 5696 | 5436 | 5548 |
| 25                   | 5700 | 5372 | 5593 | 5471 | 5301 |
| 30                   | 5507 | 5279 | 5417 | 5348 | 5259 |
| 35                   | 5490 | 5639 | 5666 | 5402 | 5364 |
| 40                   | 5355 | 5294 | 5673 | 5442 | 5542 |
| 45                   | 5558 | 5646 | 5522 | 5453 | 5562 |
| 50                   | 5258 | 5333 | 5378 | 5588 | 5707 |
| 55                   | 5320 | 5609 | 5344 | 5501 | 5632 |
| 60                   | 5499 | 5391 | 5624 | 5705 | 5688 |
| 65                   | 5462 | 5360 | 5353 | 5296 | 5687 |
| 70                   | 5489 | 5555 | 5518 | 5672 | 5573 |
| 75                   | 5292 | 5368 | 5334 | 5582 | 5277 |
| 80                   | 5515 | 5421 | 5545 | 5617 | 5532 |
| 85                   | 5265 | 5675 | 5305 | 5310 | 5343 |
| 90                   | 5663 | 5630 | 5287 | 5513 | 5565 |
| 95                   | 5591 | 5496 | 5438 | 5397 | 5455 |

**Type 6 Radar Waveform\_3**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5612 | 5323 | 5354 | 5682 | 5666 |
| 5                    | 5393 | 5538 | 5665 | 5410 | 5415 |
| 10                   | 5590 | 5684 | 5709 | 5417 | 5349 |
| 15                   | 5310 | 5257 | 5377 | 5513 | 5600 |
| 20                   | 5472 | 5395 | 5259 | 5525 | 5521 |
| 25                   | 5588 | 5699 | 5457 | 5697 | 5505 |
| 30                   | 5440 | 5396 | 5711 | 5535 | 5572 |
| 35                   | 5643 | 5398 | 5581 | 5435 | 5344 |
| 40                   | 5316 | 5447 | 5293 | 5534 | 5670 |
| 45                   | 5274 | 5522 | 5641 | 5704 | 5478 |
| 50                   | 5340 | 5341 | 5434 | 5384 | 5564 |
| 55                   | 5411 | 5651 | 5508 | 5425 | 5419 |
| 60                   | 5428 | 5315 | 5630 | 5322 | 5444 |
| 65                   | 5698 | 5424 | 5570 | 5431 | 5637 |
| 70                   | 5498 | 5667 | 5631 | 5465 | 5673 |
| 75                   | 5691 | 5716 | 5427 | 5541 | 5277 |
| 80                   | 5350 | 5305 | 5624 | 5355 | 5482 |
| 85                   | 5569 | 5420 | 5357 | 5272 | 5710 |
| 90                   | 5386 | 5639 | 5318 | 5672 | 5677 |
| 95                   | 5460 | 5317 | 5327 | 5269 | 5528 |



**Type 6 Radar Waveform\_4**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5392 | 5562 | 5290 | 5368 | 5411 |
| 5                    | 5435 | 5560 | 5265 | 5476 | 5622 |
| 10                   | 5424 | 5473 | 5275 | 5612 | 5370 |
| 15                   | 5301 | 5384 | 5383 | 5558 | 5317 |
| 20                   | 5480 | 5464 | 5675 | 5517 | 5494 |
| 25                   | 5379 | 5551 | 5660 | 5326 | 5539 |
| 30                   | 5482 | 5382 | 5668 | 5346 | 5366 |
| 35                   | 5537 | 5672 | 5706 | 5497 | 5705 |
| 40                   | 5530 | 5299 | 5667 | 5678 | 5502 |
| 45                   | 5724 | 5665 | 5531 | 5605 | 5692 |
| 50                   | 5610 | 5653 | 5709 | 5498 | 5599 |
| 55                   | 5609 | 5625 | 5664 | 5284 | 5487 |
| 60                   | 5389 | 5250 | 5613 | 5254 | 5586 |
| 65                   | 5437 | 5402 | 5311 | 5434 | 5659 |
| 70                   | 5316 | 5565 | 5649 | 5523 | 5396 |
| 75                   | 5661 | 5386 | 5258 | 5602 | 5415 |
| 80                   | 5405 | 5662 | 5515 | 5479 | 5289 |
| 85                   | 5323 | 5674 | 5710 | 5330 | 5593 |
| 90                   | 5566 | 5635 | 5387 | 5711 | 5342 |
| 95                   | 5426 | 5441 | 5453 | 5253 | 5623 |

**Type 6 Radar Waveform\_5**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5550 | 5326 | 5701 | 5529 | 5253 |
| 5                    | 5477 | 5485 | 5340 | 5639 | 5354 |
| 10                   | 5355 | 5262 | 5316 | 5332 | 5391 |
| 15                   | 5389 | 5414 | 5486 | 5506 | 5606 |
| 20                   | 5630 | 5616 | 5467 | 5267 | 5500 |
| 25                   | 5291 | 5430 | 5573 | 5524 | 5271 |
| 30                   | 5625 | 5490 | 5595 | 5661 | 5579 |
| 35                   | 5288 | 5599 | 5272 | 5716 | 5507 |
| 40                   | 5710 | 5644 | 5442 | 5664 | 5607 |
| 45                   | 5482 | 5723 | 5584 | 5492 | 5568 |
| 50                   | 5311 | 5435 | 5312 | 5711 | 5324 |
| 55                   | 5444 | 5635 | 5413 | 5652 | 5431 |
| 60                   | 5362 | 5551 | 5559 | 5455 | 5535 |
| 65                   | 5473 | 5709 | 5581 | 5615 | 5706 |
| 70                   | 5319 | 5365 | 5306 | 5714 | 5379 |
| 75                   | 5525 | 5254 | 5578 | 5476 | 5484 |
| 80                   | 5613 | 5673 | 5522 | 5597 | 5339 |
| 85                   | 5358 | 5552 | 5648 | 5602 | 5438 |
| 90                   | 5458 | 5508 | 5712 | 5421 | 5347 |
| 95                   | 5463 | 5278 | 5509 | 5576 | 5453 |

**Type 6 Radar Waveform\_6**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5330 | 5565 | 5637 | 5690 | 5473 |
| 5                    | 5519 | 5507 | 5415 | 5327 | 5658 |
| 10                   | 5286 | 5526 | 5357 | 5527 | 5412 |
| 15                   | 5477 | 5541 | 5589 | 5551 | 5323 |
| 20                   | 5399 | 5699 | 5654 | 5598 | 5440 |
| 25                   | 5630 | 5352 | 5494 | 5631 | 5607 |
| 30                   | 5663 | 5635 | 5582 | 5705 | 5272 |
| 35                   | 5384 | 5718 | 5379 | 5395 | 5425 |
| 40                   | 5346 | 5318 | 5682 | 5661 | 5439 |
| 45                   | 5462 | 5306 | 5282 | 5444 | 5487 |
| 50                   | 5537 | 5356 | 5258 | 5289 | 5500 |
| 55                   | 5665 | 5514 | 5263 | 5606 | 5445 |
| 60                   | 5342 | 5376 | 5291 | 5474 | 5505 |
| 65                   | 5278 | 5484 | 5418 | 5303 | 5253 |
| 70                   | 5419 | 5504 | 5441 | 5712 | 5426 |
| 75                   | 5575 | 5317 | 5538 | 5442 | 5641 |
| 80                   | 5679 | 5701 | 5455 | 5714 | 5562 |
| 85                   | 5490 | 5653 | 5717 | 5312 | 5547 |
| 90                   | 5475 | 5563 | 5319 | 5450 | 5373 |
| 95                   | 5721 | 5571 | 5659 | 5281 | 5436 |



**Type 6 Radar Waveform\_7**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5585 | 5329 | 5573 | 5376 | 5315 |
| 5                    | 5658 | 5432 | 5490 | 5390 | 5595 |
| 10                   | 5412 | 5398 | 5722 | 5433 | 5565 |
| 15                   | 5668 | 5692 | 5596 | 5515 | 5407 |
| 20                   | 5687 | 5413 | 5421 | 5301 | 5697 |
| 25                   | 5260 | 5641 | 5705 | 5621 | 5539 |
| 30                   | 5348 | 5521 | 5679 | 5382 | 5470 |
| 35                   | 5666 | 5578 | 5544 | 5282 | 5401 |
| 40                   | 5423 | 5447 | 5280 | 5368 | 5345 |
| 45                   | 5498 | 5267 | 5690 | 5644 | 5698 |
| 50                   | 5663 | 5588 | 5542 | 5556 | 5708 |
| 55                   | 5688 | 5619 | 5704 | 5557 | 5577 |
| 60                   | 5574 | 5507 | 5321 | 5598 | 5300 |
| 65                   | 5548 | 5479 | 5448 | 5276 | 5268 |
| 70                   | 5696 | 5472 | 5714 | 5422 | 5587 |
| 75                   | 5480 | 5400 | 5681 | 5449 | 5718 |
| 80                   | 5298 | 5408 | 5648 | 5582 | 5399 |
| 85                   | 5604 | 5297 | 5334 | 5430 | 5552 |
| 90                   | 5263 | 5318 | 5366 | 5656 | 5492 |
| 95                   | 5618 | 5302 | 5463 | 5553 | 5384 |

**Type 6 Radar Waveform\_8**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5365 | 5568 | 5509 | 5537 | 5535 |
| 5                    | 5700 | 5454 | 5565 | 5556 | 5597 |
| 10                   | 5526 | 5676 | 5439 | 5345 | 5320 |
| 15                   | 5544 | 5707 | 5318 | 5459 | 5536 |
| 20                   | 5679 | 5386 | 5309 | 5628 | 5425 |
| 25                   | 5364 | 5675 | 5272 | 5510 | 5496 |
| 30                   | 5563 | 5673 | 5499 | 5521 | 5658 |
| 35                   | 5559 | 5353 | 5555 | 5596 | 5484 |
| 40                   | 5361 | 5687 | 5277 | 5325 | 5581 |
| 45                   | 5268 | 5434 | 5574 | 5639 | 5631 |
| 50                   | 5379 | 5401 | 5573 | 5322 | 5279 |
| 55                   | 5451 | 5703 | 5672 | 5266 | 5430 |
| 60                   | 5698 | 5494 | 5302 | 5382 | 5486 |
| 65                   | 5538 | 5339 | 5456 | 5359 | 5553 |
| 70                   | 5569 | 5289 | 5661 | 5479 | 5271 |
| 75                   | 5389 | 5370 | 5691 | 5507 | 5711 |
| 80                   | 5281 | 5395 | 5603 | 5511 | 5671 |
| 85                   | 5572 | 5324 | 5653 | 5626 | 5668 |
| 90                   | 5606 | 5286 | 5590 | 5656 | 5670 |
| 95                   | 5561 | 5591 | 5532 | 5412 | 5296 |

**Type 6 Radar Waveform\_9**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5523 | 5332 | 5445 | 5698 | 5377 |
| 5                    | 5267 | 5379 | 5640 | 5719 | 5426 |
| 10                   | 5360 | 5465 | 5480 | 5540 | 5475 |
| 15                   | 5644 | 5447 | 5326 | 5589 | 5424 |
| 20                   | 5625 | 5477 | 5293 | 5359 | 5575 |
| 25                   | 5628 | 5468 | 5709 | 5314 | 5399 |
| 30                   | 5453 | 5303 | 5697 | 5563 | 5274 |
| 35                   | 5355 | 5506 | 5469 | 5435 | 5664 |
| 40                   | 5299 | 5604 | 5305 | 5383 | 5699 |
| 45                   | 5321 | 5450 | 5443 | 5690 | 5720 |
| 50                   | 5580 | 5499 | 5527 | 5512 | 5573 |
| 55                   | 5422 | 5357 | 5362 | 5308 | 5262 |
| 60                   | 5524 | 5440 | 5503 | 5331 | 5423 |
| 65                   | 5318 | 5430 | 5302 | 5713 | 5525 |
| 70                   | 5663 | 5432 | 5522 | 5689 | 5260 |
| 75                   | 5340 | 5296 | 5338 | 5452 | 5367 |
| 80                   | 5411 | 5507 | 5553 | 5621 | 5263 |
| 85                   | 5557 | 5284 | 5394 | 5427 | 5590 |
| 90                   | 5508 | 5623 | 5253 | 5488 | 5324 |
| 95                   | 5402 | 5561 | 5407 | 5556 | 5337 |



**Type 6 Radar Waveform\_10**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5303 | 5571 | 5381 | 5287 | 5597 |
| 5                    | 5309 | 5401 | 5715 | 5407 | 5633 |
| 10                   | 5291 | 5254 | 5521 | 5260 | 5496 |
| 15                   | 5257 | 5477 | 5429 | 5634 | 5616 |
| 20                   | 5334 | 5694 | 5515 | 5285 | 5332 |
| 25                   | 5463 | 5356 | 5669 | 5268 | 5453 |
| 30                   | 5385 | 5410 | 5518 | 5599 | 5517 |
| 35                   | 5702 | 5365 | 5626 | 5659 | 5383 |
| 40                   | 5274 | 5272 | 5712 | 5595 | 5271 |
| 45                   | 5533 | 5344 | 5277 | 5586 | 5704 |
| 50                   | 5619 | 5266 | 5403 | 5346 | 5302 |
| 55                   | 5481 | 5392 | 5393 | 5486 | 5527 |
| 60                   | 5253 | 5569 | 5350 | 5386 | 5280 |
| 65                   | 5459 | 5528 | 5700 | 5483 | 5310 |
| 70                   | 5294 | 5512 | 5408 | 5394 | 5575 |
| 75                   | 5716 | 5592 | 5406 | 5516 | 5502 |
| 80                   | 5364 | 5606 | 5492 | 5304 | 5338 |
| 85                   | 5703 | 5608 | 5532 | 5689 | 5427 |
| 90                   | 5433 | 5624 | 5293 | 5411 | 5640 |
| 95                   | 5308 | 5351 | 5387 | 5600 | 5656 |

**Type 6 Radar Waveform\_11**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5558 | 5335 | 5317 | 5448 | 5439 |
| 5                    | 5326 | 5315 | 5570 | 5365 | 5697 |
| 10                   | 5518 | 5659 | 5455 | 5517 | 5345 |
| 15                   | 5604 | 5532 | 5679 | 5333 | 5720 |
| 20                   | 5385 | 5456 | 5374 | 5305 | 5254 |
| 25                   | 5281 | 5462 | 5298 | 5302 | 5495 |
| 30                   | 5274 | 5367 | 5636 | 5373 | 5715 |
| 35                   | 5366 | 5422 | 5434 | 5394 | 5588 |
| 40                   | 5355 | 5650 | 5360 | 5268 | 5265 |
| 45                   | 5402 | 5330 | 5473 | 5580 | 5320 |
| 50                   | 5520 | 5701 | 5290 | 5393 | 5435 |
| 55                   | 5417 | 5589 | 5364 | 5692 | 5673 |
| 60                   | 5498 | 5273 | 5429 | 5527 | 5704 |
| 65                   | 5398 | 5286 | 5382 | 5280 | 5628 |
| 70                   | 5361 | 5384 | 5711 | 5363 | 5454 |
| 75                   | 5621 | 5369 | 5419 | 5297 | 5666 |
| 80                   | 5675 | 5313 | 5334 | 5267 | 5530 |
| 85                   | 5571 | 5562 | 5412 | 5592 | 5658 |
| 90                   | 5423 | 5657 | 5381 | 5660 | 5490 |
| 95                   | 5420 | 5276 | 5356 | 5546 | 5401 |

**Type 6 Radar Waveform\_12**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5338 | 5671 | 5253 | 5609 | 5659 |
| 5                    | 5490 | 5348 | 5390 | 5636 | 5669 |
| 10                   | 5531 | 5307 | 5700 | 5650 | 5538 |
| 15                   | 5336 | 5256 | 5635 | 5627 | 5525 |
| 20                   | 5454 | 5397 | 5366 | 5278 | 5617 |
| 25                   | 5705 | 5665 | 5402 | 5537 | 5638 |
| 30                   | 5324 | 5376 | 5535 | 5408 | 5547 |
| 35                   | 5315 | 5587 | 5308 | 5524 | 5438 |
| 40                   | 5588 | 5503 | 5362 | 5294 | 5720 |
| 45                   | 5460 | 5383 | 5263 | 5456 | 5496 |
| 50                   | 5368 | 5612 | 5581 | 5389 | 5607 |
| 55                   | 5713 | 5647 | 5382 | 5618 | 5330 |
| 60                   | 5574 | 5375 | 5653 | 5434 | 5667 |
| 65                   | 5387 | 5564 | 5551 | 5363 | 5631 |
| 70                   | 5670 | 5710 | 5477 | 5289 | 5678 |
| 75                   | 5621 | 5529 | 5553 | 5355 | 5358 |
| 80                   | 5313 | 5651 | 5327 | 5625 | 5536 |
| 85                   | 5613 | 5707 | 5282 | 5445 | 5595 |
| 90                   | 5435 | 5532 | 5674 | 5418 | 5416 |
| 95                   | 5279 | 5639 | 5593 | 5274 | 5568 |



**Type 6 Radar Waveform\_13**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5593 | 5435 | 5664 | 5295 | 5501 |
| 5                    | 5532 | 5273 | 5465 | 5324 | 5401 |
| 10                   | 5462 | 5668 | 5266 | 5559 | 5424 |
| 15                   | 5383 | 5263 | 5672 | 5339 | 5261 |
| 20                   | 5620 | 5455 | 5251 | 5505 | 5557 |
| 25                   | 5393 | 5506 | 5370 | 5676 | 5624 |
| 30                   | 5281 | 5591 | 5299 | 5258 | 5547 |
| 35                   | 5260 | 5586 | 5265 | 5697 | 5363 |
| 40                   | 5618 | 5526 | 5268 | 5359 | 5601 |
| 45                   | 5603 | 5521 | 5421 | 5436 | 5625 |
| 50                   | 5332 | 5419 | 5698 | 5250 | 5556 |
| 55                   | 5294 | 5343 | 5322 | 5702 | 5684 |
| 60                   | 5301 | 5660 | 5637 | 5400 | 5321 |
| 65                   | 5551 | 5602 | 5470 | 5402 | 5657 |
| 70                   | 5367 | 5623 | 5349 | 5256 | 5437 |
| 75                   | 5714 | 5629 | 5679 | 5597 | 5335 |
| 80                   | 5659 | 5639 | 5334 | 5422 | 5326 |
| 85                   | 5338 | 5691 | 5590 | 5290 | 5342 |
| 90                   | 5404 | 5567 | 5704 | 5430 | 5447 |
| 95                   | 5451 | 5317 | 5641 | 5313 | 5473 |

**Type 6 Radar Waveform\_14**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5276 | 5674 | 5600 | 5456 | 5721 |
| 5                    | 5574 | 5295 | 5540 | 5487 | 5608 |
| 10                   | 5393 | 5457 | 5307 | 5468 | 5580 |
| 15                   | 5512 | 5510 | 5269 | 5717 | 5531 |
| 20                   | 5647 | 5311 | 5376 | 5447 | 5321 |
| 25                   | 5296 | 5409 | 5596 | 5610 | 5404 |
| 30                   | 5718 | 5513 | 5713 | 5331 | 5451 |
| 35                   | 5553 | 5686 | 5351 | 5382 | 5515 |
| 40                   | 5708 | 5677 | 5701 | 5367 | 5508 |
| 45                   | 5356 | 5530 | 5583 | 5604 | 5479 |
| 50                   | 5489 | 5415 | 5586 | 5373 | 5470 |
| 55                   | 5312 | 5548 | 5403 | 5482 | 5297 |
| 60                   | 5521 | 5655 | 5430 | 5712 | 5605 |
| 65                   | 5469 | 5323 | 5364 | 5277 | 5551 |
| 70                   | 5709 | 5549 | 5645 | 5317 | 5335 |
| 75                   | 5259 | 5286 | 5690 | 5588 | 5648 |
| 80                   | 5478 | 5640 | 5652 | 5590 | 5389 |
| 85                   | 5255 | 5533 | 5594 | 5432 | 5350 |
| 90                   | 5437 | 5369 | 5618 | 5477 | 5628 |
| 95                   | 5612 | 5554 | 5566 | 5653 | 5330 |

**Type 6 Radar Waveform\_15**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5531 | 5438 | 5536 | 5617 | 5563 |
| 5                    | 5713 | 5695 | 5615 | 5650 | 5340 |
| 10                   | 5702 | 5721 | 5348 | 5663 | 5601 |
| 15                   | 5600 | 5540 | 5372 | 5287 | 5723 |
| 20                   | 5655 | 5380 | 5317 | 5294 | 5659 |
| 25                   | 5358 | 5324 | 5336 | 5285 | 5499 |
| 30                   | 5670 | 5449 | 5700 | 5373 | 5350 |
| 35                   | 5442 | 5275 | 5668 | 5622 | 5516 |
| 40                   | 5309 | 5305 | 5273 | 5353 | 5459 |
| 45                   | 5687 | 5537 | 5445 | 5302 | 5462 |
| 50                   | 5549 | 5521 | 5401 | 5371 | 5347 |
| 55                   | 5251 | 5605 | 5718 | 5626 | 5559 |
| 60                   | 5402 | 5550 | 5398 | 5624 | 5310 |
| 65                   | 5575 | 5500 | 5444 | 5344 | 5448 |
| 70                   | 5389 | 5321 | 5262 | 5610 | 5666 |
| 75                   | 5547 | 5520 | 5362 | 5524 | 5330 |
| 80                   | 5252 | 5253 | 5594 | 5274 | 5313 |
| 85                   | 5629 | 5712 | 5572 | 5250 | 5560 |
| 90                   | 5583 | 5465 | 5382 | 5427 | 5359 |
| 95                   | 5254 | 5526 | 5432 | 5703 | 5352 |



**Type 6 Radar Waveform\_16**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5311 | 5677 | 5472 | 5303 | 5308 |
| 5                    | 5280 | 5717 | 5690 | 5716 | 5644 |
| 10                   | 5633 | 5510 | 5389 | 5383 | 5622 |
| 15                   | 5591 | 5667 | 5475 | 5710 | 5440 |
| 20                   | 5663 | 5546 | 5355 | 5528 | 5267 |
| 25                   | 5450 | 5685 | 5430 | 5375 | 5424 |
| 30                   | 5388 | 5627 | 5664 | 5377 | 5571 |
| 35                   | 5392 | 5533 | 5346 | 5536 | 5452 |
| 40                   | 5489 | 5718 | 5416 | 5350 | 5291 |
| 45                   | 5543 | 5295 | 5595 | 5498 | 5567 |
| 50                   | 5338 | 5250 | 5572 | 5587 | 5669 |
| 55                   | 5680 | 5320 | 5537 | 5500 | 5495 |
| 60                   | 5705 | 5547 | 5256 | 5301 | 5384 |
| 65                   | 5276 | 5614 | 5629 | 5558 | 5404 |
| 70                   | 5362 | 5459 | 5642 | 5506 | 5482 |
| 75                   | 5699 | 5582 | 5397 | 5439 | 5612 |
| 80                   | 5724 | 5448 | 5497 | 5688 | 5373 |
| 85                   | 5623 | 5646 | 5467 | 5566 | 5341 |
| 90                   | 5299 | 5364 | 5638 | 5449 | 5361 |
| 95                   | 5530 | 5557 | 5466 | 5653 | 5402 |

**Type 6 Radar Waveform\_17**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5566 | 5441 | 5408 | 5464 | 5625 |
| 5                    | 5322 | 5642 | 5290 | 5404 | 5376 |
| 10                   | 5564 | 5299 | 5430 | 5578 | 5643 |
| 15                   | 5679 | 5319 | 5280 | 5632 | 5574 |
| 20                   | 5615 | 5296 | 5617 | 5715 | 5338 |
| 25                   | 5634 | 5633 | 5544 | 5409 | 5466 |
| 30                   | 5277 | 5584 | 5626 | 5391 | 5531 |
| 35                   | 5624 | 5342 | 5596 | 5450 | 5291 |
| 40                   | 5572 | 5656 | 5444 | 5695 | 5523 |
| 45                   | 5378 | 5556 | 5551 | 5454 | 5689 |
| 50                   | 5426 | 5623 | 5676 | 5395 | 5613 |
| 55                   | 5474 | 5537 | 5510 | 5356 | 5471 |
| 60                   | 5720 | 5257 | 5373 | 5677 | 5502 |
| 65                   | 5495 | 5420 | 5486 | 5506 | 5432 |
| 70                   | 5630 | 5390 | 5365 | 5686 | 5521 |
| 75                   | 5465 | 5361 | 5505 | 5335 | 5680 |
| 80                   | 5359 | 5410 | 5675 | 5721 | 5265 |
| 85                   | 5400 | 5530 | 5336 | 5545 | 5577 |
| 90                   | 5271 | 5571 | 5601 | 5478 | 5693 |
| 95                   | 5433 | 5341 | 5718 | 5377 | 5652 |

**Type 6 Radar Waveform\_18**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5724 | 5680 | 5344 | 5528 | 5370 |
| 5                    | 5364 | 5664 | 5365 | 5567 | 5583 |
| 10                   | 5398 | 5660 | 5471 | 5676 | 5292 |
| 15                   | 5446 | 5681 | 5325 | 5349 | 5582 |
| 20                   | 5306 | 5712 | 5609 | 5688 | 5604 |
| 25                   | 5486 | 5361 | 5648 | 5443 | 5508 |
| 30                   | 5263 | 5541 | 5619 | 5303 | 5589 |
| 35                   | 5670 | 5715 | 5613 | 5274 | 5461 |
| 40                   | 5605 | 5655 | 5594 | 5421 | 5441 |
| 45                   | 5527 | 5503 | 5614 | 5719 | 5468 |
| 50                   | 5602 | 5674 | 5290 | 5693 | 5460 |
| 55                   | 5662 | 5491 | 5700 | 5553 | 5442 |
| 60                   | 5374 | 5422 | 5482 | 5369 | 5720 |
| 65                   | 5444 | 5456 | 5318 | 5301 | 5710 |
| 70                   | 5324 | 5376 | 5465 | 5535 | 5497 |
| 75                   | 5424 | 5330 | 5625 | 5381 | 5661 |
| 80                   | 5611 | 5520 | 5718 | 5400 | 5469 |
| 85                   | 5299 | 5633 | 5510 | 5628 | 5519 |
| 90                   | 5322 | 5675 | 5483 | 5517 | 5495 |
| 95                   | 5273 | 5514 | 5714 | 5697 | 5261 |





**Type 6 Radar Waveform\_19**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5504 | 5444 | 5280 | 5689 | 5687 |
| 5                    | 5503 | 5589 | 5440 | 5255 | 5412 |
| 10                   | 5329 | 5449 | 5609 | 5396 | 5685 |
| 15                   | 5380 | 5476 | 5273 | 5541 | 5590 |
| 20                   | 5375 | 5275 | 5698 | 5661 | 5492 |
| 25                   | 5338 | 5564 | 5374 | 5477 | 5647 |
| 30                   | 5627 | 5498 | 5262 | 5552 | 5409 |
| 35                   | 5712 | 5428 | 5506 | 5427 | 5263 |
| 40                   | 5532 | 5438 | 5456 | 5483 | 5544 |
| 45                   | 5672 | 5657 | 5606 | 5344 | 5303 |
| 50                   | 5250 | 5379 | 5516 | 5404 | 5445 |
| 55                   | 5415 | 5372 | 5413 | 5587 | 5676 |
| 60                   | 5597 | 5666 | 5526 | 5393 | 5395 |
| 65                   | 5528 | 5668 | 5513 | 5362 | 5468 |
| 70                   | 5384 | 5473 | 5286 | 5677 | 5270 |
| 75                   | 5524 | 5642 | 5291 | 5533 | 5359 |
| 80                   | 5423 | 5618 | 5655 | 5311 | 5253 |
| 85                   | 5378 | 5582 | 5292 | 5484 | 5487 |
| 90                   | 5681 | 5542 | 5365 | 5529 | 5512 |
| 95                   | 5328 | 5612 | 5579 | 5267 | 5298 |

**Type 6 Radar Waveform\_20**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5284 | 5683 | 5691 | 5375 | 5432 |
| 5                    | 5545 | 5611 | 5515 | 5418 | 5619 |
| 10                   | 5638 | 5713 | 5650 | 5591 | 5706 |
| 15                   | 5371 | 5603 | 5315 | 5318 | 5258 |
| 20                   | 5501 | 5541 | 5690 | 5634 | 5380 |
| 25                   | 5287 | 5292 | 5478 | 5511 | 5689 |
| 30                   | 5516 | 5455 | 5477 | 5704 | 5607 |
| 35                   | 5376 | 5519 | 5302 | 5677 | 5289 |
| 40                   | 5283 | 5443 | 5470 | 5329 | 5435 |
| 45                   | 5385 | 5366 | 5627 | 5633 | 5710 |
| 50                   | 5396 | 5695 | 5479 | 5301 | 5565 |
| 55                   | 5339 | 5251 | 5563 | 5399 | 5605 |
| 60                   | 5666 | 5632 | 5277 | 5469 | 5423 |
| 65                   | 5612 | 5349 | 5342 | 5431 | 5360 |
| 70                   | 5463 | 5316 | 5468 | 5445 | 5568 |
| 75                   | 5708 | 5449 | 5720 | 5646 | 5390 |
| 80                   | 5570 | 5623 | 5543 | 5643 | 5701 |
| 85                   | 5523 | 5486 | 5615 | 5681 | 5628 |
| 90                   | 5322 | 5343 | 5536 | 5682 | 5652 |
| 95                   | 5687 | 5576 | 5625 | 5529 | 5383 |

**Type 6 Radar Waveform\_21**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5539 | 5447 | 5627 | 5536 | 5274 |
| 5                    | 5587 | 5590 | 5484 | 5351 | 5569 |
| 10                   | 5502 | 5691 | 5311 | 5252 | 5459 |
| 15                   | 5255 | 5418 | 5363 | 5547 | 5509 |
| 20                   | 5610 | 5632 | 5304 | 5607 | 5646 |
| 25                   | 5614 | 5398 | 5582 | 5545 | 5256 |
| 30                   | 5412 | 5692 | 5478 | 5427 | 5515 |
| 35                   | 5573 | 5355 | 5300 | 5694 | 5526 |
| 40                   | 5408 | 5432 | 5346 | 5710 | 5288 |
| 45                   | 5283 | 5571 | 5655 | 5352 | 5654 |
| 50                   | 5540 | 5670 | 5276 | 5353 | 5320 |
| 55                   | 5485 | 5258 | 5286 | 5442 | 5414 |
| 60                   | 5437 | 5724 | 5550 | 5291 | 5467 |
| 65                   | 5570 | 5497 | 5637 | 5431 | 5460 |
| 70                   | 5425 | 5679 | 5518 | 5413 | 5713 |
| 75                   | 5604 | 5278 | 5482 | 5549 | 5612 |
| 80                   | 5681 | 5567 | 5382 | 5686 | 5342 |
| 85                   | 5693 | 5513 | 5507 | 5272 | 5546 |
| 90                   | 5438 | 5563 | 5537 | 5473 | 5316 |
| 95                   | 5673 | 5399 | 5527 | 5322 | 5367 |



**Type 6 Radar Waveform\_22**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5319 | 5686 | 5563 | 5697 | 5494 |
| 5                    | 5251 | 5558 | 5665 | 5647 | 5655 |
| 10                   | 5500 | 5291 | 5257 | 5506 | 5273 |
| 15                   | 5547 | 5382 | 5521 | 5408 | 5264 |
| 20                   | 5517 | 5301 | 5573 | 5296 | 5580 |
| 25                   | 5534 | 5601 | 5579 | 5298 | 5391 |
| 30                   | 5369 | 5432 | 5630 | 5625 | 5654 |
| 35                   | 5701 | 5466 | 5508 | 5689 | 5533 |
| 40                   | 5609 | 5724 | 5334 | 5526 | 5621 |
| 45                   | 5326 | 5318 | 5274 | 5719 | 5548 |
| 50                   | 5350 | 5356 | 5403 | 5268 | 5363 |
| 55                   | 5464 | 5307 | 5413 | 5682 | 5704 |
| 60                   | 5607 | 5359 | 5269 | 5373 | 5715 |
| 65                   | 5406 | 5402 | 5300 | 5709 | 5417 |
| 70                   | 5671 | 5309 | 5401 | 5638 | 5487 |
| 75                   | 5284 | 5585 | 5572 | 5263 | 5279 |
| 80                   | 5387 | 5584 | 5409 | 5345 | 5651 |
| 85                   | 5541 | 5700 | 5507 | 5699 | 5292 |
| 90                   | 5660 | 5493 | 5306 | 5419 | 5576 |
| 95                   | 5514 | 5555 | 5410 | 5394 | 5496 |

**Type 6 Radar Waveform\_23**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5477 | 5450 | 5499 | 5383 | 5336 |
| 5                    | 5293 | 5483 | 5265 | 5335 | 5387 |
| 10                   | 5334 | 5652 | 5298 | 5604 | 5294 |
| 15                   | 5635 | 5509 | 5624 | 5356 | 5456 |
| 20                   | 5428 | 5370 | 5611 | 5385 | 5553 |
| 25                   | 5325 | 5415 | 5329 | 5412 | 5613 |
| 30                   | 5437 | 5280 | 5326 | 5550 | 5404 |
| 35                   | 5445 | 5696 | 5317 | 5262 | 5283 |
| 40                   | 5603 | 5372 | 5314 | 5662 | 5523 |
| 45                   | 5453 | 5306 | 5401 | 5710 | 5297 |
| 50                   | 5435 | 5701 | 5532 | 5454 | 5357 |
| 55                   | 5661 | 5461 | 5261 | 5501 | 5675 |
| 60                   | 5447 | 5304 | 5576 | 5473 | 5547 |
| 65                   | 5574 | 5664 | 5442 | 5612 | 5420 |
| 70                   | 5578 | 5403 | 5674 | 5633 | 5597 |
| 75                   | 5653 | 5427 | 5566 | 5349 | 5519 |
| 80                   | 5443 | 5606 | 5582 | 5487 | 5251 |
| 85                   | 5405 | 5449 | 5592 | 5712 | 5520 |
| 90                   | 5672 | 5327 | 5484 | 5649 | 5393 |
| 95                   | 5677 | 5548 | 5531 | 5301 | 5398 |

**Type 6 Radar Waveform\_24**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5257 | 5689 | 5435 | 5544 | 5556 |
| 5                    | 5335 | 5505 | 5340 | 5498 | 5594 |
| 10                   | 5265 | 5441 | 5339 | 5324 | 5315 |
| 15                   | 5626 | 5539 | 5630 | 5401 | 5648 |
| 20                   | 5436 | 5536 | 5552 | 5377 | 5526 |
| 25                   | 5688 | 5267 | 5532 | 5516 | 5647 |
| 30                   | 5479 | 5266 | 5283 | 5290 | 5360 |
| 35                   | 5533 | 5614 | 5686 | 5397 | 5600 |
| 40                   | 5717 | 5520 | 5382 | 5286 | 5581 |
| 45                   | 5293 | 5350 | 5700 | 5577 | 5708 |
| 50                   | 5543 | 5484 | 5308 | 5268 | 5690 |
| 55                   | 5318 | 5320 | 5549 | 5576 | 5462 |
| 60                   | 5346 | 5408 | 5396 | 5493 | 5300 |
| 65                   | 5613 | 5381 | 5444 | 5312 | 5475 |
| 70                   | 5486 | 5677 | 5482 | 5256 | 5328 |
| 75                   | 5298 | 5473 | 5644 | 5504 | 5511 |
| 80                   | 5607 | 5506 | 5302 | 5487 | 5665 |
| 85                   | 5368 | 5641 | 5546 | 5485 | 5718 |
| 90                   | 5362 | 5333 | 5518 | 5531 | 5502 |
| 95                   | 5694 | 5603 | 5612 | 5674 | 5280 |



**Type 6 Radar Waveform\_25**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5512 | 5453 | 5371 | 5608 | 5398 |
| 5                    | 5377 | 5527 | 5415 | 5564 | 5423 |
| 10                   | 5671 | 5705 | 5380 | 5519 | 5336 |
| 15                   | 5714 | 5666 | 5258 | 5446 | 5365 |
| 20                   | 5444 | 5702 | 5493 | 5466 | 5499 |
| 25                   | 5479 | 5691 | 5260 | 5620 | 5681 |
| 30                   | 5521 | 5630 | 5715 | 5505 | 5330 |
| 35                   | 5463 | 5596 | 5329 | 5589 | 5528 |
| 40                   | 5622 | 5480 | 5538 | 5482 | 5517 |
| 45                   | 5311 | 5266 | 5664 | 5351 | 5403 |
| 50                   | 5587 | 5356 | 5409 | 5556 | 5632 |
| 55                   | 5685 | 5252 | 5456 | 5644 | 5508 |
| 60                   | 5520 | 5627 | 5291 | 5337 | 5697 |
| 65                   | 5536 | 5598 | 5562 | 5417 | 5654 |
| 70                   | 5582 | 5659 | 5472 | 5302 | 5331 |
| 75                   | 5707 | 5515 | 5297 | 5418 | 5616 |
| 80                   | 5625 | 5281 | 5524 | 5674 | 5503 |
| 85                   | 5497 | 5390 | 5507 | 5428 | 5261 |
| 90                   | 5352 | 5597 | 5339 | 5455 | 5316 |
| 95                   | 5514 | 5711 | 5658 | 5572 | 5259 |

**Type 6 Radar Waveform\_26**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5292 | 5692 | 5307 | 5294 | 5618 |
| 5                    | 5516 | 5452 | 5490 | 5252 | 5630 |
| 10                   | 5505 | 5494 | 5421 | 5714 | 5357 |
| 15                   | 5327 | 5318 | 5361 | 5491 | 5557 |
| 20                   | 5355 | 5296 | 5531 | 5458 | 5472 |
| 25                   | 5367 | 5543 | 5366 | 5724 | 5715 |
| 30                   | 5660 | 5616 | 5672 | 5720 | 5482 |
| 35                   | 5283 | 5541 | 5687 | 5697 | 5364 |
| 40                   | 5442 | 5461 | 5563 | 5476 | 5722 |
| 45                   | 5514 | 5624 | 5272 | 5312 | 5456 |
| 50                   | 5377 | 5707 | 5585 | 5607 | 5721 |
| 55                   | 5508 | 5574 | 5644 | 5598 | 5698 |
| 60                   | 5336 | 5359 | 5317 | 5711 | 5523 |
| 65                   | 5324 | 5511 | 5453 | 5486 | 5474 |
| 70                   | 5365 | 5716 | 5305 | 5558 | 5683 |
| 75                   | 5441 | 5284 | 5606 | 5533 | 5634 |
| 80                   | 5337 | 5363 | 5583 | 5500 | 5293 |
| 85                   | 5446 | 5391 | 5695 | 5551 | 5506 |
| 90                   | 5261 | 5345 | 5489 | 5673 | 5623 |
| 95                   | 5350 | 5713 | 5580 | 5470 | 5513 |

**Type 6 Radar Waveform\_27**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5450 | 5553 | 5718 | 5455 | 5460 |
| 5                    | 5558 | 5474 | 5565 | 5415 | 5362 |
| 10                   | 5436 | 5283 | 5559 | 5434 | 5378 |
| 15                   | 5445 | 5464 | 5439 | 5274 | 5363 |
| 20                   | 5462 | 5472 | 5547 | 5255 | 5492 |
| 25                   | 5569 | 5702 | 5505 | 5629 | 5256 |
| 30                   | 5481 | 5680 | 5303 | 5493 | 5517 |
| 35                   | 5453 | 5300 | 5268 | 5414 | 5390 |
| 40                   | 5608 | 5604 | 5355 | 5370 | 5509 |
| 45                   | 5264 | 5583 | 5286 | 5658 | 5335 |
| 50                   | 5331 | 5518 | 5357 | 5552 | 5413 |
| 55                   | 5630 | 5391 | 5482 | 5656 | 5476 |
| 60                   | 5446 | 5428 | 5622 | 5392 | 5696 |
| 65                   | 5269 | 5643 | 5410 | 5541 | 5405 |
| 70                   | 5407 | 5659 | 5433 | 5613 | 5561 |
| 75                   | 5330 | 5587 | 5310 | 5593 | 5527 |
| 80                   | 5646 | 5497 | 5293 | 5288 | 5451 |
| 85                   | 5548 | 5660 | 5602 | 5279 | 5459 |
| 90                   | 5382 | 5448 | 5426 | 5458 | 5257 |
| 95                   | 5367 | 5661 | 5368 | 5595 | 5616 |



**Type 6 Radar Waveform\_28**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5705 | 5317 | 5654 | 5616 | 5680 |
| 5                    | 5600 | 5399 | 5640 | 5578 | 5666 |
| 10                   | 5270 | 5644 | 5532 | 5406 | 5572 |
| 15                   | 5567 | 5484 | 5563 | 5371 | 5531 |
| 20                   | 5413 | 5539 | 5418 | 5521 | 5344 |
| 25                   | 5297 | 5554 | 5308 | 5269 | 5394 |
| 30                   | 5586 | 5408 | 5301 | 5289 | 5670 |
| 35                   | 5367 | 5614 | 5351 | 5352 | 5630 |
| 40                   | 5605 | 5379 | 5584 | 5438 | 5428 |
| 45                   | 5465 | 5529 | 5459 | 5462 | 5709 |
| 50                   | 5424 | 5629 | 5545 | 5506 | 5603 |
| 55                   | 5449 | 5336 | 5520 | 5647 | 5698 |
| 60                   | 5272 | 5471 | 5348 | 5409 | 5528 |
| 65                   | 5446 | 5482 | 5527 | 5256 | 5635 |
| 70                   | 5392 | 5485 | 5681 | 5473 | 5568 |
| 75                   | 5562 | 5282 | 5374 | 5691 | 5494 |
| 80                   | 5704 | 5671 | 5414 | 5265 | 5556 |
| 85                   | 5430 | 5279 | 5547 | 5454 | 5460 |
| 90                   | 5340 | 5384 | 5645 | 5266 | 5477 |
| 95                   | 5719 | 5456 | 5257 | 5364 | 5368 |

**Type 6 Radar Waveform\_29**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5485 | 5556 | 5687 | 5302 | 5522 |
| 5                    | 5642 | 5421 | 5715 | 5644 | 5398 |
| 10                   | 5676 | 5433 | 5641 | 5252 | 5420 |
| 15                   | 5494 | 5602 | 5573 | 5529 | 5280 |
| 20                   | 5282 | 5697 | 5451 | 5628 | 5391 |
| 25                   | 5409 | 5671 | 5500 | 5658 | 5342 |
| 30                   | 5408 | 5380 | 5543 | 5318 | 5657 |
| 35                   | 5499 | 5483 | 5582 | 5348 | 5281 |
| 40                   | 5453 | 5434 | 5668 | 5395 | 5308 |
| 45                   | 5564 | 5521 | 5389 | 5518 | 5416 |
| 50                   | 5713 | 5638 | 5285 | 5610 | 5355 |
| 55                   | 5309 | 5258 | 5363 | 5696 | 5646 |
| 60                   | 5307 | 5649 | 5337 | 5643 | 5712 |
| 65                   | 5417 | 5358 | 5367 | 5263 | 5431 |
| 70                   | 5724 | 5651 | 5513 | 5508 | 5580 |
| 75                   | 5514 | 5351 | 5454 | 5326 | 5519 |
| 80                   | 5549 | 5339 | 5392 | 5630 | 5283 |
| 85                   | 5394 | 5424 | 5574 | 5544 | 5474 |
| 90                   | 5457 | 5493 | 5607 | 5678 | 5477 |
| 95                   | 5460 | 5378 | 5401 | 5403 | 5629 |



|               |  |                   |            |
|---------------|--|-------------------|------------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                                      | Temperature       | 22°C       |
| Test Engineer | Peter  | Relative Humidity | 60%        |
| Test Site     | SR5  | Test Date         | 2022/05/07 |
| Test Item     | Radar Statistical Performance Check (802.11ax-HE40 mode – 5510MHz) |                   |            |

## Radar Type 1-4 - Radar Statistical Performance

| Trial | Frequency<br>(MHz) | 1=Detection, 0=No Detection |              |              |              |
|-------|--------------------|-----------------------------|--------------|--------------|--------------|
|       |                    | Radar Type 1                | Radar Type 2 | Radar Type 3 | Radar Type 4 |
| 0     | 5491.0             | 1                           | 0            | 1            | 1            |
| 1     | 5492.3             | 1                           | 1            | 0            | 1            |
| 2     | 5493.6             | 1                           | 1            | 1            | 1            |
| 3     | 5494.9             | 1                           | 1            | 1            | 0            |
| 4     | 5496.2             | 1                           | 1            | 1            | 1            |
| 5     | 5497.6             | 1                           | 1            | 1            | 1            |
| 6     | 5498.9             | 1                           | 1            | 1            | 1            |
| 7     | 5500.2             | 1                           | 1            | 1            | 1            |
| 8     | 5501.5             | 1                           | 1            | 1            | 1            |
| 9     | 5502.8             | 1                           | 1            | 1            | 1            |
| 10    | 5504.1             | 1                           | 1            | 1            | 1            |
| 11    | 5505.4             | 1                           | 1            | 1            | 1            |
| 12    | 5506.7             | 1                           | 1            | 0            | 1            |
| 13    | 5508.0             | 1                           | 1            | 1            | 1            |
| 14    | 5509.3             | 1                           | 1            | 1            | 1            |
| 15    | 5510.0             | 1                           | 1            | 1            | 1            |
| 16    | 5511.3             | 1                           | 1            | 1            | 1            |
| 17    | 5512.6             | 1                           | 1            | 1            | 1            |
| 18    | 5513.9             | 1                           | 0            | 1            | 1            |
| 19    | 5515.2             | 1                           | 1            | 1            | 1            |
| 20    | 5516.6             | 1                           | 1            | 1            | 1            |
| 21    | 5517.9             | 1                           | 1            | 1            | 1            |
| 22    | 5519.2             | 1                           | 1            | 1            | 1            |
| 23    | 5520.5             | 1                           | 1            | 1            | 1            |
| 24    | 5521.8             | 0                           | 0            | 0            | 0            |
| 25    | 5523.1             | 0                           | 0            | 0            | 0            |
| 26    | 5524.4             | 1                           | 1            | 1            | 1            |



| Trial        | Frequency | 1=Detection,<br>0=No Detection | Trial | Frequency | 1=Detection,<br>0=No Detection |
|--------------|-----------|--------------------------------|-------|-----------|--------------------------------|
| 27           | 5525.7    | 1                              | 1     | 1         | 1                              |
| 28           | 5527.0    | 1                              | 1     | 1         | 1                              |
| 29           | 5529.0    | 1                              | 1     | 1         | 1                              |
| Probability: |           | 93.3%                          | 86.6% | 86.6%     | 90%                            |
| Type1-4      |           | 89.125% (>80%)                 |       |           |                                |

Radar Type 1 - Radar Waveform

|          | Trial Id | Radar Type | Pulse Width (us) | PRI (us) | Number of Pulses | Waveform Length (us) |
|----------|----------|------------|------------------|----------|------------------|----------------------|
| Download | 0        | Type 1     | 1.0              | 518.0    | 102              | 52836.0              |
| Download | 1        | Type 1     | 1.0              | 698.0    | 76               | 53048.0              |
| Download | 2        | Type 1     | 1.0              | 938.0    | 57               | 53466.0              |
| Download | 3        | Type 1     | 1.0              | 878.0    | 61               | 53558.0              |
| Download | 4        | Type 1     | 1.0              | 898.0    | 59               | 52982.0              |
| Download | 5        | Type 1     | 1.0              | 3066.0   | 18               | 55188.0              |
| Download | 6        | Type 1     | 1.0              | 778.0    | 68               | 52904.0              |
| Download | 7        | Type 1     | 1.0              | 678.0    | 78               | 52884.0              |
| Download | 8        | Type 1     | 1.0              | 558.0    | 95               | 53010.0              |
| Download | 9        | Type 1     | 1.0              | 718.0    | 74               | 53132.0              |
| Download | 10       | Type 1     | 1.0              | 918.0    | 58               | 53244.0              |
| Download | 11       | Type 1     | 1.0              | 738.0    | 72               | 53136.0              |
| Download | 12       | Type 1     | 1.0              | 538.0    | 99               | 53262.0              |
| Download | 13       | Type 1     | 1.0              | 758.0    | 70               | 53060.0              |
| Download | 14       | Type 1     | 1.0              | 618.0    | 86               | 53148.0              |
| Download | 15       | Type 1     | 1.0              | 2645.0   | 20               | 52900.0              |
| Download | 16       | Type 1     | 1.0              | 840.0    | 63               | 52920.0              |
| Download | 17       | Type 1     | 1.0              | 1028.0   | 52               | 53456.0              |
| Download | 18       | Type 1     | 1.0              | 929.0    | 57               | 52953.0              |
| Download | 19       | Type 1     | 1.0              | 2012.0   | 27               | 54324.0              |
| Download | 20       | Type 1     | 1.0              | 2014.0   | 27               | 54378.0              |
| Download | 21       | Type 1     | 1.0              | 1693.0   | 32               | 54176.0              |
| Download | 22       | Type 1     | 1.0              | 2502.0   | 22               | 55044.0              |
| Download | 23       | Type 1     | 1.0              | 755.0    | 70               | 52850.0              |
| Download | 24       | Type 1     | 1.0              | 1130.0   | 47               | 53110.0              |
| Download | 25       | Type 1     | 1.0              | 2917.0   | 19               | 55423.0              |
| Download | 26       | Type 1     | 1.0              | 1550.0   | 35               | 54250.0              |
| Download | 27       | Type 1     | 1.0              | 1237.0   | 43               | 53191.0              |
| Download | 28       | Type 1     | 1.0              | 2550.0   | 21               | 53550.0              |
| Download | 29       | Type 1     | 1.0              | 574.0    | 92               | 52808.0              |

## Radar Type 2 - Radar Waveform

|          | <b>Trial Id</b> | <b>Radar Type</b> | <b>Pulse Width (us)</b> | <b>PRI (us)</b> | <b>Number of Pulses</b> | <b>Waveform Length (us)</b> |
|----------|-----------------|-------------------|-------------------------|-----------------|-------------------------|-----------------------------|
| Download | 0               | Type 2            | 3.6                     | 168.0           | 27                      | 4536.0                      |
| Download | 1               | Type 2            | 1.0                     | 176.0           | 23                      | 4048.0                      |
| Download | 2               | Type 2            | 1.7                     | 218.0           | 24                      | 5232.0                      |
| Download | 3               | Type 2            | 1.2                     | 164.0           | 23                      | 3772.0                      |
| Download | 4               | Type 2            | 3.2                     | 194.0           | 26                      | 5044.0                      |
| Download | 5               | Type 2            | 2.2                     | 200.0           | 25                      | 5000.0                      |
| Download | 6               | Type 2            | 2.2                     | 220.0           | 25                      | 5500.0                      |
| Download | 7               | Type 2            | 3.3                     | 206.0           | 26                      | 5356.0                      |
| Download | 8               | Type 2            | 4.3                     | 172.0           | 28                      | 4816.0                      |
| Download | 9               | Type 2            | 2.3                     | 197.0           | 25                      | 4925.0                      |
| Download | 10              | Type 2            | 1.4                     | 174.0           | 23                      | 4002.0                      |
| Download | 11              | Type 2            | 2.6                     | 204.0           | 25                      | 5100.0                      |
| Download | 12              | Type 2            | 3.0                     | 185.0           | 26                      | 4810.0                      |
| Download | 13              | Type 2            | 4.3                     | 193.0           | 28                      | 5404.0                      |
| Download | 14              | Type 2            | 2.1                     | 173.0           | 24                      | 4152.0                      |
| Download | 15              | Type 2            | 1.8                     | 198.0           | 24                      | 4752.0                      |
| Download | 16              | Type 2            | 4.3                     | 225.0           | 28                      | 6300.0                      |
| Download | 17              | Type 2            | 4.4                     | 214.0           | 28                      | 5992.0                      |
| Download | 18              | Type 2            | 1.3                     | 192.0           | 23                      | 4416.0                      |
| Download | 19              | Type 2            | 2.8                     | 199.0           | 26                      | 5174.0                      |
| Download | 20              | Type 2            | 5.0                     | 154.0           | 29                      | 4466.0                      |
| Download | 21              | Type 2            | 3.8                     | 182.0           | 27                      | 4914.0                      |
| Download | 22              | Type 2            | 4.6                     | 226.0           | 29                      | 6554.0                      |
| Download | 23              | Type 2            | 3.7                     | 211.0           | 27                      | 5697.0                      |
| Download | 24              | Type 2            | 2.4                     | 150.0           | 25                      | 3750.0                      |
| Download | 25              | Type 2            | 1.2                     | 165.0           | 23                      | 3795.0                      |
| Download | 26              | Type 2            | 2.0                     | 202.0           | 24                      | 4848.0                      |
| Download | 27              | Type 2            | 4.9                     | 159.0           | 29                      | 4611.0                      |
| Download | 28              | Type 2            | 1.8                     | 180.0           | 24                      | 4320.0                      |
| Download | 29              | Type 2            | 4.7                     | 215.0           | 29                      | 6235.0                      |

## Radar Type 3 - Radar Waveform

|          | Trial Id | Radar Type | Pulse Width (us) | PRI (us) | Number of Pulses | Waveform Length (us) |
|----------|----------|------------|------------------|----------|------------------|----------------------|
| Download | 0        | Type 3     | 8.6              | 468.0    | 17               | 7956.0               |
| Download | 1        | Type 3     | 6.0              | 343.0    | 16               | 5488.0               |
| Download | 2        | Type 3     | 6.7              | 280.0    | 16               | 4480.0               |
| Download | 3        | Type 3     | 6.2              | 290.0    | 16               | 4640.0               |
| Download | 4        | Type 3     | 8.2              | 325.0    | 17               | 5525.0               |
| Download | 5        | Type 3     | 7.2              | 267.0    | 16               | 4272.0               |
| Download | 6        | Type 3     | 7.2              | 321.0    | 16               | 5136.0               |
| Download | 7        | Type 3     | 8.3              | 299.0    | 17               | 5083.0               |
| Download | 8        | Type 3     | 9.3              | 426.0    | 18               | 7668.0               |
| Download | 9        | Type 3     | 7.3              | 437.0    | 16               | 6992.0               |
| Download | 10       | Type 3     | 6.4              | 408.0    | 16               | 6528.0               |
| Download | 11       | Type 3     | 7.6              | 396.0    | 17               | 6732.0               |
| Download | 12       | Type 3     | 8.0              | 389.0    | 17               | 6613.0               |
| Download | 13       | Type 3     | 9.3              | 455.0    | 18               | 8190.0               |
| Download | 14       | Type 3     | 7.1              | 370.0    | 16               | 5920.0               |
| Download | 15       | Type 3     | 6.8              | 251.0    | 16               | 4016.0               |
| Download | 16       | Type 3     | 9.3              | 361.0    | 18               | 6498.0               |
| Download | 17       | Type 3     | 9.4              | 336.0    | 18               | 6048.0               |
| Download | 18       | Type 3     | 6.3              | 304.0    | 16               | 4864.0               |
| Download | 19       | Type 3     | 7.8              | 414.0    | 17               | 7038.0               |
| Download | 20       | Type 3     | 10.0             | 448.0    | 18               | 8064.0               |
| Download | 21       | Type 3     | 8.8              | 440.0    | 18               | 7920.0               |
| Download | 22       | Type 3     | 9.6              | 376.0    | 18               | 6768.0               |
| Download | 23       | Type 3     | 8.7              | 488.0    | 17               | 8296.0               |
| Download | 24       | Type 3     | 7.4              | 472.0    | 17               | 8024.0               |
| Download | 25       | Type 3     | 6.2              | 281.0    | 16               | 4496.0               |
| Download | 26       | Type 3     | 7.0              | 344.0    | 16               | 5504.0               |
| Download | 27       | Type 3     | 9.9              | 454.0    | 18               | 8172.0               |
| Download | 28       | Type 3     | 6.8              | 471.0    | 16               | 7536.0               |
| Download | 29       | Type 3     | 9.7              | 286.0    | 18               | 5148.0               |



## Radar Type 4 - Radar Waveform

|          | Trial Id | Radar Type | Pulse Width (us) | PRI (us) | Number of Pulses | Waveform Length (us) |
|----------|----------|------------|------------------|----------|------------------|----------------------|
| Download | 0        | Type 4     | 16.9             | 468.0    | 15               | 7020.0               |
| Download | 1        | Type 4     | 11.1             | 343.0    | 12               | 4116.0               |
| Download | 2        | Type 4     | 12.6             | 280.0    | 12               | 3360.0               |
| Download | 3        | Type 4     | 11.5             | 290.0    | 12               | 3480.0               |
| Download | 4        | Type 4     | 16.0             | 325.0    | 14               | 4550.0               |
| Download | 5        | Type 4     | 13.7             | 267.0    | 13               | 3471.0               |
| Download | 6        | Type 4     | 13.6             | 321.0    | 13               | 4173.0               |
| Download | 7        | Type 4     | 16.1             | 299.0    | 14               | 4186.0               |
| Download | 8        | Type 4     | 18.4             | 426.0    | 16               | 6816.0               |
| Download | 9        | Type 4     | 13.9             | 437.0    | 13               | 5681.0               |
| Download | 10       | Type 4     | 11.9             | 408.0    | 12               | 4896.0               |
| Download | 11       | Type 4     | 14.6             | 396.0    | 13               | 5148.0               |
| Download | 12       | Type 4     | 15.5             | 389.0    | 14               | 5446.0               |
| Download | 13       | Type 4     | 18.4             | 455.0    | 16               | 7280.0               |
| Download | 14       | Type 4     | 13.5             | 370.0    | 13               | 4810.0               |
| Download | 15       | Type 4     | 12.9             | 251.0    | 13               | 3263.0               |
| Download | 16       | Type 4     | 18.4             | 361.0    | 16               | 5776.0               |
| Download | 17       | Type 4     | 18.6             | 336.0    | 16               | 5376.0               |
| Download | 18       | Type 4     | 11.8             | 304.0    | 12               | 3648.0               |
| Download | 19       | Type 4     | 15.0             | 414.0    | 14               | 5796.0               |
| Download | 20       | Type 4     | 19.9             | 448.0    | 16               | 7168.0               |
| Download | 21       | Type 4     | 17.2             | 440.0    | 15               | 6600.0               |
| Download | 22       | Type 4     | 19.0             | 376.0    | 16               | 6016.0               |
| Download | 23       | Type 4     | 17.0             | 488.0    | 15               | 7320.0               |
| Download | 24       | Type 4     | 14.2             | 472.0    | 13               | 6136.0               |
| Download | 25       | Type 4     | 11.5             | 281.0    | 12               | 3372.0               |
| Download | 26       | Type 4     | 13.4             | 344.0    | 13               | 4472.0               |
| Download | 27       | Type 4     | 19.6             | 454.0    | 16               | 7264.0               |
| Download | 28       | Type 4     | 12.9             | 471.0    | 13               | 6123.0               |
| Download | 29       | Type 4     | 19.2             | 286.0    | 16               | 4576.0               |



Radar Type 5 - Radar Statistical Performance

| Trail #                  | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection | Trail # | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection |
|--------------------------|---------------------|-------------------------------|---------|---------------------|-------------------------------|
| 0                        | 5510.0              | 1                             | 15      | 5493.0              | 1                             |
| 1                        | 5510.0              | 1                             | 16      | 5497.0              | 1                             |
| 2                        | 5510.0              | 1                             | 17      | 5497.0              | 1                             |
| 3                        | 5510.0              | 1                             | 18      | 5492.0              | 1                             |
| 4                        | 5510.0              | 1                             | 19      | 5495.0              | 1                             |
| 5                        | 5510.0              | 1                             | 20      | 5522.0              | 1                             |
| 6                        | 5510.0              | 1                             | 21      | 5524.0              | 1                             |
| 7                        | 5510.0              | 1                             | 22      | 5522.0              | 1                             |
| 8                        | 5510.0              | 1                             | 23      | 5524.0              | 1                             |
| 9                        | 5510.0              | 1                             | 24      | 5526.0              | 1                             |
| 10                       | 5492.0              | 1                             | 25      | 5528.0              | 1                             |
| 11                       | 5494.0              | 1                             | 26      | 5526.0              | 1                             |
| 12                       | 5495.0              | 1                             | 27      | 5522.0              | 1                             |
| 13                       | 5497.0              | 1                             | 28      | 5527.0              | 1                             |
| 14                       | 5494.0              | 1                             | 29      | 5522.0              | 1                             |
| Detection Percentage (%) |                     |                               |         |                     | 100%                          |

| Type 5 Radar Waveform_0 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 668507.0                | 82.6             | 15                | 2                          | 1996.0     | 1029.0     | -          |
| 102902.0                | 50.7             | 15                | 1                          | 1536.0     | -          | -          |
| 284407.0                | 59.2             | 15                | 1                          | 1590.0     | -          | -          |
| 466009.0                | 52.8             | 15                | 1                          | 1447.0     | -          | -          |
| 646904.0                | 78.0             | 15                | 2                          | 1059.0     | 1143.0     | -          |
| 80533.0                 | 65.1             | 15                | 1                          | 1619.0     | -          | -          |
| 262043.0                | 64.8             | 15                | 1                          | 1608.0     | -          | -          |
| 442819.0                | 78.5             | 15                | 2                          | 1013.0     | 1830.0     | -          |
| 622994.0                | 91.0             | 15                | 3                          | 1522.0     | 1477.0     | 1083.0     |
| 58160.0                 | 66.4             | 15                | 1                          | 1818.0     | -          | -          |
| 239630.0                | 54.9             | 15                | 1                          | 1779.0     | -          | -          |
| 420387.0                | 69.9             | 15                | 2                          | 1691.0     | 1350.0     | -          |
| 601599.0                | 74.8             | 15                | 2                          | 1546.0     | 1432.0     | -          |
| 35692.0                 | 90.9             | 15                | 3                          | 1634.0     | 1120.0     | 1504.0     |
| 217225.0                | 64.2             | 15                | 1                          | 1960.0     | -          | -          |
| 398870.0                | 60.8             | 15                | 1                          | 1544.0     | -          | -          |

| Type 5 Radar Waveform_1 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 1159688.0               | 91.1             | 5                 | 3                          | 1155.0     | 1853.0     | 1500.0     |
| 26895.0                 | 92.2             | 5                 | 3                          | 1958.0     | 1018.0     | 1709.0     |
| 390342.0                | 54.6             | 5                 | 1                          | 1670.0     | -          | -          |
| 753085.0                | 72.0             | 5                 | 2                          | 1744.0     | 1216.0     | -          |
| 1115655.0               | 99.3             | 5                 | 3                          | 1294.0     | 1166.0     | 1183.0     |
| 1476837.0               | 84.2             | 5                 | 3                          | 1603.0     | 1944.0     | 1848.0     |
| 345011.0                | 94.5             | 5                 | 3                          | 1607.0     | 1263.0     | 1269.0     |
| 708709.0                | 83.3             | 5                 | 2                          | 1125.0     | 1103.0     | -          |
| Type 5 Radar Waveform_2 |                  |                   |                            |            |            |            |
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 856853.0                | 67.8             | 7                 | 2                          | 1226.0     | 1561.0     | -          |
| 1148512.0               | 53.1             | 7                 | 1                          | 1434.0     | -          | -          |
| 240583.0                | 63.3             | 7                 | 1                          | 1696.0     | -          | -          |
| 530181.0                | 97.6             | 7                 | 3                          | 1011.0     | 1231.0     | 1775.0     |
| 821977.0                | 60.5             | 7                 | 1                          | 1489.0     | -          | -          |
| 1109848.0               | 95.4             | 7                 | 3                          | 1531.0     | 1854.0     | 1127.0     |
| 204457.0                | 79.1             | 7                 | 2                          | 1780.0     | 1831.0     | -          |
| 495040.0                | 69.0             | 7                 | 2                          | 1299.0     | 1292.0     | -          |
| 786357.0                | 63.7             | 7                 | 1                          | 1208.0     | -          | -          |
| 1076483.0               | 56.6             | 7                 | 1                          | 1898.0     | -          | -          |
| Type 5 Radar Waveform_3 |                  |                   |                            |            |            |            |
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 211296.0                | 60.3             | 5                 | 1                          | 1663.0     | -          | -          |
| 574024.0                | 70.6             | 5                 | 2                          | 1843.0     | 1559.0     | -          |
| 937451.0                | 69.3             | 5                 | 2                          | 1413.0     | 1261.0     | -          |
| 1301367.0               | 55.3             | 5                 | 1                          | 1791.0     | -          | -          |
| 166181.0                | 91.2             | 5                 | 3                          | 1905.0     | 1849.0     | 1088.0     |
| 528682.0                | 96.5             | 5                 | 3                          | 1408.0     | 1953.0     | 1827.0     |
| 893497.0                | 55.2             | 5                 | 1                          | 1371.0     | -          | -          |
| 1256955.0               | 63.0             | 5                 | 1                          | 1379.0     | -          | -          |



| Type 5 Radar Waveform_4 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 64800.0                 | 76.1             | 13                | 2                          | 1108.0     | 1571.0     | -          |
| 257917.0                | 73.7             | 13                | 2                          | 1672.0     | 1806.0     | -          |
| 450704.0                | 88.2             | 13                | 3                          | 1198.0     | 1789.0     | 1187.0     |
| 644953.0                | 70.1             | 13                | 2                          | 1181.0     | 1466.0     | -          |
| 40891.0                 | 96.7             | 13                | 3                          | 1617.0     | 1420.0     | 1388.0     |
| 233718.0                | 83.4             | 13                | 3                          | 1557.0     | 1652.0     | 1640.0     |
| 427120.0                | 71.1             | 13                | 2                          | 1964.0     | 1855.0     | -          |
| 620466.0                | 79.9             | 13                | 2                          | 1681.0     | 1821.0     | -          |
| 17182.0                 | 62.3             | 13                | 1                          | 1692.0     | -          | -          |
| 210084.0                | 85.3             | 13                | 3                          | 1448.0     | 1300.0     | 1645.0     |
| 404740.0                | 54.3             | 13                | 1                          | 1044.0     | -          | -          |
| 596164.0                | 86.4             | 13                | 3                          | 1417.0     | 1396.0     | 1367.0     |
| 791629.0                | 57.1             | 13                | 1                          | 1706.0     | -          | -          |
| 186252.0                | 98.5             | 13                | 3                          | 1736.0     | 1276.0     | 1654.0     |
| 380428.0                | 56.3             | 13                | 1                          | 1976.0     | -          | -          |

| Type 5 Radar Waveform_5 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 782164.0                | 75.9             | 9                 | 2                          | 1983.0     | 1445.0     | -          |
| 1045250.0               | 85.0             | 9                 | 3                          | 1345.0     | 1718.0     | 1054.0     |
| 222296.0                | 74.8             | 9                 | 2                          | 1625.0     | 1232.0     | -          |
| 486759.0                | 51.7             | 9                 | 1                          | 1567.0     | -          | -          |
| 749685.0                | 67.2             | 9                 | 2                          | 1899.0     | 1517.0     | -          |
| 1013798.0               | 67.9             | 9                 | 2                          | 1495.0     | 1533.0     | -          |
| 189646.0                | 95.7             | 9                 | 3                          | 1009.0     | 1566.0     | 1116.0     |
| 452781.0                | 87.3             | 9                 | 3                          | 1771.0     | 1425.0     | 1813.0     |
| 716585.0                | 86.0             | 9                 | 3                          | 1418.0     | 1123.0     | 1802.0     |
| 983103.0                | 56.1             | 9                 | 1                          | 1027.0     | -          | -          |
| 157348.0                | 68.1             | 9                 | 2                          | 1034.0     | 1393.0     | -          |

| Type 5 Radar Waveform_6 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 420892.0                | 80.6             | 9                 | 2                          | 1822.0     | 1762.0     | -          |
| 683542.0                | 93.6             | 9                 | 3                          | 1883.0     | 1397.0     | 1989.0     |
| 947146.0                | 91.5             | 9                 | 3                          | 1633.0     | 1829.0     | 1460.0     |
| 124552.0                | 85.8             | 9                 | 3                          | 1851.0     | 1872.0     | 1137.0     |
| 389108.0                | 50.9             | 9                 | 1                          | 1627.0     | -          | -          |
| 653400.0                | 58.1             | 9                 | 1                          | 1449.0     | -          | -          |
| 916451.0                | 66.8             | 9                 | 2                          | 1713.0     | 1134.0     | -          |
| 92119.0                 | 86.3             | 9                 | 3                          | 1403.0     | 1527.0     | 1782.0     |
| 356714.0                | 58.0             | 9                 | 1                          | 1175.0     | -          | -          |
| 619698.0                | 70.7             | 9                 | 2                          | 1865.0     | 1611.0     | -          |
| 882803.0                | 95.2             | 9                 | 3                          | 1225.0     | 1218.0     | 1811.0     |



**Type 5 Radar Waveform\_7**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 43703.0           | 97.7             | 14                | 3                          | 1860.0     | 1015.0     | 1585.0     |
| 237397.0          | 56.4             | 14                | 1                          | 1937.0     | -          | -          |
| 430165.0          | 79.9             | 14                | 2                          | 1805.0     | 1589.0     | -          |
| 623650.0          | 76.5             | 14                | 2                          | 1807.0     | 1227.0     | -          |
| 19963.0           | 80.7             | 14                | 2                          | 1530.0     | 1864.0     | -          |
| 213067.0          | 83.0             | 14                | 2                          | 1959.0     | 1804.0     | -          |
| 405411.0          | 93.8             | 14                | 3                          | 1970.0     | 1499.0     | 1800.0     |
| 600839.0          | 64.6             | 14                | 1                          | 1707.0     | -          | -          |
| 793521.0          | 77.4             | 14                | 2                          | 1242.0     | 1399.0     | -          |
| 189022.0          | 99.6             | 14                | 3                          | 1755.0     | 1233.0     | 1861.0     |
| 383343.0          | 61.9             | 14                | 1                          | 1783.0     | -          | -          |
| 577166.0          | 64.3             | 14                | 1                          | 1464.0     | -          | -          |
| 767653.0          | 93.5             | 14                | 3                          | 1673.0     | 1172.0     | 1918.0     |
| 165813.0          | 70.3             | 14                | 2                          | 1146.0     | 1075.0     | -          |
| 359412.0          | 66.3             | 14                | 1                          | 1971.0     | -          | -          |

**Type 5 Radar Waveform\_8**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 459209.0          | 94.7             | 18                | 3                          | 1564.0     | 1087.0     | 1287.0     |
| 618885.0          | 88.0             | 18                | 3                          | 1455.0     | 1966.0     | 1646.0     |
| 117963.0          | 95.1             | 18                | 3                          | 1124.0     | 1329.0     | 1387.0     |
| 279154.0          | 80.5             | 18                | 2                          | 1553.0     | 1252.0     | -          |
| 439183.0          | 86.4             | 18                | 3                          | 1313.0     | 1159.0     | 1809.0     |
| 602342.0          | 52.1             | 18                | 1                          | 1510.0     | -          | -          |
| 98531.0           | 64.0             | 18                | 1                          | 1344.0     | -          | -          |
| 259288.0          | 78.5             | 18                | 2                          | 1839.0     | 1053.0     | -          |
| 421169.0          | 52.8             | 18                | 1                          | 1479.0     | -          | -          |
| 581188.0          | 77.5             | 18                | 2                          | 1104.0     | 1871.0     | -          |
| 78377.0           | 88.4             | 18                | 3                          | 1262.0     | 1352.0     | 1076.0     |
| 239609.0          | 76.5             | 18                | 2                          | 1133.0     | 1341.0     | -          |
| 399528.0          | 84.3             | 18                | 2                          | 1169.0     | 1635.0     | 1606.0     |
| 559385.0          | 96.2             | 18                | 3                          | 1683.0     | 1637.0     | 1990.0     |
| 58681.0           | 69.6             | 18                | 2                          | 1240.0     | 1212.0     | -          |
| 219542.0          | 70.8             | 18                | 2                          | 1179.0     | 1973.0     | -          |
| 379397.0          | 90.4             | 18                | 3                          | 1836.0     | 1915.0     | 1265.0     |
| 540503.0          | 85.7             | 18                | 3                          | 1202.0     | 1234.0     | 1801.0     |

**Type 5 Radar Waveform\_9**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 58265.0           | 80.7             | 10                | 2                          | 1624.0     | 1910.0     | -          |
| 299802.0          | 87.3             | 10                | 3                          | 1416.0     | 1079.0     | 1493.0     |
| 541962.0          | 68.3             | 10                | 2                          | 1669.0     | 1224.0     | -          |
| 784165.0          | 71.9             | 10                | 2                          | 1100.0     | 1318.0     | -          |
| 28464.0           | 90.8             | 10                | 3                          | 1188.0     | 1632.0     | 1833.0     |
| 269858.0          | 87.2             | 10                | 3                          | 1558.0     | 1957.0     | 1171.0     |
| 512823.0          | 62.6             | 10                | 1                          | 1629.0     | -          | -          |
| 752967.0          | 93.6             | 10                | 3                          | 1385.0     | 1660.0     | 1219.0     |
| 995444.0          | 71.3             | 10                | 2                          | 1761.0     | 1523.0     | -          |
| 240604.0          | 78.8             | 10                | 2                          | 1209.0     | 1487.0     | -          |
| 482391.0          | 68.6             | 10                | 2                          | 1118.0     | 1764.0     | -          |
| 724362.0          | 68.6             | 10                | 2                          | 1686.0     | 1006.0     | -          |



**Type 5 Radar Waveform\_10**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 1289620.0         | 79.3             | 6                 | 2                          | 1058.0     | 1190.0     | -          |
| 281105.0          | 98.1             | 6                 | 3                          | 1141.0     | 1309.0     | 1024.0     |
| 604512.0          | 65.4             | 6                 | 1                          | 1549.0     | -          | -          |
| 925244.0          | 84.6             | 6                 | 3                          | 1256.0     | 1668.0     | 1881.0     |
| 1250715.0         | 63.5             | 6                 | 1                          | 1332.0     | -          | -          |
| 241514.0          | 78.8             | 6                 | 2                          | 1022.0     | 1698.0     | -          |
| 563640.0          | 91.2             | 6                 | 3                          | 1674.0     | 1274.0     | 1161.0     |
| 886361.0          | 77.6             | 6                 | 2                          | 1703.0     | 1893.0     | -          |
| 1208093.0         | 84.3             | 6                 | 3                          | 1767.0     | 1323.0     | 1355.0     |

**Type 5 Radar Waveform\_11**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 139196.0          | 93.1             | 11                | 3                          | 1322.0     | 1874.0     | 1891.0     |
| 361656.0          | 83.7             | 11                | 3                          | 1935.0     | 1649.0     | 1963.0     |
| 585691.0          | 78.0             | 11                | 2                          | 1283.0     | 1900.0     | -          |
| 809013.0          | 77.1             | 11                | 2                          | 1573.0     | 1361.0     | -          |
| 111892.0          | 99.0             | 11                | 3                          | 1111.0     | 1346.0     | 1644.0     |
| 334809.0          | 92.4             | 11                | 3                          | 1243.0     | 1248.0     | 1506.0     |
| 559172.0          | 56.4             | 11                | 1                          | 1598.0     | -          | -          |
| 782860.0          | 59.4             | 11                | 1                          | 1362.0     | -          | -          |
| 84615.0           | 68.4             | 11                | 2                          | 1060.0     | 1115.0     | -          |
| 308272.0          | 57.7             | 11                | 1                          | 1250.0     | -          | -          |
| 530320.0          | 78.7             | 11                | 2                          | 1956.0     | 1936.0     | -          |
| 753385.0          | 71.6             | 11                | 2                          | 1796.0     | 1932.0     | -          |
| 57049.0           | 78.7             | 11                | 2                          | 1330.0     | 1724.0     | -          |

**Type 5 Radar Waveform\_12**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 260662.0          | 62.7             | 12                | 1                          | 1223.0     | -          | -          |
| 467282.0          | 83.1             | 12                | 2                          | 1314.0     | 1676.0     | -          |
| 673447.0          | 98.0             | 12                | 3                          | 1443.0     | 1469.0     | 1337.0     |
| 27451.0           | 72.8             | 12                | 2                          | 1563.0     | 1311.0     | -          |
| 234045.0          | 97.3             | 12                | 3                          | 1817.0     | 1312.0     | 1903.0     |
| 442496.0          | 57.8             | 12                | 1                          | 1577.0     | -          | -          |
| 649448.0          | 67.8             | 12                | 2                          | 1037.0     | 1264.0     | -          |
| 1925.0            | 92.9             | 12                | 3                          | 1529.0     | 1985.0     | 1909.0     |
| 209257.0          | 80.8             | 12                | 2                          | 1270.0     | 1033.0     | -          |
| 415264.0          | 85.2             | 12                | 3                          | 1556.0     | 1919.0     | 1535.0     |
| 624154.0          | 59.8             | 12                | 1                          | 1967.0     | -          | -          |
| 828953.0          | 84.2             | 12                | 3                          | 1787.0     | 1584.0     | 1278.0     |
| 183522.0          | 98.3             | 12                | 3                          | 1194.0     | 1003.0     | 1025.0     |
| 390429.0          | 90.4             | 12                | 3                          | 1245.0     | 1056.0     | 1349.0     |



**Type 5 Radar Waveform\_13**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 465415.0          | 61.1             | 18                | 1                          | 1769.0     | -          | -          |
| 623742.0          | 99.8             | 18                | 3                          | 1760.0     | 1600.0     | 1520.0     |
| 122668.0          | 82.7             | 18                | 2                          | 1949.0     | 1803.0     | -          |
| 283302.0          | 90.9             | 18                | 3                          | 1068.0     | 1382.0     | 1636.0     |
| 444483.0          | 79.6             | 18                | 2                          | 1721.0     | 1643.0     | -          |
| 606701.0          | 62.7             | 18                | 1                          | 1889.0     | -          | -          |
| 103183.0          | 51.3             | 18                | 1                          | 1693.0     | -          | -          |
| 263397.0          | 87.7             | 18                | 3                          | 1778.0     | 1347.0     | 1241.0     |
| 426153.0          | 53.5             | 18                | 1                          | 1043.0     | -          | -          |
| 584390.0          | 90.4             | 18                | 3                          | 1708.0     | 1050.0     | 1908.0     |
| 82901.0           | 94.8             | 18                | 3                          | 1882.0     | 1374.0     | 1757.0     |
| 243358.0          | 91.8             | 18                | 3                          | 1665.0     | 1597.0     | 1792.0     |
| 404407.0          | 94.9             | 18                | 3                          | 1040.0     | 1271.0     | 1781.0     |
| 567467.0          | 56.2             | 18                | 1                          | 1319.0     | -          | -          |
| 63172.0           | 84.1             | 18                | 3                          | 1538.0     | 1112.0     | 1972.0     |
| 224717.0          | 52.9             | 18                | 1                          | 1728.0     | -          | -          |
| 385382.0          | 71.1             | 18                | 2                          | 1247.0     | 1521.0     | -          |
| 545339.0          | 90.0             | 18                | 3                          | 1565.0     | 1095.0     | 1395.0     |

**Type 5 Radar Waveform\_14**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 71191.0           | 97.1             | 9                 | 3                          | 1082.0     | 1711.0     | 1979.0     |
| 335682.0          | 50.6             | 9                 | 1                          | 1305.0     | -          | -          |
| 597847.0          | 85.3             | 9                 | 3                          | 1694.0     | 1969.0     | 1453.0     |
| 862584.0          | 82.4             | 9                 | 2                          | 1931.0     | 1422.0     | -          |
| 38736.0           | 86.6             | 9                 | 3                          | 1404.0     | 1982.0     | 1582.0     |
| 302392.0          | 90.8             | 9                 | 3                          | 1129.0     | 1073.0     | 1759.0     |
| 566462.0          | 81.6             | 9                 | 2                          | 1661.0     | 1433.0     | -          |
| 829917.0          | 83.3             | 9                 | 2                          | 1923.0     | 1662.0     | -          |
| 6316.0            | 59.7             | 9                 | 1                          | 1222.0     | -          | -          |
| 269903.0          | 91.5             | 9                 | 3                          | 1583.0     | 1364.0     | 1081.0     |
| 534709.0          | 62.2             | 9                 | 1                          | 1578.0     | -          | -          |

**Type 5 Radar Waveform\_15**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 876294.0          | 98.6             | 8                 | 3                          | 1316.0     | 1952.0     | 1880.0     |
| 1168454.0         | 68.1             | 8                 | 2                          | 1326.0     | 1392.0     | -          |
| 261295.0          | 92.9             | 8                 | 3                          | 1051.0     | 1066.0     | 1772.0     |
| 552353.0          | 50.7             | 8                 | 1                          | 1799.0     | -          | -          |
| 843312.0          | 51.9             | 8                 | 1                          | 1290.0     | -          | -          |
| 1130189.0         | 95.4             | 8                 | 3                          | 1946.0     | 1506.0     | 1906.0     |
| 226027.0          | 59.7             | 8                 | 1                          | 1423.0     | -          | -          |
| 515310.0          | 85.8             | 8                 | 3                          | 1410.0     | 1639.0     | 1642.0     |
| 806698.0          | 66.9             | 8                 | 2                          | 1101.0     | 1381.0     | -          |
| 1094952.0         | 99.1             | 8                 | 3                          | 1456.0     | 1454.0     | 1955.0     |



**Type 5 Radar Waveform\_16**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 105556.0          | 58.8             | 18                | 1                          | 1562.0     | -          | -          |
| 266244.0          | 77.3             | 18                | 2                          | 1407.0     | 1701.0     | -          |
| 427502.0          | 75.0             | 18                | 2                          | 1599.0     | 1005.0     | -          |
| 588010.0          | 79.5             | 18                | 2                          | 1682.0     | 1541.0     | -          |
| 85682.0           | 57.6             | 18                | 1                          | 1592.0     | -          | -          |
| 246322.0          | 78.0             | 18                | 2                          | 1424.0     | 1951.0     | -          |
| 408089.0          | 55.4             | 18                | 1                          | 1911.0     | -          | -          |
| 569332.0          | 63.0             | 18                | 1                          | 1890.0     | -          | -          |
| 65804.0           | 61.6             | 18                | 1                          | 1689.0     | -          | -          |
| 227063.0          | 58.8             | 18                | 1                          | 1745.0     | -          | -          |
| 387624.0          | 77.9             | 18                | 2                          | 1835.0     | 1114.0     | -          |
| 549535.0          | 64.1             | 18                | 1                          | 1814.0     | -          | -          |
| 45826.0           | 69.9             | 18                | 2                          | 1826.0     | 1481.0     | -          |
| 206650.0          | 87.1             | 18                | 3                          | 1070.0     | 1402.0     | 1035.0     |
| 366682.0          | 97.6             | 18                | 3                          | 1036.0     | 1927.0     | 1997.0     |
| 530108.0          | 55.1             | 18                | 1                          | 1268.0     | -          | -          |
| 26018.0           | 78.7             | 18                | 2                          | 1138.0     | 1940.0     | -          |
| 187391.0          | 63.1             | 18                | 1                          | 1545.0     | -          | -          |

**Type 5 Radar Waveform\_17**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 347026.0          | 92.0             | 18                | 3                          | 1328.0     | 1850.0     | 1568.0     |
| 510053.0          | 59.3             | 18                | 1                          | 1498.0     | -          | -          |
| 6180.0            | 96.3             | 18                | 3                          | 1357.0     | 1486.0     | 1717.0     |
| 167569.0          | 53.0             | 18                | 1                          | 1354.0     | -          | -          |
| 328848.0          | 59.8             | 18                | 1                          | 1516.0     | -          | -          |
| 489278.0          | 75.4             | 18                | 2                          | 1653.0     | 1071.0     | -          |
| 651962.0          | 55.0             | 18                | 1                          | 1032.0     | -          | -          |
| 147385.0          | 72.3             | 18                | 2                          | 1415.0     | 1327.0     | -          |
| 309059.0          | 51.9             | 18                | 1                          | 1339.0     | -          | -          |
| 467985.0          | 91.1             | 18                | 3                          | 1978.0     | 1378.0     | 1430.0     |
| 628413.0          | 93.0             | 18                | 3                          | 1950.0     | 1534.0     | 1406.0     |
| 127779.0          | 60.8             | 18                | 1                          | 1554.0     | -          | -          |
| 288418.0          | 74.3             | 18                | 2                          | 1259.0     | 1840.0     | -          |
| 449515.0          | 67.1             | 18                | 2                          | 1569.0     | 1293.0     | -          |
| 612103.0          | 54.1             | 18                | 1                          | 1128.0     | -          | -          |
| 107466.0          | 90.9             | 18                | 3                          | 1077.0     | 1391.0     | 1815.0     |
| 267951.0          | 88.3             | 18                | 3                          | 1513.0     | 1776.0     | 1401.0     |
| 429687.0          | 73.3             | 18                | 2                          | 1421.0     | 1436.0     | -          |

**Type 5 Radar Waveform\_18**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 1184907.0         | 60.2             | 6                 | 1                          | 1732.0     | -          | -          |
| 176291.0          | 52.9             | 6                 | 1                          | 1501.0     | -          | -          |
| 498658.0          | 79.0             | 6                 | 2                          | 1457.0     | 1763.0     | -          |
| 822305.0          | 62.7             | 6                 | 1                          | 1515.0     | -          | -          |
| 1144475.0         | 76.1             | 6                 | 2                          | 1192.0     | 1298.0     | -          |
| 136321.0          | 70.3             | 6                 | 2                          | 1285.0     | 1992.0     | -          |
| 458705.0          | 98.2             | 6                 | 3                          | 1795.0     | 1021.0     | 1031.0     |
| 781774.0          | 82.6             | 6                 | 2                          | 1206.0     | 1575.0     | -          |
| 1102924.0         | 84.4             | 6                 | 3                          | 1842.0     | 1490.0     | 1317.0     |





**Type 5 Radar Waveform\_19**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 66757.0           | 84.5             | 12                | 3                          | 1370.0     | 1119.0     | 1307.0     |
| 289355.0          | 98.2             | 12                | 3                          | 1320.0     | 1867.0     | 1742.0     |
| 513920.0          | 55.7             | 12                | 1                          | 1547.0     | -          | -          |
| 737255.0          | 53.1             | 12                | 1                          | 1753.0     | -          | -          |
| 39259.0           | 96.9             | 12                | 3                          | 1766.0     | 1136.0     | 1720.0     |
| 262375.0          | 66.7             | 12                | 2                          | 1470.0     | 1884.0     | -          |
| 484470.0          | 96.7             | 12                | 3                          | 1680.0     | 1994.0     | 1511.0     |
| 707699.0          | 93.9             | 12                | 3                          | 1090.0     | 1414.0     | 1887.0     |
| 11860.0           | 57.6             | 12                | 1                          | 1525.0     | -          | -          |
| 235383.0          | 52.7             | 12                | 1                          | 1459.0     | -          | -          |
| 459033.0          | 55.8             | 12                | 1                          | 1199.0     | -          | -          |
| 681375.0          | 67.5             | 12                | 2                          | 1704.0     | 1173.0     | -          |
| 903029.0          | 99.7             | 12                | 3                          | 1485.0     | 1873.0     | 1069.0     |

**Type 5 Radar Waveform\_20**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 134738.0          | 74.5             | 20                | 2                          | 1518.0     | 1046.0     | -          |
| 278683.0          | 85.3             | 20                | 3                          | 1675.0     | 1726.0     | 1197.0     |
| 424215.0          | 76.1             | 20                | 2                          | 1857.0     | 1154.0     | -          |
| 570861.0          | 64.4             | 20                | 1                          | 1062.0     | -          | -          |
| 116807.0          | 70.1             | 20                | 2                          | 1045.0     | 1945.0     | -          |
| 262404.0          | 50.7             | 20                | 1                          | 1157.0     | -          | -          |
| 405473.0          | 84.5             | 20                | 3                          | 1151.0     | 1868.0     | 1325.0     |
| 552887.0          | 60.8             | 20                | 1                          | 1150.0     | -          | -          |
| 99278.0           | 59.9             | 20                | 1                          | 1142.0     | -          | -          |
| 243729.0          | 79.1             | 20                | 2                          | 1176.0     | 1902.0     | -          |
| 387440.0          | 98.9             | 20                | 3                          | 1369.0     | 1628.0     | 1712.0     |
| 533305.0          | 74.3             | 20                | 2                          | 1735.0     | 1308.0     | -          |
| 80964.0           | 94.9             | 20                | 3                          | 1160.0     | 1993.0     | 1107.0     |
| 225823.0          | 75.7             | 20                | 2                          | 1524.0     | 1749.0     | -          |
| 369912.0          | 84.1             | 20                | 3                          | 1110.0     | 1934.0     | 1254.0     |
| 515159.0          | 79.2             | 20                | 2                          | 1727.0     | 1678.0     | -          |
| 63378.0           | 83.2             | 20                | 2                          | 1113.0     | 1156.0     | -          |
| 207906.0          | 76.0             | 20                | 2                          | 1655.0     | 1878.0     | -          |
| 353505.0          | 54.8             | 20                | 1                          | 1947.0     | -          | -          |
| 497888.0          | 77.2             | 20                | 2                          | 1163.0     | 1580.0     | -          |

**Type 5 Radar Waveform\_21**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 56777.0           | 91.1             | 15                | 3                          | 1302.0     | 1440.0     | 1722.0     |
| 237952.0          | 70.6             | 15                | 2                          | 1995.0     | 1342.0     | -          |
| 418977.0          | 74.1             | 15                | 2                          | 1463.0     | 1988.0     | -          |
| 599213.0          | 96.2             | 15                | 3                          | 1204.0     | 1537.0     | 1737.0     |
| 34521.0           | 87.9             | 15                | 3                          | 1284.0     | 1359.0     | 1473.0     |
| 215244.0          | 96.1             | 15                | 3                          | 1065.0     | 1748.0     | 1916.0     |
| 395933.0          | 94.2             | 15                | 3                          | 1336.0     | 1618.0     | 1892.0     |
| 578075.0          | 77.6             | 15                | 2                          | 1419.0     | 1594.0     | -          |
| 12251.0           | 73.2             | 15                | 2                          | 1616.0     | 1697.0     | -          |
| 193124.0          | 96.6             | 15                | 3                          | 1296.0     | 1856.0     | 1020.0     |
| 373655.0          | 88.1             | 15                | 3                          | 1921.0     | 1236.0     | 1723.0     |
| 555587.0          | 82.5             | 15                | 2                          | 1879.0     | 1365.0     | -          |
| 738541.0          | 55.8             | 15                | 1                          | 1377.0     | -          | -          |
| 171490.0          | 60.6             | 15                | 1                          | 1343.0     | -          | -          |
| 352248.0          | 78.5             | 15                | 2                          | 1394.0     | 1677.0     | -          |
| 532765.0          | 93.8             | 15                | 3                          | 1214.0     | 1623.0     | 1126.0     |



**Type 5 Radar Waveform\_22**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 599868.0          | 86.7             | 19                | 3                          | 1092.0     | 1462.0     | 1980.0     |
| 125475.0          | 61.7             | 19                | 1                          | 1651.0     | -          | -          |
| 278533.0          | 50.2             | 19                | 1                          | 1016.0     | -          | -          |
| 428869.0          | 97.4             | 19                | 3                          | 1870.0     | 1260.0     | 1679.0     |
| 580923.0          | 98.1             | 19                | 3                          | 1353.0     | 1509.0     | 1901.0     |
| 106382.0          | 73.5             | 19                | 2                          | 1282.0     | 1991.0     | -          |
| 258658.0          | 74.5             | 19                | 2                          | 1834.0     | 1702.0     | -          |
| 411113.0          | 69.1             | 19                | 2                          | 1574.0     | 1756.0     | -          |
| 564844.0          | 56.8             | 19                | 1                          | 1812.0     | -          | -          |
| 87659.0           | 78.9             | 19                | 2                          | 1139.0     | 1794.0     | -          |
| 240678.0          | 51.9             | 19                | 1                          | 1488.0     | -          | -          |
| 391354.0          | 91.0             | 19                | 3                          | 1631.0     | 1301.0     | 1984.0     |
| 546389.0          | 62.6             | 19                | 1                          | 1398.0     | -          | -          |
| 69043.0           | 64.7             | 19                | 1                          | 1437.0     | -          | -          |
| 221214.0          | 74.4             | 19                | 2                          | 1555.0     | 1751.0     | -          |
| 373642.0          | 76.8             | 19                | 2                          | 1998.0     | 1221.0     | -          |
| 527232.0          | 50.9             | 19                | 1                          | 1793.0     | -          | -          |
| 49999.0           | 90.3             | 19                | 3                          | 1380.0     | 1203.0     | 1604.0     |
| 202938.0          | 58.5             | 19                | 1                          | 1774.0     | -          | -          |

**Type 5 Radar Waveform\_23**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 422615.0          | 53.8             | 15                | 1                          | 1685.0     | -          | -          |
| 604487.0          | 61.1             | 15                | 1                          | 1211.0     | -          | -          |
| 37231.0           | 79.9             | 15                | 2                          | 1023.0     | 1648.0     | -          |
| 218261.0          | 76.5             | 15                | 2                          | 1492.0     | 1933.0     | -          |
| 399830.0          | 74.0             | 15                | 2                          | 1207.0     | 1281.0     | -          |
| 582139.0          | 56.5             | 15                | 1                          | 1184.0     | -          | -          |
| 14923.0           | 56.9             | 15                | 1                          | 1768.0     | -          | -          |
| 195727.0          | 87.6             | 15                | 3                          | 1089.0     | 1610.0     | 1605.0     |
| 378221.0          | 63.4             | 15                | 1                          | 1057.0     | -          | -          |
| 556741.0          | 91.0             | 15                | 3                          | 1750.0     | 1497.0     | 1987.0     |
| 741092.0          | 66.4             | 15                | 1                          | 1475.0     | -          | -          |
| 173836.0          | 68.4             | 15                | 2                          | 1551.0     | 1094.0     | -          |
| 354481.0          | 84.2             | 15                | 3                          | 1593.0     | 1253.0     | 1086.0     |
| 535412.0          | 97.3             | 15                | 3                          | 1189.0     | 1491.0     | 1272.0     |
| 716591.0          | 90.4             | 15                | 3                          | 1002.0     | 1435.0     | 1266.0     |
| 151012.0          | 92.5             | 15                | 3                          | 1729.0     | 1926.0     | 1441.0     |

**Type 5 Radar Waveform\_24**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 444236.0          | 71.5             | 10                | 2                          | 1228.0     | 1067.0     | -          |
| 685554.0          | 75.7             | 10                | 2                          | 1333.0     | 1917.0     | -          |
| 928845.0          | 57.5             | 10                | 1                          | 1586.0     | -          | -          |
| 172206.0          | 79.1             | 10                | 2                          | 1798.0     | 1939.0     | -          |
| 414417.0          | 67.6             | 10                | 2                          | 1279.0     | 1048.0     | -          |
| 655585.0          | 96.1             | 10                | 3                          | 1363.0     | 1085.0     | 1093.0     |
| 899441.0          | 55.0             | 10                | 1                          | 1117.0     | -          | -          |
| 142288.0          | 89.4             | 10                | 3                          | 1888.0     | 1467.0     | 1468.0     |
| 384986.0          | 59.0             | 10                | 1                          | 1358.0     | -          | -          |
| 625185.0          | 94.1             | 10                | 3                          | 1621.0     | 1824.0     | 1102.0     |
| 869008.0          | 53.2             | 10                | 1                          | 1797.0     | -          | -          |
| 112965.0          | 65.0             | 10                | 1                          | 1229.0     | -          | -          |



**Type 5 Radar Waveform\_25**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 533037.0          | 58.5             | 6                 | 1                          | 1167.0     | -          | -          |
| 895746.0          | 72.1             | 6                 | 2                          | 1148.0     | 1366.0     | -          |
| 1260060.0         | 61.3             | 6                 | 1                          | 1174.0     | -          | -          |
| 124587.0          | 81.5             | 6                 | 2                          | 1731.0     | 1356.0     | -          |
| 488238.0          | 65.6             | 6                 | 1                          | 1235.0     | -          | -          |
| 851787.0          | 52.1             | 6                 | 1                          | 1147.0     | -          | -          |
| 1213577.0         | 74.6             | 6                 | 2                          | 1372.0     | 1907.0     | -          |
| 79866.0           | 82.6             | 6                 | 2                          | 1191.0     | 1928.0     | -          |

**Type 5 Radar Waveform\_26**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 322487.0          | 56.8             | 9                 | 1                          | 1008.0     | -          | -          |
| 584727.0          | 85.2             | 9                 | 3                          | 1738.0     | 1321.0     | 1841.0     |
| 849494.0          | 76.2             | 9                 | 2                          | 1140.0     | 1999.0     | -          |
| 25506.0           | 90.8             | 9                 | 3                          | 1078.0     | 1784.0     | 1788.0     |
| 289142.0          | 91.2             | 9                 | 3                          | 1373.0     | 1295.0     | 1291.0     |
| 552245.0          | 86.0             | 9                 | 3                          | 1429.0     | 1622.0     | 1924.0     |
| 818532.0          | 61.0             | 9                 | 1                          | 1096.0     | -          | -          |
| 1081429.0         | 78.2             | 9                 | 2                          | 1061.0     | 1461.0     | -          |
| 256456.0          | 90.5             | 9                 | 3                          | 1548.0     | 1847.0     | 1472.0     |
| 521521.0          | 60.4             | 9                 | 1                          | 1386.0     | -          | -          |
| 784337.0          | 67.8             | 9                 | 2                          | 1667.0     | 1699.0     | -          |

**Type 5 Radar Waveform\_27**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 573889.0          | 93.7             | 20                | 3                          | 1503.0     | 1277.0     | 1734.0     |
| 123132.0          | 72.3             | 20                | 2                          | 1666.0     | 1368.0     | -          |
| 267567.0          | 72.2             | 20                | 2                          | 1845.0     | 1965.0     | -          |
| 413955.0          | 52.9             | 20                | 1                          | 1217.0     | -          | -          |
| 558626.0          | 51.0             | 20                | 1                          | 1808.0     | -          | -          |
| 105166.0          | 93.4             | 20                | 3                          | 1389.0     | 1384.0     | 1014.0     |
| 250691.0          | 61.1             | 20                | 1                          | 1579.0     | -          | -          |
| 394708.0          | 91.0             | 20                | 3                          | 1064.0     | 1007.0     | 1200.0     |
| 541184.0          | 57.7             | 20                | 1                          | 1334.0     | -          | -          |
| 87688.0           | 56.1             | 20                | 1                          | 1507.0     | -          | -          |
| 231990.0          | 90.6             | 20                | 3                          | 1030.0     | 1084.0     | 1581.0     |
| 376915.0          | 67.5             | 20                | 2                          | 1657.0     | 1560.0     | -          |
| 521146.0          | 79.9             | 20                | 2                          | 1886.0     | 1912.0     | -          |
| 69863.0           | 53.3             | 20                | 1                          | 1038.0     | -          | -          |
| 213704.0          | 91.9             | 20                | 3                          | 1304.0     | 1981.0     | 1725.0     |
| 359080.0          | 79.1             | 20                | 2                          | 1925.0     | 1303.0     | -          |
| 502720.0          | 91.4             | 20                | 3                          | 1484.0     | 1428.0     | 1614.0     |
| 51783.0           | 79.7             | 20                | 2                          | 1609.0     | 1587.0     | -          |
| 195748.0          | 84.9             | 20                | 3                          | 1914.0     | 1986.0     | 1658.0     |
| 342332.0          | 52.8             | 20                | 1                          | 1338.0     | -          | -          |



**Type 5 Radar Waveform\_28**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 975046.0          | 82.1             | 8                 | 2                          | 1144.0     | 1542.0     | -          |
| 68109.0           | 72.6             | 8                 | 2                          | 1741.0     | 1080.0     | -          |
| 358838.0          | 57.7             | 8                 | 1                          | 1570.0     | -          | -          |
| 647322.0          | 85.7             | 8                 | 3                          | 1710.0     | 1895.0     | 1975.0     |
| 938167.0          | 86.4             | 8                 | 3                          | 1205.0     | 1149.0     | 1747.0     |
| 32306.0           | 99.6             | 8                 | 3                          | 1626.0     | 1576.0     | 1063.0     |
| 322834.0          | 66.7             | 8                 | 2                          | 1267.0     | 1049.0     | -          |
| 611764.0          | 87.9             | 8                 | 3                          | 1716.0     | 1877.0     | 1743.0     |
| 903053.0          | 81.6             | 8                 | 2                          | 1572.0     | 1715.0     | -          |
| 1192513.0         | 85.1             | 8                 | 3                          | 1526.0     | 1383.0     | 1162.0     |

**Type 5 Radar Waveform\_29**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 150677.0          | 76.9             | 19                | 2                          | 1650.0     | 1257.0     | -          |
| 302759.0          | 98.9             | 19                | 3                          | 1306.0     | 1195.0     | 1215.0     |
| 454884.0          | 98.6             | 19                | 3                          | 1012.0     | 1055.0     | 1858.0     |
| 608090.0          | 76.3             | 19                | 2                          | 1838.0     | 1074.0     | -          |
| 132201.0          | 59.5             | 19                | 1                          | 1451.0     | -          | -          |
| 283453.0          | 92.8             | 19                | 3                          | 1348.0     | 1687.0     | 1896.0     |
| 435321.0          | 86.4             | 19                | 3                          | 1210.0     | 1943.0     | 1941.0     |
| 588786.0          | 69.1             | 19                | 2                          | 1942.0     | 1528.0     | -          |
| 113323.0          | 60.2             | 19                | 1                          | 1746.0     | -          | -          |
| 264997.0          | 88.1             | 19                | 3                          | 1001.0     | 1427.0     | 1876.0     |
| 418680.0          | 54.5             | 19                | 1                          | 1974.0     | -          | -          |
| 571717.0          | 61.2             | 19                | 1                          | 1602.0     | -          | -          |
| 94308.0           | 66.8             | 19                | 2                          | 1532.0     | 1543.0     | -          |
| 246874.0          | 76.5             | 19                | 2                          | 1375.0     | 1360.0     | -          |
| 400484.0          | 66.3             | 19                | 1                          | 1010.0     | -          | -          |
| 551552.0          | 67.6             | 19                | 2                          | 1439.0     | 1695.0     | -          |
| 75445.0           | 96.4             | 19                | 3                          | 1122.0     | 1390.0     | 1289.0     |
| 227645.0          | 87.5             | 19                | 3                          | 1275.0     | 1638.0     | 1041.0     |
| 379677.0          | 99.4             | 19                | 3                          | 1193.0     | 1659.0     | 1411.0     |



Radar Type 6 - Radar Statistical Performance

| Trail #                  | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection | Trail # | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection |
|--------------------------|---------------------|-------------------------------|---------|---------------------|-------------------------------|
| 0                        | 5491.0              | 0                             | 5510.0  | 5500.0              | 1                             |
| 1                        | 5492.3              | 1                             | 5511.3  | 5500.7              | 1                             |
| 2                        | 5493.6              | 1                             | 5512.6  | 5501.3              | 1                             |
| 3                        | 5494.9              | 1                             | 5513.9  | 5502.0              | 1                             |
| 4                        | 5496.2              | 1                             | 5515.2  | 5502.7              | 1                             |
| 5                        | 5497.6              | 1                             | 5516.6  | 5503.3              | 1                             |
| 6                        | 5498.9              | 1                             | 5517.9  | 5504.0              | 1                             |
| 7                        | 5500.2              | 1                             | 5519.2  | 5504.6              | 1                             |
| 8                        | 5501.5              | 1                             | 5520.5  | 5505.3              | 1                             |
| 9                        | 5502.8              | 1                             | 5521.8  | 5506.0              | 1                             |
| 10                       | 5504.1              | 1                             | 5523.1  | 5506.6              | 1                             |
| 11                       | 5505.4              | 1                             | 5524.4  | 5507.3              | 1                             |
| 12                       | 5506.7              | 1                             | 5525.7  | 5508.0              | 1                             |
| 13                       | 5508.0              | 1                             | 5527.0  | 5508.6              | 1                             |
| 14                       | 5509.3              | 1                             | 5529.0  | 5509.6              | 1                             |
| Detection Percentage (%) |                     |                               |         |                     | 96.6%                         |

| Type 6 Radar Waveform_0 |      |      |      |      |      |
|-------------------------|------|------|------|------|------|
| Frequency List (MHz)    | 0    | 1    | 2    | 3    | 4    |
| 0                       | 5401 | 5544 | 5340 | 5481 | 5607 |
| 5                       | 5385 | 5620 | 5359 | 5408 | 5485 |
| 10                      | 5384 | 5691 | 5556 | 5480 | 5305 |
| 15                      | 5300 | 5257 | 5315 | 5309 | 5722 |
| 20                      | 5367 | 5712 | 5256 | 5441 | 5707 |
| 25                      | 5314 | 5498 | 5513 | 5495 | 5379 |
| 30                      | 5534 | 5610 | 5504 | 5405 | 5295 |
| 35                      | 5531 | 5376 | 5705 | 5655 | 5538 |
| 40                      | 5517 | 5360 | 5363 | 5377 | 5260 |
| 45                      | 5428 | 5474 | 5437 | 5488 | 5274 |
| 50                      | 5501 | 5524 | 5450 | 5572 | 5416 |
| 55                      | 5403 | 5653 | 5586 | 5717 | 5337 |
| 60                      | 5352 | 5550 | 5331 | 5302 | 5422 |
| 65                      | 5392 | 5499 | 5649 | 5535 | 5335 |
| 70                      | 5434 | 5554 | 5542 | 5718 | 5425 |
| 75                      | 5677 | 5304 | 5417 | 5289 | 5362 |
| 80                      | 5667 | 5393 | 5683 | 5350 | 5606 |
| 85                      | 5306 | 5685 | 5391 | 5399 | 5643 |
| 90                      | 5548 | 5415 | 5282 | 5325 | 5660 |
| 95                      | 5383 | 5322 | 5724 | 5317 | 5255 |



**Type 6 Radar Waveform\_1**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5656 | 5405 | 5276 | 5642 | 5352 |
| 5                    | 5427 | 5434 | 5474 | 5692 | 5315 |
| 10                   | 5623 | 5257 | 5654 | 5501 | 5428 |
| 15                   | 5335 | 5306 | 5302 | 5507 | 5695 |
| 20                   | 5316 | 5308 | 5704 | 5329 | 5420 |
| 25                   | 5699 | 5547 | 5537 | 5268 | 5491 |
| 30                   | 5350 | 5278 | 5700 | 5719 | 5647 |
| 35                   | 5697 | 5716 | 5494 | 5621 | 5476 |
| 40                   | 5660 | 5357 | 5670 | 5343 | 5486 |
| 45                   | 5527 | 5270 | 5313 | 5664 | 5325 |
| 50                   | 5590 | 5347 | 5297 | 5285 | 5370 |
| 55                   | 5593 | 5472 | 5557 | 5274 | 5502 |
| 60                   | 5479 | 5254 | 5723 | 5341 | 5438 |
| 65                   | 5481 | 5613 | 5451 | 5517 | 5294 |
| 70                   | 5597 | 5384 | 5549 | 5424 | 5463 |
| 75                   | 5649 | 5275 | 5510 | 5603 | 5387 |
| 80                   | 5684 | 5624 | 5354 | 5284 | 5321 |
| 85                   | 5710 | 5288 | 5359 | 5542 | 5395 |
| 90                   | 5339 | 5611 | 5708 | 5301 | 5696 |
| 95                   | 5515 | 5413 | 5711 | 5344 | 5351 |

**Type 6 Radar Waveform\_2**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5339 | 5644 | 5687 | 5328 | 5669 |
| 5                    | 5566 | 5567 | 5509 | 5637 | 5521 |
| 10                   | 5721 | 5412 | 5298 | 5374 | 5522 |
| 15                   | 5516 | 5462 | 5409 | 5347 | 5699 |
| 20                   | 5703 | 5482 | 5724 | 5318 | 5677 |
| 25                   | 5692 | 5508 | 5623 | 5484 | 5676 |
| 30                   | 5254 | 5448 | 5565 | 5430 | 5423 |
| 35                   | 5573 | 5335 | 5443 | 5375 | 5630 |
| 40                   | 5326 | 5414 | 5425 | 5354 | 5599 |
| 45                   | 5337 | 5426 | 5447 | 5580 | 5632 |
| 50                   | 5664 | 5365 | 5376 | 5679 | 5645 |
| 55                   | 5716 | 5324 | 5308 | 5291 | 5528 |
| 60                   | 5403 | 5667 | 5717 | 5311 | 5555 |
| 65                   | 5349 | 5290 | 5474 | 5313 | 5697 |
| 70                   | 5416 | 5620 | 5503 | 5657 | 5618 |
| 75                   | 5343 | 5518 | 5544 | 5606 | 5251 |
| 80                   | 5294 | 5315 | 5439 | 5600 | 5582 |
| 85                   | 5684 | 5466 | 5686 | 5648 | 5569 |
| 90                   | 5433 | 5390 | 5393 | 5327 | 5504 |
| 95                   | 5356 | 5666 | 5674 | 5578 | 5523 |

**Type 6 Radar Waveform\_3**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5594 | 5408 | 5623 | 5489 | 5414 |
| 5                    | 5608 | 5589 | 5584 | 5325 | 5253 |
| 10                   | 5555 | 5298 | 5339 | 5569 | 5543 |
| 15                   | 5604 | 5512 | 5392 | 5416 | 5711 |
| 20                   | 5551 | 5287 | 5310 | 5650 | 5483 |
| 25                   | 5360 | 5351 | 5432 | 5518 | 5718 |
| 30                   | 5618 | 5405 | 5305 | 5679 | 5615 |
| 35                   | 5426 | 5336 | 5625 | 5544 | 5269 |
| 40                   | 5409 | 5352 | 5665 | 5448 | 5431 |
| 45                   | 5695 | 5509 | 5505 | 5633 | 5422 |
| 50                   | 5540 | 5541 | 5427 | 5293 | 5468 |
| 55                   | 5563 | 5564 | 5278 | 5498 | 5488 |
| 60                   | 5402 | 5532 | 5357 | 5284 | 5381 |
| 65                   | 5712 | 5647 | 5714 | 5510 | 5523 |
| 70                   | 5694 | 5692 | 5660 | 5467 | 5549 |
| 75                   | 5302 | 5487 | 5567 | 5274 | 5707 |
| 80                   | 5546 | 5425 | 5686 | 5603 | 5636 |
| 85                   | 5597 | 5587 | 5308 | 5377 | 5403 |
| 90                   | 5592 | 5602 | 5720 | 5397 | 5330 |
| 95                   | 5684 | 5613 | 5470 | 5721 | 5669 |



**Type 6 Radar Waveform\_4**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5374 | 5647 | 5559 | 5650 | 5256 |
| 5                    | 5514 | 5659 | 5488 | 5460 | 5486 |
| 10                   | 5562 | 5477 | 5289 | 5564 | 5595 |
| 15                   | 5716 | 5615 | 5340 | 5705 | 5622 |
| 20                   | 5717 | 5703 | 5399 | 5623 | 5371 |
| 25                   | 5309 | 5554 | 5536 | 5552 | 5285 |
| 30                   | 5604 | 5362 | 5423 | 5356 | 5441 |
| 35                   | 5279 | 5517 | 5607 | 5303 | 5555 |
| 40                   | 5583 | 5492 | 5668 | 5430 | 5445 |
| 45                   | 5360 | 5675 | 5592 | 5563 | 5686 |
| 50                   | 5319 | 5478 | 5382 | 5669 | 5507 |
| 55                   | 5277 | 5707 | 5688 | 5307 | 5373 |
| 60                   | 5661 | 5522 | 5704 | 5450 | 5304 |
| 65                   | 5658 | 5663 | 5449 | 5355 | 5384 |
| 70                   | 5400 | 5386 | 5475 | 5316 | 5525 |
| 75                   | 5261 | 5359 | 5687 | 5320 | 5323 |
| 80                   | 5535 | 5467 | 5292 | 5699 | 5497 |
| 85                   | 5490 | 5722 | 5498 | 5557 | 5653 |
| 90                   | 5493 | 5451 | 5720 | 5403 | 5364 |
| 95                   | 5469 | 5625 | 5487 | 5301 | 5282 |

**Type 6 Radar Waveform\_5**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5629 | 5411 | 5495 | 5336 | 5476 |
| 5                    | 5314 | 5536 | 5259 | 5554 | 5289 |
| 10                   | 5417 | 5351 | 5518 | 5484 | 5585 |
| 15                   | 5683 | 5368 | 5718 | 5385 | 5422 |
| 20                   | 5630 | 5408 | 5644 | 5391 | 5596 |
| 25                   | 5637 | 5636 | 5282 | 5640 | 5586 |
| 30                   | 5327 | 5493 | 5319 | 5638 | 5605 |
| 35                   | 5261 | 5418 | 5608 | 5403 | 5456 |
| 40                   | 5469 | 5575 | 5606 | 5573 | 5442 |
| 45                   | 5655 | 5675 | 5524 | 5642 | 5574 |
| 50                   | 5670 | 5529 | 5568 | 5492 | 5354 |
| 55                   | 5465 | 5661 | 5601 | 5344 | 5315 |
| 60                   | 5687 | 5649 | 5604 | 5671 | 5612 |
| 65                   | 5485 | 5565 | 5654 | 5678 | 5458 |
| 70                   | 5558 | 5288 | 5543 | 5501 | 5695 |
| 75                   | 5328 | 5332 | 5463 | 5669 | 5548 |
| 80                   | 5723 | 5359 | 5384 | 5494 | 5490 |
| 85                   | 5564 | 5400 | 5690 | 5425 | 5607 |
| 90                   | 5266 | 5271 | 5410 | 5409 | 5301 |
| 95                   | 5504 | 5356 | 5260 | 5454 | 5633 |

**Type 6 Radar Waveform\_6**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5409 | 5650 | 5431 | 5497 | 5318 |
| 5                    | 5356 | 5461 | 5334 | 5717 | 5496 |
| 10                   | 5251 | 5615 | 5559 | 5582 | 5606 |
| 15                   | 5296 | 5398 | 5724 | 5430 | 5614 |
| 20                   | 5638 | 5477 | 5585 | 5480 | 5569 |
| 25                   | 5525 | 5388 | 5366 | 5620 | 5466 |
| 30                   | 5382 | 5276 | 5378 | 5282 | 5459 |
| 35                   | 5460 | 5321 | 5674 | 5706 | 5383 |
| 40                   | 5358 | 5280 | 5544 | 5338 | 5439 |
| 45                   | 5596 | 5635 | 5283 | 5695 | 5546 |
| 50                   | 5594 | 5580 | 5657 | 5315 | 5298 |
| 55                   | 5653 | 5593 | 5323 | 5347 | 5377 |
| 60                   | 5686 | 5647 | 5397 | 5561 | 5424 |
| 65                   | 5481 | 5530 | 5392 | 5654 | 5675 |
| 70                   | 5452 | 5509 | 5352 | 5658 | 5504 |
| 75                   | 5523 | 5447 | 5491 | 5393 | 5406 |
| 80                   | 5363 | 5310 | 5293 | 5514 | 5469 |
| 85                   | 5575 | 5415 | 5335 | 5611 | 5368 |
| 90                   | 5521 | 5411 | 5300 | 5274 | 5631 |
| 95                   | 5643 | 5693 | 5531 | 5422 | 5372 |



**Type 6 Radar Waveform\_7**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5567 | 5414 | 5367 | 5658 | 5538 |
| 5                    | 5398 | 5483 | 5409 | 5405 | 5703 |
| 10                   | 5657 | 5404 | 5600 | 5302 | 5627 |
| 15                   | 5384 | 5525 | 5352 | 5475 | 5331 |
| 20                   | 5549 | 5643 | 5623 | 5472 | 5542 |
| 25                   | 5316 | 5437 | 5591 | 5470 | 5654 |
| 30                   | 5508 | 5368 | 5708 | 5593 | 5531 |
| 35                   | 5279 | 5599 | 5412 | 5394 | 5672 |
| 40                   | 5363 | 5482 | 5578 | 5436 | 5615 |
| 45                   | 5366 | 5640 | 5273 | 5251 | 5422 |
| 50                   | 5295 | 5631 | 5271 | 5613 | 5717 |
| 55                   | 5686 | 5617 | 5664 | 5476 | 5636 |
| 60                   | 5518 | 5354 | 5695 | 5510 | 5460 |
| 65                   | 5607 | 5341 | 5284 | 5699 | 5530 |
| 70                   | 5391 | 5716 | 5356 | 5644 | 5652 |
| 75                   | 5253 | 5507 | 5293 | 5285 | 5687 |
| 80                   | 5488 | 5704 | 5296 | 5345 | 5423 |
| 85                   | 5502 | 5258 | 5612 | 5267 | 5289 |
| 90                   | 5265 | 5421 | 5272 | 5493 | 5380 |
| 95                   | 5635 | 5466 | 5261 | 5260 | 5681 |

**Type 6 Radar Waveform\_8**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5347 | 5653 | 5303 | 5722 | 5380 |
| 5                    | 5440 | 5408 | 5484 | 5568 | 5532 |
| 10                   | 5491 | 5290 | 5641 | 5497 | 5648 |
| 15                   | 5375 | 5652 | 5455 | 5423 | 5523 |
| 20                   | 5557 | 5712 | 5564 | 5561 | 5515 |
| 25                   | 5679 | 5289 | 5319 | 5574 | 5688 |
| 30                   | 5550 | 5257 | 5665 | 5711 | 5683 |
| 35                   | 5263 | 5503 | 5363 | 5537 | 5308 |
| 40                   | 5511 | 5446 | 5420 | 5343 | 5530 |
| 45                   | 5357 | 5595 | 5449 | 5601 | 5326 |
| 50                   | 5613 | 5676 | 5374 | 5682 | 5360 |
| 55                   | 5339 | 5554 | 5426 | 5401 | 5436 |
| 60                   | 5635 | 5605 | 5707 | 5581 | 5350 |
| 65                   | 5655 | 5539 | 5421 | 5459 | 5496 |
| 70                   | 5439 | 5708 | 5562 | 5296 | 5516 |
| 75                   | 5565 | 5332 | 5572 | 5698 | 5709 |
| 80                   | 5284 | 5306 | 5541 | 5376 | 5573 |
| 85                   | 5485 | 5424 | 5662 | 5386 | 5694 |
| 90                   | 5663 | 5535 | 5487 | 5430 | 5524 |
| 95                   | 5489 | 5521 | 5315 | 5634 | 5636 |

**Type 6 Radar Waveform\_9**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5602 | 5417 | 5714 | 5408 | 5600 |
| 5                    | 5579 | 5430 | 5559 | 5256 | 5264 |
| 10                   | 5422 | 5554 | 5682 | 5692 | 5669 |
| 15                   | 5463 | 5304 | 5558 | 5468 | 5715 |
| 20                   | 5565 | 5403 | 5505 | 5553 | 5488 |
| 25                   | 5567 | 5713 | 5522 | 5678 | 5722 |
| 30                   | 5689 | 5621 | 5622 | 5451 | 5457 |
| 35                   | 5297 | 5402 | 5594 | 5634 | 5690 |
| 40                   | 5697 | 5350 | 5529 | 5358 | 5486 |
| 45                   | 5527 | 5286 | 5478 | 5532 | 5659 |
| 50                   | 5379 | 5552 | 5550 | 5258 | 5546 |
| 55                   | 5637 | 5508 | 5645 | 5380 | 5591 |
| 60                   | 5255 | 5606 | 5259 | 5397 | 5526 |
| 65                   | 5657 | 5578 | 5485 | 5719 | 5435 |
| 70                   | 5649 | 5503 | 5268 | 5465 | 5599 |
| 75                   | 5494 | 5414 | 5308 | 5531 | 5366 |
| 80                   | 5536 | 5416 | 5322 | 5443 | 5482 |
| 85                   | 5716 | 5674 | 5601 | 5446 | 5314 |
| 90                   | 5566 | 5617 | 5307 | 5595 | 5530 |
| 95                   | 5718 | 5635 | 5501 | 5576 | 5396 |





**Type 6 Radar Waveform\_10**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5382 | 5656 | 5650 | 5569 | 5442 |
| 5                    | 5621 | 5355 | 5634 | 5322 | 5471 |
| 10                   | 5353 | 5343 | 5723 | 5412 | 5690 |
| 15                   | 5551 | 5431 | 5661 | 5513 | 5432 |
| 20                   | 5476 | 5472 | 5543 | 5642 | 5461 |
| 25                   | 5358 | 5565 | 5250 | 5404 | 5281 |
| 30                   | 5256 | 5607 | 5579 | 5666 | 5609 |
| 35                   | 5592 | 5444 | 5685 | 5527 | 5465 |
| 40                   | 5708 | 5664 | 5709 | 5296 | 5251 |
| 45                   | 5524 | 5458 | 5615 | 5717 | 5290 |
| 50                   | 5428 | 5309 | 5635 | 5460 | 5334 |
| 55                   | 5306 | 5452 | 5577 | 5388 | 5562 |
| 60                   | 5586 | 5528 | 5445 | 5357 | 5481 |
| 65                   | 5298 | 5546 | 5537 | 5585 | 5594 |
| 70                   | 5641 | 5284 | 5490 | 5360 | 5671 |
| 75                   | 5313 | 5526 | 5578 | 5321 | 5436 |
| 80                   | 5443 | 5409 | 5506 | 5434 | 5668 |
| 85                   | 5459 | 5505 | 5285 | 5536 | 5277 |
| 90                   | 5517 | 5610 | 5686 | 5631 | 5380 |
| 95                   | 5300 | 5688 | 5439 | 5421 | 5674 |

**Type 6 Radar Waveform\_11**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5540 | 5420 | 5586 | 5255 | 5662 |
| 5                    | 5663 | 5377 | 5709 | 5485 | 5300 |
| 10                   | 5607 | 5289 | 5510 | 5711 | 5639 |
| 15                   | 5461 | 5667 | 5624 | 5484 | 5638 |
| 20                   | 5634 | 5434 | 5721 | 5514 | 5356 |
| 25                   | 5508 | 5315 | 5298 | 5496 | 5536 |
| 30                   | 5406 | 5383 | 5583 | 5301 | 5323 |
| 35                   | 5618 | 5622 | 5600 | 5317 | 5491 |
| 40                   | 5521 | 5522 | 5438 | 5698 | 5678 |
| 45                   | 5388 | 5555 | 5682 | 5427 | 5360 |
| 50                   | 5724 | 5283 | 5299 | 5546 | 5288 |
| 55                   | 5271 | 5451 | 5517 | 5252 | 5513 |
| 60                   | 5418 | 5705 | 5474 | 5646 | 5306 |
| 65                   | 5507 | 5691 | 5685 | 5349 | 5706 |
| 70                   | 5571 | 5597 | 5490 | 5260 | 5449 |
| 75                   | 5326 | 5480 | 5652 | 5565 | 5539 |
| 80                   | 5359 | 5296 | 5384 | 5379 | 5631 |
| 85                   | 5577 | 5285 | 5469 | 5601 | 5399 |
| 90                   | 5707 | 5325 | 5450 | 5542 | 5311 |
| 95                   | 5302 | 5719 | 5703 | 5686 | 5364 |

**Type 6 Radar Waveform\_12**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5320 | 5659 | 5522 | 5416 | 5504 |
| 5                    | 5705 | 5302 | 5309 | 5648 | 5507 |
| 10                   | 5593 | 5396 | 5427 | 5257 | 5630 |
| 15                   | 5588 | 5295 | 5506 | 5438 | 5492 |
| 20                   | 5707 | 5425 | 5723 | 5407 | 5512 |
| 25                   | 5366 | 5559 | 5612 | 5349 | 5437 |
| 30                   | 5482 | 5493 | 5524 | 5535 | 5610 |
| 35                   | 5722 | 5489 | 5594 | 5296 | 5536 |
| 40                   | 5439 | 5400 | 5550 | 5634 | 5518 |
| 45                   | 5451 | 5418 | 5306 | 5261 | 5441 |
| 50                   | 5442 | 5558 | 5603 | 5411 | 5338 |
| 55                   | 5484 | 5621 | 5259 | 5717 | 5686 |
| 60                   | 5565 | 5422 | 5549 | 5417 | 5458 |
| 65                   | 5250 | 5628 | 5420 | 5469 | 5255 |
| 70                   | 5446 | 5523 | 5460 | 5627 | 5303 |
| 75                   | 5654 | 5600 | 5339 | 5614 | 5408 |
| 80                   | 5503 | 5698 | 5633 | 5720 | 5649 |
| 85                   | 5615 | 5544 | 5376 | 5351 | 5480 |
| 90                   | 5699 | 5432 | 5318 | 5267 | 5576 |
| 95                   | 5645 | 5256 | 5342 | 5266 | 5348 |



**Type 6 Radar Waveform\_13**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5575 | 5423 | 5458 | 5577 | 5724 |
| 5                    | 5369 | 5324 | 5384 | 5336 | 5714 |
| 10                   | 5524 | 5282 | 5468 | 5425 | 5278 |
| 15                   | 5718 | 5715 | 5398 | 5551 | 5630 |
| 20                   | 5403 | 5463 | 5380 | 5400 | 5693 |
| 25                   | 5287 | 5716 | 5383 | 5479 | 5371 |
| 30                   | 5450 | 5264 | 5309 | 5333 | 5289 |
| 35                   | 5580 | 5390 | 5546 | 5547 | 5488 |
| 40                   | 5399 | 5612 | 5283 | 5389 | 5319 |
| 45                   | 5494 | 5707 | 5434 | 5304 | 5462 |
| 50                   | 5307 | 5565 | 5447 | 5671 | 5401 |
| 55                   | 5393 | 5678 | 5582 | 5557 | 5454 |
| 60                   | 5670 | 5679 | 5482 | 5258 | 5352 |
| 65                   | 5430 | 5472 | 5640 | 5700 | 5663 |
| 70                   | 5590 | 5367 | 5642 | 5623 | 5269 |
| 75                   | 5614 | 5497 | 5662 | 5396 | 5527 |
| 80                   | 5607 | 5373 | 5480 | 5541 | 5492 |
| 85                   | 5510 | 5627 | 5253 | 5721 | 5305 |
| 90                   | 5651 | 5365 | 5359 | 5321 | 5429 |
| 95                   | 5696 | 5337 | 5609 | 5554 | 5484 |

**Type 6 Radar Waveform\_14**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5355 | 5662 | 5394 | 5263 | 5566 |
| 5                    | 5411 | 5724 | 5459 | 5402 | 5543 |
| 10                   | 5358 | 5546 | 5509 | 5620 | 5299 |
| 15                   | 5331 | 5367 | 5501 | 5596 | 5347 |
| 20                   | 5467 | 5404 | 5329 | 5353 | 5666 |
| 25                   | 5642 | 5490 | 5442 | 5417 | 5521 |
| 30                   | 5260 | 5407 | 5479 | 5461 | 5628 |
| 35                   | 5428 | 5671 | 5283 | 5699 | 5592 |
| 40                   | 5663 | 5426 | 5639 | 5609 | 5687 |
| 45                   | 5378 | 5472 | 5280 | 5547 | 5594 |
| 50                   | 5310 | 5480 | 5513 | 5613 | 5605 |
| 55                   | 5412 | 5635 | 5625 | 5494 | 5581 |
| 60                   | 5364 | 5332 | 5272 | 5445 | 5389 |
| 65                   | 5409 | 5493 | 5421 | 5565 | 5622 |
| 70                   | 5611 | 5544 | 5626 | 5703 | 5512 |
| 75                   | 5326 | 5268 | 5595 | 5274 | 5297 |
| 80                   | 5652 | 5691 | 5670 | 5370 | 5363 |
| 85                   | 5383 | 5455 | 5575 | 5541 | 5470 |
| 90                   | 5657 | 5694 | 5474 | 5376 | 5413 |
| 95                   | 5316 | 5712 | 5627 | 5722 | 5319 |

**Type 6 Radar Waveform\_15**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5513 | 5426 | 5330 | 5327 | 5311 |
| 5                    | 5453 | 5271 | 5534 | 5565 | 5275 |
| 10                   | 5289 | 5335 | 5550 | 5340 | 5320 |
| 15                   | 5419 | 5494 | 5604 | 5544 | 5539 |
| 20                   | 5633 | 5345 | 5321 | 5326 | 5554 |
| 25                   | 5693 | 5546 | 5451 | 5660 | 5721 |
| 30                   | 5364 | 5694 | 5710 | 5448 | 5567 |
| 35                   | 5287 | 5377 | 5375 | 5528 | 5404 |
| 40                   | 5606 | 5616 | 5261 | 5555 | 5338 |
| 45                   | 5600 | 5384 | 5564 | 5656 | 5702 |
| 50                   | 5428 | 5356 | 5251 | 5579 | 5684 |
| 55                   | 5400 | 5713 | 5461 | 5437 | 5390 |
| 60                   | 5318 | 5678 | 5355 | 5577 | 5457 |
| 65                   | 5300 | 5417 | 5414 | 5612 | 5328 |
| 70                   | 5264 | 5542 | 5285 | 5483 | 5388 |
| 75                   | 5458 | 5576 | 5526 | 5407 | 5433 |
| 80                   | 5380 | 5258 | 5270 | 5558 | 5286 |
| 85                   | 5322 | 5515 | 5540 | 5632 | 5274 |
| 90                   | 5635 | 5663 | 5253 | 5683 | 5486 |
| 95                   | 5393 | 5431 | 5397 | 5492 | 5673 |



**Type 6 Radar Waveform\_16**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5293 | 5287 | 5266 | 5488 | 5628 |
| 5                    | 5495 | 5609 | 5253 | 5482 | 5695 |
| 10                   | 5599 | 5591 | 5438 | 5341 | 5410 |
| 15                   | 5524 | 5610 | 5589 | 5256 | 5330 |
| 20                   | 5324 | 5383 | 5299 | 5442 | 5443 |
| 25                   | 5650 | 5485 | 5702 | 5321 | 5337 |
| 30                   | 5387 | 5646 | 5706 | 5378 | 5350 |
| 35                   | 5627 | 5386 | 5367 | 5354 | 5302 |
| 40                   | 5547 | 5603 | 5448 | 5716 | 5638 |
| 45                   | 5396 | 5653 | 5271 | 5440 | 5357 |
| 50                   | 5615 | 5316 | 5629 | 5678 | 5439 |
| 55                   | 5533 | 5399 | 5694 | 5684 | 5590 |
| 60                   | 5602 | 5335 | 5625 | 5504 | 5398 |
| 65                   | 5517 | 5526 | 5493 | 5607 | 5309 |
| 70                   | 5692 | 5310 | 5331 | 5588 | 5518 |
| 75                   | 5719 | 5452 | 5411 | 5601 | 5654 |
| 80                   | 5303 | 5420 | 5689 | 5544 | 5418 |
| 85                   | 5267 | 5278 | 5286 | 5639 | 5478 |
| 90                   | 5417 | 5408 | 5586 | 5522 | 5559 |
| 95                   | 5325 | 5669 | 5665 | 5468 | 5595 |

**Type 6 Radar Waveform\_17**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5548 | 5526 | 5677 | 5649 | 5373 |
| 5                    | 5634 | 5693 | 5684 | 5416 | 5689 |
| 10                   | 5529 | 5388 | 5632 | 5633 | 5362 |
| 15                   | 5498 | 5651 | 5713 | 5448 | 5338 |
| 20                   | 5393 | 5324 | 5402 | 5272 | 5708 |
| 25                   | 5295 | 5527 | 5279 | 5519 | 5269 |
| 30                   | 5499 | 5278 | 5552 | 5636 | 5466 |
| 35                   | 5273 | 5566 | 5718 | 5305 | 5300 |
| 40                   | 5681 | 5534 | 5715 | 5312 | 5600 |
| 45                   | 5377 | 5696 | 5721 | 5357 | 5706 |
| 50                   | 5536 | 5316 | 5533 | 5666 | 5405 |
| 55                   | 5452 | 5622 | 5627 | 5487 | 5589 |
| 60                   | 5655 | 5292 | 5280 | 5457 | 5427 |
| 65                   | 5344 | 5475 | 5432 | 5342 | 5579 |
| 70                   | 5495 | 5382 | 5431 | 5437 | 5494 |
| 75                   | 5678 | 5531 | 5647 | 5635 | 5458 |
| 80                   | 5530 | 5470 | 5611 | 5481 | 5264 |
| 85                   | 5473 | 5664 | 5441 | 5609 | 5637 |
| 90                   | 5673 | 5282 | 5490 | 5297 | 5699 |
| 95                   | 5350 | 5704 | 5524 | 5444 | 5462 |

**Type 6 Radar Waveform\_18**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5328 | 5290 | 5613 | 5335 | 5690 |
| 5                    | 5676 | 5715 | 5284 | 5482 | 5518 |
| 10                   | 5460 | 5274 | 5673 | 5353 | 5383 |
| 15                   | 5586 | 5303 | 5341 | 5679 | 5640 |
| 20                   | 5346 | 5559 | 5265 | 5491 | 5342 |
| 25                   | 5596 | 5622 | 5255 | 5480 | 5553 |
| 30                   | 5311 | 5485 | 5710 | 5292 | 5313 |
| 35                   | 5664 | 5412 | 5657 | 5514 | 5458 |
| 40                   | 5689 | 5520 | 5617 | 5653 | 5552 |
| 45                   | 5694 | 5684 | 5329 | 5415 | 5662 |
| 50                   | 5423 | 5667 | 5709 | 5717 | 5591 |
| 55                   | 5275 | 5469 | 5340 | 5441 | 5304 |
| 60                   | 5626 | 5276 | 5457 | 5322 | 5289 |
| 65                   | 5253 | 5444 | 5424 | 5468 | 5649 |
| 70                   | 5471 | 5298 | 5551 | 5434 | 5286 |
| 75                   | 5373 | 5637 | 5293 | 5651 | 5315 |
| 80                   | 5616 | 5251 | 5300 | 5544 | 5261 |
| 85                   | 5668 | 5567 | 5420 | 5501 | 5326 |
| 90                   | 5716 | 5446 | 5577 | 5655 | 5636 |
| 95                   | 5707 | 5541 | 5499 | 5283 | 5513 |



| Type 6 Radar Waveform_19 |      |      |      |      |      |
|--------------------------|------|------|------|------|------|
| Frequency List (MHz)     | 0    | 1    | 2    | 3    | 4    |
| 0                        | 5583 | 5529 | 5646 | 5496 | 5435 |
| 5                        | 5718 | 5640 | 5359 | 5645 | 5250 |
| 10                       | 5294 | 5538 | 5714 | 5548 | 5404 |
| 15                       | 5674 | 5430 | 5444 | 5627 | 5357 |
| 20                       | 5257 | 5628 | 5303 | 5483 | 5315 |
| 25                       | 5387 | 5571 | 5458 | 5584 | 5587 |
| 30                       | 5450 | 5374 | 5667 | 5507 | 5562 |
| 35                       | 5484 | 5551 | 5273 | 5310 | 5708 |
| 40                       | 5700 | 5591 | 5317 | 5691 | 5613 |
| 45                       | 5656 | 5509 | 5473 | 5715 | 5688 |
| 50                       | 5446 | 5410 | 5293 | 5680 | 5573 |
| 55                       | 5413 | 5528 | 5298 | 5494 | 5500 |
| 60                       | 5405 | 5622 | 5267 | 5596 | 5554 |
| 65                       | 5711 | 5373 | 5407 | 5384 | 5266 |
| 70                       | 5479 | 5623 | 5653 | 5437 | 5513 |
| 75                       | 5349 | 5262 | 5296 | 5597 | 5487 |
| 80                       | 5464 | 5704 | 5258 | 5485 | 5567 |
| 85                       | 5421 | 5681 | 5642 | 5694 | 5300 |
| 90                       | 5345 | 5309 | 5670 | 5492 | 5350 |
| 95                       | 5558 | 5527 | 5395 | 5277 | 5386 |

| Type 6 Radar Waveform_20 |      |      |      |      |      |
|--------------------------|------|------|------|------|------|
| Frequency List (MHz)     | 0    | 1    | 2    | 3    | 4    |
| 0                        | 5266 | 5293 | 5582 | 5657 | 5277 |
| 5                        | 5285 | 5662 | 5434 | 5333 | 5457 |
| 10                       | 5700 | 5327 | 5377 | 5268 | 5425 |
| 15                       | 5665 | 5557 | 5547 | 5672 | 5646 |
| 20                       | 5265 | 5319 | 5719 | 5572 | 5288 |
| 25                       | 5275 | 5423 | 5661 | 5688 | 5621 |
| 30                       | 5492 | 5263 | 5624 | 5625 | 5714 |
| 35                       | 5682 | 5593 | 5364 | 5581 | 5386 |
| 40                       | 5614 | 5295 | 5405 | 5432 | 5460 |
| 45                       | 5542 | 5636 | 5592 | 5575 | 5322 |
| 50                       | 5586 | 5344 | 5294 | 5299 | 5260 |
| 55                       | 5716 | 5252 | 5684 | 5251 | 5471 |
| 60                       | 5534 | 5312 | 5687 | 5525 | 5477 |
| 65                       | 5279 | 5468 | 5443 | 5691 | 5536 |
| 70                       | 5282 | 5317 | 5261 | 5537 | 5362 |
| 75                       | 5325 | 5555 | 5609 | 5416 | 5504 |
| 80                       | 5578 | 5264 | 5628 | 5292 | 5633 |
| 85                       | 5680 | 5470 | 5676 | 5524 | 5613 |
| 90                       | 5549 | 5596 | 5467 | 5595 | 5510 |
| 95                       | 5315 | 5704 | 5374 | 5459 | 5511 |

| Type 6 Radar Waveform_21 |      |      |      |      |      |
|--------------------------|------|------|------|------|------|
| Frequency List (MHz)     | 0    | 1    | 2    | 3    | 4    |
| 0                        | 5521 | 5532 | 5518 | 5343 | 5497 |
| 5                        | 5424 | 5587 | 5509 | 5496 | 5286 |
| 10                       | 5631 | 5591 | 5418 | 5366 | 5446 |
| 15                       | 5278 | 5553 | 5717 | 5363 | 5273 |
| 20                       | 5388 | 5660 | 5564 | 5261 | 5541 |
| 25                       | 5372 | 5292 | 5317 | 5558 | 5534 |
| 30                       | 5724 | 5581 | 5365 | 5488 | 5502 |
| 35                       | 5257 | 5455 | 5474 | 5539 | 5528 |
| 40                       | 5609 | 5370 | 5700 | 5685 | 5374 |
| 45                       | 5616 | 5675 | 5492 | 5346 | 5673 |
| 50                       | 5287 | 5395 | 5383 | 5597 | 5679 |
| 55                       | 5429 | 5681 | 5302 | 5545 | 5442 |
| 60                       | 5663 | 5477 | 5632 | 5357 | 5303 |
| 65                       | 5291 | 5271 | 5479 | 5426 | 5428 |
| 70                       | 5560 | 5389 | 5722 | 5540 | 5686 |
| 75                       | 5301 | 5514 | 5578 | 5439 | 5647 |
| 80                       | 5559 | 5516 | 5398 | 5544 | 5695 |
| 85                       | 5355 | 5630 | 5400 | 5373 | 5487 |
| 90                       | 5708 | 5715 | 5318 | 5641 | 5634 |
| 95                       | 5471 | 5689 | 5664 | 5495 | 5452 |



**Type 6 Radar Waveform\_22**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5301 | 5296 | 5454 | 5407 | 5339 |
| 5                    | 5466 | 5609 | 5584 | 5562 | 5493 |
| 10                   | 5465 | 5380 | 5459 | 5561 | 5467 |
| 15                   | 5366 | 5714 | 5656 | 5665 | 5555 |
| 20                   | 5659 | 5554 | 5601 | 5653 | 5709 |
| 25                   | 5429 | 5699 | 5495 | 5518 | 5592 |
| 30                   | 5673 | 5613 | 5538 | 5580 | 5640 |
| 35                   | 5322 | 5396 | 5546 | 5270 | 5314 |
| 40                   | 5539 | 5448 | 5571 | 5308 | 5682 |
| 45                   | 5303 | 5499 | 5283 | 5550 | 5399 |
| 50                   | 5252 | 5549 | 5463 | 5446 | 5569 |
| 55                   | 5420 | 5526 | 5520 | 5635 | 5492 |
| 60                   | 5364 | 5413 | 5317 | 5642 | 5674 |
| 65                   | 5664 | 5604 | 5646 | 5418 | 5258 |
| 70                   | 5698 | 5363 | 5558 | 5708 | 5535 |
| 75                   | 5277 | 5473 | 5450 | 5559 | 5693 |
| 80                   | 5540 | 5293 | 5411 | 5325 | 5384 |
| 85                   | 5627 | 5595 | 5373 | 5360 | 5547 |
| 90                   | 5425 | 5382 | 5488 | 5365 | 5424 |
| 95                   | 5675 | 5516 | 5706 | 5719 | 5576 |

**Type 6 Radar Waveform\_23**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5556 | 5535 | 5390 | 5568 | 5559 |
| 5                    | 5508 | 5534 | 5659 | 5250 | 5700 |
| 10                   | 5396 | 5266 | 5500 | 5281 | 5488 |
| 15                   | 5454 | 5366 | 5284 | 5710 | 5272 |
| 20                   | 5667 | 5623 | 5639 | 5645 | 5682 |
| 25                   | 5317 | 5551 | 5698 | 5622 | 5626 |
| 30                   | 5715 | 5599 | 5495 | 5320 | 5414 |
| 35                   | 5520 | 5259 | 5541 | 5467 | 5453 |
| 40                   | 5287 | 5654 | 5721 | 5608 | 5301 |
| 45                   | 5610 | 5479 | 5452 | 5517 | 5328 |
| 50                   | 5497 | 5658 | 5718 | 5470 | 5708 |
| 55                   | 5589 | 5349 | 5332 | 5619 | 5496 |
| 60                   | 5527 | 5689 | 5315 | 5468 | 5590 |
| 65                   | 5641 | 5630 | 5316 | 5643 | 5384 |
| 70                   | 5253 | 5432 | 5419 | 5679 | 5361 |
| 75                   | 5521 | 5448 | 5581 | 5548 | 5578 |
| 80                   | 5624 | 5412 | 5276 | 5299 | 5510 |
| 85                   | 5617 | 5347 | 5652 | 5261 | 5336 |
| 90                   | 5530 | 5430 | 5612 | 5398 | 5592 |
| 95                   | 5723 | 5560 | 5345 | 5325 | 5433 |

**Type 6 Radar Waveform\_24**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5714 | 5299 | 5326 | 5254 | 5401 |
| 5                    | 5550 | 5556 | 5259 | 5413 | 5529 |
| 10                   | 5327 | 5530 | 5541 | 5476 | 5509 |
| 15                   | 5445 | 5493 | 5387 | 5280 | 5464 |
| 20                   | 5675 | 5314 | 5580 | 5655 | 5583 |
| 25                   | 5500 | 5426 | 5251 | 5660 | 5282 |
| 30                   | 5488 | 5452 | 5438 | 5566 | 5340 |
| 35                   | 5577 | 5350 | 5434 | 5620 | 5367 |
| 40                   | 5698 | 5359 | 5659 | 5373 | 5298 |
| 45                   | 5539 | 5459 | 5449 | 5569 | 5408 |
| 50                   | 5404 | 5679 | 5548 | 5272 | 5317 |
| 55                   | 5421 | 5543 | 5397 | 5380 | 5258 |
| 60                   | 5478 | 5497 | 5564 | 5425 | 5353 |
| 65                   | 5635 | 5516 | 5690 | 5393 | 5300 |
| 70                   | 5385 | 5347 | 5324 | 5302 | 5268 |
| 75                   | 5611 | 5607 | 5391 | 5291 | 5407 |
| 80                   | 5502 | 5700 | 5534 | 5362 | 5712 |
| 85                   | 5641 | 5621 | 5654 | 5616 | 5570 |
| 90                   | 5606 | 5631 | 5695 | 5436 | 5646 |
| 95                   | 5658 | 5701 | 5265 | 5354 | 5544 |



**Type 6 Radar Waveform\_25**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5494 | 5538 | 5262 | 5415 | 5621 |
| 5                    | 5689 | 5481 | 5334 | 5576 | 5261 |
| 10                   | 5636 | 5319 | 5582 | 5671 | 5530 |
| 15                   | 5533 | 5620 | 5490 | 5325 | 5656 |
| 20                   | 5586 | 5383 | 5521 | 5251 | 5628 |
| 25                   | 5471 | 5352 | 5629 | 5355 | 5694 |
| 30                   | 5421 | 5377 | 5409 | 5653 | 5340 |
| 35                   | 5716 | 5441 | 5705 | 5395 | 5281 |
| 40                   | 5537 | 5442 | 5597 | 5613 | 5295 |
| 45                   | 5468 | 5439 | 5532 | 5627 | 5461 |
| 50                   | 5669 | 5555 | 5516 | 5599 | 5361 |
| 55                   | 5267 | 5609 | 5497 | 5587 | 5674 |
| 60                   | 5704 | 5607 | 5662 | 5509 | 5257 |
| 65                   | 5276 | 5581 | 5717 | 5639 | 5429 |
| 70                   | 5510 | 5277 | 5625 | 5396 | 5288 |
| 75                   | 5271 | 5460 | 5583 | 5350 | 5260 |
| 80                   | 5347 | 5550 | 5580 | 5477 | 5644 |
| 85                   | 5618 | 5304 | 5327 | 5654 | 5458 |
| 90                   | 5655 | 5560 | 5660 | 5354 | 5385 |
| 95                   | 5540 | 5335 | 5379 | 5616 | 5420 |

**Type 6 Radar Waveform\_26**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5274 | 5302 | 5673 | 5576 | 5463 |
| 5                    | 5256 | 5503 | 5312 | 5264 | 5468 |
| 10                   | 5567 | 5583 | 5623 | 5294 | 5551 |
| 15                   | 5621 | 5650 | 5496 | 5273 | 5373 |
| 20                   | 5594 | 5549 | 5559 | 5340 | 5601 |
| 25                   | 5262 | 5301 | 5260 | 5459 | 5253 |
| 30                   | 5363 | 5366 | 5393 | 5589 | 5358 |
| 35                   | 5380 | 5532 | 5501 | 5548 | 5292 |
| 40                   | 5376 | 5525 | 5535 | 5378 | 5300 |
| 45                   | 5419 | 5615 | 5685 | 5514 | 5556 |
| 50                   | 5334 | 5692 | 5450 | 5565 | 5322 |
| 55                   | 5451 | 5493 | 5675 | 5261 | 5352 |
| 60                   | 5564 | 5577 | 5527 | 5540 | 5588 |
| 65                   | 5465 | 5342 | 5547 | 5428 | 5371 |
| 70                   | 5309 | 5607 | 5467 | 5596 | 5561 |
| 75                   | 5254 | 5279 | 5399 | 5389 | 5518 |
| 80                   | 5522 | 5557 | 5397 | 5593 | 5523 |
| 85                   | 5611 | 5433 | 5552 | 5550 | 5545 |
| 90                   | 5617 | 5325 | 5347 | 5396 | 5464 |
| 95                   | 5609 | 5432 | 5541 | 5488 | 5489 |

**Type 6 Radar Waveform\_27**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5529 | 5541 | 5609 | 5262 | 5683 |
| 5                    | 5298 | 5428 | 5387 | 5330 | 5297 |
| 10                   | 5401 | 5372 | 5664 | 5489 | 5572 |
| 15                   | 5709 | 5302 | 5599 | 5318 | 5662 |
| 20                   | 5602 | 5715 | 5500 | 5429 | 5574 |
| 25                   | 5625 | 5628 | 5463 | 5660 | 5287 |
| 30                   | 5505 | 5252 | 5323 | 5608 | 5266 |
| 35                   | 5556 | 5422 | 5623 | 5701 | 5681 |
| 40                   | 5690 | 5376 | 5521 | 5289 | 5704 |
| 45                   | 5399 | 5698 | 5646 | 5567 | 5346 |
| 50                   | 5685 | 5393 | 5636 | 5388 | 5527 |
| 55                   | 5510 | 5405 | 5492 | 5549 | 5390 |
| 60                   | 5517 | 5496 | 5396 | 5403 | 5570 |
| 65                   | 5537 | 5404 | 5552 | 5342 | 5706 |
| 70                   | 5637 | 5357 | 5374 | 5633 | 5535 |
| 75                   | 5268 | 5576 | 5587 | 5264 | 5542 |
| 80                   | 5506 | 5292 | 5655 | 5632 | 5452 |
| 85                   | 5515 | 5717 | 5460 | 5714 | 5716 |
| 90                   | 5391 | 5565 | 5551 | 5554 | 5682 |
| 95                   | 5456 | 5413 | 5519 | 5593 | 5412 |



**Type 6 Radar Waveform\_28**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5309 | 5305 | 5545 | 5423 | 5525 |
| 5                    | 5437 | 5450 | 5462 | 5493 | 5504 |
| 10                   | 5332 | 5258 | 5327 | 5684 | 5593 |
| 15                   | 5700 | 5429 | 5702 | 5363 | 5379 |
| 20                   | 5513 | 5441 | 5421 | 5547 | 5416 |
| 25                   | 5480 | 5666 | 5289 | 5321 | 5644 |
| 30                   | 5616 | 5280 | 5251 | 5515 | 5376 |
| 35                   | 5561 | 5336 | 5665 | 5476 | 5595 |
| 40                   | 5529 | 5313 | 5314 | 5286 | 5383 |
| 45                   | 5536 | 5282 | 5306 | 5704 | 5620 |
| 50                   | 5708 | 5569 | 5277 | 5250 | 5686 |
| 55                   | 5374 | 5601 | 5359 | 5682 | 5509 |
| 60                   | 5520 | 5422 | 5703 | 5326 | 5516 |
| 65                   | 5564 | 5486 | 5440 | 5384 | 5709 |
| 70                   | 5343 | 5377 | 5385 | 5511 | 5707 |
| 75                   | 5407 | 5523 | 5661 | 5402 | 5436 |
| 80                   | 5512 | 5534 | 5460 | 5653 | 5433 |
| 85                   | 5356 | 5454 | 5570 | 5405 | 5557 |
| 90                   | 5588 | 5467 | 5565 | 5430 | 5574 |
| 95                   | 5674 | 5293 | 5254 | 5559 | 5714 |

**Type 6 Radar Waveform\_29**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5467 | 5544 | 5481 | 5584 | 5270 |
| 5                    | 5479 | 5375 | 5537 | 5656 | 5711 |
| 10                   | 5263 | 5522 | 5368 | 5404 | 5614 |
| 15                   | 5313 | 5556 | 5330 | 5408 | 5571 |
| 20                   | 5521 | 5475 | 5510 | 5520 | 5304 |
| 25                   | 5429 | 5394 | 5393 | 5355 | 5686 |
| 30                   | 5602 | 5712 | 5466 | 5667 | 5671 |
| 35                   | 5700 | 5427 | 5461 | 5629 | 5606 |
| 40                   | 5465 | 5396 | 5252 | 5526 | 5380 |
| 45                   | 5262 | 5389 | 5287 | 5673 | 5498 |
| 50                   | 5437 | 5328 | 5339 | 5412 | 5318 |
| 55                   | 5314 | 5300 | 5491 | 5551 | 5372 |
| 60                   | 5483 | 5632 | 5627 | 5462 | 5290 |
| 65                   | 5435 | 5476 | 5594 | 5504 | 5312 |
| 70                   | 5403 | 5329 | 5477 | 5709 | 5487 |
| 75                   | 5661 | 5417 | 5352 | 5453 | 5438 |
| 80                   | 5512 | 5692 | 5388 | 5578 | 5509 |
| 85                   | 5254 | 5363 | 5495 | 5579 | 5528 |
| 90                   | 5699 | 5570 | 5702 | 5390 | 5563 |
| 95                   | 5622 | 5349 | 5577 | 5658 | 5305 |



|               |  |                   |            |
|---------------|--|-------------------|------------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                                      | Temperature       | 22°C       |
| Test Engineer | Peter  | Relative Humidity | 60%        |
| Test Site     | SR5  | Test Date         | 2022/05/07 |
| Test Item     | Radar Statistical Performance Check (802.11ax-HE80 mode – 5530MHz) |                   |            |

Radar Type 1-4 - Radar Statistical Performance

| Trial | Frequency<br>(MHz) | 1=Detection, 0=No Detection |              |              |              |
|-------|--------------------|-----------------------------|--------------|--------------|--------------|
|       |                    | Radar Type 1                | Radar Type 2 | Radar Type 3 | Radar Type 4 |
| 0     | 5491.0             | 1                           | 1            | 0            | 0            |
| 1     | 5493.7             | 1                           | 1            | 1            | 1            |
| 2     | 5496.5             | 1                           | 1            | 1            | 1            |
| 3     | 5499.2             | 1                           | 1            | 1            | 1            |
| 4     | 5501.9             | 1                           | 1            | 1            | 1            |
| 5     | 5504.7             | 1                           | 1            | 1            | 1            |
| 6     | 5507.4             | 1                           | 1            | 1            | 1            |
| 7     | 5510.1             | 1                           | 1            | 1            | 1            |
| 8     | 5512.8             | 1                           | 0            | 1            | 1            |
| 9     | 5515.6             | 1                           | 1            | 0            | 1            |
| 10    | 5518.3             | 1                           | 1            | 1            | 1            |
| 11    | 5521.0             | 1                           | 1            | 1            | 1            |
| 12    | 5523.8             | 1                           | 1            | 1            | 1            |
| 13    | 5526.5             | 1                           | 1            | 1            | 1            |
| 14    | 5530.0             | 1                           | 1            | 1            | 1            |
| 15    | 5532.7             | 1                           | 1            | 1            | 1            |
| 16    | 5535.5             | 1                           | 1            | 1            | 1            |
| 17    | 5538.2             | 1                           | 1            | 1            | 1            |
| 18    | 5540.9             | 1                           | 1            | 1            | 1            |
| 19    | 5543.7             | 1                           | 0            | 1            | 1            |
| 20    | 5546.4             | 1                           | 0            | 0            | 1            |
| 21    | 5549.1             | 1                           | 1            | 1            | 1            |
| 22    | 5551.8             | 1                           | 1            | 1            | 1            |
| 23    | 5554.6             | 1                           | 1            | 0            | 1            |
| 24    | 5557.3             | 1                           | 1            | 0            | 1            |
| 25    | 5560.0             | 1                           | 1            | 1            | 1            |
| 26    | 5562.8             | 1                           | 1            | 0            | 0            |





| Trial        | Frequency | 1=Detection,<br>0=No Detection | Trial | Frequency | 1=Detection,<br>0=No Detection |
|--------------|-----------|--------------------------------|-------|-----------|--------------------------------|
| 27           | 5565.5    | 1                              | 1     | 1         | 1                              |
| 28           | 5568.2    | 1                              | 1     | 1         | 1                              |
| 29           | 5569.0    | 1                              | 1     | 1         | 1                              |
| Probability: |           | 100%                           | 90%   | 80%       | 93.3%                          |
| Type1-4      |           | 90.825% (>80%)                 |       |           |                                |

Radar Type 1 - Radar Waveform

|          | Trial Id | Radar Type | Pulse Width (us) | PRI (us) | Number of Pulses | Waveform Length (us) |
|----------|----------|------------|------------------|----------|------------------|----------------------|
| Download | 0        | Type 1     | 1.0              | 878.0    | 61               | 53558.0              |
| Download | 1        | Type 1     | 1.0              | 518.0    | 102              | 52836.0              |
| Download | 2        | Type 1     | 1.0              | 898.0    | 59               | 52982.0              |
| Download | 3        | Type 1     | 1.0              | 678.0    | 78               | 52884.0              |
| Download | 4        | Type 1     | 1.0              | 638.0    | 83               | 52954.0              |
| Download | 5        | Type 1     | 1.0              | 778.0    | 68               | 52904.0              |
| Download | 6        | Type 1     | 1.0              | 858.0    | 62               | 53196.0              |
| Download | 7        | Type 1     | 1.0              | 598.0    | 89               | 53222.0              |
| Download | 8        | Type 1     | 1.0              | 738.0    | 72               | 53136.0              |
| Download | 9        | Type 1     | 1.0              | 618.0    | 86               | 53148.0              |
| Download | 10       | Type 1     | 1.0              | 578.0    | 92               | 53176.0              |
| Download | 11       | Type 1     | 1.0              | 838.0    | 63               | 52794.0              |
| Download | 12       | Type 1     | 1.0              | 758.0    | 70               | 53060.0              |
| Download | 13       | Type 1     | 1.0              | 538.0    | 99               | 53262.0              |
| Download | 14       | Type 1     | 1.0              | 658.0    | 81               | 53298.0              |
| Download | 15       | Type 1     | 1.0              | 2534.0   | 21               | 53214.0              |
| Download | 16       | Type 1     | 1.0              | 777.0    | 68               | 52836.0              |
| Download | 17       | Type 1     | 1.0              | 2817.0   | 19               | 53523.0              |
| Download | 18       | Type 1     | 1.0              | 928.0    | 57               | 52896.0              |
| Download | 19       | Type 1     | 1.0              | 1605.0   | 33               | 52965.0              |
| Download | 20       | Type 1     | 1.0              | 1758.0   | 31               | 54498.0              |
| Download | 21       | Type 1     | 1.0              | 2148.0   | 25               | 53700.0              |
| Download | 22       | Type 1     | 1.0              | 2231.0   | 24               | 53544.0              |
| Download | 23       | Type 1     | 1.0              | 538.0    | 99               | 53262.0              |
| Download | 24       | Type 1     | 1.0              | 1783.0   | 30               | 53490.0              |
| Download | 25       | Type 1     | 1.0              | 2369.0   | 23               | 54487.0              |
| Download | 26       | Type 1     | 1.0              | 2865.0   | 19               | 54435.0              |
| Download | 27       | Type 1     | 1.0              | 953.0    | 56               | 53368.0              |
| Download | 28       | Type 1     | 1.0              | 626.0    | 85               | 53210.0              |
| Download | 29       | Type 1     | 1.0              | 1425.0   | 38               | 54150.0              |

## Radar Type 2 - Radar Waveform

|          | Trial Id | Radar Type | Pulse Width (us) | PRI (us) | Number of Pulses | Waveform Length (us) |
|----------|----------|------------|------------------|----------|------------------|----------------------|
| Download | 0        | Type 2     | 4.1              | 186.0    | 28               | 5208.0               |
| Download | 1        | Type 2     | 1.3              | 172.0    | 23               | 3956.0               |
| Download | 2        | Type 2     | 4.8              | 188.0    | 29               | 5452.0               |
| Download | 3        | Type 2     | 1.7              | 158.0    | 24               | 3792.0               |
| Download | 4        | Type 2     | 3.6              | 159.0    | 27               | 4293.0               |
| Download | 5        | Type 2     | 1.0              | 230.0    | 23               | 5290.0               |
| Download | 6        | Type 2     | 3.9              | 201.0    | 28               | 5628.0               |
| Download | 7        | Type 2     | 1.2              | 200.0    | 23               | 4600.0               |
| Download | 8        | Type 2     | 2.9              | 203.0    | 26               | 5278.0               |
| Download | 9        | Type 2     | 1.6              | 214.0    | 24               | 5136.0               |
| Download | 10       | Type 2     | 2.3              | 189.0    | 25               | 4725.0               |
| Download | 11       | Type 2     | 1.1              | 228.0    | 23               | 5244.0               |
| Download | 12       | Type 2     | 1.4              | 150.0    | 23               | 3450.0               |
| Download | 13       | Type 2     | 1.1              | 202.0    | 23               | 4646.0               |
| Download | 14       | Type 2     | 2.4              | 229.0    | 25               | 5725.0               |
| Download | 15       | Type 2     | 1.2              | 164.0    | 23               | 3772.0               |
| Download | 16       | Type 2     | 1.2              | 196.0    | 23               | 4508.0               |
| Download | 17       | Type 2     | 4.5              | 166.0    | 29               | 4814.0               |
| Download | 18       | Type 2     | 2.2              | 193.0    | 25               | 4825.0               |
| Download | 19       | Type 2     | 3.0              | 227.0    | 26               | 5902.0               |
| Download | 20       | Type 2     | 1.1              | 187.0    | 23               | 4301.0               |
| Download | 21       | Type 2     | 2.1              | 225.0    | 25               | 5625.0               |
| Download | 22       | Type 2     | 5.0              | 181.0    | 29               | 5249.0               |
| Download | 23       | Type 2     | 3.9              | 192.0    | 28               | 5376.0               |
| Download | 24       | Type 2     | 4.0              | 175.0    | 28               | 4900.0               |
| Download | 25       | Type 2     | 1.6              | 180.0    | 24               | 4320.0               |
| Download | 26       | Type 2     | 2.1              | 226.0    | 24               | 5424.0               |
| Download | 27       | Type 2     | 4.9              | 206.0    | 29               | 5974.0               |
| Download | 28       | Type 2     | 2.0              | 208.0    | 24               | 4992.0               |
| Download | 29       | Type 2     | 3.5              | 205.0    | 27               | 5535.0               |

## Radar Type 3 - Radar Waveform

|          | Trial Id | Radar Type | Pulse Width (us) | PRI (us) | Number of Pulses | Waveform Length (us) |
|----------|----------|------------|------------------|----------|------------------|----------------------|
| Download | 0        | Type 3     | 9.1              | 363.0    | 18               | 6534.0               |
| Download | 1        | Type 3     | 6.3              | 235.0    | 16               | 3760.0               |
| Download | 2        | Type 3     | 9.8              | 440.0    | 18               | 7920.0               |
| Download | 3        | Type 3     | 6.7              | 291.0    | 16               | 4656.0               |
| Download | 4        | Type 3     | 8.6              | 387.0    | 17               | 6579.0               |
| Download | 5        | Type 3     | 6.0              | 319.0    | 16               | 5104.0               |
| Download | 6        | Type 3     | 8.9              | 220.0    | 18               | 3960.0               |
| Download | 7        | Type 3     | 6.2              | 219.0    | 16               | 3504.0               |
| Download | 8        | Type 3     | 7.9              | 402.0    | 17               | 6834.0               |
| Download | 9        | Type 3     | 6.6              | 414.0    | 16               | 6624.0               |
| Download | 10       | Type 3     | 7.3              | 231.0    | 16               | 3696.0               |
| Download | 11       | Type 3     | 6.1              | 297.0    | 16               | 4752.0               |
| Download | 12       | Type 3     | 6.4              | 286.0    | 16               | 4576.0               |
| Download | 13       | Type 3     | 6.1              | 462.0    | 16               | 7392.0               |
| Download | 14       | Type 3     | 7.4              | 399.0    | 17               | 6783.0               |
| Download | 15       | Type 3     | 6.2              | 372.0    | 16               | 5952.0               |
| Download | 16       | Type 3     | 6.2              | 464.0    | 16               | 7424.0               |
| Download | 17       | Type 3     | 9.5              | 450.0    | 18               | 8100.0               |
| Download | 18       | Type 3     | 7.2              | 221.0    | 16               | 3536.0               |
| Download | 19       | Type 3     | 8.0              | 214.0    | 17               | 3638.0               |
| Download | 20       | Type 3     | 6.1              | 478.0    | 16               | 7648.0               |
| Download | 21       | Type 3     | 7.1              | 282.0    | 16               | 4512.0               |
| Download | 22       | Type 3     | 10.0             | 489.0    | 18               | 8802.0               |
| Download | 23       | Type 3     | 8.9              | 228.0    | 18               | 4104.0               |
| Download | 24       | Type 3     | 9.0              | 250.0    | 18               | 4500.0               |
| Download | 25       | Type 3     | 6.6              | 333.0    | 16               | 5328.0               |
| Download | 26       | Type 3     | 7.1              | 410.0    | 16               | 6560.0               |
| Download | 27       | Type 3     | 9.9              | 201.0    | 18               | 3618.0               |
| Download | 28       | Type 3     | 7.0              | 343.0    | 16               | 5488.0               |
| Download | 29       | Type 3     | 8.5              | 393.0    | 17               | 6681.0               |

## Radar Type 4 - Radar Waveform

|          | Trial Id | Radar Type | Pulse Width (us) | PRI (us) | Number of Pulses | Waveform Length (us) |
|----------|----------|------------|------------------|----------|------------------|----------------------|
| Download | 0        | Type 4     | 17.9             | 363.0    | 15               | 5445.0               |
| Download | 1        | Type 4     | 11.7             | 235.0    | 12               | 2820.0               |
| Download | 2        | Type 4     | 19.5             | 440.0    | 16               | 7040.0               |
| Download | 3        | Type 4     | 12.7             | 291.0    | 12               | 3492.0               |
| Download | 4        | Type 4     | 16.9             | 387.0    | 15               | 5805.0               |
| Download | 5        | Type 4     | 11.1             | 319.0    | 12               | 3828.0               |
| Download | 6        | Type 4     | 17.5             | 220.0    | 15               | 3300.0               |
| Download | 7        | Type 4     | 11.5             | 219.0    | 12               | 2628.0               |
| Download | 8        | Type 4     | 15.2             | 402.0    | 14               | 5628.0               |
| Download | 9        | Type 4     | 12.4             | 414.0    | 12               | 4968.0               |
| Download | 10       | Type 4     | 13.9             | 231.0    | 13               | 3003.0               |
| Download | 11       | Type 4     | 11.3             | 297.0    | 12               | 3564.0               |
| Download | 12       | Type 4     | 12.0             | 286.0    | 12               | 3432.0               |
| Download | 13       | Type 4     | 11.3             | 462.0    | 12               | 5544.0               |
| Download | 14       | Type 4     | 14.2             | 399.0    | 13               | 5187.0               |
| Download | 15       | Type 4     | 11.5             | 372.0    | 12               | 4464.0               |
| Download | 16       | Type 4     | 11.6             | 464.0    | 12               | 5568.0               |
| Download | 17       | Type 4     | 18.9             | 450.0    | 16               | 7200.0               |
| Download | 18       | Type 4     | 13.7             | 221.0    | 13               | 2873.0               |
| Download | 19       | Type 4     | 15.4             | 214.0    | 14               | 2996.0               |
| Download | 20       | Type 4     | 11.3             | 478.0    | 12               | 5736.0               |
| Download | 21       | Type 4     | 13.6             | 282.0    | 13               | 3666.0               |
| Download | 22       | Type 4     | 20.0             | 489.0    | 16               | 7824.0               |
| Download | 23       | Type 4     | 17.5             | 228.0    | 15               | 3420.0               |
| Download | 24       | Type 4     | 17.7             | 250.0    | 15               | 3750.0               |
| Download | 25       | Type 4     | 12.3             | 333.0    | 12               | 3996.0               |
| Download | 26       | Type 4     | 13.4             | 410.0    | 13               | 5330.0               |
| Download | 27       | Type 4     | 19.7             | 201.0    | 16               | 3216.0               |
| Download | 28       | Type 4     | 13.3             | 343.0    | 13               | 4459.0               |
| Download | 29       | Type 4     | 16.7             | 393.0    | 15               | 5895.0               |



Radar Type 5 - Radar Statistical Performance

| Trail #                  | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection | Trail # | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection |
|--------------------------|---------------------|-------------------------------|---------|---------------------|-------------------------------|
| 0                        | 5530.0              | 1                             | 15      | 5492.0              | 1                             |
| 1                        | 5530.0              | 1                             | 16      | 5492.0              | 1                             |
| 2                        | 5530.0              | 1                             | 17      | 5497.0              | 1                             |
| 3                        | 5530.0              | 1                             | 18      | 5494.0              | 1                             |
| 4                        | 5530.0              | 1                             | 19      | 5495.0              | 1                             |
| 5                        | 5530.0              | 1                             | 20      | 5568.0              | 1                             |
| 6                        | 5530.0              | 1                             | 21      | 5566.0              | 1                             |
| 7                        | 5530.0              | 1                             | 22      | 5562.0              | 1                             |
| 8                        | 5530.0              | 1                             | 23      | 5564.0              | 1                             |
| 9                        | 5530.0              | 1                             | 24      | 5564.0              | 1                             |
| 10                       | 5494.0              | 1                             | 25      | 5567.0              | 1                             |
| 11                       | 5492.0              | 1                             | 26      | 5566.0              | 1                             |
| 12                       | 5492.0              | 1                             | 27      | 5562.0              | 1                             |
| 13                       | 5492.0              | 1                             | 28      | 5566.0              | 1                             |
| 14                       | 5494.0              | 1                             | 29      | 5564.0              | 1                             |
| Detection Percentage (%) |                     |                               |         |                     | 100%                          |

| Type 5 Radar Waveform_0 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 3801.0                  | 88.2             | 17                | 3                          | 1615.0     | 1157.0     | 1812.0     |
| 174528.0                | 54.1             | 17                | 1                          | 2000.0     | -          | -          |
| 344277.0                | 97.3             | 17                | 3                          | 1261.0     | 1341.0     | 1366.0     |
| 516615.0                | 59.6             | 17                | 1                          | 1101.0     | -          | -          |
| 685282.0                | 82.8             | 17                | 2                          | 1428.0     | 1994.0     | -          |
| 153592.0                | 50.8             | 17                | 1                          | 1579.0     | -          | -          |
| 323431.0                | 86.3             | 17                | 3                          | 1303.0     | 1012.0     | 1384.0     |
| 495377.0                | 52.8             | 17                | 1                          | 1361.0     | -          | -          |
| 665449.0                | 73.5             | 17                | 2                          | 1136.0     | 1068.0     | -          |
| 132522.0                | 58.0             | 17                | 1                          | 1736.0     | -          | -          |
| 303362.0                | 66.0             | 17                | 1                          | 1591.0     | -          | -          |
| 474340.0                | 51.7             | 17                | 1                          | 1346.0     | -          | -          |
| 645256.0                | 56.0             | 17                | 1                          | 1298.0     | -          | -          |
| 111464.0                | 52.0             | 17                | 1                          | 1872.0     | -          | -          |
| 281788.0                | 68.0             | 17                | 2                          | 1504.0     | 1420.0     | -          |
| 453206.0                | 53.2             | 17                | 1                          | 1481.0     | -          | -          |
| 623738.0                | 53.4             | 17                | 1                          | 1828.0     | -          | -          |

**Type 5 Radar Waveform\_1**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 170651.0          | 93.5             | 6                 | 3                          | 1245.0     | 1857.0     | 1723.0     |
| 494236.0          | 64.8             | 6                 | 1                          | 1106.0     | -          | -          |
| 816128.0          | 74.7             | 6                 | 2                          | 1945.0     | 1142.0     | -          |
| 1140038.0         | 52.1             | 6                 | 1                          | 1587.0     | -          | -          |
| 131258.0          | 64.4             | 6                 | 1                          | 1830.0     | -          | -          |
| 453102.0          | 99.9             | 6                 | 3                          | 1640.0     | 1453.0     | 1925.0     |
| 776252.0          | 86.0             | 6                 | 3                          | 1007.0     | 1050.0     | 1262.0     |
| 1098285.0         | 86.9             | 6                 | 3                          | 1126.0     | 1104.0     | 1739.0     |
| 91520.0           | 57.6             | 6                 | 1                          | 1248.0     | -          | -          |

**Type 5 Radar Waveform\_2**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 186411.0          | 63.4             | 20                | 1                          | 1063.0     | -          | -          |
| 329429.0          | 98.4             | 20                | 3                          | 1443.0     | 1906.0     | 1765.0     |
| 476371.0          | 62.7             | 20                | 1                          | 1769.0     | -          | -          |
| 23174.0           | 81.7             | 20                | 2                          | 1933.0     | 1258.0     | -          |
| 168497.0          | 53.7             | 20                | 1                          | 1138.0     | -          | -          |
| 312047.0          | 94.9             | 20                | 3                          | 1575.0     | 1745.0     | 1049.0     |
| 456081.0          | 96.4             | 20                | 3                          | 1308.0     | 1834.0     | 1782.0     |
| 5332.0            | 96.4             | 20                | 3                          | 1768.0     | 1374.0     | 1499.0     |
| 149925.0          | 83.3             | 20                | 2                          | 1960.0     | 1888.0     | -          |
| 294780.0          | 78.3             | 20                | 2                          | 1889.0     | 1414.0     | -          |
| 439360.0          | 80.4             | 20                | 2                          | 1680.0     | 1809.0     | -          |
| 582248.0          | 85.1             | 20                | 3                          | 1976.0     | 1938.0     | 1398.0     |
| 131947.0          | 93.8             | 20                | 3                          | 1982.0     | 1541.0     | 1084.0     |
| 277825.0          | 53.5             | 20                | 1                          | 1425.0     | -          | -          |
| 422138.0          | 67.5             | 20                | 2                          | 1019.0     | 1624.0     | -          |
| 566804.0          | 80.3             | 20                | 2                          | 1256.0     | 1610.0     | -          |
| 114796.0          | 65.2             | 20                | 1                          | 1291.0     | -          | -          |
| 260052.0          | 64.6             | 20                | 1                          | 1175.0     | -          | -          |
| 403884.0          | 81.2             | 20                | 2                          | 1901.0     | 1345.0     | -          |
| 547095.0          | 94.7             | 20                | 3                          | 1956.0     | 1687.0     | 1257.0     |

**Type 5 Radar Waveform\_3**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 193876.0          | 72.8             | 8                 | 2                          | 1085.0     | 1145.0     | -          |
| 484337.0          | 83.3             | 8                 | 2                          | 1091.0     | 1227.0     | -          |
| 773363.0          | 87.7             | 8                 | 3                          | 1537.0     | 1141.0     | 1882.0     |
| 1064458.0         | 75.5             | 8                 | 2                          | 1399.0     | 1853.0     | -          |
| 158025.0          | 78.9             | 8                 | 2                          | 1651.0     | 1097.0     | -          |
| 447619.0          | 94.0             | 8                 | 3                          | 1625.0     | 1829.0     | 1371.0     |
| 739720.0          | 63.7             | 8                 | 1                          | 1204.0     | -          | -          |
| 1027912.0         | 99.4             | 8                 | 3                          | 1719.0     | 1054.0     | 1403.0     |
| 122229.0          | 67.3             | 8                 | 2                          | 1979.0     | 1052.0     | -          |
| 412467.0          | 73.7             | 8                 | 2                          | 1477.0     | 1744.0     | -          |



**Type 5 Radar Waveform\_4**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 439449.0          | 54.2             | 15                | 1                          | 1593.0     | -          | -          |
| 621059.0          | 61.2             | 15                | 1                          | 1475.0     | -          | -          |
| 54025.0           | 72.7             | 15                | 2                          | 1154.0     | 1004.0     | -          |
| 235083.0          | 75.1             | 15                | 2                          | 1713.0     | 1455.0     | -          |
| 415161.0          | 87.4             | 15                | 3                          | 1410.0     | 1921.0     | 1724.0     |
| 596290.0          | 87.9             | 15                | 3                          | 1385.0     | 1793.0     | 1307.0     |
| 31574.0           | 90.2             | 15                | 3                          | 1755.0     | 1196.0     | 1798.0     |
| 212380.0          | 91.8             | 15                | 3                          | 1622.0     | 1773.0     | 1148.0     |
| 394538.0          | 54.3             | 15                | 1                          | 1961.0     | -          | -          |
| 575465.0          | 71.1             | 15                | 2                          | 1528.0     | 1078.0     | -          |
| 9351.0            | 55.3             | 15                | 1                          | 1529.0     | -          | -          |
| 190881.0          | 59.6             | 15                | 1                          | 1518.0     | -          | -          |
| 371272.0          | 68.8             | 15                | 2                          | 1838.0     | 1970.0     | -          |
| 551380.0          | 89.8             | 15                | 3                          | 1203.0     | 1864.0     | 1913.0     |
| 734053.0          | 72.8             | 15                | 2                          | 1093.0     | 1869.0     | -          |
| 168033.0          | 68.4             | 15                | 2                          | 1738.0     | 1946.0     | -          |

**Type 5 Radar Waveform\_5**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 699163.0          | 99.7             | 5                 | 3                          | 1668.0     | 1728.0     | 1648.0     |
| 1064330.0         | 61.3             | 5                 | 1                          | 1393.0     | -          | -          |
| 1428013.0         | 57.1             | 5                 | 1                          | 1159.0     | -          | -          |
| 292402.0          | 71.8             | 5                 | 2                          | 1241.0     | 1375.0     | -          |
| 655137.0          | 99.3             | 5                 | 3                          | 1240.0     | 1289.0     | 1064.0     |
| 1017089.0         | 85.2             | 5                 | 3                          | 1451.0     | 1715.0     | 1860.0     |
| 1382822.0         | 54.7             | 5                 | 1                          | 1607.0     | -          | -          |
| 247386.0          | 92.3             | 5                 | 3                          | 1160.0     | 1216.0     | 1948.0     |

**Type 5 Radar Waveform\_6**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 286098.0          | 84.9             | 16                | 3                          | 1891.0     | 1421.0     | 1236.0     |
| 457399.0          | 80.2             | 16                | 2                          | 1487.0     | 1207.0     | -          |
| 629181.0          | 60.7             | 16                | 1                          | 1310.0     | -          | -          |
| 94983.0           | 87.2             | 16                | 3                          | 1616.0     | 1474.0     | 1953.0     |
| 266225.0          | 52.8             | 16                | 1                          | 1693.0     | -          | -          |
| 437433.0          | 59.8             | 16                | 1                          | 1017.0     | -          | -          |
| 606809.0          | 81.2             | 16                | 2                          | 1313.0     | 1530.0     | -          |
| 74083.0           | 97.0             | 16                | 3                          | 1323.0     | 1380.0     | 1991.0     |
| 244504.0          | 79.1             | 16                | 2                          | 1973.0     | 1684.0     | -          |
| 415969.0          | 59.5             | 16                | 1                          | 1705.0     | -          | -          |
| 585655.0          | 74.0             | 16                | 2                          | 1542.0     | 1482.0     | -          |
| 53278.0           | 69.1             | 16                | 2                          | 1774.0     | 1026.0     | -          |
| 224290.0          | 62.3             | 16                | 1                          | 1255.0     | -          | -          |
| 394234.0          | 68.7             | 16                | 2                          | 1598.0     | 1351.0     | -          |
| 565864.0          | 66.1             | 16                | 1                          | 1522.0     | -          | -          |
| 32247.0           | 79.6             | 16                | 2                          | 1431.0     | 1975.0     | -          |
| 202162.0          | 90.2             | 16                | 3                          | 1839.0     | 1480.0     | 1674.0     |

**Type 5 Radar Waveform\_7**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 795349.0          | 73.4             | 5                 | 2                          | 1034.0     | 1040.0     | -          |
| 1159212.0         | 60.3             | 5                 | 1                          | 1338.0     | -          | -          |
| 24018.0           | 60.1             | 5                 | 1                          | 1626.0     | -          | -          |
| 386633.0          | 89.3             | 5                 | 3                          | 1434.0     | 1655.0     | 1583.0     |
| 750946.0          | 63.2             | 5                 | 1                          | 1383.0     | -          | -          |
| 1114286.0         | 64.4             | 5                 | 1                          | 1547.0     | -          | -          |
| 1474196.0         | 97.9             | 5                 | 3                          | 1787.0     | 1659.0     | 1662.0     |
| 342653.0          | 52.6             | 5                 | 1                          | 1649.0     | -          | -          |

**Type 5 Radar Waveform\_8**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 403331.0          | 60.4             | 12                | 1                          | 1210.0     | -          | -          |
| 608643.0          | 94.3             | 12                | 3                          | 1485.0     | 1053.0     | 1865.0     |
| 818264.0          | 52.4             | 12                | 1                          | 1470.0     | -          | -          |
| 169594.0          | 92.2             | 12                | 3                          | 1015.0     | 1342.0     | 1750.0     |
| 376009.0          | 95.5             | 12                | 3                          | 1884.0     | 1810.0     | 1486.0     |
| 584146.0          | 74.5             | 12                | 2                          | 1749.0     | 1223.0     | -          |
| 791740.0          | 69.1             | 12                | 2                          | 1317.0     | 1190.0     | -          |
| 144526.0          | 56.5             | 12                | 1                          | 1644.0     | -          | -          |
| 351487.0          | 80.5             | 12                | 2                          | 1776.0     | 1144.0     | -          |
| 557190.0          | 90.3             | 12                | 3                          | 1847.0     | 1602.0     | 1722.0     |
| 767001.0          | 57.2             | 12                | 1                          | 1623.0     | -          | -          |
| 118804.0          | 77.2             | 12                | 2                          | 1770.0     | 1057.0     | -          |
| 326322.0          | 52.9             | 12                | 1                          | 1990.0     | -          | -          |
| 532240.0          | 88.9             | 12                | 3                          | 1621.0     | 1316.0     | 1430.0     |

**Type 5 Radar Waveform\_9**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 1036111.0         | 94.6             | 7                 | 3                          | 1833.0     | 1200.0     | 1442.0     |
| 130529.0          | 89.9             | 7                 | 3                          | 1172.0     | 1989.0     | 1402.0     |
| 421510.0          | 58.4             | 7                 | 1                          | 1576.0     | -          | -          |
| 711187.0          | 80.6             | 7                 | 2                          | 1284.0     | 1939.0     | -          |
| 1002655.0         | 59.2             | 7                 | 1                          | 1775.0     | -          | -          |
| 95075.0           | 65.7             | 7                 | 1                          | 1304.0     | -          | -          |
| 385689.0          | 53.6             | 7                 | 1                          | 1636.0     | -          | -          |
| 676373.0          | 56.0             | 7                 | 1                          | 1559.0     | -          | -          |
| 966466.0          | 81.0             | 7                 | 2                          | 1143.0     | 1119.0     | -          |
| 59081.0           | 95.2             | 7                 | 3                          | 1885.0     | 1501.0     | 1618.0     |





**Type 5 Radar Waveform\_10**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 291043.0          | 77.6             | 10                | 2                          | 1849.0     | 1333.0     | -          |
| 533174.0          | 81.7             | 10                | 2                          | 1242.0     | 1246.0     | -          |
| 774871.0          | 75.8             | 10                | 2                          | 1247.0     | 1538.0     | -          |
| 19502.0           | 74.9             | 10                | 2                          | 1762.0     | 1516.0     | -          |
| 261057.0          | 94.6             | 10                | 3                          | 1494.0     | 1309.0     | 1169.0     |
| 504113.0          | 52.9             | 10                | 1                          | 1023.0     | -          | -          |
| 745557.0          | 71.7             | 10                | 2                          | 1128.0     | 1018.0     | -          |
| 987802.0          | 65.7             | 10                | 1                          | 1910.0     | -          | -          |
| 231806.0          | 62.8             | 10                | 1                          | 1797.0     | -          | -          |
| 472657.0          | 84.6             | 10                | 3                          | 1731.0     | 1570.0     | 1117.0     |
| 714239.0          | 92.4             | 10                | 3                          | 1082.0     | 1495.0     | 1671.0     |
| 957975.0          | 65.5             | 10                | 1                          | 1920.0     | -          | -          |

**Type 5 Radar Waveform\_11**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 302842.0          | 78.8             | 5                 | 2                          | 1919.0     | 1449.0     | -          |
| 666653.0          | 54.8             | 5                 | 1                          | 1502.0     | -          | -          |
| 1027728.0         | 83.6             | 5                 | 3                          | 1686.0     | 1914.0     | 1332.0     |
| 1390199.0         | 85.1             | 5                 | 3                          | 1837.0     | 1325.0     | 1909.0     |
| 258487.0          | 54.9             | 5                 | 1                          | 1305.0     | -          | -          |
| 621853.0          | 62.6             | 5                 | 1                          | 1582.0     | -          | -          |
| 984539.0          | 81.9             | 5                 | 2                          | 1177.0     | 1510.0     | -          |
| 1346926.0         | 78.4             | 5                 | 2                          | 1534.0     | 1997.0     | -          |

**Type 5 Radar Waveform\_12**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 189889.0          | 58.9             | 6                 | 1                          | 1720.0     | -          | -          |
| 512918.0          | 52.3             | 6                 | 1                          | 1536.0     | -          | -          |
| 834021.0          | 87.2             | 6                 | 3                          | 1229.0     | 1845.0     | 1488.0     |
| 1156618.0         | 84.5             | 6                 | 3                          | 1577.0     | 1407.0     | 1201.0     |
| 150117.0          | 65.7             | 6                 | 1                          | 1637.0     | -          | -          |
| 472478.0          | 70.3             | 6                 | 2                          | 1710.0     | 1664.0     | -          |
| 795357.0          | 80.9             | 6                 | 2                          | 1508.0     | 1328.0     | -          |
| 1117752.0         | 82.7             | 6                 | 2                          | 1917.0     | 1267.0     | -          |
| 110353.0          | 55.2             | 6                 | 1                          | 1397.0     | -          | -          |

| Type 5 Radar Waveform_13 |                  |                   |                            |            |            |            |
|--------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)        | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 487251.0                 | 82.2             | 5                 | 2                          | 1090.0     | 1441.0     | -          |
| 849593.0                 | 99.0             | 5                 | 3                          | 1318.0     | 1695.0     | 1001.0     |
| 1214309.0                | 54.4             | 5                 | 1                          | 1679.0     | -          | -          |
| 79407.0                  | 63.3             | 5                 | 1                          | 1118.0     | -          | -          |
| 442751.0                 | 57.2             | 5                 | 1                          | 1733.0     | -          | -          |
| 806214.0                 | 64.6             | 5                 | 1                          | 1574.0     | -          | -          |
| 1169326.0                | 63.8             | 5                 | 1                          | 1963.0     | -          | -          |
| 34540.0                  | 98.7             | 5                 | 3                          | 1676.0     | 1690.0     | 1606.0     |

| Type 5 Radar Waveform_14 |                  |                   |                            |            |            |            |
|--------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)        | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 264288.0                 | 94.3             | 10                | 3                          | 1612.0     | 1927.0     | 1532.0     |
| 507167.0                 | 61.9             | 10                | 1                          | 1966.0     | -          | -          |
| 748577.0                 | 77.5             | 10                | 2                          | 1697.0     | 1127.0     | -          |
| 990584.0                 | 68.6             | 10                | 2                          | 1009.0     | 1654.0     | -          |
| 234643.0                 | 91.5             | 10                | 3                          | 1515.0     | 1496.0     | 1726.0     |
| 477391.0                 | 64.4             | 10                | 1                          | 1883.0     | -          | -          |
| 718452.0                 | 68.4             | 10                | 2                          | 1348.0     | 1942.0     | -          |
| 957847.0                 | 96.6             | 10                | 3                          | 1983.0     | 1962.0     | 1772.0     |
| 205242.0                 | 79.0             | 10                | 2                          | 1230.0     | 1899.0     | -          |
| 447862.0                 | 61.0             | 10                | 1                          | 1239.0     | -          | -          |
| 690122.0                 | 53.5             | 10                | 1                          | 1197.0     | -          | -          |
| 928828.0                 | 97.0             | 10                | 3                          | 1895.0     | 1558.0     | 1531.0     |

| Type 5 Radar Waveform_15 |                  |                   |                            |            |            |            |
|--------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)        | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 263540.0                 | 74.2             | 6                 | 2                          | 1395.0     | 1314.0     | -          |
| 627161.0                 | 60.8             | 6                 | 1                          | 1562.0     | -          | -          |
| 987868.0                 | 91.1             | 6                 | 3                          | 1977.0     | 1985.0     | 1702.0     |
| 1352760.0                | 74.2             | 6                 | 2                          | 1461.0     | 1471.0     | -          |
| 219025.0                 | 52.5             | 6                 | 1                          | 1237.0     | -          | -          |
| 581547.0                 | 86.2             | 6                 | 3                          | 1076.0     | 1641.0     | 1030.0     |
| 945171.0                 | 75.2             | 6                 | 2                          | 1456.0     | 1125.0     | -          |
| 1306256.0                | 94.5             | 6                 | 3                          | 1987.0     | 1804.0     | 1178.0     |

**Type 5 Radar Waveform\_16**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 174016.0          | 91.3             | 6                 | 3                          | 1150.0     | 1074.0     | 1033.0     |
| 537704.0          | 59.1             | 6                 | 1                          | 1359.0     | -          | -          |
| 900105.0          | 74.3             | 6                 | 2                          | 1174.0     | 1959.0     | -          |
| 1263793.0         | 72.1             | 6                 | 2                          | 1195.0     | 1167.0     | -          |
| 129222.0          | 89.1             | 6                 | 3                          | 1287.0     | 1604.0     | 1281.0     |
| 492949.0          | 60.5             | 6                 | 1                          | 1311.0     | -          | -          |
| 855368.0          | 80.7             | 6                 | 2                          | 1761.0     | 1404.0     | -          |
| 1217819.0         | 85.6             | 6                 | 3                          | 1600.0     | 1161.0     | 1116.0     |

**Type 5 Radar Waveform\_17**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 35463.0           | 88.0             | 18                | 3                          | 1282.0     | 1433.0     | 1357.0     |
| 188368.0          | 52.2             | 18                | 1                          | 1682.0     | -          | -          |
| 340722.0          | 71.6             | 18                | 2                          | 1164.0     | 1286.0     | -          |
| 491020.0          | 90.2             | 18                | 3                          | 1903.0     | 1922.0     | 1540.0     |
| 16734.0           | 69.8             | 18                | 2                          | 1514.0     | 1926.0     | -          |
| 169031.0          | 86.4             | 18                | 3                          | 1042.0     | 1162.0     | 1406.0     |
| 322668.0          | 60.7             | 18                | 1                          | 1002.0     | -          | -          |
| 475583.0          | 50.6             | 18                | 1                          | 1028.0     | -          | -          |
| 628018.0          | 54.3             | 18                | 1                          | 1523.0     | -          | -          |
| 150867.0          | 59.8             | 18                | 1                          | 1120.0     | -          | -          |
| 302873.0          | 67.5             | 18                | 2                          | 1667.0     | 1321.0     | -          |
| 453930.0          | 88.0             | 18                | 3                          | 1243.0     | 1894.0     | 1779.0     |
| 608020.0          | 68.7             | 18                | 2                          | 1468.0     | 1271.0     | -          |
| 131330.0          | 88.0             | 18                | 3                          | 1123.0     | 1571.0     | 1780.0     |
| 283517.0          | 86.8             | 18                | 3                          | 1642.0     | 1620.0     | 1003.0     |
| 437618.0          | 59.2             | 18                | 1                          | 1447.0     | -          | -          |
| 589654.0          | 77.3             | 18                | 2                          | 1254.0     | 1037.0     | -          |
| 112648.0          | 85.7             | 18                | 3                          | 1329.0     | 1459.0     | 1396.0     |
| 265519.0          | 81.0             | 18                | 2                          | 1350.0     | 1156.0     | -          |

**Type 5 Radar Waveform\_18**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 723504.0          | 71.4             | 9                 | 2                          | 1249.0     | 1048.0     | -          |
| 988090.0          | 57.9             | 9                 | 1                          | 1677.0     | -          | -          |
| 162942.0          | 80.3             | 9                 | 2                          | 1135.0     | 1132.0     | -          |
| 427426.0          | 60.7             | 9                 | 1                          | 1110.0     | -          | -          |
| 690586.0          | 71.1             | 9                 | 2                          | 1503.0     | 1419.0     | -          |
| 953101.0          | 89.5             | 9                 | 3                          | 1415.0     | 1704.0     | 1349.0     |
| 130368.0          | 69.3             | 9                 | 2                          | 1647.0     | 1047.0     | -          |
| 394693.0          | 57.4             | 9                 | 1                          | 1595.0     | -          | -          |
| 656813.0          | 85.1             | 9                 | 3                          | 1219.0     | 1808.0     | 1995.0     |
| 920354.0          | 87.7             | 9                 | 3                          | 1344.0     | 1923.0     | 1544.0     |
| 97960.0           | 55.4             | 9                 | 1                          | 1566.0     | -          | -          |



| Type 5 Radar Waveform_19 |                  |                   |                            |            |            |            |
|--------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)        | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 284113.0                 | 79.6             | 12                | 2                          | 1512.0     | 1044.0     | -          |
| 491184.0                 | 80.9             | 12                | 2                          | 1581.0     | 1312.0     | -          |
| 697243.0                 | 83.8             | 12                | 3                          | 1027.0     | 1943.0     | 1297.0     |
| 51258.0                  | 82.9             | 12                | 2                          | 1947.0     | 1631.0     | -          |
| 258807.0                 | 58.5             | 12                | 1                          | 1816.0     | -          | -          |
| 465926.0                 | 76.8             | 12                | 2                          | 1340.0     | 1071.0     | -          |
| 671315.0                 | 89.5             | 12                | 3                          | 1586.0     | 1467.0     | 1784.0     |
| 25810.0                  | 63.4             | 12                | 1                          | 1851.0     | -          | -          |
| 232902.0                 | 77.1             | 12                | 2                          | 1294.0     | 1817.0     | -          |
| 439548.0                 | 87.8             | 12                | 3                          | 1192.0     | 1228.0     | 1628.0     |
| 648219.0                 | 50.1             | 12                | 1                          | 1714.0     | -          | -          |
| 258.0                    | 90.4             | 12                | 3                          | 1974.0     | 1147.0     | 1355.0     |
| 207354.0                 | 69.8             | 12                | 2                          | 1513.0     | 1737.0     | -          |
| 414221.0                 | 92.7             | 12                | 3                          | 1108.0     | 1517.0     | 1098.0     |

| Type 5 Radar Waveform_20 |                  |                   |                            |            |            |            |
|--------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)        | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 1090262.0                | 68.6             | 5                 | 2                          | 1131.0     | 1045.0     | -          |
| 1451604.0                | 87.2             | 5                 | 3                          | 1275.0     | 1448.0     | 1438.0     |
| 318815.0                 | 75.8             | 5                 | 2                          | 1746.0     | 1186.0     | -          |
| 682531.0                 | 53.2             | 5                 | 1                          | 1549.0     | -          | -          |
| 1044816.0                | 72.4             | 5                 | 2                          | 1813.0     | 1365.0     | -          |
| 1409067.0                | 65.0             | 5                 | 1                          | 1875.0     | -          | -          |
| 273909.0                 | 94.9             | 5                 | 3                          | 1373.0     | 1187.0     | 1367.0     |
| 637738.0                 | 53.3             | 5                 | 1                          | 1613.0     | -          | -          |

| Type 5 Radar Waveform_21 |                  |                   |                            |            |            |            |
|--------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)        | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 727309.0                 | 79.5             | 9                 | 2                          | 1094.0     | 1272.0     | -          |
| 991694.0                 | 59.2             | 9                 | 1                          | 1949.0     | -          | -          |
| 166649.0                 | 77.7             | 9                 | 2                          | 1844.0     | 1353.0     | -          |
| 431218.0                 | 57.7             | 9                 | 1                          | 1266.0     | -          | -          |
| 693685.0                 | 91.6             | 9                 | 3                          | 1214.0     | 1422.0     | 1460.0     |
| 959475.0                 | 50.4             | 9                 | 1                          | 1594.0     | -          | -          |
| 134303.0                 | 50.7             | 9                 | 1                          | 1998.0     | -          | -          |
| 398435.0                 | 50.5             | 9                 | 1                          | 1897.0     | -          | -          |
| 662406.0                 | 79.0             | 9                 | 2                          | 1080.0     | 1061.0     | -          |
| 925531.0                 | 75.6             | 9                 | 2                          | 1806.0     | 1435.0     | -          |
| 101811.0                 | 63.0             | 9                 | 1                          | 1578.0     | -          | -          |



**Type 5 Radar Waveform\_22**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 200172.0          | 99.0             | 20                | 3                          | 1694.0     | 1465.0     | 1081.0     |
| 345283.0          | 80.3             | 20                | 2                          | 1786.0     | 1381.0     | -          |
| 488563.0          | 86.7             | 20                | 3                          | 1905.0     | 1268.0     | 1785.0     |
| 38075.0           | 54.2             | 20                | 1                          | 1226.0     | -          | -          |
| 182542.0          | 85.9             | 20                | 3                          | 1134.0     | 1437.0     | 1121.0     |
| 327116.0          | 79.5             | 20                | 2                          | 1911.0     | 1870.0     | -          |
| 473142.0          | 59.9             | 20                | 1                          | 1981.0     | -          | -          |
| 20140.0           | 69.8             | 20                | 2                          | 1464.0     | 1166.0     | -          |
| 165219.0          | 63.8             | 20                | 1                          | 1912.0     | -          | -          |
| 310651.0          | 58.6             | 20                | 1                          | 1185.0     | -          | -          |
| 453418.0          | 93.3             | 20                | 3                          | 1358.0     | 1546.0     | 1519.0     |
| 2291.0            | 71.3             | 20                | 2                          | 1689.0     | 1619.0     | -          |
| 147098.0          | 67.5             | 20                | 2                          | 1730.0     | 1213.0     | -          |
| 292706.0          | 60.4             | 20                | 1                          | 1300.0     | -          | -          |
| 436875.0          | 68.0             | 20                | 2                          | 1270.0     | 1444.0     | -          |
| 582551.0          | 52.5             | 20                | 1                          | 1877.0     | -          | -          |
| 129562.0          | 52.2             | 20                | 1                          | 1551.0     | -          | -          |
| 273291.0          | 93.5             | 20                | 3                          | 1319.0     | 1930.0     | 1382.0     |
| 419935.0          | 54.1             | 20                | 1                          | 1427.0     | -          | -          |
| 564819.0          | 62.7             | 20                | 1                          | 1732.0     | -          | -          |

**Type 5 Radar Waveform\_23**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 131085.0          | 72.7             | 16                | 2                          | 1843.0     | 1630.0     | -          |
| 302087.0          | 60.6             | 16                | 1                          | 1969.0     | -          | -          |
| 472128.0          | 76.2             | 16                | 2                          | 1652.0     | 1330.0     | -          |
| 644282.0          | 51.3             | 16                | 1                          | 1146.0     | -          | -          |
| 110132.0          | 74.5             | 16                | 2                          | 1590.0     | 1688.0     | -          |
| 281094.0          | 55.1             | 16                | 1                          | 1879.0     | -          | -          |
| 452045.0          | 50.7             | 16                | 1                          | 1555.0     | -          | -          |
| 619898.0          | 85.3             | 16                | 3                          | 1179.0     | 1789.0     | 1944.0     |
| 89002.0           | 89.0             | 16                | 3                          | 1234.0     | 1362.0     | 1788.0     |
| 260071.0          | 62.6             | 16                | 1                          | 1856.0     | -          | -          |
| 430098.0          | 76.5             | 16                | 2                          | 1339.0     | 1696.0     | -          |
| 601534.0          | 58.8             | 16                | 1                          | 1896.0     | -          | -          |
| 68170.0           | 74.5             | 16                | 2                          | 1653.0     | 1439.0     | -          |
| 238503.0          | 77.4             | 16                | 2                          | 1771.0     | 1663.0     | -          |
| 409343.0          | 70.8             | 16                | 2                          | 1077.0     | 1543.0     | -          |
| 580787.0          | 62.4             | 16                | 1                          | 1552.0     | -          | -          |
| 47195.0           | 82.0             | 16                | 2                          | 1729.0     | 1060.0     | -          |

**Type 5 Radar Waveform\_24**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 217564.0          | 83.0             | 16                | 2                          | 1861.0     | 1423.0     | -          |
| 387573.0          | 90.0             | 16                | 3                          | 1781.0     | 1184.0     | 1031.0     |
| 558757.0          | 73.8             | 16                | 2                          | 1199.0     | 1597.0     | -          |
| 26230.0           | 62.4             | 16                | 1                          | 1743.0     | -          | -          |
| 196425.0          | 95.2             | 16                | 3                          | 1429.0     | 1292.0     | 1099.0     |
| 367502.0          | 81.0             | 16                | 2                          | 1208.0     | 1070.0     | -          |
| 536775.0          | 94.7             | 16                | 3                          | 1952.0     | 1079.0     | 1043.0     |
| 5176.0            | 86.3             | 16                | 3                          | 1122.0     | 1692.0     | 1326.0     |
| 175104.0          | 88.0             | 16                | 3                          | 1890.0     | 1601.0     | 1717.0     |
| 346758.0          | 60.2             | 16                | 1                          | 1718.0     | -          | -          |
| 515342.0          | 97.4             | 16                | 3                          | 1066.0     | 1790.0     | 1854.0     |
| 687021.0          | 73.5             | 16                | 2                          | 1372.0     | 1678.0     | -          |
| 154243.0          | 98.0             | 16                | 3                          | 1666.0     | 1841.0     | 1378.0     |
| 324660.0          | 98.6             | 16                | 3                          | 1168.0     | 1356.0     | 1489.0     |
| 496547.0          | 57.1             | 16                | 1                          | 1657.0     | -          | -          |
| 665581.0          | 74.9             | 16                | 2                          | 1764.0     | 1753.0     | -          |
| 134029.0          | 62.8             | 16                | 1                          | 1056.0     | -          | -          |



**Type 5 Radar Waveform\_25**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 575149.0          | 90.3             | 7                 | 3                          | 1280.0     | 1450.0     | 1364.0     |
| 897108.0          | 88.4             | 7                 | 3                          | 1599.0     | 1327.0     | 1796.0     |
| 1222611.0         | 54.0             | 7                 | 1                          | 1155.0     | -          | -          |
| 212887.0          | 85.3             | 7                 | 3                          | 1709.0     | 1915.0     | 1525.0     |
| 535701.0          | 79.7             | 7                 | 2                          | 1752.0     | 1691.0     | -          |
| 858404.0          | 80.7             | 7                 | 2                          | 1791.0     | 1400.0     | -          |
| 1180677.0         | 78.8             | 7                 | 2                          | 1734.0     | 1827.0     | -          |
| 173437.0          | 74.7             | 7                 | 2                          | 1924.0     | 1476.0     | -          |
| 496324.0          | 80.8             | 7                 | 2                          | 1129.0     | 1369.0     | -          |

**Type 5 Radar Waveform\_26**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 670559.0          | 51.2             | 9                 | 1                          | 1409.0     | -          | -          |
| 934253.0          | 82.2             | 9                 | 2                          | 1005.0     | 1038.0     | -          |
| 109204.0          | 84.4             | 9                 | 3                          | 1826.0     | 1062.0     | 1800.0     |
| 372651.0          | 96.8             | 9                 | 3                          | 1472.0     | 1900.0     | 1306.0     |
| 636421.0          | 90.1             | 9                 | 3                          | 1170.0     | 1114.0     | 1840.0     |
| 899369.0          | 89.7             | 9                 | 3                          | 1554.0     | 1698.0     | 1634.0     |
| 76946.0           | 55.6             | 9                 | 1                          | 1968.0     | -          | -          |
| 340552.0          | 70.5             | 9                 | 2                          | 1747.0     | 1807.0     | -          |
| 604952.0          | 69.2             | 9                 | 2                          | 1194.0     | 1133.0     | -          |
| 869332.0          | 53.5             | 9                 | 1                          | 1871.0     | -          | -          |
| 44352.0           | 80.4             | 9                 | 2                          | 1608.0     | 1902.0     | -          |

**Type 5 Radar Waveform\_27**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 169498.0          | 50.3             | 20                | 1                          | 1742.0     | -          | -          |
| 313949.0          | 77.5             | 20                | 2                          | 1103.0     | 1866.0     | -          |
| 458450.0          | 79.6             | 20                | 2                          | 1681.0     | 1675.0     | -          |
| 6513.0            | 81.6             | 20                | 2                          | 1863.0     | 1302.0     | -          |
| 151750.0          | 65.0             | 20                | 1                          | 1252.0     | -          | -          |
| 295758.0          | 86.6             | 20                | 3                          | 1301.0     | 1233.0     | 1151.0     |
| 439278.0          | 95.0             | 20                | 3                          | 1394.0     | 1836.0     | 1951.0     |
| 587415.0          | 53.4             | 20                | 1                          | 1232.0     | -          | -          |
| 133911.0          | 61.7             | 20                | 1                          | 1035.0     | -          | -          |
| 277509.0          | 91.1             | 20                | 3                          | 1299.0     | 1751.0     | 1567.0     |
| 423783.0          | 64.1             | 20                | 1                          | 1971.0     | -          | -          |
| 568215.0          | 69.4             | 20                | 2                          | 1539.0     | 1072.0     | -          |
| 115547.0          | 84.0             | 20                | 3                          | 1183.0     | 1067.0     | 1212.0     |
| 260919.0          | 61.7             | 20                | 1                          | 1873.0     | -          | -          |
| 404764.0          | 87.1             | 20                | 3                          | 1173.0     | 1130.0     | 1368.0     |
| 549553.0          | 82.5             | 20                | 2                          | 1556.0     | 1940.0     | -          |
| 98027.0           | 58.3             | 20                | 1                          | 1627.0     | -          | -          |
| 242123.0          | 96.7             | 20                | 3                          | 1041.0     | 1390.0     | 1725.0     |
| 388474.0          | 53.2             | 20                | 1                          | 1320.0     | -          | -          |
| 533570.0          | 59.2             | 20                | 1                          | 1436.0     | -          | -          |



**Type 5 Radar Waveform\_28**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 145506.0          | 95.0             | 9                 | 3                          | 1748.0     | 1220.0     | 1650.0     |
| 409087.0          | 87.7             | 9                 | 3                          | 1363.0     | 1337.0     | 1596.0     |
| 674579.0          | 64.4             | 9                 | 1                          | 1139.0     | -          | -          |
| 937338.0          | 79.7             | 9                 | 2                          | 1221.0     | 1711.0     | -          |
| 113341.0          | 62.4             | 9                 | 1                          | 1852.0     | -          | -          |
| 377458.0          | 51.8             | 9                 | 1                          | 1893.0     | -          | -          |
| 639696.0          | 91.3             | 9                 | 3                          | 1986.0     | 1550.0     | 1553.0     |
| 904648.0          | 70.1             | 9                 | 2                          | 1202.0     | 1955.0     | -          |
| 80822.0           | 57.6             | 9                 | 1                          | 1638.0     | -          | -          |
| 344651.0          | 67.8             | 9                 | 2                          | 1265.0     | 1491.0     | -          |
| 608892.0          | 77.4             | 9                 | 2                          | 1014.0     | 1153.0     | -          |

**Type 5 Radar Waveform\_29**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 599179.0          | 79.4             | 15                | 2                          | 1424.0     | 1277.0     | -          |
| 33168.0           | 53.5             | 15                | 1                          | 1701.0     | -          | -          |
| 213531.0          | 94.5             | 15                | 3                          | 1904.0     | 1935.0     | 1778.0     |
| 396200.0          | 62.5             | 15                | 1                          | 1588.0     | -          | -          |
| 577943.0          | 62.8             | 15                | 1                          | 1290.0     | -          | -          |
| 10818.0           | 58.7             | 15                | 1                          | 1335.0     | -          | -          |
| 191771.0          | 72.5             | 15                | 2                          | 1814.0     | 1941.0     | -          |
| 372938.0          | 70.3             | 15                | 2                          | 1629.0     | 1767.0     | -          |
| 552887.0          | 93.2             | 15                | 3                          | 1672.0     | 1603.0     | 1639.0     |
| 734259.0          | 85.7             | 15                | 3                          | 1109.0     | 1584.0     | 1545.0     |
| 169548.0          | 75.4             | 15                | 2                          | 1569.0     | 1874.0     | -          |
| 351598.0          | 63.0             | 15                | 1                          | 1343.0     | -          | -          |
| 530819.0          | 89.7             | 15                | 3                          | 2000.0     | 1137.0     | 1509.0     |
| 711433.0          | 87.2             | 15                | 3                          | 1354.0     | 1589.0     | 1868.0     |
| 147697.0          | 62.7             | 15                | 1                          | 1152.0     | -          | -          |
| 329245.0          | 50.4             | 15                | 1                          | 1315.0     | -          | -          |



Radar Type 6 - Radar Statistical Performance

| Trail #                  | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection | Trail # | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection |
|--------------------------|---------------------|-------------------------------|---------|---------------------|-------------------------------|
| 0                        | 5491.0              | 1                             | 15      | 5532.7              | 1                             |
| 1                        | 5493.7              | 1                             | 16      | 5535.5              | 1                             |
| 2                        | 5496.5              | 1                             | 17      | 5538.2              | 1                             |
| 3                        | 5499.2              | 1                             | 18      | 5540.9              | 1                             |
| 4                        | 5501.9              | 1                             | 19      | 5543.7              | 1                             |
| 5                        | 5504.7              | 1                             | 20      | 5546.4              | 1                             |
| 6                        | 5507.4              | 1                             | 21      | 5549.1              | 1                             |
| 7                        | 5510.1              | 1                             | 22      | 5551.8              | 1                             |
| 8                        | 5512.8              | 1                             | 23      | 5554.6              | 1                             |
| 9                        | 5515.6              | 1                             | 24      | 5557.3              | 1                             |
| 10                       | 5518.3              | 1                             | 25      | 5560.0              | 1                             |
| 11                       | 5521.0              | 1                             | 26      | 5562.8              | 1                             |
| 12                       | 5523.8              | 1                             | 27      | 5565.5              | 1                             |
| 13                       | 5526.5              | 1                             | 28      | 5568.2              | 1                             |
| 14                       | 5530.0              | 1                             | 29      | 5569.0              | 1                             |
| Detection Percentage (%) |                     |                               |         |                     | 100%                          |

| Type 6 Radar Waveform_0 |      |      |      |      |      |
|-------------------------|------|------|------|------|------|
| Frequency List (MHz)    | 0    | 1    | 2    | 3    | 4    |
| 0                       | 5549 | 5280 | 5474 | 5481 | 5456 |
| 5                       | 5450 | 5412 | 5517 | 5469 | 5716 |
| 10                      | 5708 | 5556 | 5304 | 5531 | 5703 |
| 15                      | 5433 | 5333 | 5262 | 5696 | 5700 |
| 20                      | 5495 | 5259 | 5523 | 5397 | 5344 |
| 25                      | 5364 | 5545 | 5571 | 5686 | 5378 |
| 30                      | 5578 | 5337 | 5278 | 5452 | 5507 |
| 35                      | 5575 | 5292 | 5375 | 5399 | 5706 |
| 40                      | 5621 | 5557 | 5461 | 5438 | 5298 |
| 45                      | 5348 | 5277 | 5634 | 5392 | 5599 |
| 50                      | 5529 | 5567 | 5540 | 5579 | 5327 |
| 55                      | 5484 | 5342 | 5252 | 5663 | 5653 |
| 60                      | 5388 | 5718 | 5625 | 5674 | 5371 |
| 65                      | 5475 | 5488 | 5305 | 5685 | 5715 |
| 70                      | 5329 | 5285 | 5607 | 5312 | 5684 |
| 75                      | 5393 | 5363 | 5615 | 5662 | 5641 |
| 80                      | 5504 | 5581 | 5555 | 5610 | 5692 |
| 85                      | 5721 | 5690 | 5616 | 5307 | 5326 |
| 90                      | 5251 | 5383 | 5323 | 5445 | 5398 |
| 95                      | 5631 | 5506 | 5629 | 5544 | 5614 |





| Type 6 Radar Waveform_1 |      |      |      |      |      |
|-------------------------|------|------|------|------|------|
| Frequency List (MHz)    | 0    | 1    | 2    | 3    | 4    |
| 0                       | 5329 | 5519 | 5410 | 5642 | 5676 |
| 5                       | 5589 | 5337 | 5592 | 5632 | 5545 |
| 10                      | 5639 | 5442 | 5251 | 5724 | 5521 |
| 15                      | 5460 | 5268 | 5266 | 5417 | 5503 |
| 20                      | 5425 | 5464 | 5389 | 5317 | 5252 |
| 25                      | 5494 | 5677 | 5315 | 5412 | 5717 |
| 30                      | 5701 | 5710 | 5570 | 5659 | 5395 |
| 35                      | 5431 | 5466 | 5670 | 5481 | 5535 |
| 40                      | 5396 | 5557 | 5399 | 5678 | 5295 |
| 45                      | 5277 | 5257 | 5450 | 5652 | 5609 |
| 50                      | 5383 | 5608 | 5618 | 5629 | 5402 |
| 55                      | 5271 | 5672 | 5296 | 5385 | 5527 |
| 60                      | 5470 | 5553 | 5663 | 5554 | 5597 |
| 65                      | 5437 | 5341 | 5420 | 5607 | 5454 |
| 70                      | 5593 | 5533 | 5272 | 5322 | 5487 |
| 75                      | 5307 | 5687 | 5582 | 5358 | 5665 |
| 80                      | 5352 | 5299 | 5377 | 5718 | 5616 |
| 85                      | 5624 | 5386 | 5497 | 5594 | 5571 |
| 90                      | 5265 | 5563 | 5405 | 5291 | 5263 |
| 95                      | 5658 | 5536 | 5598 | 5348 | 5511 |

| Type 6 Radar Waveform_2 |      |      |      |      |      |
|-------------------------|------|------|------|------|------|
| Frequency List (MHz)    | 0    | 1    | 2    | 3    | 4    |
| 0                       | 5487 | 5380 | 5346 | 5328 | 5518 |
| 5                       | 5631 | 5359 | 5667 | 5320 | 5277 |
| 10                      | 5473 | 5706 | 5483 | 5446 | 5270 |
| 15                      | 5609 | 5587 | 5371 | 5311 | 5511 |
| 20                      | 5494 | 5405 | 5478 | 5290 | 5516 |
| 25                      | 5284 | 5590 | 5310 | 5433 | 5593 |
| 30                      | 5557 | 5466 | 5634 | 5546 | 5710 |
| 35                      | 5262 | 5337 | 5292 | 5584 | 5712 |
| 40                      | 5325 | 5411 | 5705 | 5496 | 5259 |
| 45                      | 5309 | 5669 | 5718 | 5700 | 5385 |
| 50                      | 5250 | 5535 | 5679 | 5498 | 5599 |
| 55                      | 5386 | 5423 | 5360 | 5499 | 5280 |
| 60                      | 5252 | 5402 | 5410 | 5526 | 5579 |
| 65                      | 5415 | 5382 | 5723 | 5281 | 5456 |
| 70                      | 5427 | 5355 | 5563 | 5610 | 5678 |
| 75                      | 5608 | 5366 | 5440 | 5715 | 5702 |
| 80                      | 5519 | 5349 | 5592 | 5559 | 5388 |
| 85                      | 5344 | 5463 | 5253 | 5508 | 5602 |
| 90                      | 5648 | 5372 | 5675 | 5591 | 5582 |
| 95                      | 5721 | 5490 | 5486 | 5632 | 5558 |

| Type 6 Radar Waveform_3 |      |      |      |      |      |
|-------------------------|------|------|------|------|------|
| Frequency List (MHz)    | 0    | 1    | 2    | 3    | 4    |
| 0                       | 5267 | 5619 | 5282 | 5489 | 5263 |
| 5                       | 5673 | 5284 | 5386 | 5484 | 5404 |
| 10                      | 5495 | 5524 | 5641 | 5291 | 5697 |
| 15                      | 5714 | 5474 | 5259 | 5326 | 5422 |
| 20                      | 5660 | 5346 | 5470 | 5406 | 5608 |
| 25                      | 5620 | 5480 | 5576 | 5624 | 5525 |
| 30                      | 5585 | 5413 | 5612 | 5648 | 5262 |
| 35                      | 5312 | 5460 | 5646 | 5345 | 5275 |
| 40                      | 5586 | 5289 | 5513 | 5595 | 5408 |
| 45                      | 5469 | 5661 | 5286 | 5485 | 5720 |
| 50                      | 5429 | 5523 | 5537 | 5573 | 5679 |
| 55                      | 5250 | 5498 | 5253 | 5650 | 5693 |
| 60                      | 5724 | 5306 | 5700 | 5335 | 5316 |
| 65                      | 5462 | 5672 | 5688 | 5598 | 5565 |
| 70                      | 5418 | 5706 | 5699 | 5715 | 5425 |
| 75                      | 5547 | 5401 | 5544 | 5387 | 5313 |
| 80                      | 5389 | 5530 | 5503 | 5615 | 5405 |
| 85                      | 5409 | 5309 | 5427 | 5342 | 5592 |
| 90                      | 5283 | 5514 | 5636 | 5433 | 5384 |
| 95                      | 5692 | 5566 | 5372 | 5589 | 5355 |



| Type 6 Radar Waveform_4 |      |      |      |      |      |
|-------------------------|------|------|------|------|------|
| Frequency List (MHz)    | 0    | 1    | 2    | 3    | 4    |
| 0                       | 5522 | 5383 | 5693 | 5650 | 5580 |
| 5                       | 5337 | 5306 | 5342 | 5549 | 5313 |
| 10                      | 5335 | 5284 | 5565 | 5361 | 5312 |
| 15                      | 5688 | 5366 | 5577 | 5304 | 5615 |
| 20                      | 5430 | 5254 | 5384 | 5559 | 5711 |
| 25                      | 5294 | 5622 | 5336 | 5724 | 5514 |
| 30                      | 5465 | 5484 | 5265 | 5359 | 5611 |
| 35                      | 5276 | 5630 | 5562 | 5374 | 5485 |
| 40                      | 5428 | 5351 | 5286 | 5345 | 5575 |
| 45                      | 5491 | 5527 | 5714 | 5648 | 5389 |
| 50                      | 5661 | 5296 | 5518 | 5664 | 5633 |
| 55                      | 5440 | 5317 | 5382 | 5573 | 5595 |
| 60                      | 5525 | 5647 | 5252 | 5426 | 5352 |
| 65                      | 5564 | 5292 | 5555 | 5675 | 5674 |
| 70                      | 5297 | 5570 | 5544 | 5639 | 5326 |
| 75                      | 5645 | 5694 | 5566 | 5612 | 5617 |
| 80                      | 5422 | 5344 | 5372 | 5404 | 5392 |
| 85                      | 5393 | 5365 | 5481 | 5583 | 5520 |
| 90                      | 5315 | 5493 | 5709 | 5701 | 5517 |
| 95                      | 5692 | 5553 | 5651 | 5684 | 5490 |

| Type 6 Radar Waveform_5 |      |      |      |      |      |
|-------------------------|------|------|------|------|------|
| Frequency List (MHz)    | 0    | 1    | 2    | 3    | 4    |
| 0                       | 5302 | 5622 | 5629 | 5336 | 5325 |
| 5                       | 5379 | 5706 | 5417 | 5712 | 5520 |
| 10                      | 5644 | 5548 | 5606 | 5459 | 5333 |
| 15                      | 5301 | 5396 | 5680 | 5349 | 5332 |
| 20                      | 5438 | 5420 | 5551 | 5684 | 5560 |
| 25                      | 5474 | 5539 | 5353 | 5507 | 5354 |
| 30                      | 5441 | 5383 | 5511 | 5431 | 5318 |
| 35                      | 5452 | 5426 | 5715 | 5385 | 5324 |
| 40                      | 5608 | 5626 | 5591 | 5380 | 5274 |
| 45                      | 5555 | 5574 | 5488 | 5292 | 5265 |
| 50                      | 5362 | 5347 | 5607 | 5547 | 5328 |
| 55                      | 5377 | 5587 | 5630 | 5514 | 5314 |
| 60                      | 5263 | 5540 | 5357 | 5473 | 5295 |
| 65                      | 5724 | 5708 | 5291 | 5504 | 5359 |
| 70                      | 5672 | 5364 | 5634 | 5521 | 5307 |
| 75                      | 5651 | 5633 | 5266 | 5690 | 5687 |
| 80                      | 5506 | 5319 | 5436 | 5251 | 5609 |
| 85                      | 5337 | 5661 | 5335 | 5596 | 5260 |
| 90                      | 5613 | 5273 | 5526 | 5575 | 5602 |
| 95                      | 5281 | 5631 | 5415 | 5320 | 5373 |

| Type 6 Radar Waveform_6 |      |      |      |      |      |
|-------------------------|------|------|------|------|------|
| Frequency List (MHz)    | 0    | 1    | 2    | 3    | 4    |
| 0                       | 5460 | 5386 | 5565 | 5497 | 5642 |
| 5                       | 5421 | 5253 | 5492 | 5400 | 5252 |
| 10                      | 5575 | 5434 | 5647 | 5654 | 5354 |
| 15                      | 5389 | 5523 | 5686 | 5394 | 5524 |
| 20                      | 5349 | 5489 | 5266 | 5640 | 5657 |
| 25                      | 5448 | 5423 | 5645 | 5554 | 5582 |
| 30                      | 5549 | 5340 | 5398 | 5598 | 5285 |
| 35                      | 5629 | 5457 | 5543 | 5697 | 5393 |
| 40                      | 5299 | 5638 | 5691 | 5467 | 5259 |
| 45                      | 5377 | 5678 | 5535 | 5546 | 5345 |
| 50                      | 5325 | 5616 | 5538 | 5696 | 5370 |
| 55                      | 5650 | 5444 | 5333 | 5428 | 5286 |
| 60                      | 5396 | 5716 | 5450 | 5327 | 5336 |
| 65                      | 5251 | 5475 | 5533 | 5620 | 5631 |
| 70                      | 5627 | 5592 | 5613 | 5335 | 5258 |
| 75                      | 5487 | 5571 | 5682 | 5314 | 5606 |
| 80                      | 5532 | 5703 | 5503 | 5395 | 5313 |
| 85                      | 5700 | 5289 | 5499 | 5438 | 5641 |
| 90                      | 5614 | 5365 | 5714 | 5615 | 5410 |
| 95                      | 5687 | 5366 | 5674 | 5374 | 5403 |



**Type 6 Radar Waveform\_7**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5715 | 5625 | 5501 | 5561 | 5387 |
| 5                    | 5463 | 5653 | 5567 | 5466 | 5556 |
| 10                   | 5506 | 5698 | 5688 | 5374 | 5375 |
| 15                   | 5477 | 5650 | 5314 | 5342 | 5716 |
| 20                   | 5357 | 5655 | 5304 | 5632 | 5630 |
| 25                   | 5714 | 5275 | 5373 | 5658 | 5519 |
| 30                   | 5704 | 5355 | 5338 | 5437 | 5449 |
| 35                   | 5596 | 5634 | 5590 | 5643 | 5299 |
| 40                   | 5405 | 5499 | 5510 | 5515 | 5265 |
| 45                   | 5604 | 5398 | 5395 | 5407 | 5668 |
| 50                   | 5594 | 5278 | 5535 | 5627 | 5256 |
| 55                   | 5672 | 5593 | 5527 | 5697 | 5662 |
| 60                   | 5273 | 5606 | 5266 | 5546 | 5521 |
| 65                   | 5605 | 5624 | 5480 | 5551 | 5582 |
| 70                   | 5455 | 5401 | 5468 | 5348 | 5559 |
| 75                   | 5614 | 5377 | 5603 | 5349 | 5703 |
| 80                   | 5442 | 5358 | 5408 | 5568 | 5352 |
| 85                   | 5537 | 5319 | 5635 | 5578 | 5339 |
| 90                   | 5723 | 5382 | 5294 | 5696 | 5308 |
| 95                   | 5569 | 5526 | 5364 | 5497 | 5669 |

**Type 6 Radar Waveform\_8**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5495 | 5389 | 5437 | 5722 | 5704 |
| 5                    | 5602 | 5675 | 5642 | 5629 | 5288 |
| 10                   | 5340 | 5487 | 5254 | 5569 | 5396 |
| 15                   | 5468 | 5302 | 5417 | 5387 | 5433 |
| 20                   | 5365 | 5346 | 5720 | 5721 | 5603 |
| 25                   | 5576 | 5287 | 5553 | 5255 | 5690 |
| 30                   | 5312 | 5686 | 5647 | 5260 | 5250 |
| 35                   | 5386 | 5321 | 5699 | 5413 | 5382 |
| 40                   | 5343 | 5264 | 5371 | 5439 | 5348 |
| 45                   | 5565 | 5451 | 5477 | 5271 | 5415 |
| 50                   | 5500 | 5496 | 5394 | 5441 | 5466 |
| 55                   | 5352 | 5349 | 5702 | 5326 | 5283 |
| 60                   | 5472 | 5425 | 5523 | 5608 | 5474 |
| 65                   | 5555 | 5378 | 5556 | 5299 | 5689 |
| 70                   | 5627 | 5329 | 5482 | 5510 | 5454 |
| 75                   | 5575 | 5447 | 5449 | 5600 | 5669 |
| 80                   | 5719 | 5303 | 5537 | 5544 | 5606 |
| 85                   | 5284 | 5418 | 5533 | 5403 | 5310 |
| 90                   | 5517 | 5293 | 5641 | 5612 | 5599 |
| 95                   | 5357 | 5399 | 5680 | 5681 | 5548 |

**Type 6 Radar Waveform\_9**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5275 | 5628 | 5373 | 5408 | 5449 |
| 5                    | 5644 | 5600 | 5717 | 5317 | 5495 |
| 10                   | 5271 | 5276 | 5392 | 5289 | 5417 |
| 15                   | 5556 | 5429 | 5520 | 5432 | 5625 |
| 20                   | 5415 | 5661 | 5713 | 5576 | 5393 |
| 25                   | 5551 | 5304 | 5391 | 5587 | 5297 |
| 30                   | 5579 | 5269 | 5671 | 5363 | 5467 |
| 35                   | 5302 | 5341 | 5657 | 5474 | 5613 |
| 40                   | 5252 | 5562 | 5281 | 5407 | 5368 |
| 45                   | 5378 | 5431 | 5623 | 5267 | 5622 |
| 50                   | 5591 | 5585 | 5692 | 5385 | 5654 |
| 55                   | 5306 | 5343 | 5643 | 5455 | 5448 |
| 60                   | 5257 | 5446 | 5651 | 5504 | 5338 |
| 65                   | 5588 | 5683 | 5359 | 5371 | 5675 |
| 70                   | 5458 | 5469 | 5423 | 5598 | 5590 |
| 75                   | 5430 | 5377 | 5500 | 5264 | 5509 |
| 80                   | 5601 | 5381 | 5695 | 5401 | 5357 |
| 85                   | 5558 | 5715 | 5647 | 5549 | 5481 |
| 90                   | 5369 | 5416 | 5404 | 5664 | 5527 |
| 95                   | 5312 | 5554 | 5659 | 5295 | 5333 |



## Type 6 Radar Waveform\_10

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5433 | 5392 | 5309 | 5569 | 5291 |
| 5                    | 5686 | 5622 | 5317 | 5480 | 5702 |
| 10                   | 5677 | 5540 | 5387 | 5438 | 5644 |
| 15                   | 5459 | 5623 | 5380 | 5342 | 5284 |
| 20                   | 5581 | 5699 | 5327 | 5549 | 5281 |
| 25                   | 5403 | 5507 | 5592 | 5621 | 5436 |
| 30                   | 5468 | 5701 | 5411 | 5612 | 5287 |
| 35                   | 5441 | 5529 | 5453 | 5724 | 5527 |
| 40                   | 5566 | 5645 | 5694 | 5647 | 5462 |
| 45                   | 5675 | 5358 | 5514 | 5681 | 5460 |
| 50                   | 5629 | 5498 | 5292 | 5602 | 5674 |
| 55                   | 5515 | 5707 | 5367 | 5260 | 5533 |
| 60                   | 5547 | 5584 | 5613 | 5661 | 5272 |
| 65                   | 5597 | 5277 | 5420 | 5478 | 5255 |
| 70                   | 5405 | 5434 | 5428 | 5295 | 5718 |
| 75                   | 5636 | 5508 | 5532 | 5534 | 5663 |
| 80                   | 5497 | 5509 | 5412 | 5269 | 5408 |
| 85                   | 5331 | 5535 | 5653 | 5583 | 5266 |
| 90                   | 5530 | 5270 | 5477 | 5409 | 5360 |
| 95                   | 5510 | 5649 | 5658 | 5654 | 5488 |

## Type 6 Radar Waveform\_11

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5688 | 5631 | 5720 | 5255 | 5511 |
| 5                    | 5253 | 5547 | 5392 | 5546 | 5531 |
| 10                   | 5426 | 5474 | 5582 | 5459 | 5257 |
| 15                   | 5586 | 5629 | 5425 | 5534 | 5292 |
| 20                   | 5650 | 5640 | 5319 | 5522 | 5644 |
| 25                   | 5352 | 5613 | 5696 | 5655 | 5478 |
| 30                   | 5454 | 5658 | 5626 | 5289 | 5485 |
| 35                   | 5580 | 5620 | 5346 | 5402 | 5538 |
| 40                   | 5405 | 5632 | 5412 | 5604 | 5338 |
| 45                   | 5597 | 5642 | 5513 | 5419 | 5277 |
| 50                   | 5468 | 5653 | 5385 | 5651 | 5458 |
| 55                   | 5689 | 5723 | 5281 | 5518 | 5713 |
| 60                   | 5303 | 5404 | 5493 | 5573 | 5543 |
| 65                   | 5699 | 5313 | 5630 | 5370 | 5343 |
| 70                   | 5612 | 5647 | 5355 | 5254 | 5410 |
| 75                   | 5290 | 5264 | 5363 | 5304 | 5489 |
| 80                   | 5309 | 5427 | 5537 | 5698 | 5251 |
| 85                   | 5494 | 5654 | 5382 | 5709 | 5362 |
| 90                   | 5579 | 5258 | 5691 | 5520 | 5623 |
| 95                   | 5490 | 5514 | 5375 | 5388 | 5463 |

## Type 6 Radar Waveform\_12

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5468 | 5395 | 5656 | 5416 | 5353 |
| 5                    | 5392 | 5569 | 5467 | 5709 | 5263 |
| 10                   | 5442 | 5690 | 5515 | 5302 | 5480 |
| 15                   | 5723 | 5713 | 5257 | 5470 | 5348 |
| 20                   | 5300 | 5341 | 5581 | 5408 | 5495 |
| 25                   | 5435 | 5679 | 5325 | 5689 | 5520 |
| 30                   | 5343 | 5615 | 5366 | 5538 | 5305 |
| 35                   | 5622 | 5711 | 5617 | 5555 | 5452 |
| 40                   | 5433 | 5570 | 5652 | 5456 | 5436 |
| 45                   | 5318 | 5680 | 5700 | 5566 | 5306 |
| 50                   | 5628 | 5644 | 5704 | 5474 | 5539 |
| 55                   | 5498 | 5646 | 5643 | 5438 | 5478 |
| 60                   | 5489 | 5270 | 5349 | 5496 | 5586 |
| 65                   | 5522 | 5448 | 5252 | 5462 | 5640 |
| 70                   | 5621 | 5684 | 5255 | 5358 | 5578 |
| 75                   | 5386 | 5724 | 5708 | 5483 | 5350 |
| 80                   | 5561 | 5440 | 5387 | 5411 | 5491 |
| 85                   | 5471 | 5315 | 5321 | 5464 | 5699 |
| 90                   | 5577 | 5413 | 5352 | 5553 | 5381 |
| 95                   | 5287 | 5554 | 5505 | 5599 | 5564 |



**Type 6 Radar Waveform\_13**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5723 | 5634 | 5592 | 5577 | 5573 |
| 5                    | 5434 | 5591 | 5542 | 5397 | 5470 |
| 10                   | 5276 | 5479 | 5556 | 5497 | 5501 |
| 15                   | 5336 | 5365 | 5360 | 5515 | 5540 |
| 20                   | 5686 | 5410 | 5619 | 5400 | 5468 |
| 25                   | 5323 | 5531 | 5544 | 5429 | 5562 |
| 30                   | 5707 | 5572 | 5484 | 5690 | 5503 |
| 35                   | 5286 | 5327 | 5413 | 5330 | 5366 |
| 40                   | 5655 | 5516 | 5411 | 5320 | 5453 |
| 45                   | 5298 | 5288 | 5283 | 5571 | 5504 |
| 50                   | 5345 | 5280 | 5563 | 5362 | 5442 |
| 55                   | 5359 | 5597 | 5628 | 5297 | 5363 |
| 60                   | 5399 | 5633 | 5391 | 5632 | 5322 |
| 65                   | 5532 | 5672 | 5424 | 5378 | 5716 |
| 70                   | 5458 | 5427 | 5265 | 5683 | 5580 |
| 75                   | 5506 | 5493 | 5451 | 5338 | 5550 |
| 80                   | 5574 | 5551 | 5474 | 5488 | 5666 |
| 85                   | 5315 | 5638 | 5416 | 5367 | 5600 |
| 90                   | 5546 | 5293 | 5491 | 5290 | 5708 |
| 95                   | 5581 | 5624 | 5319 | 5268 | 5724 |

**Type 6 Radar Waveform\_14**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5503 | 5398 | 5528 | 5641 | 5415 |
| 5                    | 5476 | 5516 | 5617 | 5560 | 5299 |
| 10                   | 5682 | 5268 | 5597 | 5692 | 5522 |
| 15                   | 5424 | 5492 | 5463 | 5257 | 5694 |
| 20                   | 5576 | 5489 | 5441 | 5589 | 5480 |
| 25                   | 5272 | 5630 | 5282 | 5701 | 5693 |
| 30                   | 5529 | 5699 | 5464 | 5323 | 5425 |
| 35                   | 5418 | 5306 | 5483 | 5377 | 5494 |
| 40                   | 5599 | 5349 | 5450 | 5672 | 5278 |
| 45                   | 5371 | 5719 | 5458 | 5283 | 5521 |
| 50                   | 5331 | 5652 | 5660 | 5289 | 5547 |
| 55                   | 5551 | 5343 | 5591 | 5334 | 5336 |
| 60                   | 5720 | 5478 | 5546 | 5346 | 5324 |
| 65                   | 5504 | 5327 | 5702 | 5461 | 5654 |
| 70                   | 5716 | 5642 | 5549 | 5626 | 5636 |
| 75                   | 5432 | 5590 | 5355 | 5618 | 5537 |
| 80                   | 5388 | 5386 | 5487 | 5511 | 5410 |
| 85                   | 5276 | 5571 | 5711 | 5525 | 5647 |
| 90                   | 5598 | 5679 | 5303 | 5606 | 5675 |
| 95                   | 5457 | 5556 | 5634 | 5616 | 5690 |

**Type 6 Radar Waveform\_15**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5661 | 5637 | 5464 | 5327 | 5635 |
| 5                    | 5518 | 5538 | 5692 | 5626 | 5506 |
| 10                   | 5613 | 5532 | 5638 | 5315 | 5543 |
| 15                   | 5512 | 5522 | 5566 | 5508 | 5449 |
| 20                   | 5702 | 5645 | 5501 | 5481 | 5414 |
| 25                   | 5477 | 5332 | 5475 | 5259 | 5316 |
| 30                   | 5268 | 5582 | 5486 | 5439 | 5616 |
| 35                   | 5521 | 5564 | 5606 | 5577 | 5636 |
| 40                   | 5291 | 5333 | 5682 | 5287 | 5325 |
| 45                   | 5544 | 5601 | 5454 | 5302 | 5628 |
| 50                   | 5723 | 5634 | 5697 | 5382 | 5266 |
| 55                   | 5483 | 5708 | 5260 | 5505 | 5533 |
| 60                   | 5313 | 5305 | 5657 | 5488 | 5281 |
| 65                   | 5393 | 5546 | 5424 | 5272 | 5295 |
| 70                   | 5263 | 5714 | 5597 | 5408 | 5619 |
| 75                   | 5310 | 5503 | 5421 | 5271 | 5413 |
| 80                   | 5367 | 5673 | 5611 | 5307 | 5600 |
| 85                   | 5385 | 5581 | 5596 | 5419 | 5450 |
| 90                   | 5703 | 5375 | 5372 | 5524 | 5294 |
| 95                   | 5401 | 5402 | 5559 | 5432 | 5354 |



**Type 6 Radar Waveform\_16**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5441 | 5401 | 5400 | 5488 | 5477 |
| 5                    | 5657 | 5463 | 5292 | 5314 | 5713 |
| 10                   | 5447 | 5418 | 5679 | 5510 | 5564 |
| 15                   | 5600 | 5649 | 5572 | 5553 | 5641 |
| 20                   | 5613 | 5336 | 5442 | 5570 | 5387 |
| 25                   | 5268 | 5281 | 5581 | 5363 | 5350 |
| 30                   | 5310 | 5471 | 5443 | 5654 | 5390 |
| 35                   | 5341 | 5606 | 5697 | 5373 | 5411 |
| 40                   | 5680 | 5647 | 5700 | 5565 | 5541 |
| 45                   | 5530 | 5616 | 5537 | 5360 | 5681 |
| 50                   | 5610 | 5398 | 5433 | 5452 | 5306 |
| 55                   | 5555 | 5448 | 5459 | 5626 | 5607 |
| 60                   | 5276 | 5311 | 5653 | 5701 | 5372 |
| 65                   | 5467 | 5719 | 5299 | 5546 | 5489 |
| 70                   | 5686 | 5691 | 5296 | 5352 | 5668 |
| 75                   | 5560 | 5391 | 5394 | 5522 | 5308 |
| 80                   | 5392 | 5285 | 5382 | 5596 | 5261 |
| 85                   | 5420 | 5718 | 5326 | 5297 | 5589 |
| 90                   | 5566 | 5408 | 5496 | 5254 | 5368 |
| 95                   | 5437 | 5406 | 5550 | 5505 | 5624 |

**Type 6 Radar Waveform\_17**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5696 | 5262 | 5336 | 5649 | 5697 |
| 5                    | 5699 | 5485 | 5367 | 5477 | 5542 |
| 10                   | 5378 | 5682 | 5342 | 5705 | 5585 |
| 15                   | 5591 | 5301 | 5675 | 5598 | 5358 |
| 20                   | 5621 | 5502 | 5480 | 5562 | 5360 |
| 25                   | 5631 | 5608 | 5309 | 5467 | 5384 |
| 30                   | 5449 | 5457 | 5400 | 5297 | 5636 |
| 35                   | 5270 | 5313 | 5266 | 5564 | 5691 |
| 40                   | 5583 | 5470 | 5638 | 5708 | 5538 |
| 45                   | 5362 | 5596 | 5620 | 5418 | 5259 |
| 50                   | 5386 | 5574 | 5484 | 5541 | 5507 |
| 55                   | 5499 | 5539 | 5413 | 5341 | 5426 |
| 60                   | 5625 | 5440 | 5343 | 5268 | 5532 |
| 65                   | 5295 | 5296 | 5668 | 5335 | 5281 |
| 70                   | 5284 | 5489 | 5385 | 5282 | 5567 |
| 75                   | 5676 | 5644 | 5519 | 5511 | 5396 |
| 80                   | 5375 | 5299 | 5648 | 5635 | 5348 |
| 85                   | 5379 | 5593 | 5578 | 5473 | 5515 |
| 90                   | 5683 | 5377 | 5545 | 5312 | 5256 |
| 95                   | 5414 | 5530 | 5671 | 5475 | 5271 |

**Type 6 Radar Waveform\_18**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5476 | 5501 | 5272 | 5335 | 5539 |
| 5                    | 5266 | 5410 | 5442 | 5640 | 5274 |
| 10                   | 5309 | 5471 | 5383 | 5425 | 5606 |
| 15                   | 5679 | 5428 | 5303 | 5546 | 5550 |
| 20                   | 5629 | 5571 | 5421 | 5651 | 5333 |
| 25                   | 5519 | 5460 | 5512 | 5668 | 5418 |
| 30                   | 5491 | 5346 | 5357 | 5316 | 5359 |
| 35                   | 5409 | 5404 | 5537 | 5717 | 5605 |
| 40                   | 5422 | 5553 | 5576 | 5473 | 5535 |
| 45                   | 5291 | 5703 | 5379 | 5312 | 5665 |
| 50                   | 5275 | 5630 | 5330 | 5252 | 5367 |
| 55                   | 5531 | 5720 | 5596 | 5472 | 5508 |
| 60                   | 5688 | 5364 | 5594 | 5617 | 5588 |
| 65                   | 5292 | 5457 | 5268 | 5667 | 5620 |
| 70                   | 5478 | 5706 | 5534 | 5356 | 5551 |
| 75                   | 5431 | 5429 | 5702 | 5411 | 5376 |
| 80                   | 5313 | 5402 | 5517 | 5533 | 5707 |
| 85                   | 5331 | 5318 | 5607 | 5420 | 5467 |
| 90                   | 5456 | 5584 | 5288 | 5424 | 5336 |
| 95                   | 5708 | 5328 | 5612 | 5485 | 5643 |



**Type 6 Radar Waveform\_19**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5634 | 5265 | 5683 | 5496 | 5284 |
| 5                    | 5308 | 5432 | 5517 | 5328 | 5481 |
| 10                   | 5618 | 5260 | 5424 | 5620 | 5627 |
| 15                   | 5292 | 5555 | 5406 | 5591 | 5267 |
| 20                   | 5540 | 5262 | 5362 | 5643 | 5306 |
| 25                   | 5310 | 5409 | 5715 | 5297 | 5452 |
| 30                   | 5533 | 5332 | 5314 | 5252 | 5468 |
| 35                   | 5654 | 5548 | 5495 | 5333 | 5492 |
| 40                   | 5519 | 5261 | 5636 | 5514 | 5713 |
| 45                   | 5532 | 5598 | 5556 | 5311 | 5437 |
| 50                   | 5365 | 5552 | 5516 | 5451 | 5586 |
| 55                   | 5719 | 5628 | 5290 | 5440 | 5699 |
| 60                   | 5721 | 5442 | 5567 | 5601 | 5673 |
| 65                   | 5633 | 5671 | 5422 | 5402 | 5320 |
| 70                   | 5566 | 5323 | 5446 | 5570 | 5626 |
| 75                   | 5351 | 5670 | 5277 | 5499 | 5675 |
| 80                   | 5585 | 5337 | 5541 | 5685 | 5391 |
| 85                   | 5571 | 5276 | 5508 | 5359 | 5327 |
| 90                   | 5382 | 5330 | 5426 | 5501 | 5338 |
| 95                   | 5693 | 5479 | 5417 | 5703 | 5307 |

**Type 6 Radar Waveform\_20**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5414 | 5504 | 5619 | 5657 | 5601 |
| 5                    | 5447 | 5357 | 5592 | 5394 | 5310 |
| 10                   | 5549 | 5524 | 5465 | 5718 | 5648 |
| 15                   | 5380 | 5585 | 5509 | 5636 | 5556 |
| 20                   | 5548 | 5331 | 5400 | 5257 | 5279 |
| 25                   | 5673 | 5261 | 5443 | 5401 | 5486 |
| 30                   | 5672 | 5696 | 5271 | 5467 | 5717 |
| 35                   | 5377 | 5590 | 5586 | 5604 | 5645 |
| 40                   | 5530 | 5575 | 5341 | 5452 | 5381 |
| 45                   | 5529 | 5527 | 5536 | 5495 | 5418 |
| 50                   | 5342 | 5392 | 5627 | 5637 | 5430 |
| 55                   | 5451 | 5612 | 5628 | 5653 | 5436 |
| 60                   | 5538 | 5255 | 5363 | 5578 | 5600 |
| 65                   | 5345 | 5348 | 5521 | 5515 | 5724 |
| 70                   | 5630 | 5716 | 5276 | 5698 | 5337 |
| 75                   | 5295 | 5475 | 5396 | 5547 | 5299 |
| 80                   | 5253 | 5415 | 5580 | 5651 | 5466 |
| 85                   | 5555 | 5634 | 5273 | 5703 | 5305 |
| 90                   | 5298 | 5459 | 5519 | 5384 | 5336 |
| 95                   | 5339 | 5625 | 5438 | 5598 | 5705 |

**Type 6 Radar Waveform\_21**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5669 | 5268 | 5555 | 5721 | 5346 |
| 5                    | 5489 | 5379 | 5667 | 5557 | 5517 |
| 10                   | 5383 | 5410 | 5506 | 5438 | 5371 |
| 15                   | 5712 | 5515 | 5681 | 5273 | 5556 |
| 20                   | 5497 | 5341 | 5724 | 5252 | 5464 |
| 25                   | 5685 | 5549 | 5505 | 5520 | 5714 |
| 30                   | 5585 | 5703 | 5491 | 5672 | 5254 |
| 35                   | 5299 | 5323 | 5444 | 5511 | 5424 |
| 40                   | 5293 | 5621 | 5623 | 5456 | 5516 |
| 45                   | 5477 | 5471 | 5704 | 5328 | 5688 |
| 50                   | 5519 | 5652 | 5607 | 5626 | 5412 |
| 55                   | 5384 | 5625 | 5620 | 5432 | 5646 |
| 60                   | 5294 | 5344 | 5285 | 5365 | 5608 |
| 65                   | 5554 | 5392 | 5298 | 5450 | 5451 |
| 70                   | 5355 | 5419 | 5396 | 5260 | 5664 |
| 75                   | 5722 | 5719 | 5697 | 5270 | 5683 |
| 80                   | 5615 | 5711 | 5349 | 5387 | 5490 |
| 85                   | 5348 | 5441 | 5535 | 5472 | 5480 |
| 90                   | 5339 | 5436 | 5589 | 5385 | 5499 |
| 95                   | 5643 | 5446 | 5701 | 5453 | 5599 |



**Type 6 Radar Waveform\_22**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5449 | 5507 | 5491 | 5407 | 5663 |
| 5                    | 5531 | 5304 | 5267 | 5720 | 5724 |
| 10                   | 5314 | 5674 | 5547 | 5633 | 5690 |
| 15                   | 5459 | 5364 | 5618 | 5629 | 5465 |
| 20                   | 5467 | 5566 | 5282 | 5338 | 5700 |
| 25                   | 5352 | 5537 | 5277 | 5609 | 5554 |
| 30                   | 5281 | 5571 | 5660 | 5325 | 5643 |
| 35                   | 5395 | 5393 | 5390 | 5293 | 5573 |
| 40                   | 5358 | 5350 | 5706 | 5386 | 5620 |
| 45                   | 5288 | 5399 | 5560 | 5514 | 5427 |
| 50                   | 5494 | 5522 | 5504 | 5264 | 5608 |
| 55                   | 5475 | 5403 | 5529 | 5561 | 5341 |
| 60                   | 5383 | 5513 | 5315 | 5565 | 5569 |
| 65                   | 5715 | 5545 | 5413 | 5321 | 5672 |
| 70                   | 5357 | 5464 | 5309 | 5398 | 5299 |
| 75                   | 5388 | 5442 | 5377 | 5512 | 5503 |
| 80                   | 5311 | 5285 | 5683 | 5457 | 5482 |
| 85                   | 5331 | 5692 | 5263 | 5546 | 5606 |
| 90                   | 5541 | 5409 | 5362 | 5448 | 5453 |
| 95                   | 5644 | 5466 | 5397 | 5622 | 5549 |

**Type 6 Radar Waveform\_23**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5704 | 5271 | 5427 | 5568 | 5408 |
| 5                    | 5573 | 5326 | 5342 | 5553 | 5720 |
| 10                   | 5463 | 5588 | 5353 | 5711 | 5547 |
| 15                   | 5491 | 5721 | 5674 | 5657 | 5475 |
| 20                   | 5257 | 5320 | 5330 | 5673 | 5618 |
| 25                   | 5389 | 5480 | 5335 | 5420 | 5460 |
| 30                   | 5617 | 5540 | 5417 | 5690 | 5435 |
| 35                   | 5481 | 5564 | 5251 | 5369 | 5664 |
| 40                   | 5687 | 5644 | 5626 | 5692 | 5379 |
| 45                   | 5643 | 5572 | 5381 | 5398 | 5680 |
| 50                   | 5315 | 5697 | 5298 | 5347 | 5620 |
| 55                   | 5515 | 5531 | 5571 | 5354 | 5545 |
| 60                   | 5510 | 5395 | 5283 | 5368 | 5362 |
| 65                   | 5260 | 5407 | 5295 | 5635 | 5536 |
| 70                   | 5392 | 5401 | 5526 | 5403 | 5273 |
| 75                   | 5357 | 5562 | 5585 | 5358 | 5289 |
| 80                   | 5312 | 5284 | 5445 | 5264 | 5586 |
| 85                   | 5396 | 5542 | 5523 | 5511 | 5366 |
| 90                   | 5296 | 5443 | 5622 | 5567 | 5699 |
| 95                   | 5450 | 5504 | 5652 | 5546 | 5492 |

**Type 6 Radar Waveform\_24**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5387 | 5510 | 5363 | 5254 | 5628 |
| 5                    | 5712 | 5251 | 5417 | 5474 | 5285 |
| 10                   | 5554 | 5252 | 5629 | 5548 | 5257 |
| 15                   | 5635 | 5618 | 5349 | 5719 | 5374 |
| 20                   | 5483 | 5326 | 5261 | 5419 | 5646 |
| 25                   | 5506 | 5338 | 5683 | 5439 | 5622 |
| 30                   | 5462 | 5574 | 5280 | 5569 | 5572 |
| 35                   | 5457 | 5404 | 5283 | 5503 | 5295 |
| 40                   | 5582 | 5294 | 5614 | 5524 | 5359 |
| 45                   | 5533 | 5274 | 5381 | 5366 | 5408 |
| 50                   | 5596 | 5669 | 5333 | 5469 | 5624 |
| 55                   | 5390 | 5325 | 5674 | 5645 | 5455 |
| 60                   | 5500 | 5696 | 5704 | 5311 | 5296 |
| 65                   | 5714 | 5565 | 5438 | 5705 | 5378 |
| 70                   | 5375 | 5282 | 5707 | 5682 | 5631 |
| 75                   | 5339 | 5541 | 5422 | 5540 | 5639 |
| 80                   | 5508 | 5630 | 5489 | 5713 | 5505 |
| 85                   | 5525 | 5346 | 5284 | 5564 | 5461 |
| 90                   | 5650 | 5477 | 5504 | 5584 | 5279 |
| 95                   | 5434 | 5668 | 5442 | 5641 | 5301 |





**Type 6 Radar Waveform\_25**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5642 | 5274 | 5299 | 5415 | 5470 |
| 5                    | 5279 | 5273 | 5492 | 5637 | 5485 |
| 10                   | 5516 | 5292 | 5646 | 5278 | 5626 |
| 15                   | 5648 | 5452 | 5667 | 5566 | 5394 |
| 20                   | 5677 | 5411 | 5619 | 5665 | 5543 |
| 25                   | 5656 | 5504 | 5335 | 5531 | 5398 |
| 30                   | 5343 | 5708 | 5713 | 5663 | 5253 |
| 35                   | 5557 | 5672 | 5342 | 5378 | 5520 |
| 40                   | 5534 | 5611 | 5453 | 5339 | 5334 |
| 45                   | 5591 | 5586 | 5533 | 5625 | 5417 |
| 50                   | 5497 | 5322 | 5613 | 5521 | 5423 |
| 55                   | 5684 | 5674 | 5328 | 5332 | 5650 |
| 60                   | 5392 | 5260 | 5710 | 5449 | 5360 |
| 65                   | 5302 | 5364 | 5699 | 5258 | 5666 |
| 70                   | 5673 | 5327 | 5320 | 5318 | 5532 |
| 75                   | 5321 | 5571 | 5636 | 5350 | 5489 |
| 80                   | 5555 | 5565 | 5490 | 5397 | 5384 |
| 85                   | 5414 | 5289 | 5581 | 5601 | 5515 |
| 90                   | 5365 | 5383 | 5640 | 5639 | 5513 |
| 95                   | 5482 | 5488 | 5607 | 5722 | 5267 |

**Type 6 Radar Waveform\_26**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5422 | 5513 | 5710 | 5576 | 5690 |
| 5                    | 5321 | 5673 | 5567 | 5325 | 5699 |
| 10                   | 5416 | 5305 | 5333 | 5366 | 5299 |
| 15                   | 5714 | 5300 | 5458 | 5712 | 5283 |
| 20                   | 5402 | 5561 | 5715 | 5500 | 5592 |
| 25                   | 5660 | 5614 | 5517 | 5647 | 5593 |
| 30                   | 5546 | 5488 | 5613 | 5495 | 5528 |
| 35                   | 5377 | 5376 | 5524 | 5332 | 5683 |
| 40                   | 5278 | 5461 | 5705 | 5382 | 5319 |
| 45                   | 5417 | 5649 | 5639 | 5323 | 5404 |
| 50                   | 5258 | 5468 | 5586 | 5620 | 5460 |
| 55                   | 5709 | 5529 | 5406 | 5645 | 5457 |
| 60                   | 5442 | 5445 | 5693 | 5684 | 5271 |
| 65                   | 5281 | 5252 | 5471 | 5350 | 5507 |
| 70                   | 5548 | 5625 | 5545 | 5447 | 5345 |
| 75                   | 5301 | 5473 | 5577 | 5395 | 5256 |
| 80                   | 5633 | 5642 | 5392 | 5494 | 5527 |
| 85                   | 5358 | 5351 | 5582 | 5316 | 5662 |
| 90                   | 5448 | 5646 | 5618 | 5389 | 5499 |
| 95                   | 5344 | 5486 | 5363 | 5259 | 5250 |

**Type 6 Radar Waveform\_27**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5677 | 5277 | 5646 | 5262 | 5532 |
| 5                    | 5460 | 5695 | 5642 | 5488 | 5528 |
| 10                   | 5250 | 5666 | 5374 | 5561 | 5320 |
| 15                   | 5327 | 5427 | 5282 | 5475 | 5410 |
| 20                   | 5252 | 5656 | 5492 | 5565 | 5548 |
| 25                   | 5466 | 5720 | 5373 | 5627 | 5685 |
| 30                   | 5588 | 5445 | 5353 | 5269 | 5251 |
| 35                   | 5419 | 5467 | 5485 | 5597 | 5592 |
| 40                   | 5641 | 5396 | 5539 | 5702 | 5689 |
| 45                   | 5299 | 5500 | 5610 | 5692 | 5280 |
| 50                   | 5434 | 5519 | 5675 | 5443 | 5404 |
| 55                   | 5422 | 5331 | 5719 | 5700 | 5616 |
| 60                   | 5586 | 5665 | 5387 | 5471 | 5271 |
| 65                   | 5639 | 5319 | 5633 | 5307 | 5491 |
| 70                   | 5522 | 5543 | 5433 | 5607 | 5300 |
| 75                   | 5584 | 5514 | 5470 | 5655 | 5358 |
| 80                   | 5559 | 5630 | 5362 | 5295 | 5336 |
| 85                   | 5622 | 5323 | 5402 | 5553 | 5481 |
| 90                   | 5668 | 5385 | 5431 | 5324 | 5635 |
| 95                   | 5444 | 5483 | 5459 | 5701 | 5589 |



**Type 6 Radar Waveform\_28**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5360 | 5516 | 5582 | 5423 | 5277 |
| 5                    | 5502 | 5620 | 5717 | 5554 | 5260 |
| 10                   | 5656 | 5455 | 5415 | 5281 | 5341 |
| 15                   | 5664 | 5327 | 5289 | 5321 | 5418 |
| 20                   | 5597 | 5581 | 5538 | 5339 | 5318 |
| 25                   | 5448 | 5477 | 5661 | 5252 | 5574 |
| 30                   | 5402 | 5568 | 5421 | 5546 | 5558 |
| 35                   | 5688 | 5638 | 5511 | 5431 | 5724 |
| 40                   | 5334 | 5682 | 5699 | 5618 | 5657 |
| 45                   | 5583 | 5668 | 5648 | 5475 | 5631 |
| 50                   | 5513 | 5570 | 5266 | 5251 | 5610 |
| 55                   | 5285 | 5434 | 5519 | 5587 | 5715 |
| 60                   | 5355 | 5429 | 5303 | 5669 | 5585 |
| 65                   | 5617 | 5721 | 5323 | 5414 | 5503 |
| 70                   | 5712 | 5419 | 5624 | 5543 | 5483 |
| 75                   | 5590 | 5534 | 5263 | 5290 | 5614 |
| 80                   | 5723 | 5382 | 5627 | 5557 | 5295 |
| 85                   | 5275 | 5551 | 5666 | 5356 | 5704 |
| 90                   | 5600 | 5646 | 5674 | 5313 | 5336 |
| 95                   | 5274 | 5499 | 5564 | 5357 | 5680 |

**Type 6 Radar Waveform\_29**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5615 | 5280 | 5518 | 5487 | 5594 |
| 5                    | 5544 | 5642 | 5317 | 5717 | 5467 |
| 10                   | 5587 | 5719 | 5456 | 5476 | 5362 |
| 15                   | 5406 | 5681 | 5292 | 5275 | 5481 |
| 20                   | 5329 | 5538 | 5573 | 5511 | 5702 |
| 25                   | 5267 | 5651 | 5581 | 5695 | 5294 |
| 30                   | 5463 | 5359 | 5686 | 5670 | 5269 |
| 35                   | 5697 | 5649 | 5484 | 5413 | 5522 |
| 40                   | 5270 | 5332 | 5650 | 5447 | 5696 |
| 45                   | 5450 | 5637 | 5666 | 5251 | 5701 |
| 50                   | 5410 | 5689 | 5621 | 5475 | 5323 |
| 55                   | 5714 | 5624 | 5716 | 5461 | 5272 |
| 60                   | 5520 | 5374 | 5707 | 5495 | 5628 |
| 65                   | 5343 | 5531 | 5282 | 5533 | 5684 |
| 70                   | 5306 | 5309 | 5405 | 5710 | 5473 |
| 75                   | 5502 | 5355 | 5677 | 5341 | 5279 |
| 80                   | 5303 | 5395 | 5412 | 5445 | 5277 |
| 85                   | 5673 | 5592 | 5611 | 5631 | 5310 |
| 90                   | 5477 | 5420 | 5336 | 5302 | 5356 |
| 95                   | 5291 | 5554 | 5548 | 5255 | 5562 |



|               |   |                   |            |
|---------------|---|-------------------|------------|
| Product       | AX3000 Gigabit Wi-Fi 6 Router                                       | Temperature       | 22°C       |
| Test Engineer | Peter   | Relative Humidity | 60%        |
| Test Site     | SR5   | Test Date         | 2022/05/07 |
| Test Item     | Radar Statistical Performance Check (802.11ax-HE160 mode – 5250MHz) |                   |            |

Radar Type 1-4 - Radar Statistical Performance

| Trial | Frequency<br>(MHz) | 1=Detection, 0=No Detection |              |              |              |
|-------|--------------------|-----------------------------|--------------|--------------|--------------|
|       |                    | Radar Type 1                | Radar Type 2 | Radar Type 3 | Radar Type 4 |
| 0     | 5250.0             | 1                           | 1            | 1            | 1            |
| 1     | 5252.7             | 1                           | 1            | 1            | 1            |
| 2     | 5255.4             | 1                           | 1            | 1            | 1            |
| 3     | 5258.1             | 1                           | 0            | 1            | 1            |
| 4     | 5260.8             | 1                           | 1            | 1            | 1            |
| 5     | 5263.5             | 1                           | 1            | 1            | 1            |
| 6     | 5266.1             | 1                           | 0            | 1            | 1            |
| 7     | 5268.8             | 1                           | 1            | 1            | 1            |
| 8     | 5271.5             | 1                           | 1            | 1            | 1            |
| 9     | 5274.2             | 0                           | 0            | 1            | 1            |
| 10    | 5276.9             | 1                           | 0            | 0            | 1            |
| 11    | 5279.6             | 1                           | 1            | 1            | 1            |
| 12    | 5282.3             | 1                           | 1            | 1            | 1            |
| 13    | 5285.0             | 1                           | 0            | 1            | 1            |
| 14    | 5287.7             | 1                           | 1            | 1            | 1            |
| 15    | 5290.3             | 1                           | 1            | 1            | 0            |
| 16    | 5293.0             | 0                           | 1            | 1            | 1            |
| 17    | 5295.7             | 1                           | 1            | 0            | 1            |
| 18    | 5298.4             | 1                           | 0            | 1            | 1            |
| 19    | 5301.1             | 1                           | 1            | 1            | 1            |
| 20    | 5303.8             | 1                           | 1            | 1            | 1            |
| 21    | 5306.5             | 0                           | 0            | 1            | 1            |
| 22    | 5309.2             | 1                           | 1            | 0            | 1            |
| 23    | 5311.9             | 1                           | 1            | 1            | 0            |
| 24    | 5314.6             | 1                           | 1            | 1            | 1            |
| 25    | 5317.2             | 1                           | 1            | 1            | 1            |
| 26    | 5319.9             | 1                           | 1            | 1            | 0            |



| Trial        | Frequency | 1=Detection,<br>0=No Detection | Trial | Frequency | 1=Detection,<br>0=No Detection |
|--------------|-----------|--------------------------------|-------|-----------|--------------------------------|
| 27           | 5322.6    | 1                              | 1     | 1         | 1                              |
| 28           | 5325.3    | 1                              | 1     | 1         | 1                              |
| 29           | 5328.0    | 0                              | 0     | 1         | 1                              |
| Probability: |           | 90%                            | 73.3% | 90%       | 90%                            |
| Type1-4      |           | 85.825% (>80%)                 |       |           |                                |

Radar Type 1 - Radar Waveform

|          | Trial Id | Radar Type | Pulse Width (us) | PRI (us) | Number of Pulses | Waveform Length (us) |
|----------|----------|------------|------------------|----------|------------------|----------------------|
| Download | 0        | Type 1     | 1.0              | 578.0    | 92               | 53176.0              |
| Download | 1        | Type 1     | 1.0              | 818.0    | 65               | 53170.0              |
| Download | 2        | Type 1     | 1.0              | 658.0    | 81               | 53298.0              |
| Download | 3        | Type 1     | 1.0              | 558.0    | 95               | 53010.0              |
| Download | 4        | Type 1     | 1.0              | 938.0    | 57               | 53466.0              |
| Download | 5        | Type 1     | 1.0              | 638.0    | 83               | 52954.0              |
| Download | 6        | Type 1     | 1.0              | 3066.0   | 18               | 55188.0              |
| Download | 7        | Type 1     | 1.0              | 518.0    | 102              | 52836.0              |
| Download | 8        | Type 1     | 1.0              | 538.0    | 99               | 53262.0              |
| Download | 9        | Type 1     | 1.0              | 778.0    | 68               | 52904.0              |
| Download | 10       | Type 1     | 1.0              | 918.0    | 58               | 53244.0              |
| Download | 11       | Type 1     | 1.0              | 898.0    | 59               | 52982.0              |
| Download | 12       | Type 1     | 1.0              | 718.0    | 74               | 53132.0              |
| Download | 13       | Type 1     | 1.0              | 618.0    | 86               | 53148.0              |
| Download | 14       | Type 1     | 1.0              | 758.0    | 70               | 53060.0              |
| Download | 15       | Type 1     | 1.0              | 691.0    | 77               | 53207.0              |
| Download | 16       | Type 1     | 1.0              | 1148.0   | 46               | 52808.0              |
| Download | 17       | Type 1     | 1.0              | 1920.0   | 28               | 53760.0              |
| Download | 18       | Type 1     | 1.0              | 2370.0   | 23               | 54510.0              |
| Download | 19       | Type 1     | 1.0              | 1623.0   | 33               | 53559.0              |
| Download | 20       | Type 1     | 1.0              | 1554.0   | 34               | 52836.0              |
| Download | 21       | Type 1     | 1.0              | 1926.0   | 28               | 53928.0              |
| Download | 22       | Type 1     | 1.0              | 2778.0   | 19               | 52782.0              |
| Download | 23       | Type 1     | 1.0              | 1992.0   | 27               | 53784.0              |
| Download | 24       | Type 1     | 1.0              | 1235.0   | 43               | 53105.0              |
| Download | 25       | Type 1     | 1.0              | 2750.0   | 20               | 55000.0              |
| Download | 26       | Type 1     | 1.0              | 2966.0   | 18               | 53388.0              |
| Download | 27       | Type 1     | 1.0              | 986.0    | 54               | 53244.0              |
| Download | 28       | Type 1     | 1.0              | 1501.0   | 36               | 54036.0              |
| Download | 29       | Type 1     | 1.0              | 1231.0   | 43               | 52933.0              |

## Radar Type 2 - Radar Waveform

|          | Trial Id | Radar Type | Pulse Width (us) | PRI (us) | Number of Pulses | Waveform Length (us) |
|----------|----------|------------|------------------|----------|------------------|----------------------|
| Download | 0        | Type 2     | 2.3              | 207.0    | 25               | 5175.0               |
| Download | 1        | Type 2     | 4.5              | 211.0    | 29               | 6119.0               |
| Download | 2        | Type 2     | 1.2              | 203.0    | 23               | 4669.0               |
| Download | 3        | Type 2     | 2.8              | 196.0    | 26               | 5096.0               |
| Download | 4        | Type 2     | 4.7              | 209.0    | 29               | 6061.0               |
| Download | 5        | Type 2     | 2.2              | 159.0    | 25               | 3975.0               |
| Download | 6        | Type 2     | 2.2              | 156.0    | 25               | 3900.0               |
| Download | 7        | Type 2     | 2.7              | 222.0    | 26               | 5772.0               |
| Download | 8        | Type 2     | 1.8              | 183.0    | 24               | 4392.0               |
| Download | 9        | Type 2     | 4.2              | 215.0    | 28               | 6020.0               |
| Download | 10       | Type 2     | 1.2              | 169.0    | 23               | 3887.0               |
| Download | 11       | Type 2     | 4.2              | 160.0    | 28               | 4480.0               |
| Download | 12       | Type 2     | 2.7              | 188.0    | 26               | 4888.0               |
| Download | 13       | Type 2     | 1.5              | 184.0    | 23               | 4232.0               |
| Download | 14       | Type 2     | 2.2              | 197.0    | 25               | 4925.0               |
| Download | 15       | Type 2     | 2.6              | 199.0    | 25               | 4975.0               |
| Download | 16       | Type 2     | 2.2              | 163.0    | 25               | 4075.0               |
| Download | 17       | Type 2     | 2.7              | 170.0    | 25               | 4250.0               |
| Download | 18       | Type 2     | 1.6              | 227.0    | 24               | 5448.0               |
| Download | 19       | Type 2     | 1.5              | 152.0    | 23               | 3496.0               |
| Download | 20       | Type 2     | 4.0              | 208.0    | 28               | 5824.0               |
| Download | 21       | Type 2     | 4.5              | 214.0    | 29               | 6206.0               |
| Download | 22       | Type 2     | 1.6              | 162.0    | 24               | 3888.0               |
| Download | 23       | Type 2     | 1.2              | 187.0    | 23               | 4301.0               |
| Download | 24       | Type 2     | 3.8              | 164.0    | 27               | 4428.0               |
| Download | 25       | Type 2     | 3.6              | 221.0    | 27               | 5967.0               |
| Download | 26       | Type 2     | 3.3              | 192.0    | 27               | 5184.0               |
| Download | 27       | Type 2     | 3.0              | 172.0    | 26               | 4472.0               |
| Download | 28       | Type 2     | 3.8              | 216.0    | 27               | 5832.0               |
| Download | 29       | Type 2     | 2.4              | 189.0    | 25               | 4725.0               |

## Radar Type 3 - Radar Waveform

|          | Trial Id | Radar Type | Pulse Width (us) | PRI (us) | Number of Pulses | Waveform Length (us) |
|----------|----------|------------|------------------|----------|------------------|----------------------|
| Download | 0        | Type 3     | 7.3              | 391.0    | 17               | 6647.0               |
| Download | 1        | Type 3     | 9.5              | 214.0    | 18               | 3852.0               |
| Download | 2        | Type 3     | 6.2              | 345.0    | 16               | 5520.0               |
| Download | 3        | Type 3     | 7.8              | 351.0    | 17               | 5967.0               |
| Download | 4        | Type 3     | 9.7              | 228.0    | 18               | 4104.0               |
| Download | 5        | Type 3     | 7.2              | 369.0    | 16               | 5904.0               |
| Download | 6        | Type 3     | 7.2              | 313.0    | 16               | 5008.0               |
| Download | 7        | Type 3     | 7.7              | 298.0    | 17               | 5066.0               |
| Download | 8        | Type 3     | 6.8              | 221.0    | 16               | 3536.0               |
| Download | 9        | Type 3     | 9.2              | 330.0    | 18               | 5940.0               |
| Download | 10       | Type 3     | 6.2              | 392.0    | 16               | 6272.0               |
| Download | 11       | Type 3     | 9.2              | 240.0    | 18               | 4320.0               |
| Download | 12       | Type 3     | 7.7              | 307.0    | 17               | 5219.0               |
| Download | 13       | Type 3     | 6.5              | 258.0    | 16               | 4128.0               |
| Download | 14       | Type 3     | 7.2              | 331.0    | 16               | 5296.0               |
| Download | 15       | Type 3     | 7.6              | 469.0    | 17               | 7973.0               |
| Download | 16       | Type 3     | 7.2              | 408.0    | 16               | 6528.0               |
| Download | 17       | Type 3     | 7.7              | 452.0    | 17               | 7684.0               |
| Download | 18       | Type 3     | 6.6              | 405.0    | 16               | 6480.0               |
| Download | 19       | Type 3     | 6.5              | 211.0    | 16               | 3376.0               |
| Download | 20       | Type 3     | 9.0              | 422.0    | 18               | 7596.0               |
| Download | 21       | Type 3     | 9.5              | 349.0    | 18               | 6282.0               |
| Download | 22       | Type 3     | 6.6              | 381.0    | 16               | 6096.0               |
| Download | 23       | Type 3     | 6.2              | 207.0    | 16               | 3312.0               |
| Download | 24       | Type 3     | 8.8              | 426.0    | 18               | 7668.0               |
| Download | 25       | Type 3     | 8.6              | 260.0    | 17               | 4420.0               |
| Download | 26       | Type 3     | 8.3              | 213.0    | 17               | 3621.0               |
| Download | 27       | Type 3     | 8.0              | 496.0    | 17               | 8432.0               |
| Download | 28       | Type 3     | 8.8              | 438.0    | 18               | 7884.0               |
| Download | 29       | Type 3     | 7.4              | 250.0    | 17               | 4250.0               |

## Radar Type 4 - Radar Waveform

|          | <b>Trial Id</b> | <b>Radar Type</b> | <b>Pulse Width (us)</b> | <b>PRI (us)</b> | <b>Number of Pulses</b> | <b>Waveform Length (us)</b> |
|----------|-----------------|-------------------|-------------------------|-----------------|-------------------------|-----------------------------|
| Download | 0               | Type 4            | 14.0                    | 391.0           | 13                      | 5083.0                      |
| Download | 1               | Type 4            | 18.8                    | 214.0           | 16                      | 3424.0                      |
| Download | 2               | Type 4            | 11.4                    | 345.0           | 12                      | 4140.0                      |
| Download | 3               | Type 4            | 14.9                    | 351.0           | 14                      | 4914.0                      |
| Download | 4               | Type 4            | 19.4                    | 228.0           | 16                      | 3648.0                      |
| Download | 5               | Type 4            | 13.8                    | 369.0           | 13                      | 4797.0                      |
| Download | 6               | Type 4            | 13.8                    | 313.0           | 13                      | 4069.0                      |
| Download | 7               | Type 4            | 14.9                    | 298.0           | 14                      | 4172.0                      |
| Download | 8               | Type 4            | 12.9                    | 221.0           | 13                      | 2873.0                      |
| Download | 9               | Type 4            | 18.1                    | 330.0           | 15                      | 4950.0                      |
| Download | 10              | Type 4            | 11.4                    | 392.0           | 12                      | 4704.0                      |
| Download | 11              | Type 4            | 18.1                    | 240.0           | 15                      | 3600.0                      |
| Download | 12              | Type 4            | 14.9                    | 307.0           | 14                      | 4298.0                      |
| Download | 13              | Type 4            | 12.1                    | 258.0           | 12                      | 3096.0                      |
| Download | 14              | Type 4            | 13.6                    | 331.0           | 13                      | 4303.0                      |
| Download | 15              | Type 4            | 14.6                    | 469.0           | 14                      | 6566.0                      |
| Download | 16              | Type 4            | 13.7                    | 408.0           | 13                      | 5304.0                      |
| Download | 17              | Type 4            | 14.7                    | 452.0           | 14                      | 6328.0                      |
| Download | 18              | Type 4            | 12.4                    | 405.0           | 12                      | 4860.0                      |
| Download | 19              | Type 4            | 12.2                    | 211.0           | 12                      | 2532.0                      |
| Download | 20              | Type 4            | 17.8                    | 422.0           | 15                      | 6330.0                      |
| Download | 21              | Type 4            | 18.8                    | 349.0           | 16                      | 5584.0                      |
| Download | 22              | Type 4            | 12.4                    | 381.0           | 12                      | 4572.0                      |
| Download | 23              | Type 4            | 11.6                    | 207.0           | 12                      | 2484.0                      |
| Download | 24              | Type 4            | 17.3                    | 426.0           | 15                      | 6390.0                      |
| Download | 25              | Type 4            | 16.7                    | 260.0           | 15                      | 3900.0                      |
| Download | 26              | Type 4            | 16.3                    | 213.0           | 14                      | 2982.0                      |
| Download | 27              | Type 4            | 15.4                    | 496.0           | 14                      | 6944.0                      |
| Download | 28              | Type 4            | 17.2                    | 438.0           | 15                      | 6570.0                      |
| Download | 29              | Type 4            | 14.2                    | 250.0           | 13                      | 3250.0                      |



Radar Type 5 - Radar Statistical Performance

| Trail #                  | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection | Trail # | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection |
|--------------------------|---------------------|-------------------------------|---------|---------------------|-------------------------------|
| 0                        | 5290.0              | 1                             | 15      | 5254.0              | 1                             |
| 1                        | 5290.0              | 1                             | 16      | 5254.0              | 1                             |
| 2                        | 5290.0              | 1                             | 17      | 5254.0              | 1                             |
| 3                        | 5290.0              | 1                             | 18      | 5253.0              | 0                             |
| 4                        | 5290.0              | 1                             | 19      | 5253.0              | 1                             |
| 5                        | 5290.0              | 1                             | 20      | 5324.0              | 1                             |
| 6                        | 5290.0              | 1                             | 21      | 5323.0              | 1                             |
| 7                        | 5290.0              | 1                             | 22      | 5327.0              | 1                             |
| 8                        | 5290.0              | 1                             | 23      | 5328.0              | 1                             |
| 9                        | 5290.0              | 1                             | 24      | 5324.0              | 1                             |
| 10                       | 5252.0              | 1                             | 25      | 5324.0              | 1                             |
| 11                       | 5257.0              | 1                             | 26      | 5324.0              | 1                             |
| 12                       | 5254.0              | 1                             | 27      | 5325.0              | 1                             |
| 13                       | 5253.0              | 1                             | 28      | 5324.0              | 1                             |
| 14                       | 5254.0              | 1                             | 29      | 5326.0              | 1                             |
| Detection Percentage (%) |                     |                               |         |                     | 96.6%                         |

| Type 5 Radar Waveform_0 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 575637.0                | 66.7             | 10                | 2                          | 1981.0     | 1274.0     | -          |
| 816204.0                | 93.4             | 10                | 3                          | 1725.0     | 1493.0     | 1470.0     |
| 62476.0                 | 52.5             | 10                | 1                          | 1645.0     | -          | -          |
| 304199.0                | 72.0             | 10                | 2                          | 1123.0     | 1864.0     | -          |
| 544835.0                | 96.3             | 10                | 3                          | 1933.0     | 1344.0     | 1848.0     |
| 789371.0                | 65.8             | 10                | 1                          | 1016.0     | -          | -          |
| 32647.0                 | 65.6             | 10                | 1                          | 1787.0     | -          | -          |
| 274528.0                | 71.7             | 10                | 2                          | 1502.0     | 1071.0     | -          |
| 516849.0                | 60.7             | 10                | 1                          | 1775.0     | -          | -          |
| 757320.0                | 89.2             | 10                | 3                          | 1188.0     | 1292.0     | 1439.0     |
| 2826.0                  | 52.7             | 10                | 1                          | 1667.0     | -          | -          |
| 244183.0                | 89.2             | 10                | 3                          | 1956.0     | 1101.0     | 1749.0     |





| Type 5 Radar Waveform_1 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 306375.0                | 71.4             | 18                | 2                          | 1679.0     | 1945.0     | -          |
| 460074.0                | 56.4             | 18                | 1                          | 1708.0     | -          | -          |
| 613084.0                | 64.7             | 18                | 1                          | 1454.0     | -          | -          |
| 135486.0                | 70.1             | 18                | 2                          | 1771.0     | 1067.0     | -          |
| 288775.0                | 65.2             | 18                | 1                          | 1092.0     | -          | -          |
| 440303.0                | 70.8             | 18                | 2                          | 1242.0     | 1828.0     | -          |
| 594327.0                | 58.0             | 18                | 1                          | 1383.0     | -          | -          |
| 117001.0                | 56.7             | 18                | 1                          | 1231.0     | -          | -          |
| 268211.0                | 87.4             | 18                | 3                          | 1651.0     | 1727.0     | 1753.0     |
| 420764.0                | 93.1             | 18                | 3                          | 1436.0     | 1164.0     | 1607.0     |
| 575616.0                | 58.0             | 18                | 1                          | 1256.0     | -          | -          |
| 98117.0                 | 53.6             | 18                | 1                          | 1569.0     | -          | -          |
| 249596.0                | 84.9             | 18                | 3                          | 1437.0     | 1612.0     | 1831.0     |
| 403016.0                | 81.8             | 18                | 2                          | 1237.0     | 1418.0     | -          |
| 555332.0                | 79.2             | 18                | 2                          | 1379.0     | 1522.0     | -          |
| 79154.0                 | 74.5             | 18                | 2                          | 1472.0     | 1229.0     | -          |
| 231267.0                | 84.6             | 18                | 3                          | 1177.0     | 1505.0     | 1131.0     |
| 384123.0                | 67.9             | 18                | 2                          | 1527.0     | 1299.0     | -          |
| 535983.0                | 71.7             | 18                | 2                          | 1803.0     | 1764.0     | -          |

| Type 5 Radar Waveform_2 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 143640.0                | 92.1             | 5                 | 3                          | 1444.0     | 1048.0     | 1102.0     |
| 506207.0                | 88.6             | 5                 | 3                          | 1273.0     | 1635.0     | 1748.0     |
| 869868.0                | 79.3             | 5                 | 2                          | 1524.0     | 1422.0     | -          |
| 1231383.0               | 94.5             | 5                 | 3                          | 1301.0     | 1690.0     | 1858.0     |
| 99073.0                 | 59.2             | 5                 | 1                          | 1528.0     | -          | -          |
| 461621.0                | 92.0             | 5                 | 3                          | 1349.0     | 1847.0     | 1180.0     |
| 824188.0                | 83.9             | 5                 | 3                          | 1586.0     | 1879.0     | 1217.0     |
| 1189291.0               | 63.0             | 5                 | 1                          | 1606.0     | -          | -          |

| Type 5 Radar Waveform_3 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 33351.0                 | 70.5             | 12                | 2                          | 1825.0     | 1023.0     | -          |
| 256883.0                | 64.1             | 12                | 1                          | 1599.0     | -          | -          |
| 479511.0                | 67.3             | 12                | 2                          | 1459.0     | 1789.0     | -          |
| 701904.0                | 89.2             | 12                | 3                          | 1100.0     | 1377.0     | 1681.0     |
| 5870.0                  | 54.1             | 12                | 1                          | 1203.0     | -          | -          |
| 229273.0                | 51.9             | 12                | 1                          | 1927.0     | -          | -          |
| 451203.0                | 96.0             | 12                | 3                          | 1975.0     | 1148.0     | 1812.0     |
| 676463.0                | 63.7             | 12                | 1                          | 1417.0     | -          | -          |
| 899699.0                | 58.4             | 12                | 1                          | 1720.0     | -          | -          |
| 201451.0                | 77.3             | 12                | 2                          | 1979.0     | 1336.0     | -          |
| 425143.0                | 56.5             | 12                | 1                          | 1968.0     | -          | -          |
| 646292.0                | 97.0             | 12                | 3                          | 1998.0     | 1331.0     | 1834.0     |
| 869272.0                | 98.9             | 12                | 3                          | 1616.0     | 1761.0     | 1409.0     |



**Type 5 Radar Waveform\_4**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 113247.0          | 61.5             | 19                | 1                          | 1266.0     | -          | -          |
| 257480.0          | 97.5             | 19                | 3                          | 1347.0     | 1057.0     | 1138.0     |
| 403701.0          | 65.5             | 19                | 1                          | 1227.0     | -          | -          |
| 547651.0          | 73.7             | 19                | 2                          | 1254.0     | 1360.0     | -          |
| 94844.0           | 85.4             | 19                | 3                          | 1269.0     | 1332.0     | 1929.0     |
| 239049.0          | 99.0             | 19                | 3                          | 1429.0     | 1961.0     | 1677.0     |
| 383438.0          | 87.1             | 19                | 3                          | 1298.0     | 1875.0     | 1740.0     |
| 531072.0          | 64.4             | 19                | 1                          | 1184.0     | -          | -          |
| 77044.0           | 86.6             | 19                | 3                          | 1555.0     | 1270.0     | 1792.0     |
| 221495.0          | 91.2             | 19                | 3                          | 1683.0     | 1715.0     | 1078.0     |
| 365507.0          | 87.2             | 19                | 3                          | 1862.0     | 1796.0     | 1504.0     |
| 509686.0          | 92.8             | 19                | 3                          | 1610.0     | 1993.0     | 1662.0     |
| 59385.0           | 67.4             | 19                | 2                          | 1700.0     | 1633.0     | -          |
| 204614.0          | 60.7             | 19                | 1                          | 1816.0     | -          | -          |
| 350004.0          | 50.6             | 19                | 1                          | 1283.0     | -          | -          |
| 492128.0          | 92.2             | 19                | 3                          | 1877.0     | 1988.0     | 1147.0     |
| 41691.0           | 62.0             | 19                | 1                          | 1452.0     | -          | -          |
| 186799.0          | 55.4             | 19                | 1                          | 1641.0     | -          | -          |
| 331143.0          | 78.1             | 19                | 2                          | 1490.0     | 1550.0     | -          |
| 476020.0          | 81.3             | 19                | 2                          | 1630.0     | 1291.0     | -          |

**Type 5 Radar Waveform\_5**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 39701.0           | 57.8             | 10                | 1                          | 1953.0     | -          | -          |
| 281027.0          | 87.5             | 10                | 3                          | 1711.0     | 1432.0     | 1401.0     |
| 522234.0          | 92.7             | 10                | 3                          | 1744.0     | 1619.0     | 1605.0     |
| 764894.0          | 70.1             | 10                | 2                          | 1634.0     | 1597.0     | -          |
| 9885.0            | 53.8             | 10                | 1                          | 1978.0     | -          | -          |
| 252020.0          | 53.9             | 10                | 1                          | 1646.0     | -          | -          |
| 494472.0          | 51.7             | 10                | 1                          | 1001.0     | -          | -          |
| 734376.0          | 88.9             | 10                | 3                          | 1278.0     | 1672.0     | 1284.0     |
| 976784.0          | 68.0             | 10                | 2                          | 1984.0     | 1328.0     | -          |
| 221865.0          | 70.8             | 10                | 2                          | 1863.0     | 1268.0     | -          |
| 463394.0          | 97.2             | 10                | 3                          | 1251.0     | 1005.0     | 1397.0     |
| 705900.0          | 78.0             | 10                | 2                          | 1060.0     | 1376.0     | -          |

**Type 5 Radar Waveform\_6**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 947184.0          | 70.9             | 10                | 2                          | 1340.0     | 1788.0     | -          |
| 192076.0          | 72.9             | 10                | 2                          | 1327.0     | 1843.0     | -          |
| 434140.0          | 80.5             | 10                | 2                          | 1312.0     | 1166.0     | -          |
| 674342.0          | 91.1             | 10                | 3                          | 1213.0     | 1912.0     | 1903.0     |
| 918534.0          | 63.8             | 10                | 1                          | 1899.0     | -          | -          |
| 162369.0          | 70.7             | 10                | 2                          | 1230.0     | 1497.0     | -          |
| 404139.0          | 73.9             | 10                | 2                          | 1958.0     | 1014.0     | -          |
| 644805.0          | 93.1             | 10                | 3                          | 1464.0     | 1898.0     | 1378.0     |
| 886490.0          | 96.8             | 10                | 3                          | 1445.0     | 1503.0     | 1451.0     |
| 132219.0          | 98.6             | 10                | 3                          | 1872.0     | 1971.0     | 1568.0     |
| 373800.0          | 84.0             | 10                | 3                          | 1302.0     | 1685.0     | 1460.0     |
| 616376.0          | 73.0             | 10                | 2                          | 1595.0     | 1035.0     | -          |



| Type 5 Radar Waveform_7 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 791571.0                | 80.1             | 11                | 2                          | 1594.0     | 1621.0     | -          |
| 94707.0                 | 96.4             | 11                | 3                          | 1532.0     | 1070.0     | 1560.0     |
| 317500.0                | 86.7             | 11                | 3                          | 1391.0     | 1551.0     | 1431.0     |
| 539831.0                | 91.3             | 11                | 3                          | 1765.0     | 1989.0     | 1442.0     |
| 763744.0                | 95.4             | 11                | 3                          | 1040.0     | 1026.0     | 1567.0     |
| 67358.0                 | 71.6             | 11                | 2                          | 1399.0     | 1355.0     | -          |
| 289897.0                | 96.4             | 11                | 3                          | 1882.0     | 1954.0     | 1037.0     |
| 513184.0                | 71.8             | 11                | 2                          | 1891.0     | 1918.0     | -          |
| 736787.0                | 78.5             | 11                | 2                          | 1611.0     | 1384.0     | -          |
| 39897.0                 | 65.7             | 11                | 1                          | 1999.0     | -          | -          |
| 262682.0                | 91.1             | 11                | 3                          | 1117.0     | 1443.0     | 1557.0     |
| 485962.0                | 74.0             | 11                | 2                          | 1448.0     | 1905.0     | -          |
| 710383.0                | 54.7             | 11                | 1                          | 1590.0     | -          | -          |

| Type 5 Radar Waveform_8 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 16064.0                 | 95.4             | 8                 | 3                          | 1737.0     | 1394.0     | 1760.0     |
| 306566.0                | 69.9             | 8                 | 2                          | 1080.0     | 1267.0     | -          |
| 596695.0                | 81.4             | 8                 | 2                          | 1260.0     | 1769.0     | -          |
| 886004.0                | 97.2             | 8                 | 3                          | 1351.0     | 1491.0     | 1529.0     |
| 1175260.0               | 98.3             | 8                 | 3                          | 1795.0     | 1990.0     | 1319.0     |
| 270394.0                | 96.5             | 8                 | 3                          | 1358.0     | 1083.0     | 1643.0     |
| 561815.0                | 65.8             | 8                 | 1                          | 1154.0     | -          | -          |
| 850718.0                | 94.0             | 8                 | 3                          | 1202.0     | 1007.0     | 1554.0     |
| 1143178.0               | 59.1             | 8                 | 1                          | 1314.0     | -          | -          |
| 235028.0                | 71.9             | 8                 | 2                          | 1233.0     | 1013.0     | -          |

| Type 5 Radar Waveform_9 |                  |                   |                            |            |            |            |
|-------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)       | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 290756.0                | 94.5             | 17                | 3                          | 1659.0     | 1077.0     | 1247.0     |
| 452437.0                | 80.2             | 17                | 2                          | 1137.0     | 1438.0     | -          |
| 614187.0                | 59.5             | 17                | 1                          | 1832.0     | -          | -          |
| 110516.0                | 78.4             | 17                | 2                          | 1258.0     | 1053.0     | -          |
| 270615.0                | 91.4             | 17                | 3                          | 1940.0     | 1779.0     | 1106.0     |
| 432178.0                | 81.6             | 17                | 2                          | 1793.0     | 1427.0     | -          |
| 592161.0                | 85.0             | 17                | 3                          | 1082.0     | 1967.0     | 1204.0     |
| 90432.0                 | 84.5             | 17                | 3                          | 1382.0     | 1501.0     | 1161.0     |
| 252164.0                | 59.3             | 17                | 1                          | 1338.0     | -          | -          |
| 413213.0                | 53.5             | 17                | 1                          | 1844.0     | -          | -          |
| 573484.0                | 89.7             | 17                | 2                          | 1365.0     | 1601.0     | -          |
| 70670.0                 | 90.0             | 17                | 3                          | 1095.0     | 1240.0     | 1395.0     |
| 232405.0                | 57.5             | 17                | 1                          | 1004.0     | -          | -          |
| 392972.0                | 67.3             | 17                | 2                          | 1206.0     | 1280.0     | -          |
| 554717.0                | 60.5             | 17                | 1                          | 1694.0     | -          | -          |
| 50821.0                 | 93.6             | 17                | 3                          | 1414.0     | 1535.0     | 1357.0     |
| 211498.0                | 96.5             | 17                | 3                          | 1158.0     | 1279.0     | 1763.0     |
| 372665.0                | 74.4             | 17                | 2                          | 1915.0     | 1398.0     | -          |



**Type 5 Radar Waveform\_10**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 1203729.0         | 75.4             | 5                 | 2                          | 1780.0     | 1642.0     | -          |
| 70081.0           | 99.6             | 5                 | 3                          | 1103.0     | 1982.0     | 1120.0     |
| 433774.0          | 55.2             | 5                 | 1                          | 1042.0     | -          | -          |
| 796390.0          | 81.9             | 5                 | 2                          | 1603.0     | 1185.0     | -          |
| 1160132.0         | 56.5             | 5                 | 1                          | 1987.0     | -          | -          |
| 25383.0           | 86.4             | 5                 | 3                          | 1854.0     | 1574.0     | 1488.0     |
| 388376.0          | 68.4             | 5                 | 2                          | 1884.0     | 1538.0     | -          |
| 752260.0          | 50.8             | 5                 | 1                          | 1596.0     | -          | -          |

**Type 5 Radar Waveform\_11**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 493298.0          | 92.5             | 17                | 3                          | 1738.0     | 1018.0     | 1386.0     |
| 652806.0          | 95.9             | 17                | 3                          | 1846.0     | 1734.0     | 1752.0     |
| 152114.0          | 98.6             | 17                | 3                          | 1352.0     | 1099.0     | 1802.0     |
| 314200.0          | 52.1             | 17                | 1                          | 1224.0     | -          | -          |
| 474613.0          | 68.2             | 17                | 2                          | 1222.0     | 1370.0     | -          |
| 634795.0          | 79.0             | 17                | 2                          | 1577.0     | 1931.0     | -          |
| 132566.0          | 71.0             | 17                | 2                          | 1220.0     | 1823.0     | -          |
| 293668.0          | 74.5             | 17                | 2                          | 1455.0     | 1244.0     | -          |
| 453295.0          | 92.2             | 17                | 3                          | 1513.0     | 1275.0     | 1964.0     |
| 617145.0          | 61.0             | 17                | 1                          | 1178.0     | -          | -          |
| 112608.0          | 85.9             | 17                | 3                          | 1295.0     | 1155.0     | 1373.0     |
| 273087.0          | 93.3             | 17                | 3                          | 1179.0     | 1653.0     | 1675.0     |
| 435642.0          | 55.0             | 17                | 1                          | 1514.0     | -          | -          |
| 593863.0          | 90.2             | 17                | 3                          | 1660.0     | 1919.0     | 1388.0     |
| 92806.0           | 93.5             | 17                | 3                          | 1028.0     | 1543.0     | 1257.0     |
| 253674.0          | 81.2             | 17                | 2                          | 1969.0     | 1573.0     | -          |
| 414515.0          | 81.7             | 17                | 2                          | 1963.0     | 1559.0     | -          |
| 575252.0          | 70.5             | 17                | 2                          | 1917.0     | 1717.0     | -          |

**Type 5 Radar Waveform\_12**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 101185.0          | 85.1             | 11                | 3                          | 1494.0     | 1507.0     | 1364.0     |
| 325141.0          | 55.4             | 11                | 1                          | 1135.0     | -          | -          |
| 548463.0          | 62.3             | 11                | 1                          | 1602.0     | -          | -          |
| 771856.0          | 64.1             | 11                | 1                          | 1713.0     | -          | -          |
| 73738.0           | 86.7             | 11                | 3                          | 1457.0     | 1197.0     | 1728.0     |
| 297614.0          | 54.7             | 11                | 1                          | 1087.0     | -          | -          |
| 519479.0          | 100.0            | 11                | 3                          | 1149.0     | 1688.0     | 1339.0     |
| 741413.0          | 91.4             | 11                | 3                          | 1804.0     | 1965.0     | 1556.0     |
| 46402.0           | 68.6             | 11                | 2                          | 1046.0     | 1165.0     | -          |
| 269861.0          | 59.6             | 11                | 1                          | 1799.0     | -          | -          |
| 493351.0          | 66.6             | 11                | 1                          | 1704.0     | -          | -          |
| 717117.0          | 62.6             | 11                | 1                          | 1313.0     | -          | -          |
| 18862.0           | 73.7             | 11                | 2                          | 1673.0     | 1991.0     | -          |

| Type 5 Radar Waveform_13 |                  |                   |                            |            |            |            |
|--------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)        | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 349991.0                 | 73.2             | 7                 | 2                          | 1622.0     | 1181.0     | -          |
| 673321.0                 | 59.9             | 7                 | 1                          | 1549.0     | -          | -          |
| 994479.0                 | 90.5             | 7                 | 3                          | 1346.0     | 1531.0     | 1133.0     |
| 1317646.0                | 89.2             | 7                 | 3                          | 1159.0     | 1055.0     | 1025.0     |
| 309784.0                 | 89.2             | 7                 | 3                          | 1361.0     | 1924.0     | 1482.0     |
| 631943.0                 | 86.0             | 7                 | 3                          | 1710.0     | 1785.0     | 1400.0     |
| 956775.0                 | 57.2             | 7                 | 1                          | 1214.0     | -          | -          |
| 1277148.0                | 85.3             | 7                 | 3                          | 1160.0     | 1153.0     | 1719.0     |
| 269961.0                 | 90.7             | 7                 | 3                          | 1876.0     | 1669.0     | 1878.0     |

| Type 5 Radar Waveform_14 |                  |                   |                            |            |            |            |
|--------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)        | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 484974.0                 | 69.0             | 9                 | 2                          | 1757.0     | 1350.0     | -          |
| 748670.0                 | 83.1             | 9                 | 2                          | 1475.0     | 1821.0     | -          |
| 1012815.0                | 75.1             | 9                 | 2                          | 1175.0     | 1730.0     | -          |
| 188210.0                 | 99.5             | 9                 | 3                          | 1901.0     | 1859.0     | 1883.0     |
| 453098.0                 | 57.6             | 9                 | 1                          | 1613.0     | -          | -          |
| 717432.0                 | 53.2             | 9                 | 1                          | 1393.0     | -          | -          |
| 979717.0                 | 69.3             | 9                 | 2                          | 1676.0     | 1889.0     | -          |
| 156031.0                 | 85.2             | 9                 | 3                          | 1252.0     | 1059.0     | 1648.0     |
| 420437.0                 | 56.1             | 9                 | 1                          | 1921.0     | -          | -          |
| 684002.0                 | 74.1             | 9                 | 2                          | 1770.0     | 1024.0     | -          |
| 949159.0                 | 50.1             | 9                 | 1                          | 1354.0     | -          | -          |

| Type 5 Radar Waveform_15 |                  |                   |                            |            |            |            |
|--------------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| Burst Offset (us)        | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
| 104448.0                 | 86.0             | 11                | 3                          | 1716.0     | 1261.0     | 1264.0     |
| 328199.0                 | 51.2             | 11                | 1                          | 1702.0     | -          | -          |
| 551685.0                 | 63.0             | 11                | 1                          | 1663.0     | -          | -          |
| 772550.0                 | 88.5             | 11                | 3                          | 1798.0     | 1044.0     | 1920.0     |
| 77107.0                  | 78.4             | 11                | 2                          | 1246.0     | 1703.0     | -          |
| 300714.0                 | 59.1             | 11                | 1                          | 1579.0     | -          | -          |
| 522466.0                 | 93.9             | 11                | 3                          | 1200.0     | 1657.0     | 1782.0     |
| 747660.0                 | 52.1             | 11                | 1                          | 1626.0     | -          | -          |
| 49596.0                  | 76.8             | 11                | 2                          | 1544.0     | 1829.0     | -          |
| 273205.0                 | 60.4             | 11                | 1                          | 1512.0     | -          | -          |
| 496908.0                 | 61.4             | 11                | 1                          | 1151.0     | -          | -          |
| 720570.0                 | 57.8             | 11                | 1                          | 1066.0     | -          | -          |
| 22119.0                  | 79.6             | 11                | 2                          | 1871.0     | 1576.0     | -          |

**Type 5 Radar Waveform\_16**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 289362.0          | 87.4             | 9                 | 3                          | 1598.0     | 1985.0     | 1880.0     |
| 554630.0          | 62.7             | 9                 | 1                          | 1508.0     | -          | -          |
| 817843.0          | 83.3             | 9                 | 2                          | 1644.0     | 1196.0     | -          |
| 1082753.0         | 64.6             | 9                 | 1                          | 1815.0     | -          | -          |
| 257944.0          | 51.0             | 9                 | 1                          | 1198.0     | -          | -          |
| 522180.0          | 54.2             | 9                 | 1                          | 1311.0     | -          | -          |
| 784177.0          | 95.2             | 9                 | 3                          | 1484.0     | 1374.0     | 1591.0     |
| 1049034.0         | 74.5             | 9                 | 2                          | 1952.0     | 1090.0     | -          |
| 224830.0          | 85.2             | 9                 | 3                          | 1367.0     | 1126.0     | 1411.0     |
| 488383.0          | 94.4             | 9                 | 3                          | 1266.0     | 1712.0     | 1105.0     |
| 752146.0          | 86.5             | 9                 | 3                          | 1245.0     | 1265.0     | 1322.0     |

**Type 5 Radar Waveform\_17**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 860086.0          | 79.3             | 11                | 2                          | 1402.0     | 1235.0     | -          |
| 162545.0          | 89.1             | 11                | 3                          | 1731.0     | 1631.0     | 1172.0     |
| 384959.0          | 87.3             | 11                | 3                          | 1942.0     | 1922.0     | 1533.0     |
| 608191.0          | 97.1             | 11                | 3                          | 1486.0     | 1038.0     | 1867.0     |
| 830961.0          | 96.8             | 11                | 3                          | 1462.0     | 1124.0     | 1850.0     |
| 135267.0          | 72.0             | 11                | 2                          | 1578.0     | 1855.0     | -          |
| 358156.0          | 83.4             | 11                | 3                          | 1303.0     | 1108.0     | 1416.0     |
| 582830.0          | 53.4             | 11                | 1                          | 1094.0     | -          | -          |
| 803813.0          | 92.6             | 11                | 3                          | 1413.0     | 1650.0     | 1034.0     |
| 108061.0          | 62.4             | 11                | 1                          | 1144.0     | -          | -          |
| 330698.0          | 87.7             | 11                | 3                          | 1050.0     | 1546.0     | 1219.0     |
| 553868.0          | 71.9             | 11                | 2                          | 1553.0     | 1896.0     | -          |
| 776447.0          | 97.0             | 11                | 3                          | 1698.0     | 1167.0     | 1129.0     |

**Type 5 Radar Waveform\_18**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 104659.0          | 52.0             | 7                 | 1                          | 1664.0     | -          | -          |
| 395490.0          | 60.7             | 7                 | 1                          | 1068.0     | -          | -          |
| 685012.0          | 80.0             | 7                 | 2                          | 1908.0     | 1356.0     | -          |
| 974830.0          | 92.1             | 7                 | 3                          | 1088.0     | 1476.0     | 1225.0     |
| 68891.0           | 55.0             | 7                 | 1                          | 1113.0     | -          | -          |
| 359524.0          | 58.5             | 7                 | 1                          | 1562.0     | -          | -          |
| 649392.0          | 80.3             | 7                 | 2                          | 1262.0     | 1758.0     | -          |
| 940644.0          | 57.5             | 7                 | 1                          | 1814.0     | -          | -          |
| 33038.0           | 75.2             | 7                 | 2                          | 1412.0     | 1058.0     | -          |
| 322830.0          | 95.5             | 7                 | 3                          | 1992.0     | 1465.0     | 1406.0     |



**Type 5 Radar Waveform\_19**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 682978.0          | 62.1             | 7                 | 1                          | 1086.0     | -          | -          |
| 1003434.0         | 95.0             | 7                 | 3                          | 1774.0     | 1467.0     | 1363.0     |
| 1327561.0         | 69.9             | 7                 | 2                          | 1045.0     | 1686.0     | -          |
| 319958.0          | 54.7             | 7                 | 1                          | 1537.0     | -          | -          |
| 641514.0          | 84.1             | 7                 | 3                          | 1693.0     | 1136.0     | 1705.0     |
| 965975.0          | 51.8             | 7                 | 1                          | 1521.0     | -          | -          |
| 1287849.0         | 78.9             | 7                 | 2                          | 1208.0     | 1483.0     | -          |
| 280029.0          | 75.7             | 7                 | 2                          | 1002.0     | 1212.0     | -          |
| 603359.0          | 50.8             | 7                 | 1                          | 1128.0     | -          | -          |

**Type 5 Radar Waveform\_20**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 490007.0          | 56.8             | 16                | 1                          | 1277.0     | -          | -          |
| 659789.0          | 76.5             | 16                | 2                          | 1054.0     | 1403.0     | -          |
| 127116.0          | 59.2             | 16                | 1                          | 1627.0     | -          | -          |
| 296356.0          | 89.4             | 16                | 3                          | 1852.0     | 1837.0     | 1636.0     |
| 467996.0          | 71.9             | 16                | 2                          | 1506.0     | 1215.0     | -          |
| 637094.0          | 96.9             | 16                | 3                          | 1707.0     | 1408.0     | 1193.0     |
| 106067.0          | 55.4             | 16                | 1                          | 1695.0     | -          | -          |
| 277034.0          | 54.7             | 16                | 1                          | 1238.0     | -          | -          |
| 446467.0          | 77.0             | 16                | 2                          | 1709.0     | 1835.0     | -          |
| 618611.0          | 57.9             | 16                | 1                          | 1489.0     | -          | -          |
| 85000.0           | 65.3             | 16                | 1                          | 1939.0     | -          | -          |
| 255333.0          | 67.2             | 16                | 2                          | 1423.0     | 1604.0     | -          |
| 425105.0          | 99.8             | 16                | 3                          | 1886.0     | 1112.0     | 1173.0     |
| 594891.0          | 90.9             | 16                | 3                          | 1297.0     | 1520.0     | 1827.0     |
| 63751.0           | 86.3             | 16                | 3                          | 1072.0     | 1515.0     | 1766.0     |
| 234739.0          | 62.5             | 16                | 1                          | 1820.0     | -          | -          |
| 403603.0          | 90.3             | 16                | 3                          | 1897.0     | 1572.0     | 1638.0     |

**Type 5 Radar Waveform\_21**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 514283.0          | 74.3             | 18                | 2                          | 1890.0     | 1341.0     | -          |
| 38463.0           | 53.1             | 18                | 1                          | 1041.0     | -          | -          |
| 190627.0          | 69.4             | 18                | 2                          | 1895.0     | 1652.0     | -          |
| 343215.0          | 76.7             | 18                | 2                          | 1478.0     | 1575.0     | -          |
| 496485.0          | 64.1             | 18                | 1                          | 1997.0     | -          | -          |
| 19566.0           | 78.9             | 18                | 2                          | 1781.0     | 1186.0     | -          |
| 172478.0          | 54.0             | 18                | 1                          | 1309.0     | -          | -          |
| 323945.0          | 93.6             | 18                | 3                          | 1189.0     | 1032.0     | 1786.0     |
| 477003.0          | 75.2             | 18                | 2                          | 1027.0     | 1857.0     | -          |
| 789.0             | 52.0             | 18                | 1                          | 1324.0     | -          | -          |
| 153138.0          | 76.8             | 18                | 2                          | 1797.0     | 1608.0     | -          |
| 305859.0          | 67.3             | 18                | 2                          | 1199.0     | 1447.0     | -          |
| 457337.0          | 99.4             | 18                | 3                          | 1017.0     | 1941.0     | 1140.0     |
| 611911.0          | 51.5             | 18                | 1                          | 1637.0     | -          | -          |
| 134796.0          | 63.6             | 18                | 1                          | 1419.0     | -          | -          |
| 286304.0          | 86.7             | 18                | 3                          | 1830.0     | 1300.0     | 1195.0     |
| 438530.0          | 86.8             | 18                | 3                          | 1661.0     | 1062.0     | 1463.0     |
| 592918.0          | 65.0             | 18                | 1                          | 1822.0     | -          | -          |
| 115798.0          | 70.4             | 18                | 2                          | 1239.0     | 1118.0     | -          |



**Type 5 Radar Waveform\_22**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 510036.0          | 92.9             | 7                 | 3                          | 1525.0     | 1649.0     | 1145.0     |
| 800538.0          | 71.4             | 7                 | 2                          | 1907.0     | 1647.0     | -          |
| 1092937.0         | 58.0             | 7                 | 1                          | 1116.0     | -          | -          |
| 184395.0          | 95.3             | 7                 | 3                          | 1119.0     | 1330.0     | 1415.0     |
| 474438.0          | 99.7             | 7                 | 3                          | 1049.0     | 1306.0     | 1655.0     |
| 766344.0          | 53.7             | 7                 | 1                          | 1130.0     | -          | -          |
| 1056726.0         | 53.2             | 7                 | 1                          | 1564.0     | -          | -          |
| 148452.0          | 99.7             | 7                 | 3                          | 1973.0     | 1809.0     | 1772.0     |
| 439744.0          | 59.9             | 7                 | 1                          | 1187.0     | -          | -          |
| 729423.0          | 78.3             | 7                 | 2                          | 1800.0     | 1146.0     | -          |

**Type 5 Radar Waveform\_23**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 1276618.0         | 62.3             | 6                 | 1                          | 1410.0     | -          | -          |
| 141465.0          | 54.1             | 6                 | 1                          | 1600.0     | -          | -          |
| 503664.0          | 83.6             | 6                 | 3                          | 1937.0     | 1430.0     | 1826.0     |
| 867065.0          | 92.2             | 6                 | 3                          | 1440.0     | 1232.0     | 1031.0     |
| 1229347.0         | 93.8             | 6                 | 3                          | 1946.0     | 1174.0     | 1334.0     |
| 96631.0           | 77.6             | 6                 | 2                          | 1582.0     | 1109.0     | -          |
| 459881.0          | 75.8             | 6                 | 2                          | 1318.0     | 1030.0     | -          |
| 823695.0          | 56.2             | 6                 | 1                          | 1282.0     | -          | -          |

**Type 5 Radar Waveform\_24**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 557070.0          | 74.2             | 16                | 2                          | 1308.0     | 1320.0     | -          |
| 24291.0           | 92.8             | 16                | 3                          | 1670.0     | 1948.0     | 1469.0     |
| 194289.0          | 97.7             | 16                | 3                          | 1860.0     | 1421.0     | 1687.0     |
| 366321.0          | 55.1             | 16                | 1                          | 1047.0     | -          | -          |
| 534899.0          | 95.8             | 16                | 3                          | 1003.0     | 1721.0     | 1428.0     |
| 3356.0            | 96.8             | 16                | 3                          | 1759.0     | 1201.0     | 1962.0     |
| 173573.0          | 94.8             | 16                | 3                          | 1425.0     | 1458.0     | 1183.0     |
| 344608.0          | 78.7             | 16                | 2                          | 1236.0     | 1152.0     | -          |
| 514301.0          | 87.5             | 16                | 3                          | 1495.0     | 1089.0     | 1069.0     |
| 685411.0          | 77.7             | 16                | 2                          | 1211.0     | 1624.0     | -          |
| 153197.0          | 56.4             | 16                | 1                          | 1353.0     | -          | -          |
| 324064.0          | 51.6             | 16                | 1                          | 1359.0     | -          | -          |
| 493690.0          | 80.5             | 16                | 2                          | 1498.0     | 1632.0     | -          |
| 665648.0          | 62.9             | 16                | 1                          | 1523.0     | -          | -          |
| 131922.0          | 75.8             | 16                | 2                          | 1171.0     | 1396.0     | -          |
| 302971.0          | 65.9             | 16                | 1                          | 1466.0     | -          | -          |
| 472524.0          | 69.7             | 16                | 2                          | 1390.0     | 1995.0     | -          |





**Type 5 Radar Waveform\_25**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 683636.0          | 68.9             | 15                | 2                          | 1104.0     | 1887.0     | -          |
| 118005.0          | 66.2             | 15                | 1                          | 1692.0     | -          | -          |
| 299715.0          | 57.9             | 15                | 1                          | 1139.0     | -          | -          |
| 480273.0          | 69.8             | 15                | 2                          | 1783.0     | 1012.0     | -          |
| 661780.0          | 73.0             | 15                | 2                          | 1329.0     | 1143.0     | -          |
| 95646.0           | 60.8             | 15                | 1                          | 1729.0     | -          | -          |
| 276814.0          | 79.2             | 15                | 2                          | 1029.0     | 1539.0     | -          |
| 457105.0          | 94.1             | 15                | 3                          | 1732.0     | 1019.0     | 1424.0     |
| 640520.0          | 65.3             | 15                | 1                          | 1218.0     | -          | -          |
| 73316.0           | 62.8             | 15                | 1                          | 1474.0     | -          | -          |
| 253637.0          | 98.0             | 15                | 3                          | 1916.0     | 1986.0     | 1156.0     |
| 434657.0          | 93.2             | 15                | 3                          | 1250.0     | 1671.0     | 1540.0     |
| 616021.0          | 75.1             | 15                | 2                          | 1894.0     | 1904.0     | -          |
| 50976.0           | 55.5             | 15                | 1                          | 1168.0     | -          | -          |
| 231794.0          | 74.0             | 15                | 2                          | 1966.0     | 1767.0     | -          |
| 412902.0          | 87.9             | 15                | 3                          | 1074.0     | 1142.0     | 1310.0     |

**Type 5 Radar Waveform\_26**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 634451.0          | 80.5             | 14                | 2                          | 1009.0     | 1609.0     | -          |
| 30486.0           | 62.6             | 14                | 1                          | 1911.0     | -          | -          |
| 223791.0          | 72.3             | 14                | 2                          | 1805.0     | 1022.0     | -          |
| 417391.0          | 72.7             | 14                | 2                          | 1243.0     | 1085.0     | -          |
| 609682.0          | 87.7             | 14                | 3                          | 1210.0     | 1369.0     | 1276.0     |
| 6634.0            | 75.6             | 14                | 2                          | 1485.0     | 1584.0     | -          |
| 200386.0          | 61.2             | 14                | 1                          | 1192.0     | -          | -          |
| 393834.0          | 50.5             | 14                | 1                          | 1776.0     | -          | -          |
| 586405.0          | 70.9             | 14                | 2                          | 1972.0     | 1194.0     | -          |
| 781072.0          | 66.2             | 14                | 1                          | 1726.0     | -          | -          |
| 176161.0          | 75.6             | 14                | 2                          | 1541.0     | 1285.0     | -          |
| 368702.0          | 93.3             | 14                | 3                          | 1248.0     | 1623.0     | 1678.0     |
| 563804.0          | 58.3             | 14                | 1                          | 1461.0     | -          | -          |
| 754372.0          | 97.8             | 14                | 3                          | 1628.0     | 1263.0     | 1842.0     |
| 151969.0          | 99.5             | 14                | 3                          | 1873.0     | 1865.0     | 1061.0     |

**Type 5 Radar Waveform\_27**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 370263.0          | 78.3             | 12                | 2                          | 1818.0     | 1473.0     | -          |
| 577096.0          | 67.7             | 12                | 2                          | 2000.0     | 1665.0     | -          |
| 784288.0          | 72.5             | 12                | 2                          | 1745.0     | 1706.0     | -          |
| 137800.0          | 74.9             | 12                | 2                          | 1097.0     | 1380.0     | -          |
| 345570.0          | 61.3             | 12                | 1                          | 1272.0     | -          | -          |
| 552241.0          | 67.8             | 12                | 2                          | 1125.0     | 1547.0     | -          |
| 757324.0          | 86.4             | 12                | 3                          | 1856.0     | 1762.0     | 1477.0     |
| 112385.0          | 51.2             | 12                | 1                          | 1589.0     | -          | -          |
| 319095.0          | 81.9             | 12                | 2                          | 1701.0     | 1996.0     | -          |
| 526453.0          | 68.4             | 12                | 2                          | 1228.0     | 1868.0     | -          |
| 734583.0          | 61.0             | 12                | 1                          | 1936.0     | -          | -          |
| 86723.0           | 80.5             | 12                | 2                          | 1015.0     | 1580.0     | -          |
| 293420.0          | 84.0             | 12                | 3                          | 1073.0     | 1583.0     | 1561.0     |
| 499795.0          | 96.8             | 12                | 3                          | 2000.0     | 1806.0     | 1241.0     |



**Type 5 Radar Waveform\_28**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 618524.0          | 85.5             | 16                | 3                          | 1456.0     | 1163.0     | 1343.0     |
| 53626.0           | 62.4             | 16                | 1                          | 1134.0     | -          | -          |
| 234630.0          | 72.1             | 16                | 2                          | 1689.0     | 1420.0     | -          |
| 415685.0          | 82.4             | 16                | 2                          | 1492.0     | 1777.0     | -          |
| 597865.0          | 63.7             | 16                | 1                          | 1925.0     | -          | -          |
| 31221.0           | 50.0             | 16                | 1                          | 1938.0     | -          | -          |
| 212639.0          | 50.3             | 16                | 1                          | 1976.0     | -          | -          |
| 394114.0          | 53.5             | 16                | 1                          | 1869.0     | -          | -          |
| 574222.0          | 93.2             | 16                | 3                          | 1033.0     | 1453.0     | 1122.0     |
| 8856.0            | 82.1             | 16                | 2                          | 1499.0     | 1874.0     | -          |
| 189766.0          | 93.3             | 16                | 3                          | 1056.0     | 1348.0     | 1640.0     |
| 372039.0          | 54.9             | 16                | 1                          | 1316.0     | -          | -          |
| 553537.0          | 57.4             | 16                | 1                          | 1426.0     | -          | -          |
| 731163.0          | 98.9             | 16                | 3                          | 1849.0     | 1833.0     | 1743.0     |
| 168000.0          | 56.7             | 16                | 1                          | 1733.0     | -          | -          |
| 348347.0          | 85.3             | 16                | 3                          | 1253.0     | 1585.0     | 1317.0     |

**Type 5 Radar Waveform\_29**

| Burst Offset (us) | Pulse Width (us) | Chirp Width (MHz) | Number of Pulses per Burst | PRI-1 (us) | PRI-2 (us) | PRI-3 (us) |
|-------------------|------------------|-------------------|----------------------------|------------|------------|------------|
| 706962.0          | 86.0             | 10                | 3                          | 1075.0     | 1565.0     | 1051.0     |
| 948456.0          | 85.7             | 10                | 3                          | 1098.0     | 1209.0     | 1534.0     |
| 194052.0          | 67.5             | 10                | 2                          | 1548.0     | 1496.0     | -          |
| 436711.0          | 63.3             | 10                | 1                          | 1064.0     | -          | -          |
| 677499.0          | 69.6             | 10                | 2                          | 1656.0     | 1593.0     | -          |
| 919557.0          | 75.5             | 10                | 2                          | 1392.0     | 1516.0     | -          |
| 164548.0          | 52.6             | 10                | 1                          | 1345.0     | -          | -          |
| 405770.0          | 80.7             | 10                | 2                          | 1970.0     | 1790.0     | -          |
| 648550.0          | 62.6             | 10                | 1                          | 1974.0     | -          | -          |
| 890149.0          | 70.1             | 10                | 2                          | 1011.0     | 1471.0     | -          |
| 134401.0          | 94.1             | 10                | 3                          | 1259.0     | 1162.0     | 1249.0     |
| 376710.0          | 61.3             | 10                | 1                          | 1900.0     | -          | -          |



Radar Type 6 - Radar Statistical Performance

| Trail #                  | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection | Trail # | Test Freq.<br>(MHz) | 1=Detection<br>0=No Detection |
|--------------------------|---------------------|-------------------------------|---------|---------------------|-------------------------------|
| 0                        | 5250.0              | 1                             | 15      | 5290.3              | 1                             |
| 1                        | 5252.7              | 1                             | 16      | 5293.0              | 1                             |
| 2                        | 5255.4              | 1                             | 17      | 5295.7              | 1                             |
| 3                        | 5258.1              | 1                             | 18      | 5298.4              | 1                             |
| 4                        | 5260.8              | 1                             | 19      | 5301.1              | 1                             |
| 5                        | 5263.5              | 1                             | 20      | 5303.8              | 1                             |
| 6                        | 5266.1              | 1                             | 21      | 5306.5              | 1                             |
| 7                        | 5268.8              | 1                             | 22      | 5309.2              | 1                             |
| 8                        | 5271.5              | 1                             | 23      | 5311.9              | 1                             |
| 9                        | 5274.2              | 1                             | 24      | 5314.6              | 0                             |
| 10                       | 5276.9              | 1                             | 25      | 5317.2              | 1                             |
| 11                       | 5279.6              | 1                             | 26      | 5319.9              | 1                             |
| 12                       | 5282.3              | 1                             | 27      | 5322.6              | 1                             |
| 13                       | 5285.0              | 1                             | 28      | 5325.3              | 1                             |
| 14                       | 5287.7              | 1                             | 29      | 5328.0              | 1                             |
| Detection Percentage (%) |                     |                               |         |                     | 96.6%                         |

| Type 6 Radar Waveform_0 |      |      |      |      |      |
|-------------------------|------|------|------|------|------|
| Frequency List (MHz)    | 0    | 1    | 2    | 3    | 4    |
| 0                       | 5380 | 5513 | 5294 | 5433 | 5406 |
| 5                       | 5578 | 5706 | 5359 | 5555 | 5343 |
| 10                      | 5664 | 5590 | 5570 | 5593 | 5437 |
| 15                      | 5668 | 5420 | 5252 | 5493 | 5316 |
| 20                      | 5373 | 5535 | 5310 | 5289 | 5504 |
| 25                      | 5546 | 5552 | 5492 | 5606 | 5405 |
| 30                      | 5486 | 5347 | 5720 | 5607 | 5434 |
| 35                      | 5288 | 5609 | 5690 | 5465 | 5323 |
| 40                      | 5693 | 5608 | 5560 | 5527 | 5505 |
| 45                      | 5715 | 5268 | 5409 | 5525 | 5563 |
| 50                      | 5285 | 5571 | 5354 | 5703 | 5331 |
| 55                      | 5491 | 5627 | 5379 | 5501 | 5689 |
| 60                      | 5296 | 5251 | 5679 | 5567 | 5692 |
| 65                      | 5496 | 5455 | 5517 | 5537 | 5652 |
| 70                      | 5475 | 5584 | 5724 | 5556 | 5631 |
| 75                      | 5333 | 5428 | 5451 | 5598 | 5536 |
| 80                      | 5503 | 5553 | 5304 | 5410 | 5644 |
| 85                      | 5637 | 5269 | 5704 | 5685 | 5635 |
| 90                      | 5277 | 5260 | 5369 | 5358 | 5498 |
| 95                      | 5719 | 5674 | 5301 | 5581 | 5254 |



**Type 6 Radar Waveform\_1**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5635 | 5277 | 5705 | 5594 | 5626 |
| 5                    | 5620 | 5253 | 5434 | 5718 | 5613 |
| 10                   | 5274 | 5453 | 5631 | 5290 | 5614 |
| 15                   | 5525 | 5320 | 5523 | 5297 | 5685 |
| 20                   | 5702 | 5442 | 5573 | 5399 | 5262 |
| 25                   | 5295 | 5398 | 5280 | 5596 | 5640 |
| 30                   | 5447 | 5375 | 5304 | 5460 | 5284 |
| 35                   | 5254 | 5330 | 5700 | 5583 | 5618 |
| 40                   | 5334 | 5343 | 5301 | 5546 | 5325 |
| 45                   | 5524 | 5695 | 5351 | 5467 | 5481 |
| 50                   | 5353 | 5636 | 5272 | 5485 | 5443 |
| 55                   | 5526 | 5653 | 5679 | 5581 | 5569 |
| 60                   | 5698 | 5660 | 5328 | 5416 | 5721 |
| 65                   | 5496 | 5518 | 5707 | 5445 | 5345 |
| 70                   | 5287 | 5404 | 5706 | 5488 | 5324 |
| 75                   | 5560 | 5683 | 5654 | 5379 | 5409 |
| 80                   | 5441 | 5561 | 5566 | 5550 | 5499 |
| 85                   | 5368 | 5252 | 5396 | 5361 | 5505 |
| 90                   | 5477 | 5426 | 5641 | 5689 | 5466 |
| 95                   | 5369 | 5386 | 5413 | 5482 | 5299 |

**Type 6 Radar Waveform\_2**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5415 | 5516 | 5641 | 5280 | 5468 |
| 5                    | 5284 | 5653 | 5509 | 5406 | 5345 |
| 10                   | 5680 | 5717 | 5672 | 5485 | 5635 |
| 15                   | 5613 | 5447 | 5626 | 5342 | 5499 |
| 20                   | 5710 | 5608 | 5514 | 5391 | 5658 |
| 25                   | 5347 | 5483 | 5700 | 5674 | 5586 |
| 30                   | 5264 | 5261 | 5578 | 5533 | 5452 |
| 35                   | 5469 | 5316 | 5379 | 5393 | 5723 |
| 40                   | 5279 | 5384 | 5484 | 5565 | 5521 |
| 45                   | 5266 | 5675 | 5434 | 5525 | 5534 |
| 50                   | 5715 | 5512 | 5351 | 5536 | 5532 |
| 55                   | 5252 | 5597 | 5295 | 5535 | 5662 |
| 60                   | 5517 | 5457 | 5581 | 5666 | 5328 |
| 65                   | 5344 | 5299 | 5433 | 5394 | 5381 |
| 70                   | 5497 | 5296 | 5501 | 5303 | 5474 |
| 75                   | 5648 | 5439 | 5642 | 5397 | 5522 |
| 80                   | 5390 | 5693 | 5574 | 5389 | 5251 |
| 85                   | 5547 | 5694 | 5271 | 5569 | 5456 |
| 90                   | 5470 | 5652 | 5628 | 5721 | 5540 |
| 95                   | 5269 | 5500 | 5563 | 5580 | 5405 |

**Type 6 Radar Waveform\_3**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5573 | 5280 | 5577 | 5441 | 5688 |
| 5                    | 5326 | 5675 | 5584 | 5569 | 5649 |
| 10                   | 5514 | 5506 | 5713 | 5680 | 5656 |
| 15                   | 5604 | 5574 | 5632 | 5387 | 5691 |
| 20                   | 5718 | 5677 | 5455 | 5480 | 5683 |
| 25                   | 5546 | 5674 | 5589 | 5426 | 5708 |
| 30                   | 5628 | 5250 | 5693 | 5318 | 5685 |
| 35                   | 5272 | 5608 | 5407 | 5650 | 5637 |
| 40                   | 5593 | 5564 | 5422 | 5330 | 5518 |
| 45                   | 5670 | 5655 | 5517 | 5486 | 5587 |
| 50                   | 5505 | 5291 | 5527 | 5550 | 5444 |
| 55                   | 5483 | 5489 | 5377 | 5336 | 5586 |
| 60                   | 5271 | 5611 | 5635 | 5267 | 5720 |
| 65                   | 5256 | 5343 | 5417 | 5329 | 5566 |
| 70                   | 5304 | 5375 | 5460 | 5380 | 5497 |
| 75                   | 5415 | 5601 | 5366 | 5419 | 5665 |
| 80                   | 5371 | 5373 | 5684 | 5416 | 5456 |
| 85                   | 5314 | 5447 | 5414 | 5508 | 5648 |
| 90                   | 5338 | 5703 | 5401 | 5705 | 5275 |
| 95                   | 5660 | 5490 | 5523 | 5547 | 5570 |



**Type 6 Radar Waveform\_4**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5353 | 5519 | 5513 | 5602 | 5530 |
| 5                    | 5368 | 5600 | 5659 | 5635 | 5381 |
| 10                   | 5445 | 5295 | 5376 | 5400 | 5677 |
| 15                   | 5692 | 5604 | 5260 | 5335 | 5408 |
| 20                   | 5629 | 5493 | 5472 | 5656 | 5337 |
| 25                   | 5623 | 5317 | 5267 | 5670 | 5614 |
| 30                   | 5650 | 5533 | 5459 | 5567 | 5272 |
| 35                   | 5595 | 5446 | 5699 | 5648 | 5432 |
| 40                   | 5647 | 5360 | 5473 | 5515 | 5599 |
| 45                   | 5544 | 5640 | 5642 | 5703 | 5638 |
| 50                   | 5332 | 5373 | 5388 | 5671 | 5443 |
| 55                   | 5630 | 5476 | 5715 | 5436 | 5556 |
| 60                   | 5467 | 5568 | 5666 | 5457 | 5292 |
| 65                   | 5356 | 5539 | 5361 | 5582 | 5383 |
| 70                   | 5346 | 5391 | 5560 | 5713 | 5711 |
| 75                   | 5449 | 5625 | 5697 | 5672 | 5620 |
| 80                   | 5377 | 5444 | 5609 | 5649 | 5350 |
| 85                   | 5479 | 5268 | 5303 | 5657 | 5264 |
| 90                   | 5395 | 5281 | 5694 | 5393 | 5502 |
| 95                   | 5534 | 5578 | 5531 | 5468 | 5441 |

**Type 6 Radar Waveform\_5**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5608 | 5283 | 5449 | 5666 | 5275 |
| 5                    | 5410 | 5622 | 5259 | 5323 | 5588 |
| 10                   | 5376 | 5656 | 5417 | 5498 | 5698 |
| 15                   | 5305 | 5256 | 5363 | 5380 | 5600 |
| 20                   | 5637 | 5437 | 5434 | 5561 | 5629 |
| 25                   | 5700 | 5475 | 5520 | 5634 | 5301 |
| 30                   | 5334 | 5503 | 5607 | 5273 | 5611 |
| 35                   | 5290 | 5314 | 5686 | 5339 | 5474 |
| 40                   | 5562 | 5271 | 5255 | 5298 | 5713 |
| 45                   | 5609 | 5431 | 5615 | 5683 | 5602 |
| 50                   | 5693 | 5657 | 5518 | 5404 | 5689 |
| 55                   | 5421 | 5671 | 5710 | 5384 | 5397 |
| 60                   | 5282 | 5352 | 5350 | 5369 | 5601 |
| 65                   | 5598 | 5396 | 5491 | 5709 | 5280 |
| 70                   | 5716 | 5392 | 5371 | 5253 | 5385 |
| 75                   | 5616 | 5529 | 5483 | 5573 | 5367 |
| 80                   | 5519 | 5682 | 5379 | 5430 | 5402 |
| 85                   | 5332 | 5453 | 5309 | 5440 | 5441 |
| 90                   | 5426 | 5552 | 5667 | 5442 | 5460 |
| 95                   | 5646 | 5708 | 5422 | 5462 | 5463 |

**Type 6 Radar Waveform\_6**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5388 | 5522 | 5482 | 5352 | 5495 |
| 5                    | 5549 | 5547 | 5334 | 5486 | 5417 |
| 10                   | 5685 | 5445 | 5458 | 5693 | 5719 |
| 15                   | 5393 | 5383 | 5466 | 5425 | 5317 |
| 20                   | 5645 | 5603 | 5375 | 5553 | 5602 |
| 25                   | 5491 | 5327 | 5723 | 5263 | 5335 |
| 30                   | 5376 | 5489 | 5564 | 5391 | 5385 |
| 35                   | 5585 | 5453 | 5302 | 5610 | 5627 |
| 40                   | 5476 | 5338 | 5711 | 5478 | 5606 |
| 45                   | 5360 | 5498 | 5291 | 5563 | 5271 |
| 50                   | 5447 | 5394 | 5580 | 5265 | 5510 |
| 55                   | 5397 | 5654 | 5572 | 5351 | 5472 |
| 60                   | 5646 | 5321 | 5543 | 5703 | 5655 |
| 65                   | 5481 | 5665 | 5428 | 5581 | 5523 |
| 70                   | 5566 | 5310 | 5515 | 5422 | 5343 |
| 75                   | 5554 | 5682 | 5411 | 5442 | 5709 |
| 80                   | 5473 | 5600 | 5438 | 5621 | 5552 |
| 85                   | 5502 | 5652 | 5611 | 5662 | 5670 |
| 90                   | 5660 | 5628 | 5293 | 5632 | 5720 |
| 95                   | 5688 | 5596 | 5264 | 5342 | 5258 |



**Type 6 Radar Waveform\_7**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5643 | 5286 | 5418 | 5513 | 5337 |
| 5                    | 5591 | 5569 | 5409 | 5649 | 5624 |
| 10                   | 5616 | 5709 | 5499 | 5413 | 5265 |
| 15                   | 5384 | 5510 | 5373 | 5509 | 5556 |
| 20                   | 5672 | 5642 | 5575 | 5379 | 5276 |
| 25                   | 5451 | 5367 | 5369 | 5378 | 5521 |
| 30                   | 5606 | 5537 | 5308 | 5592 | 5393 |
| 35                   | 5406 | 5305 | 5390 | 5518 | 5552 |
| 40                   | 5718 | 5603 | 5667 | 5478 | 5374 |
| 45                   | 5621 | 5702 | 5334 | 5648 | 5281 |
| 50                   | 5316 | 5696 | 5695 | 5501 | 5285 |
| 55                   | 5662 | 5465 | 5292 | 5530 | 5456 |
| 60                   | 5488 | 5535 | 5618 | 5601 | 5682 |
| 65                   | 5614 | 5415 | 5382 | 5586 | 5271 |
| 70                   | 5319 | 5437 | 5523 | 5327 | 5568 |
| 75                   | 5392 | 5431 | 5455 | 5490 | 5540 |
| 80                   | 5663 | 5435 | 5341 | 5448 | 5272 |
| 85                   | 5479 | 5713 | 5443 | 5480 | 5318 |
| 90                   | 5396 | 5602 | 5417 | 5257 | 5268 |
| 95                   | 5580 | 5259 | 5659 | 5445 | 5577 |

**Type 6 Radar Waveform\_8**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5326 | 5525 | 5354 | 5674 | 5557 |
| 5                    | 5633 | 5494 | 5484 | 5715 | 5356 |
| 10                   | 5547 | 5498 | 5540 | 5608 | 5286 |
| 15                   | 5472 | 5637 | 5575 | 5418 | 5701 |
| 20                   | 5564 | 5363 | 5634 | 5548 | 5645 |
| 25                   | 5603 | 5568 | 5403 | 5364 | 5478 |
| 30                   | 5346 | 5311 | 5299 | 5555 | 5401 |
| 35                   | 5360 | 5601 | 5490 | 5386 | 5600 |
| 40                   | 5596 | 5458 | 5457 | 5679 | 5280 |
| 45                   | 5599 | 5524 | 5367 | 5310 | 5518 |
| 50                   | 5445 | 5473 | 5259 | 5377 | 5662 |
| 55                   | 5263 | 5659 | 5621 | 5433 | 5541 |
| 60                   | 5644 | 5505 | 5563 | 5623 | 5685 |
| 65                   | 5647 | 5551 | 5584 | 5589 | 5595 |
| 70                   | 5673 | 5396 | 5492 | 5447 | 5614 |
| 75                   | 5373 | 5683 | 5565 | 5271 | 5704 |
| 80                   | 5251 | 5432 | 5536 | 5358 | 5290 |
| 85                   | 5464 | 5444 | 5667 | 5691 | 5678 |
| 90                   | 5483 | 5402 | 5636 | 5366 | 5699 |
| 95                   | 5323 | 5661 | 5632 | 5638 | 5654 |

**Type 6 Radar Waveform\_9**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5581 | 5289 | 5290 | 5360 | 5399 |
| 5                    | 5297 | 5516 | 5559 | 5403 | 5660 |
| 10                   | 5381 | 5287 | 5328 | 5307 | 5560 |
| 15                   | 5667 | 5678 | 5463 | 5515 | 5572 |
| 20                   | 5529 | 5295 | 5723 | 5521 | 5533 |
| 25                   | 5552 | 5285 | 5672 | 5437 | 5599 |
| 30                   | 5253 | 5435 | 5561 | 5326 | 5298 |
| 35                   | 5575 | 5570 | 5708 | 5315 | 5674 |
| 40                   | 5684 | 5428 | 5626 | 5597 | 5525 |
| 45                   | 5438 | 5540 | 5640 | 5333 | 5486 |
| 50                   | 5400 | 5633 | 5418 | 5341 | 5292 |
| 55                   | 5564 | 5591 | 5470 | 5481 | 5612 |
| 60                   | 5313 | 5311 | 5475 | 5367 | 5590 |
| 65                   | 5706 | 5512 | 5342 | 5455 | 5480 |
| 70                   | 5450 | 5623 | 5592 | 5347 | 5649 |
| 75                   | 5355 | 5364 | 5567 | 5282 | 5354 |
| 80                   | 5363 | 5675 | 5527 | 5393 | 5411 |
| 85                   | 5332 | 5353 | 5358 | 5704 | 5488 |
| 90                   | 5656 | 5312 | 5718 | 5464 | 5498 |
| 95                   | 5648 | 5408 | 5670 | 5716 | 5378 |



| Type 6 Radar Waveform_10 |      |      |      |      |      |
|--------------------------|------|------|------|------|------|
| Frequency List (MHz)     | 0    | 1    | 2    | 3    | 4    |
| 0                        | 5361 | 5528 | 5701 | 5521 | 5619 |
| 5                        | 5339 | 5441 | 5634 | 5566 | 5392 |
| 10                       | 5312 | 5648 | 5622 | 5426 | 5328 |
| 15                       | 5319 | 5306 | 5508 | 5707 | 5483 |
| 20                       | 5598 | 5711 | 5715 | 5494 | 5421 |
| 25                       | 5404 | 5488 | 5301 | 5471 | 5641 |
| 30                       | 5617 | 5679 | 5712 | 5621 | 5437 |
| 35                       | 5288 | 5366 | 5386 | 5704 | 5513 |
| 40                       | 5389 | 5391 | 5691 | 5357 | 5418 |
| 45                       | 5623 | 5698 | 5276 | 5334 | 5469 |
| 50                       | 5542 | 5277 | 5545 | 5660 | 5300 |
| 55                       | 5583 | 5442 | 5476 | 5420 | 5603 |
| 60                       | 5668 | 5536 | 5529 | 5461 | 5378 |
| 65                       | 5665 | 5372 | 5253 | 5317 | 5556 |
| 70                       | 5692 | 5671 | 5625 | 5314 | 5333 |
| 75                       | 5590 | 5425 | 5335 | 5615 | 5688 |
| 80                       | 5308 | 5557 | 5474 | 5329 | 5548 |
| 85                       | 5261 | 5546 | 5451 | 5672 | 5696 |
| 90                       | 5338 | 5414 | 5607 | 5487 | 5258 |
| 95                       | 5336 | 5629 | 5428 | 5499 | 5279 |

| Type 6 Radar Waveform_11 |      |      |      |      |      |
|--------------------------|------|------|------|------|------|
| Frequency List (MHz)     | 0    | 1    | 2    | 3    | 4    |
| 0                        | 5616 | 5292 | 5637 | 5682 | 5461 |
| 5                        | 5381 | 5463 | 5709 | 5254 | 5599 |
| 10                       | 5621 | 5437 | 5663 | 5349 | 5639 |
| 15                       | 5446 | 5409 | 5456 | 5424 | 5491 |
| 20                       | 5289 | 5274 | 5329 | 5467 | 5687 |
| 25                       | 5256 | 5691 | 5405 | 5505 | 5683 |
| 30                       | 5603 | 5252 | 5419 | 5389 | 5441 |
| 35                       | 5576 | 5379 | 5636 | 5715 | 5449 |
| 40                       | 5472 | 5304 | 5534 | 5688 | 5286 |
| 45                       | 5398 | 5706 | 5281 | 5439 | 5638 |
| 50                       | 5530 | 5510 | 5520 | 5674 | 5365 |
| 55                       | 5558 | 5465 | 5499 | 5375 | 5594 |
| 60                       | 5554 | 5571 | 5641 | 5435 | 5591 |
| 65                       | 5482 | 5255 | 5410 | 5414 | 5497 |
| 70                       | 5642 | 5531 | 5542 | 5695 | 5601 |
| 75                       | 5273 | 5680 | 5710 | 5471 | 5316 |
| 80                       | 5392 | 5323 | 5564 | 5624 | 5537 |
| 85                       | 5326 | 5268 | 5485 | 5511 | 5468 |
| 90                       | 5620 | 5723 | 5388 | 5516 | 5503 |
| 95                       | 5517 | 5596 | 5372 | 5391 | 5478 |

| Type 6 Radar Waveform_12 |      |      |      |      |      |
|--------------------------|------|------|------|------|------|
| Frequency List (MHz)     | 0    | 1    | 2    | 3    | 4    |
| 0                        | 5299 | 5531 | 5573 | 5271 | 5681 |
| 5                        | 5423 | 5388 | 5309 | 5320 | 5331 |
| 10                       | 5552 | 5701 | 5326 | 5341 | 5370 |
| 15                       | 5252 | 5512 | 5501 | 5616 | 5499 |
| 20                       | 5358 | 5690 | 5418 | 5440 | 5575 |
| 25                       | 5680 | 5419 | 5606 | 5442 | 5347 |
| 30                       | 5492 | 5684 | 5634 | 5638 | 5639 |
| 35                       | 5618 | 5470 | 5530 | 5314 | 5629 |
| 40                       | 5288 | 5555 | 5717 | 5685 | 5593 |
| 45                       | 5281 | 5339 | 5428 | 5406 | 5686 |
| 50                       | 5571 | 5663 | 5502 | 5653 | 5453 |
| 55                       | 5565 | 5316 | 5525 | 5603 | 5310 |
| 60                       | 5267 | 5417 | 5553 | 5359 | 5353 |
| 65                       | 5707 | 5534 | 5712 | 5461 | 5625 |
| 70                       | 5369 | 5577 | 5649 | 5355 | 5614 |
| 75                       | 5297 | 5644 | 5336 | 5345 | 5313 |
| 80                       | 5600 | 5323 | 5463 | 5327 | 5474 |
| 85                       | 5563 | 5585 | 5677 | 5636 | 5714 |
| 90                       | 5668 | 5523 | 5578 | 5583 | 5705 |
| 95                       | 5389 | 5446 | 5694 | 5699 | 5360 |



**Type 6 Radar Waveform\_13**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5554 | 5295 | 5509 | 5432 | 5523 |
| 5                    | 5562 | 5410 | 5384 | 5483 | 5635 |
| 10                   | 5490 | 5367 | 5536 | 5391 | 5340 |
| 15                   | 5700 | 5518 | 5546 | 5333 | 5524 |
| 20                   | 5631 | 5413 | 5366 | 5532 | 5525 |
| 25                   | 5710 | 5476 | 5389 | 5381 | 5641 |
| 30                   | 5374 | 5315 | 5459 | 5282 | 5561 |
| 35                   | 5326 | 5467 | 5543 | 5602 | 5638 |
| 40                   | 5655 | 5539 | 5682 | 5522 | 5261 |
| 45                   | 5397 | 5300 | 5448 | 5387 | 5622 |
| 50                   | 5377 | 5486 | 5349 | 5407 | 5280 |
| 55                   | 5610 | 5399 | 5257 | 5496 | 5352 |
| 60                   | 5574 | 5471 | 5279 | 5308 | 5329 |
| 65                   | 5515 | 5630 | 5611 | 5323 | 5693 |
| 70                   | 5456 | 5666 | 5521 | 5475 | 5660 |
| 75                   | 5278 | 5421 | 5446 | 5601 | 5477 |
| 80                   | 5285 | 5320 | 5658 | 5542 | 5644 |
| 85                   | 5534 | 5453 | 5253 | 5409 | 5358 |
| 90                   | 5529 | 5612 | 5465 | 5717 | 5406 |
| 95                   | 5501 | 5678 | 5597 | 5339 | 5588 |

**Type 6 Radar Waveform\_14**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5334 | 5631 | 5445 | 5593 | 5268 |
| 5                    | 5604 | 5335 | 5459 | 5646 | 5367 |
| 10                   | 5317 | 5279 | 5408 | 5256 | 5412 |
| 15                   | 5428 | 5255 | 5621 | 5591 | 5525 |
| 20                   | 5418 | 5669 | 5499 | 5386 | 5254 |
| 25                   | 5481 | 5253 | 5339 | 5510 | 5431 |
| 30                   | 5598 | 5492 | 5564 | 5657 | 5421 |
| 35                   | 5652 | 5597 | 5717 | 5554 | 5441 |
| 40                   | 5343 | 5304 | 5679 | 5451 | 5716 |
| 45                   | 5480 | 5358 | 5501 | 5580 | 5633 |
| 50                   | 5563 | 5673 | 5466 | 5687 | 5293 |
| 55                   | 5361 | 5470 | 5429 | 5370 | 5661 |
| 60                   | 5297 | 5406 | 5641 | 5417 | 5257 |
| 65                   | 5328 | 5371 | 5599 | 5318 | 5702 |
| 70                   | 5423 | 5432 | 5625 | 5490 | 5498 |
| 75                   | 5356 | 5576 | 5556 | 5382 | 5348 |
| 80                   | 5695 | 5475 | 5583 | 5497 | 5472 |
| 85                   | 5682 | 5523 | 5535 | 5549 | 5250 |
| 90                   | 5351 | 5284 | 5592 | 5696 | 5691 |
| 95                   | 5611 | 5573 | 5372 | 5558 | 5705 |

**Type 6 Radar Waveform\_15**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5589 | 5395 | 5381 | 5279 | 5585 |
| 5                    | 5646 | 5357 | 5534 | 5334 | 5574 |
| 10                   | 5723 | 5640 | 5449 | 5354 | 5433 |
| 15                   | 5419 | 5382 | 5724 | 5539 | 5717 |
| 20                   | 5426 | 5284 | 5610 | 5491 | 5359 |
| 25                   | 5520 | 5333 | 5456 | 5443 | 5544 |
| 30                   | 5570 | 5256 | 5555 | 5707 | 5716 |
| 35                   | 5477 | 5463 | 5365 | 5490 | 5468 |
| 40                   | 5280 | 5434 | 5447 | 5676 | 5283 |
| 45                   | 5696 | 5563 | 5416 | 5554 | 5467 |
| 50                   | 5412 | 5264 | 5510 | 5615 | 5645 |
| 55                   | 5315 | 5660 | 5626 | 5341 | 5515 |
| 60                   | 5351 | 5335 | 5460 | 5303 | 5364 |
| 65                   | 5581 | 5596 | 5396 | 5583 | 5294 |
| 70                   | 5408 | 5584 | 5362 | 5618 | 5374 |
| 75                   | 5337 | 5353 | 5569 | 5638 | 5708 |
| 80                   | 5411 | 5692 | 5670 | 5445 | 5425 |
| 85                   | 5557 | 5567 | 5286 | 5258 | 5430 |
| 90                   | 5552 | 5688 | 5541 | 5607 | 5537 |
| 95                   | 5611 | 5268 | 5675 | 5319 | 5431 |





**Type 6 Radar Waveform\_16**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5369 | 5634 | 5317 | 5440 | 5330 |
| 5                    | 5688 | 5282 | 5609 | 5400 | 5403 |
| 10                   | 5654 | 5429 | 5490 | 5549 | 5454 |
| 15                   | 5507 | 5509 | 5352 | 5584 | 5434 |
| 20                   | 5337 | 5353 | 5551 | 5580 | 5332 |
| 25                   | 5408 | 5660 | 5659 | 5644 | 5578 |
| 30                   | 5612 | 5717 | 5512 | 5447 | 5675 |
| 35                   | 5602 | 5456 | 5286 | 5548 | 5382 |
| 40                   | 5691 | 5372 | 5687 | 5295 | 5676 |
| 45                   | 5646 | 5377 | 5607 | 5257 | 5288 |
| 50                   | 5300 | 5266 | 5333 | 5559 | 5358 |
| 55                   | 5269 | 5375 | 5445 | 5312 | 5516 |
| 60                   | 5284 | 5642 | 5390 | 5406 | 5504 |
| 65                   | 5252 | 5413 | 5399 | 5468 | 5666 |
| 70                   | 5618 | 5384 | 5543 | 5331 | 5263 |
| 75                   | 5517 | 5318 | 5605 | 5679 | 5419 |
| 80                   | 5397 | 5571 | 5689 | 5348 | 5267 |
| 85                   | 5520 | 5251 | 5678 | 5275 | 5378 |
| 90                   | 5392 | 5472 | 5554 | 5388 | 5557 |
| 95                   | 5325 | 5629 | 5321 | 5294 | 5529 |

**Type 6 Radar Waveform\_17**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5527 | 5398 | 5253 | 5601 | 5647 |
| 5                    | 5352 | 5304 | 5684 | 5563 | 5610 |
| 10                   | 5488 | 5693 | 5531 | 5269 | 5475 |
| 15                   | 5595 | 5636 | 5455 | 5629 | 5723 |
| 20                   | 5345 | 5519 | 5589 | 5572 | 5305 |
| 25                   | 5296 | 5609 | 5387 | 5273 | 5612 |
| 30                   | 5654 | 5606 | 5469 | 5662 | 5642 |
| 35                   | 5495 | 5266 | 5547 | 5557 | 5323 |
| 40                   | 5393 | 5530 | 5592 | 5310 | 5452 |
| 45                   | 5292 | 5656 | 5254 | 5435 | 5660 |
| 50                   | 5619 | 5639 | 5616 | 5351 | 5355 |
| 55                   | 5631 | 5406 | 5546 | 5698 | 5468 |
| 60                   | 5264 | 5661 | 5298 | 5681 | 5704 |
| 65                   | 5474 | 5691 | 5327 | 5676 | 5339 |
| 70                   | 5623 | 5653 | 5580 | 5637 | 5652 |
| 75                   | 5529 | 5467 | 5360 | 5502 | 5300 |
| 80                   | 5383 | 5299 | 5382 | 5314 | 5675 |
| 85                   | 5561 | 5634 | 5686 | 5585 | 5251 |
| 90                   | 5379 | 5594 | 5641 | 5354 | 5570 |
| 95                   | 5543 | 5650 | 5554 | 5274 | 5581 |

**Type 6 Radar Waveform\_18**

| Frequency List (MHz) | 0    | 1    | 2    | 3    | 4    |
|----------------------|------|------|------|------|------|
| 0                    | 5307 | 5637 | 5664 | 5287 | 5392 |
| 5                    | 5394 | 5326 | 5284 | 5251 | 5342 |
| 10                   | 5419 | 5482 | 5572 | 5464 | 5496 |
| 15                   | 5683 | 5288 | 5461 | 5577 | 5440 |
| 20                   | 5353 | 5588 | 5530 | 5661 | 5278 |
| 25                   | 5562 | 5493 | 5377 | 5646 | 5318 |
| 30                   | 5495 | 5426 | 5305 | 5416 | 5315 |
| 35                   | 5405 | 5638 | 5476 | 5369 | 5297 |
| 40                   | 5723 | 5692 | 5289 | 5448 | 5636 |
| 45                   | 5337 | 5713 | 5409 | 5418 | 5317 |
| 50                   | 5402 | 5444 | 5357 | 5350 | 5259 |
| 55                   | 5652 | 5658 | 5558 | 5632 | 5330 |
| 60                   | 5371 | 5649 | 5306 | 5517 | 5298 |
| 65                   | 5528 | 5625 | 5375 | 5455 | 5383 |
| 70                   | 5709 | 5532 | 5694 | 5336 | 5647 |
| 75                   | 5503 | 5706 | 5280 | 5634 | 5327 |
| 80                   | 5456 | 5250 | 5697 | 5523 | 5543 |
| 85                   | 5571 | 5462 | 5602 | 5293 | 5708 |
| 90                   | 5656 | 5631 | 5593 | 5301 | 5659 |
| 95                   | 5531 | 5381 | 5270 | 5538 | 5358 |