


Package Contents:


PL270 Pool Light	-----	x 1
Wireless Charger (the Charging Transmitter)	-----	x 1
with Extended Arm& 17 ft. Wire Lead.		
Power Adapter (Wire Length 5ft)	-----	x 1
Gateway with USB Adapter (Wire Length 4ft.)	-----	x 1
Magnet Stick	-----	x 1
3/16" Flathead Screw	-----	x 1

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

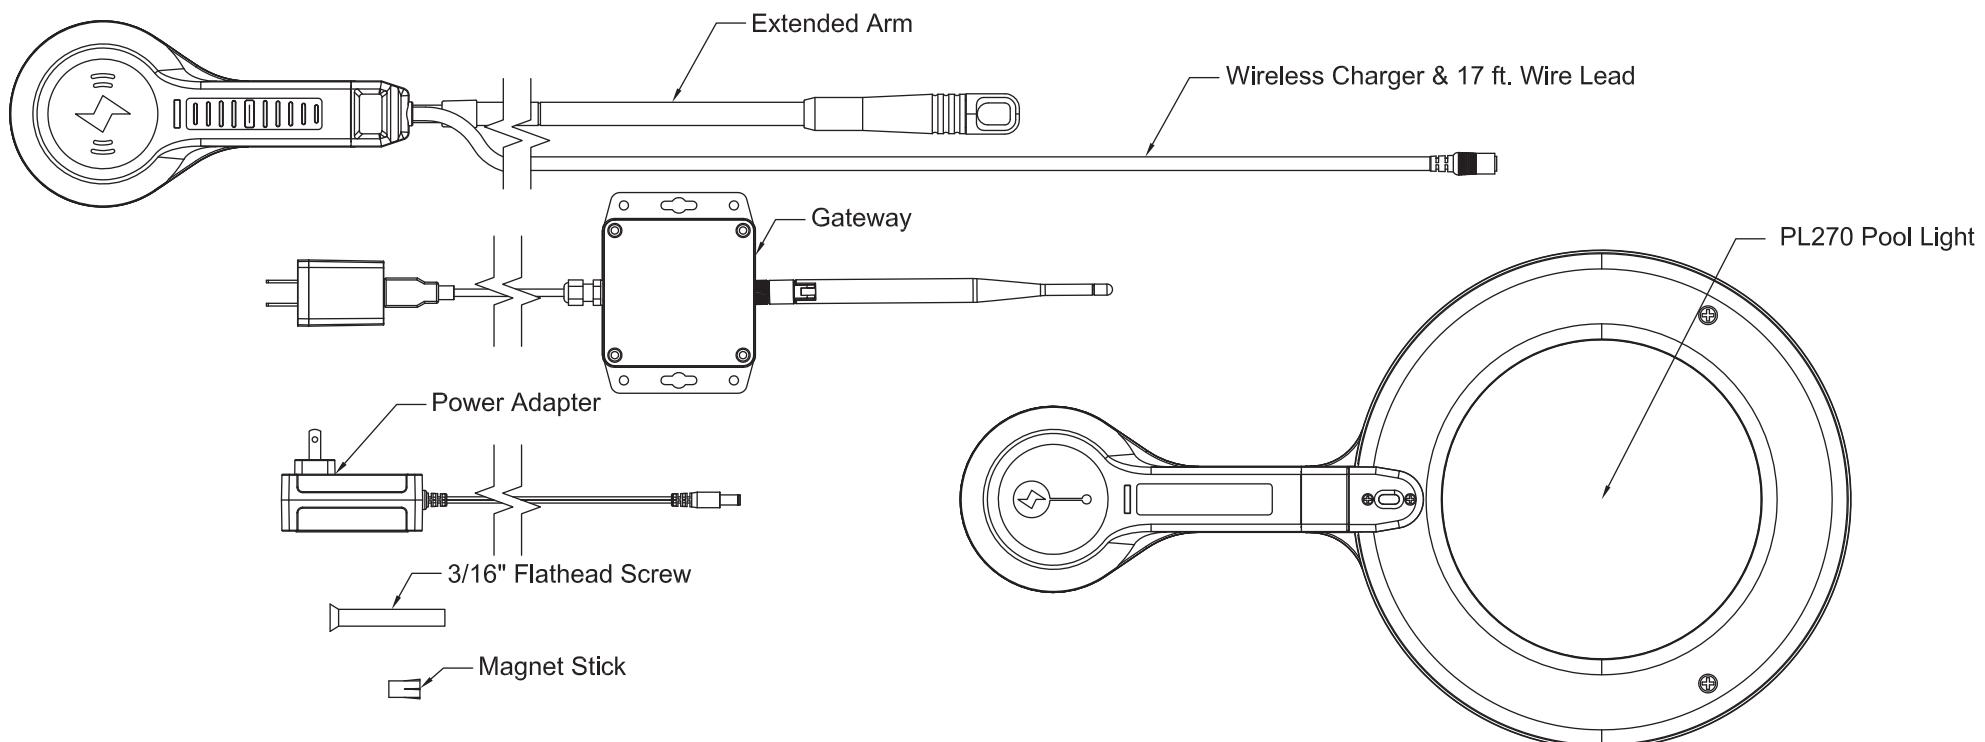


Package Contents

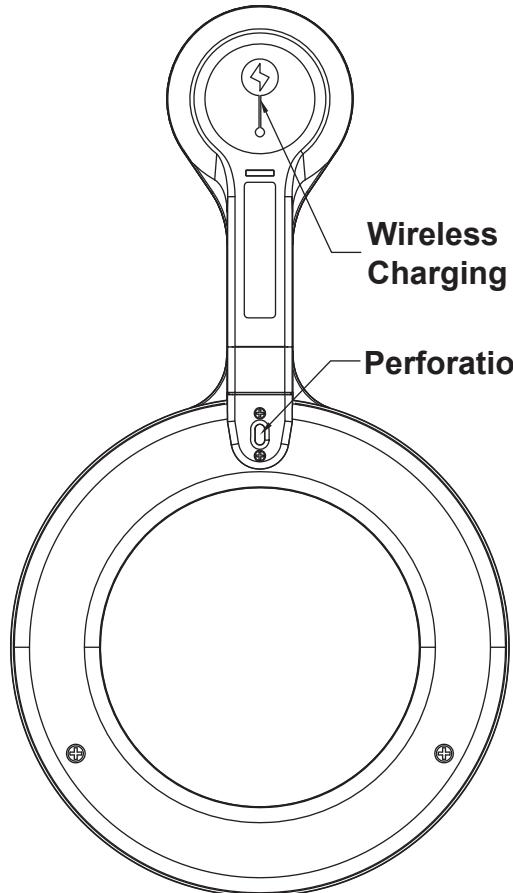

Wireless
Charging Receiver

Perforation

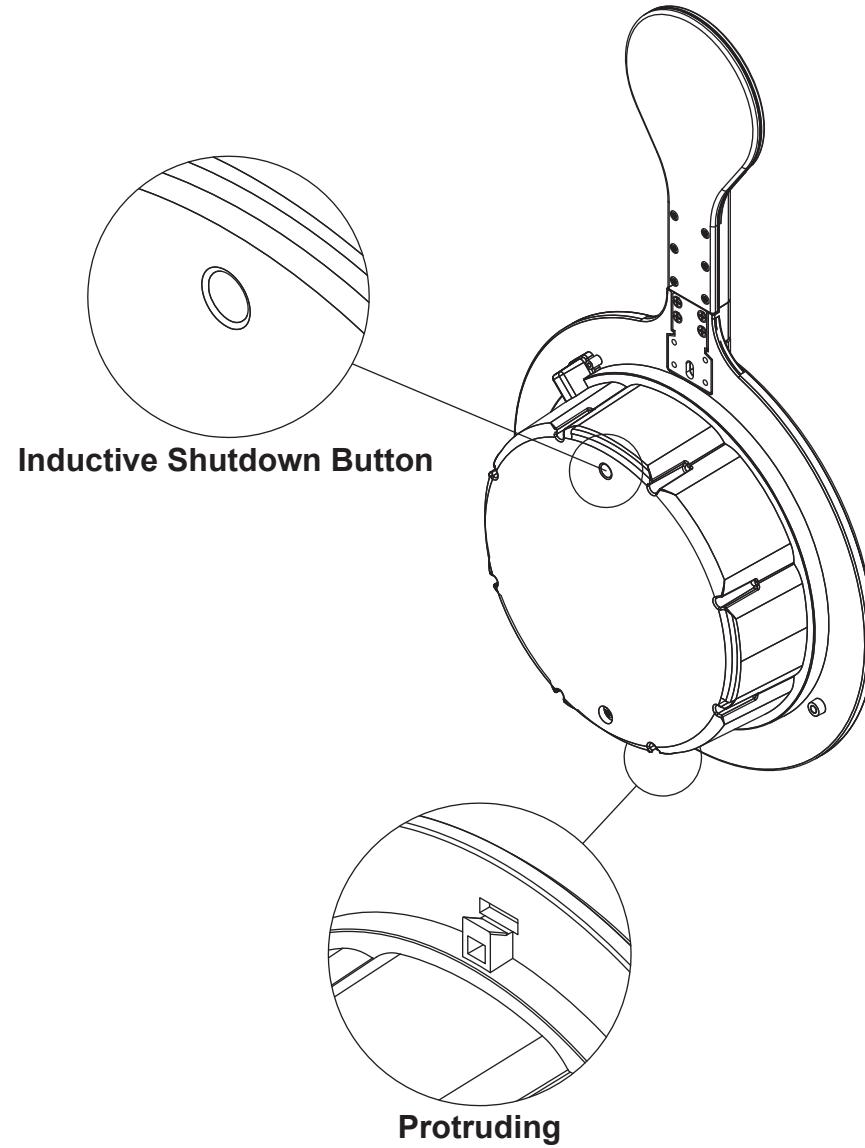

Inductive Shutdown Button


Protruding

Installation

1. The Pool Light


1.1 Place the pool light into the existing niche which is pre-mounted to the wall in a pool.

1.2 Secure the pool light with the given 3/16" flathead screw.

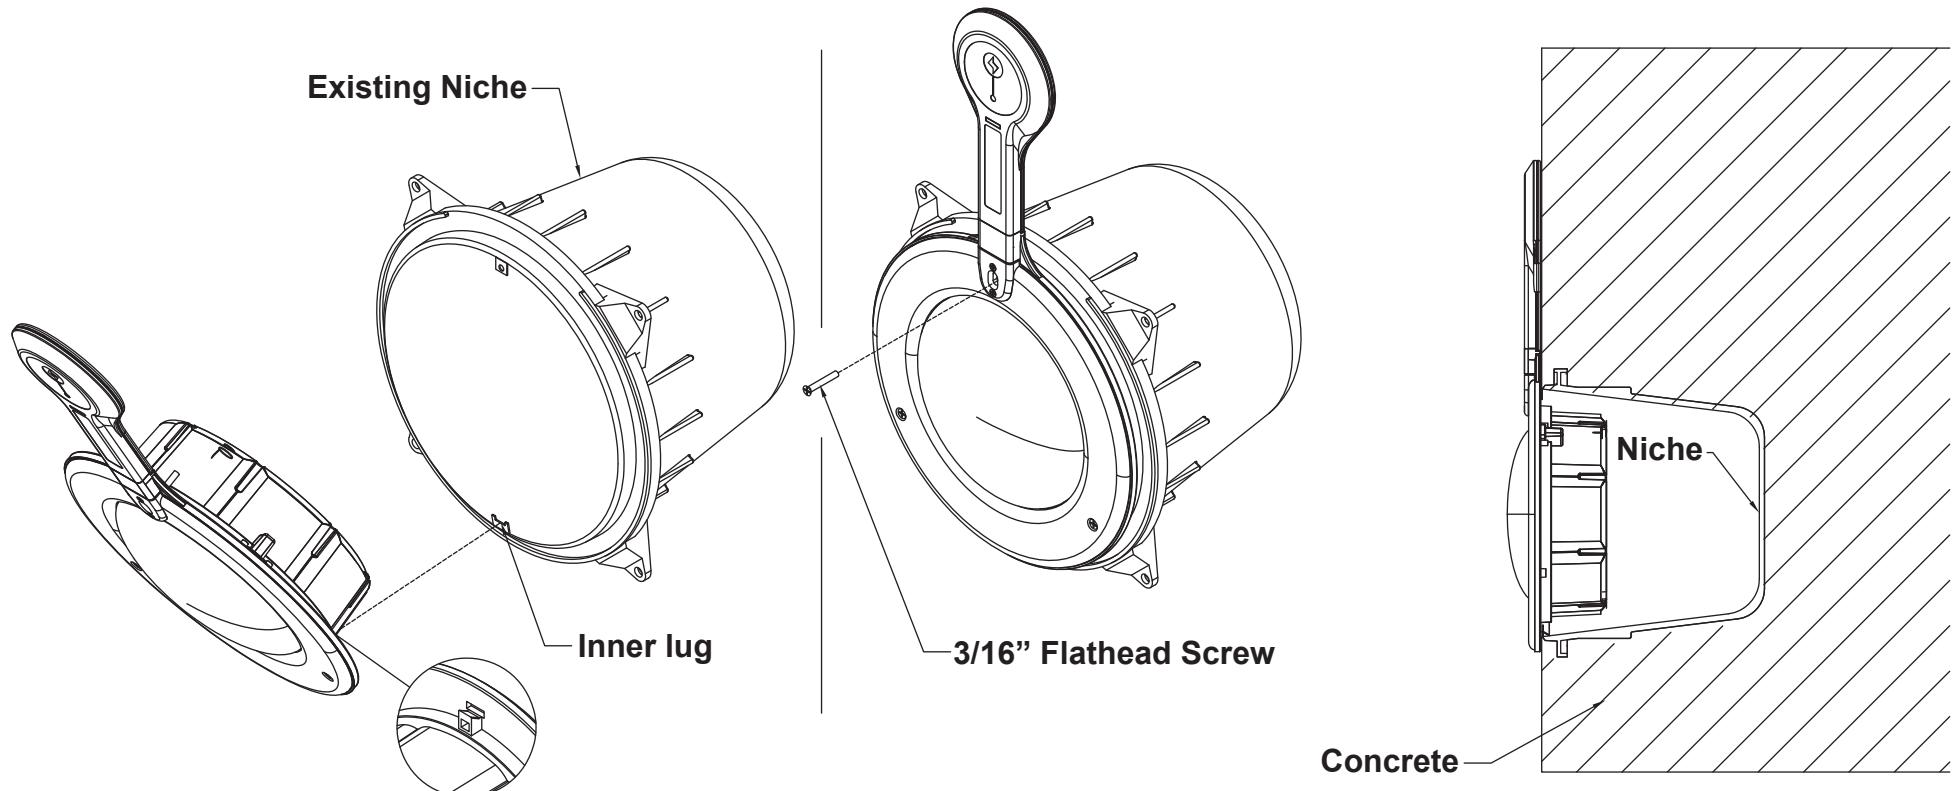


Caution:

When finish the installation, please add a proper warning marking or label next to the light in order to prevent people put their fingers in the gap or bend the paddle. It could cause the pool light damaged.

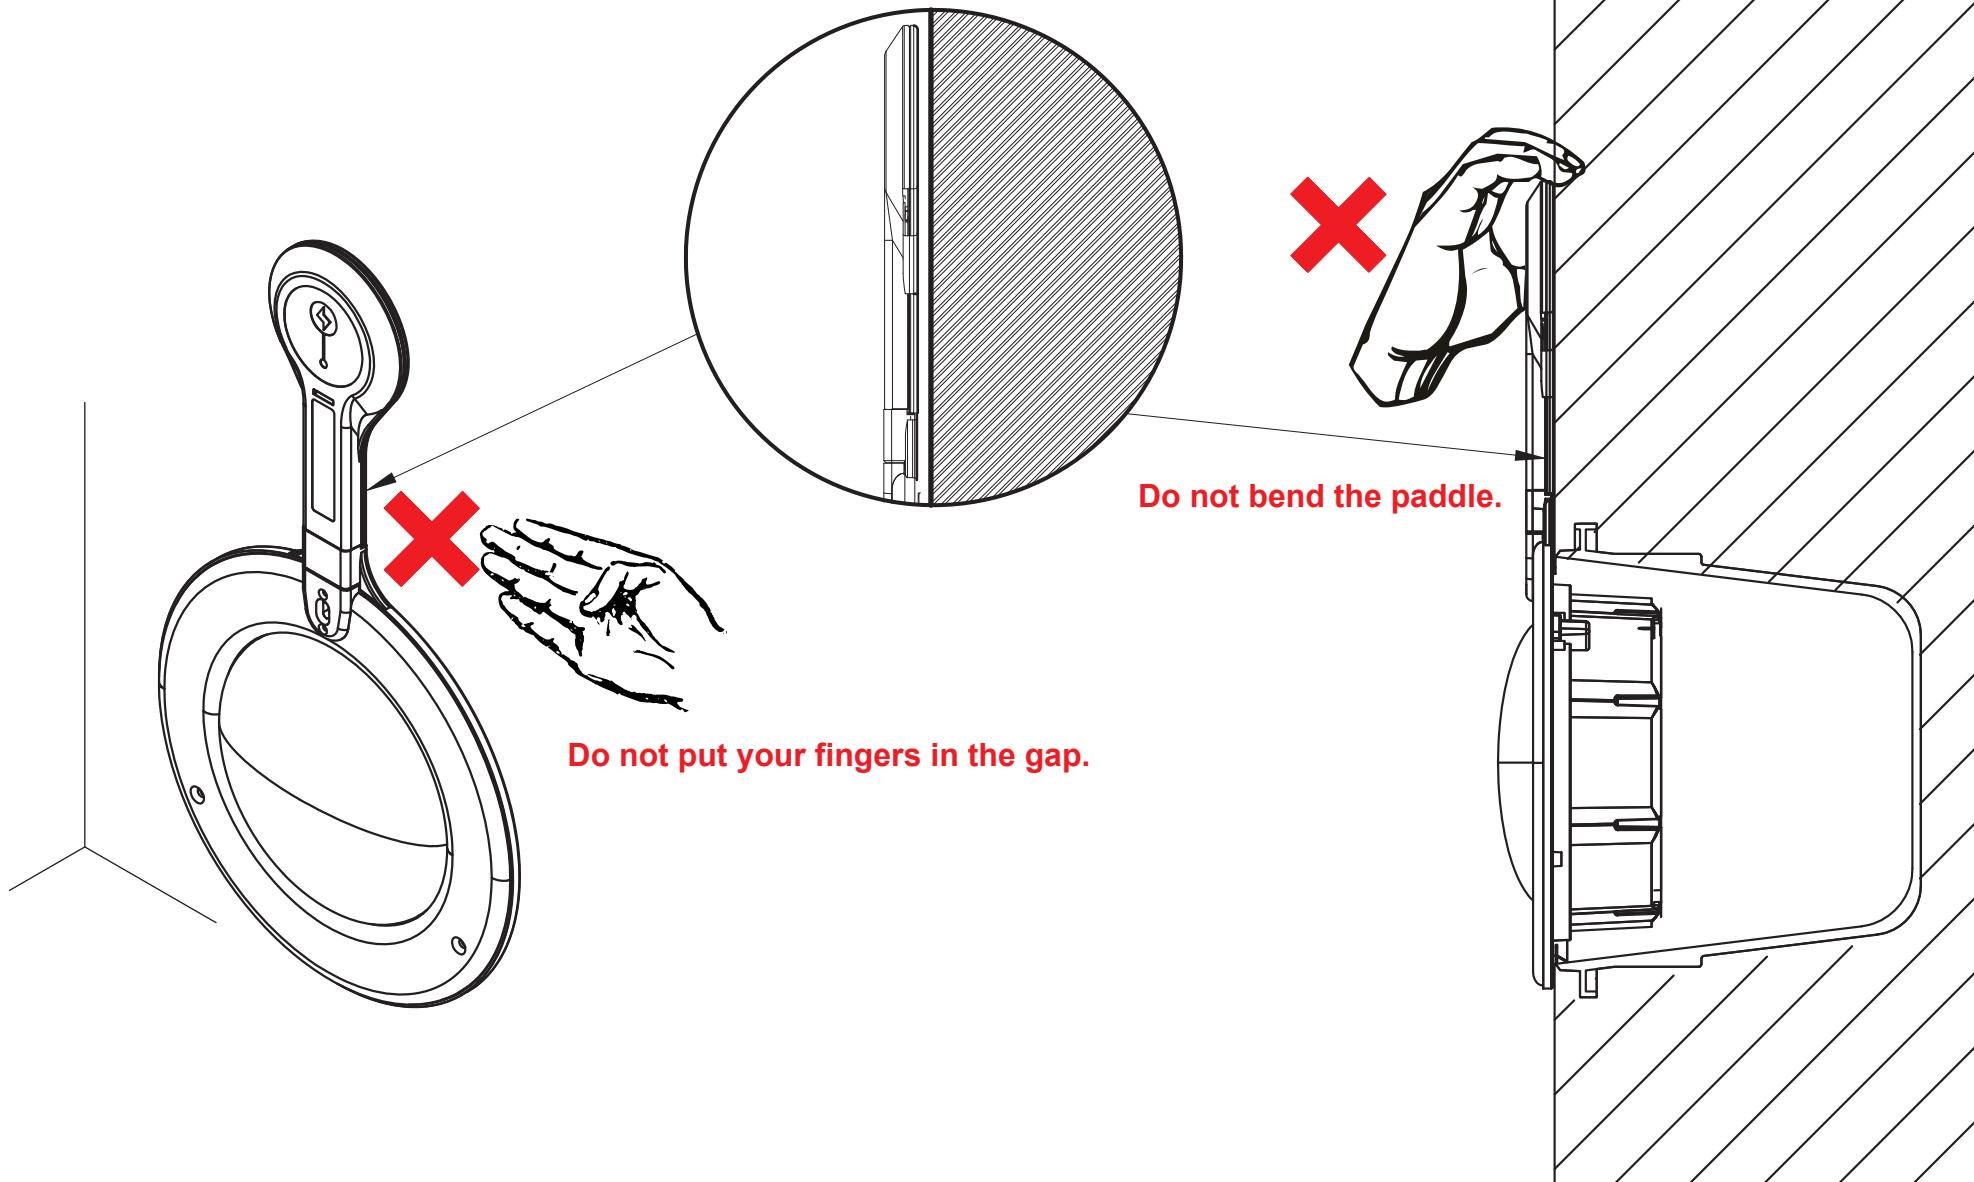


2. The Wireless Charger

2.1 Fasten the extended arm .

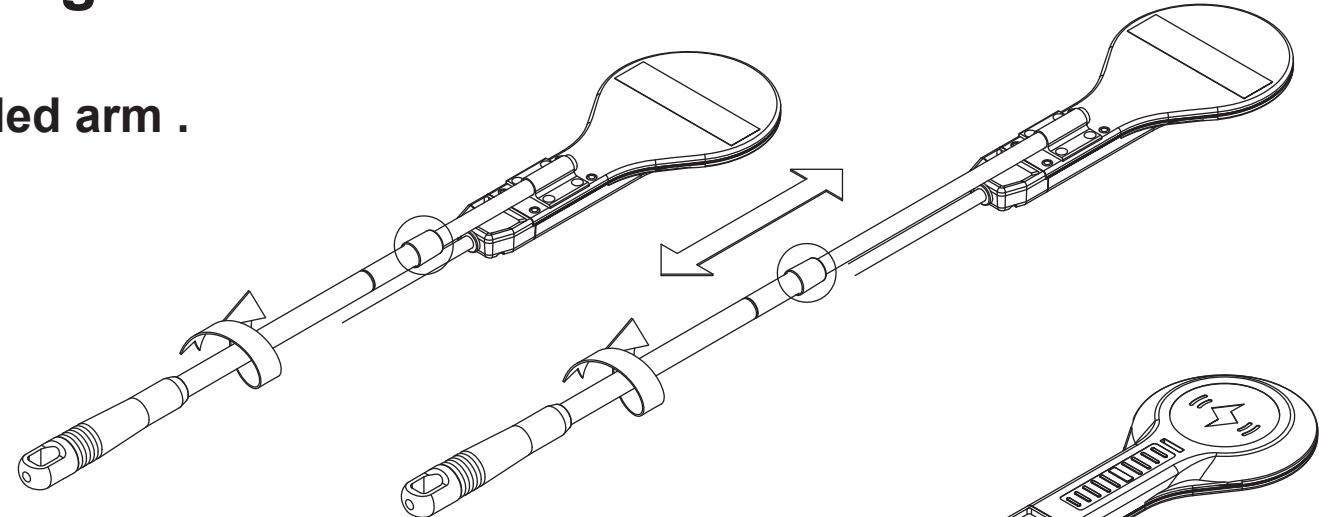


2.2 Connect the wireless charger with the AC adapter.

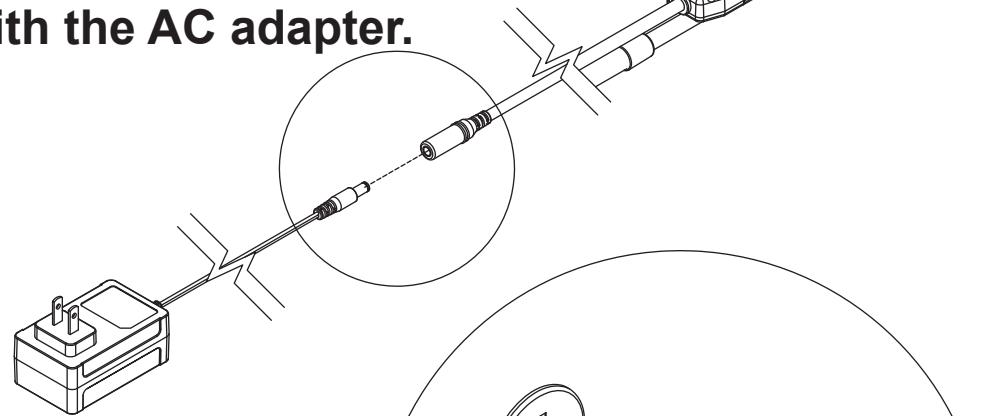

2.3 Plug the AC Adapter to the AC outlet.

Note:

The connectors and AC adapter are not waterproof.
Please make sure they are placed in the sheltered or interior location.

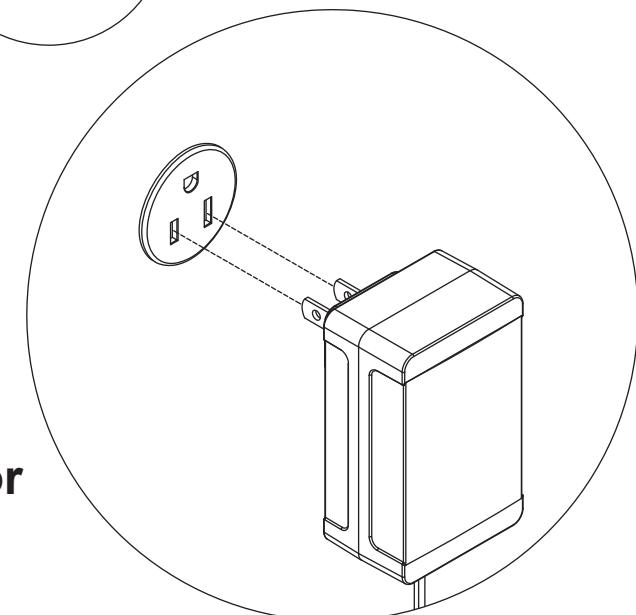


3. The Gateway

**3.1 Plug the AC Adapter to the AC outlet.
The power indicator will light up with green.**


Note:

**The gateway is not waterproof.
Please make sure they are placed in the sheltered or interior location.**

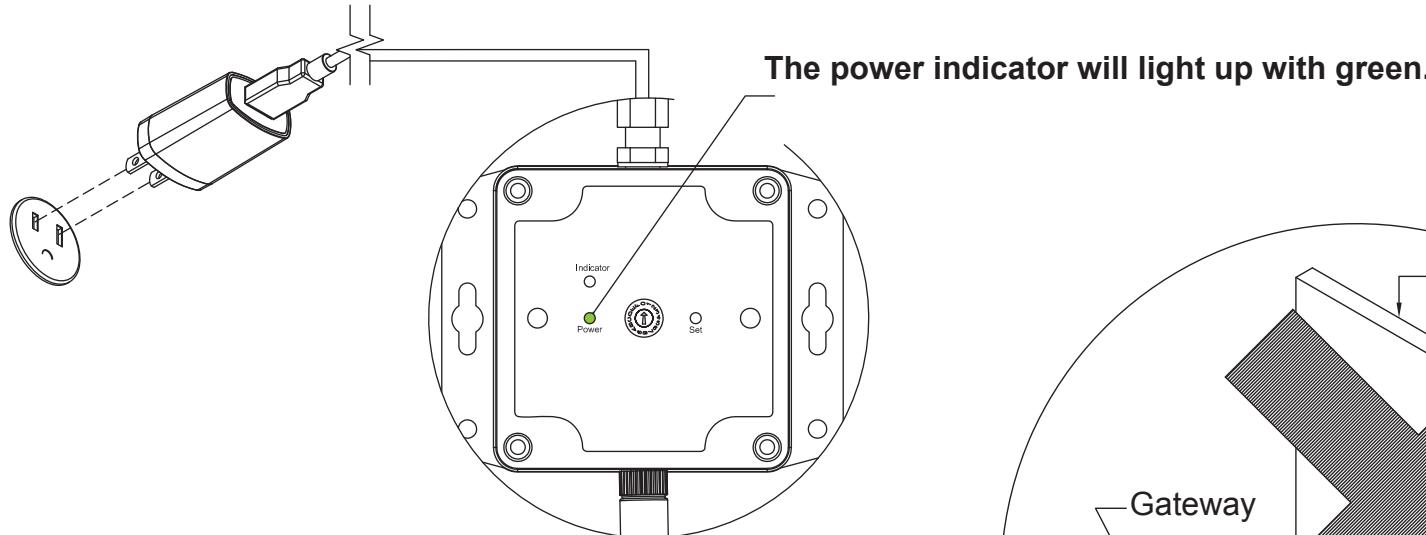

Note:


Make sure there is no metal hardware or metal plate next to the gateway which could block the wireless signal transmission.

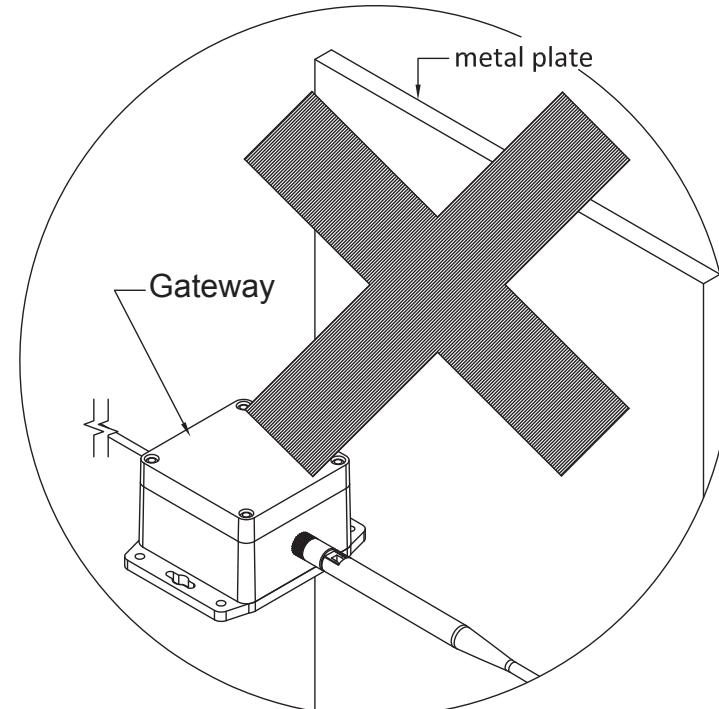

4. Charging Procedure



4.1 Place the wireless charger paddle (the transmitter) to attach the charging receiver paddle properly.

The charger will be attracted magnetically by the receiver paddle when getting closer to it

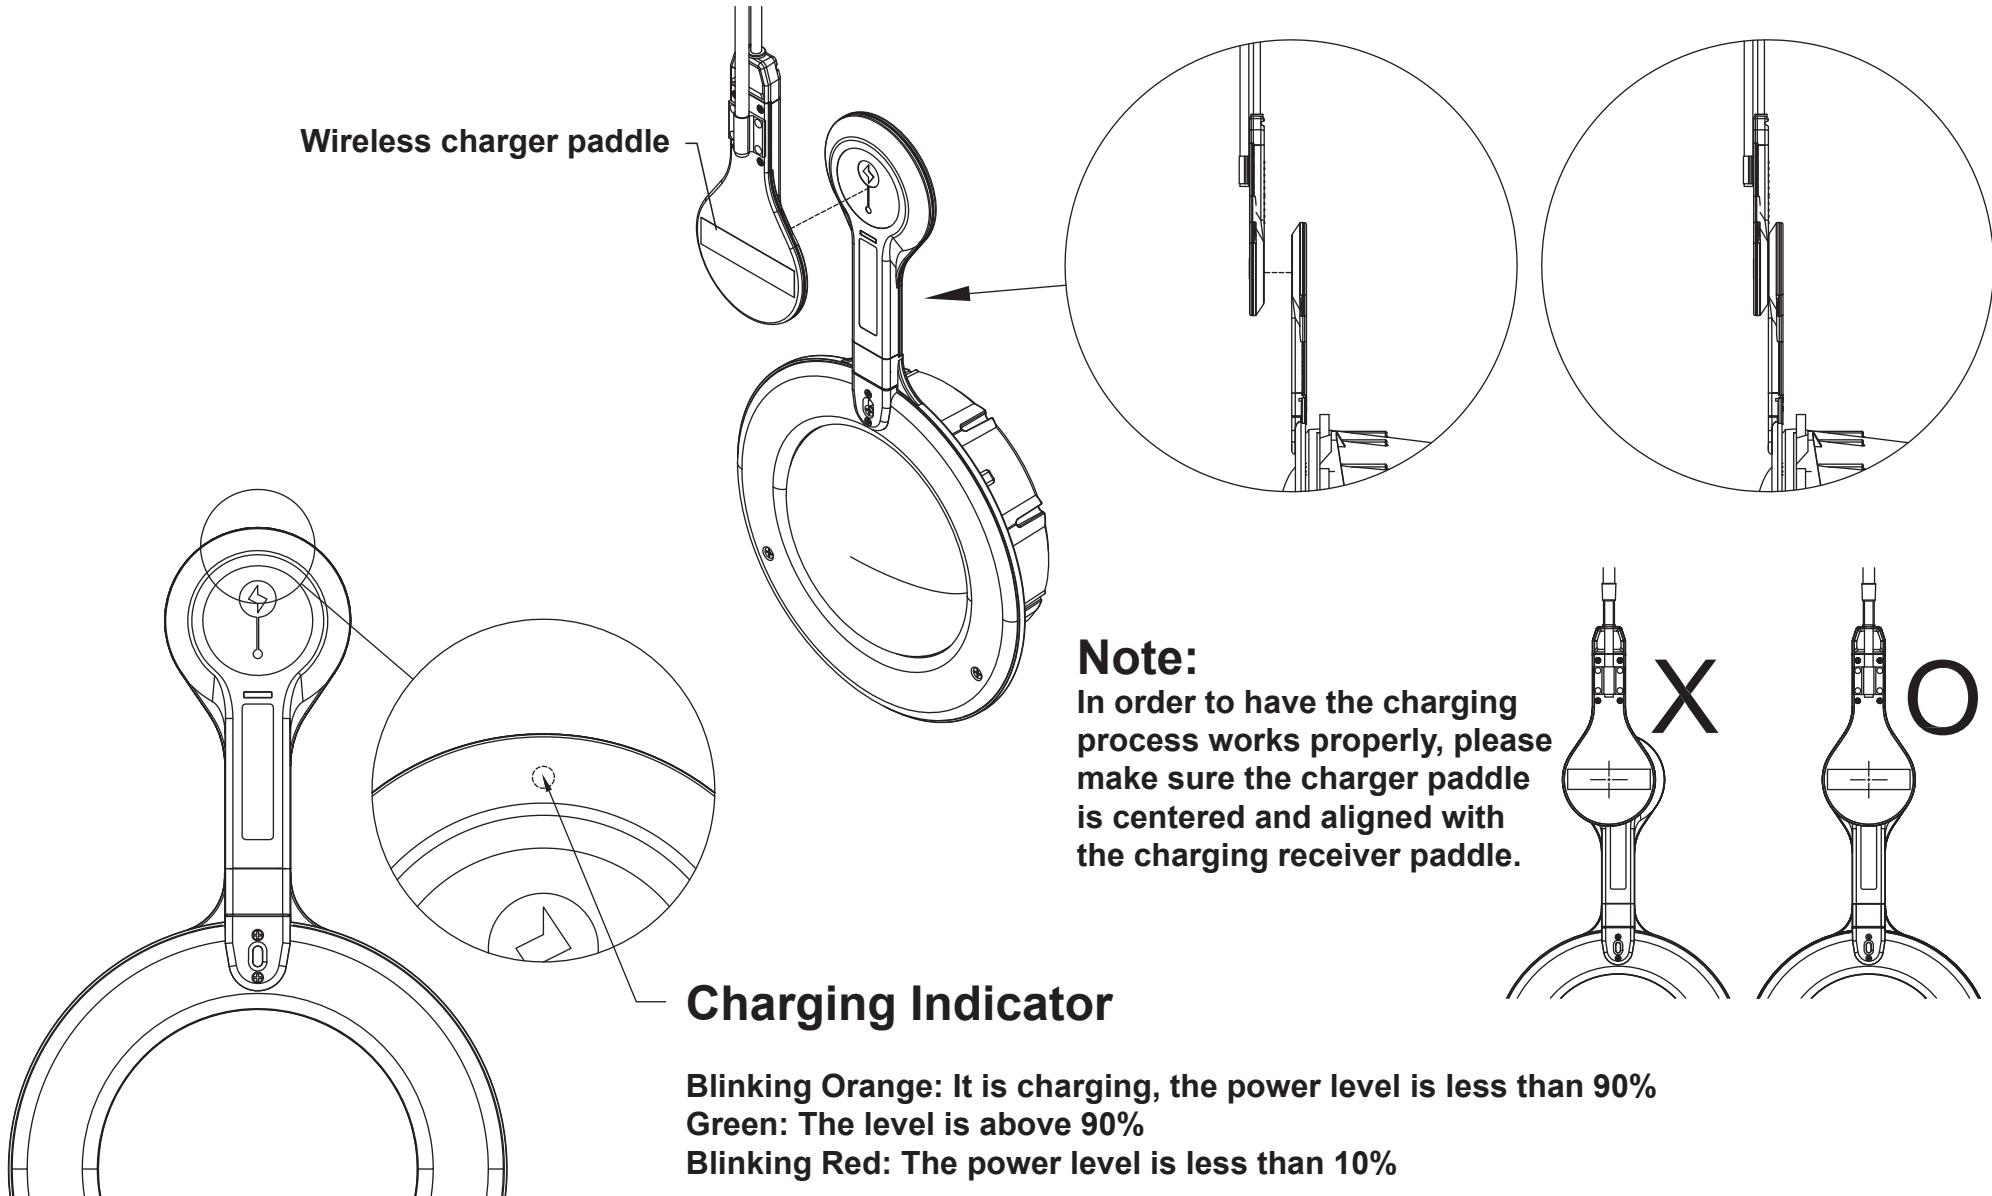

Caution:



During the charging procedure, please route the cords away from the walkway or use proper signages to ensure pool users are aware of the cords.

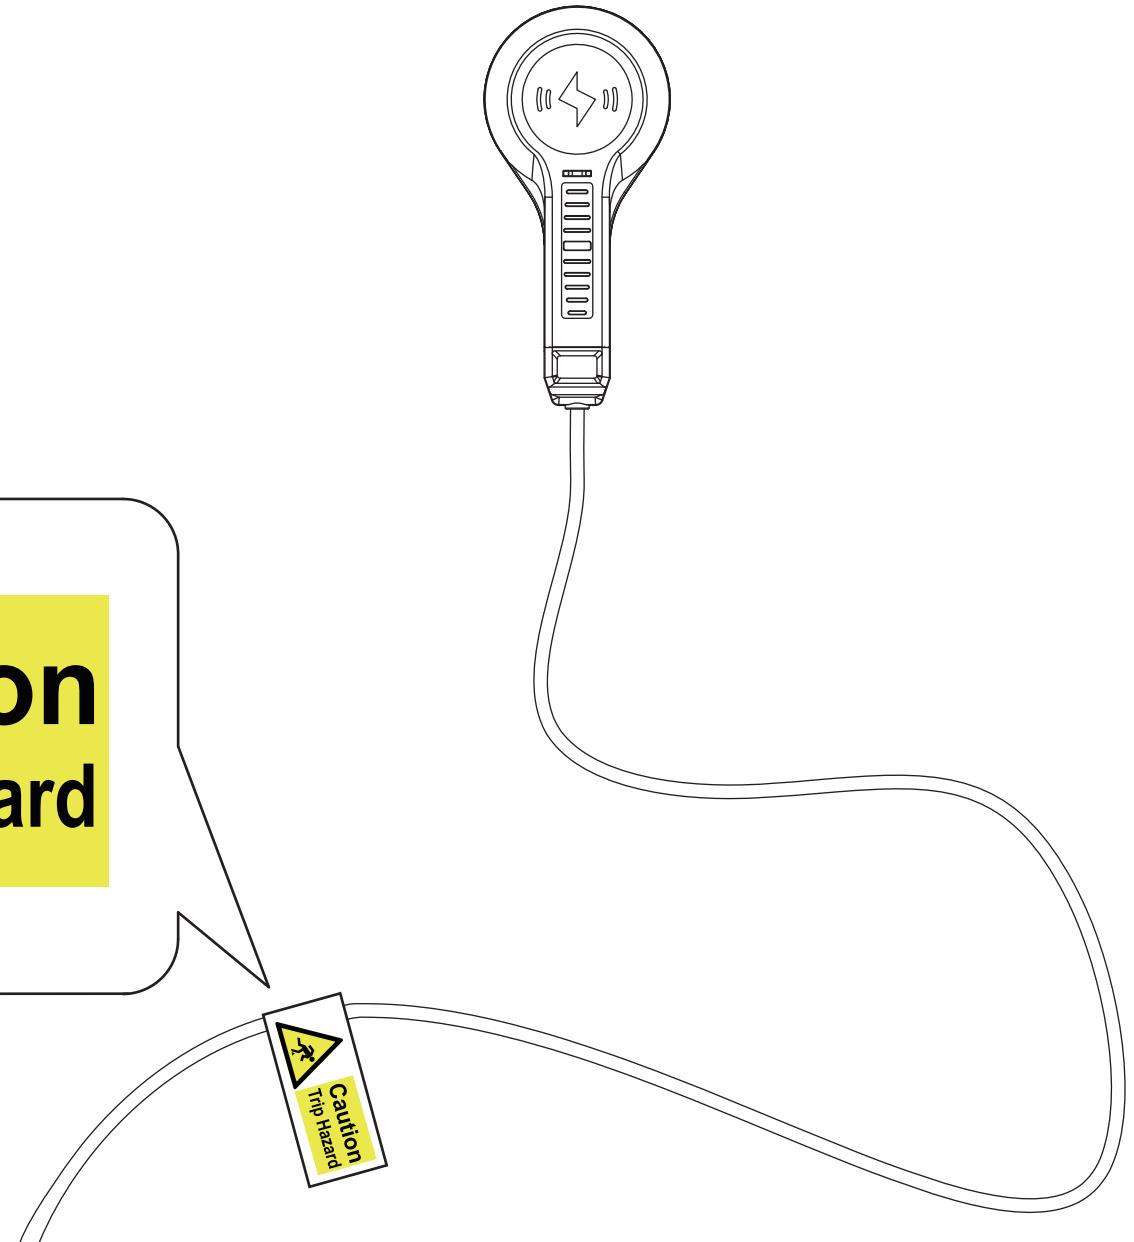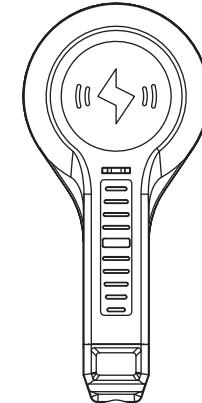

4.2 The pool light will be lighting up with white color when it gets started the charging process. In the meantime, the charging indicator be blinking with orange light.

It takes about 25 hours to fully charge the pool light.

4.3 Remove the charger once the charging indicator turns green which means the pool light is fully charged.

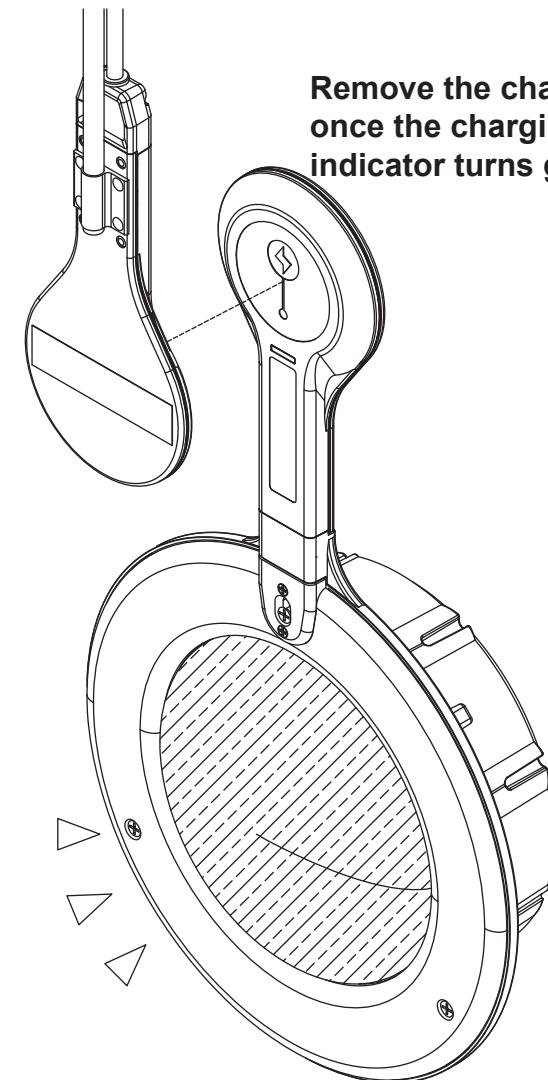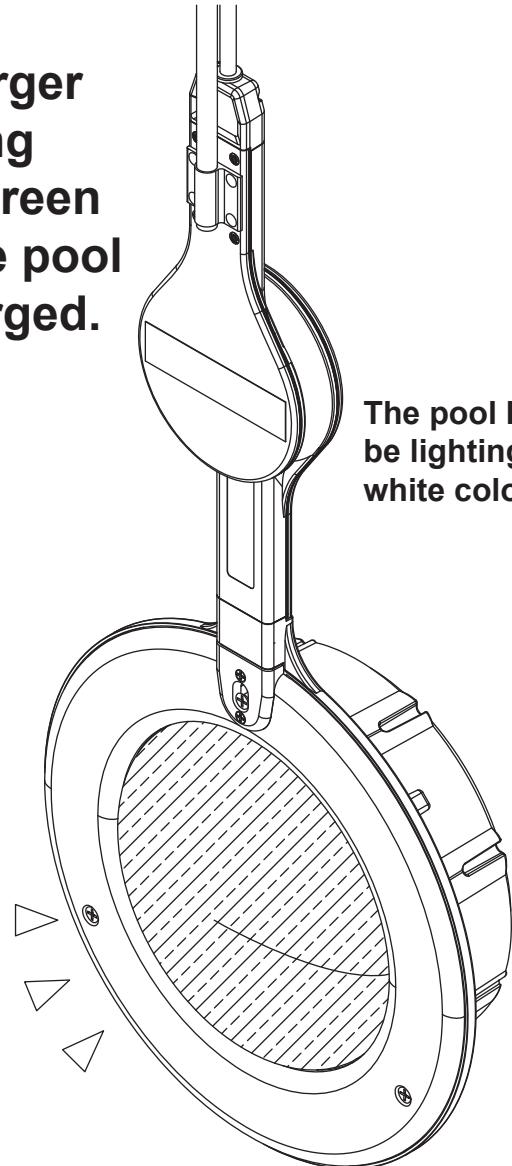

5. Power Off / Sleep Mode

When the pool light is expecting to power off for a long time.
Users have two ways to power off the pool light.

1. Tap the power button in the APP throughout the smartphone.
2. Attach the given magnet stick to the inductive shutdown button for one second.
3. The pool light can always be waked by executing the charging procedure.

