

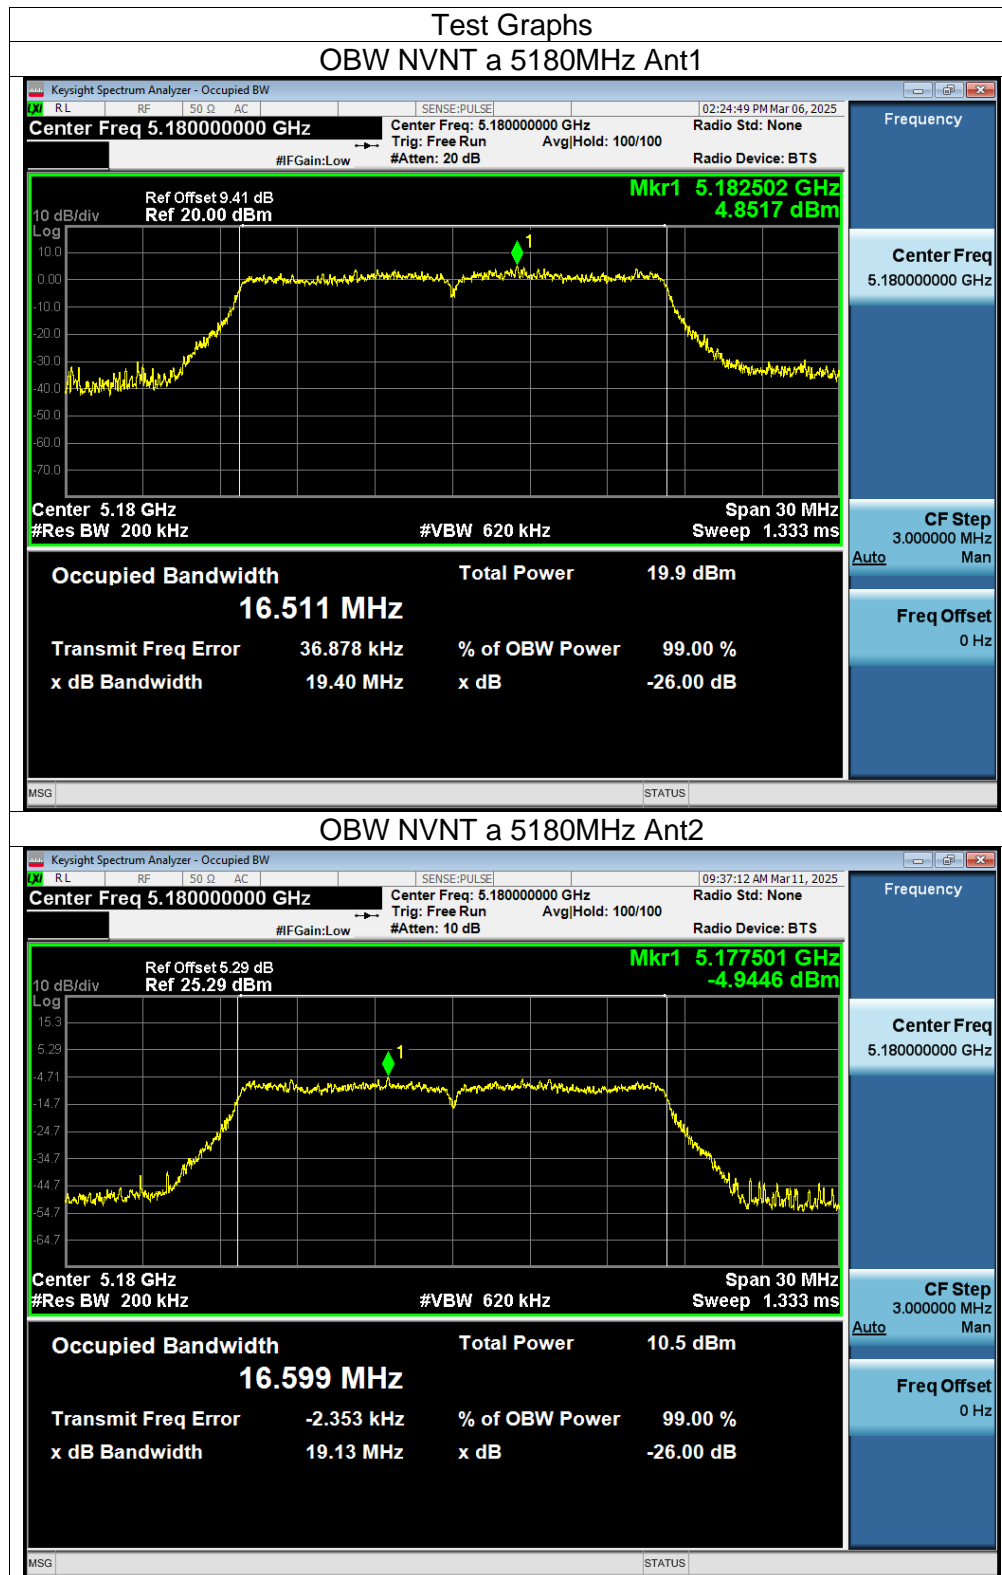




11.4. APPENDIX D: OCCUPIED CHANNEL BANDWIDTH



Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.511
NVNT	a	5180	Ant2	16.599
NVNT	a	5200	Ant1	16.643
NVNT	a	5200	Ant2	16.594
NVNT	a	5240	Ant1	16.607
NVNT	a	5240	Ant2	16.612
NVNT	a	5260	Ant1	16.623
NVNT	a	5260	Ant2	16.593
NVNT	a	5280	Ant1	16.478
NVNT	a	5280	Ant2	16.594
NVNT	a	5320	Ant1	16.489
NVNT	a	5320	Ant2	16.585
NVNT	a	5500	Ant1	16.926
NVNT	a	5500	Ant2	16.574
NVNT	a	5580	Ant1	16.474
NVNT	a	5580	Ant2	16.578
NVNT	a	5700	Ant1	16.646
NVNT	a	5700	Ant2	16.548
NVNT	a	5745	Ant1	16.518
NVNT	a	5745	Ant2	16.595
NVNT	a	5785	Ant1	16.475
NVNT	a	5785	Ant2	16.64
NVNT	a	5825	Ant1	16.576
NVNT	a	5825	Ant2	16.625
NVNT	n20	5180	Ant1	17.57
NVNT	n20	5180	Ant2	16.588
NVNT	n20	5200	Ant1	17.68
NVNT	n20	5200	Ant2	17.63
NVNT	n20	5240	Ant1	17.637
NVNT	n20	5240	Ant2	17.63
NVNT	n20	5260	Ant1	17.68
NVNT	n20	5260	Ant2	17.648
NVNT	n20	5280	Ant1	17.567
NVNT	n20	5280	Ant2	17.623
NVNT	n20	5320	Ant1	17.544
NVNT	n20	5320	Ant2	17.639
NVNT	n20	5500	Ant1	17.772
NVNT	n20	5500	Ant2	17.653
NVNT	n20	5580	Ant1	17.544
NVNT	n20	5580	Ant2	17.628
NVNT	n20	5700	Ant1	17.712
NVNT	n20	5700	Ant2	17.63
NVNT	n20	5745	Ant1	17.601
NVNT	n20	5745	Ant2	17.668
NVNT	n20	5785	Ant1	17.565
NVNT	n20	5785	Ant2	17.654
NVNT	n20	5825	Ant1	17.636
NVNT	n20	5825	Ant2	17.653



NVNT	n40	5190	Ant1	36.209
NVNT	n40	5190	Ant2	36.163
NVNT	n40	5230	Ant1	36.288
NVNT	n40	5230	Ant2	36.166
NVNT	n40	5270	Ant1	36.175
NVNT	n40	5270	Ant2	36.156
NVNT	n40	5310	Ant1	36.077
NVNT	n40	5310	Ant2	36.157
NVNT	n40	5510	Ant1	36.054
NVNT	n40	5510	Ant2	36.168
NVNT	n40	5550	Ant1	36.131
NVNT	n40	5550	Ant2	36.181
NVNT	n40	5670	Ant1	36.223
NVNT	n40	5670	Ant2	36.174
NVNT	n40	5755	Ant1	36.186
NVNT	n40	5755	Ant2	36.162
NVNT	n40	5795	Ant1	36.311
NVNT	n40	5795	Ant2	36.158
NVNT	ac80	5210	Ant1	75.859
NVNT	ac80	5210	Ant2	75.799
NVNT	ac80	5290	Ant1	75.915
NVNT	ac80	5290	Ant2	75.92
NVNT	ac80	5530	Ant1	75.791
NVNT	ac80	5530	Ant2	75.936
NVNT	ac80	5610	Ant1	76.005
NVNT	ac80	5610	Ant2	75.925
NVNT	ac80	5775	Ant1	76.052
NVNT	ac80	5775	Ant2	75.778


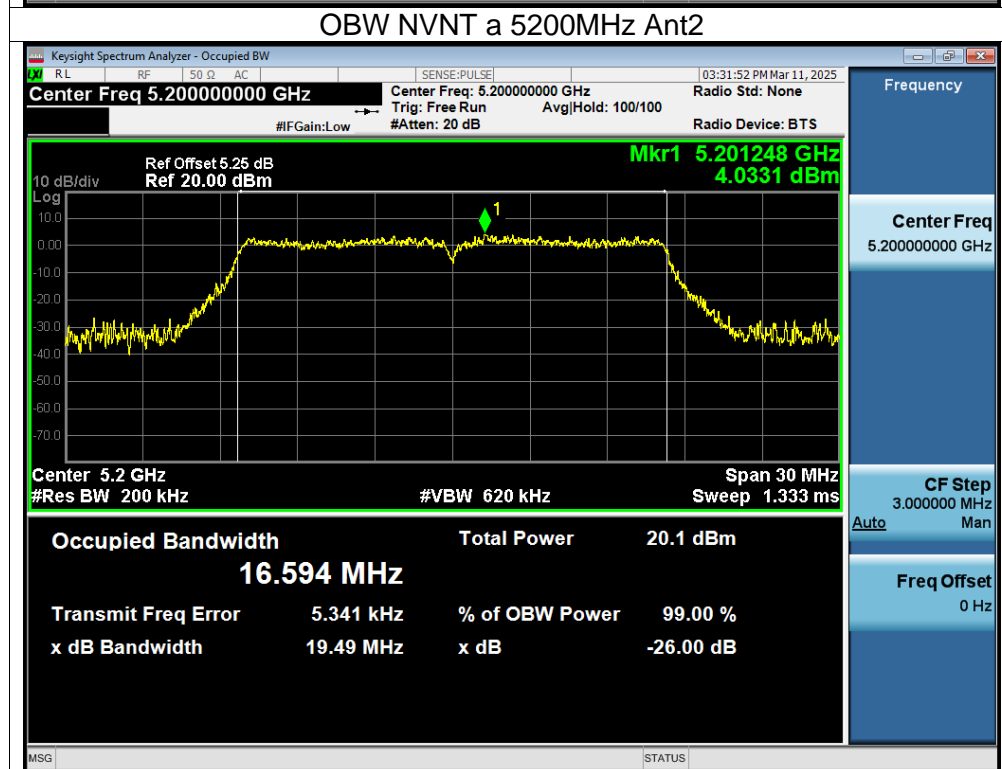



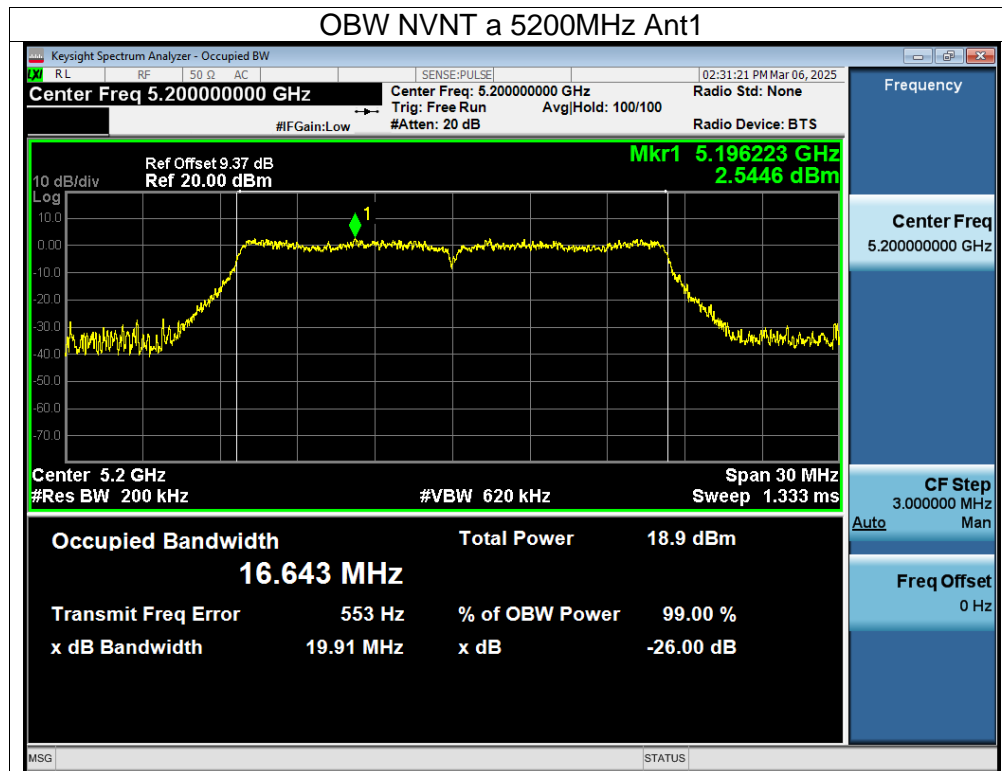


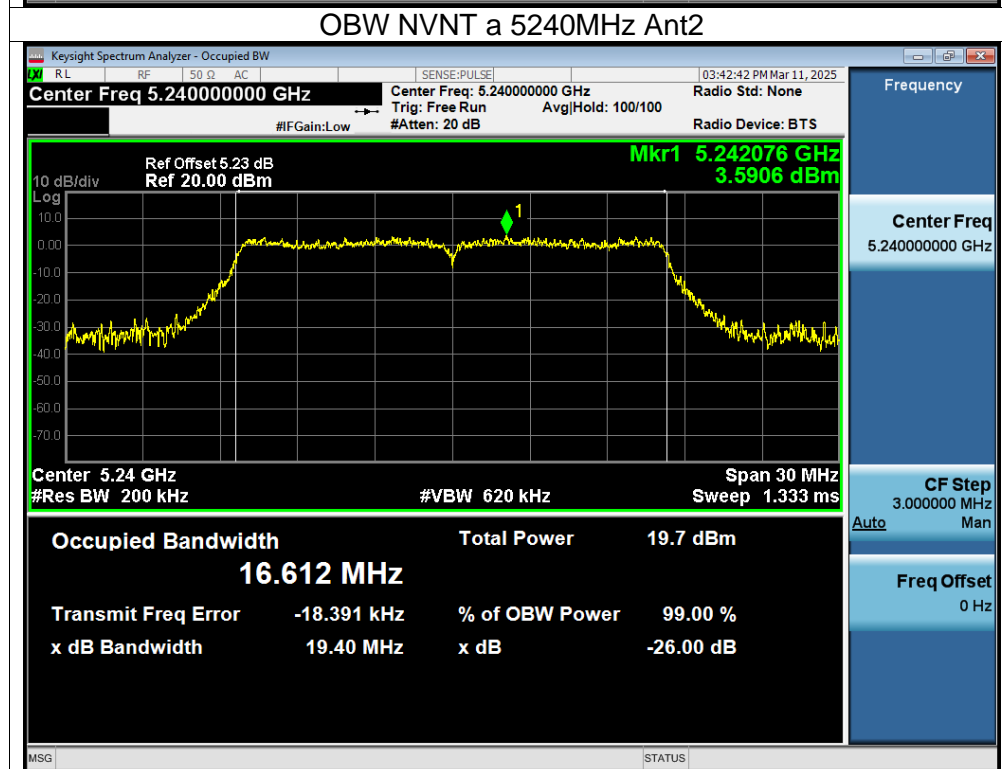
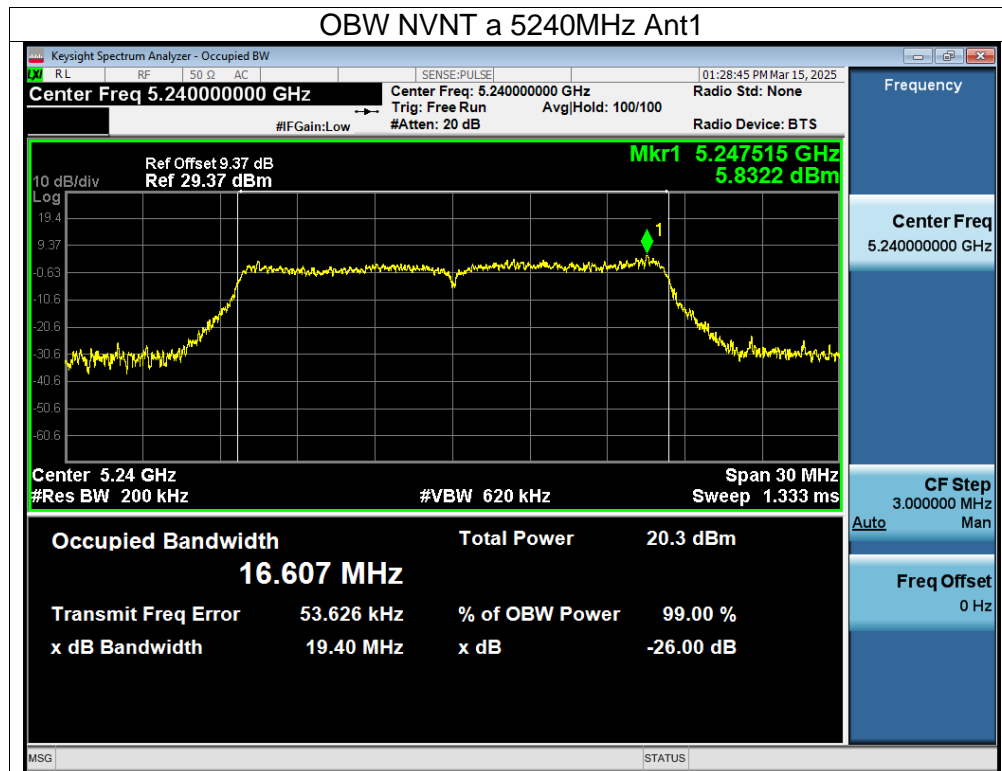


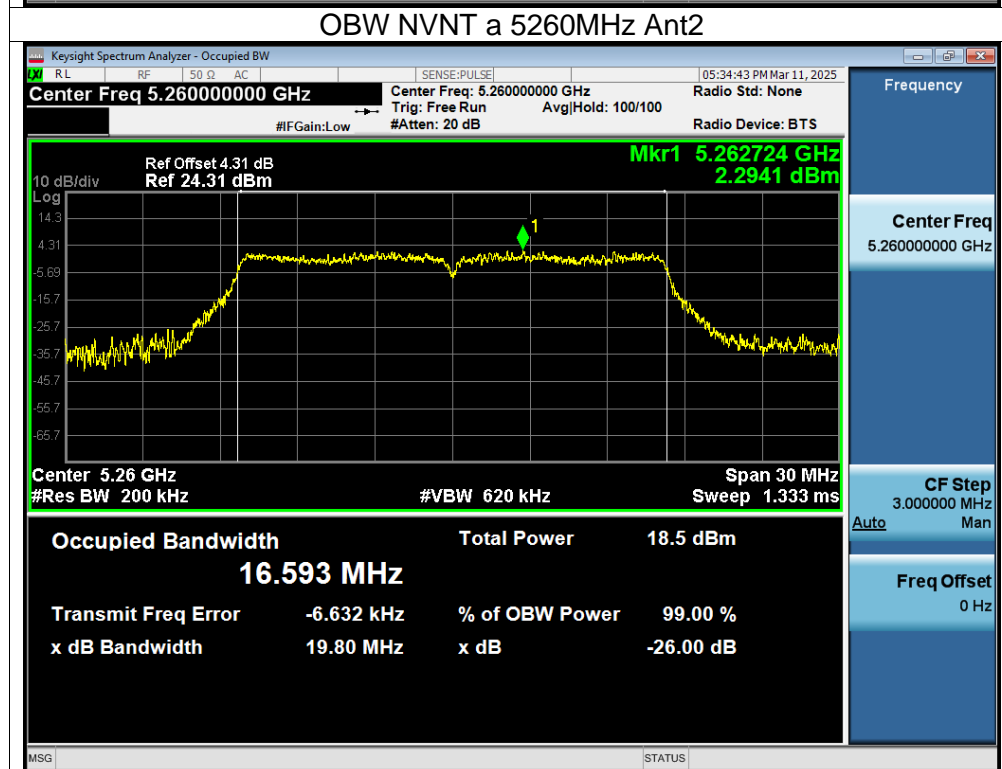
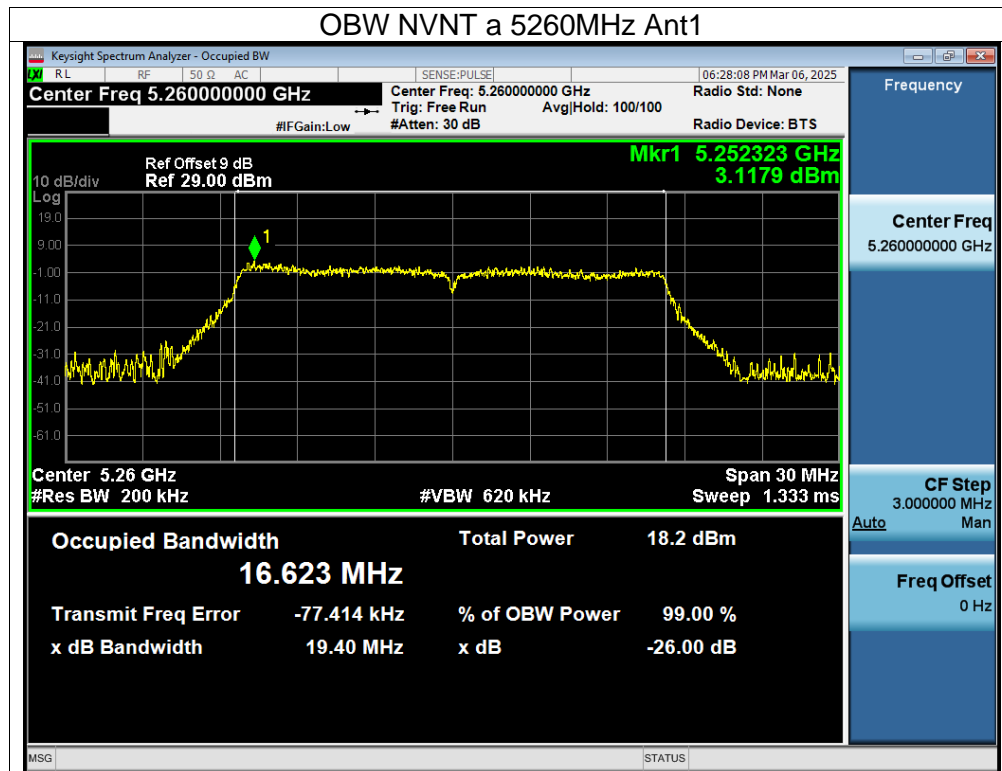


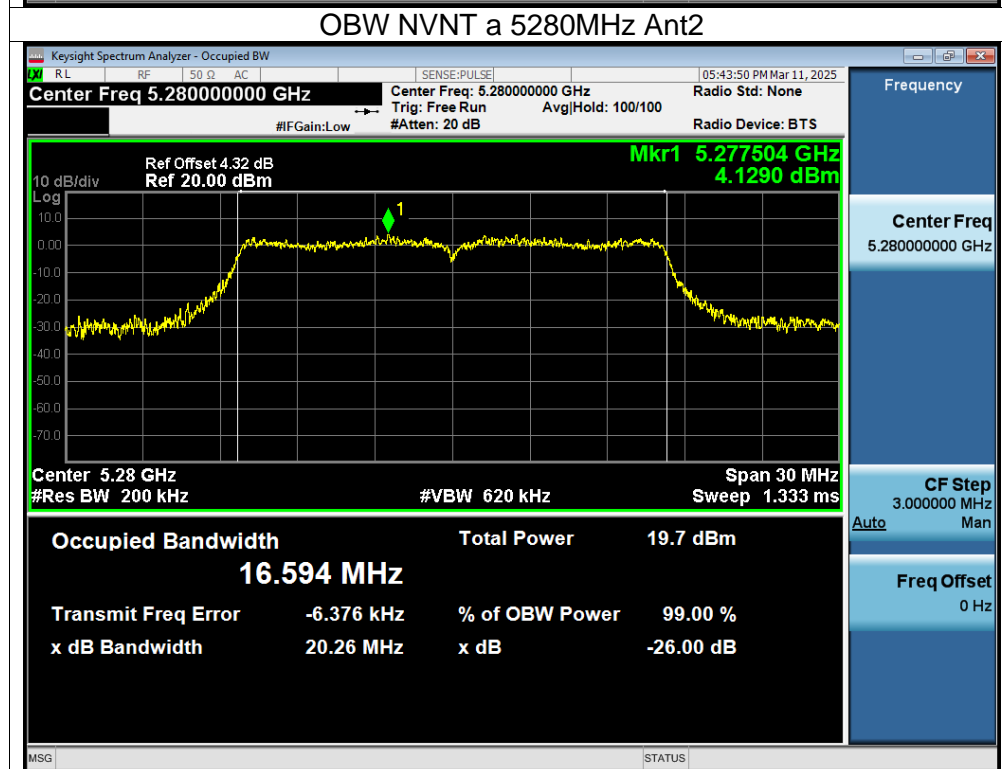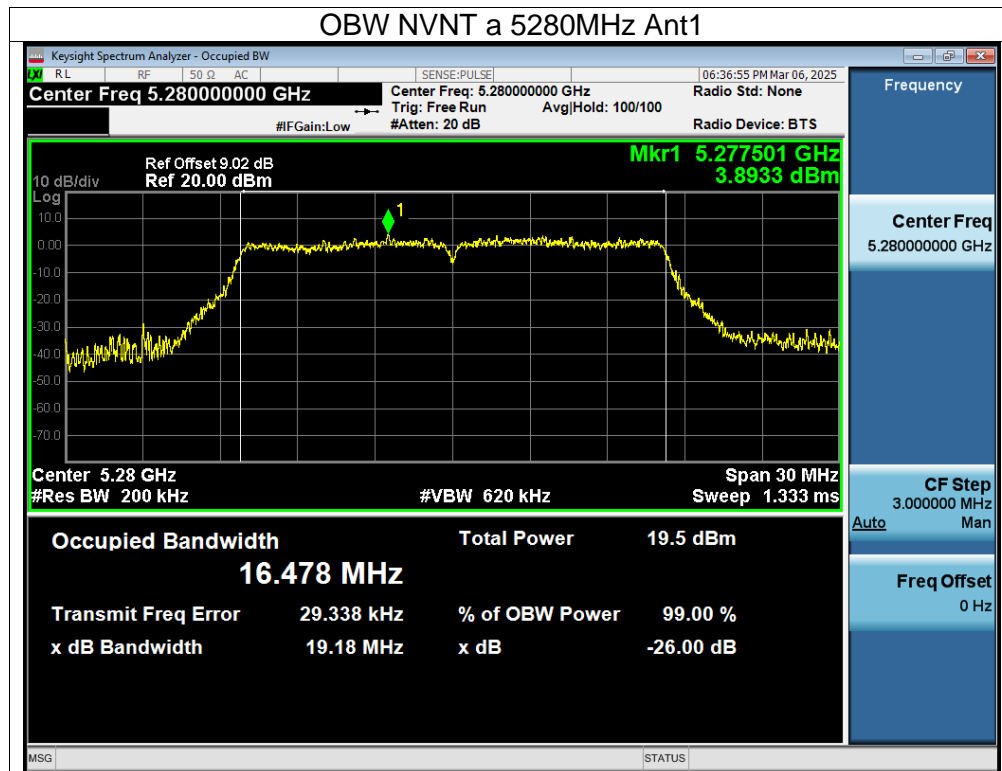


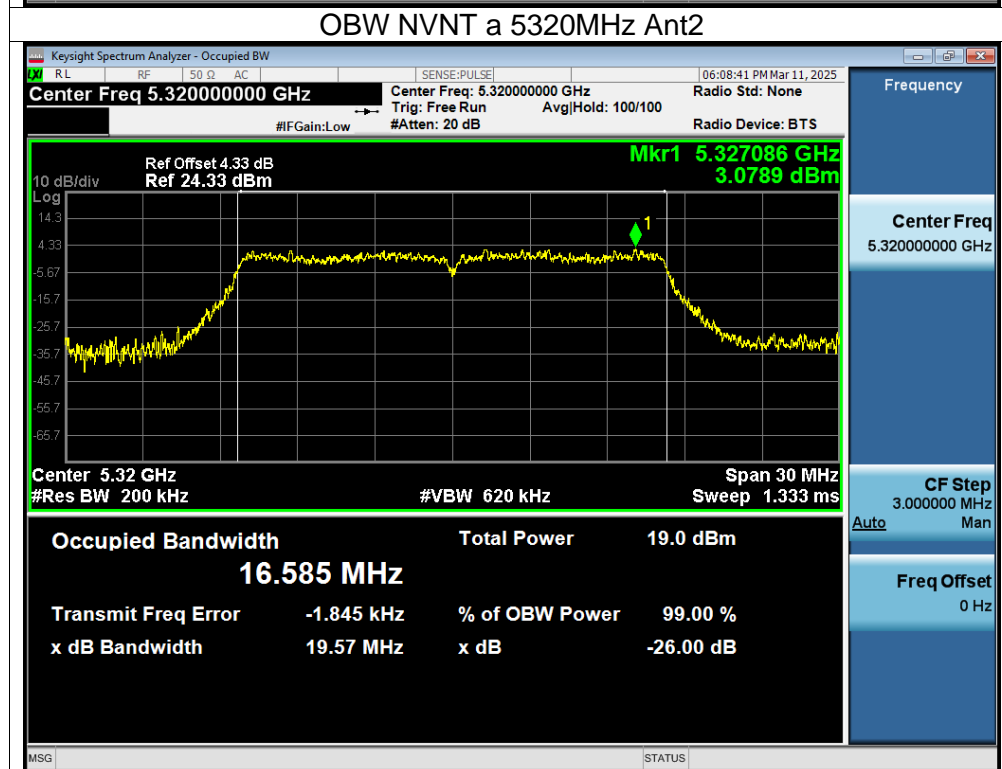
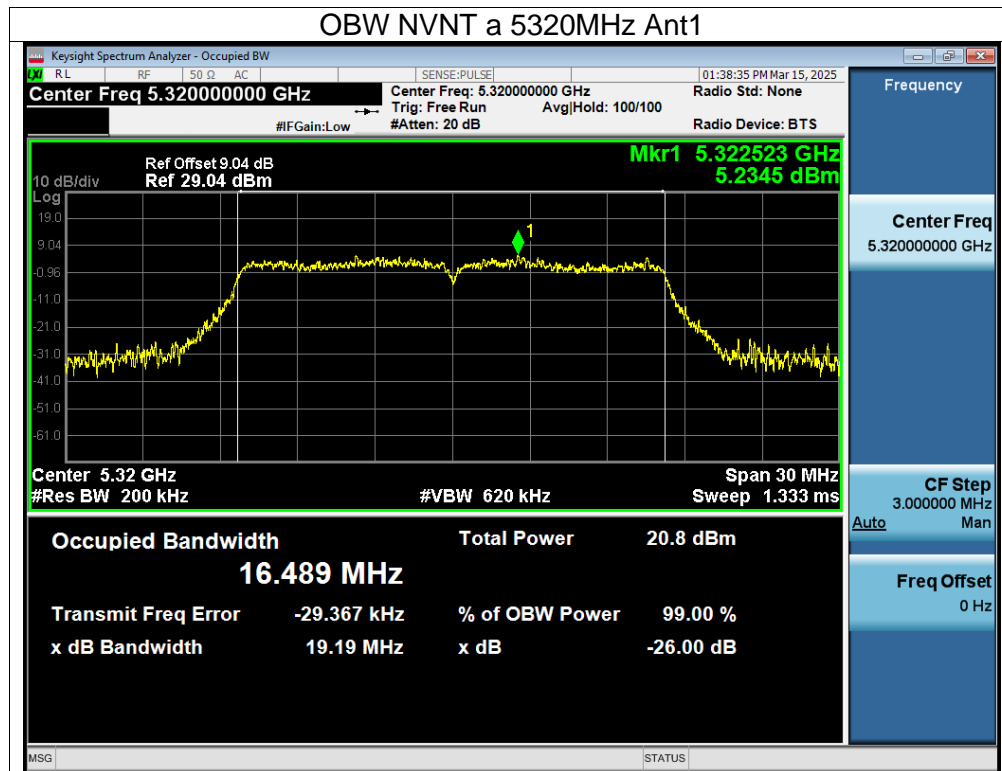


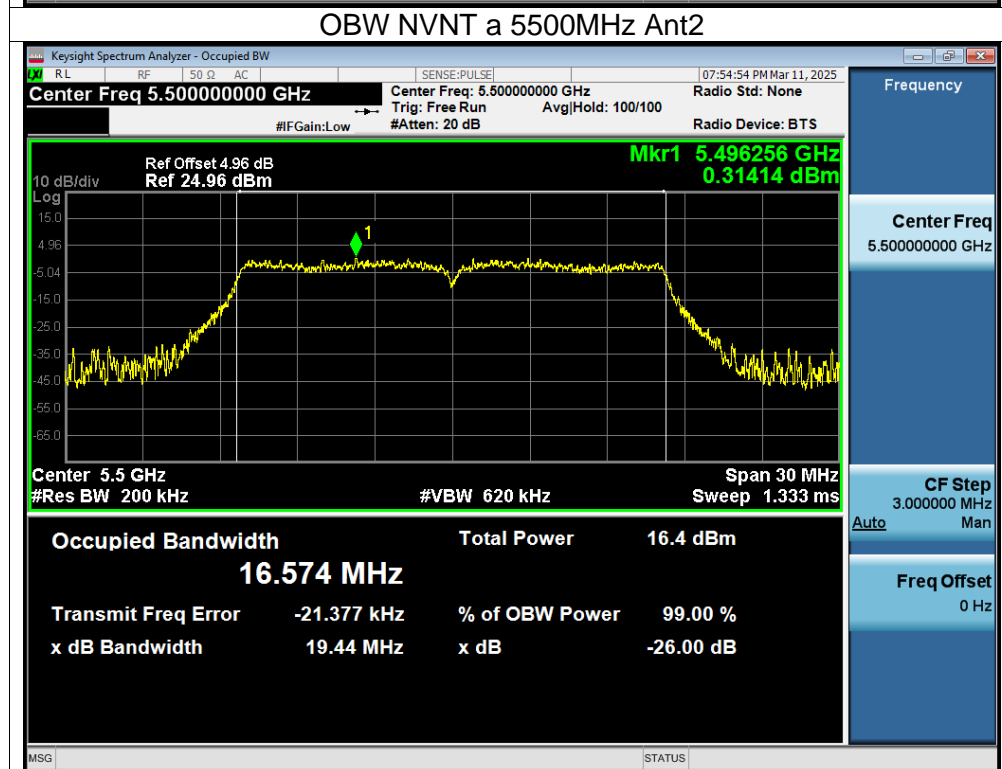
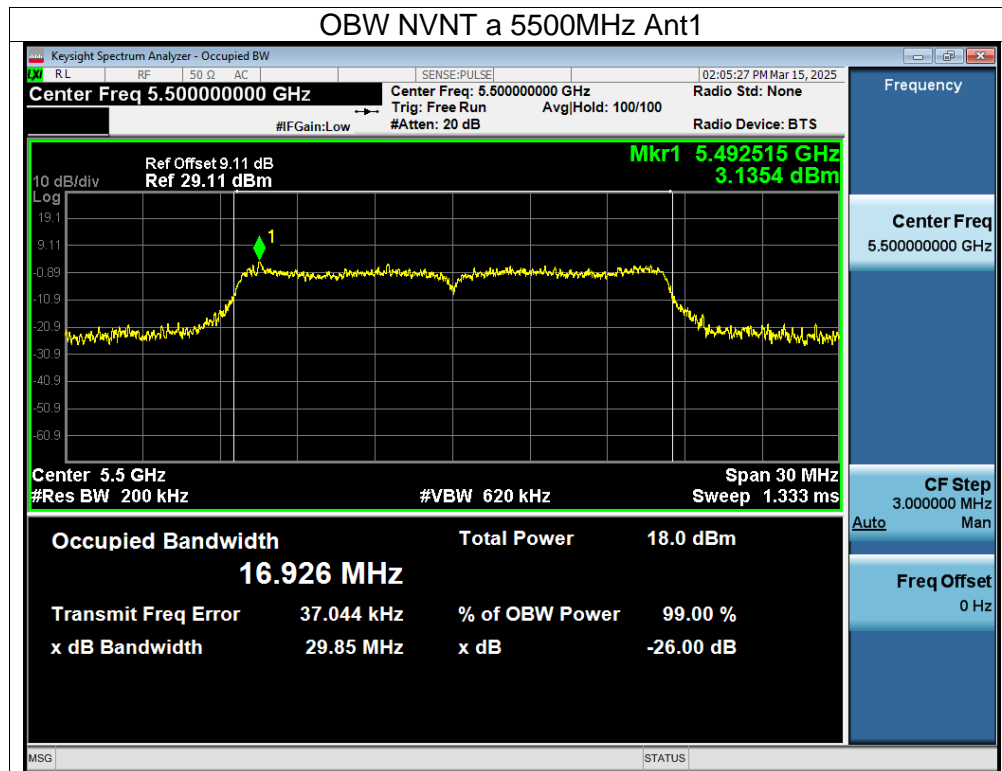


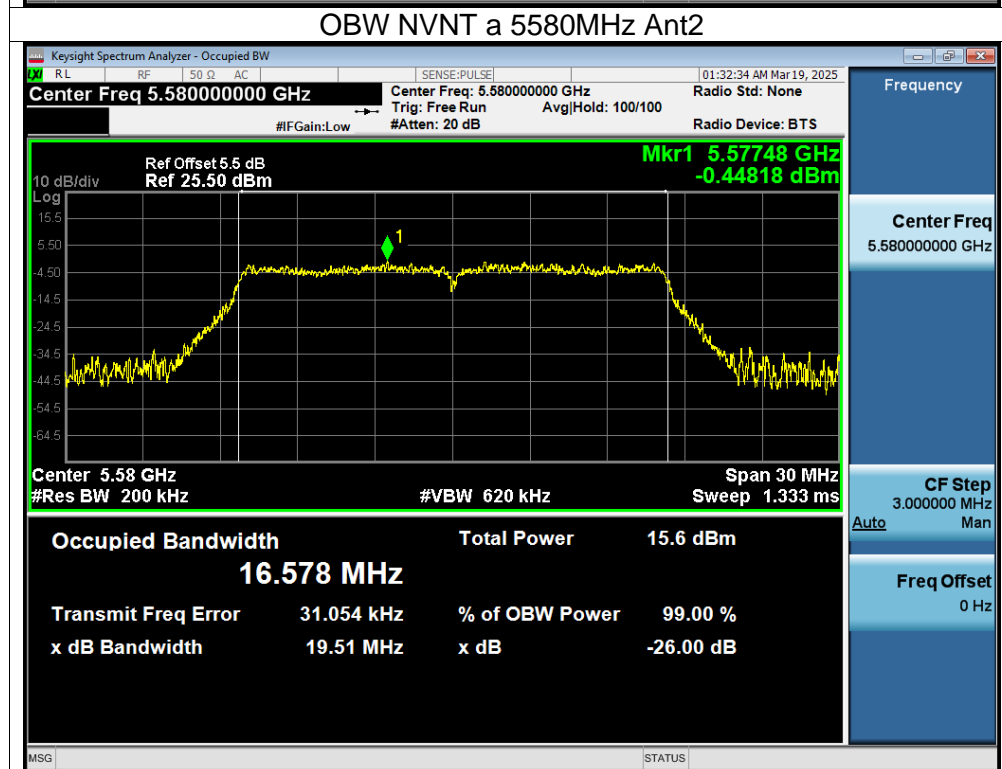
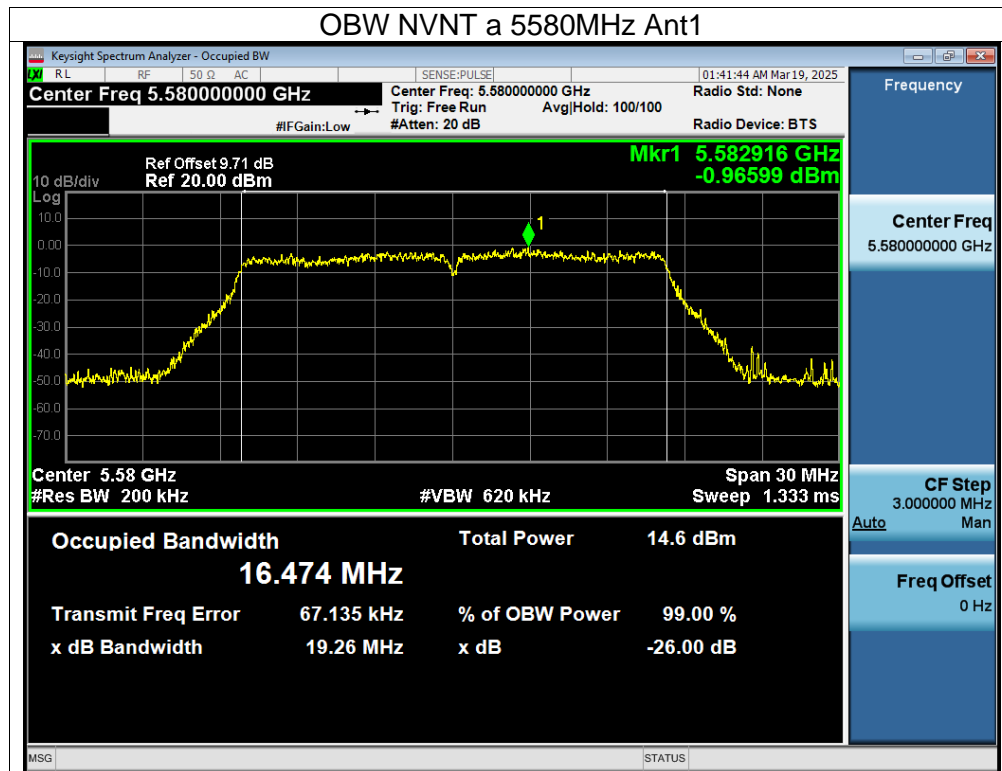


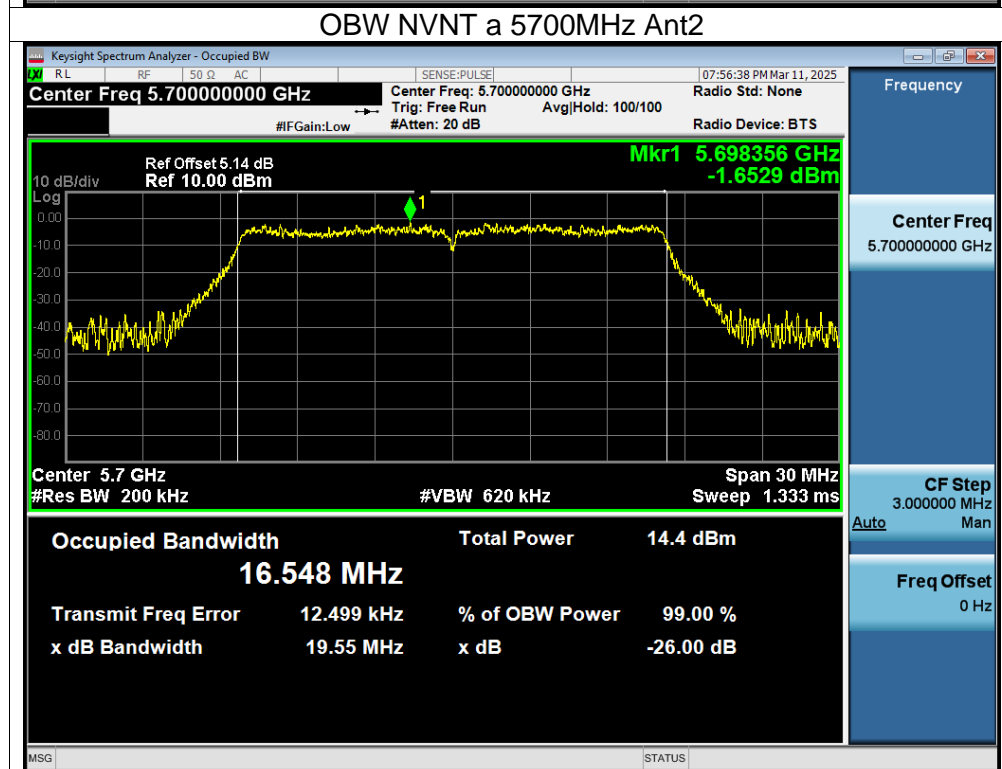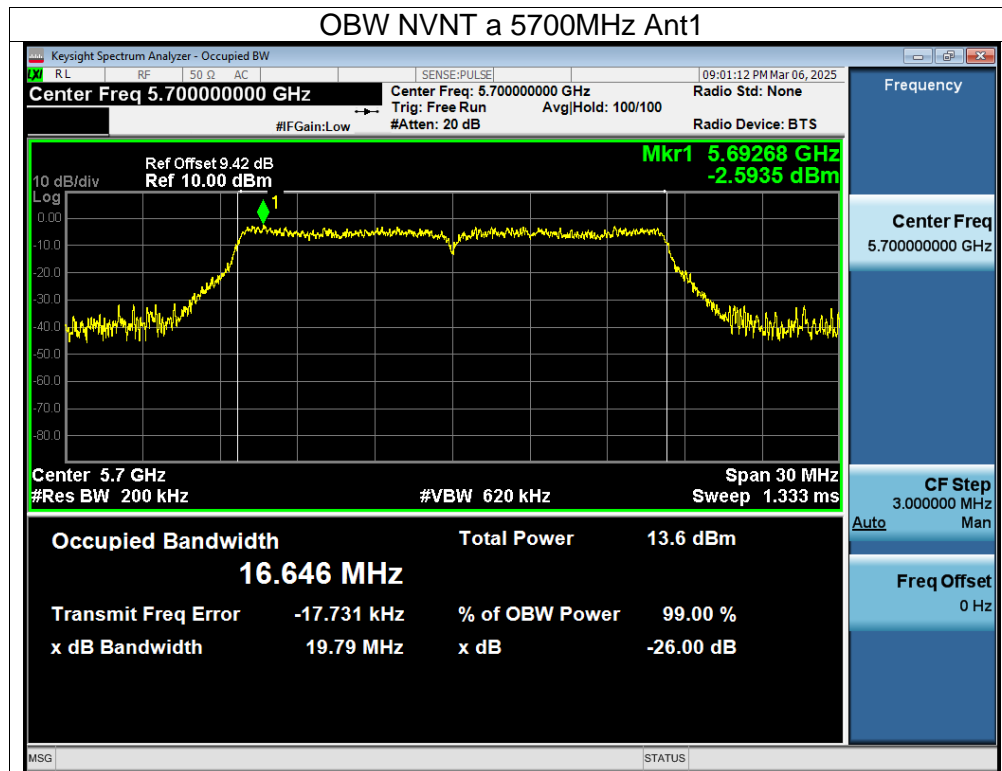



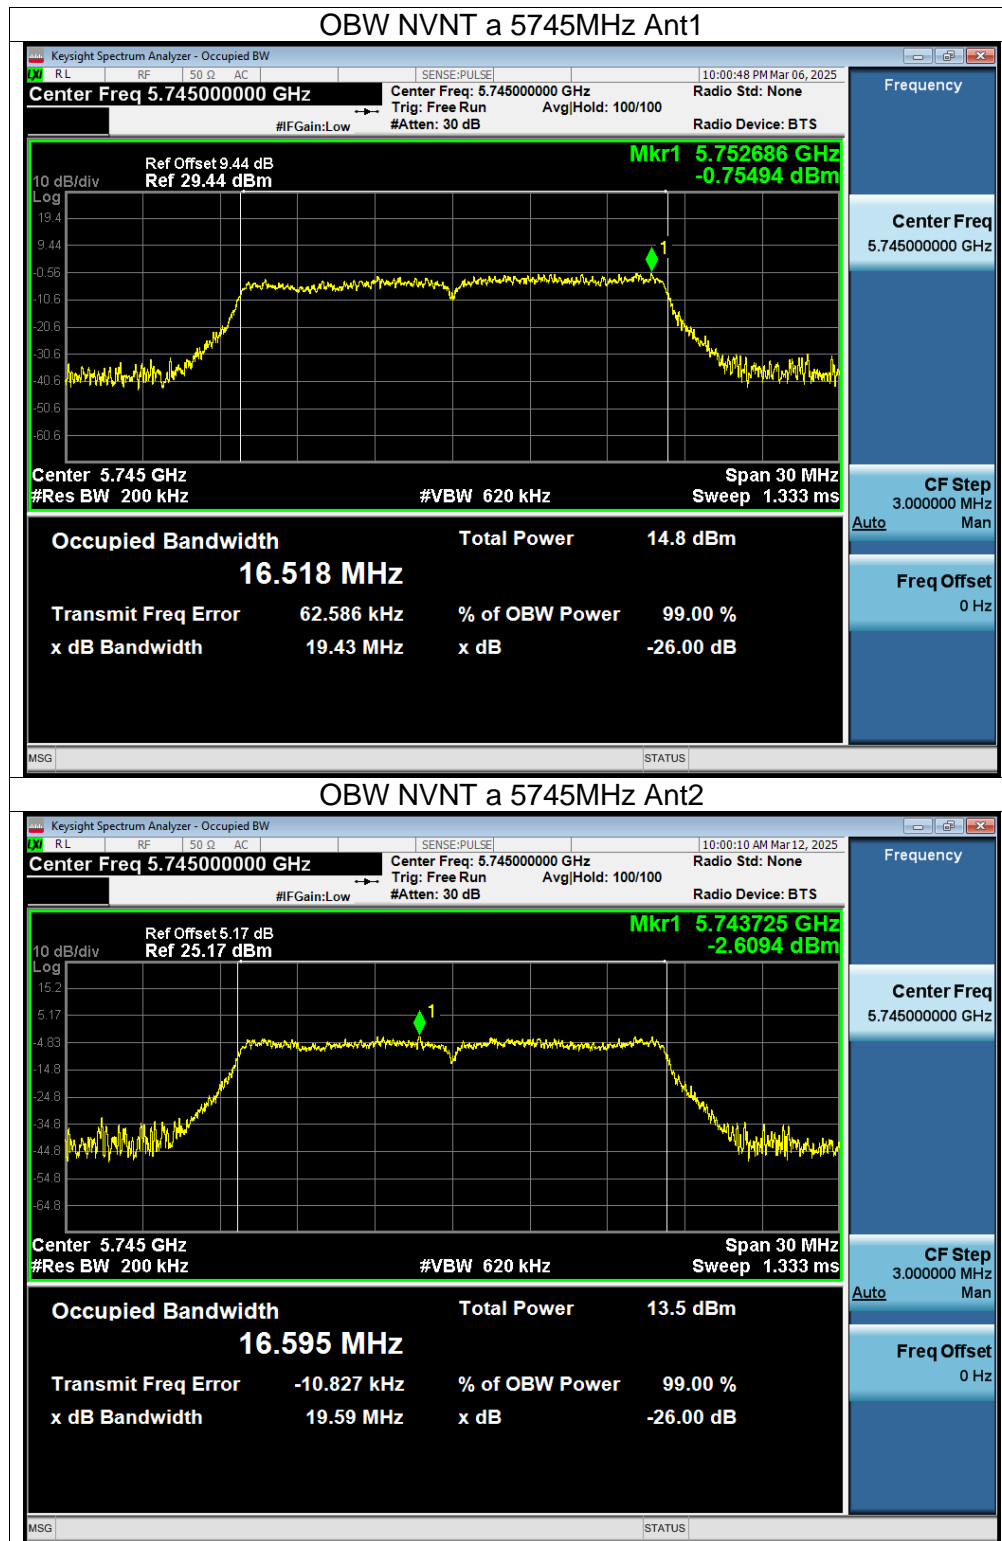


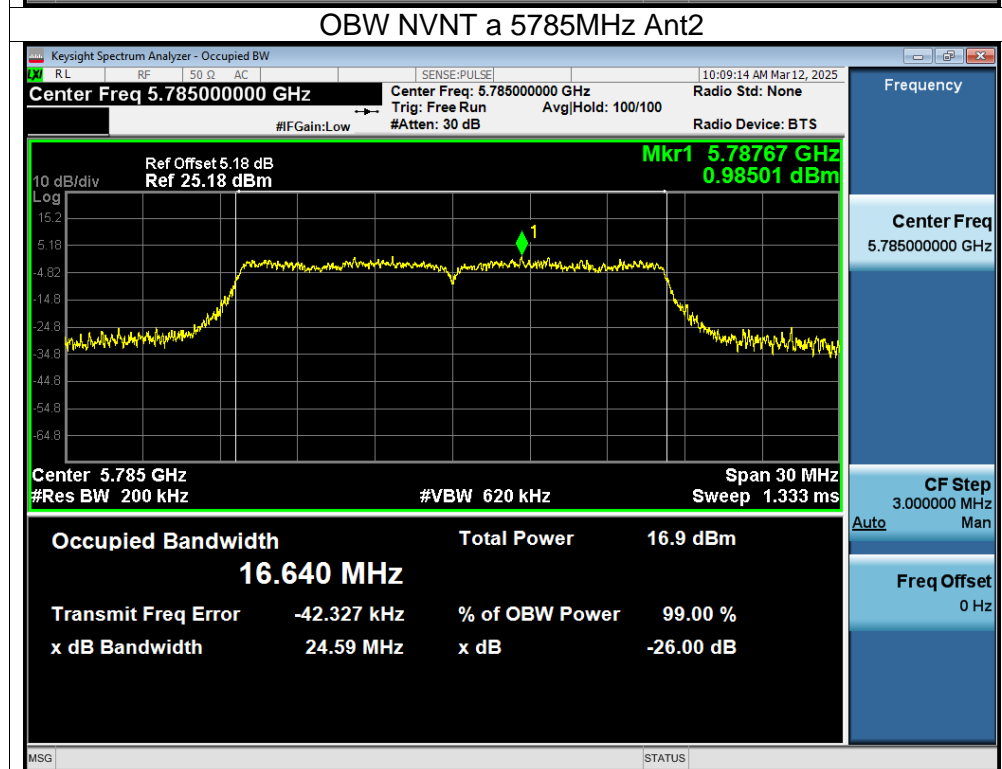
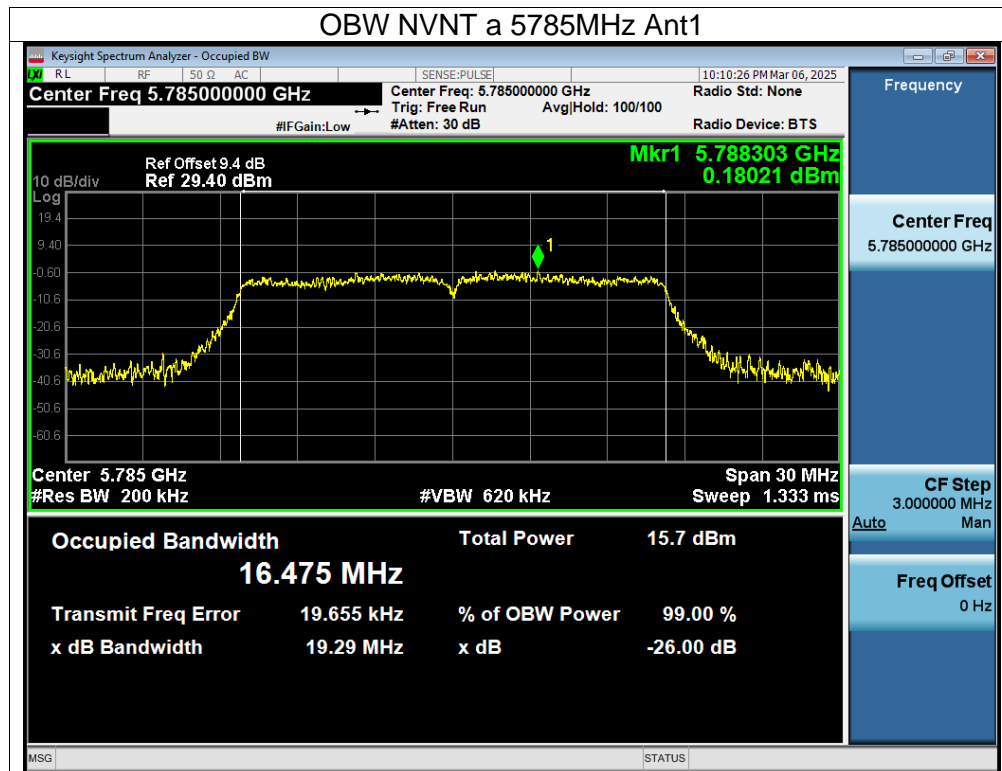


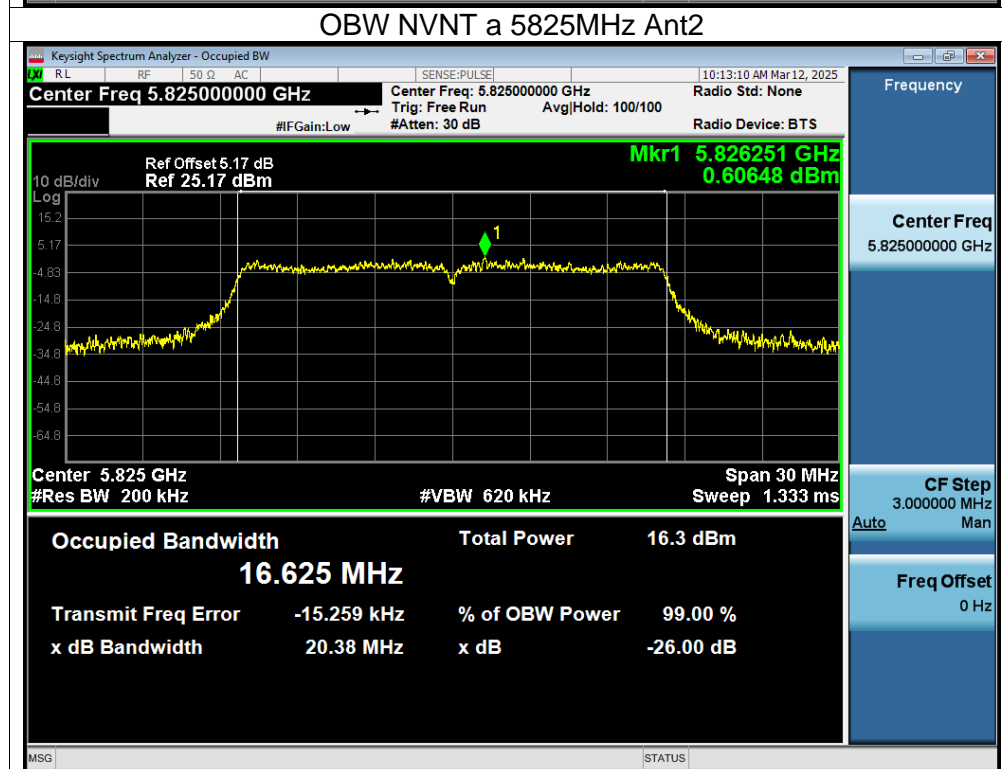
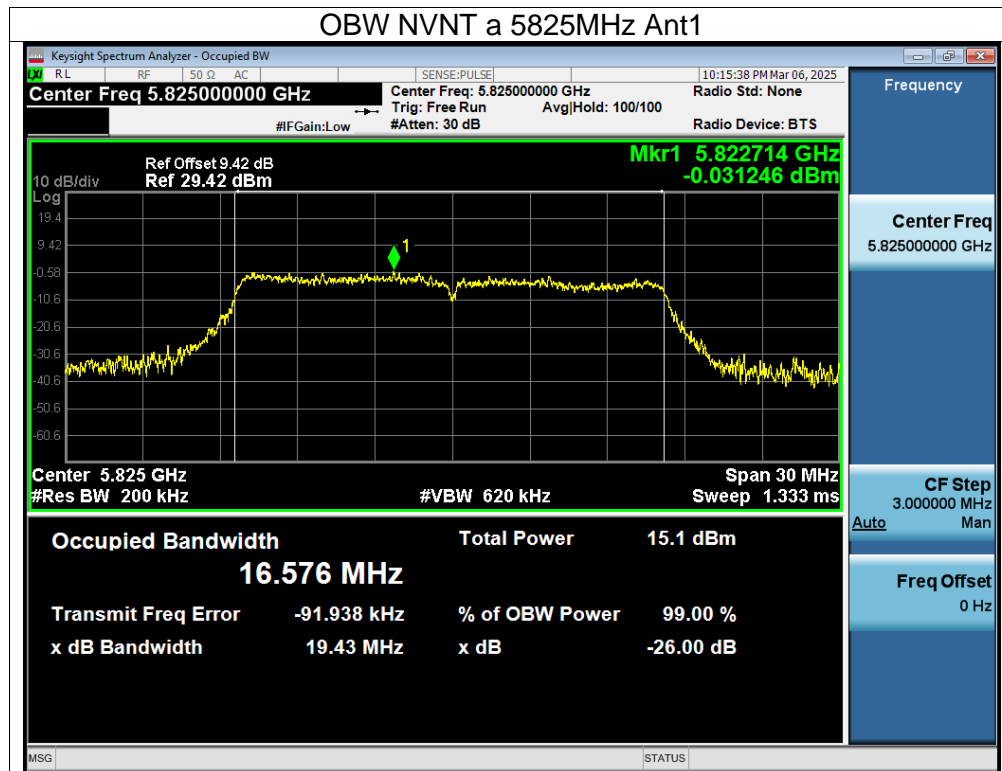


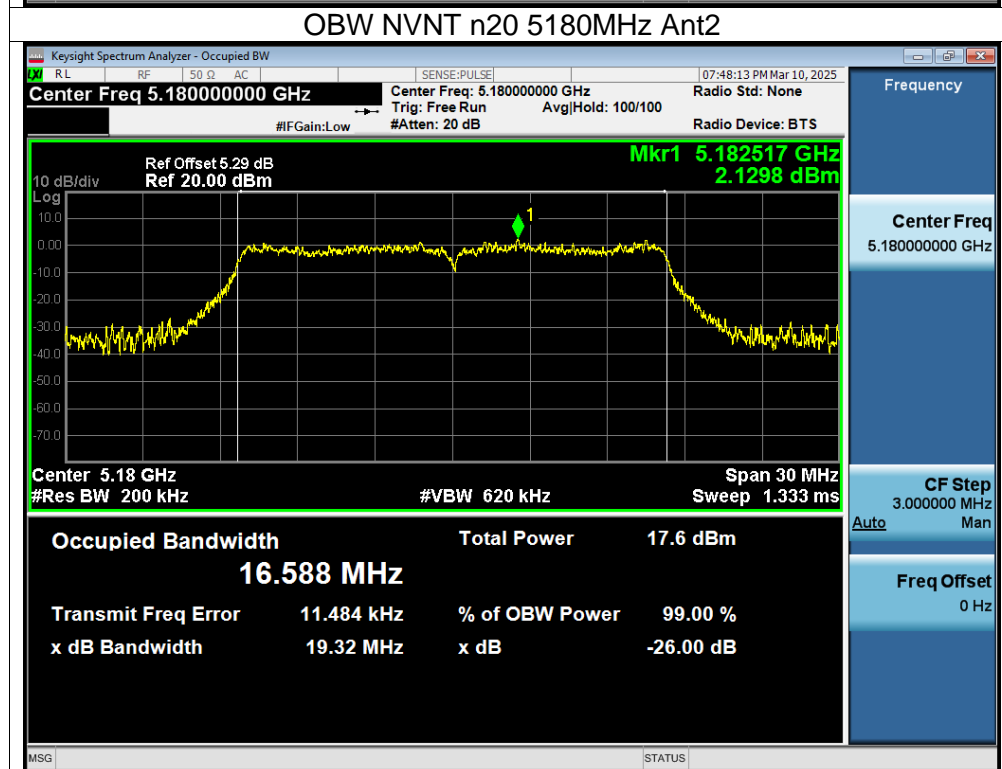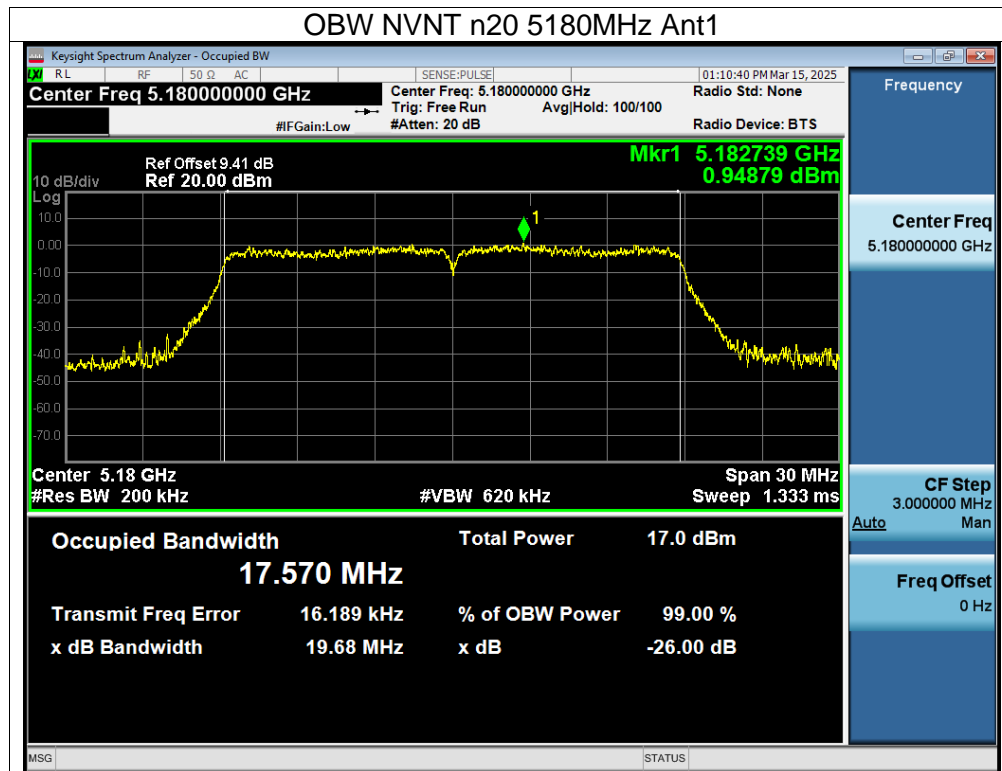


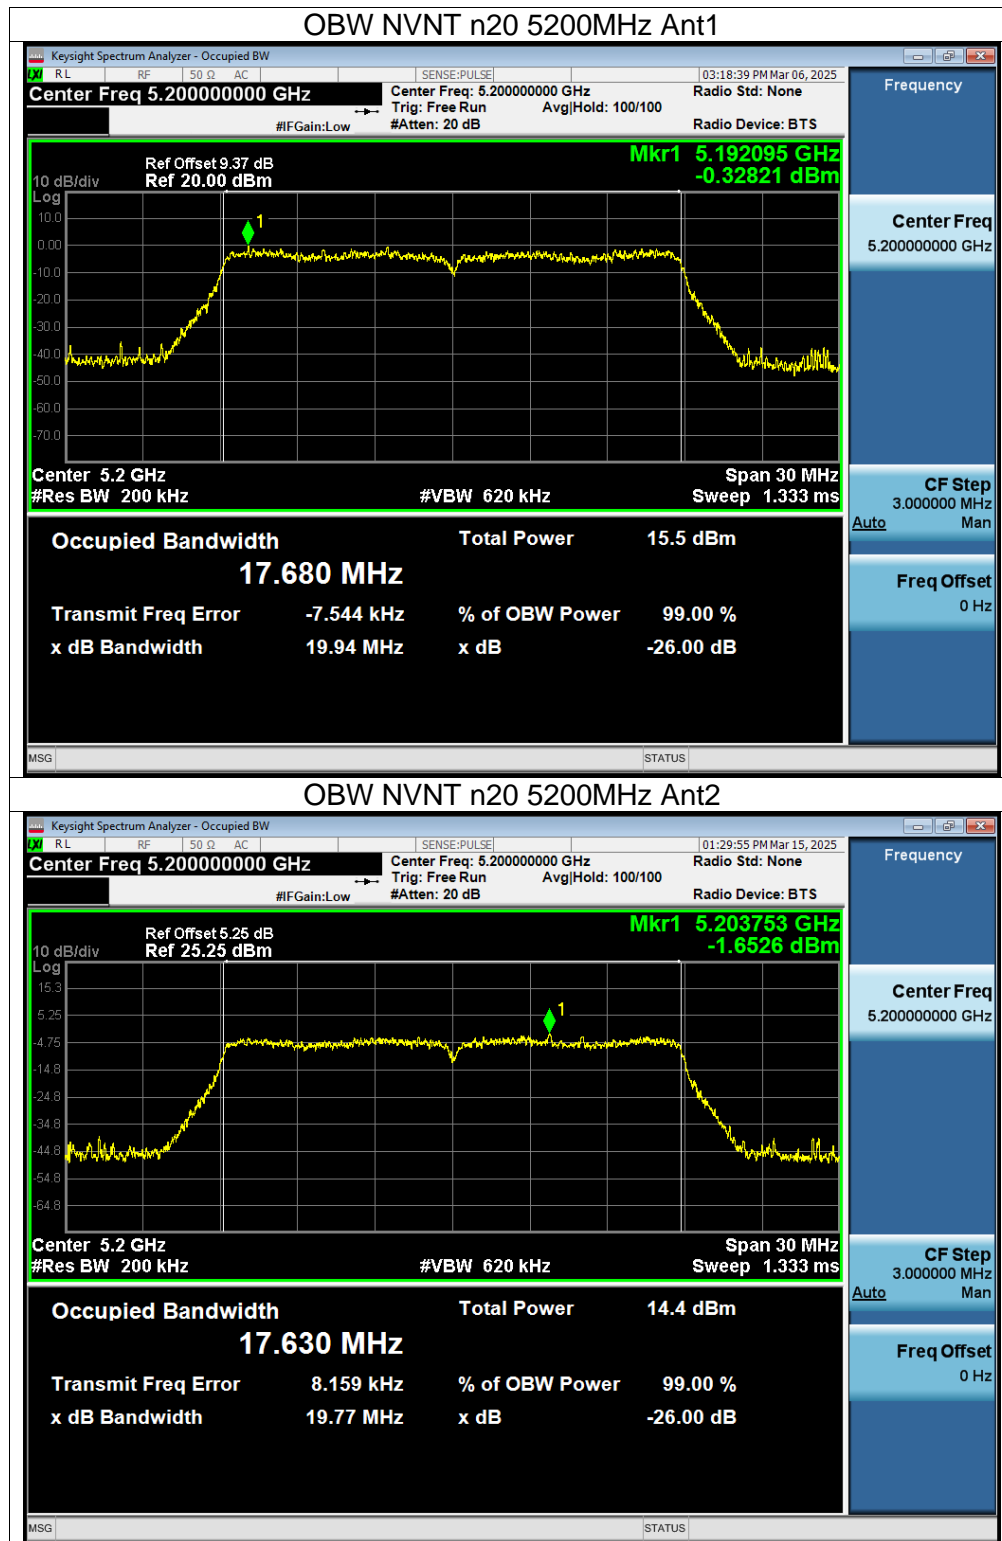


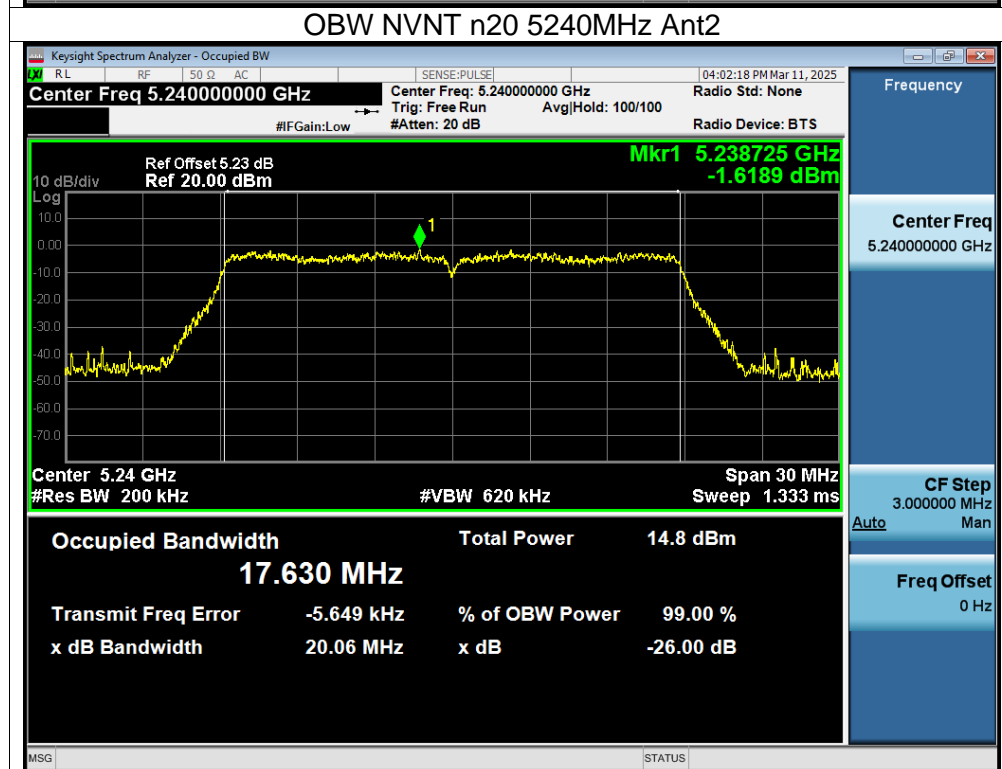
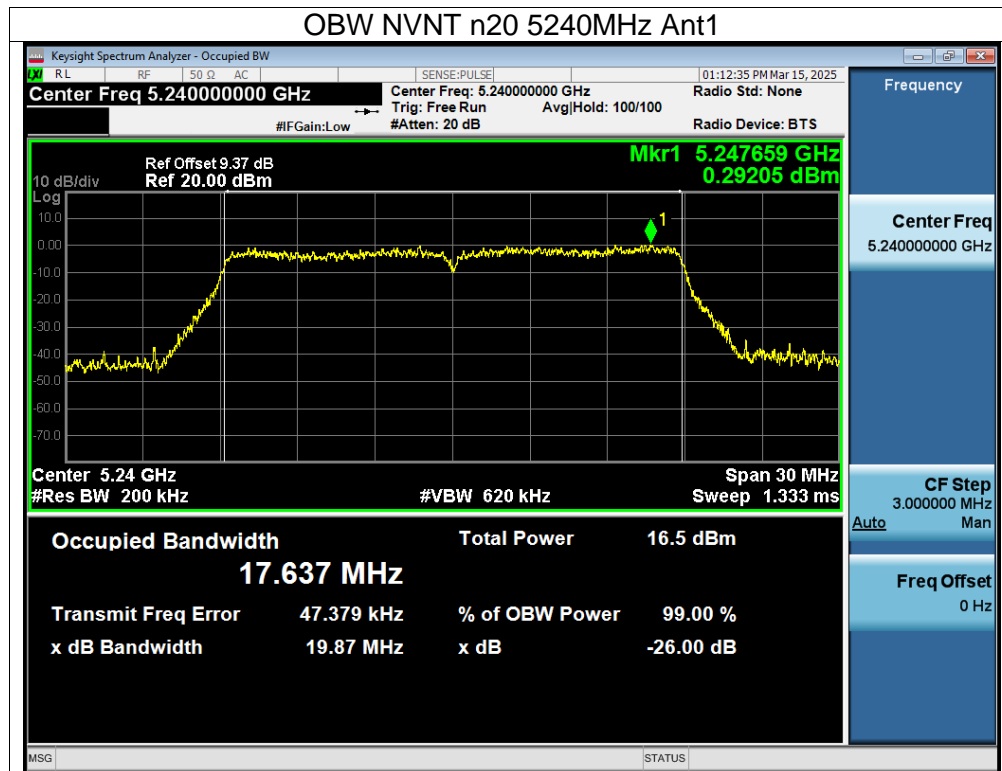


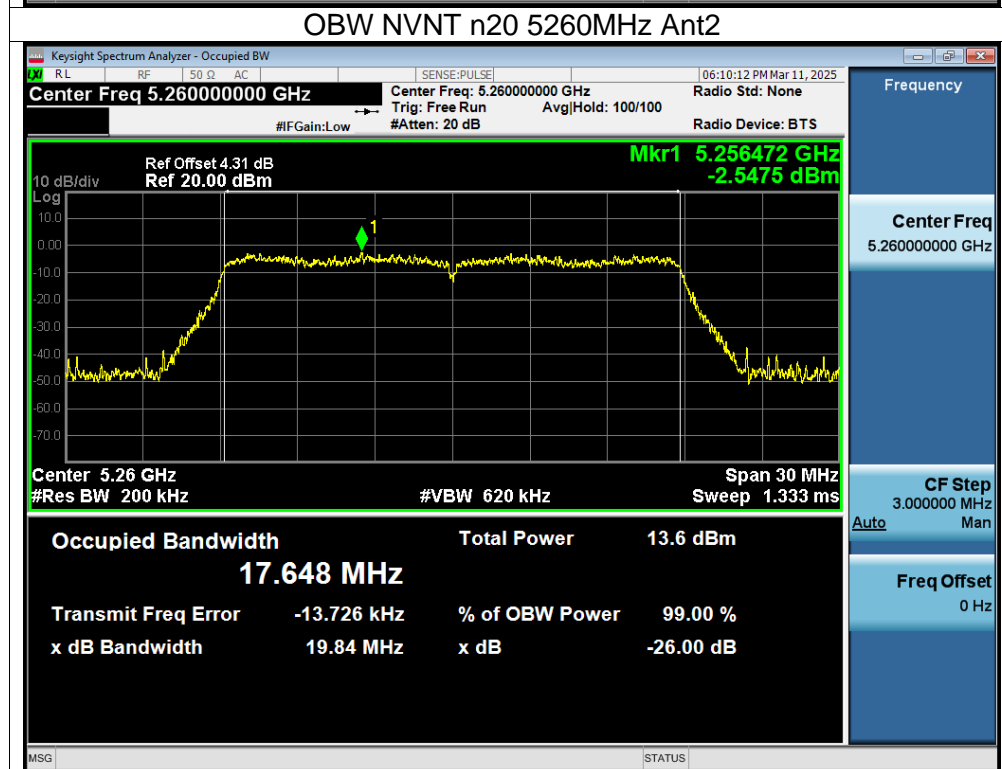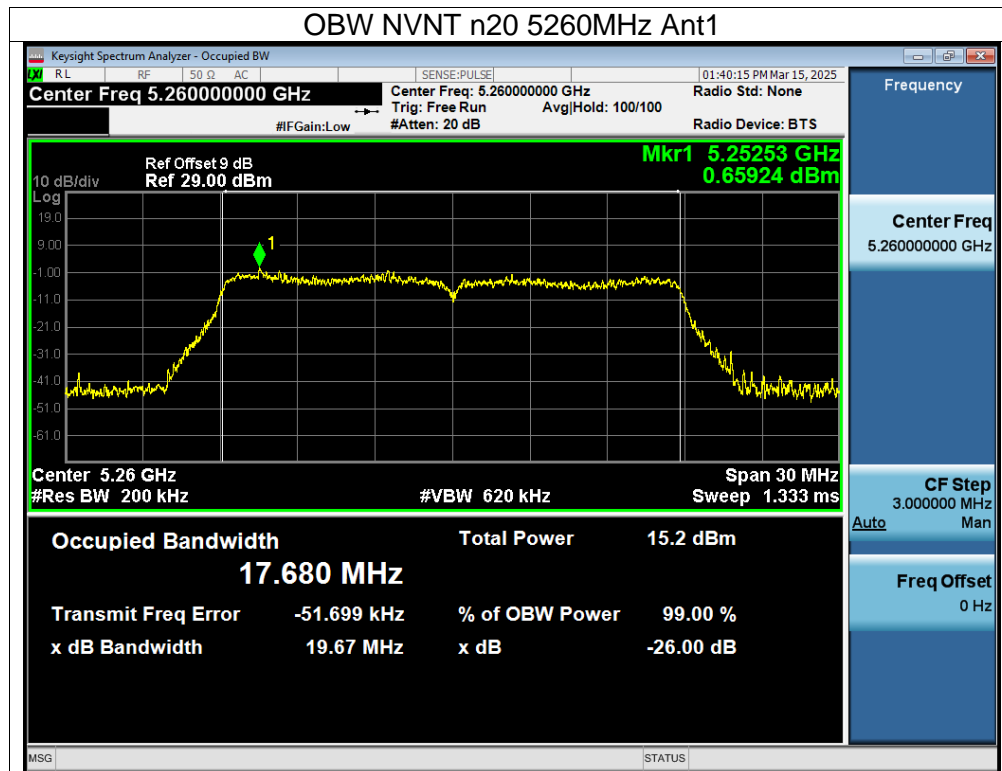


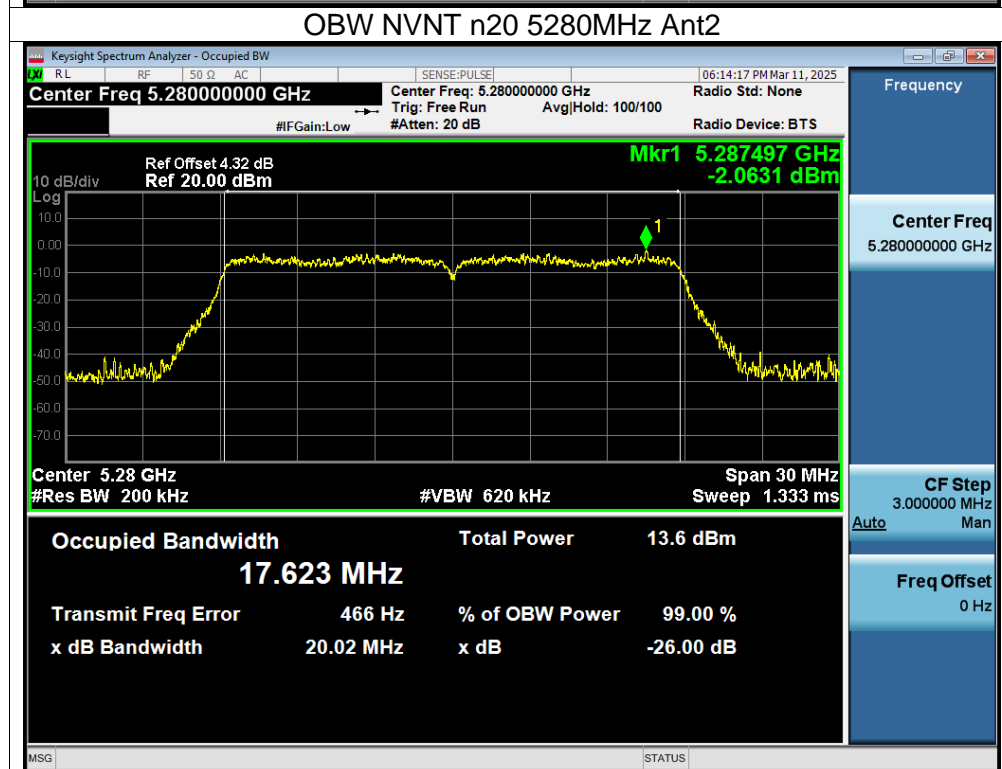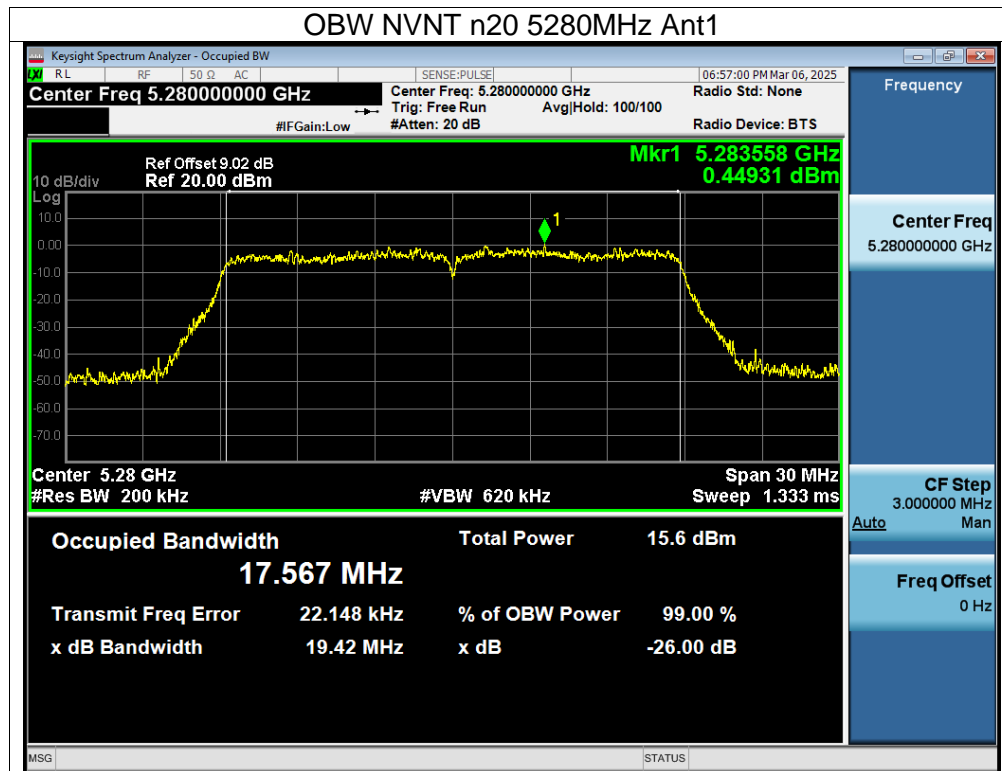



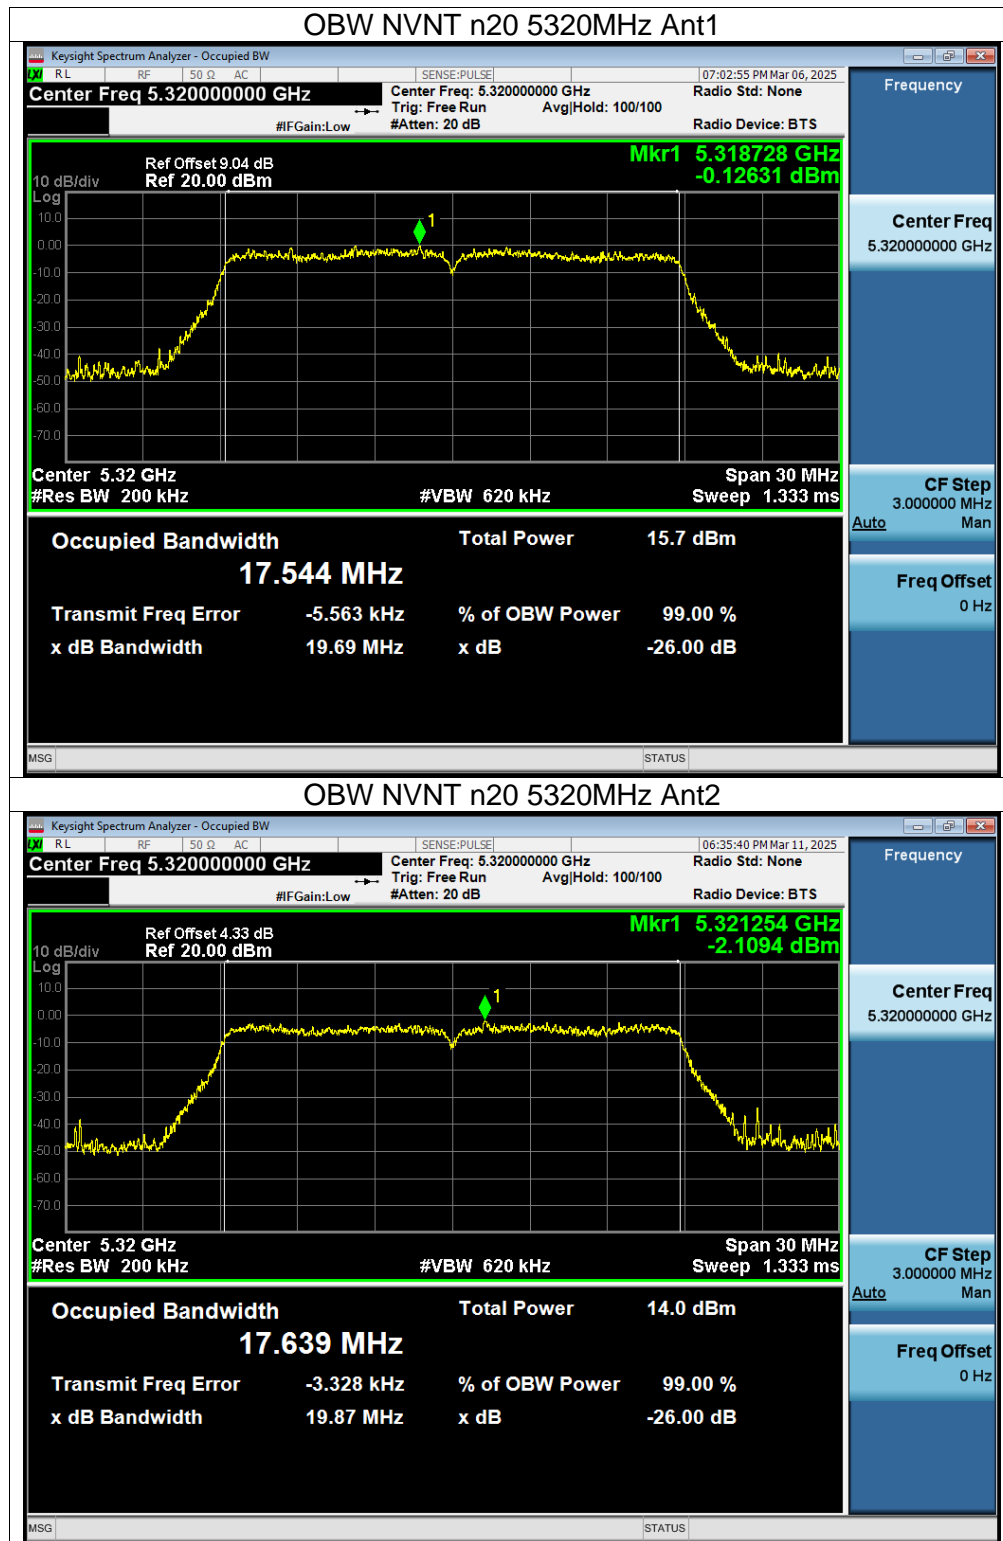


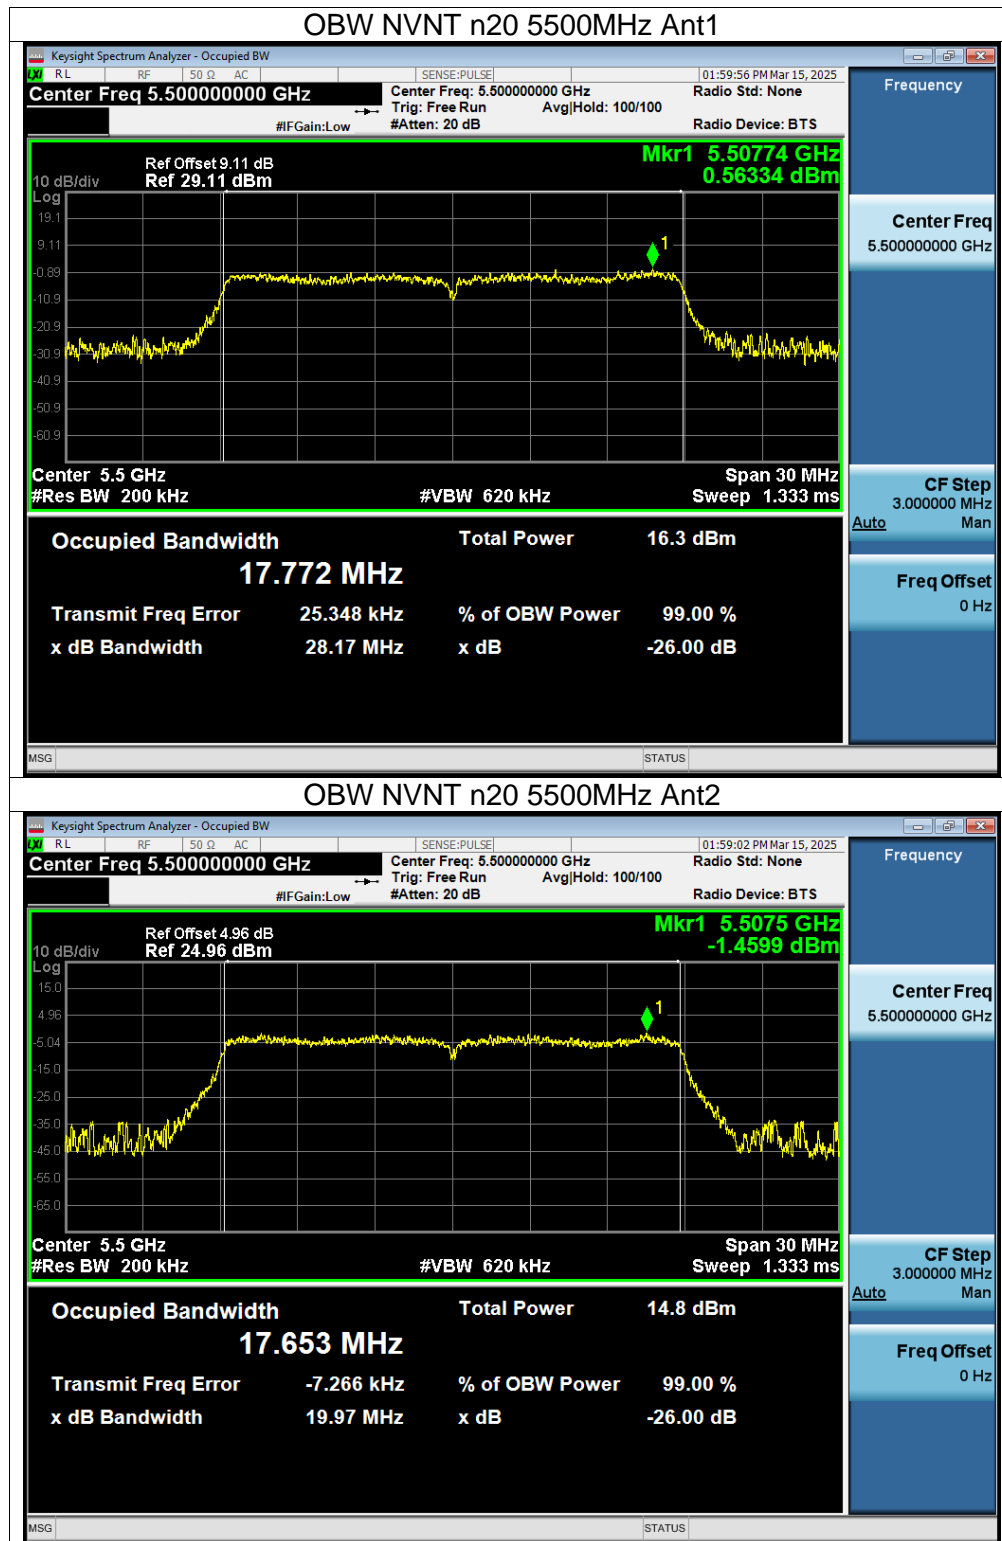


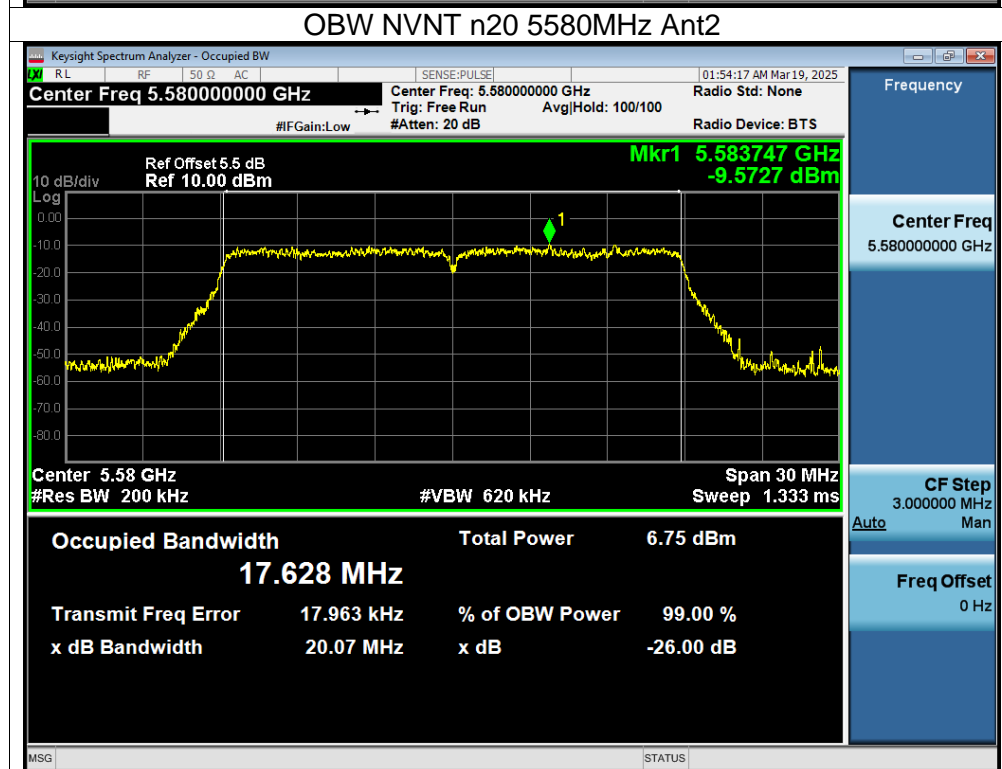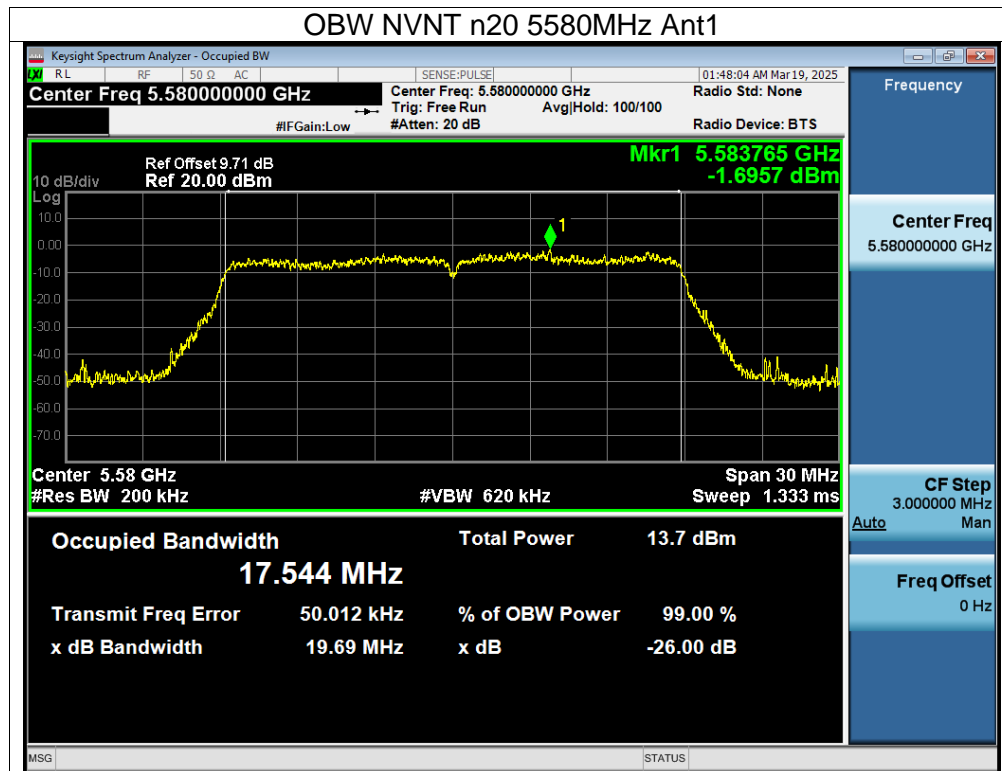



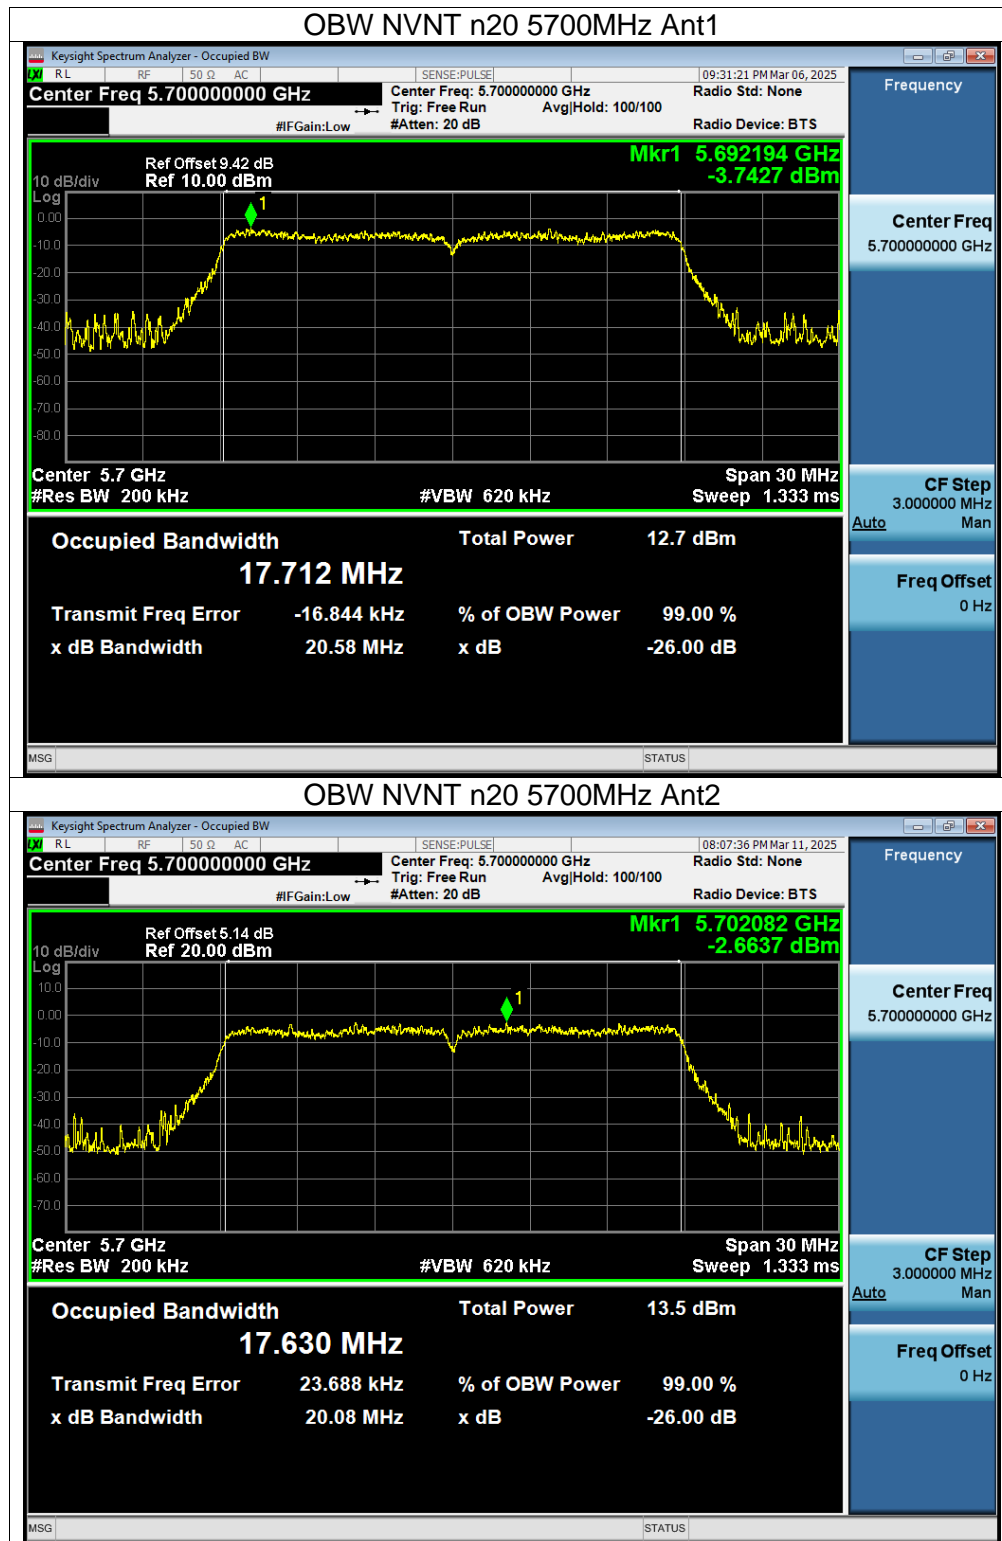



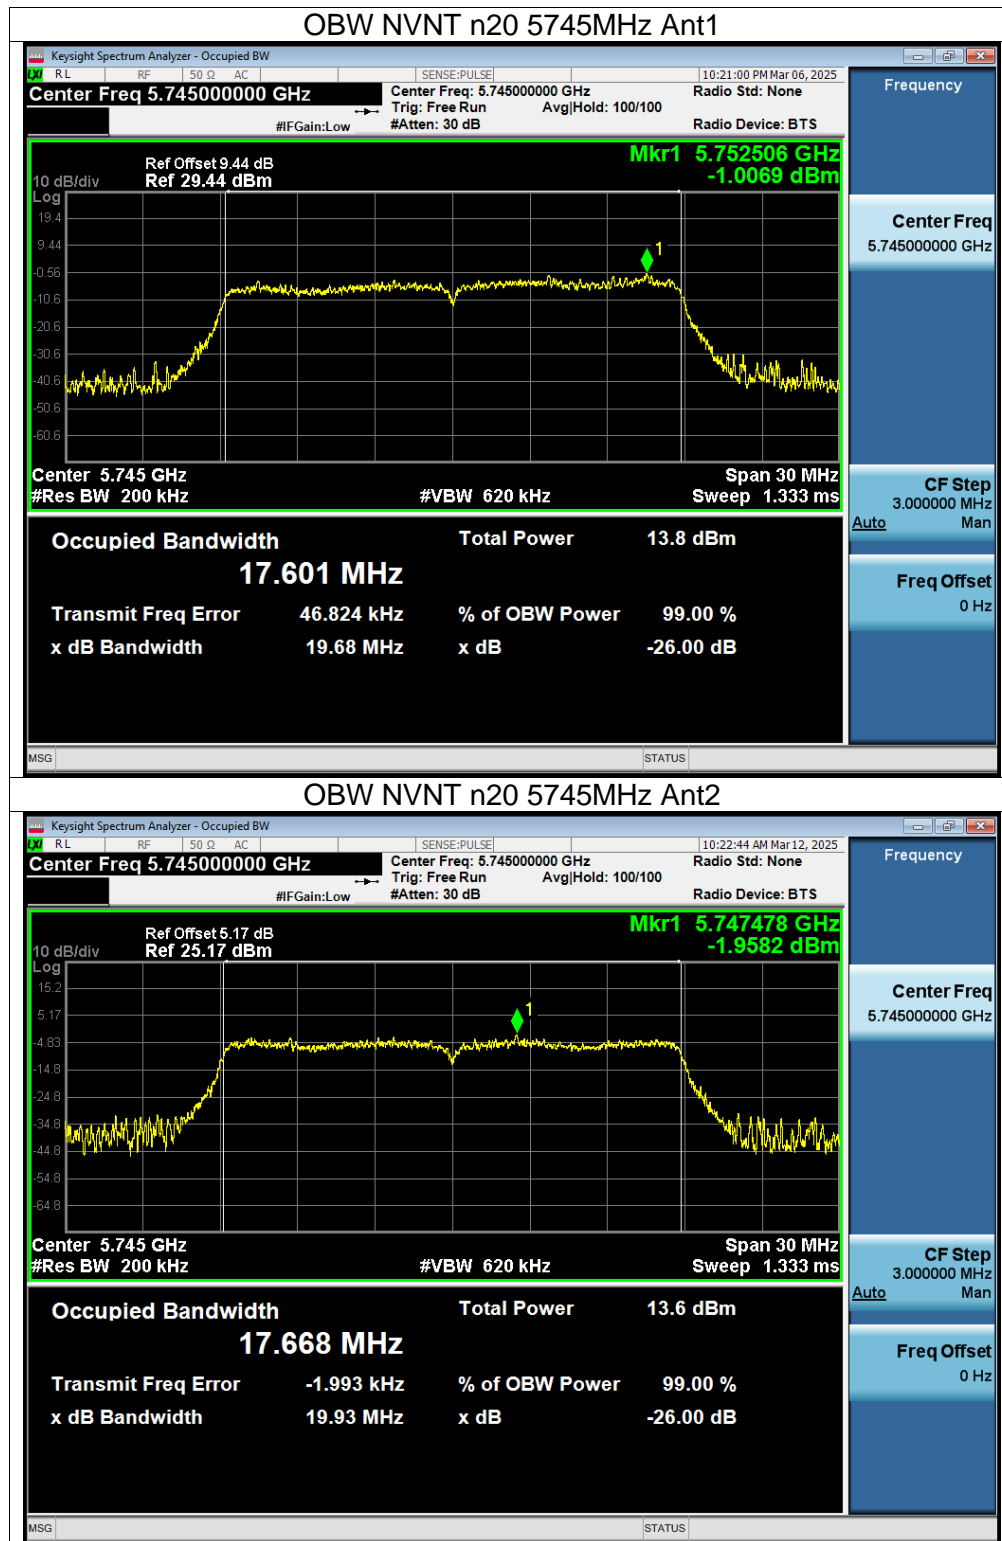


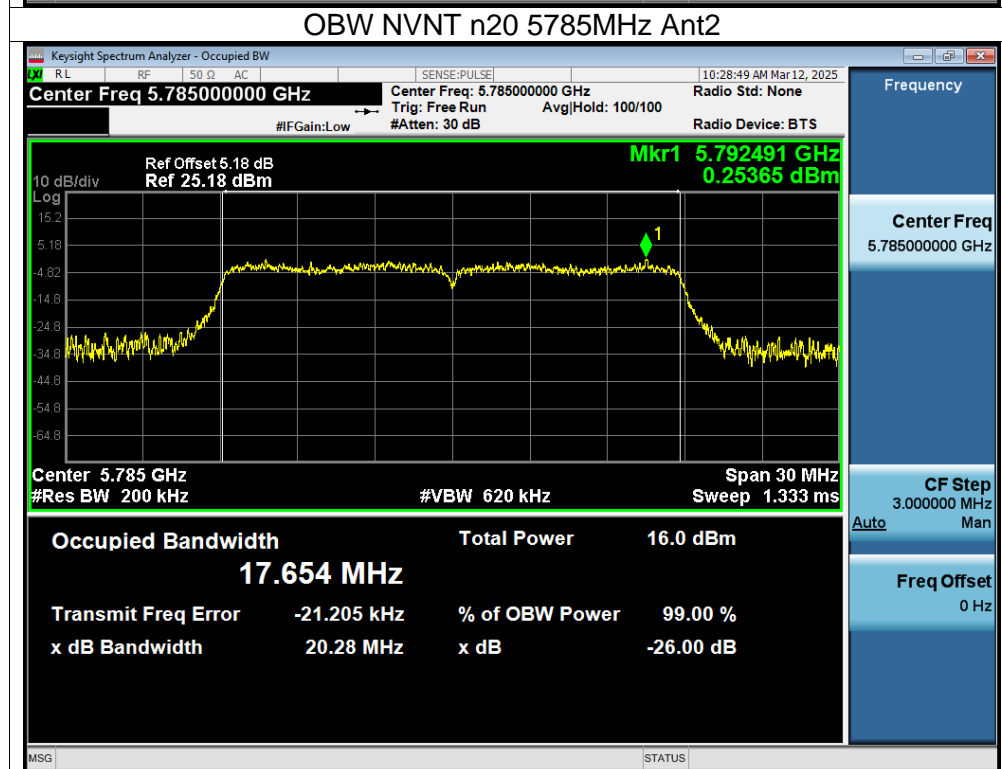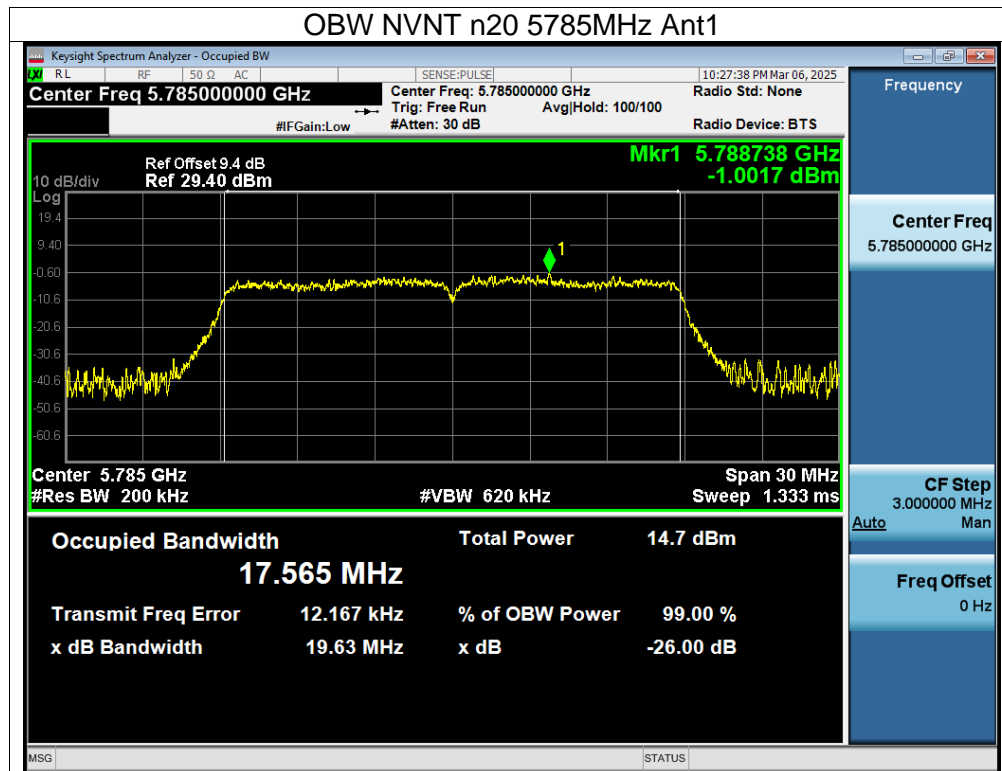



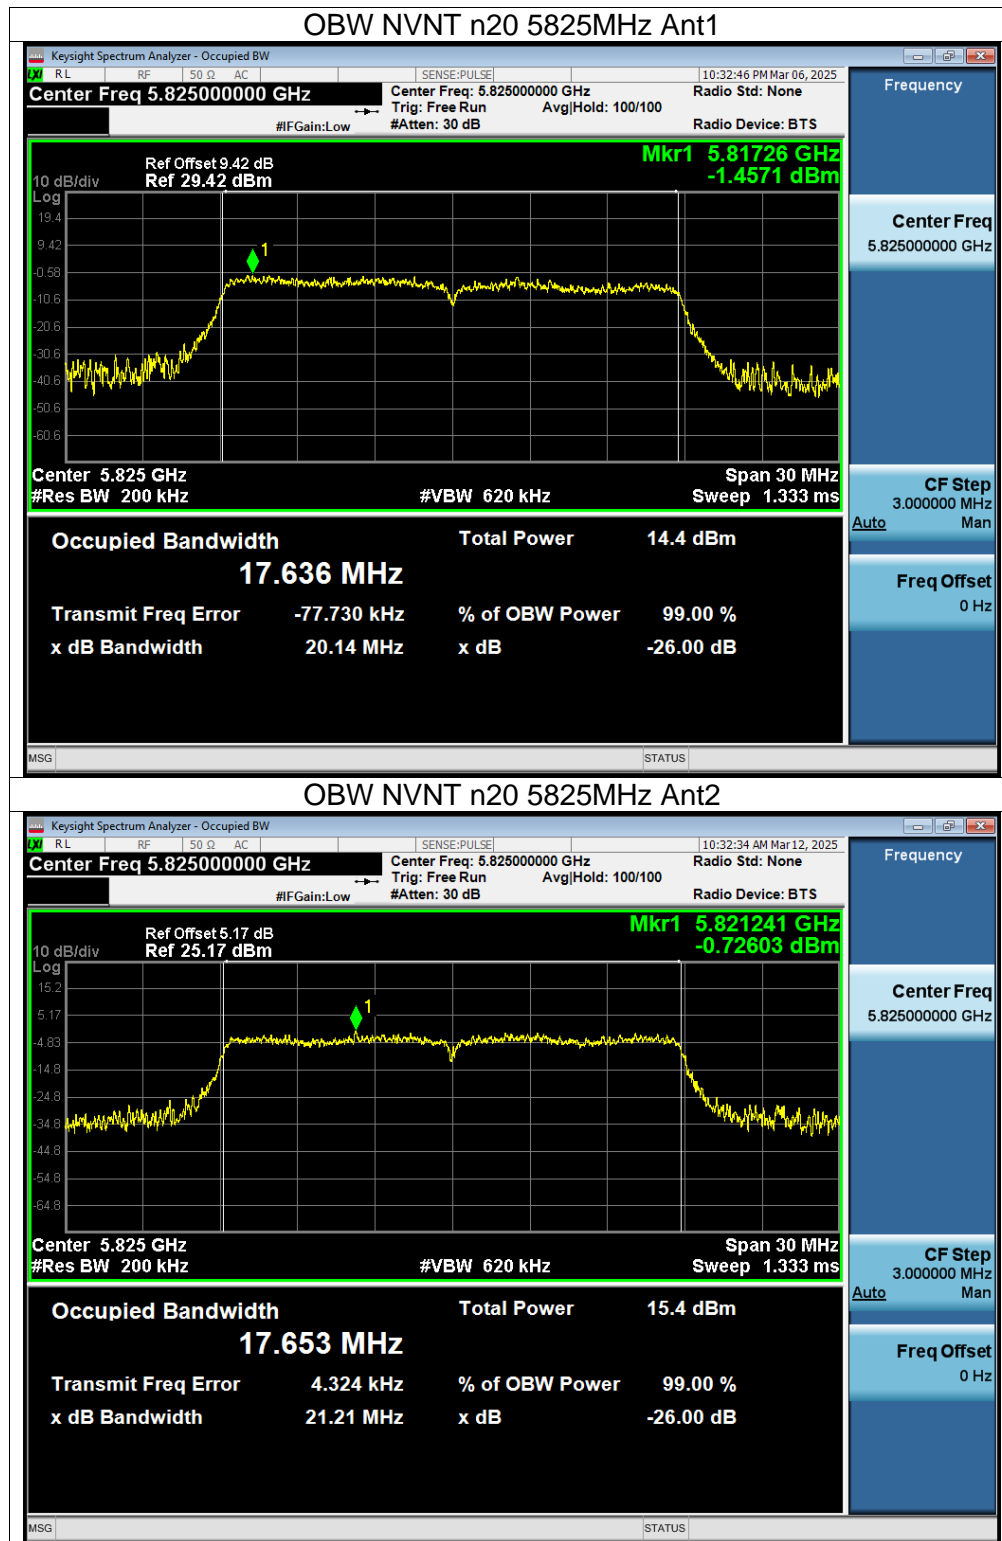



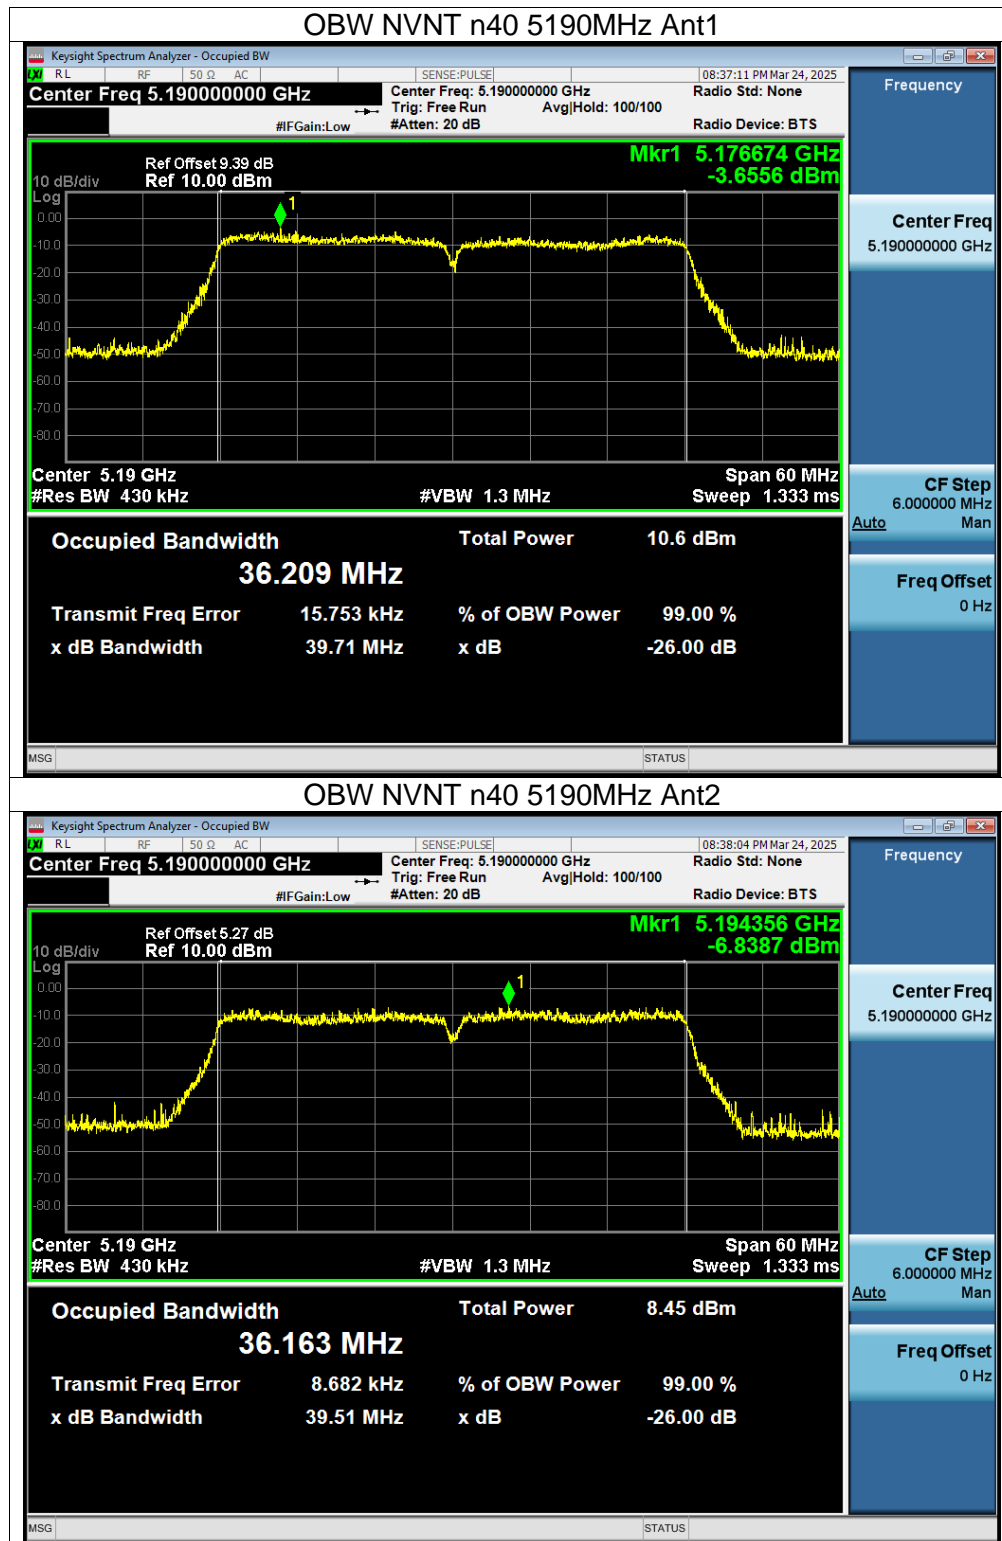


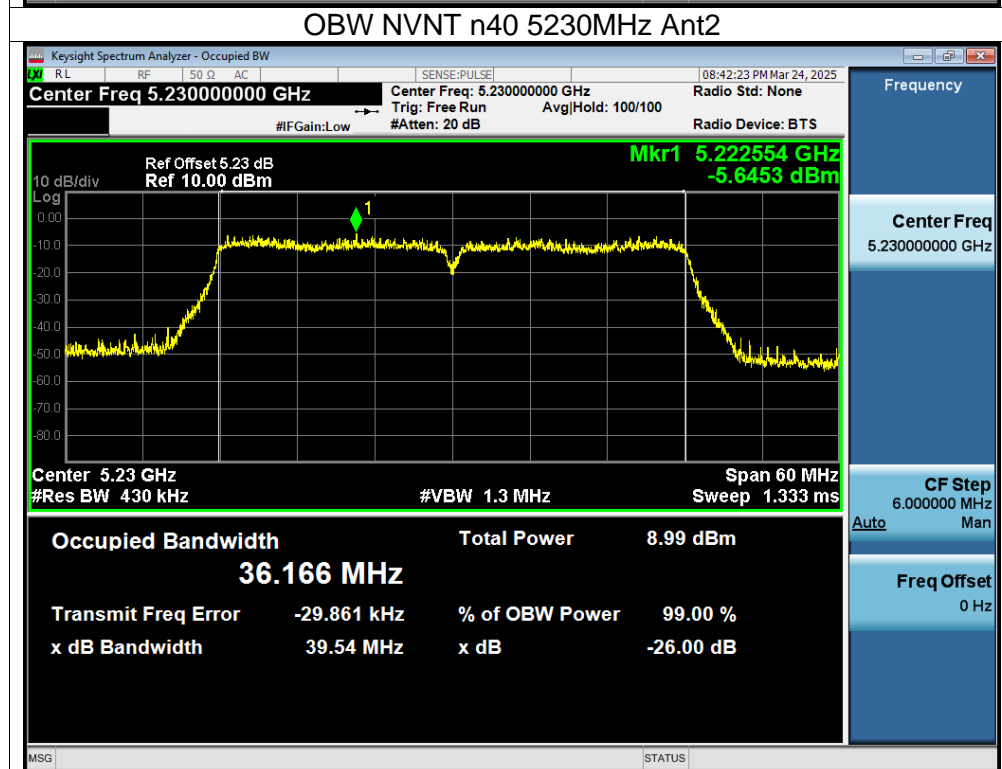
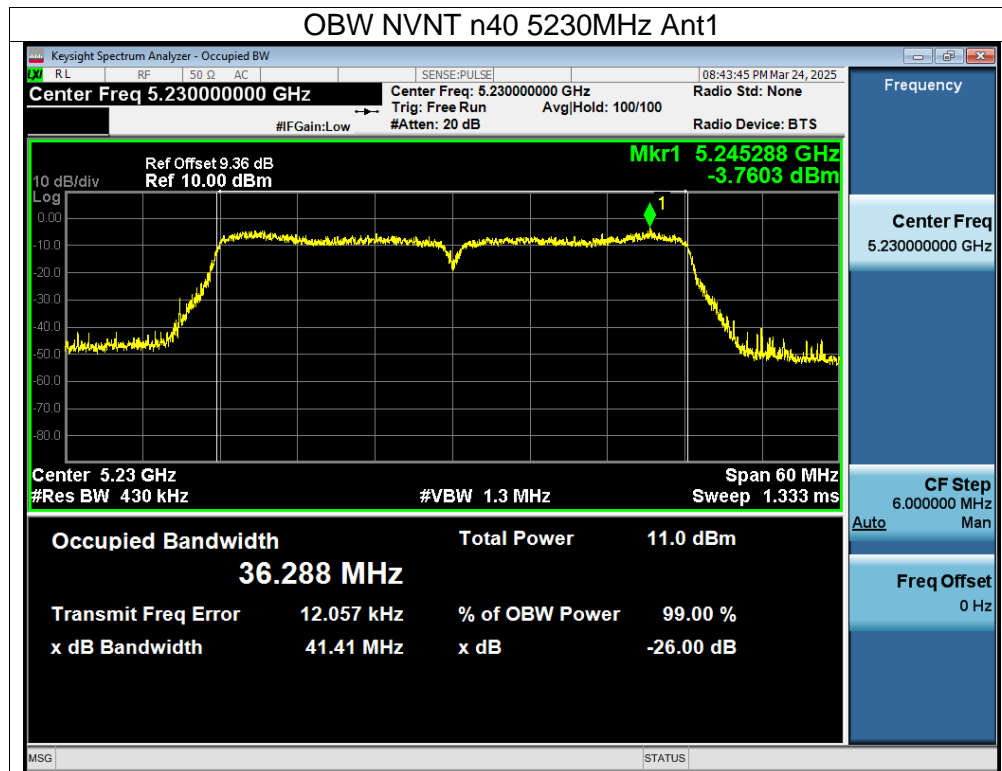


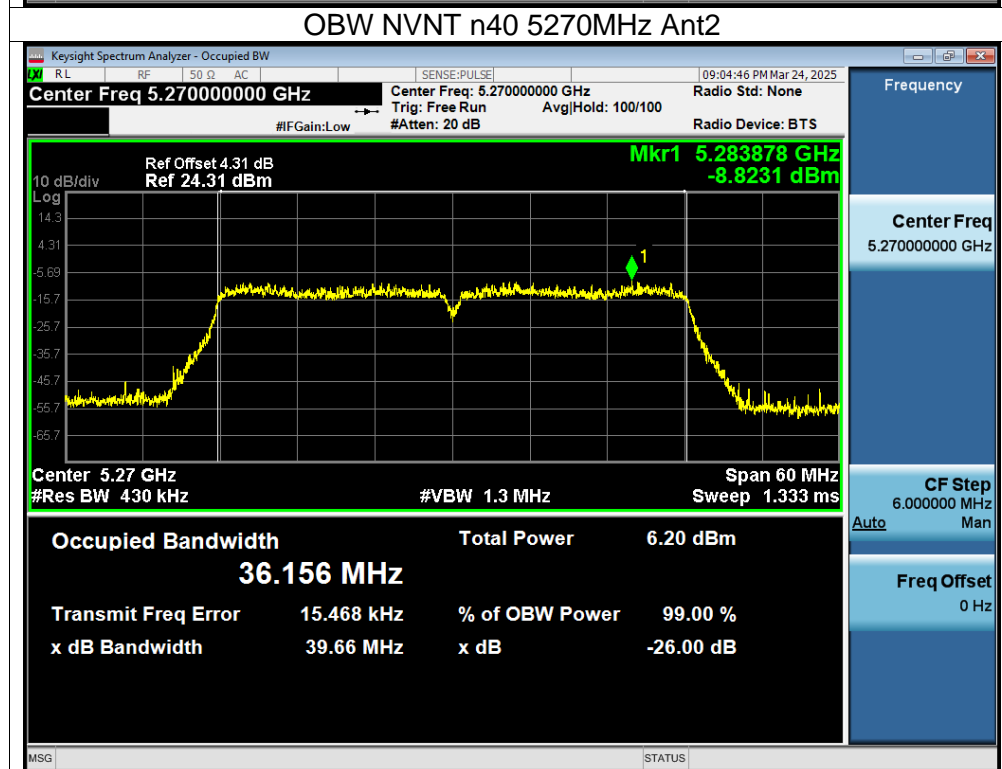
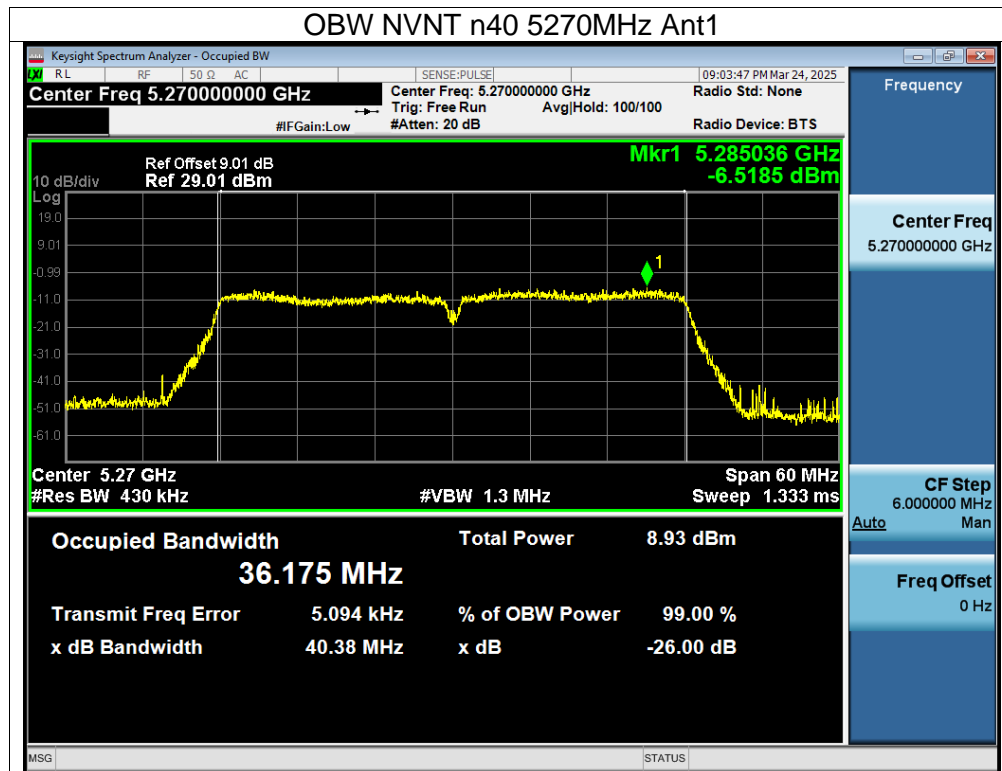


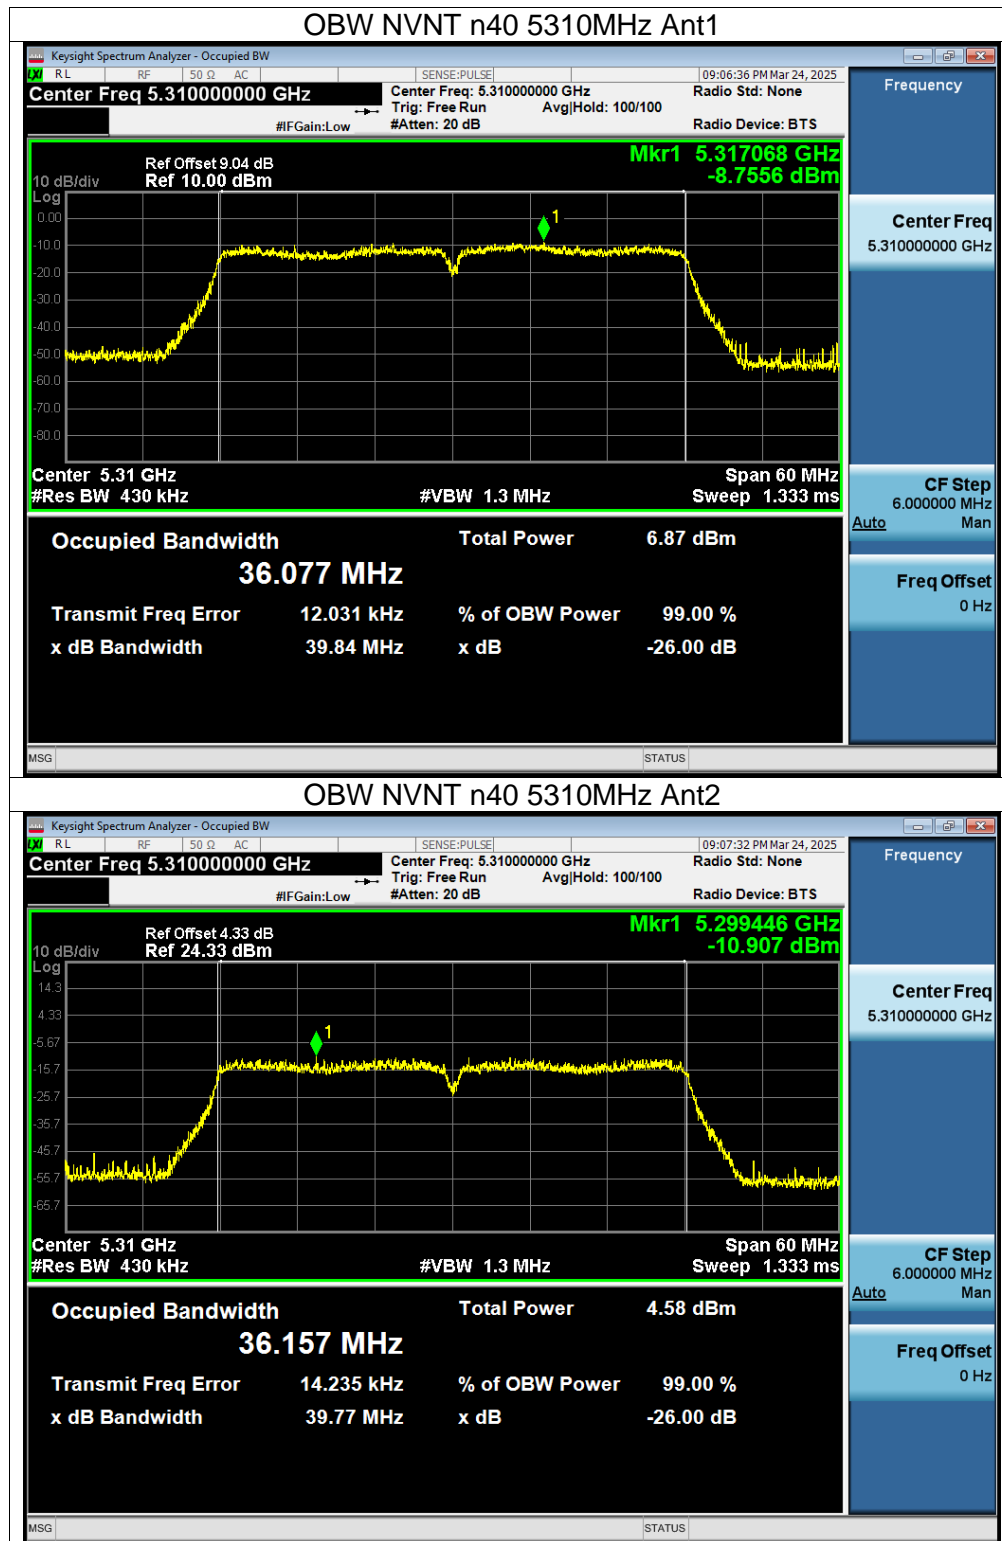


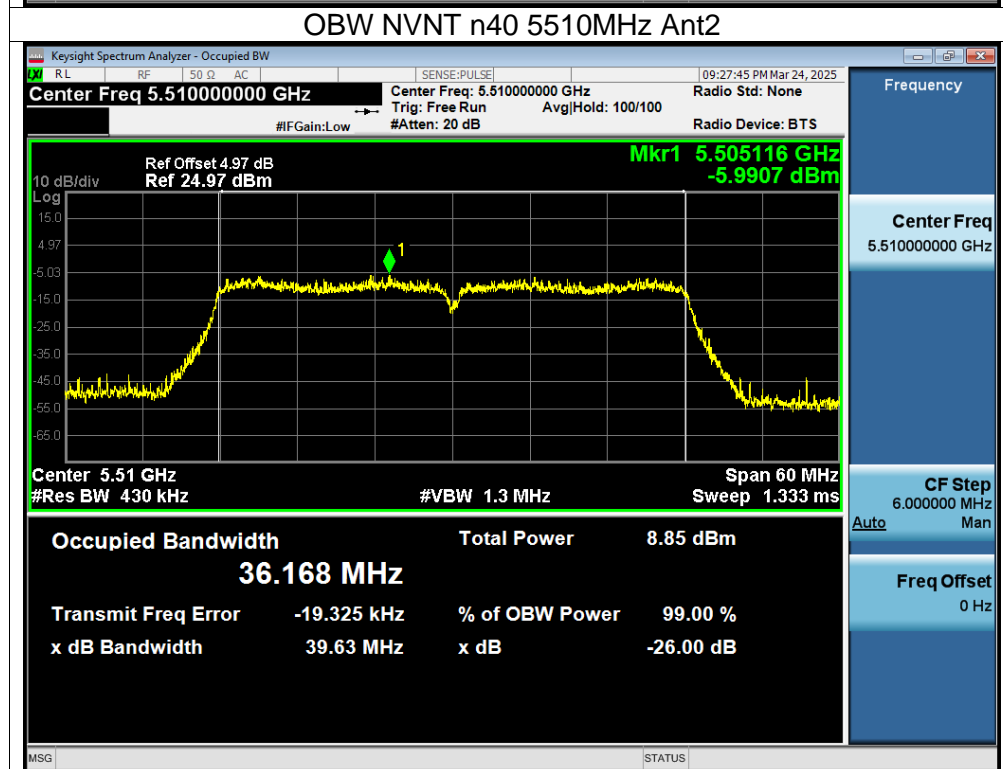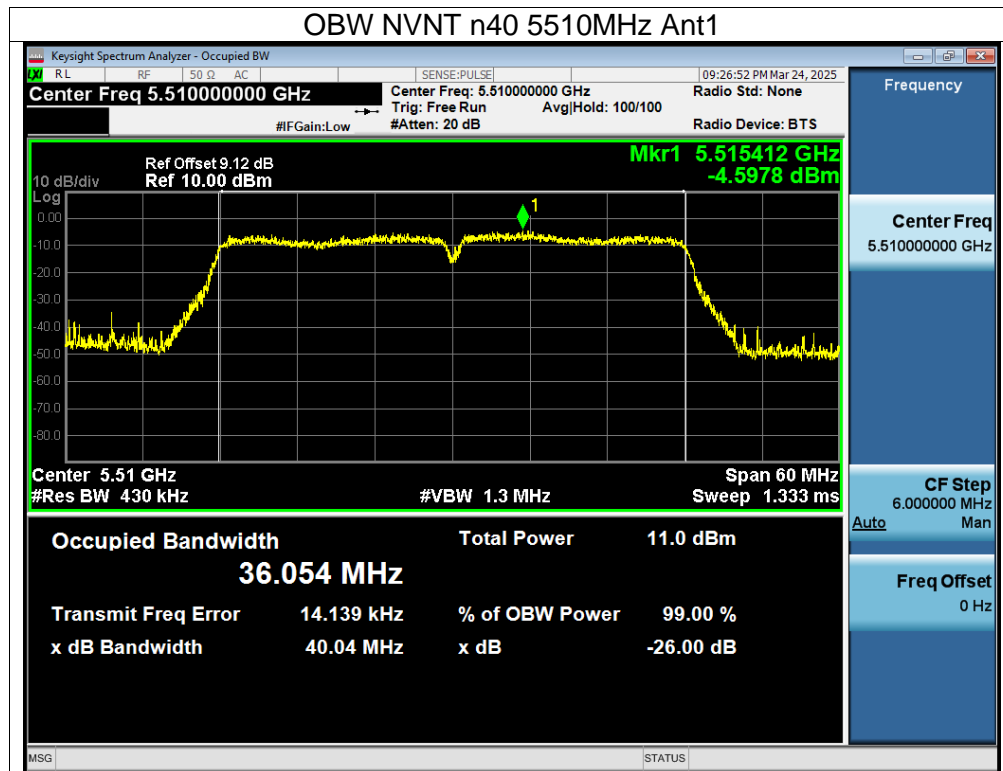


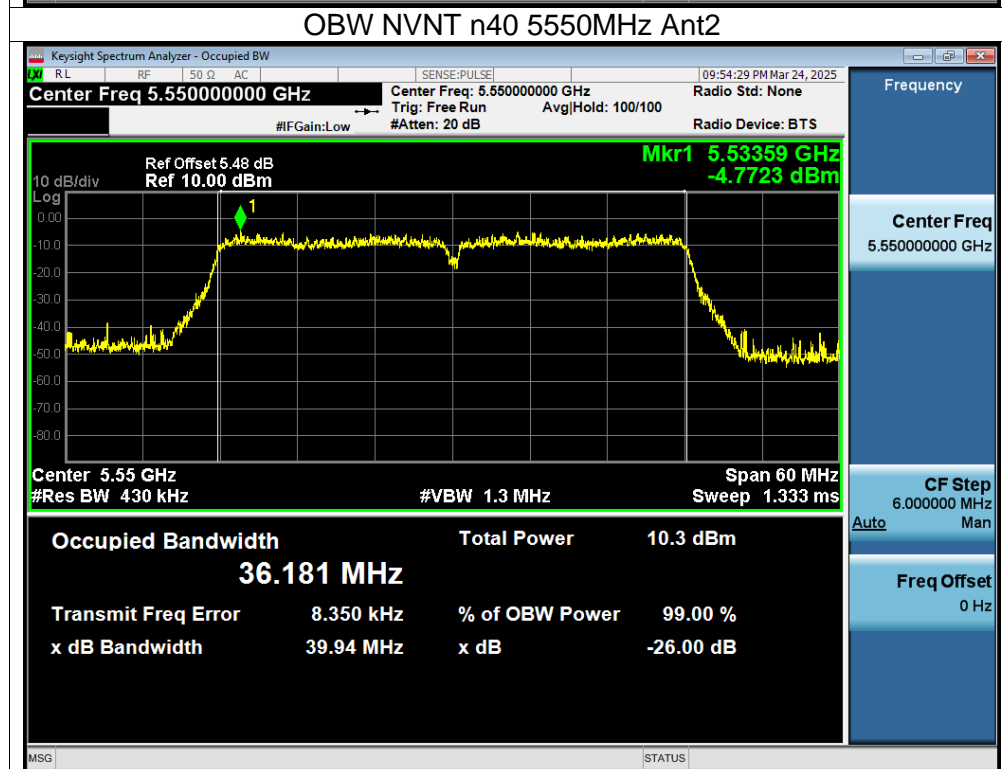
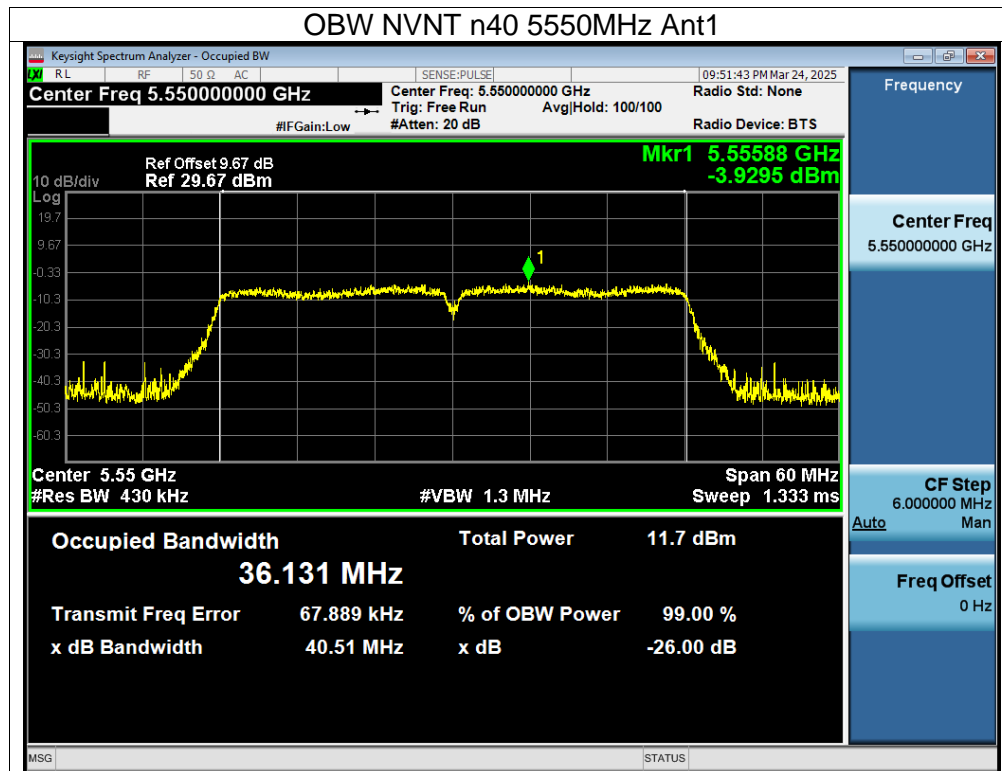


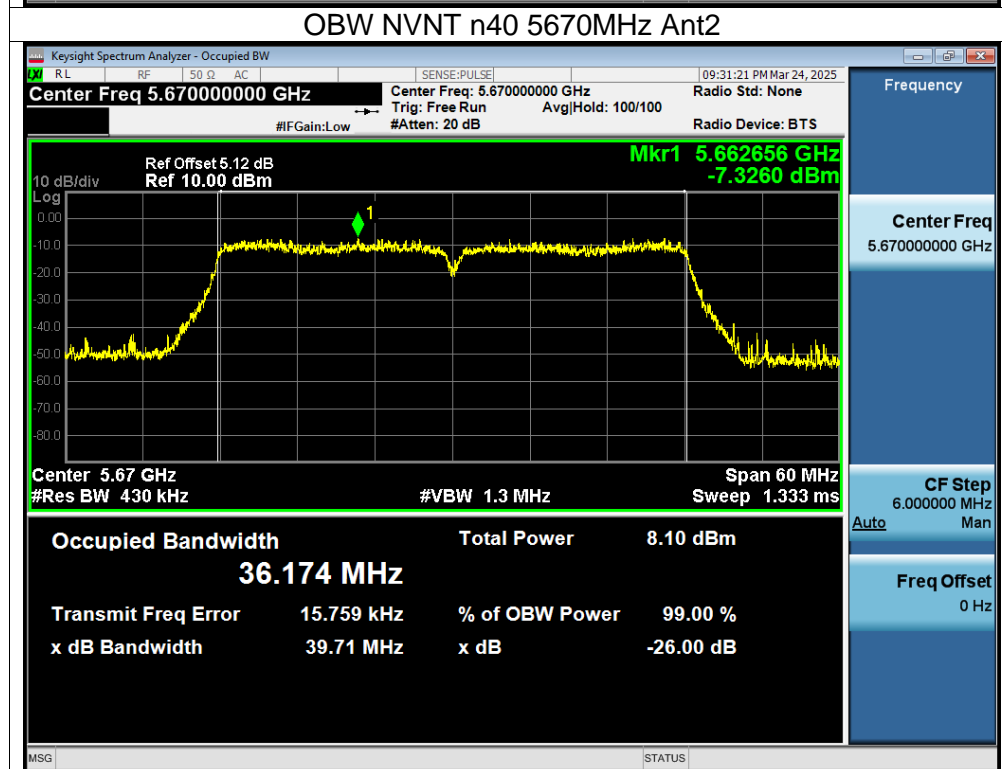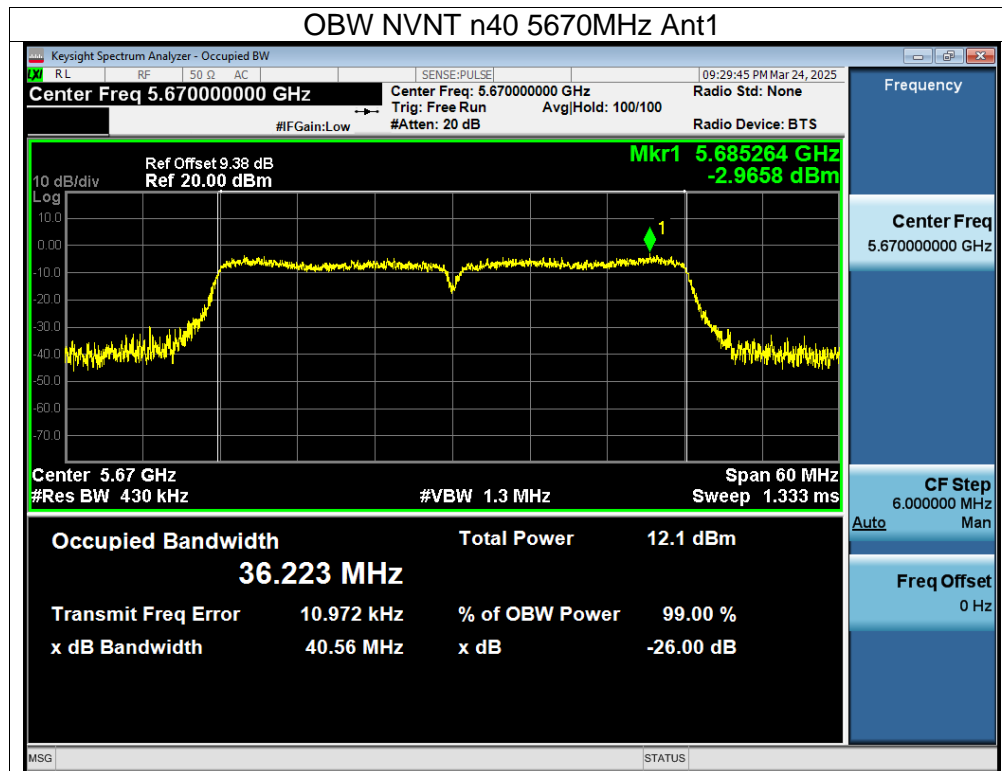


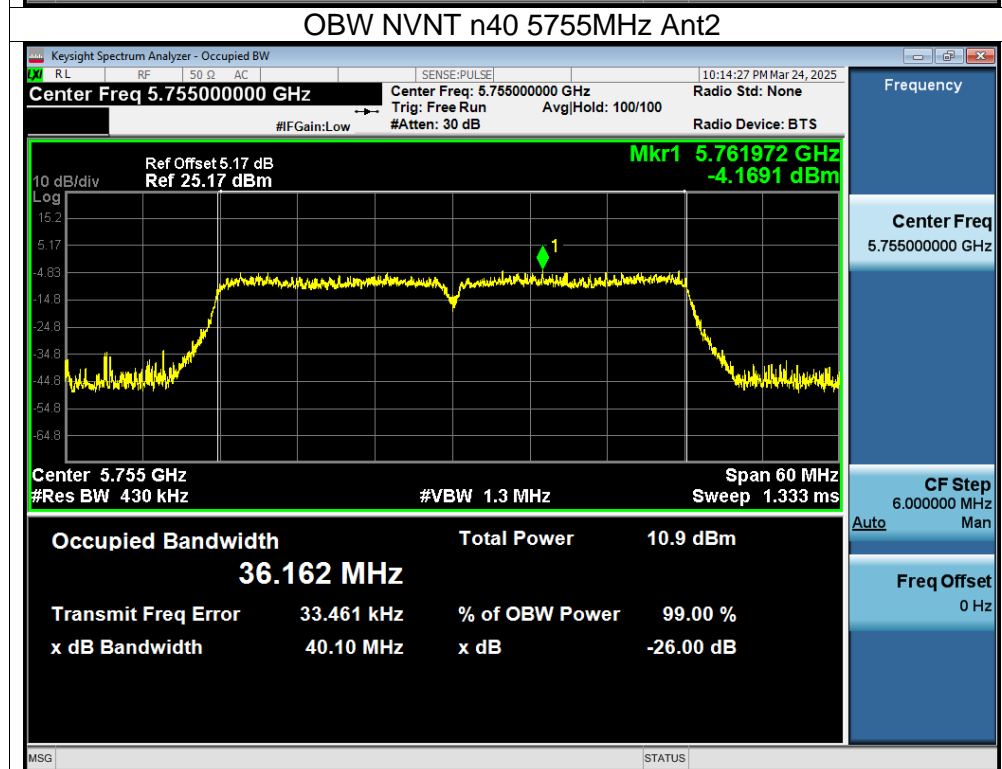
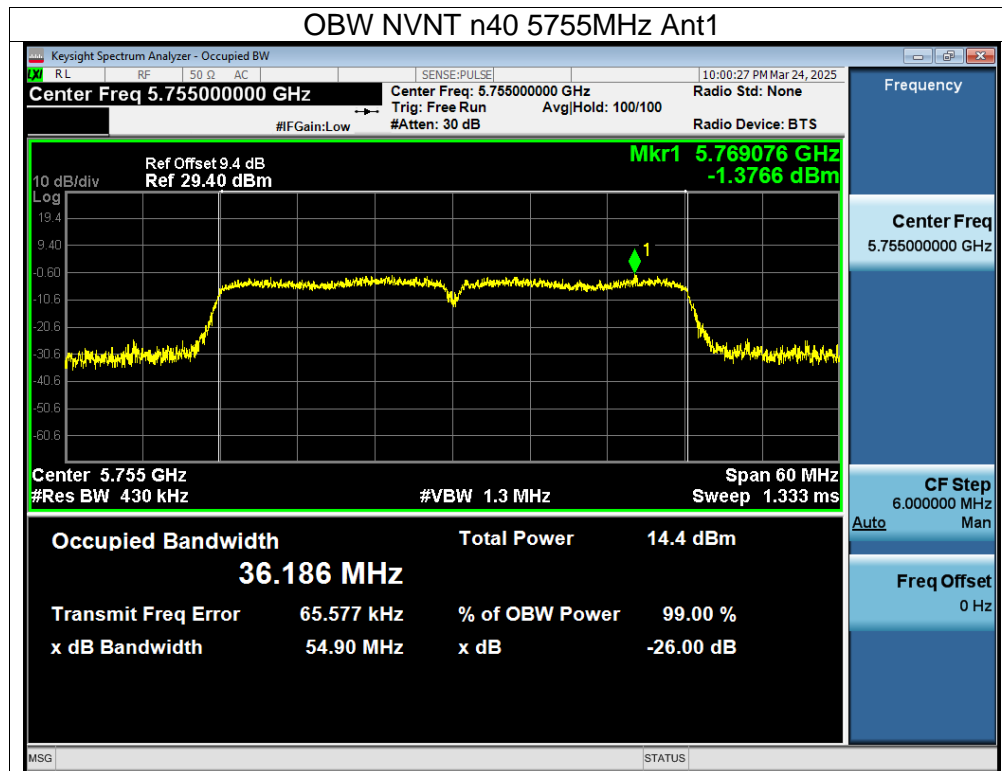



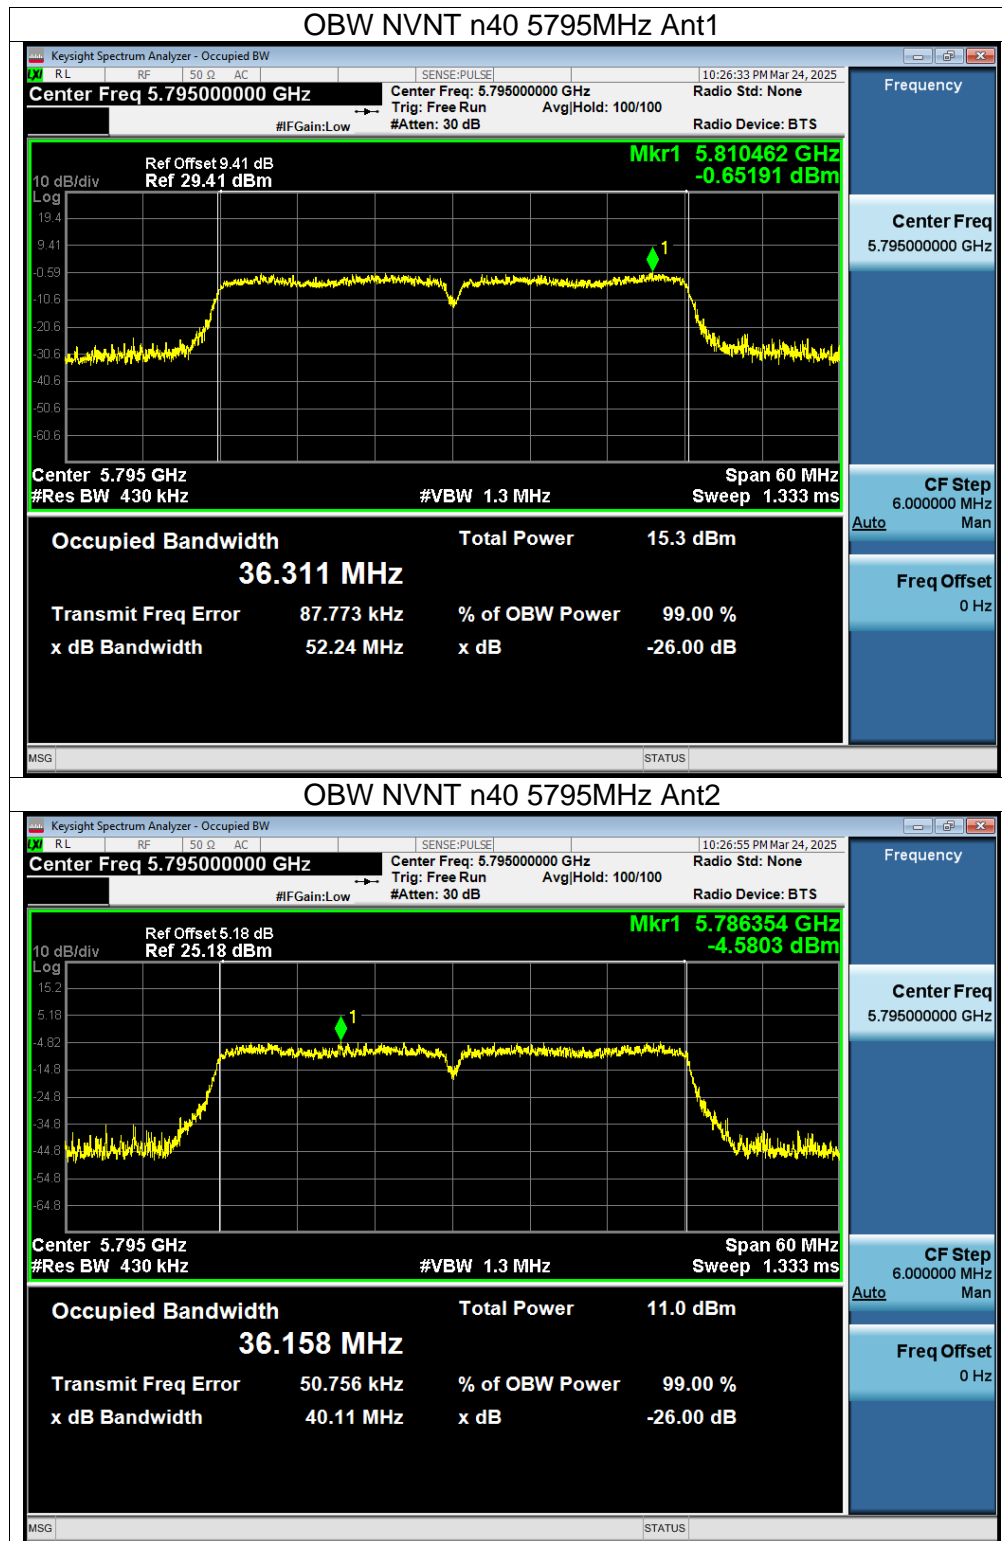


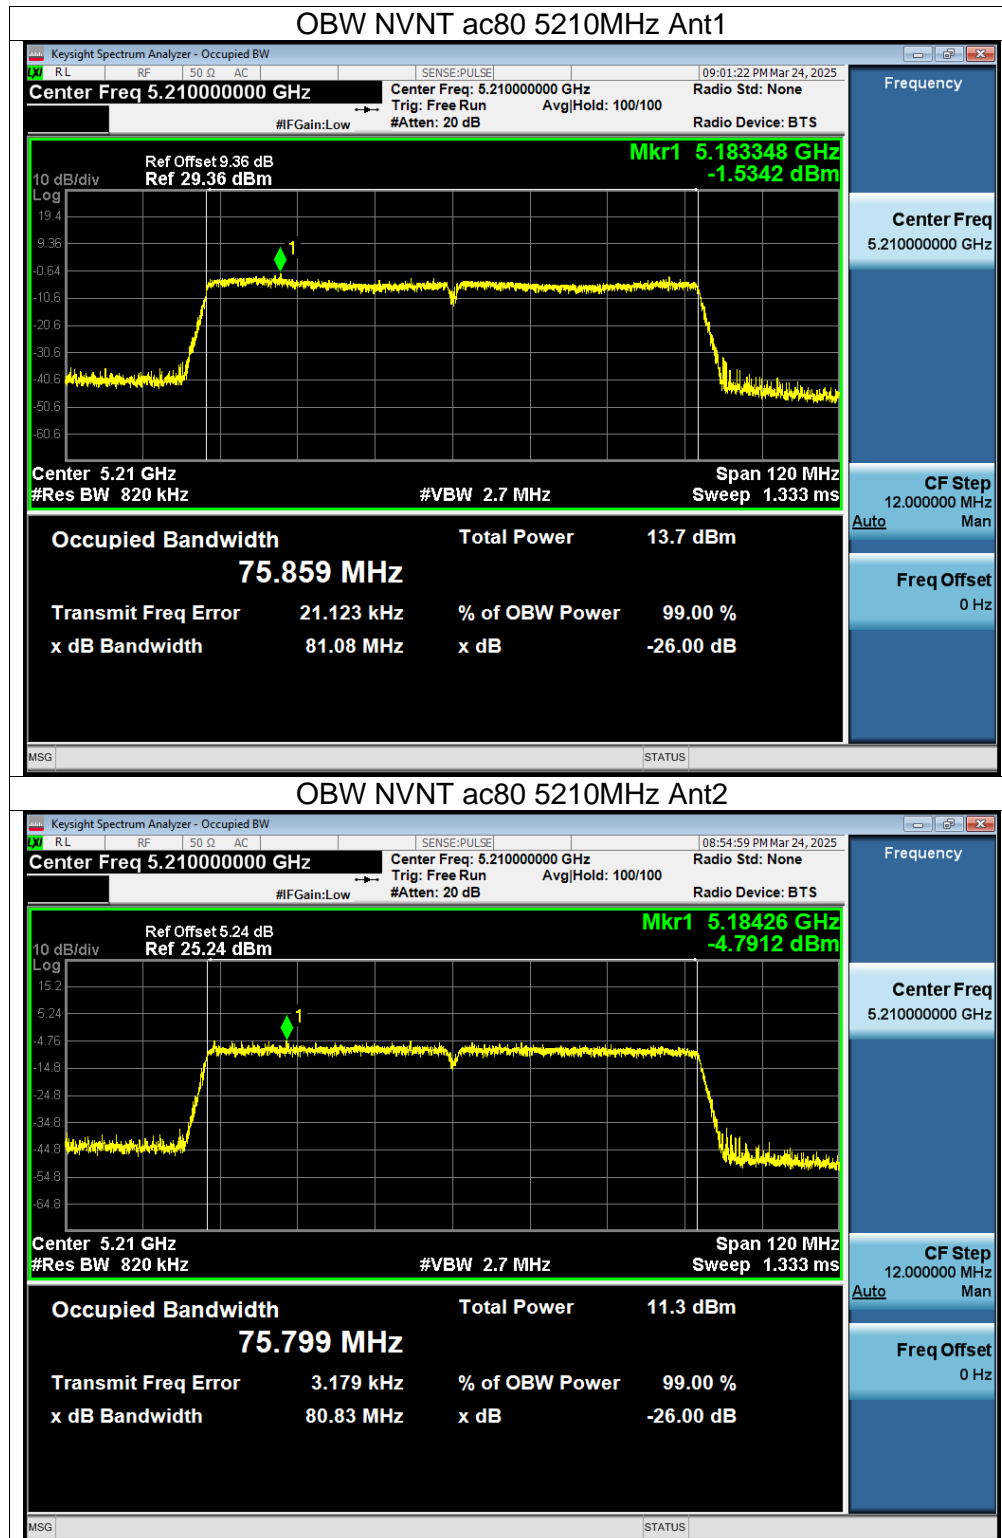

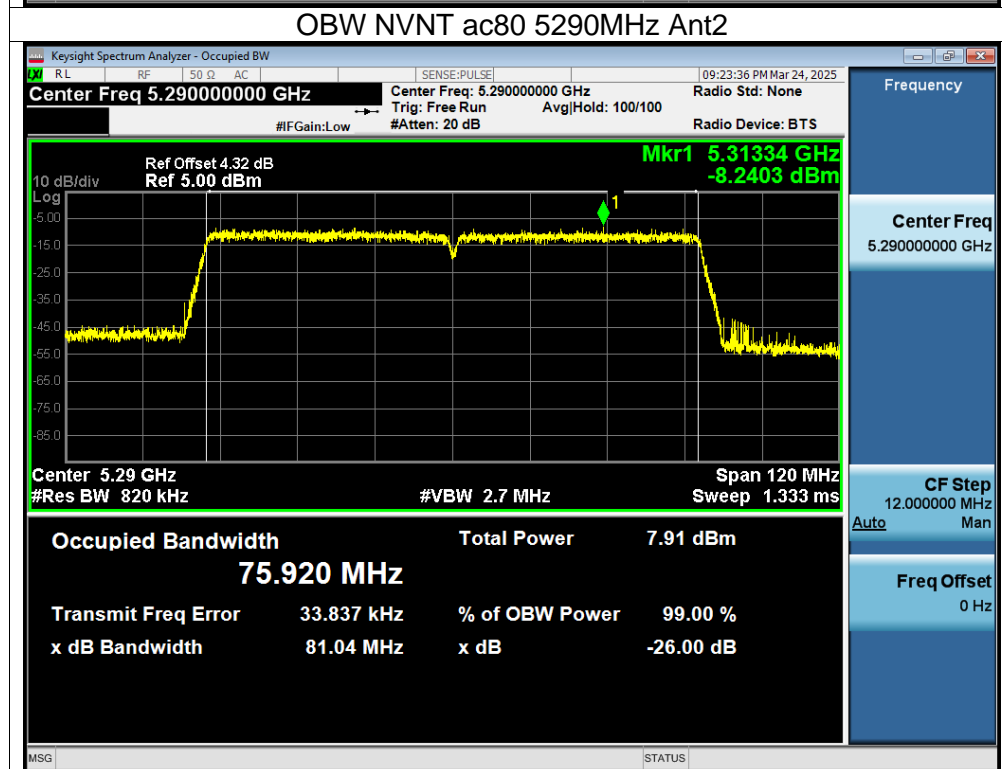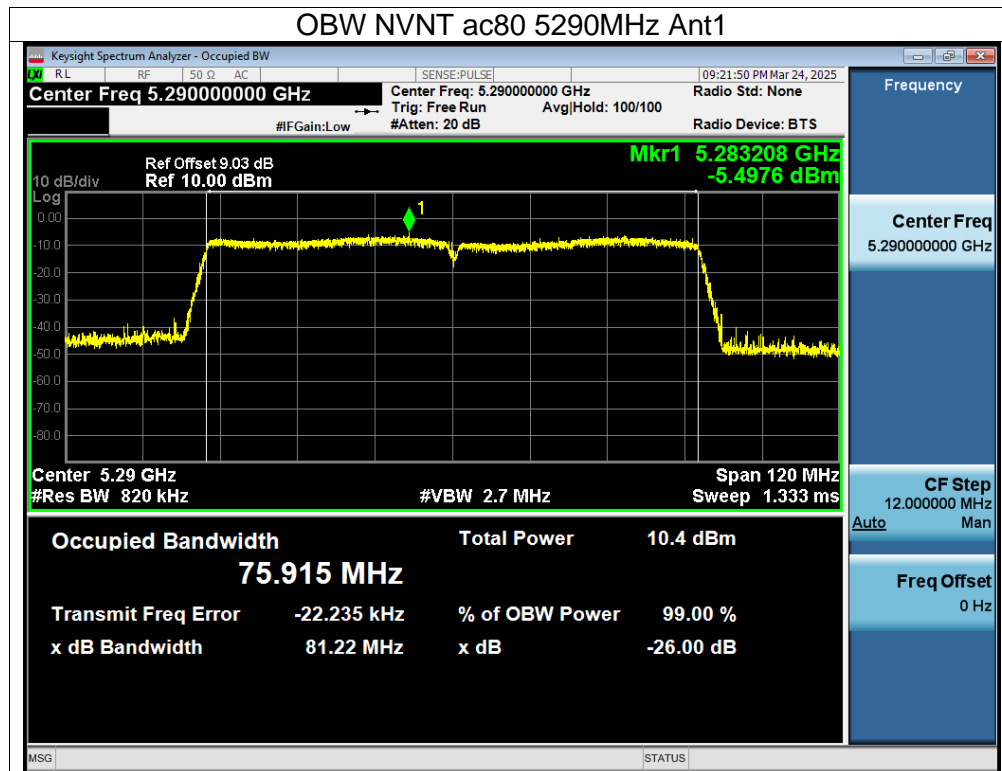

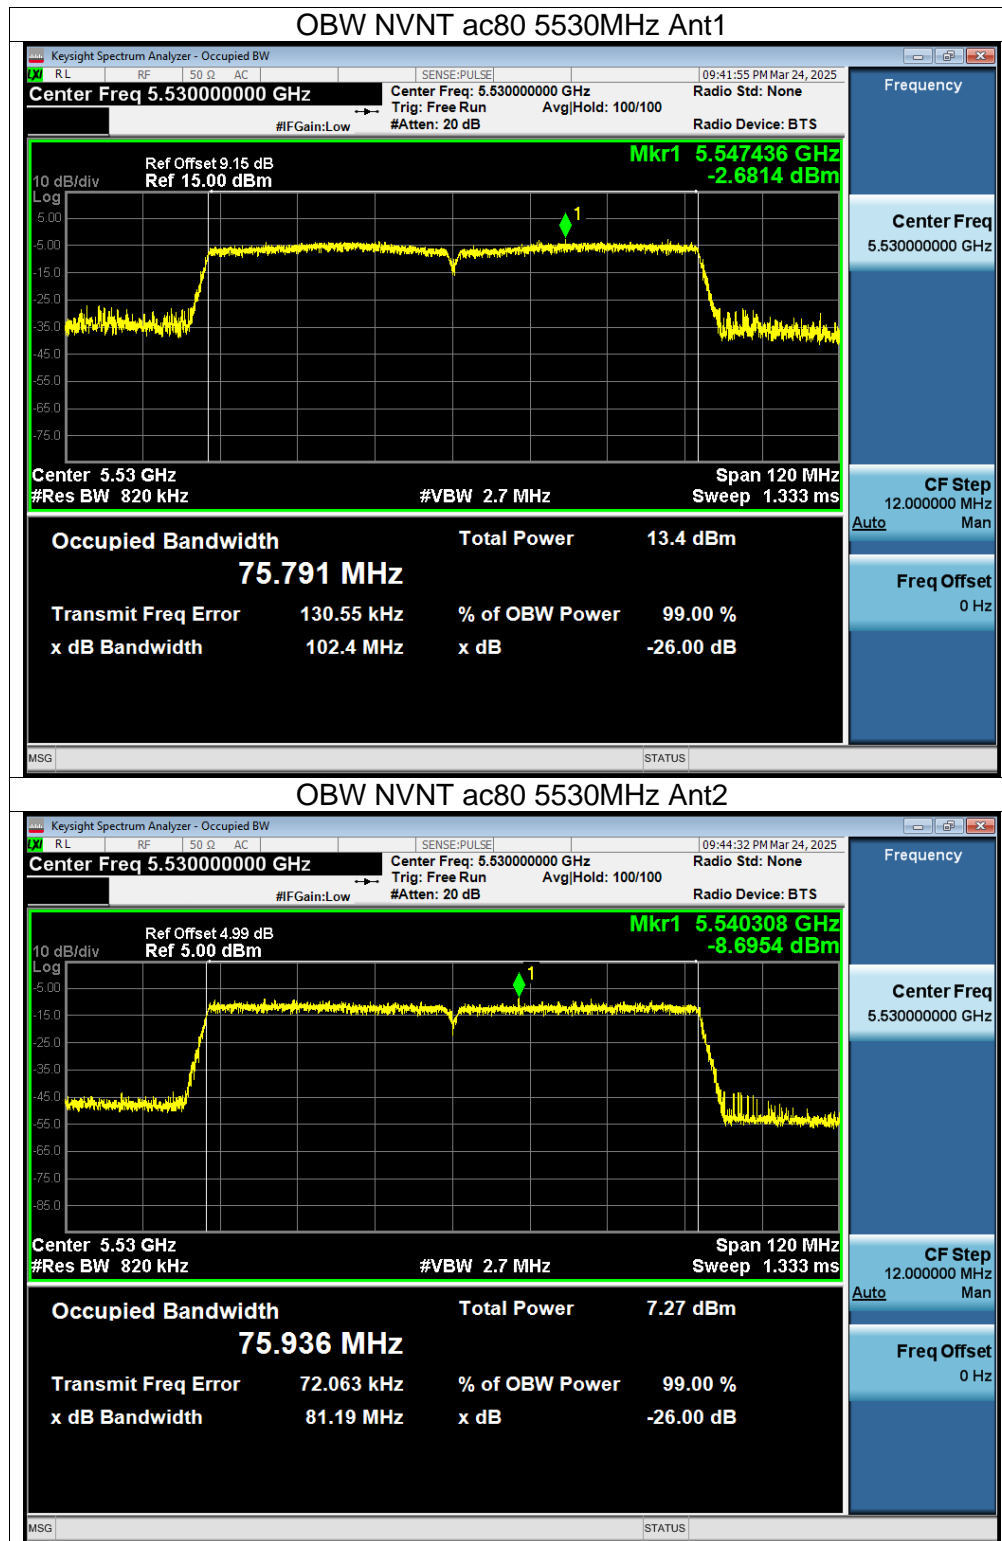

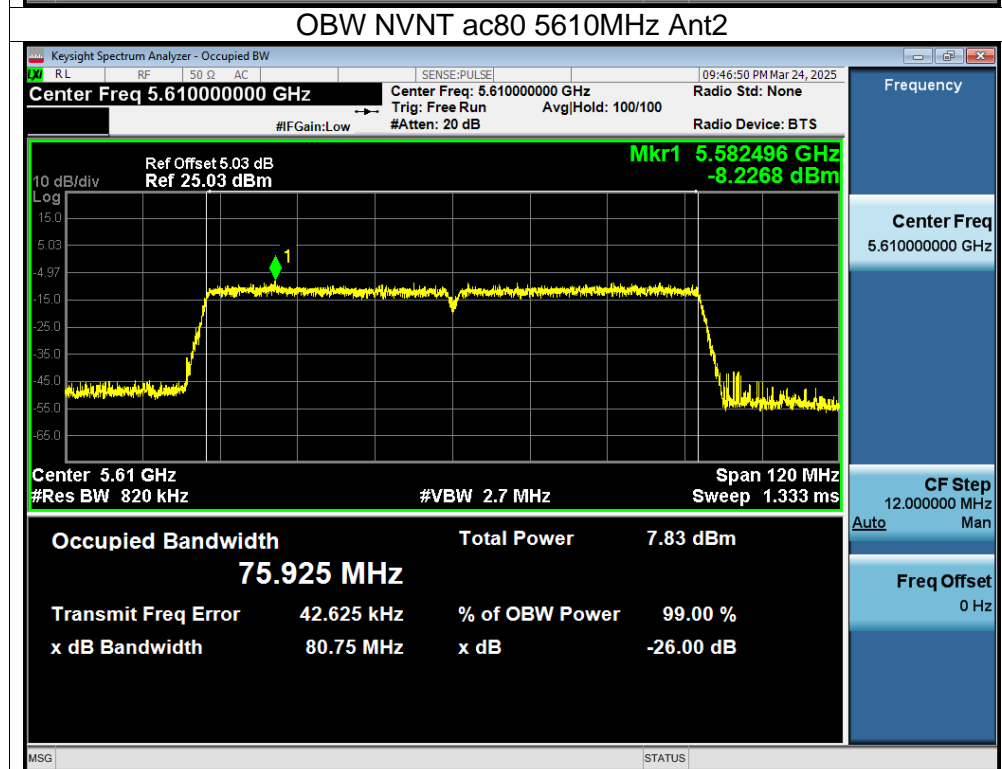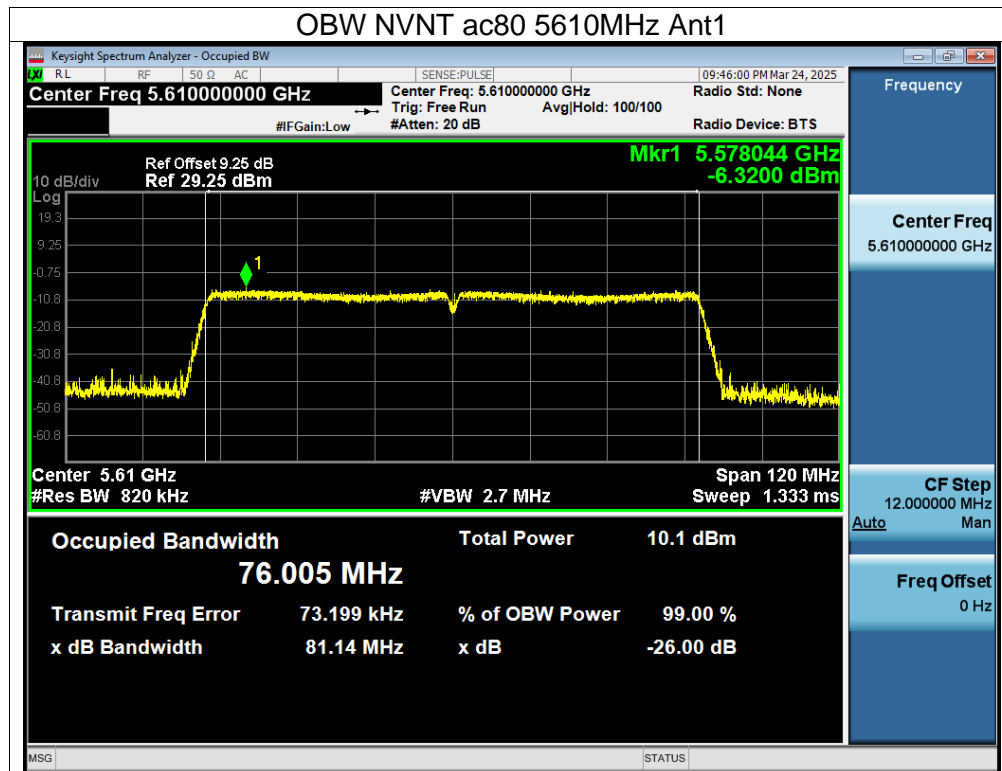

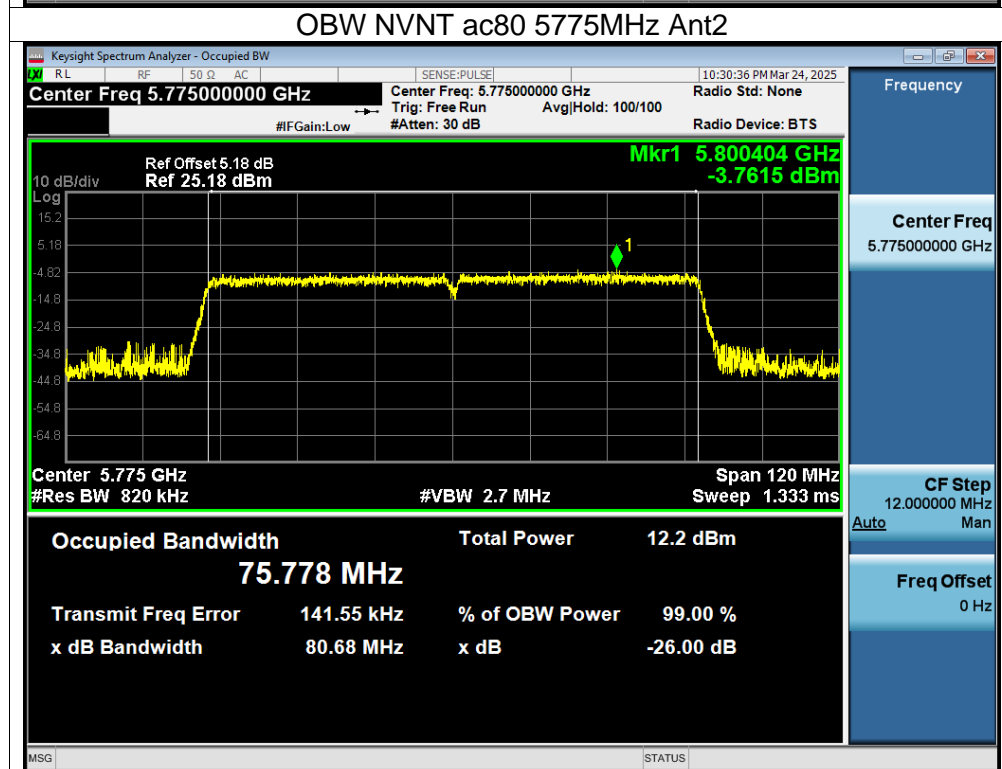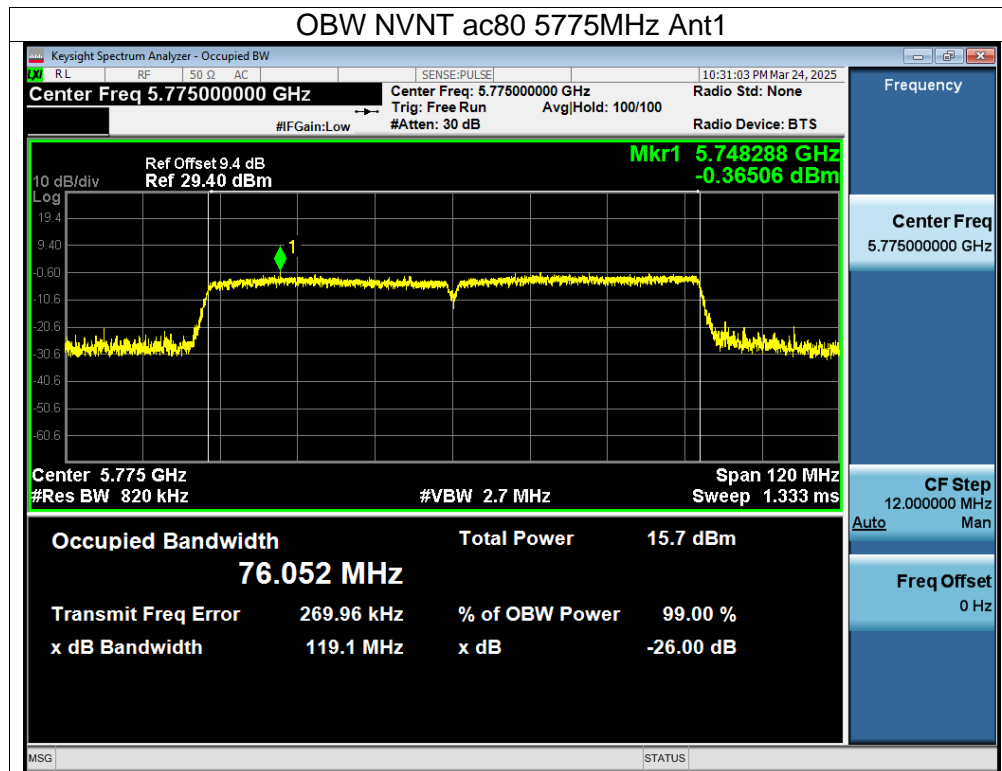


11.5. APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY LEVEL



Mode	Frequency (MHz)	Ant	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	FCC Limit (dBm)	PSD EIRP (dBm)	ISED Limit (dBm)	Verdict
a	5180	Ant1	-2.51	0.14	-2.37	≤11	2.03	≤10	Pass
a	5180	Ant2	-3.62	0.14	-3.48	≤11	1.82	≤10	Pass
a	5200	Ant1	-7.26	0.14	-7.12	≤11	-2.72	≤10	Pass
a	5200	Ant2	-7.98	0.14	-7.84	≤11	-2.54	≤10	Pass
a	5240	Ant1	-1.30	0.14	-1.16	≤11	3.24	≤10	Pass
a	5240	Ant2	-3.58	0.14	-3.44	≤11	1.86	≤10	Pass
a	5260	Ant1	-4.39	0.14	-4.25	≤11	0.15	---	Pass
a	5260	Ant2	-5.50	0.14	-5.36	≤11	-0.06	---	Pass
a	5280	Ant1	-5.20	0.14	-5.06	≤11	-0.66	---	Pass
a	5280	Ant2	-6.69	0.14	-6.55	≤11	-1.25	---	Pass
a	5320	Ant1	-3.79	0.14	-3.65	≤11	0.75	---	Pass
a	5320	Ant2	-5.06	0.14	-4.92	≤11	0.38	---	Pass
a	5500	Ant1	-2.64	0.14	-2.50	≤11	1.90	---	Pass
a	5500	Ant2	-2.67	0.14	-2.53	≤11	2.77	---	Pass
a	5580	Ant1	-0.83	0.14	-0.69	≤11	3.71	---	Pass
a	5580	Ant2	-0.15	0.14	-0.01	≤11	5.29	---	Pass
a	5700	Ant1	-2.46	0.14	-2.32	≤11	2.08	---	Pass
a	5700	Ant2	-2.47	0.14	-2.33	≤11	2.97	---	Pass
a	5745	Ant1	-3.38	0.14	-3.24	≤30	1.16	---	Pass
a	5745	Ant2	-3.38	0.14	-3.24	≤30	2.06	---	Pass
a	5785	Ant1	-2.62	0.14	-2.48	≤30	1.92	---	Pass
a	5785	Ant2	-1.98	0.14	-1.84	≤30	3.46	---	Pass
a	5825	Ant1	-2.30	0.14	-2.16	≤30	2.24	---	Pass
a	5825	Ant2	-2.55	0.14	-2.41	≤30	2.89	---	Pass
n20	5180	Ant1	-6.01	0.09	-5.92	≤11	-1.52	≤10	Pass
n20	5180	Ant2	-8.20	0.09	-8.11	≤11	-2.81	≤10	Pass
n20	5180	Sum	-3.96	0.09	-3.87	≤8.70	4.44	≤7.70	Pass
n20	5200	Ant1	-4.93	0.09	-4.84	≤11	-0.44	≤10	Pass
n20	5200	Ant2	-6.21	0.09	-6.12	≤11	-0.82	≤10	Pass
n20	5200	Sum	-2.51	0.09	-2.42	≤8.70	5.89	≤7.70	Pass
n20	5240	Ant1	-6.08	0.09	-5.99	≤11	-1.59	≤10	Pass
n20	5240	Ant2	-7.84	0.09	-7.75	≤11	-2.45	≤10	Pass
n20	5240	Sum	-3.86	0.09	-3.77	≤8.70	4.54	≤7.70	Pass
n20	5260	Ant1	-6.90	0.09	-6.81	≤11	-2.41	---	Pass
n20	5260	Ant2	-8.68	0.09	-8.59	≤11	-3.29	---	Pass
n20	5260	Sum	-4.69	0.09	-4.60	≤8.70	3.71	---	Pass
n20	5280	Ant1	-6.67	0.09	-6.58	≤11	-2.18	---	Pass
n20	5280	Ant2	-8.51	0.09	-8.42	≤11	-3.12	---	Pass
n20	5280	Sum	-4.48	0.09	-4.39	≤8.70	3.92	---	Pass
n20	5320	Ant1	-7.37	0.09	-7.28	≤11	-2.88	---	Pass
n20	5320	Ant2	-8.60	0.09	-8.51	≤11	-3.21	---	Pass
n20	5320	Sum	-4.93	0.09	-4.84	≤8.70	3.47	---	Pass
n20	5500	Ant1	-1.48	0.09	-1.39	≤11	3.01	---	Pass
n20	5500	Ant2	-2.54	0.09	-2.45	≤11	2.85	---	Pass
n20	5500	Sum	1.03	0.09	1.12	≤8.70	9.43	---	Pass
n20	5580	Ant1	-4.81	0.09	-4.72	≤11	-0.32	---	Pass



n20	5580	Ant2	-7.33	0.09	-7.24	≤11	-1.94	---	Pass
n20	5580	Sum	-2.88	0.09	-2.79	≤8.70	5.52	---	Pass
n20	5700	Ant1	-3.29	0.09	-3.20	≤11	1.20	---	Pass
n20	5700	Ant2	-5.42	0.09	-5.33	≤11	-0.03	---	Pass
n20	5700	Sum	-1.22	0.09	-1.13	≤8.70	7.18	---	Pass
n20	5745	Ant1	-1.41	0.09	-1.32	≤30	3.08	---	Pass
n20	5745	Ant2	-5.60	0.09	-5.51	≤30	-0.21	---	Pass
n20	5745	Sum	-0.01	0.09	0.08	≤27.70	8.39	---	Pass
n20	5785	Ant1	-4.08	0.09	-3.99	≤30	0.41	---	Pass
n20	5785	Ant2	-3.04	0.09	-2.95	≤30	2.35	---	Pass
n20	5785	Sum	-0.52	0.09	-0.43	≤27.70	7.88	---	Pass
n20	5825	Ant1	-0.88	0.09	-0.79	≤30	3.61	---	Pass
n20	5825	Ant2	-3.64	0.09	-3.55	≤30	1.75	---	Pass
n20	5825	Sum	0.97	0.09	1.06	≤27.70	9.37	---	Pass
n40	5190	Ant1	-6.81	0.18	-6.63	≤11	-2.23	≤10	Pass
n40	5190	Ant2	-8.54	0.18	-8.36	≤11	-3.06	≤10	Pass
n40	5190	Sum	-4.58	0.18	-4.40	≤8.70	3.91	≤7.70	Pass
n40	5230	Ant1	-6.48	0.18	-6.30	≤11	-1.90	≤10	Pass
n40	5230	Ant2	-8.97	0.18	-8.79	≤11	-3.49	≤10	Pass
n40	5230	Sum	-4.54	0.18	-4.36	≤8.70	3.95	≤7.70	Pass
n40	5270	Ant1	-7.69	0.18	-7.51	≤11	-3.11	---	Pass
n40	5270	Ant2	-10.58	0.18	-10.40	≤11	-5.10	---	Pass
n40	5270	Sum	-5.89	0.18	-5.71	≤8.70	2.60	---	Pass
n40	5310	Ant1	-9.35	0.18	-9.17	≤11	-4.77	---	Pass
n40	5310	Ant2	-12.40	0.18	-12.22	≤11	-6.92	---	Pass
n40	5310	Sum	-7.60	0.18	-7.42	≤8.70	0.89	---	Pass
n40	5510	Ant1	-3.83	0.18	-3.65	≤11	0.75	---	Pass
n40	5510	Ant2	-6.53	0.18	-6.35	≤11	-1.05	---	Pass
n40	5510	Sum	-1.96	0.18	-1.78	≤8.70	6.53	---	Pass
n40	5550	Ant1	-2.54	0.18	-2.36	≤11	2.04	---	Pass
n40	5550	Ant2	-5.44	0.18	-5.26	≤11	0.04	---	Pass
n40	5550	Sum	-0.74	0.18	-0.56	≤8.70	7.75	---	Pass
n40	5670	Ant1	-2.60	0.18	-2.42	≤11	1.98	---	Pass
n40	5670	Ant2	-6.56	0.18	-6.38	≤11	-1.08	---	Pass
n40	5670	Sum	-1.13	0.18	-0.95	≤8.70	7.36	---	Pass
n40	5755	Ant1	-5.88	0.18	-5.70	≤30	-1.30	---	Pass
n40	5755	Ant2	-6.21	0.18	-6.03	≤30	-0.73	---	Pass
n40	5755	Sum	-3.03	0.18	-2.85	≤27.70	5.46	---	Pass
n40	5795	Ant1	-5.59	0.18	-5.41	≤30	-1.01	---	Pass
n40	5795	Ant2	-6.08	0.18	-5.90	≤30	-0.60	---	Pass
n40	5795	Sum	-2.82	0.18	-2.64	≤27.70	5.67	---	Pass
ac80	5210	Ant1	-7.45	0.38	-7.07	≤11	-2.67	≤10	Pass
ac80	5210	Ant2	-12.38	0.38	-12.00	≤11	-6.70	≤10	Pass
ac80	5210	Sum	-6.24	0.38	-5.86	≤8.70	2.45	≤7.70	Pass
ac80	5290	Ant1	-10.44	0.38	-10.06	≤11	-5.66	---	Pass
ac80	5290	Ant2	-13.33	0.38	-12.95	≤11	-7.65	---	Pass
ac80	5290	Sum	-8.64	0.38	-8.26	≤8.70	0.05	---	Pass
ac80	5530	Ant1	-9.16	0.38	-8.78	≤11	-4.38	---	Pass
ac80	5530	Ant2	-11.55	0.38	-11.17	≤11	-5.87	---	Pass
ac80	5530	Sum	-7.18	0.38	-6.80	≤8.70	1.51	---	Pass
ac80	5610	Ant1	-6.16	0.38	-5.78	≤11	-1.38	---	Pass



ac80	5610	Ant2	-7.85	0.38	-7.47	≤11	-2.17	---	Pass
ac80	5610	Sum	-3.91	0.38	-3.53	≤8.70	4.78	---	Pass
ac80	5775	Ant1	-9.84	0.38	-9.46	≤30	-5.06	---	Pass
ac80	5775	Ant2	-10.80	0.38	-10.42	≤30	-5.12	---	Pass
ac80	5775	Sum	-7.28	0.38	-6.90	≤27.70	1.41	---	Pass



Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.


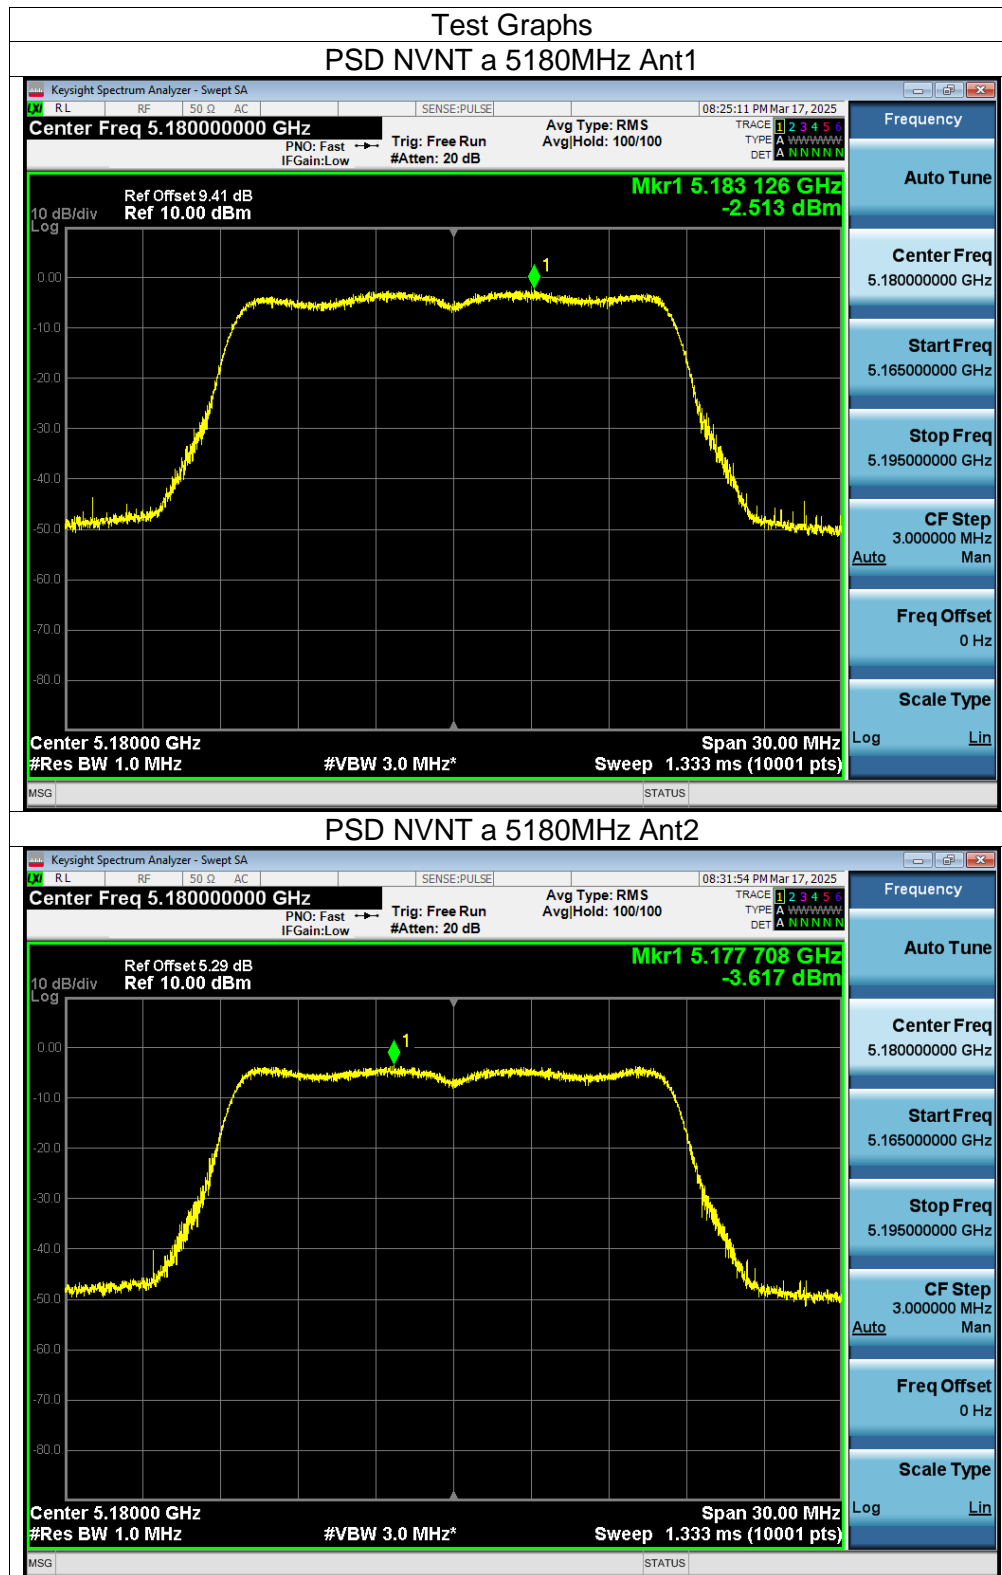


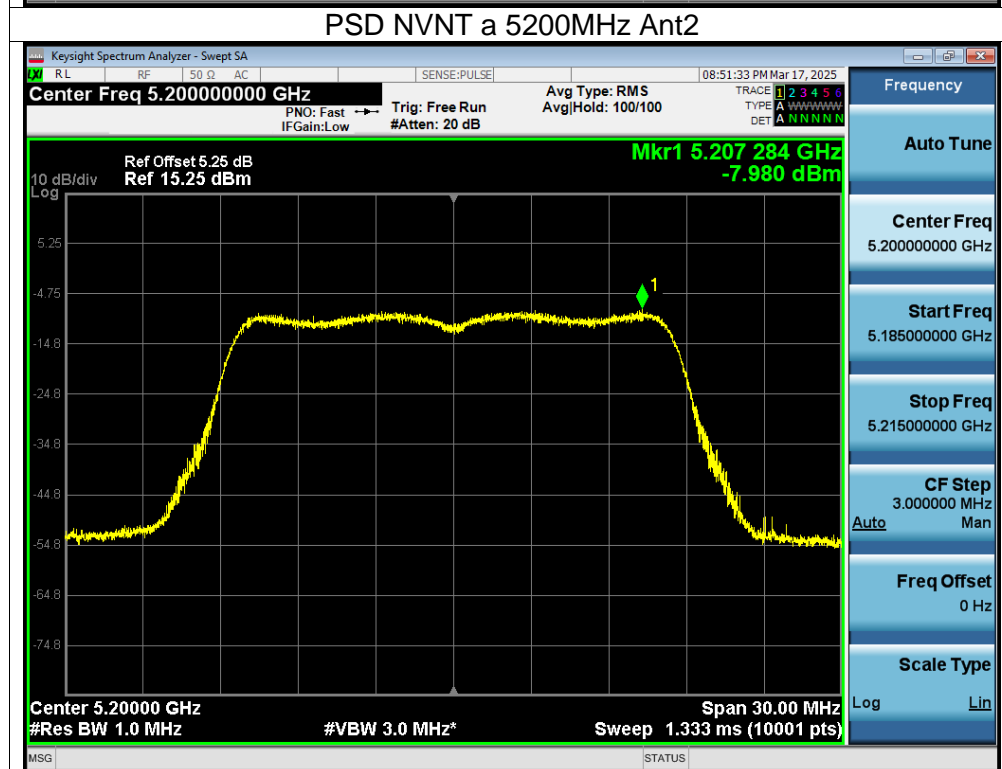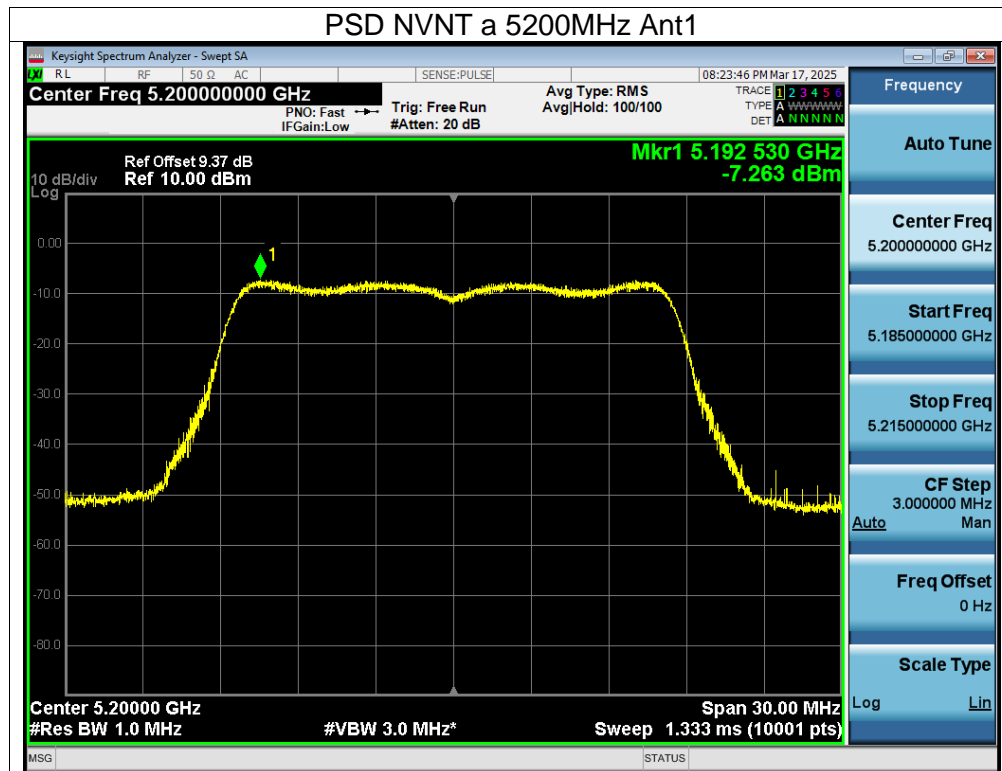

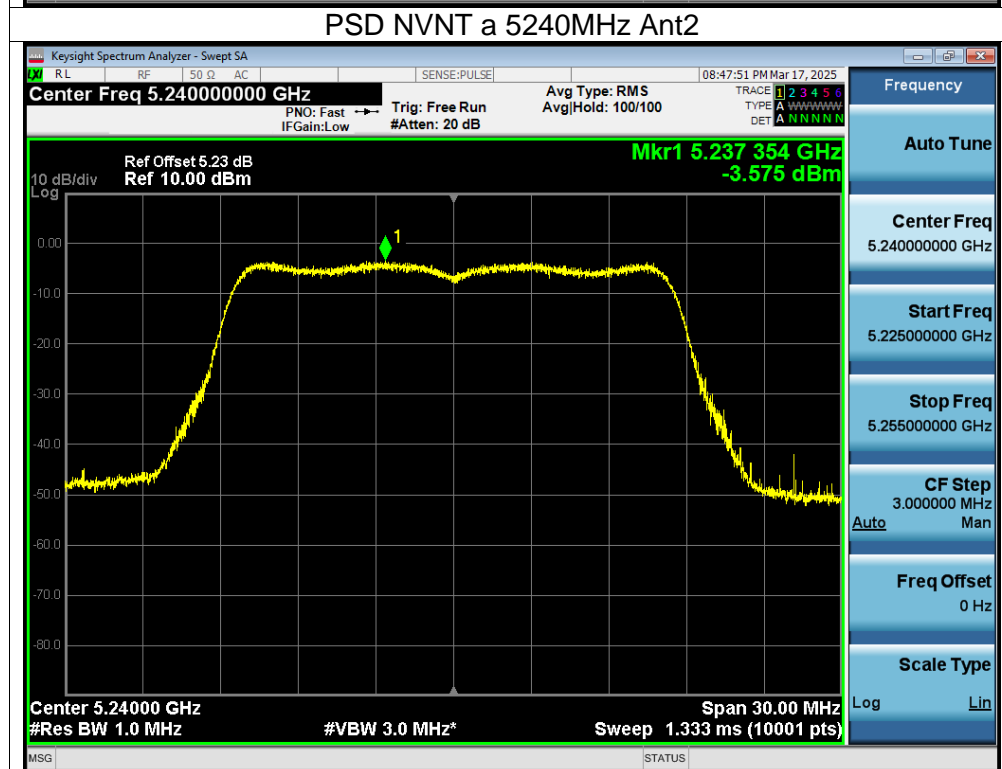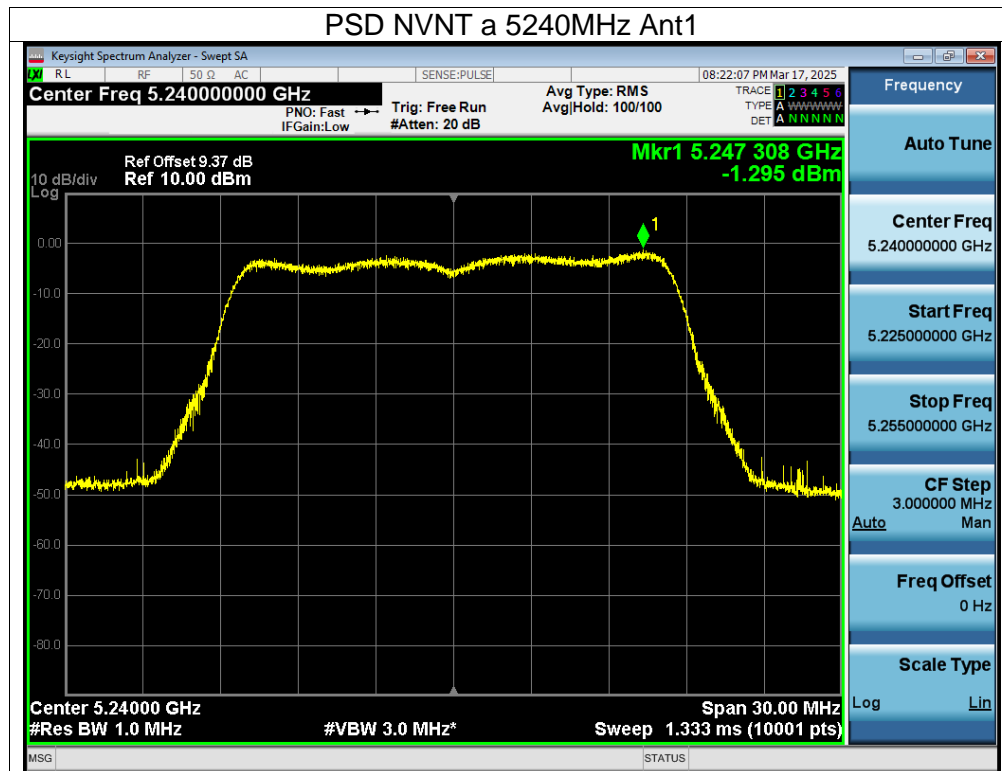


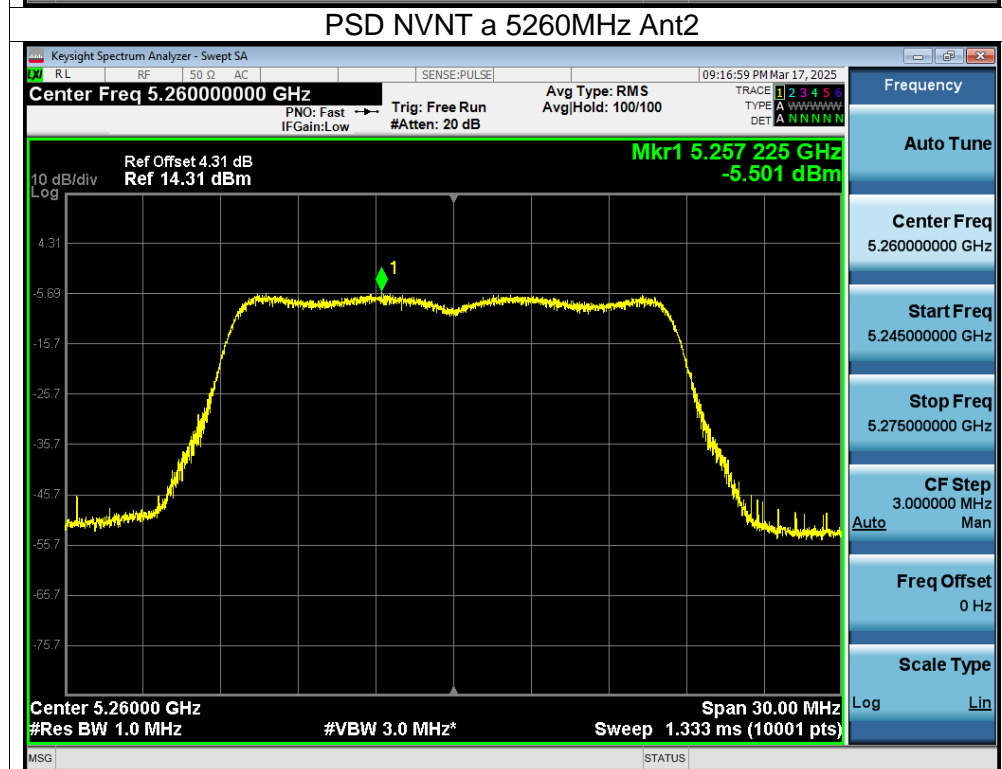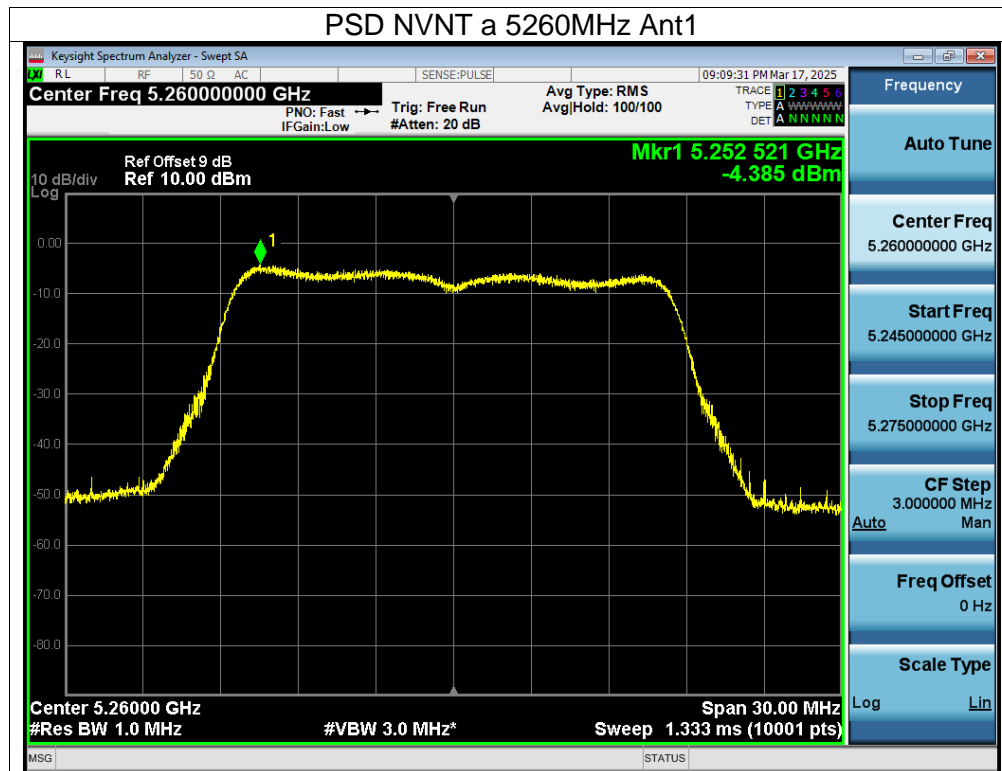

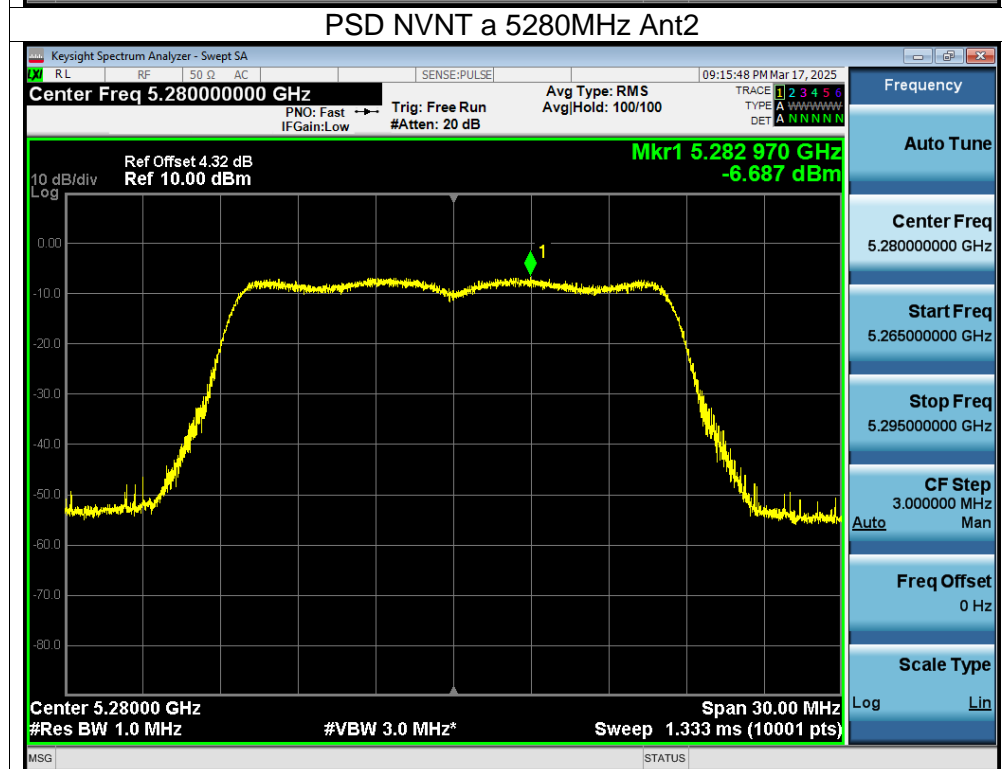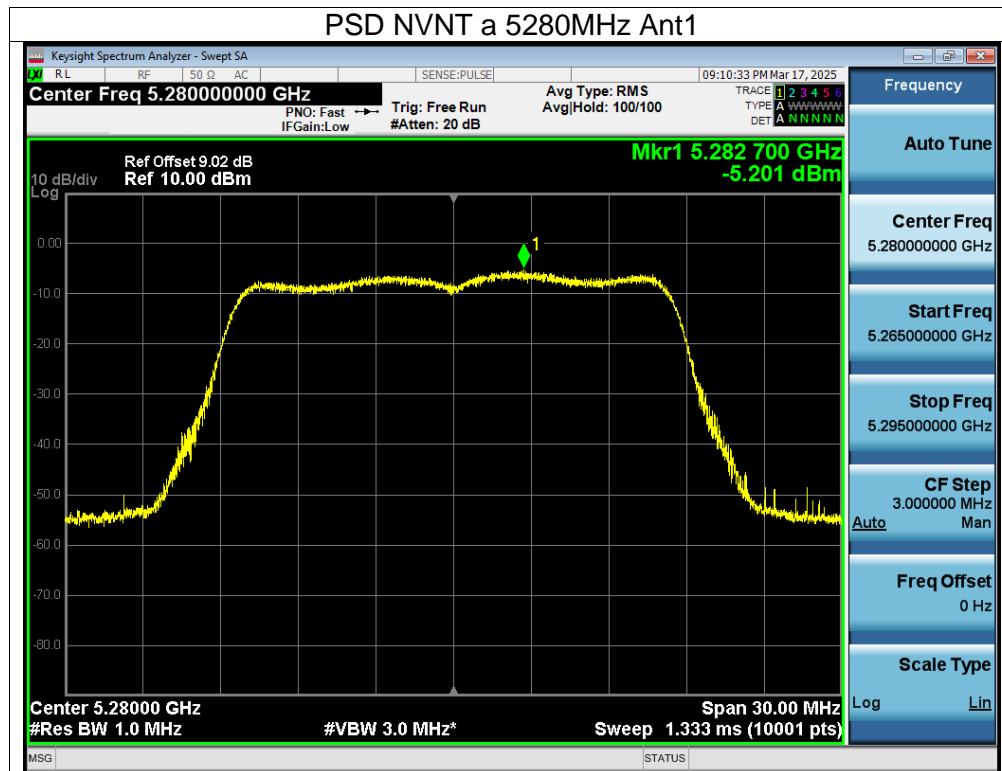


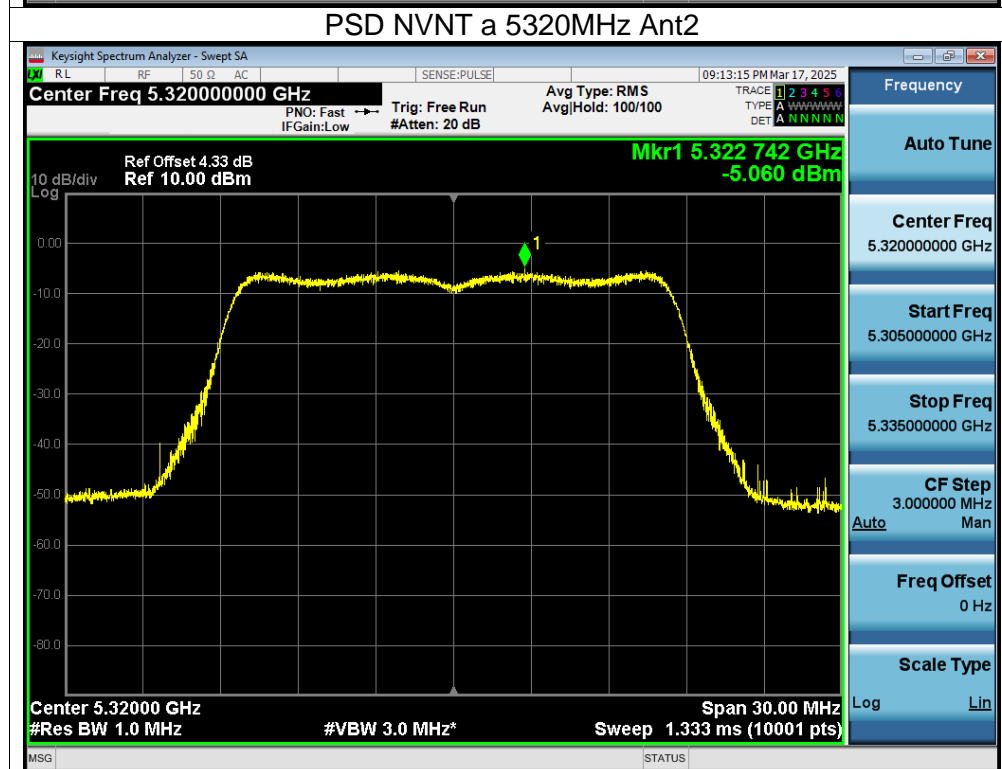
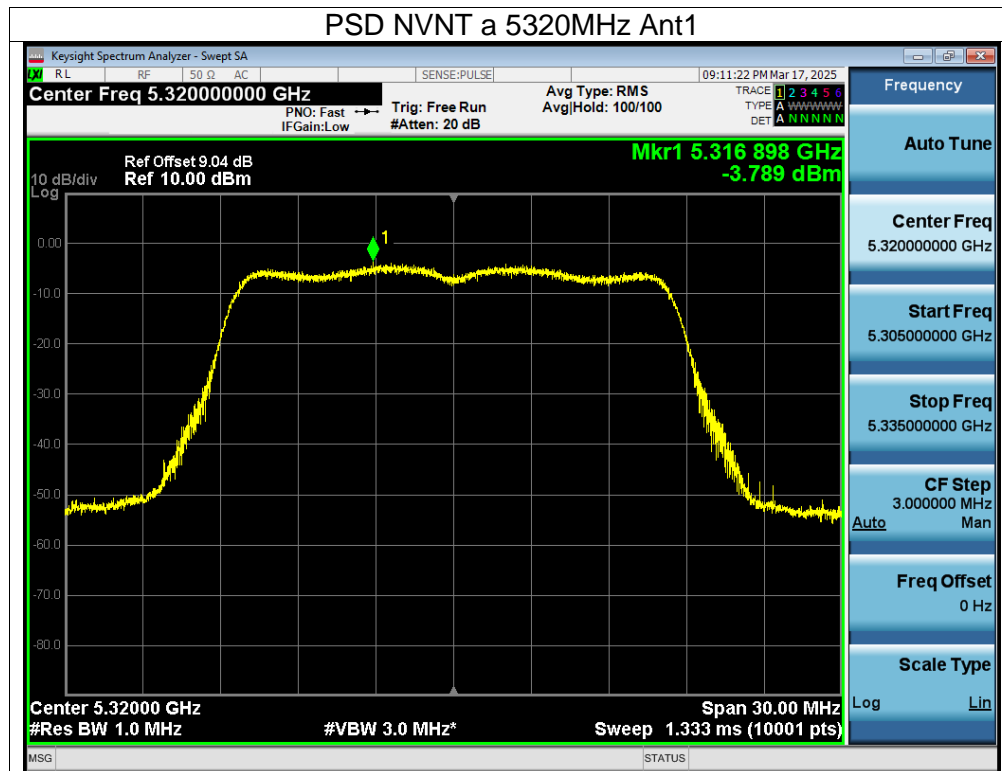




PSD NVNT a 5500MHz Ant1


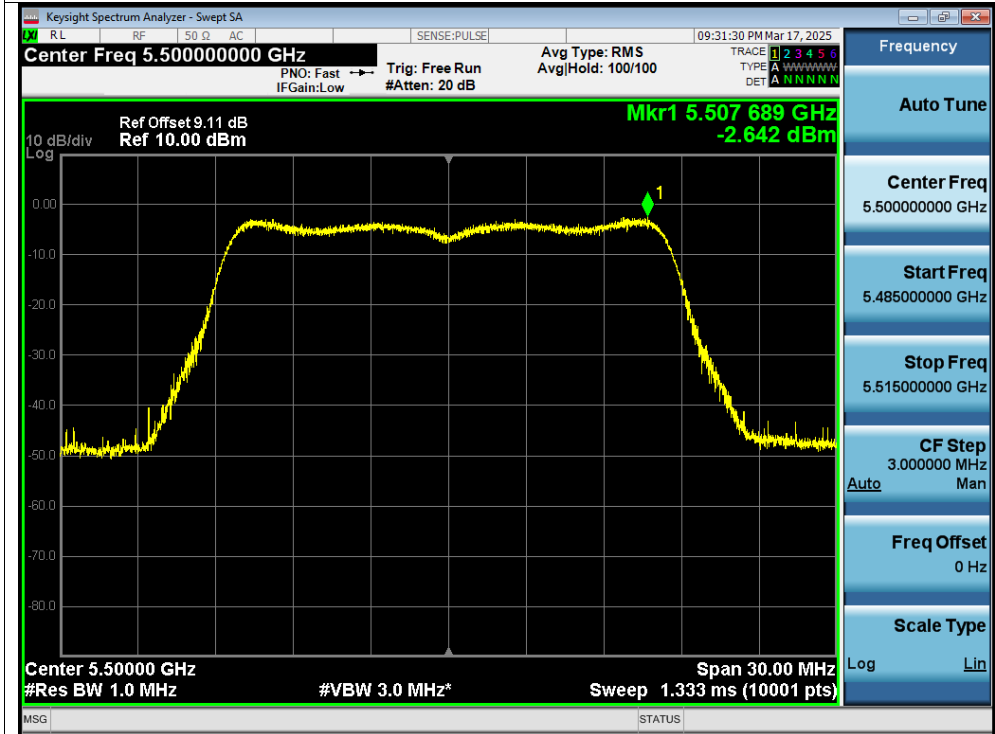




PSD NVNT a 5500MHz Ant2

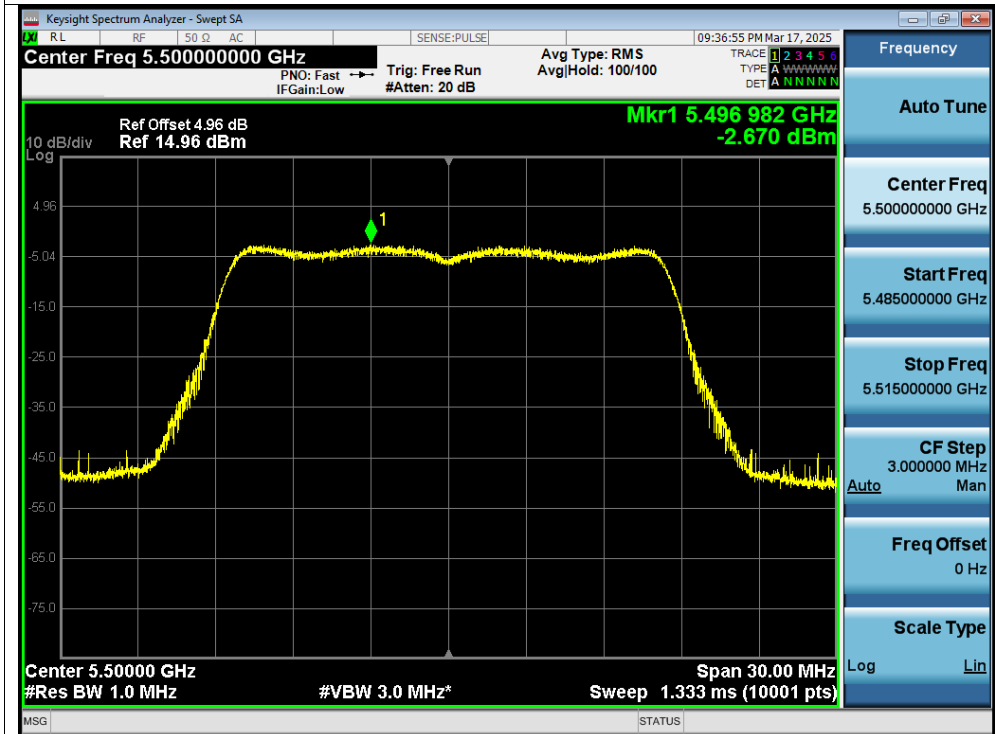

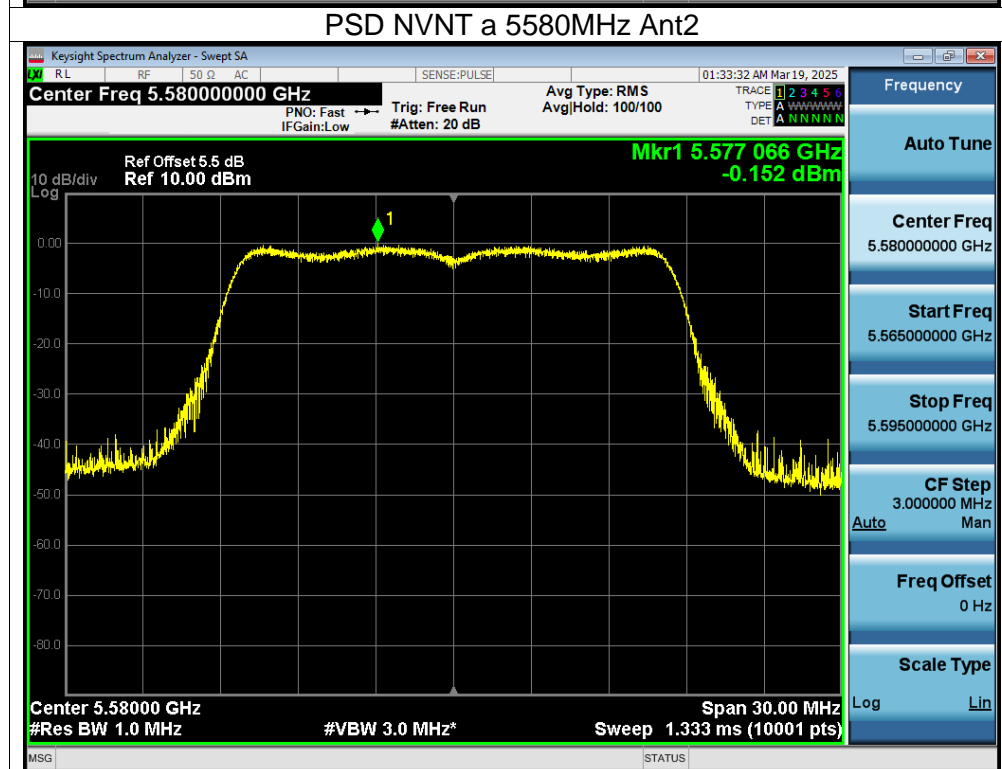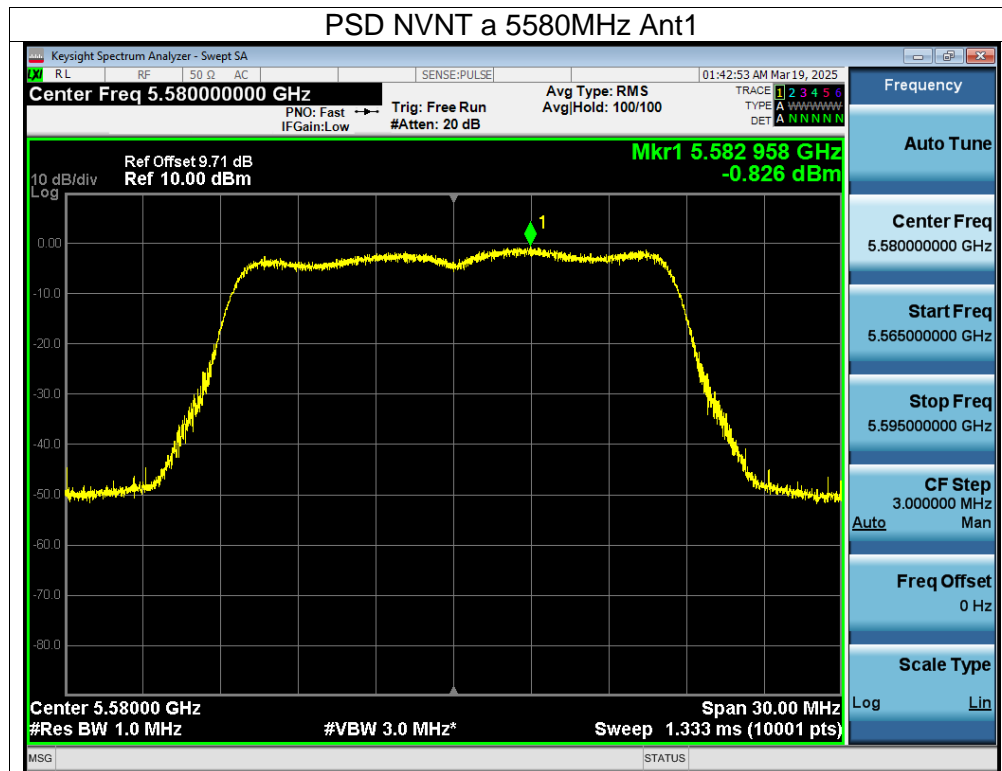


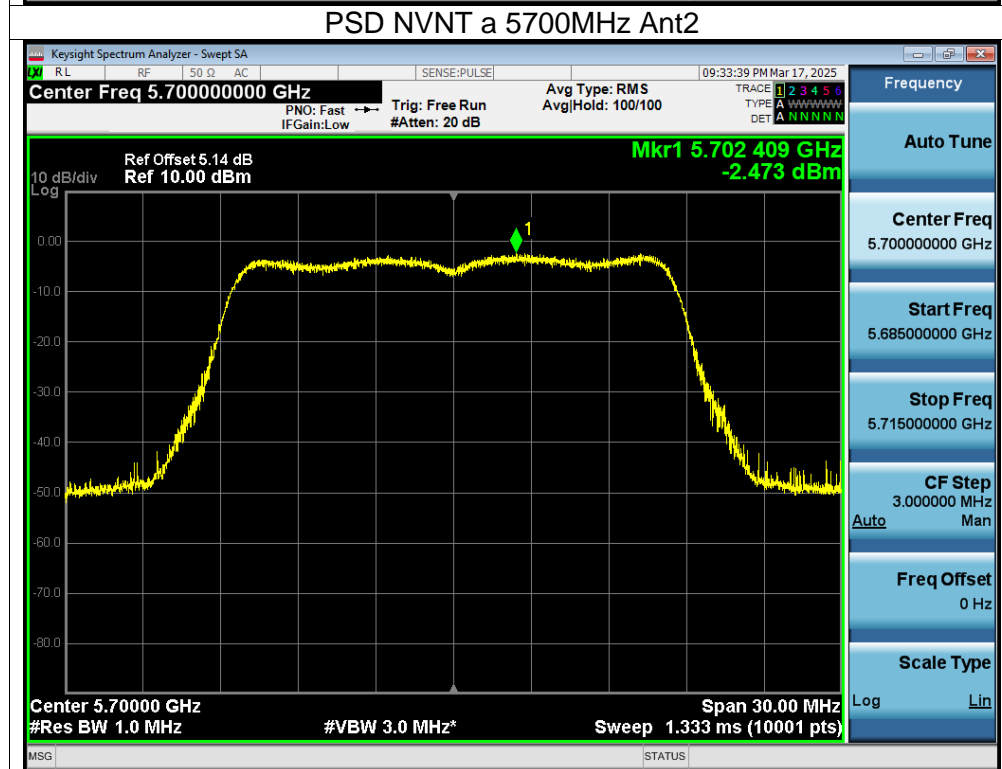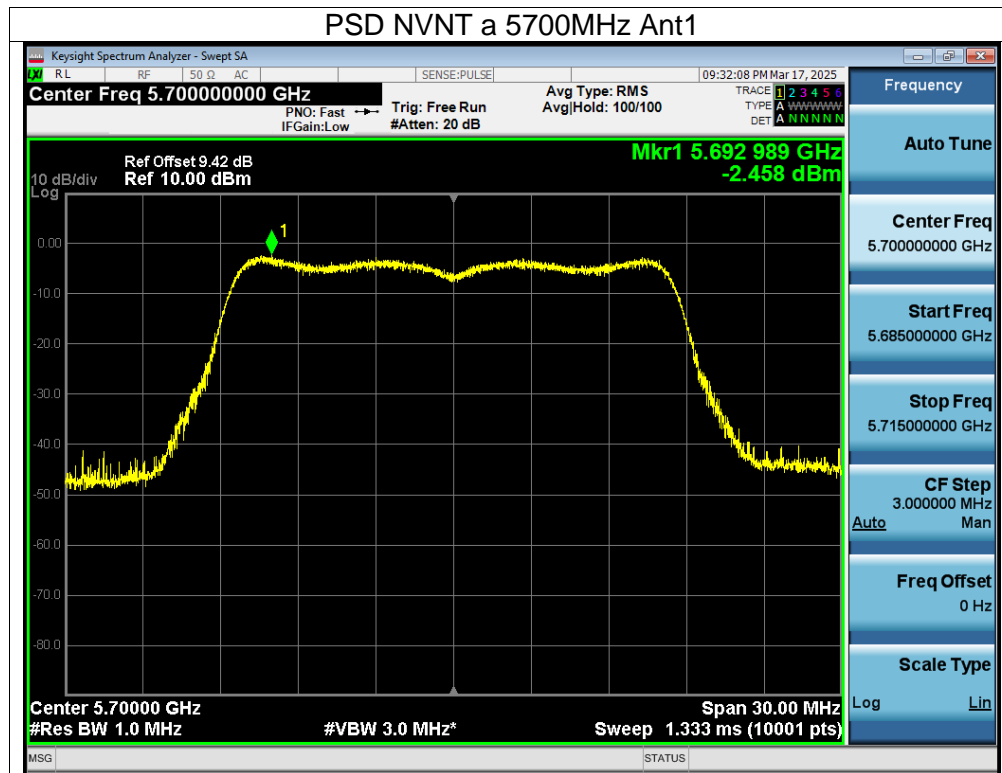

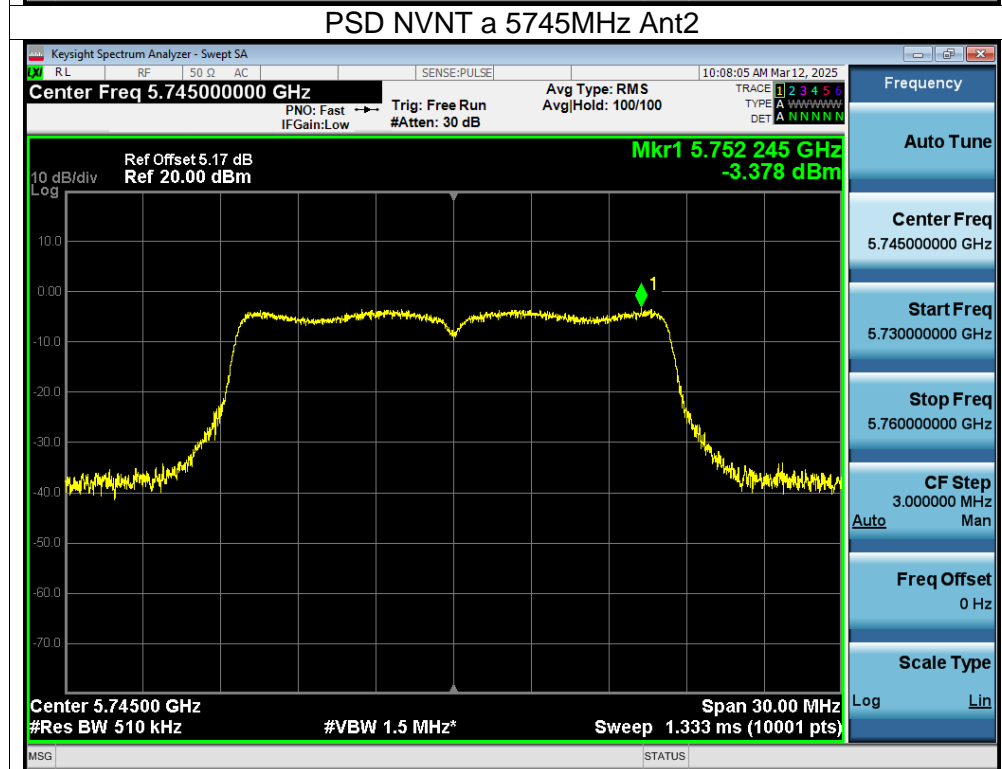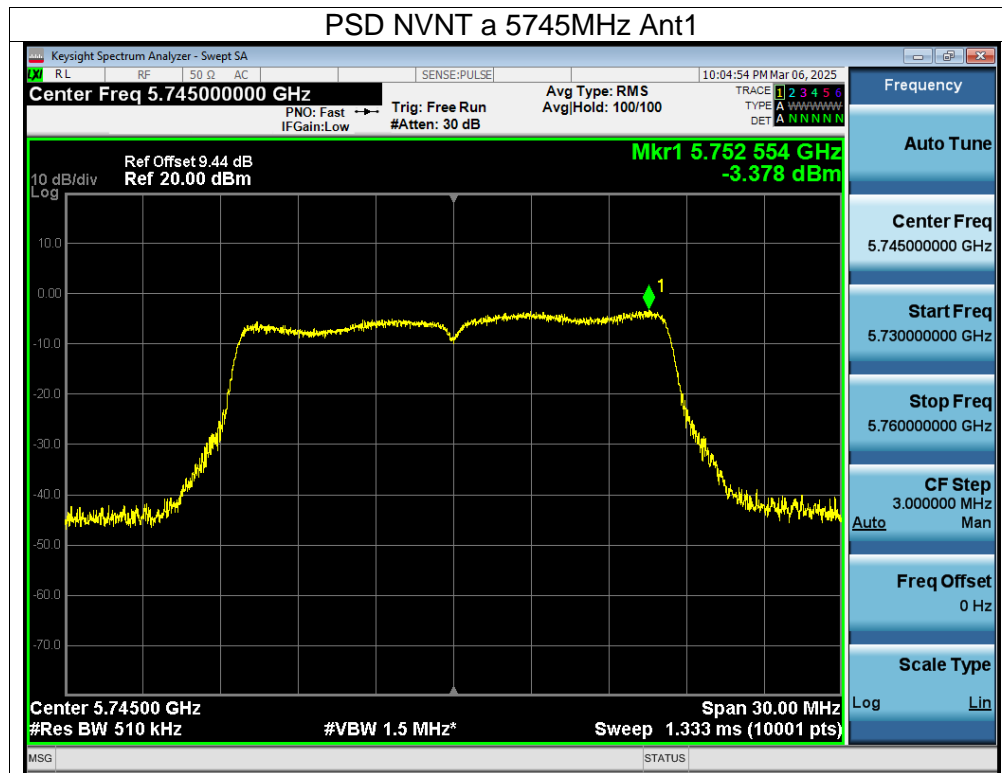

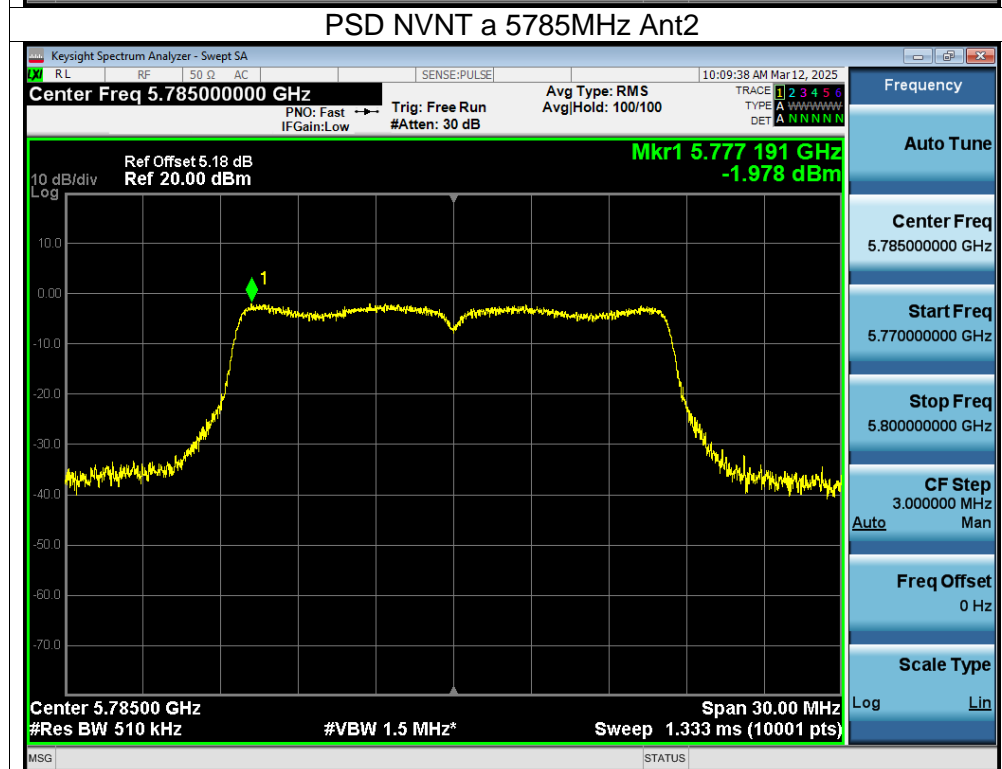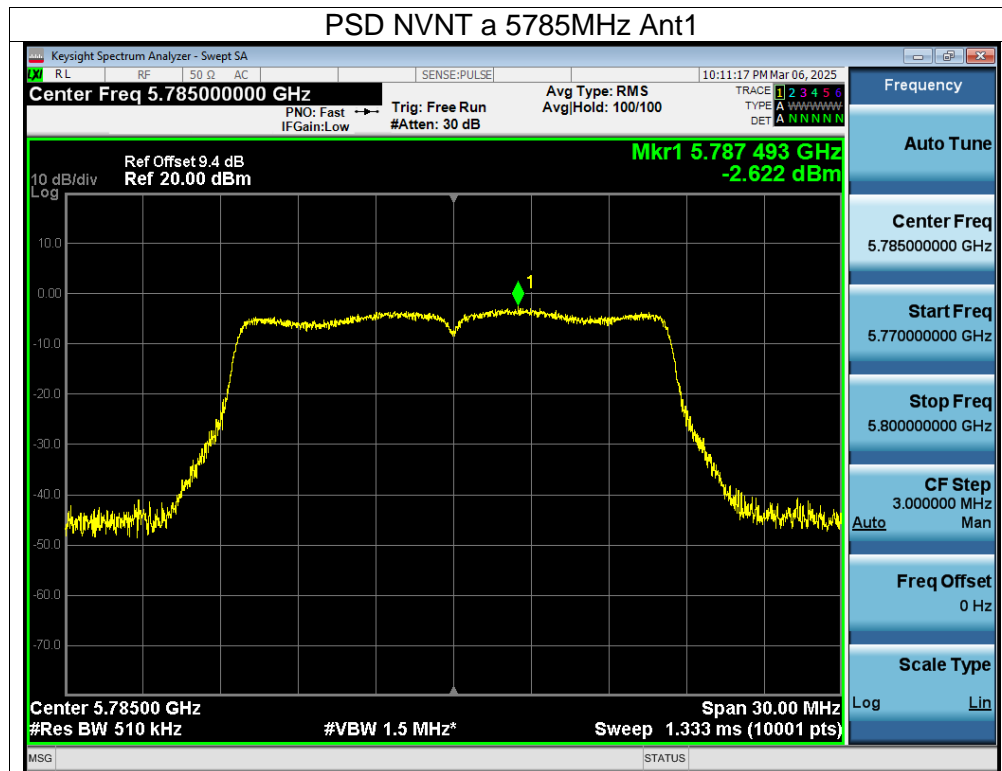

PSD NVNT a 5825MHz Ant1

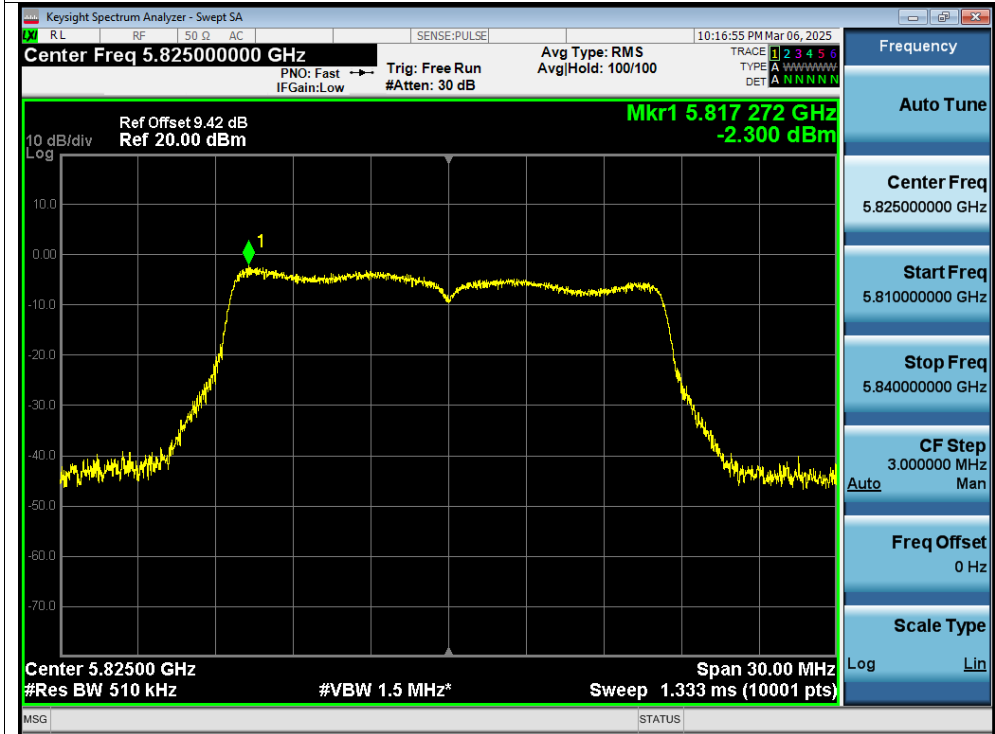

PSD NVNT a 5825MHz Ant2

