

# 蓝牙音频接收发射器

## 产品使用说明书



Model: D6

尊敬的用户，感谢您选购本产品，使用前请务必仔细阅读本说明书！

## Wireless audio receiver/transmitter

### Product User Manual



Model: D6

Dear user, we kindly request that you carefully read this manual before purchasing this product!

## 一、基本介绍

本产品支持蓝牙音频接收和发射。操作简单，能够自由接收大部分蓝牙音频，通过该产品可以把手机音乐、电脑无线传送到老式功放音响设备上。适用于电视机，游戏机，CD播放器，蓝牙发射到蓝牙耳机或蓝牙音响等设备。完美的解决音频设备的限制，扩展了各种音频设备的功能。内置500mAh聚合物锂电池，支持边充边用，听歌时长约15小时。本设备即插即用，无需安装任何软件驱动，操作简单快捷。

## 二、产品参数

产品名称：蓝牙音频接收发射器

产品型号：D6

蓝牙版本：V5.1

音频解码：SBC

蓝牙协议支持：A2DP/AVRCP

文件格式：MP3/WAV/WMA/FLAC/APE

频率范围：2400MHz-2483.5MHz

频率响应：20Hz-20KHz

输出负载：16-32Ω自适应

传输距离：10-30M (空旷地方)

音频输入：蓝牙音频U盘AUX RCA

输出：AUX RCA


供电电接口：USB-C 5V

兼容性：安卓系统，IOS系统的手机，平板，电视，游戏机等蓝牙设备，及带有音频输入接口的音响设备

## 三、包装清单

主机 \*1  
产品说明书 \*1  
充电线 \*1  
3.5MM音频线 \*1  
RCA音频线 \*1


## 四、接口示意图

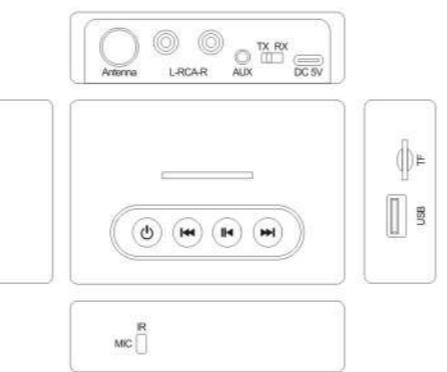

## Packing List

Host \*1  
Product manual \*1  
Charging cable \*1  
3.5MM audio cable \*1  
RCA audio cable \*1

## Interface Diagram

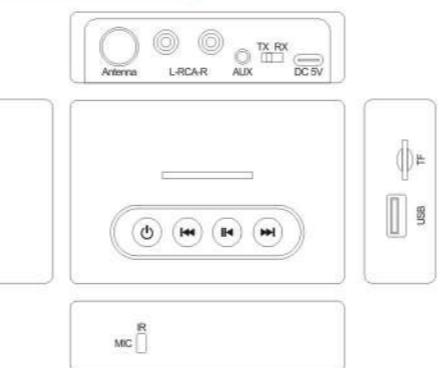

## 五、操作功能

A、开/关机：长按 (↓) 开机后蓝色指示灯闪烁。  
长按 (↓) 关机后蓝色指示灯熄灭。  
休眠功能：开机后如果没有进行任何操作，5分钟后将自动关机。

### B、蓝牙接收模式连接 (RX)

(拨动 “RX/TX” 模式开关至 “RX” 端)  
1、蓝牙主机蓝色指示灯闪烁，代表设备处于等待配对中，使用蓝牙设备搜索 “D6” 点击进行配对即可连接成功。  
2、通过 (AUX RCA) 音频线将D6蓝牙主机与功放音响等音频设备连接成功之后就可以享受HI-FI音乐了。

### C、蓝牙发射模式连接

(拨动 “RX/TX” 模式开关至 “TX” 端)  
1、蓝牙主机红色指示灯闪烁，将产品的3.5mm音频口连接至您的设备 (如电视机 / 电脑 / PS5)。  
2、打开接收设备 (蓝牙耳机 / 音响) 并使其进入配对状态。  
3、产品会自动搜索接收设备，并进行配对和连接。  
4、若连接成功，产品指示灯红灯常亮。

### D、USB/TF播放模式

蓝牙主机开机后，插入U盘/TF卡 即自动进入音乐播放模式，指示灯为蓝灯常亮。  
支持文件格式：MP3/WAV/WMA/FLAC/APE

## F、LED灯显示

等待配对  
蓝牙接收配对：蓝灯闪烁  
蓝牙发射配对：红灯闪烁  
U盘/TF播放：蓝灯常亮  
(以上功能，遥控器均可使用)

## 六、遥控器图解



注：1. 遥控器关机键仅实现关机功能，开机需长按设备开机键  
2. EQ按键提供正常/摇滚/流行/古典/爵士/乡村七种音效调节

## F. LED light display

Waiting for pairing  
Bluetooth reception pairing: blue light flashing  
Bluetooth transmission pairing: red light flashing  
USB drive/TF playback: blue light always on  
Paired successfully  
Blue light always on  
Red light always on  
(The above functions can be used with the remote control)

## Remote control diagram



Note: 1. The remote control shutdown button only achieves the shutdown function. To start the device, long press and hold the device startup button.  
2. The EQ button provides seven sound effects adjustments: normal/rock/pop/classical/jazz/rural

## FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE 1: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
- Reorient or relocate the receiving antenna.  
- Increase the separation between the equipment and receiver.  
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.