


# 封面


**MCHOSE 迈从**

**User manual**

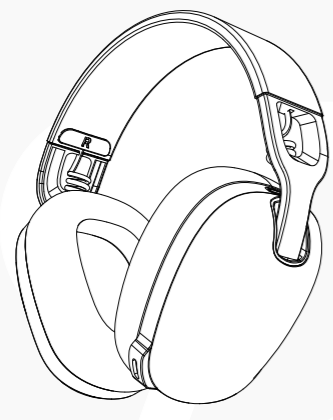

**G11**  
Gaming headset

**按键示意图 / KEY DIAGRAM**

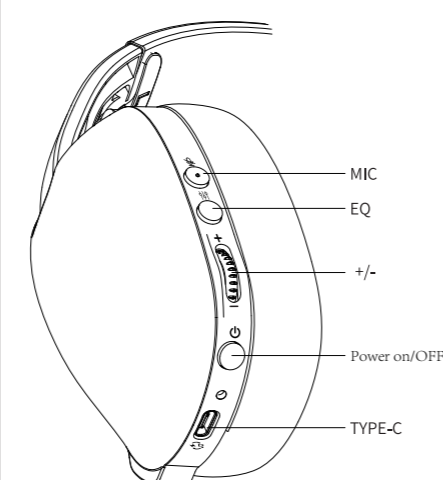

MIC  
EQ  
+/-  
Power on/OFF  
TYPE-C

**产品规格 / SPEC**

电 池 容 量：500mAh  
正 常 充 电 时 间：约1.5H  
充 电 插 座：TYPE-C USB  
无 线 连 接 范 围：>10米  
外 形 尺 寸：172.8\*80.5\*179.4mm  
重 量：约188克

Battery capacity：500mAh  
Charging time：About 1.5H  
Charging port：TYPE-C USB  
Connection range：>10m  
Size：172.8\*80.5\*179.4 mm  
weight：About 188g

**产品参数 / PARAMETER**

喇叭规格：φ40mm	Speaker Spec：φ40mm
喇叭额定功率：15mW	Rating：15mW
喇叭灵敏度：101±3dB	Sensitivity：101±3dB
喇叭频率范围：20Hz～20KHz	Frequency response：20Hz～20KHz
麦克风规格：φ6*2.7mm	Mic Spec：φ6*2.7mm
麦克风额定电压：3.0V	Rated voltage：3.0V
麦克风灵敏度：-38±3dB	Sensitivity：-38±3dB
麦克风频率范围：100Hz～10000Hz	Frequency response：100Hz～10000KHz

**LED指示灯 / LED INDICATO**

	蓝牙模式 / Bluetooth mode	2.4G模式 / 2.4G mode
配对中 / Pairing	蓝灯闪烁 / Blue light flashing	白灯闪烁 / White light flashing
配对成功 / Successful pairing	蓝灯常亮 / Blue keeps burning	白灯常亮 / White keeps burning
关机 / Power Off	蓝灯闪烁2次 / Blue light flashes twice	白灯闪烁2次 / White light flashes twice
充电中 / Charging	红灯常亮 / Red light keeps burning	
充电完成 / Charge complete	红灯熄灭 / Red light goes out	

**连接步骤 / CONNECTION STEP**

**▶ 蓝牙连接 / Bluetooth connection：**  
蓝牙模式状态下，此时蓝灯快闪等待配对，伴有“开机，配对中”提示音，设备搜索名：G11，手机操作，配对完成后蓝灯长亮，伴有“已连接”提示音，下次开机自动配对连接。  
While in Bluetooth mode, the blue light flash fast and wait for pairing, accompanied with "power-on, pairing" prompt tone. Open Bluetooth and search "G11" on your mobile, the indicator stop flash and keep burning, accompanied with "connected" prompt tone. It will reconnect automatically next time.

**▶ 2.4G连接 / 2.4G connection：**  
2.4G模式状态下，长按开机键3秒关机后不放手待耳机有“配对中”的提示音后松开按键再插DONGLE直到主机白灯长亮 DONGLE绿灯常亮配对成功，回连时发射器要连接上电脑，开机后2秒内自动回连。  
While in 2.4G mode, press power button 3 seconds until hear "pairing" prompt tone, then insert the dongle into PC, the white light on dongle and green light on headset keeps burning that the headset is paired. It will reconnect automatically next time, if dongle is insert into PC.

**▶ 有线连接 / Wired connection：**  
在开机状态下，插TYPE-C转3.5linein线后耳机会自动关机，即进入耳机有线模式。有线模式下耳机按键及音量旋钮均无功能。  
While in power on, insert the line in cable (type-c to 3.5mm), the headset will auto off and enter Wired mode. The button and volumer will in non-function state while in this mode.

※开机时的耳机模式，以上一次关机时的模式为准  
The mode at start up is same as headset be shut down last time

**操作说明 / OPERATING INSTRUCTION**

- 开机：在关机连接状态下，长按开机键3秒，此时(2.4G模式白灯/BT模式蓝灯)慢闪，伴有“开机”的提示音。
- 关机：在开机连接状态下，长按开机键3秒，此时(2.4G模式白灯/BT模式蓝灯)闪烁2次后关机，伴有“关机”的提示音。
- 蓝牙 / 2.4G转换：在开机连接状态下，长按3秒MIC开关转BT模式，再长按3秒MIC转2.4G模式，此时(BT模式蓝灯 / 2.4G模式白灯)长亮，伴有“蓝牙模式 / USB模式”的提示音。
- EQ功能：在连接状态下，单击一次换一个音效，此时(2.4G模式白灯/BT模式蓝灯)长亮，伴有“A.游戏模式 B.音乐模式”的提示音。(开机默认游戏模式)
- MIC功能：在连接状态下，单击咪键开或关MIC，伴有“麦克风开 / 麦克风关”的提示音。
- 音量加减：在听歌/通话状态下，编码电位器向上拨动音量+，向下拨动音量-。
- 接听来电：来电状态下，短按开机键，接通来电。
- 挂断电话：通话状态下，短按开机键，挂断来电。
- 拒接来电：来电状态下，长按开机键，拒接来电。

**操作说明 / OPERATING INSTRUCTION**

- Power on：Press Power button 3 seconds, the blue light for Bluetooth mode, white light for 2.4G slow flash wait for pairing, accompanied with "power-on" prompt tone.
- Power off：While in power-on, press power button 3 seconds, the Indicator flash twice and goes off, accompanied with "power off" tone.
- BT/2.4G switch：while in pairing, press mic button 3 seconds to change mode, Bluetooth with Blue light and 2.4G with white light, accompanied with prompt tone.
- EQ：While in pairing, click EQ button to change sound effect, the indicator on, accompanied with "Game mode" or "Music mode" prompt tone.
- Microphone：While in pairing, click mic button to open or close the mic, accompanied with "Mic on" or "Mic off" prompt tone.
- Volume +/-：While in listing or calling, slide the volumer to control the volume.
- Phone calls：While in standby or multi-media mode, press power button or using mobile answer key to answer the calls.
- Hang up：While on calling, short press power button to hang up.
- Reject call：While in incoming call, long press power button to reject calls.

**注意事项 / ATTENTION**

- 请不要将耳机进行撞击、敲打、摔落、扭曲、放入水中等破坏行为，不要随意拆卸。  
Don't break the headset, like knock, strike, drop, warping or put it into water, and disassemble also.
- 使用时，请远离磁场，远离潮湿，使用温度(-10°C— +40°C)。  
Please keep the headset off the magnetic field and wet air, usage temperature (-10°C to 40°C).
- 请勿使用带有腐蚀性的液体清洁耳机。  
Don't clean the headset with using corrosive liquid.
- 请不要过度充电，以避免降低电池寿命。长时间不使用时，放在干燥、常温、清洁的环境中保存。  
Avert reduce the battery lift, please don't overcharge and place in the environment with dry, Room temperature, clean if not use for a long time.
- 一段时间要充放电一次，确保电池性能。  
Please charge-discharge once in a while to make the battery keep good performance.

**保修卡 / WARRANTY CARD**

用户姓名  
User name：\_\_\_\_\_

联系电话  
Contact no.：\_\_\_\_\_

产品型号  
Model no.：\_\_\_\_\_


产品序列  
Series no.：\_\_\_\_\_

用户地址及邮箱  
User's address and email address：\_\_\_\_\_

购买日期  
Date of purchase：\_\_\_\_\_

经销商名称  
Distributor name：\_\_\_\_\_

经销商电话  
Distributor telephone：\_\_\_\_\_



执行标准：GB4943.1-2022

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

说明书：440X80mm P/N：6625-00762R  
材质：80g书写纸+1C+1C+双面印刷+风琴折