


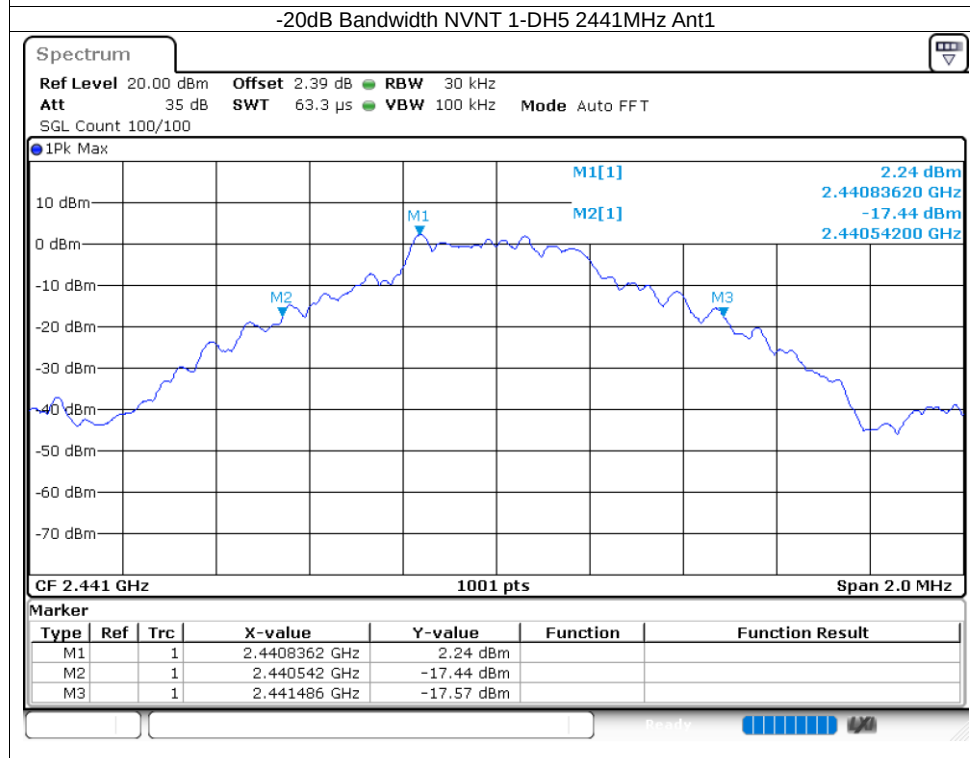
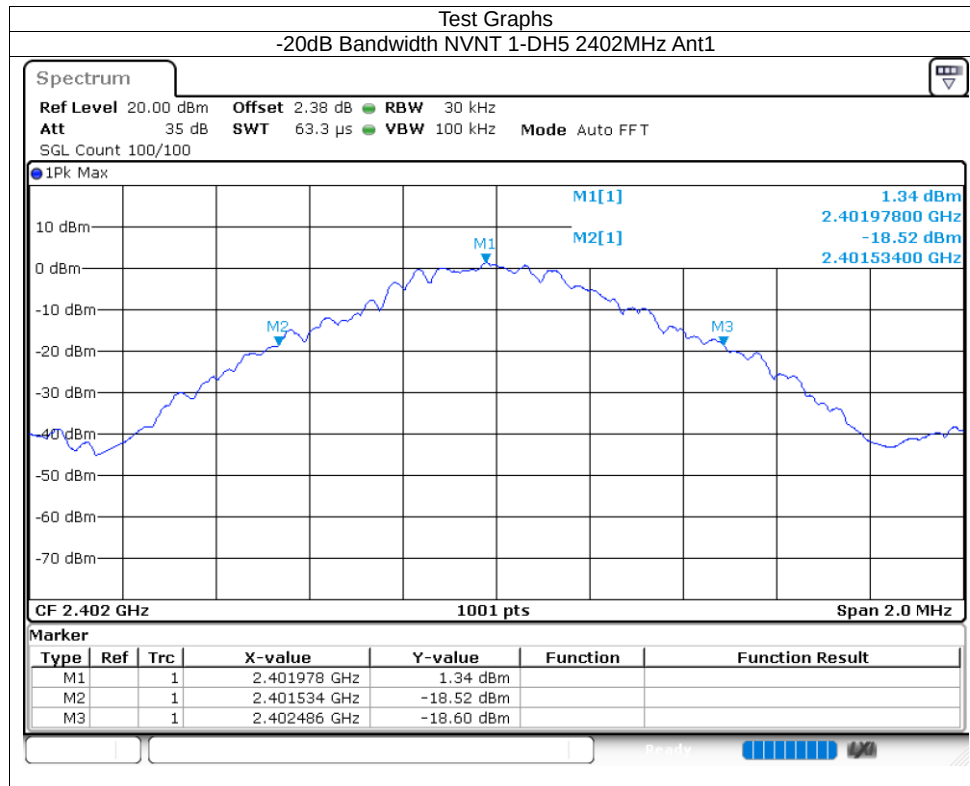
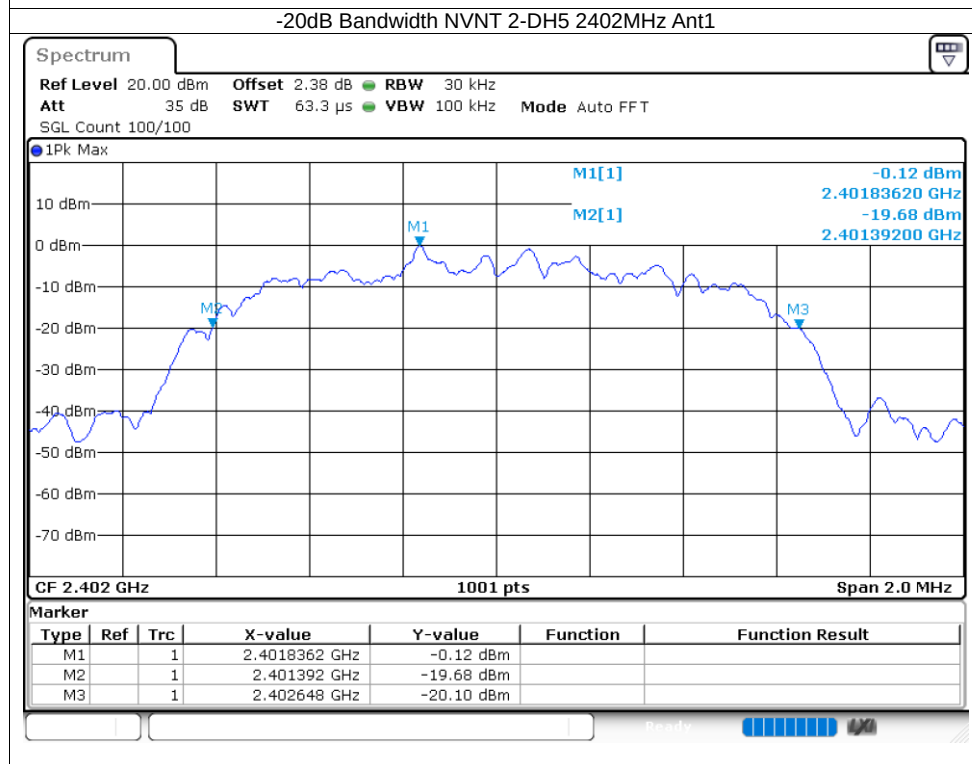




8.3 -20dB BANDWIDTH


Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.952	0	Pass
NVNT	1-DH5	2441	Ant1	0.944	0	Pass
NVNT	1-DH5	2480	Ant1	0.942	0	Pass
NVNT	2-DH5	2402	Ant1	1.256	0	Pass
NVNT	2-DH5	2441	Ant1	1.274	0	Pass
NVNT	2-DH5	2480	Ant1	1.284	0	Pass
NVNT	3-DH5	2402	Ant1	1.272	0	Pass
NVNT	3-DH5	2441	Ant1	1.308	0	Pass
NVNT	3-DH5	2480	Ant1	1.296	0	Pass

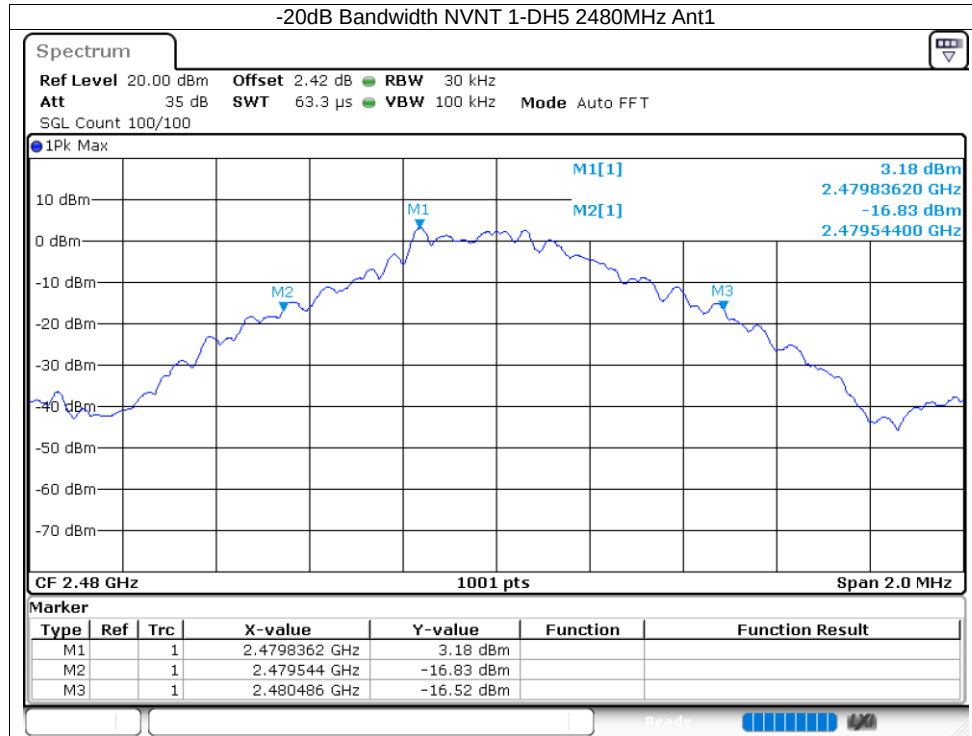

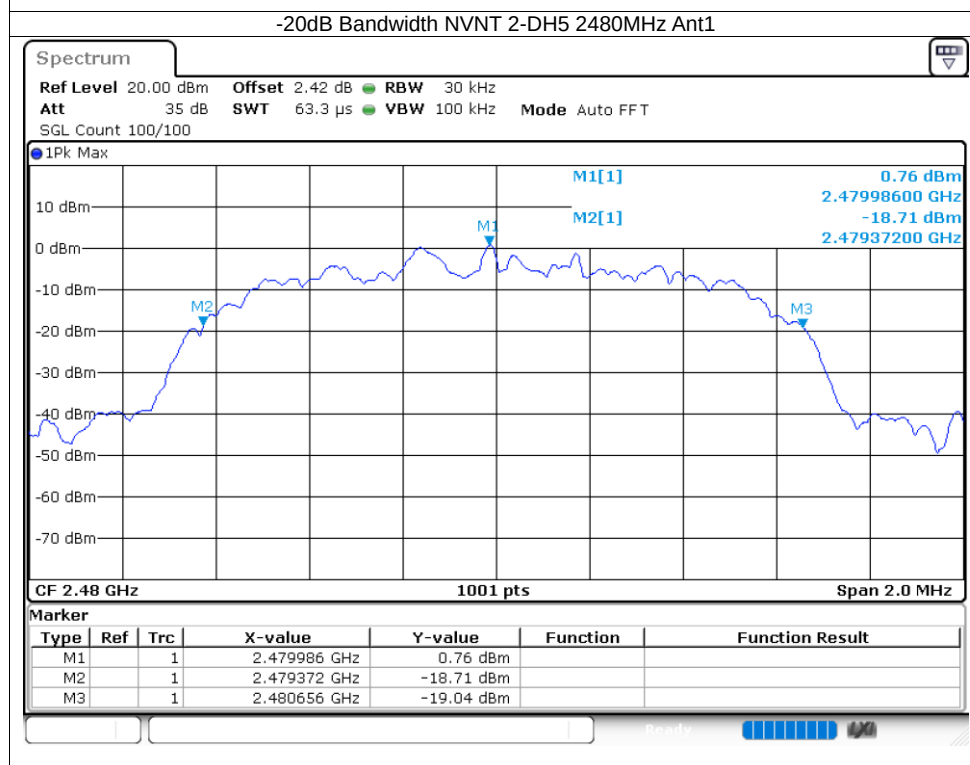

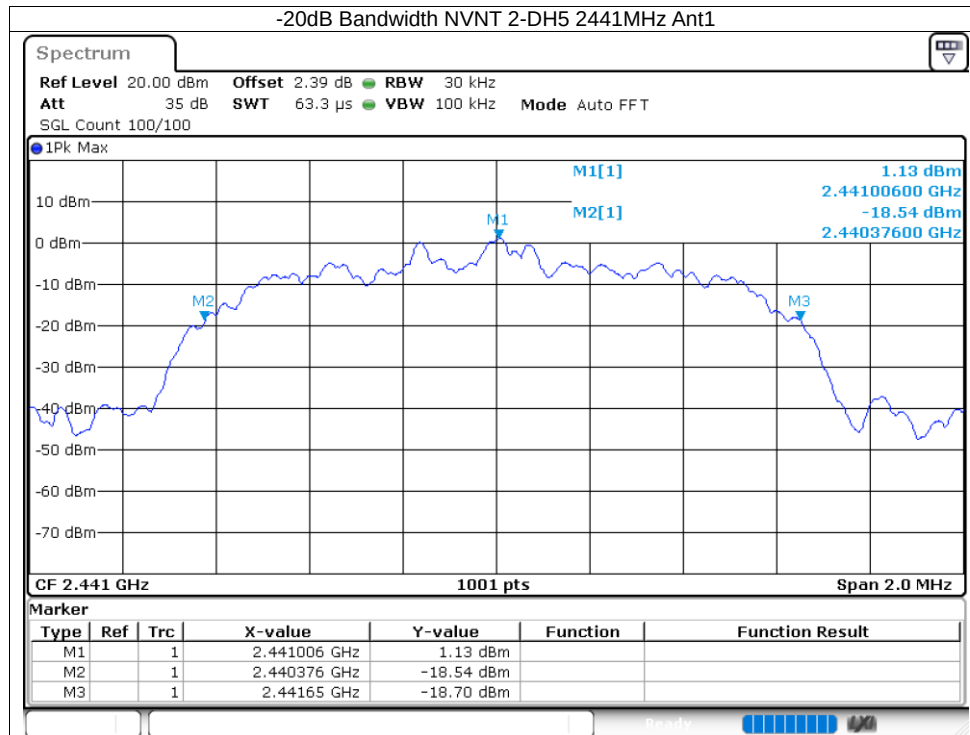


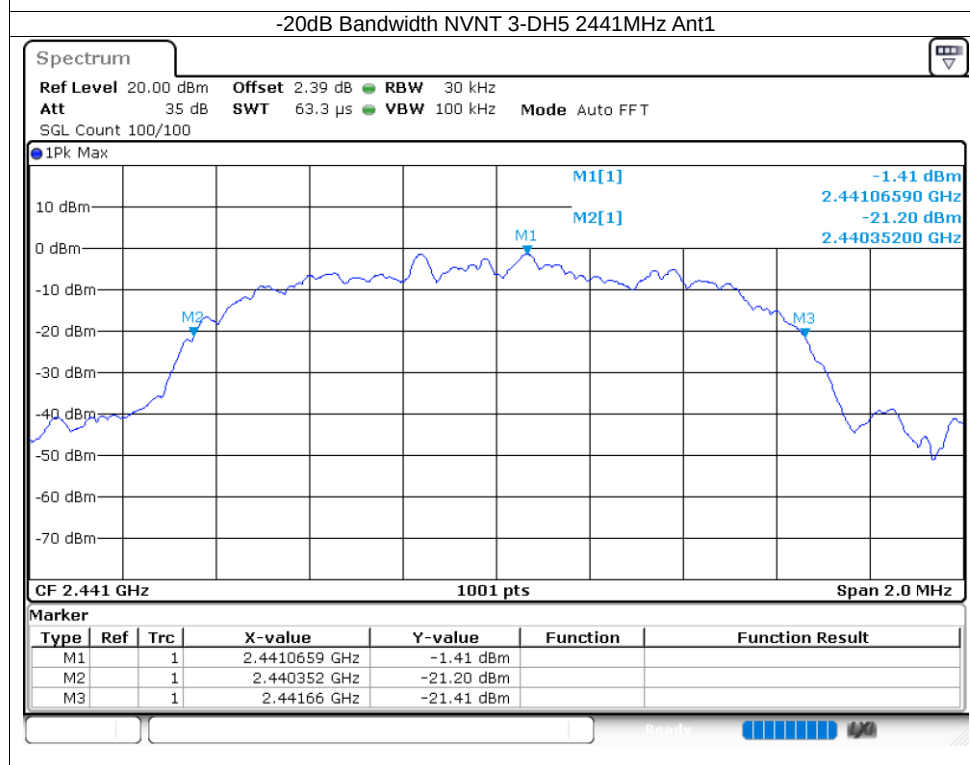
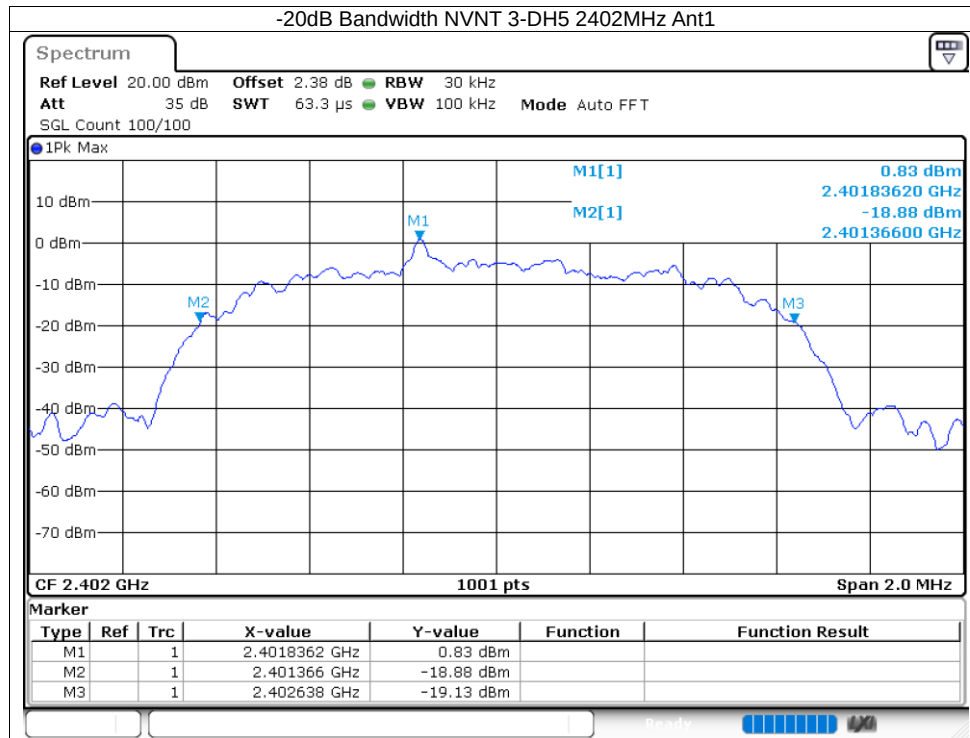



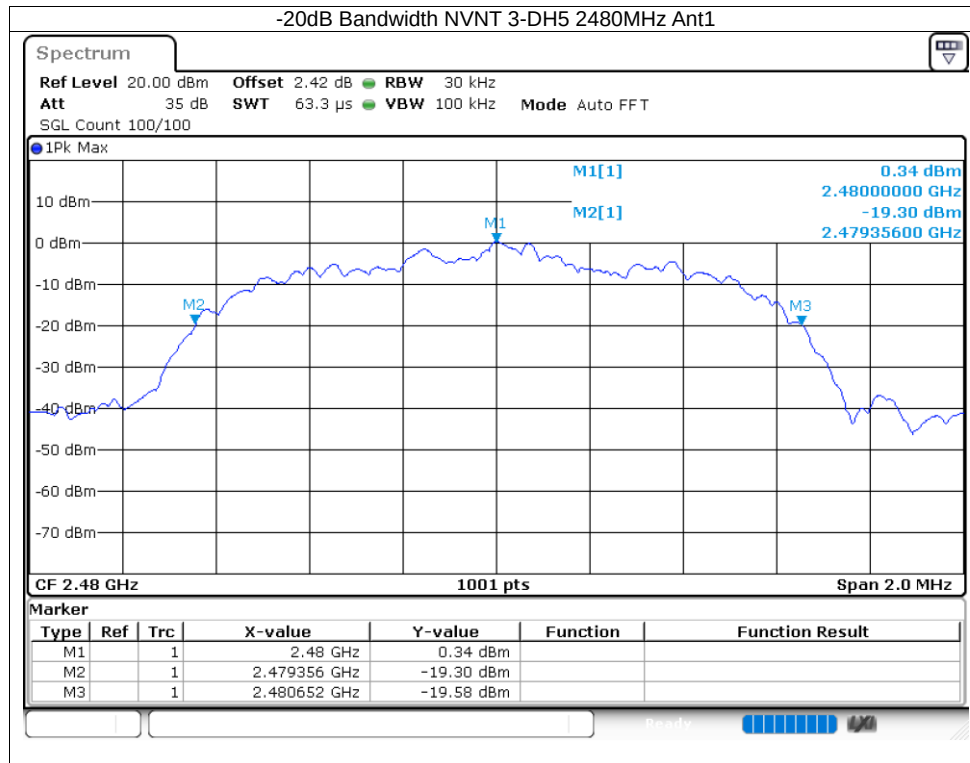




8.4 OCCUPIED CHANNEL BANDWIDTH


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.889
NVNT	1-DH5	2441	Ant1	0.881
NVNT	1-DH5	2480	Ant1	0.885
NVNT	2-DH5	2402	Ant1	1.153
NVNT	2-DH5	2441	Ant1	1.171
NVNT	2-DH5	2480	Ant1	1.157
NVNT	3-DH5	2402	Ant1	1.167
NVNT	3-DH5	2441	Ant1	1.159
NVNT	3-DH5	2480	Ant1	1.151

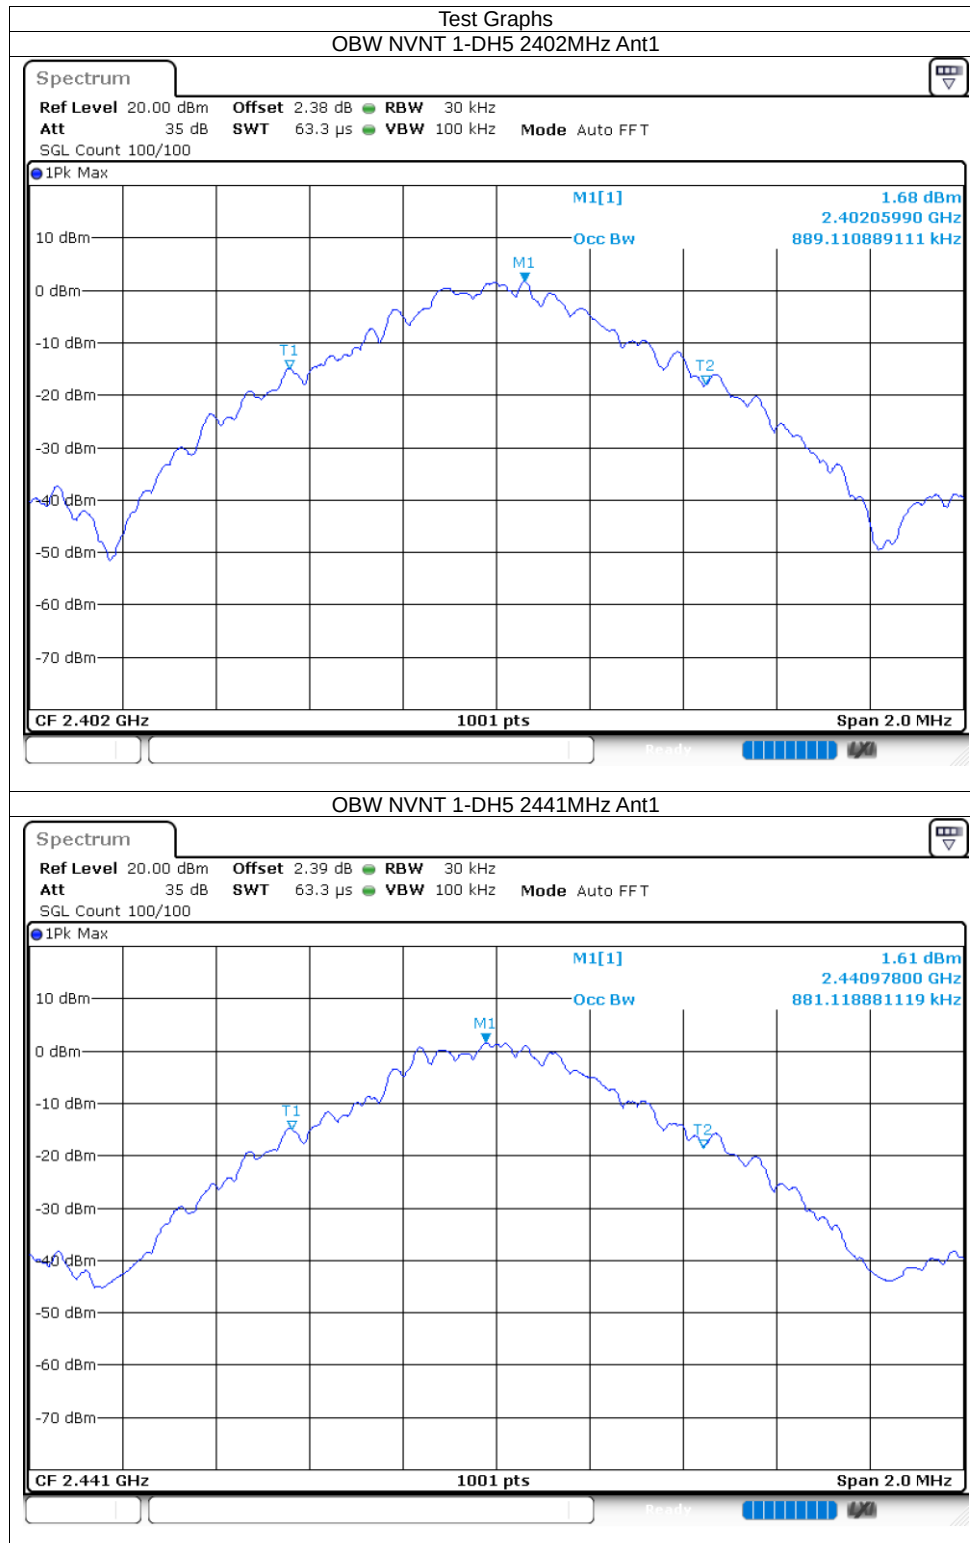

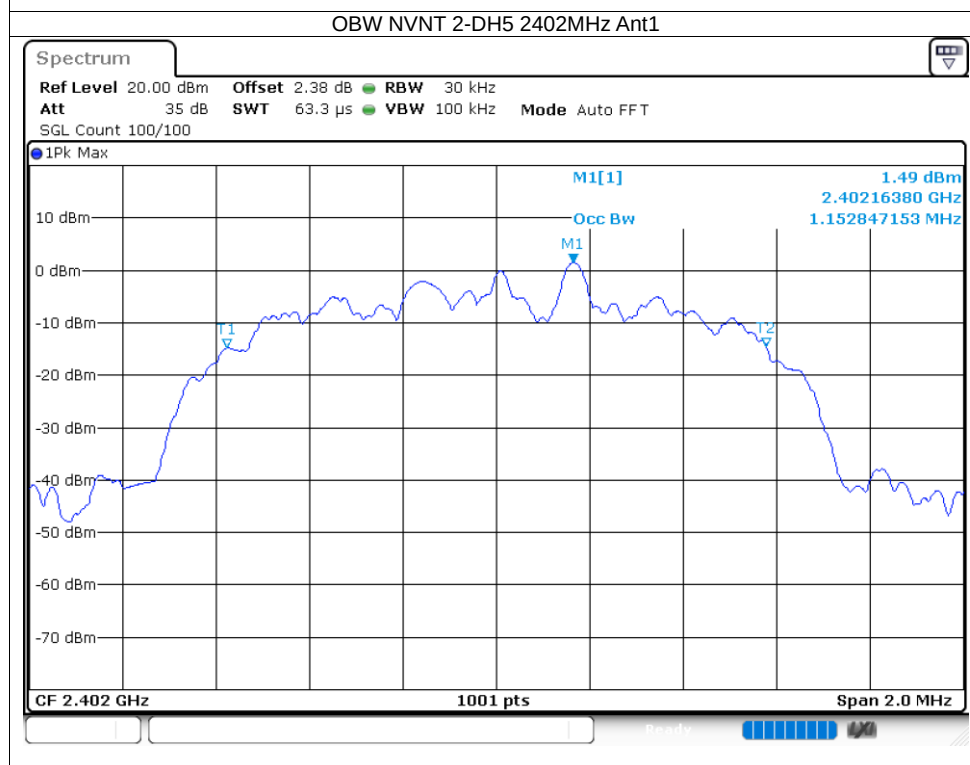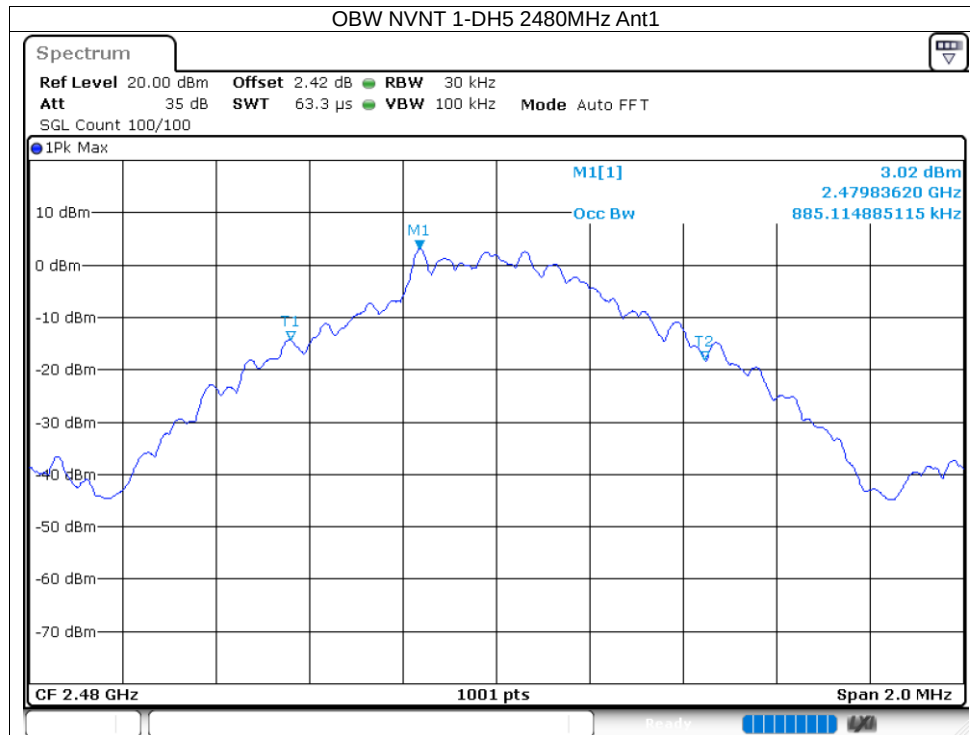

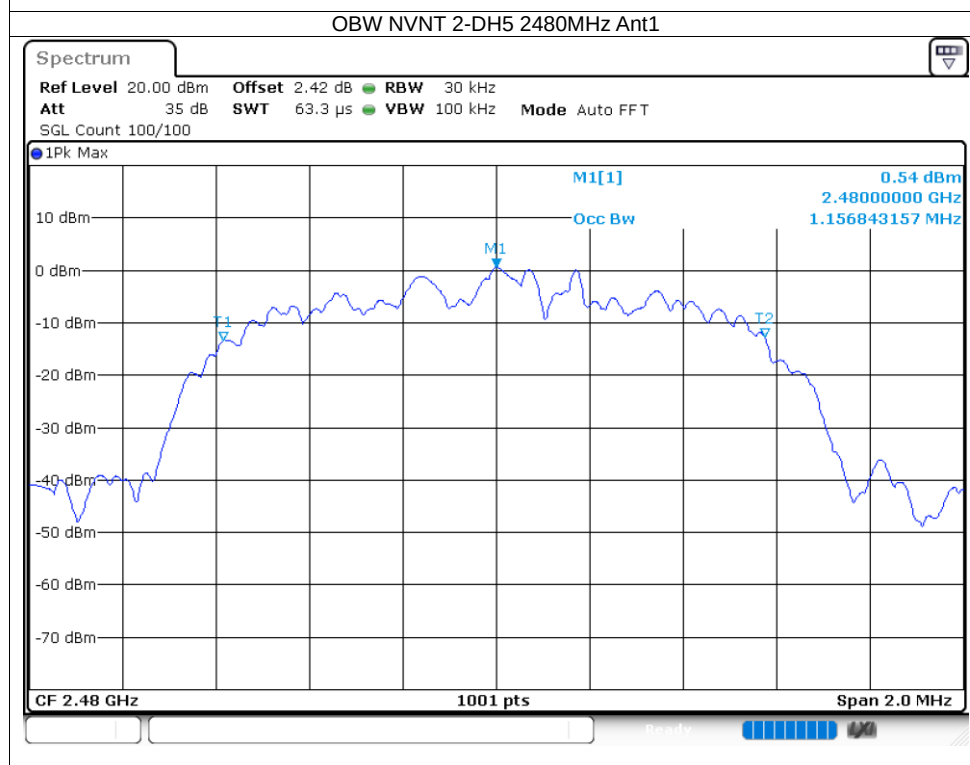
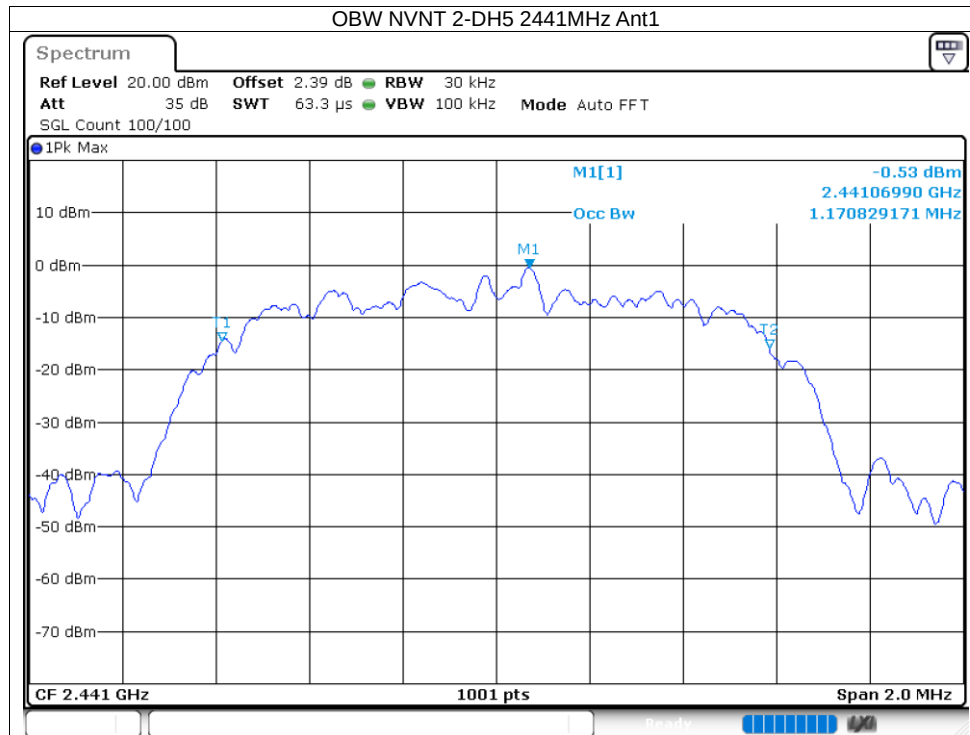


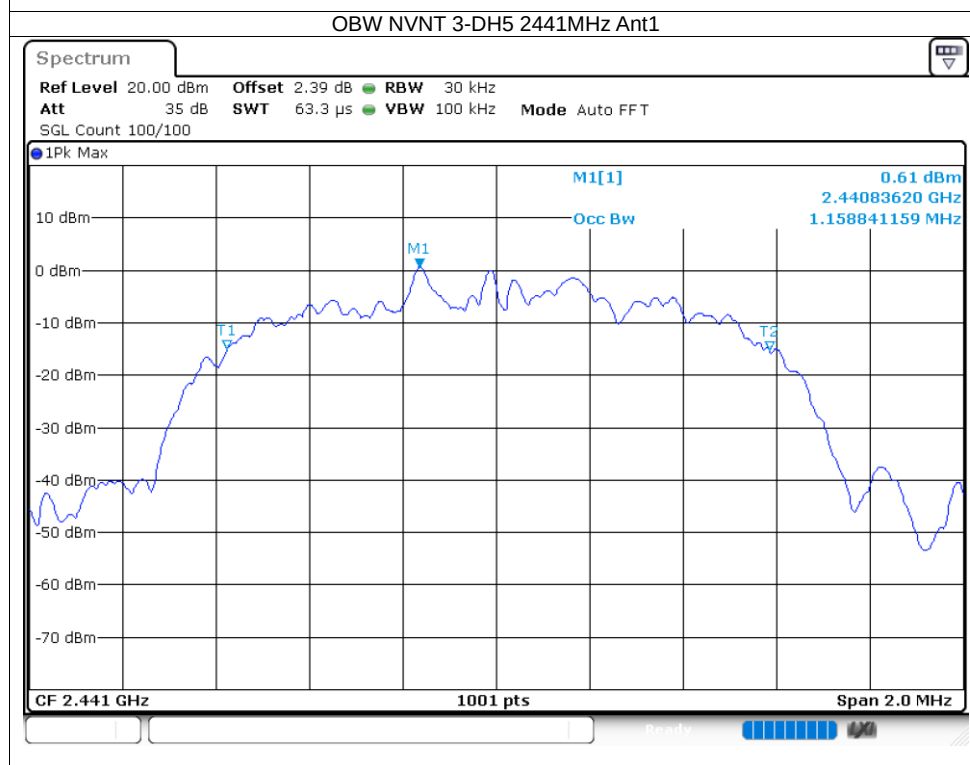
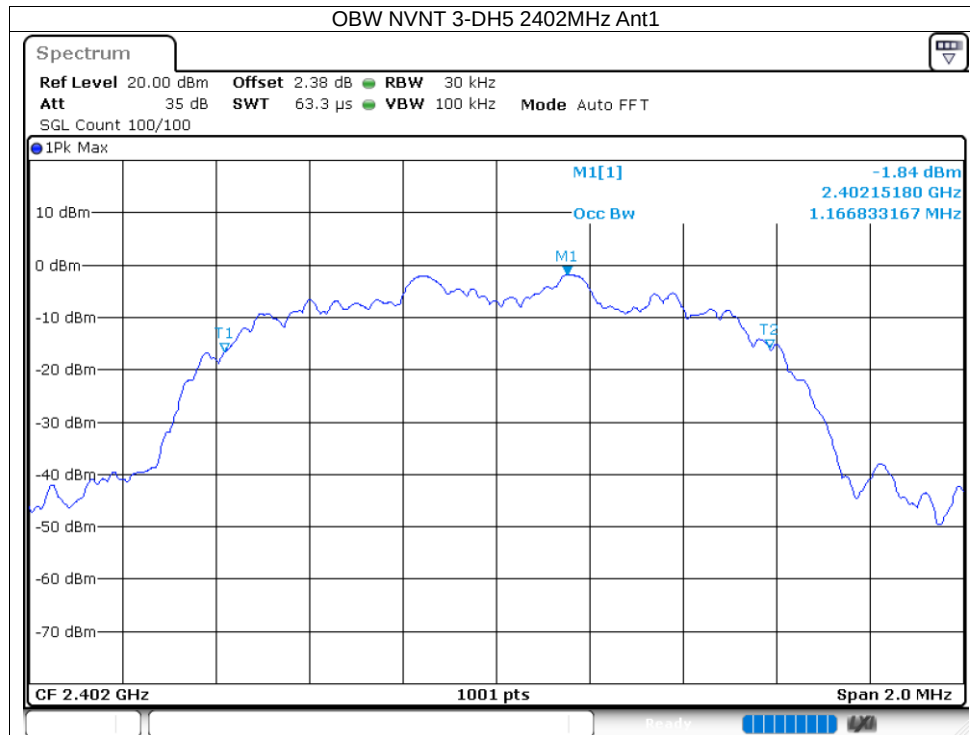



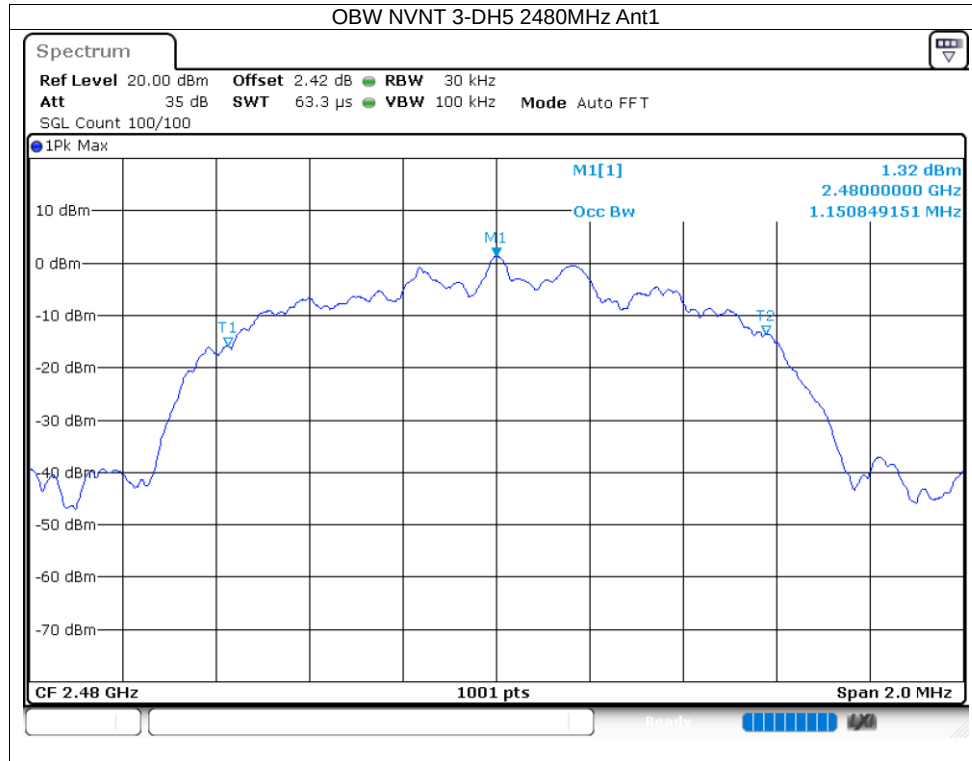




8.5 CARRIER FREQUENCIES SEPARATION


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.962	2402.964	1.002	0.025	Pass
NVNT	1-DH5	Ant1	2440.836	2441.84	1.004	0.025	Pass
NVNT	1-DH5	Ant1	2479.168	2480.17	1.002	0.025	Pass
NVNT	2-DH5	Ant1	2401.836	2402.836	1	0.025	Pass
NVNT	2-DH5	Ant1	2440.989	2442.019	1.03	0.025	Pass
NVNT	2-DH5	Ant1	2479.016	2480.043	1.027	0.025	Pass
NVNT	3-DH5	Ant1	2401.989	2403.024	1.035	0.025	Pass
NVNT	3-DH5	Ant1	2440.921	2441.954	1.033	0.025	Pass
NVNT	3-DH5	Ant1	2478.994	2479.991	0.997	0.025	Pass

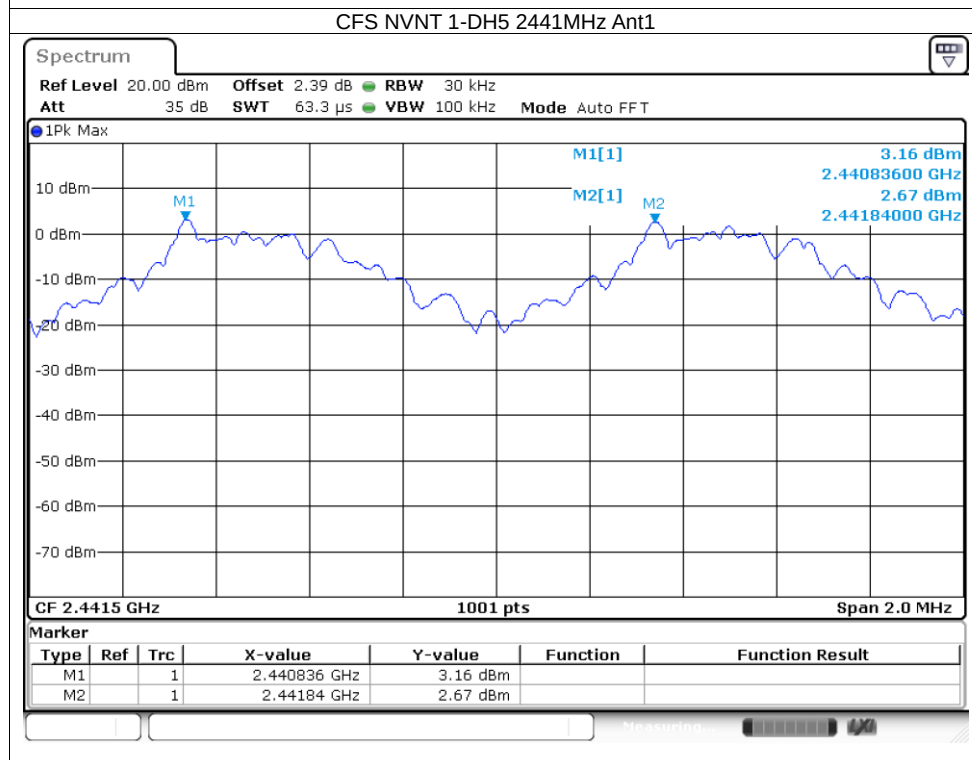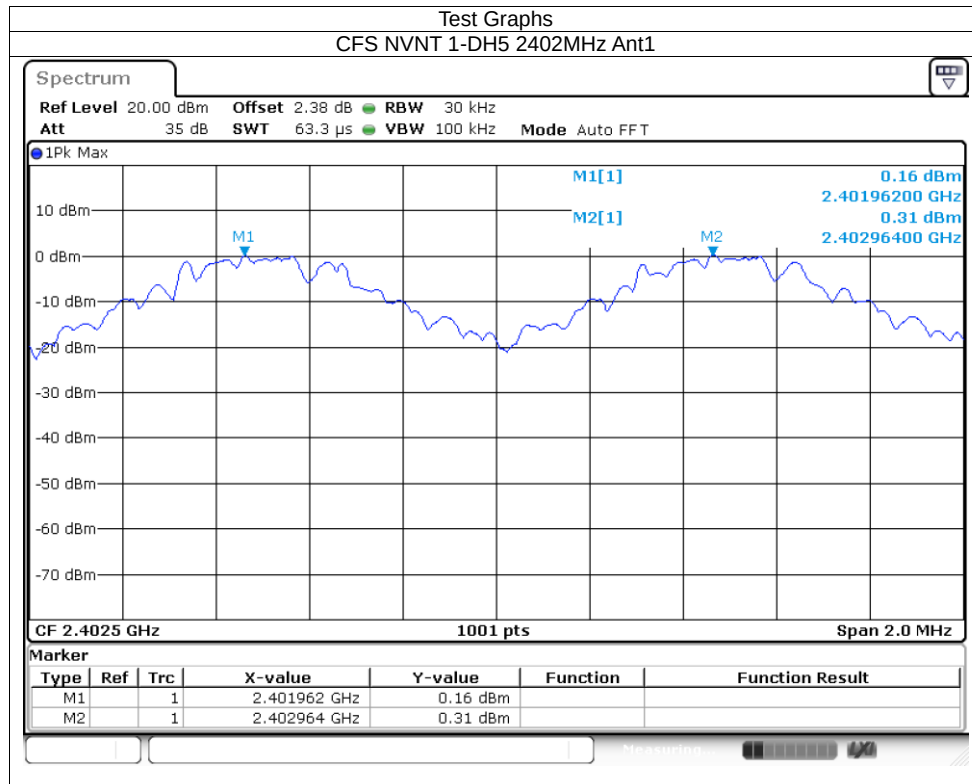

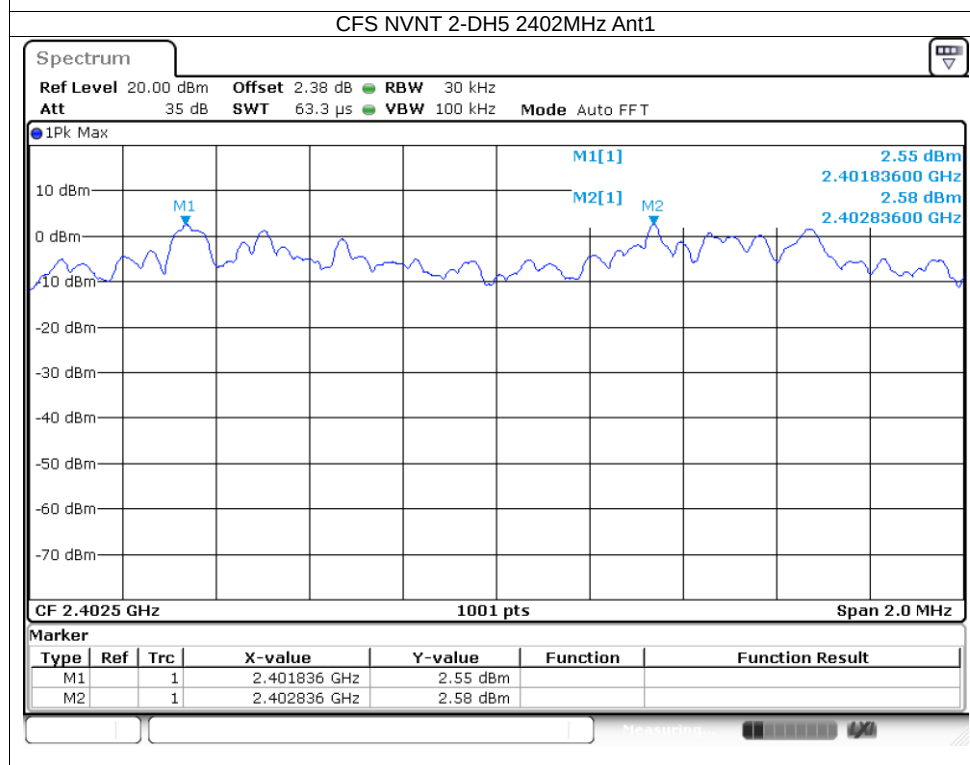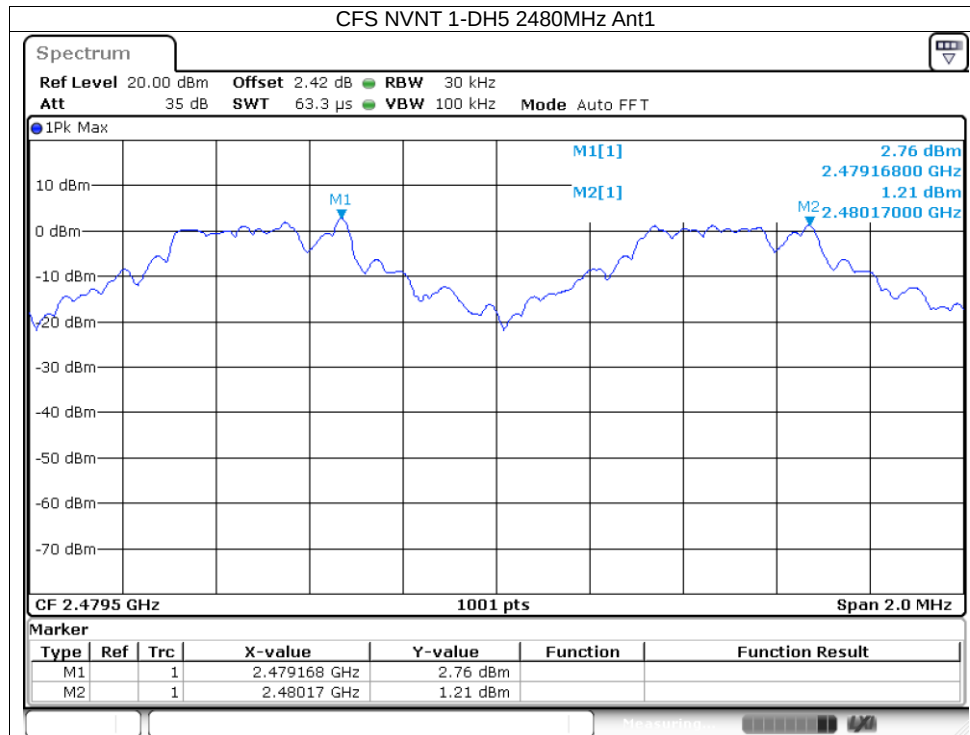

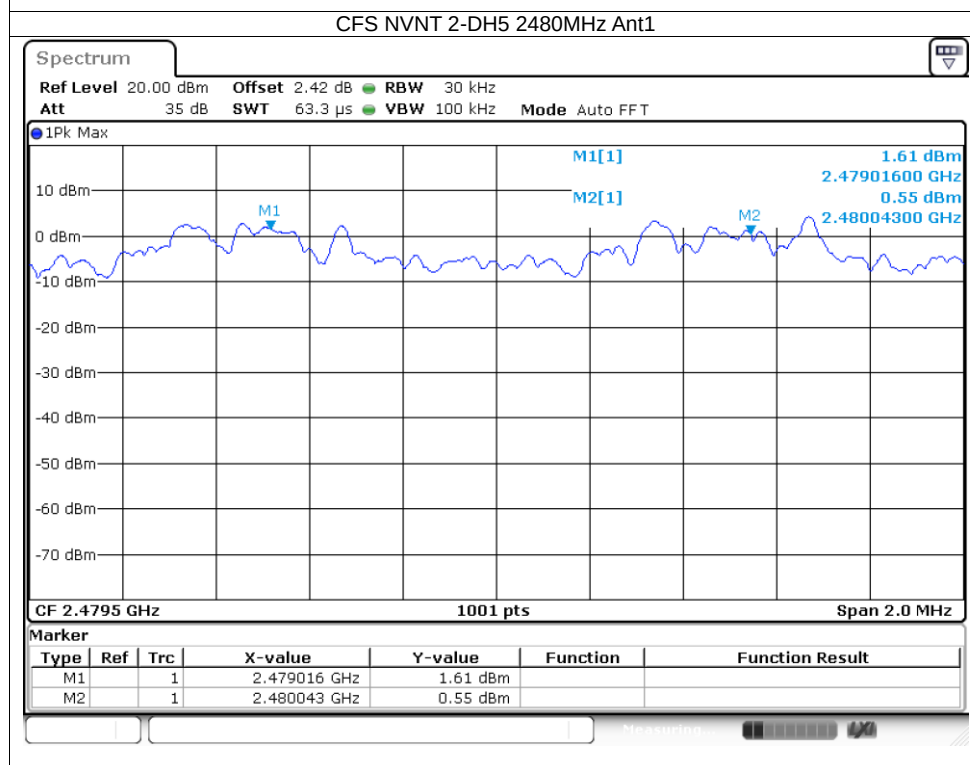
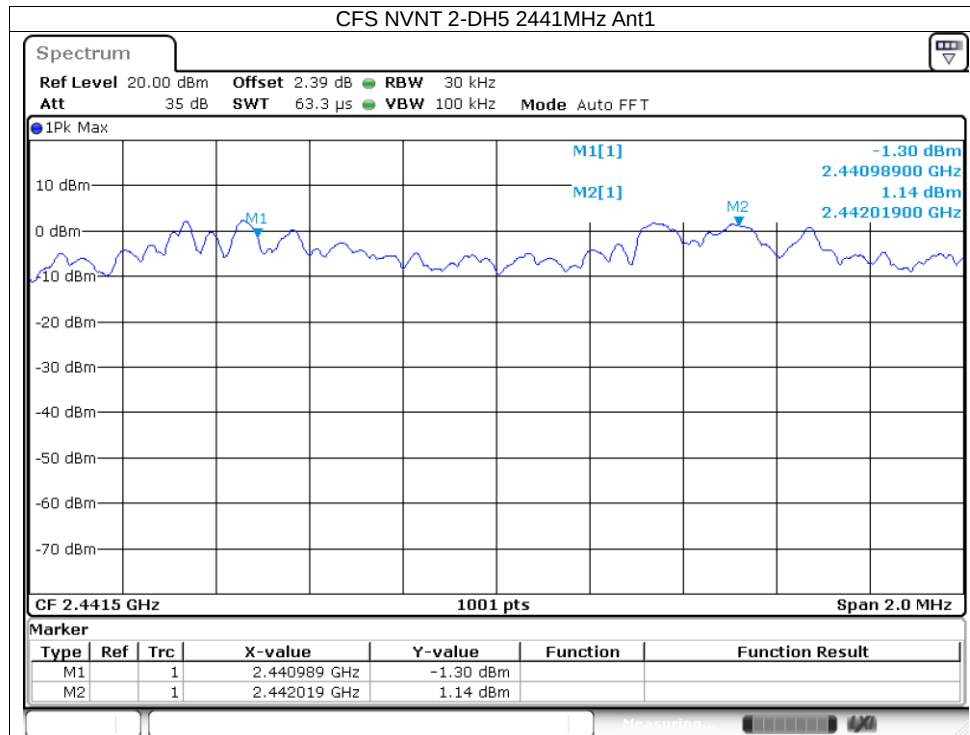


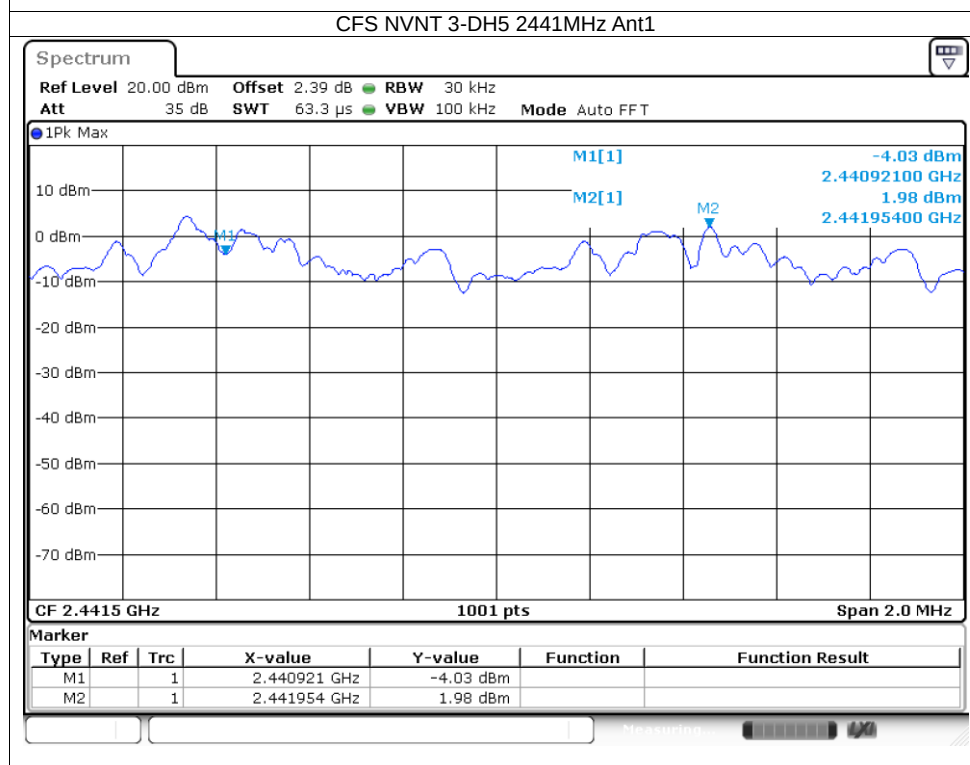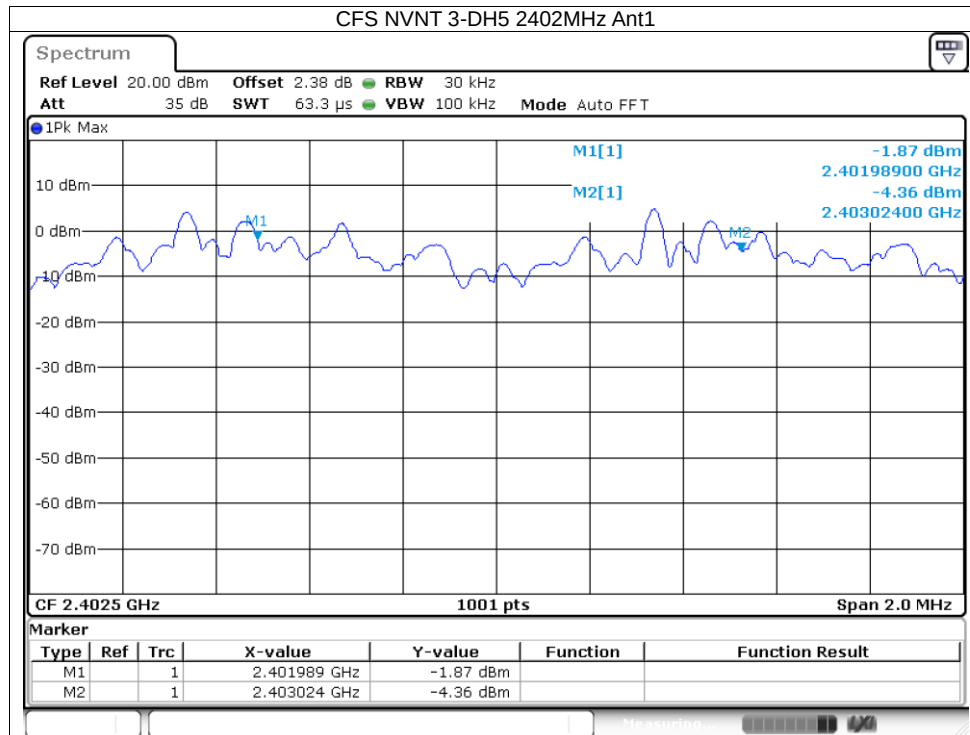


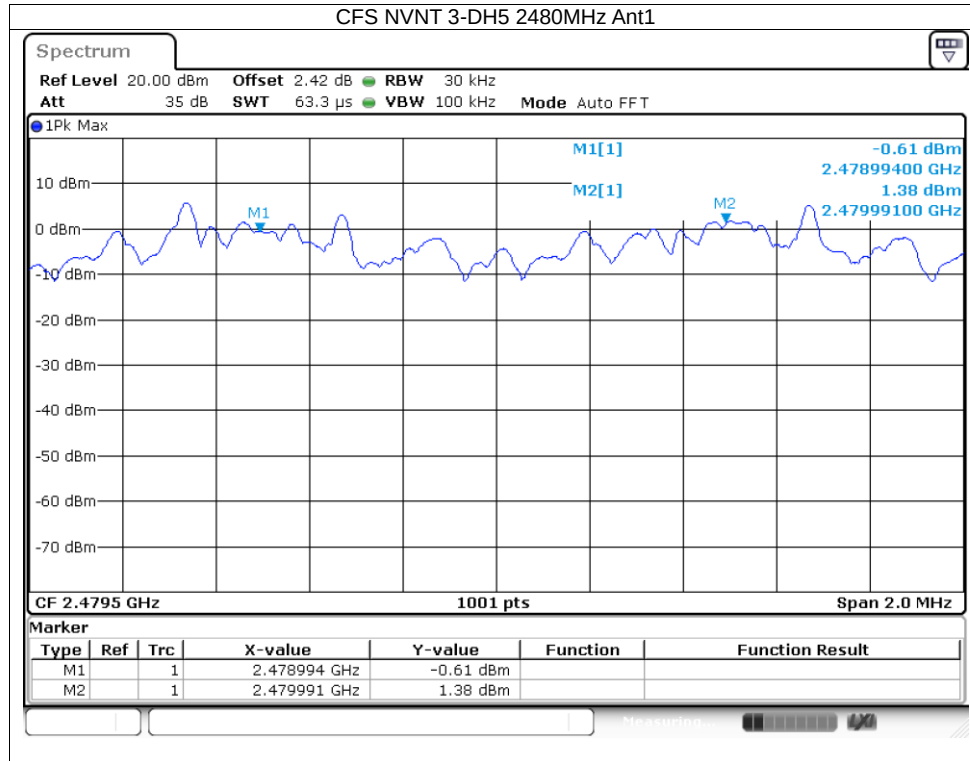

8.6 NUMBER OF HOPPING CHANNEL



Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass

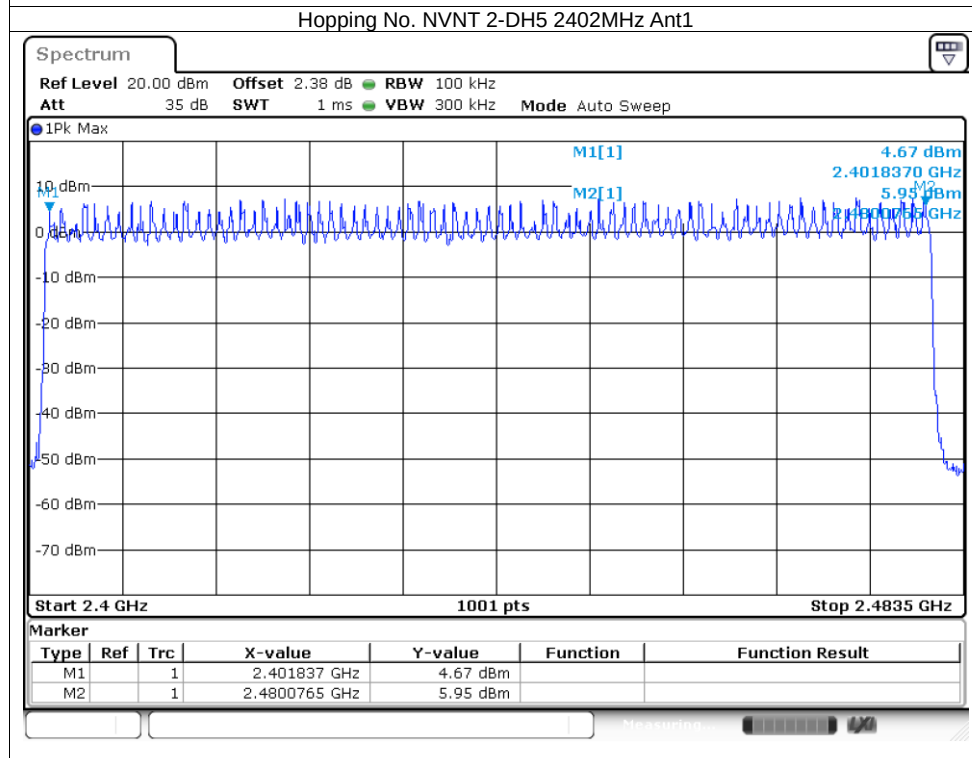
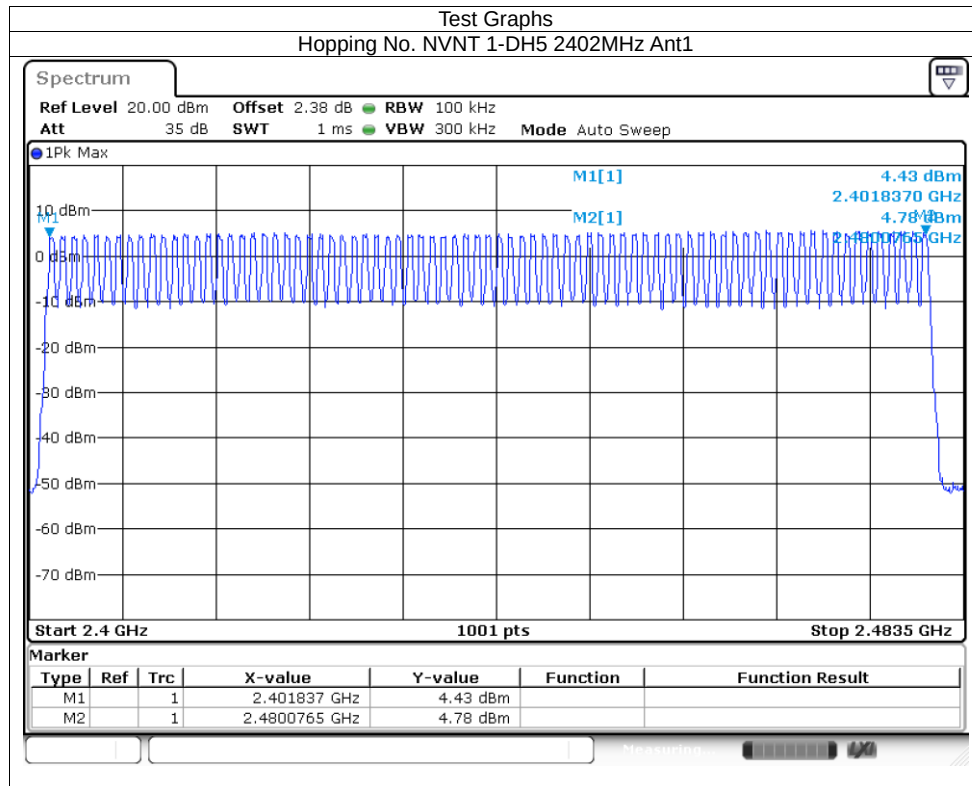



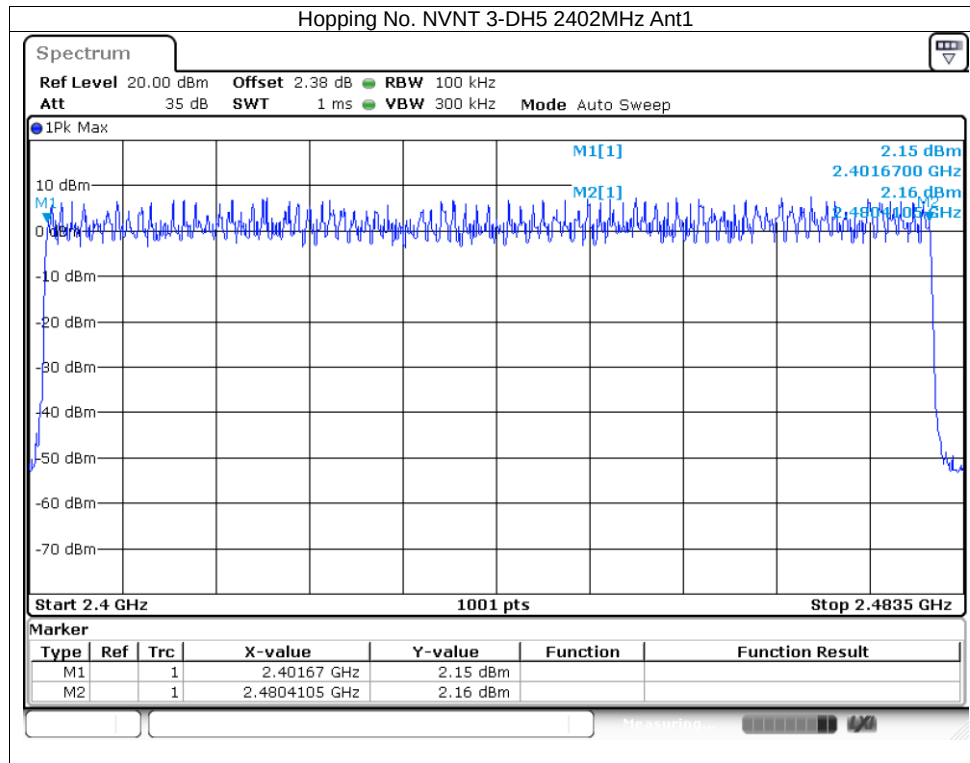




8.7 BAND EDGE



Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-54.15	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-57.43	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-54.97	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-57.02	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-55.12	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-57.29	-20	Pass

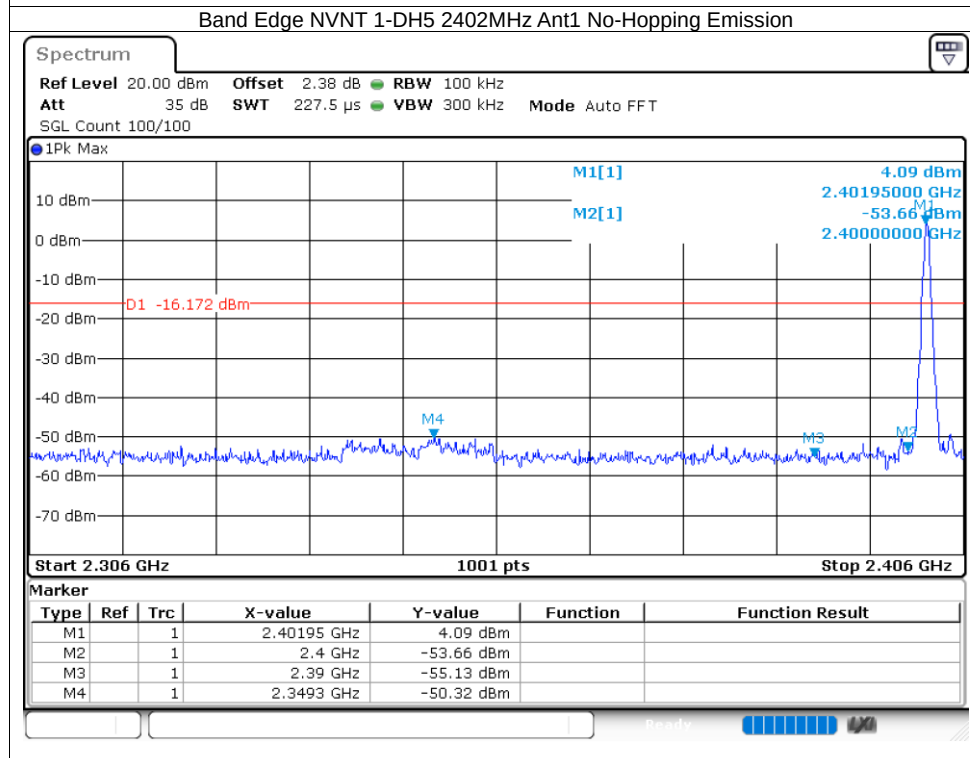
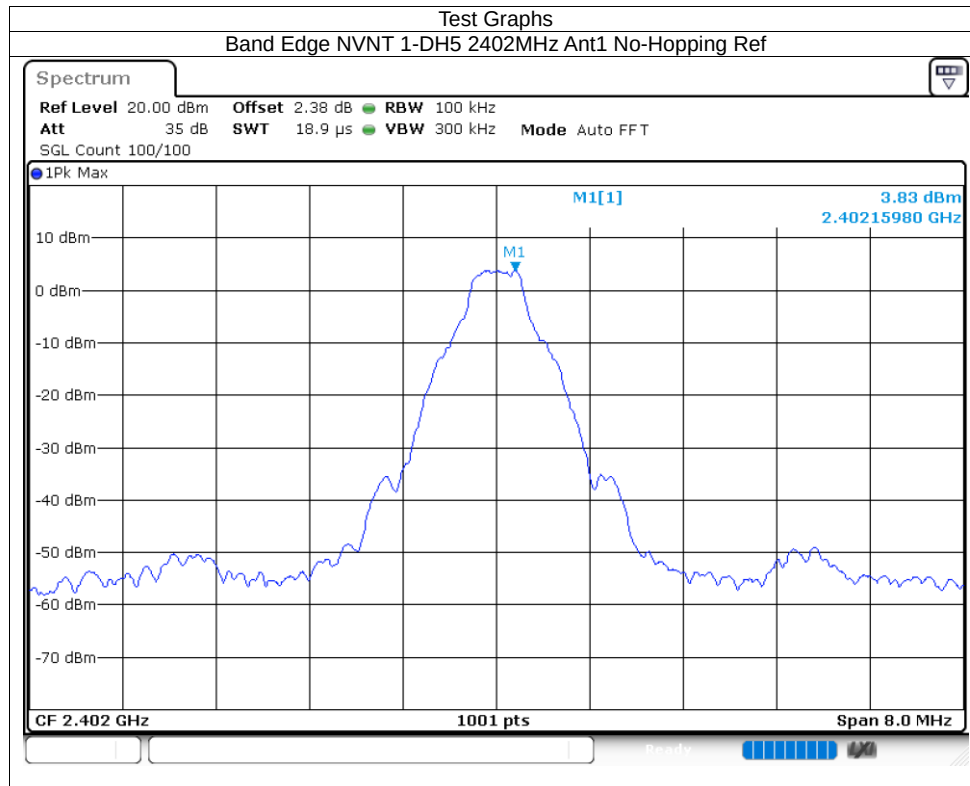


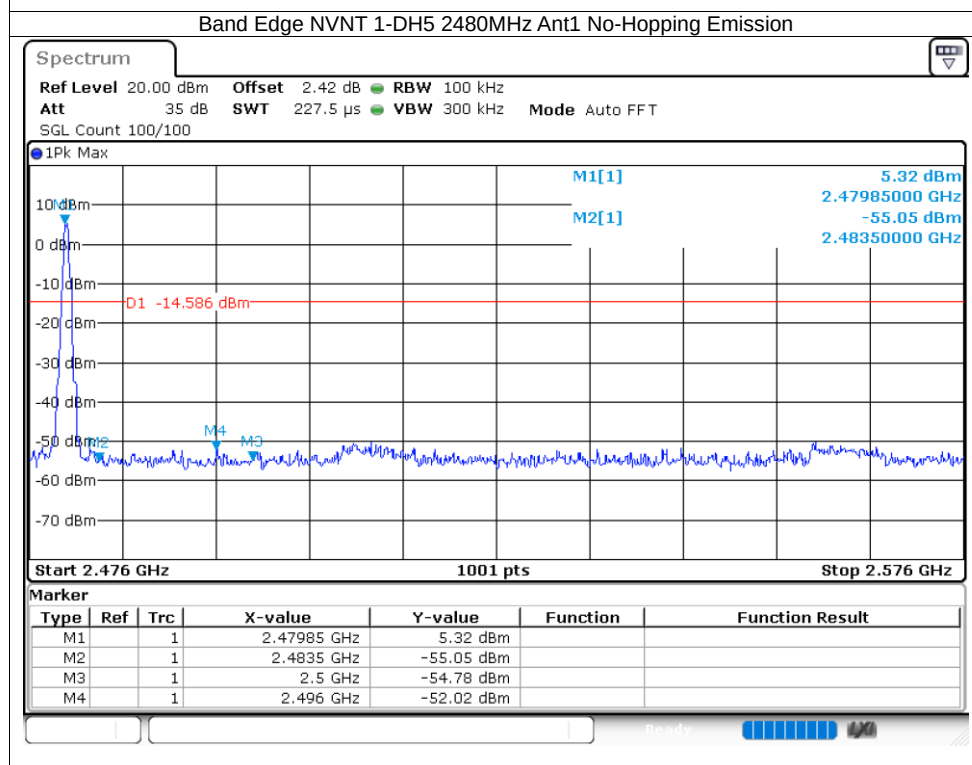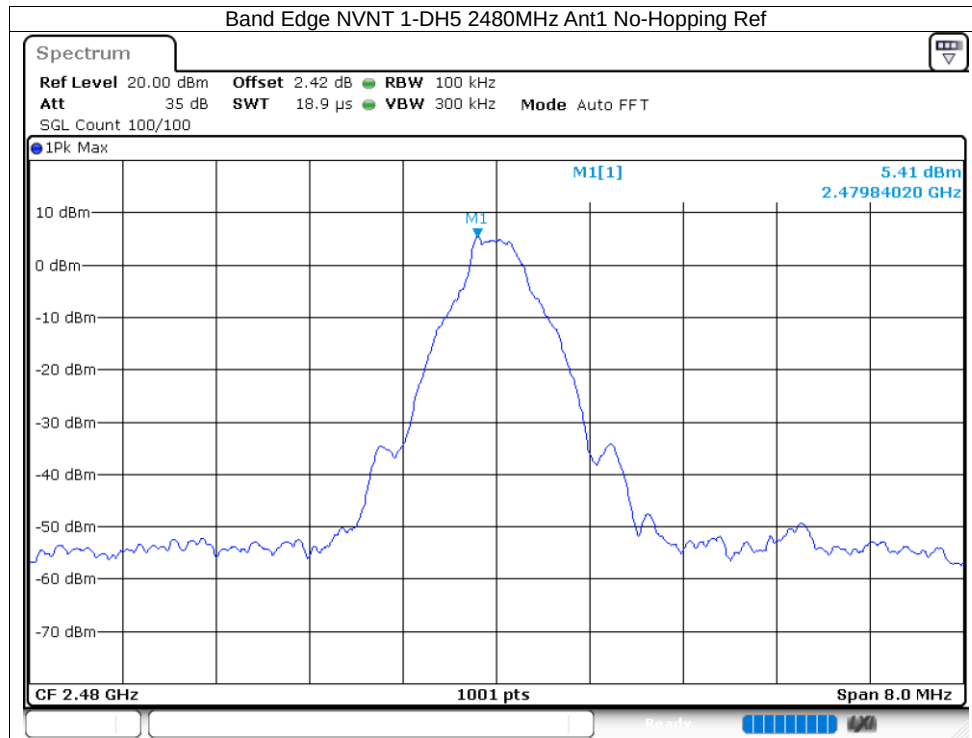

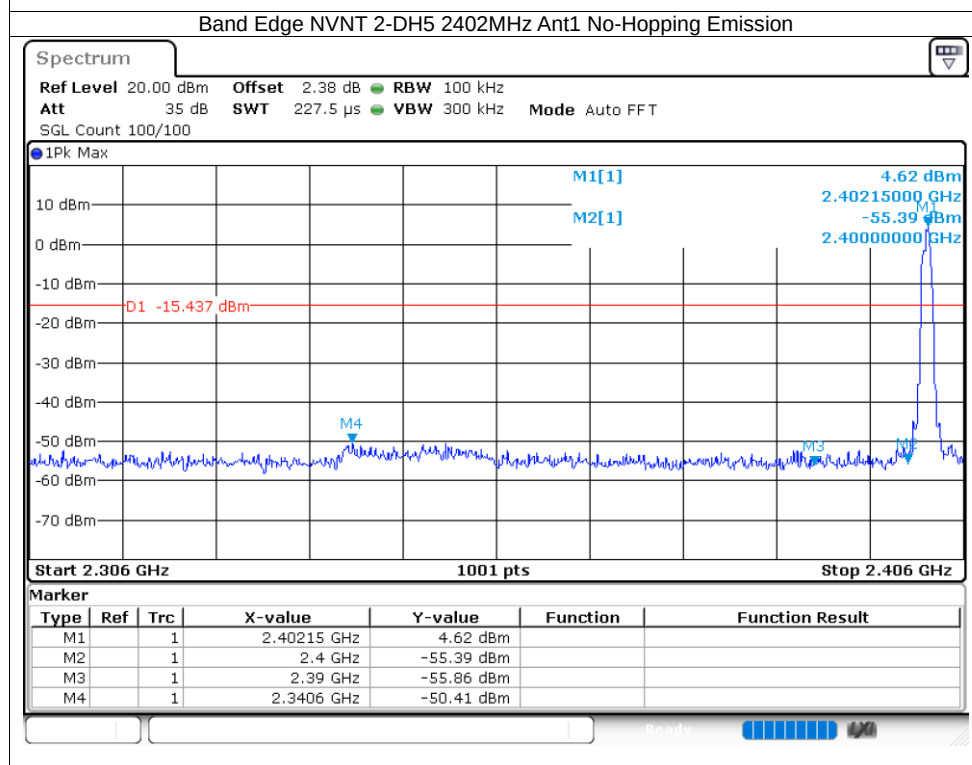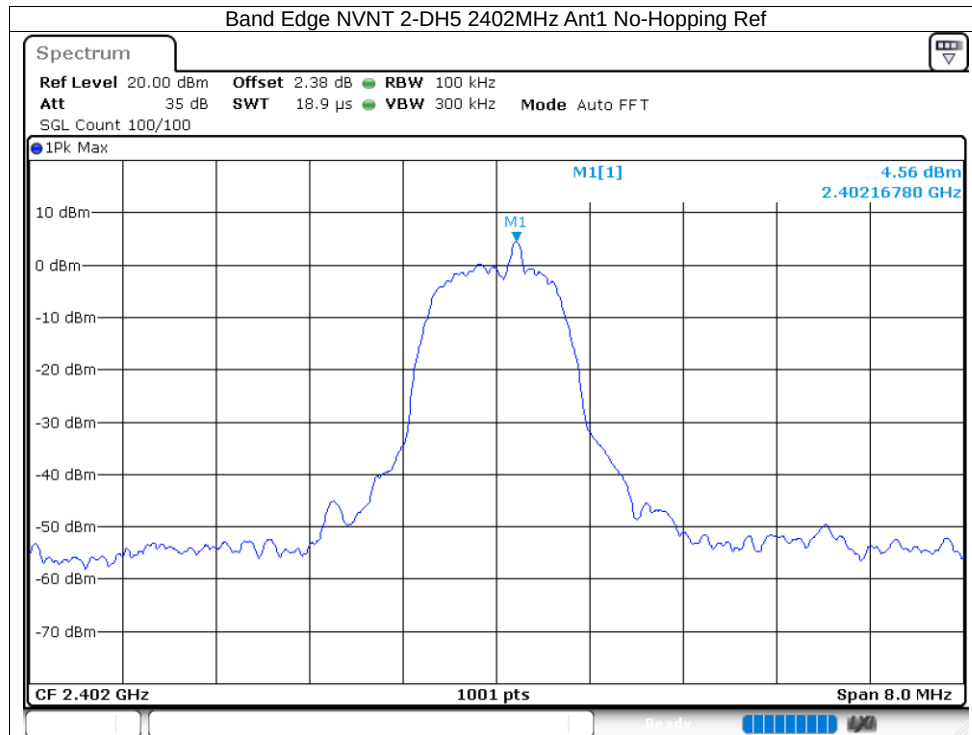

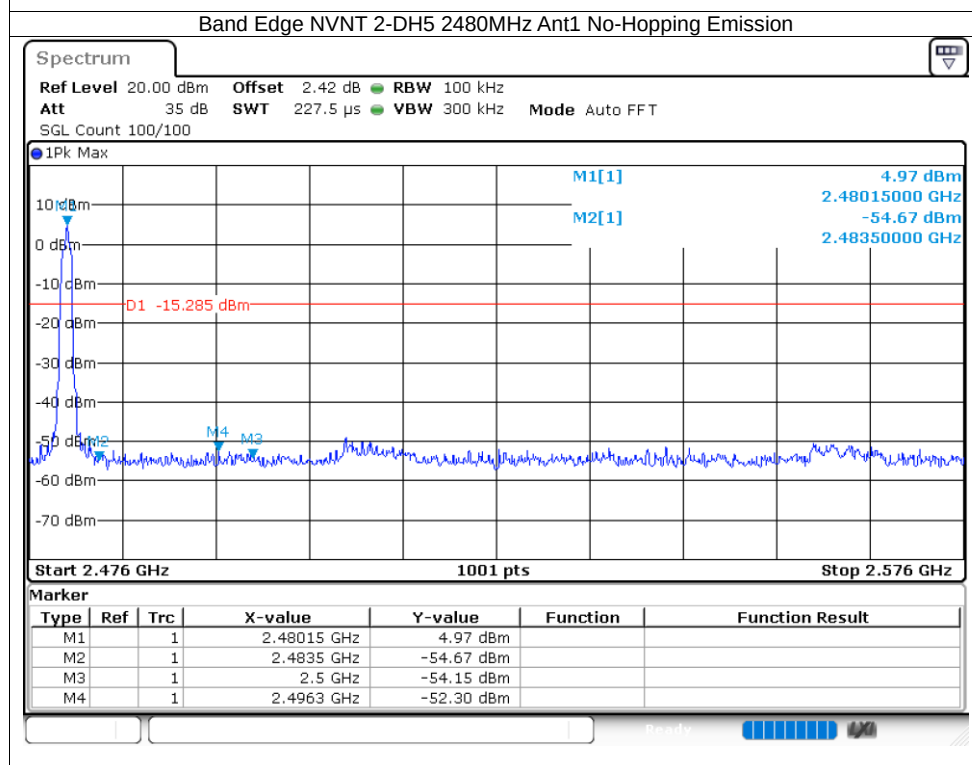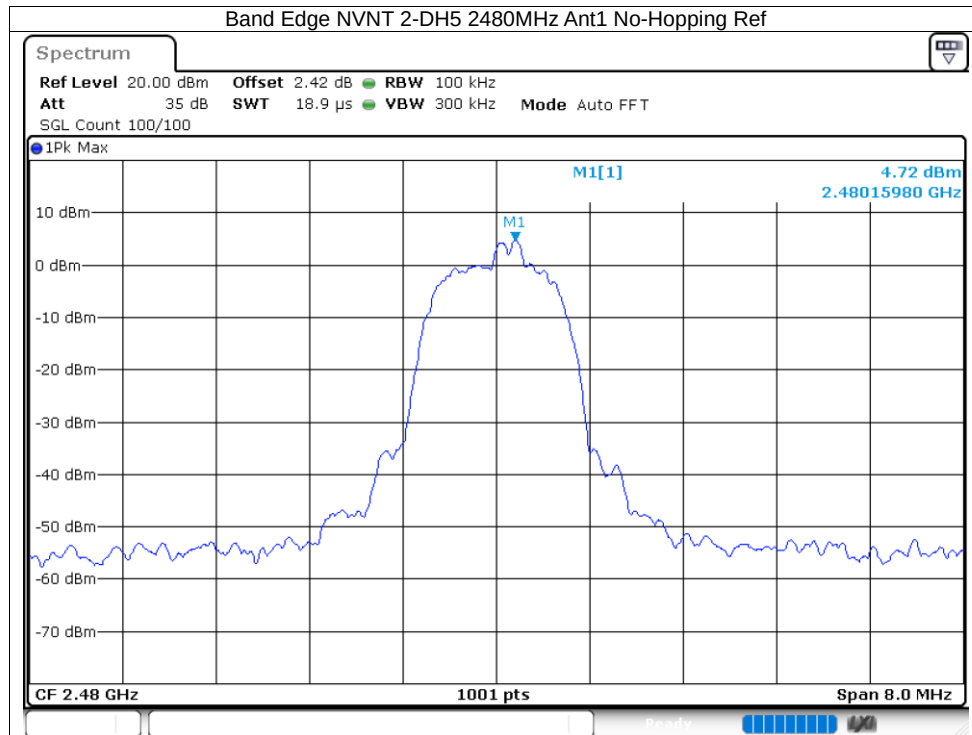


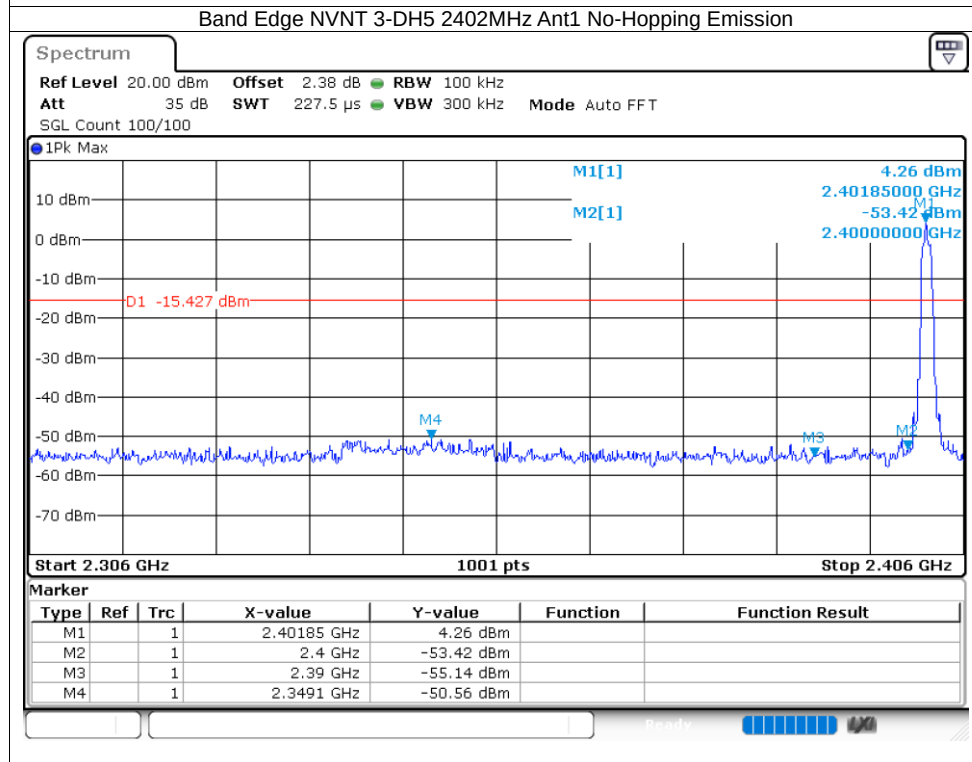
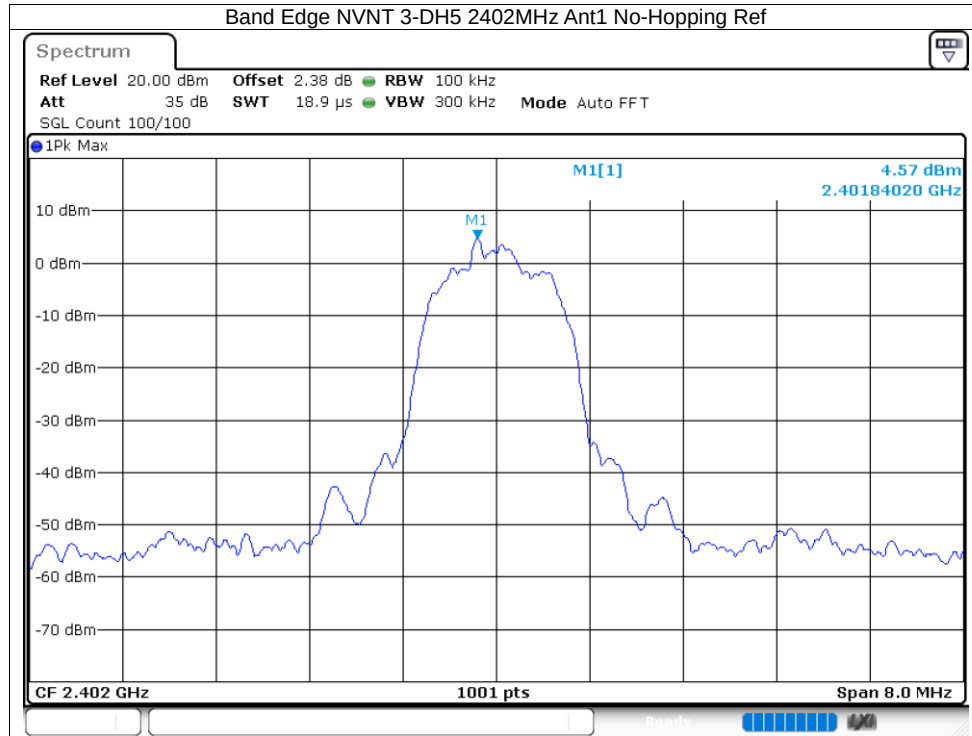


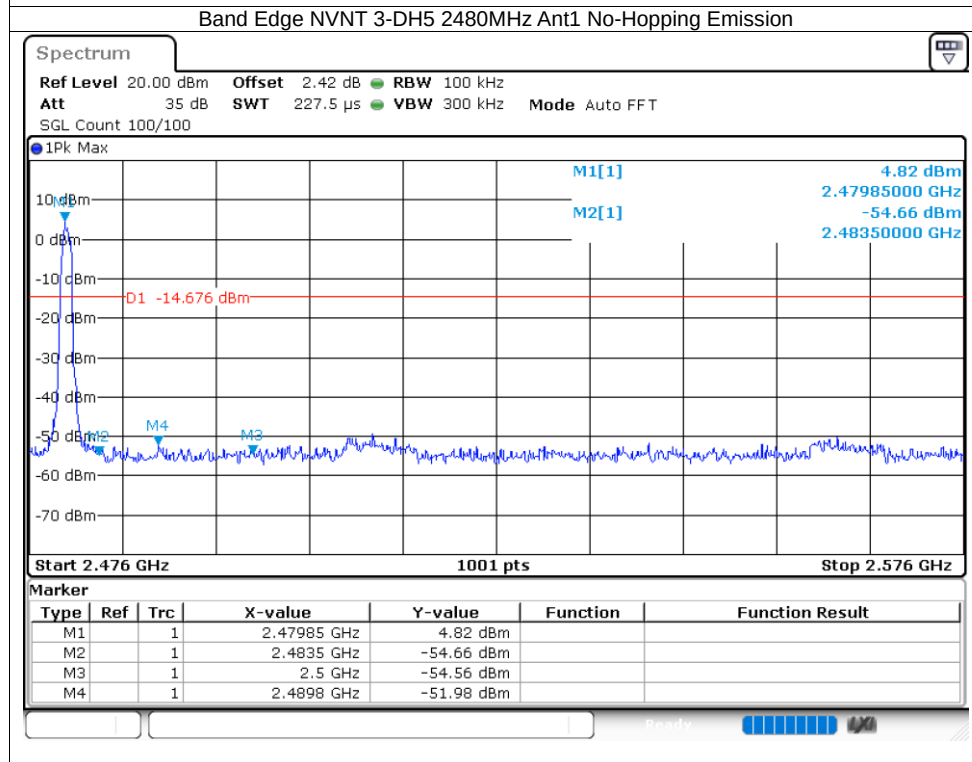
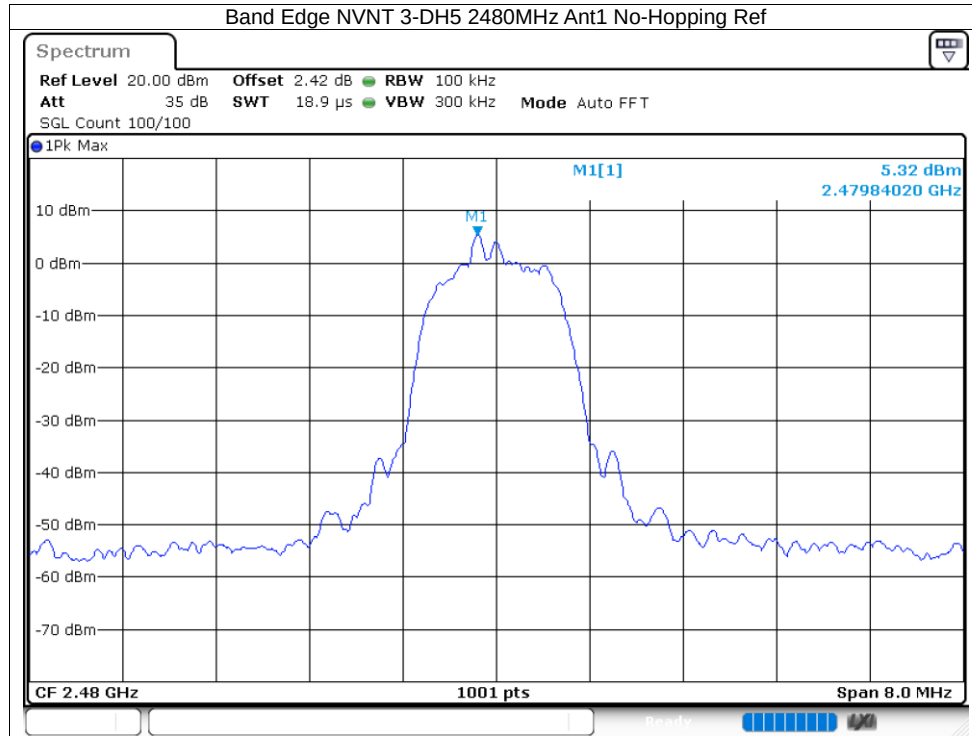




8.8 BAND EDGE(HOPPING)



Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-52.69	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-56.86	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-56.38	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-59.19	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-56.35	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-59.05	-20	Pass


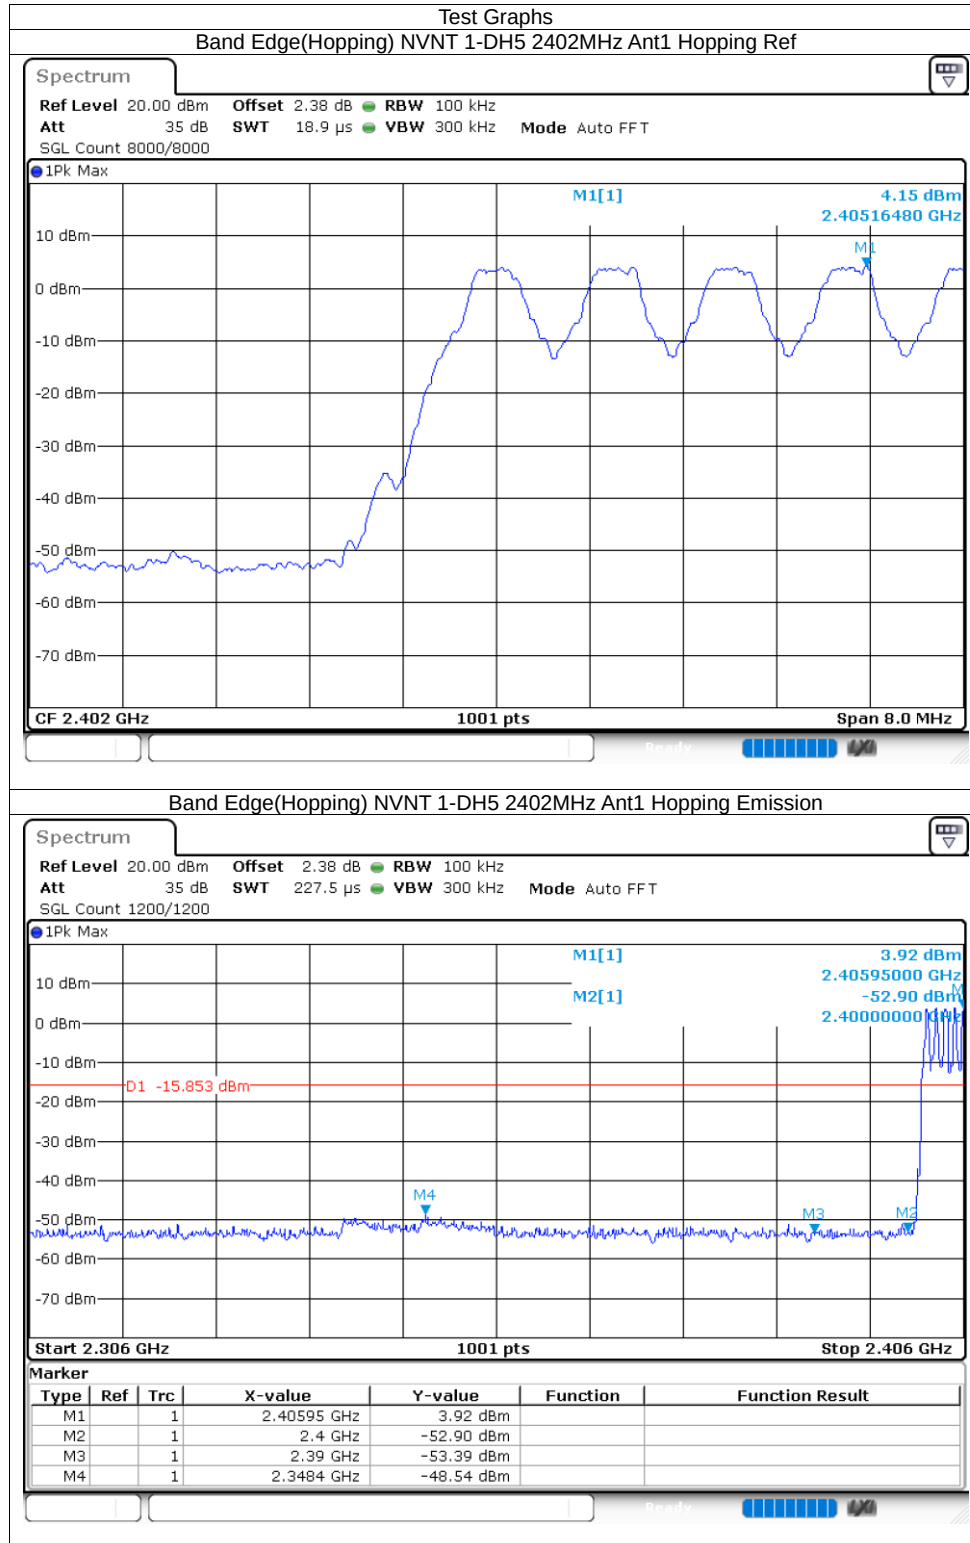


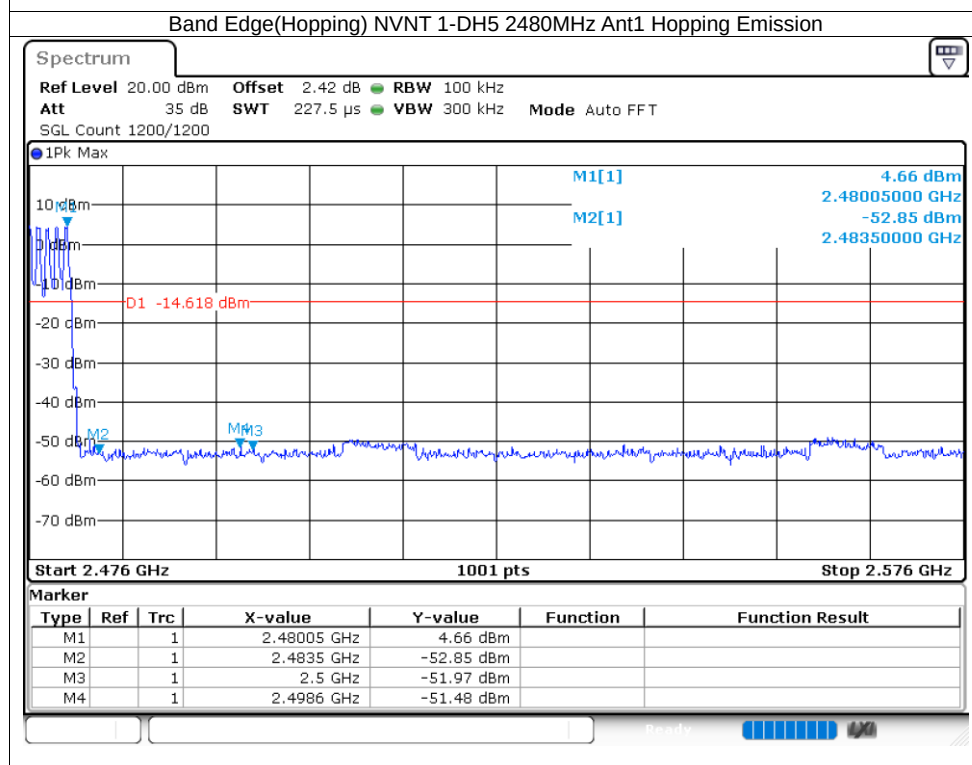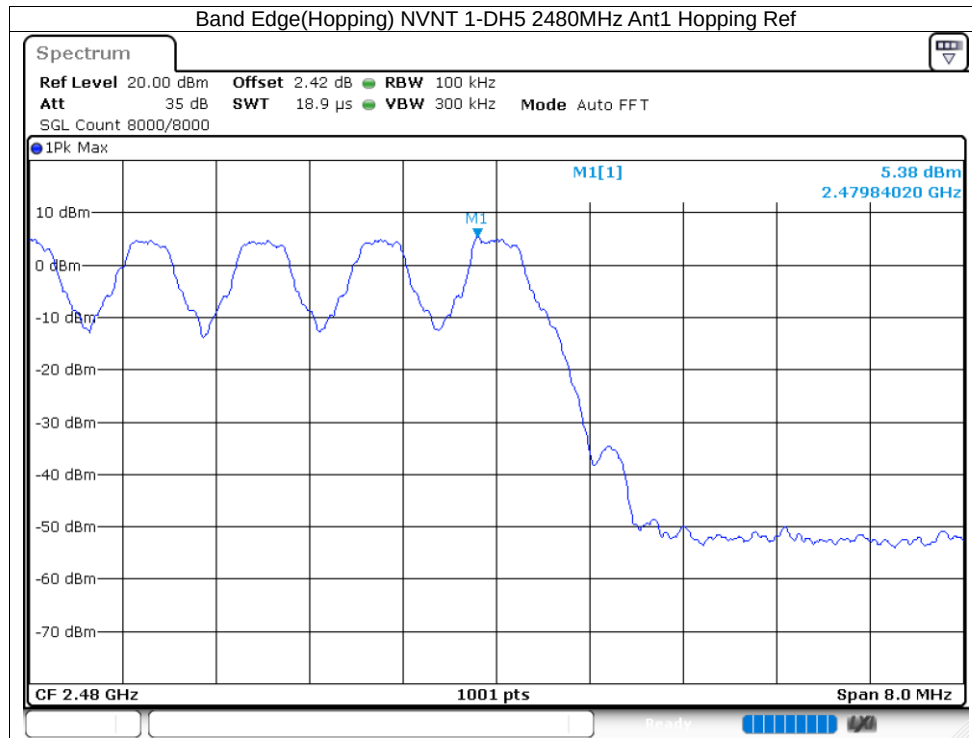

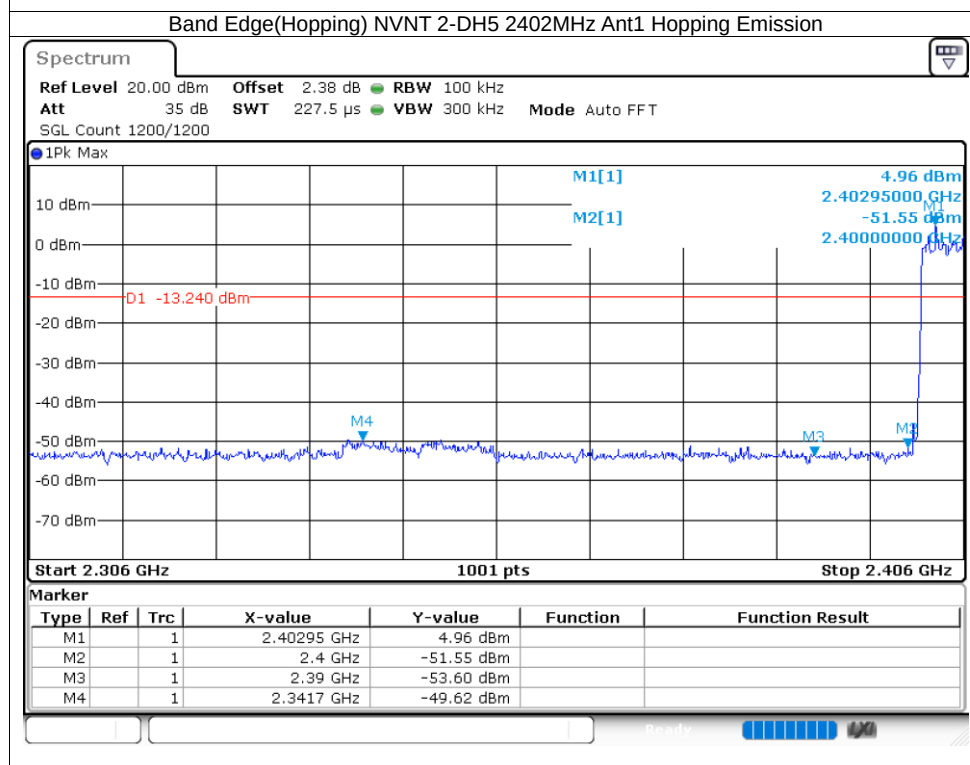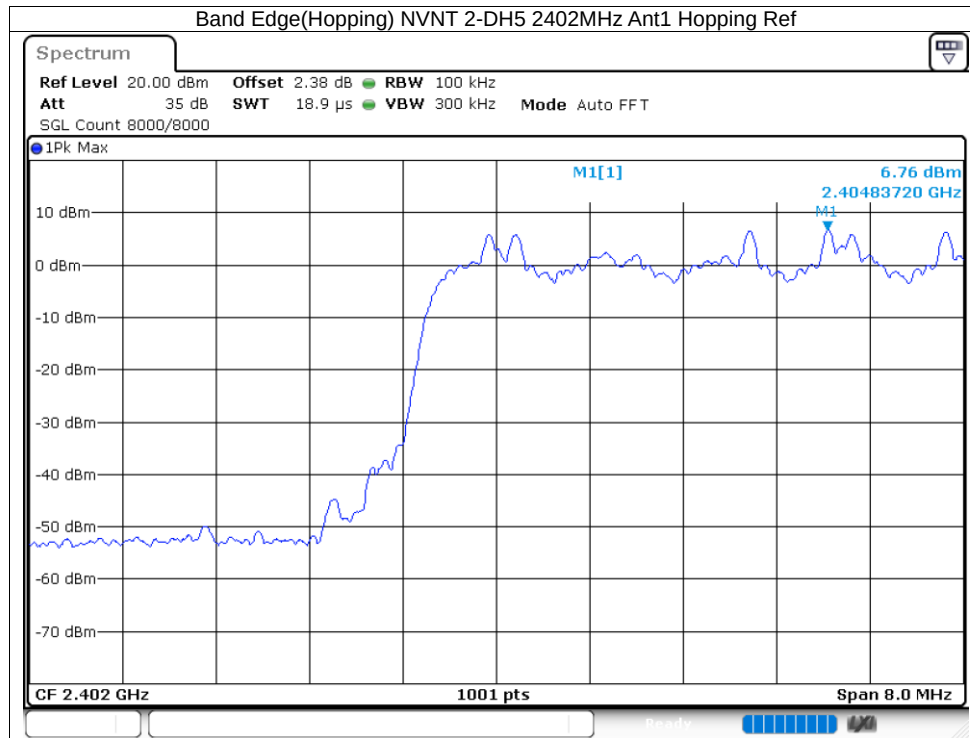

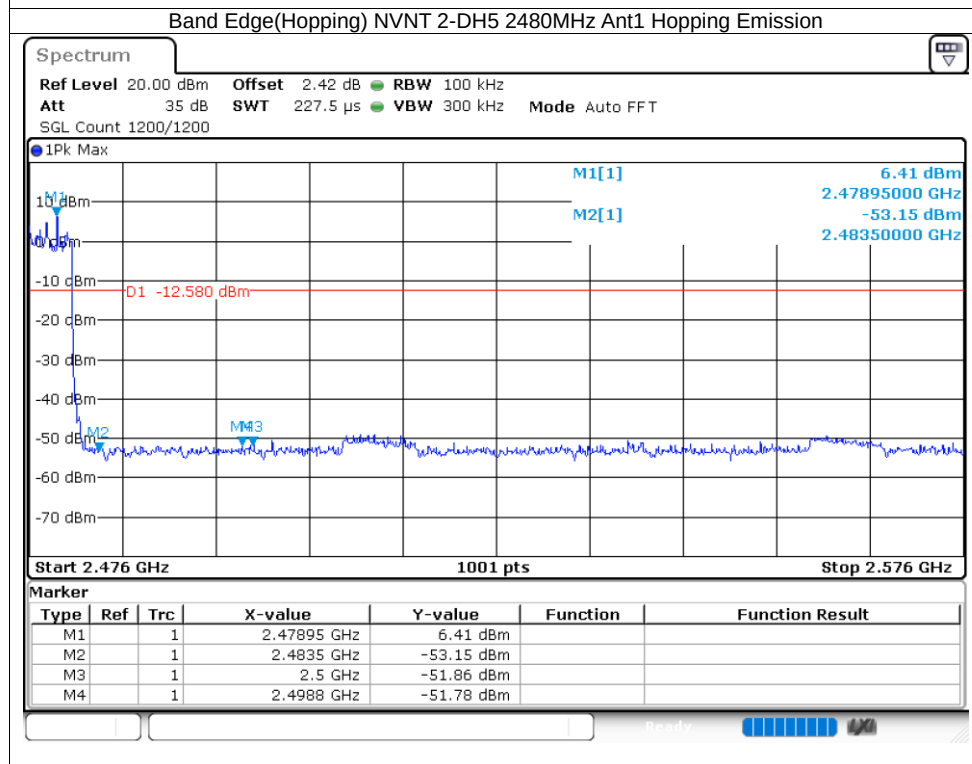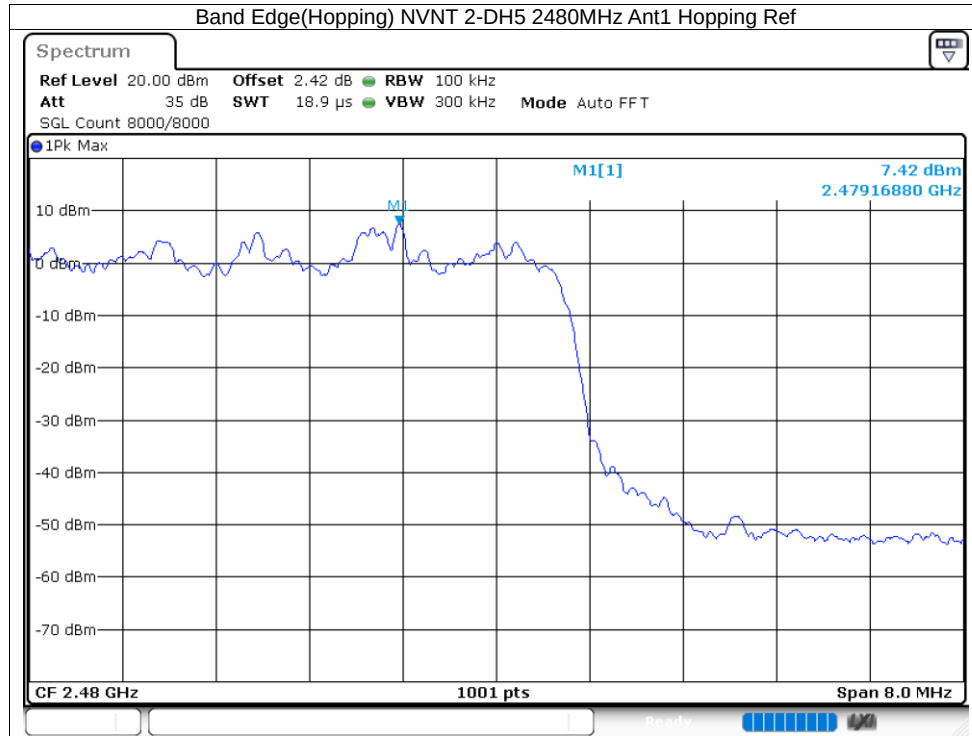


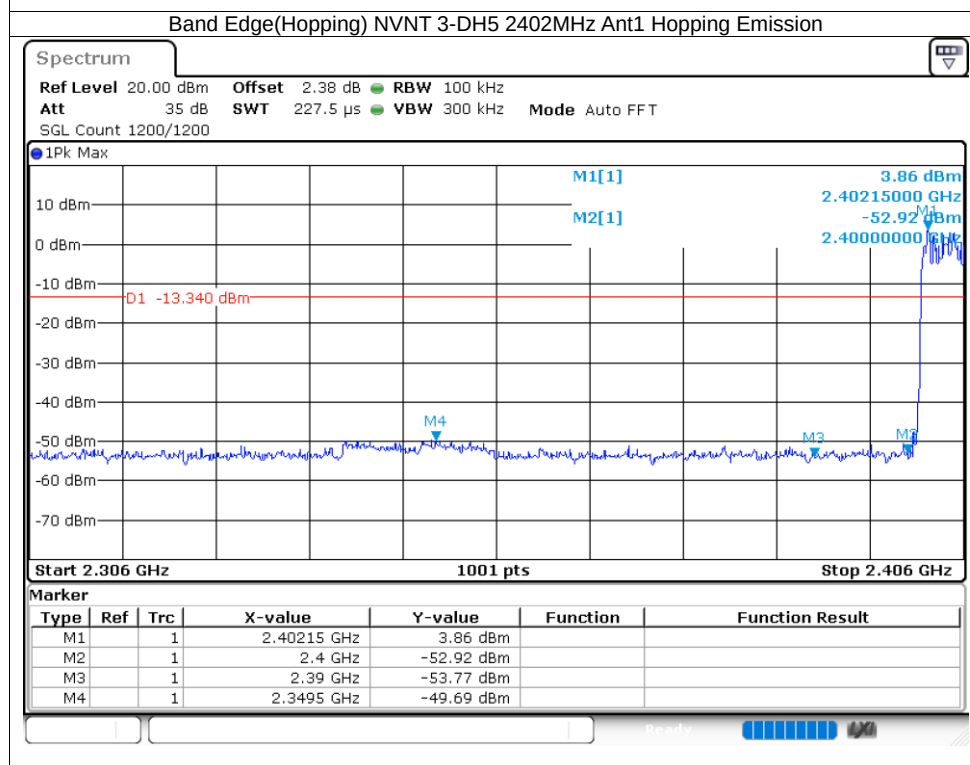
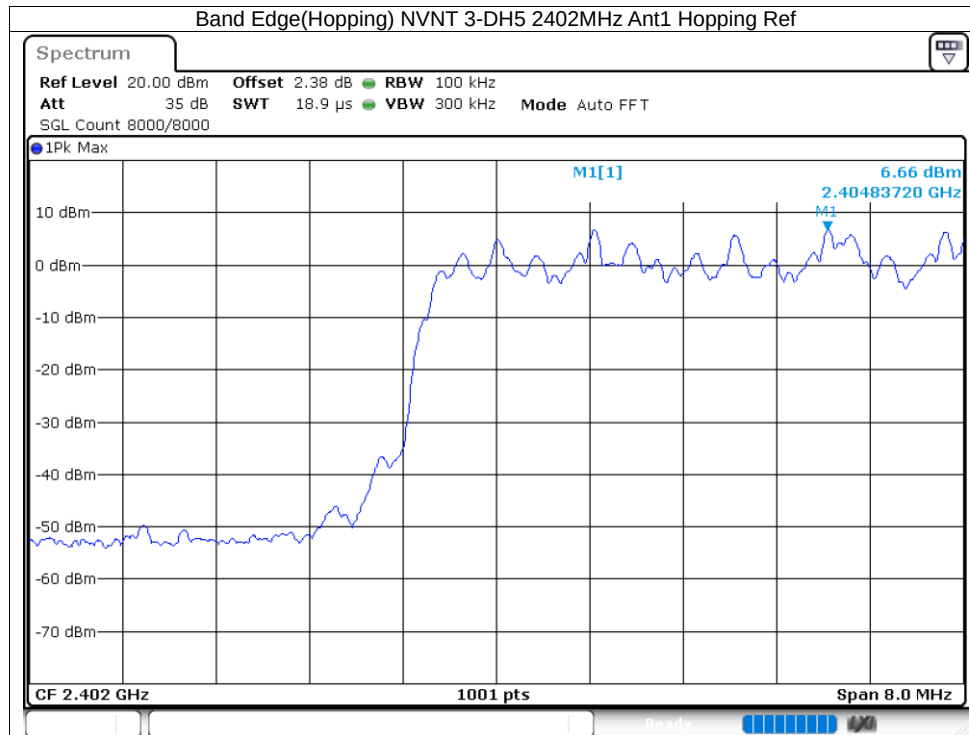


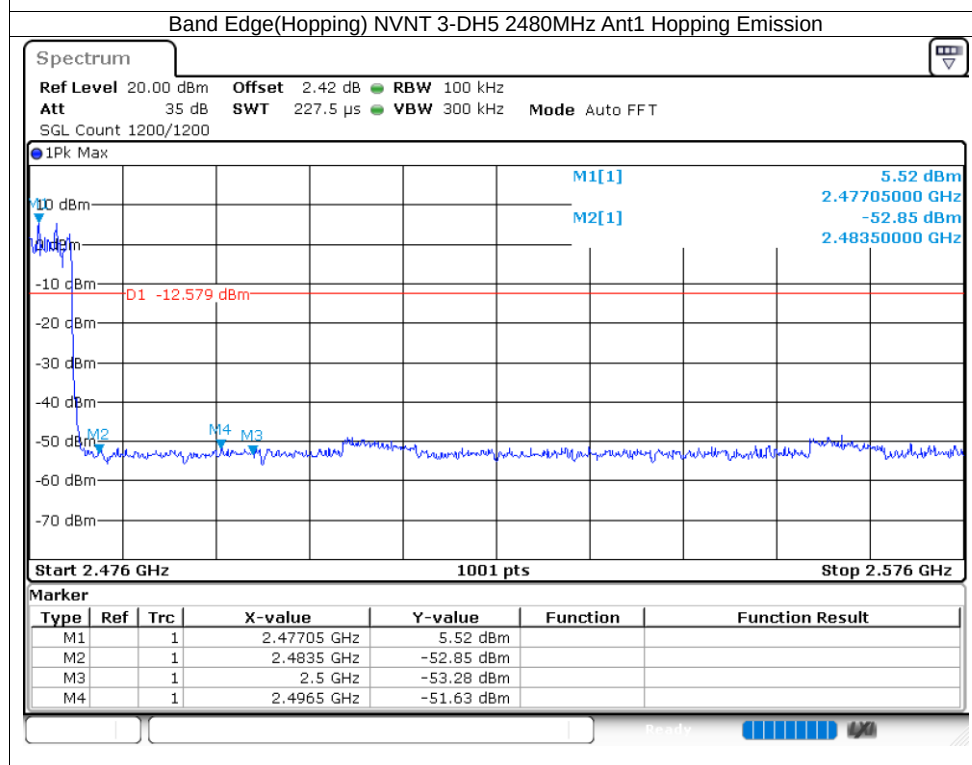
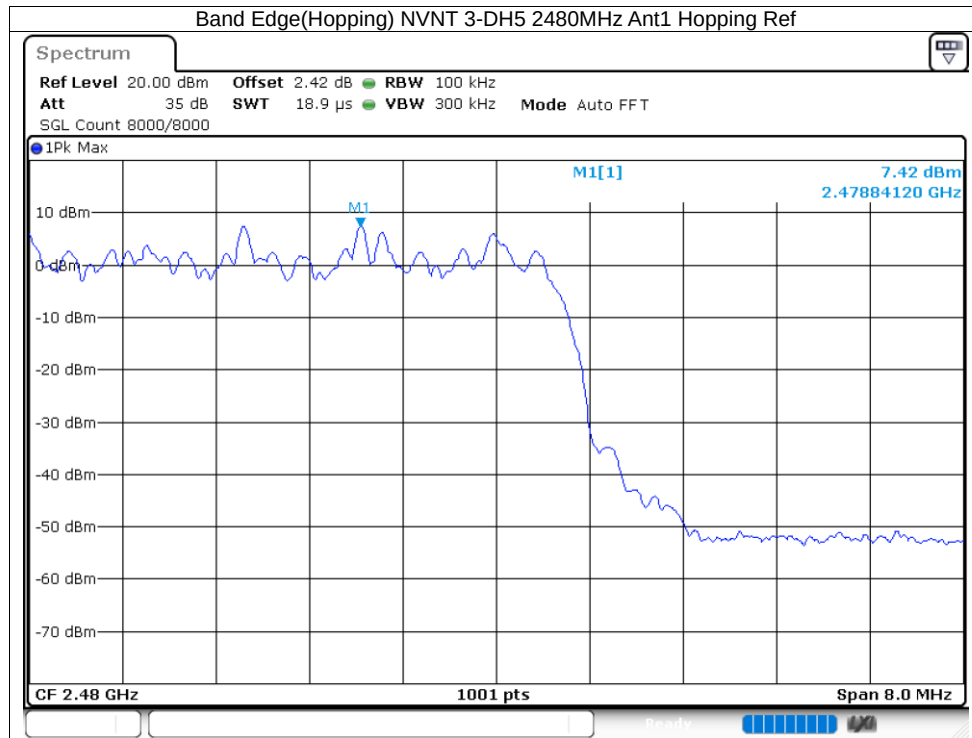




8.9 CONDUCTED RF SPURIOUS EMISSION



Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-54.85	-20	Pass
NVNT	1-DH5	2441	Ant1	-55.17	-20	Pass
NVNT	1-DH5	2480	Ant1	-53.96	-20	Pass
NVNT	2-DH5	2402	Ant1	-55.44	-20	Pass
NVNT	2-DH5	2441	Ant1	-55.24	-20	Pass
NVNT	2-DH5	2480	Ant1	-56.27	-20	Pass
NVNT	3-DH5	2402	Ant1	-54.2	-20	Pass
NVNT	3-DH5	2441	Ant1	-54.13	-20	Pass
NVNT	3-DH5	2480	Ant1	-54.1	-20	Pass


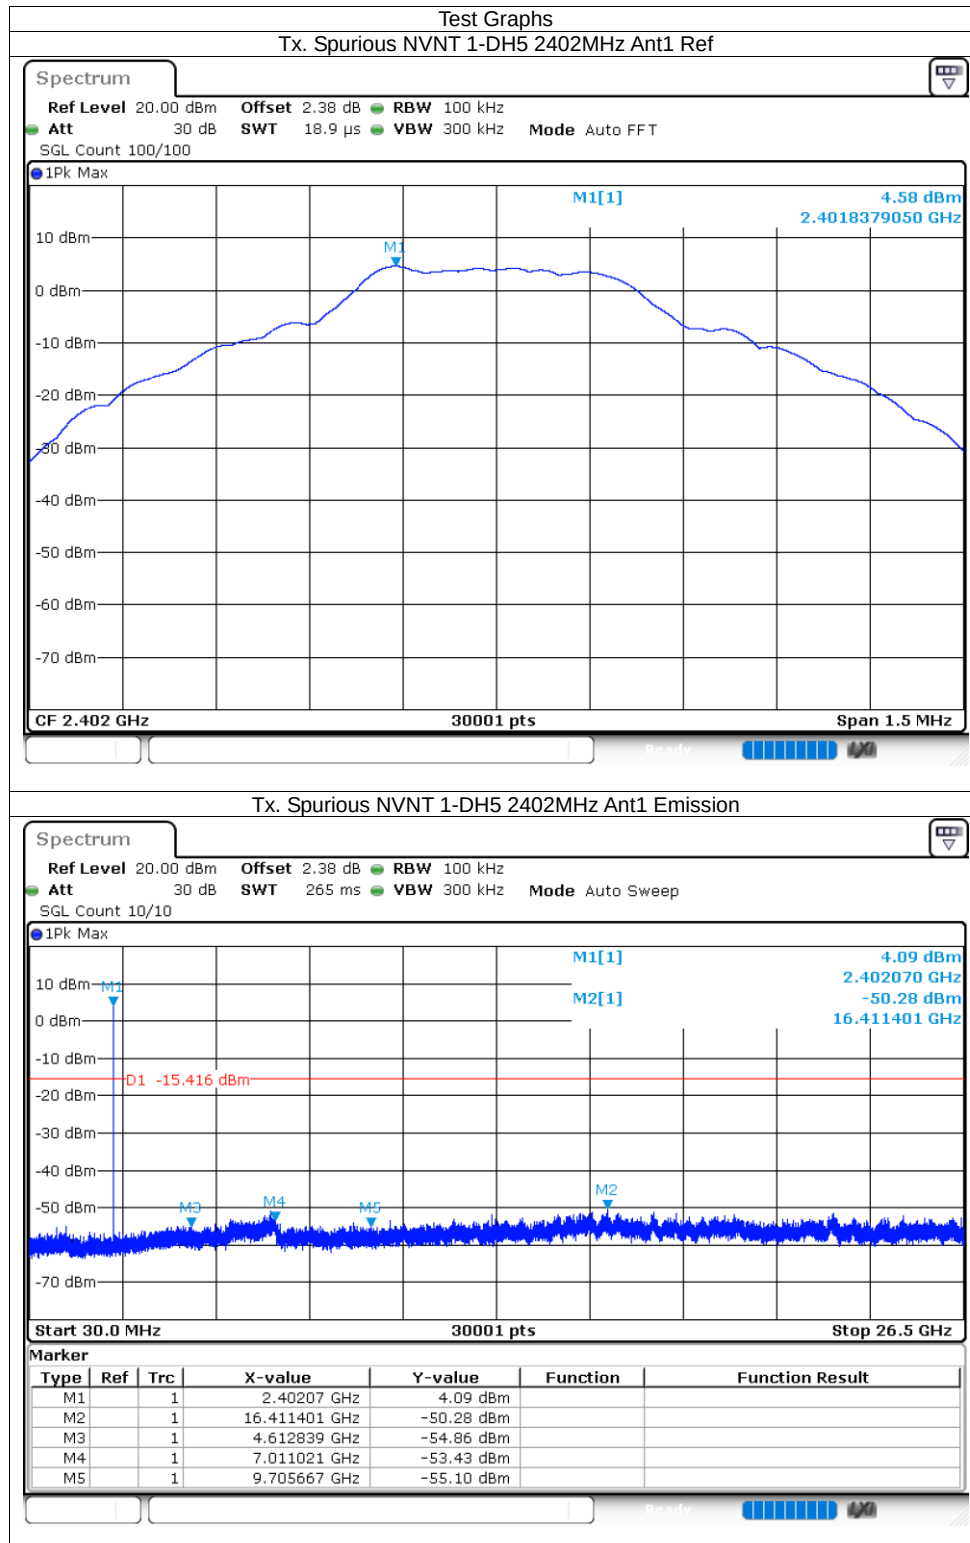


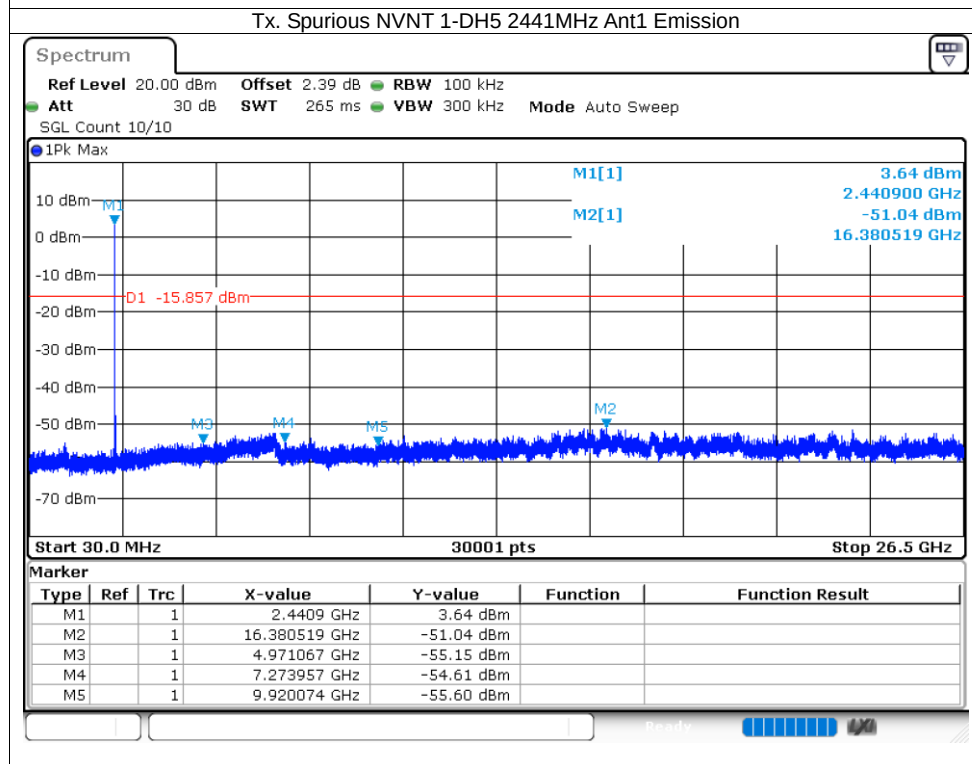
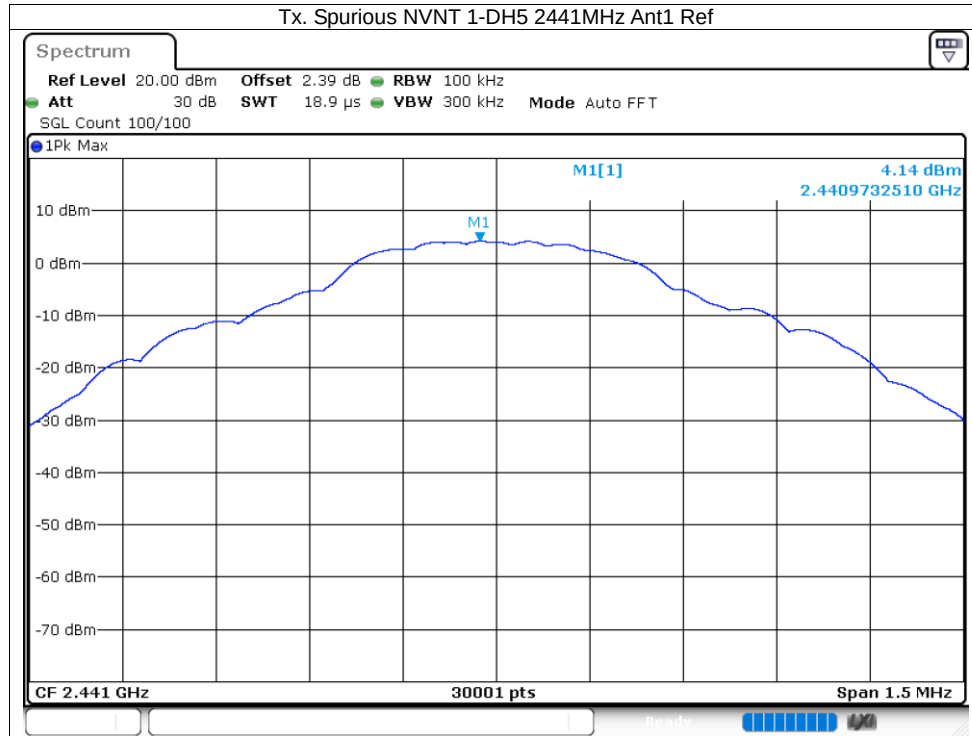


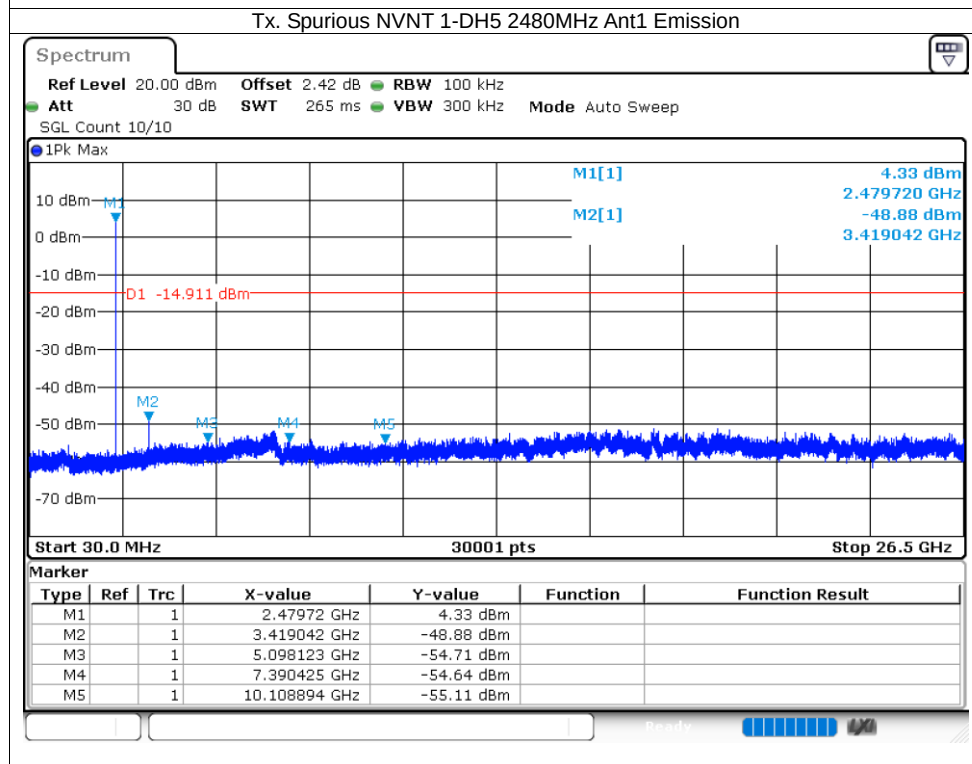
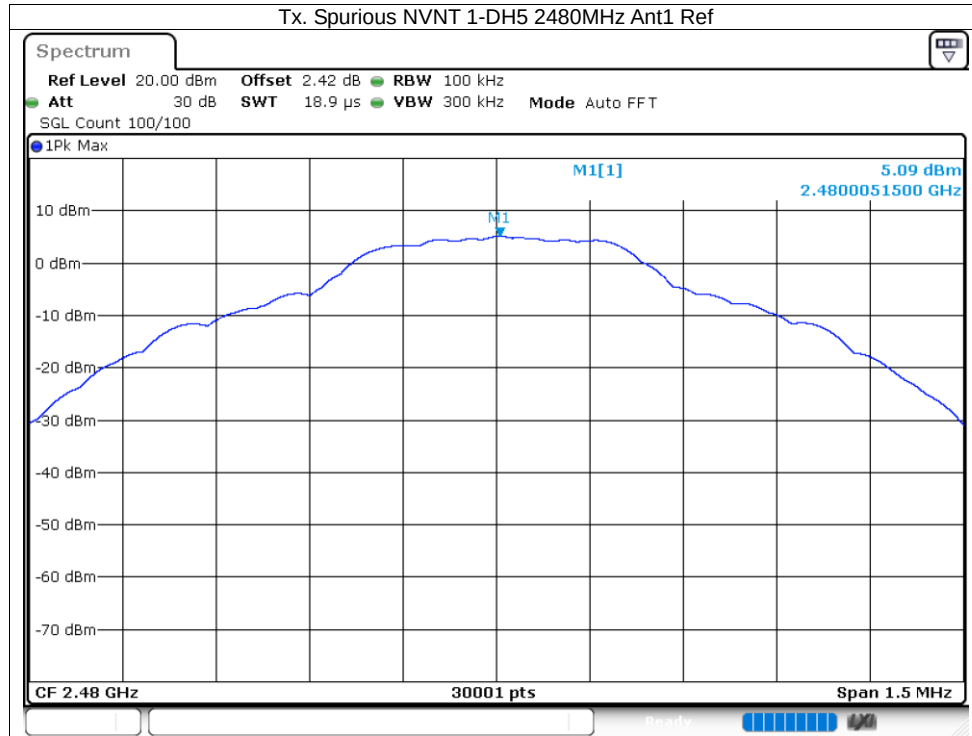


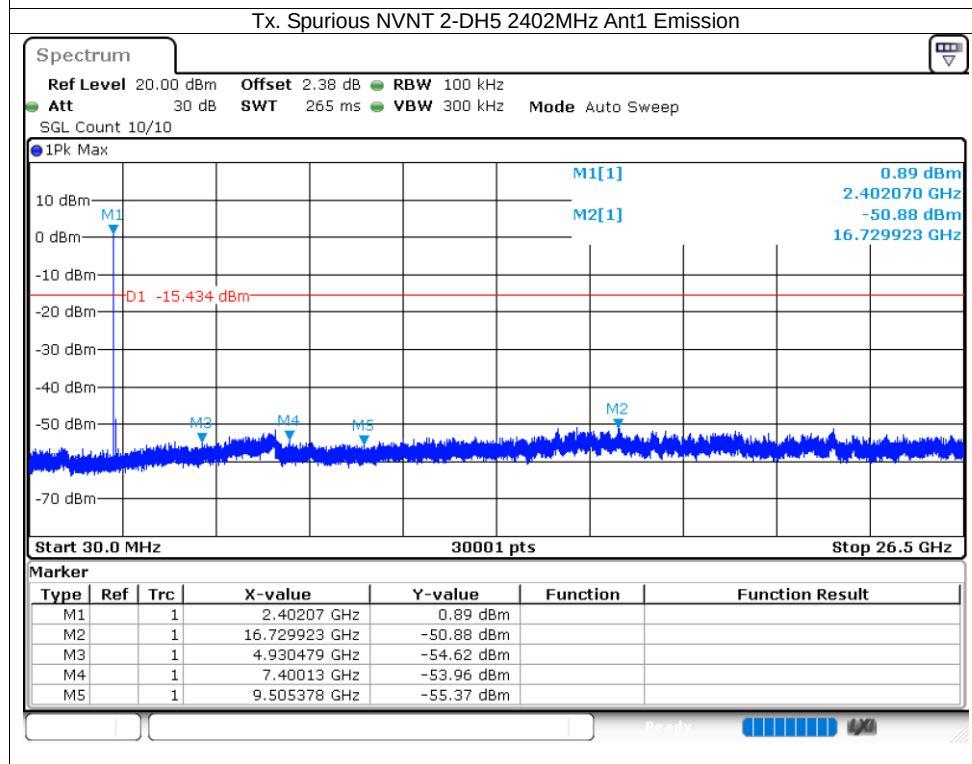
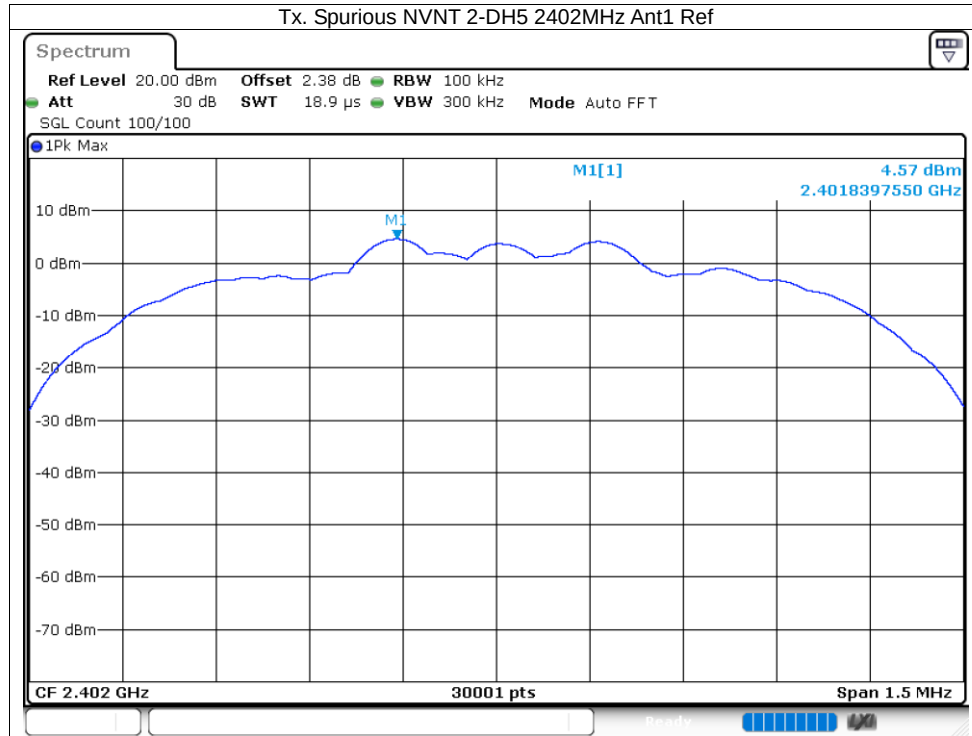


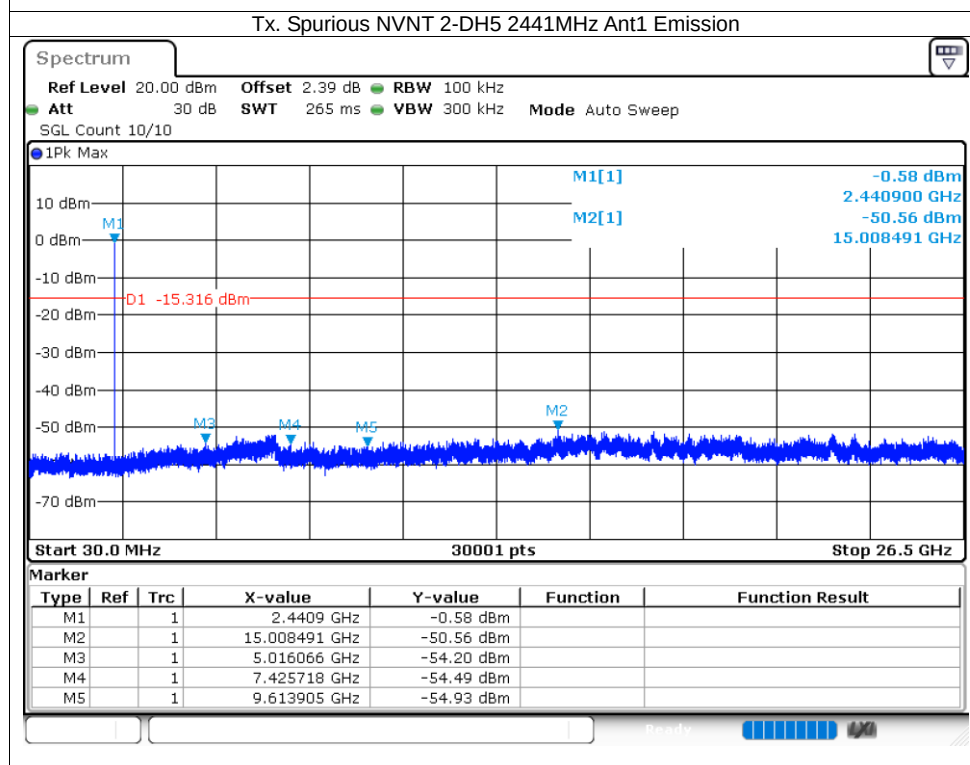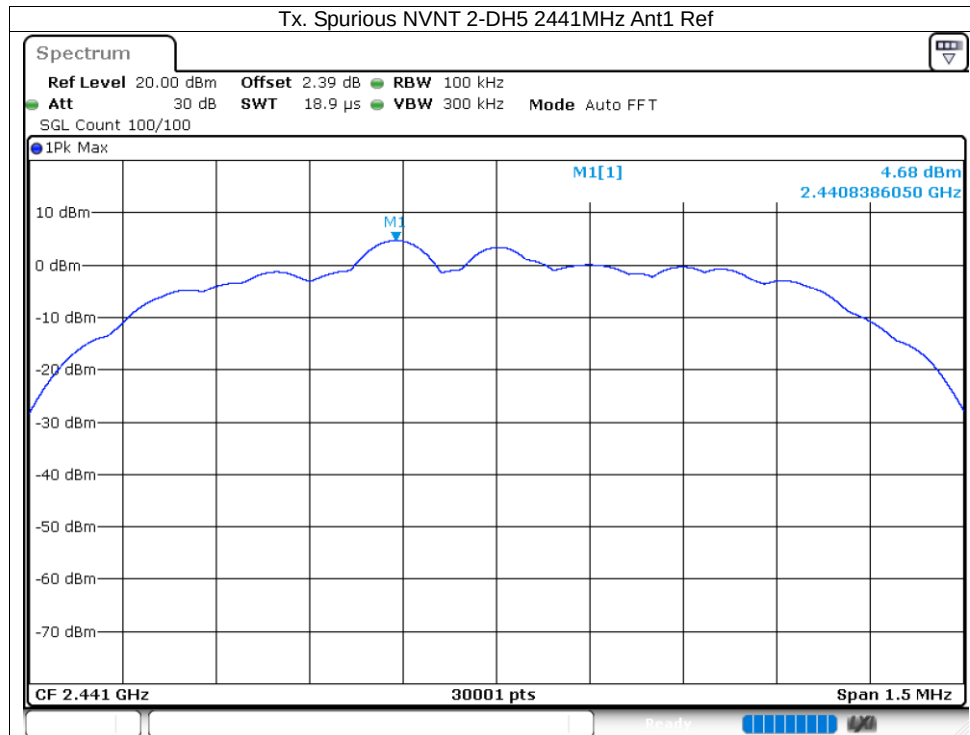

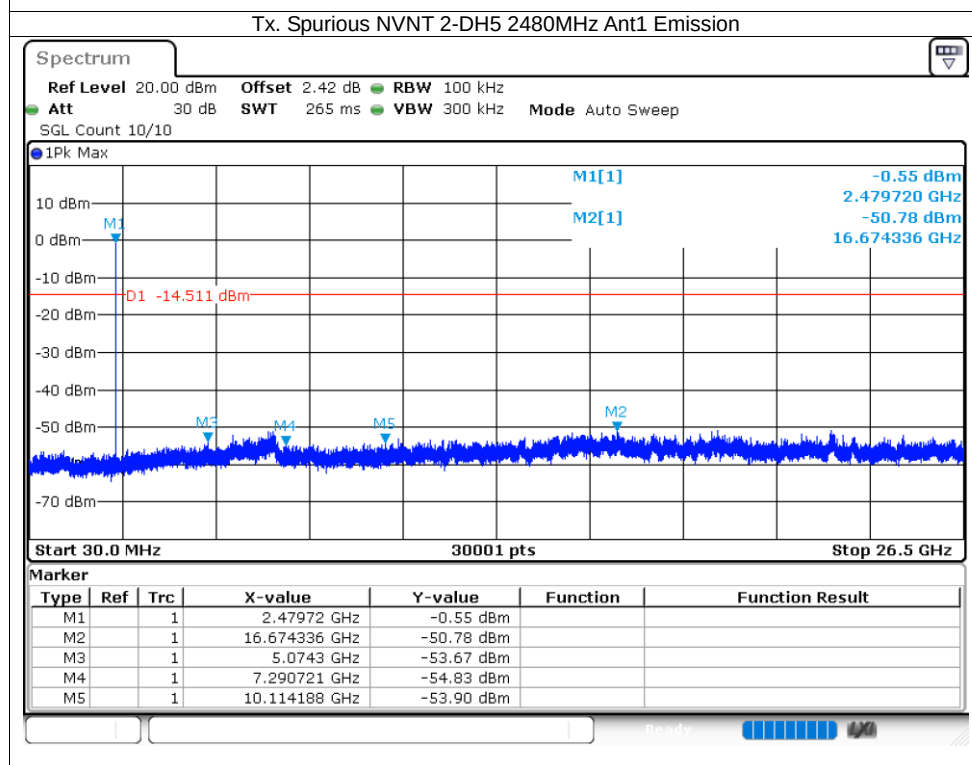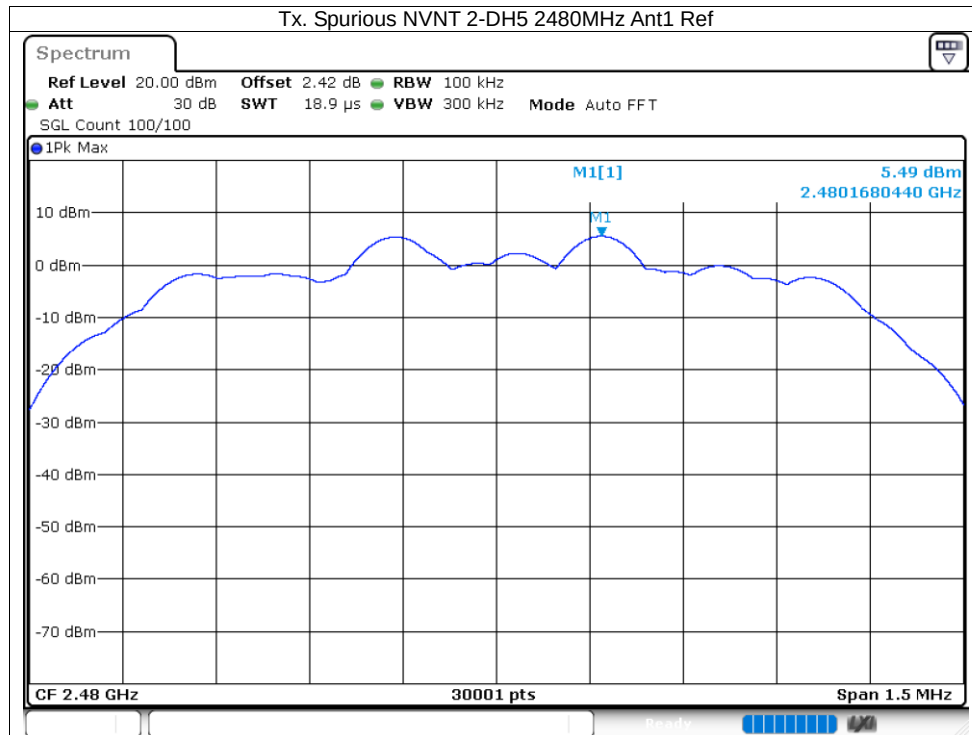

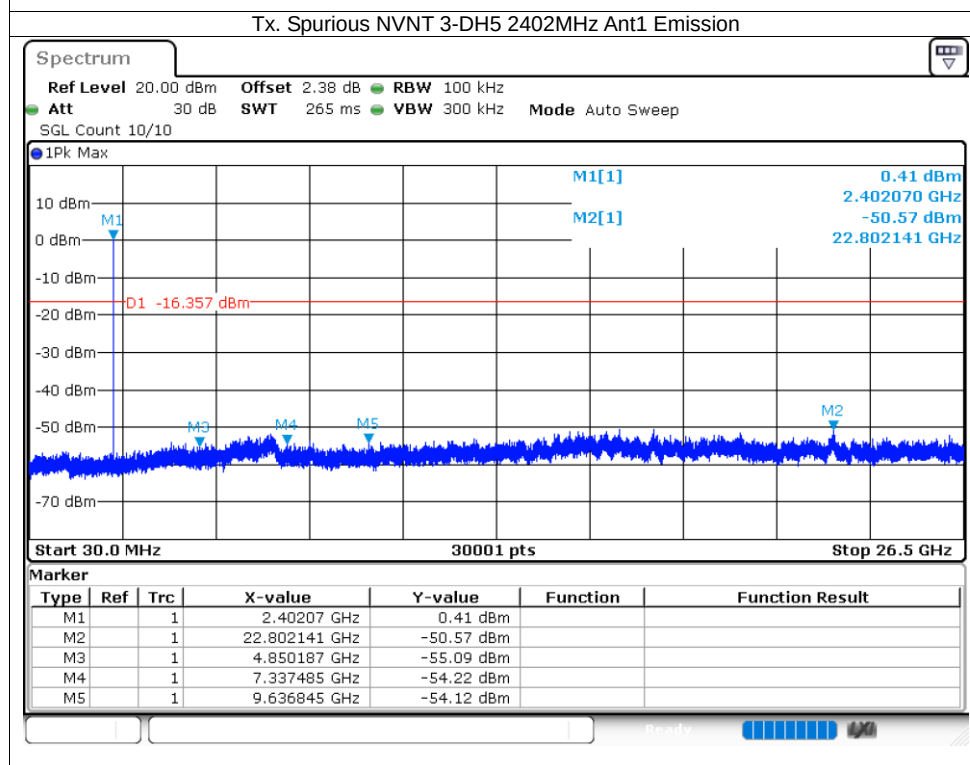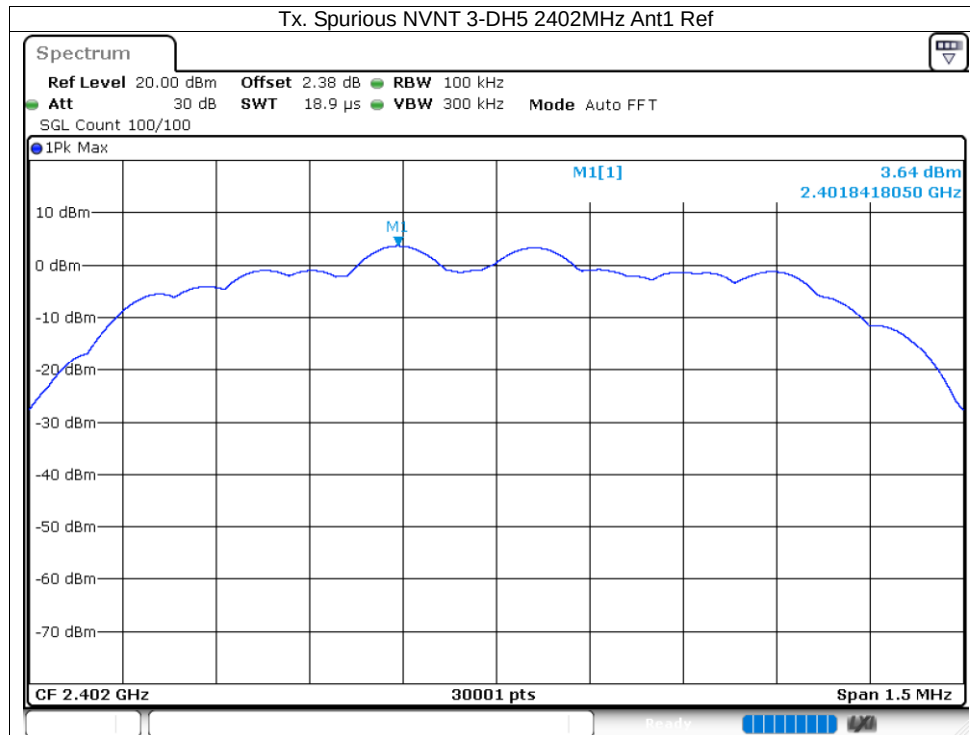

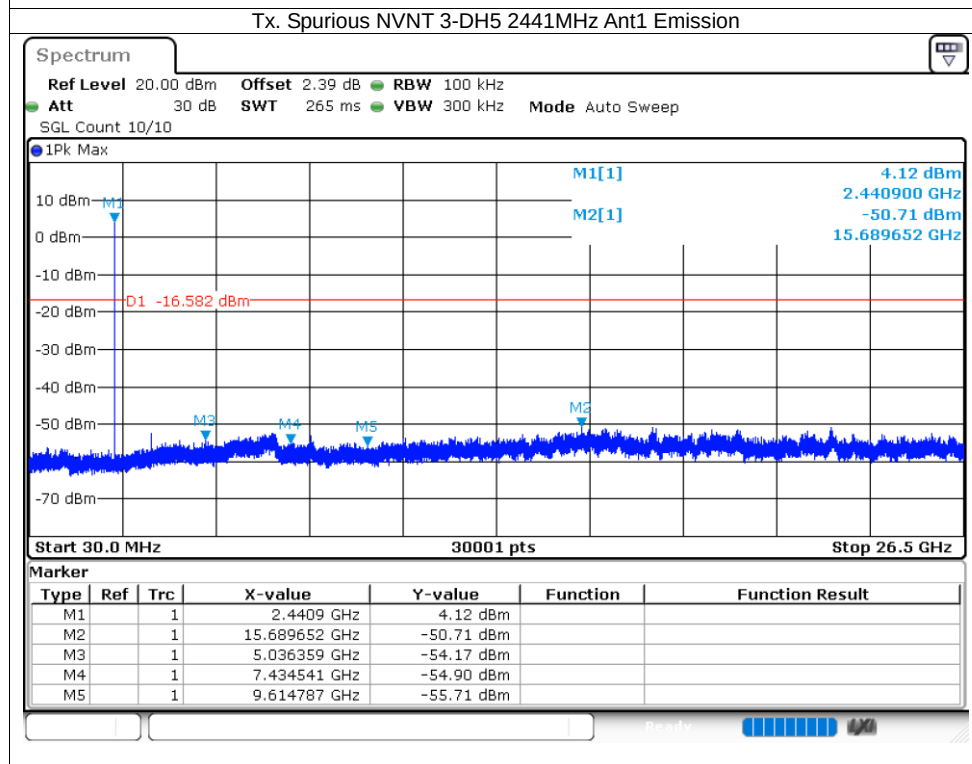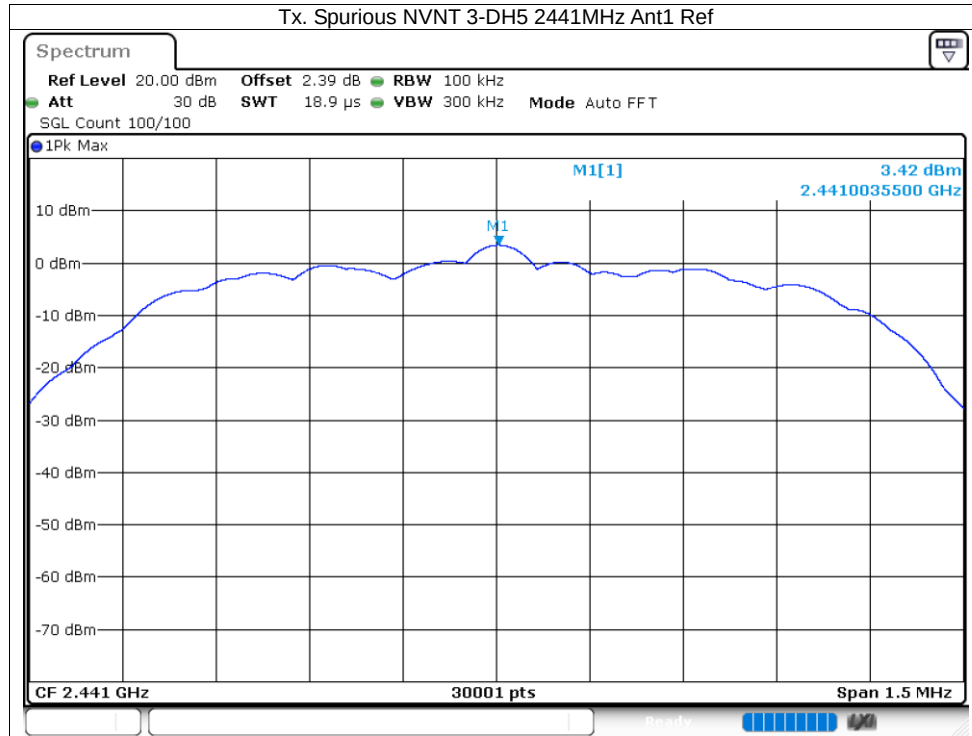

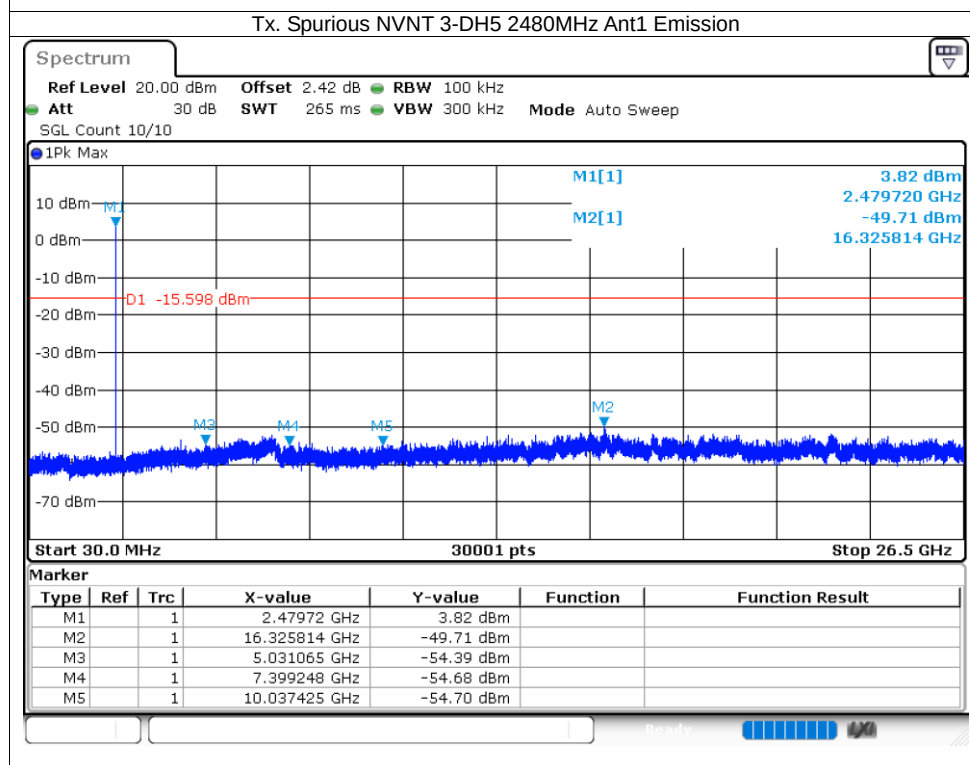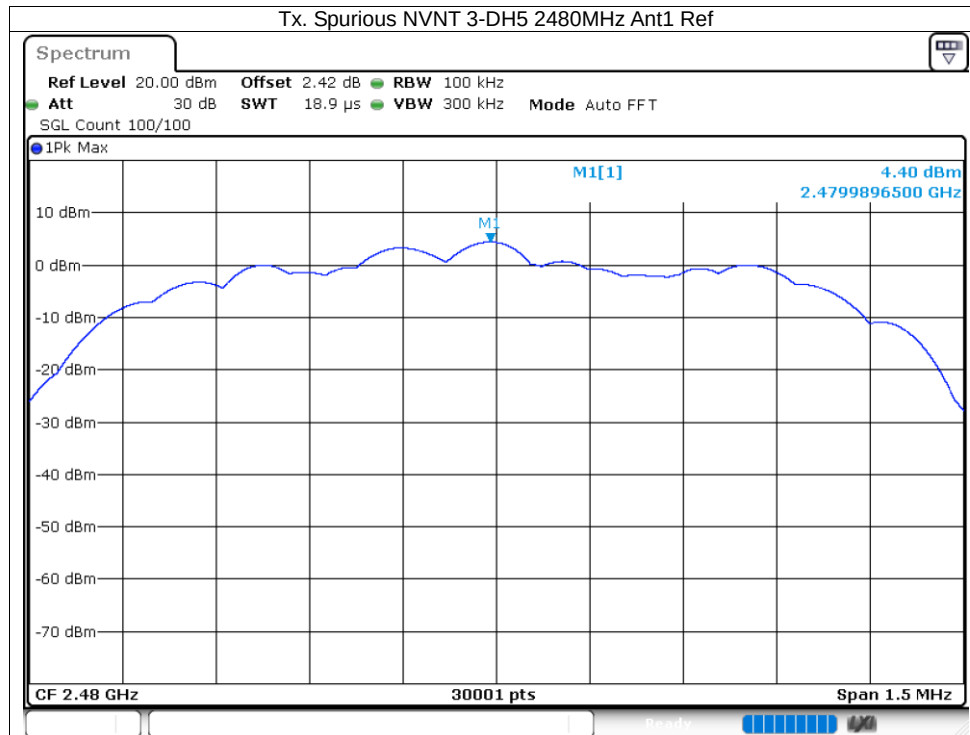

END OF REPORT