









前言
感谢您购买SUTEFOTO产品！
TW20RGB摄影灯光源稳定,显色性好,功能强大,非常适用于直播、视频、影响、静物、人像、婚庆、微距、创意短视频、以及采访布光等。支持APP无线分组调光无线调节亮度功能丰富,操作便捷。

产品具有以下亮点

- 具备4种光效模式(CCT模式、HSI全彩模式、RGBCW模式、FX特效模式)
- 73种色温-CCT模式下色温可以从2800K-10000K之间调节
- 36000种颜色-HSI模式下有360种色彩独立100级饱和度可调
- 102种可调颜色-RGBCW模式下可以独立调节5组灯珠(红色/黄色/蓝色/绿色/白色/2800K色温/10000K色温)的输出比例
- 100种效果-FX特效模式下有21种特效和10级速度的调节
- 显色指数高达95以上,R9高达90以上,TCLI(Qa)>95,真实还原物体色彩
- 内置7.4V5000mAh (37Wh)大容量锂电池。
- LED屏幕准确显示参数自动保存
- 支持手写APP

注意事项
1:在使用本产品前,请认真阅读本使用说明书,并妥善保存以便后续参考查阅。

功率	20W
调光范围	常亮模式0-100% 特效模式10%-100%
CCT模式色温范围	2800K-10000K ±200K
CCT/绿色/洋红色 色校正范围	GM ±10
CCT-CRI	> 96
CCT-TCLI	> 95
HSI模式	360种颜色100级饱和度
RGBCW	RGBCW 5组灯珠单独调节 0-100亮度 DIY模式
FX特效模式	21种特效 每种特效可调节10种频率
内置电池	7.4V 5000mAh
工作环境温度	-10到50摄氏度
产品尺寸	530×45×34mm
显示	LED 0.9寸
灯珠数量	220颗 (RGB44颗 2800K:88颗 10000K:88颗)
材料	铝合金+ABS
散热方式	自然对流
灯体净重	590g

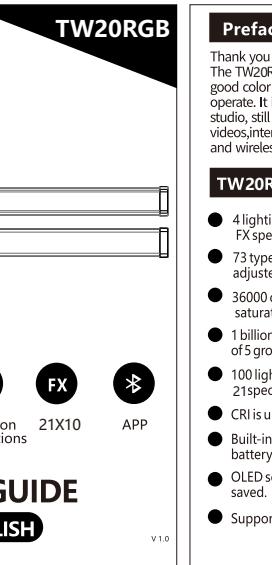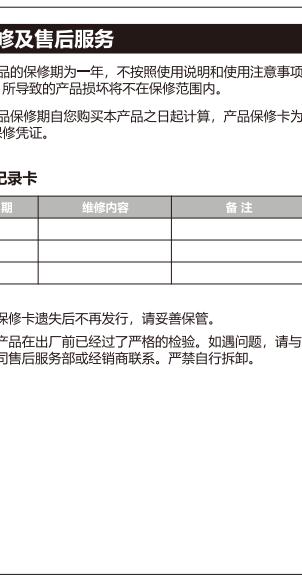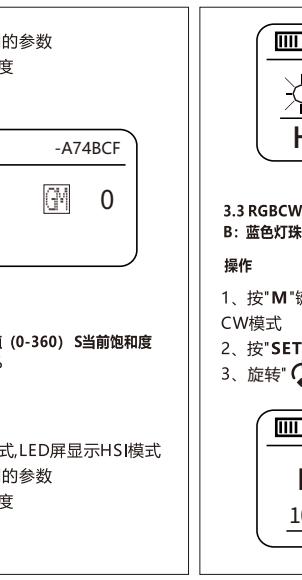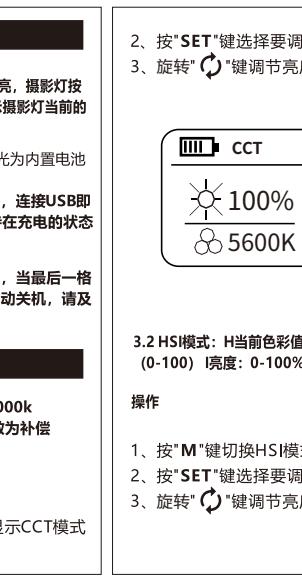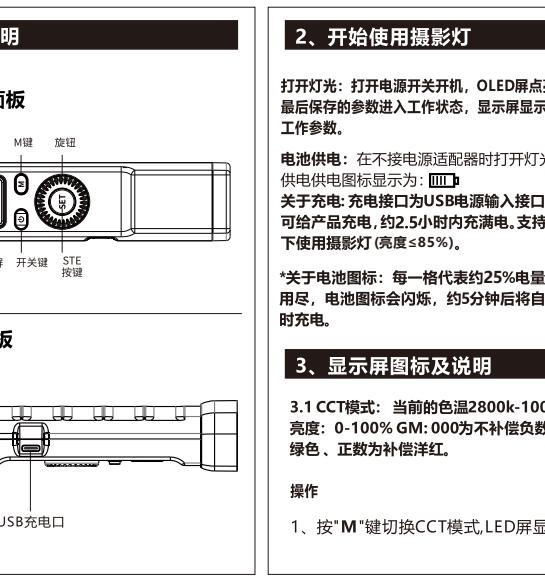











Preface
Thank you for purchasing SUTEFOTO products!
The TW20RGB video/photography light has stable light source, good color rendering, and stable performance, and it is easy to operate. It is suitable for lighting for live broadcasting/video, studio, still life, portraits, weddings, macros, creative short video/interviews, etc. It supports APP wireless group dimming and wireless brightness adjustment.

TW20RGB has the following highlights

- 4 lighting modes: CCT mode, HSI mode, RGBCW mode, FX special effect mode
- 73 types of color temperature. Color temperature can be adjusted from 2800K-10000K (±200K) in CCT mode.
- 36000 colors in HSI mode. 360 different HUE and 100 level saturation.
- 1 billion adjustable colors in RGBCW mode. The output ratio of 5 groups of lamp beads can be adjusted independently.
- 100 lighting effects in FX special effects mode. TW20RGB has 21 special effects and 10 levels of speed adjustment.
- CRI is up to 96, R9 is up to 90 and TCLI(Qa) is above 95.
- Built-in 7.4V 5000mAh (37Wh) large capacity lithium battery.
- LED screen accurate display, parameters automatically saved.
- Supports mobile APP.

USER GUIDE
ENGLISH

Product name	SUTEFOTO
Model	TW20RGB
Input voltage	PD 20V/12V-20W
Battery type	7.4V 5000mAh
Battery capacity	At 50% brightness, last about 210mins; At 100% brightness, last about 102mins
Battery charge	PD2.5 hours, USB 4.5 hours
Display	LED 0.9 inch
LED lamp bead amount	220 pieces (RGB44 pieces 2800K:88 pieces 10000K:88 pieces)
Lamp beads power	20W
Dimming range	CCT mode 0-100% FX Special mode 10%-100%

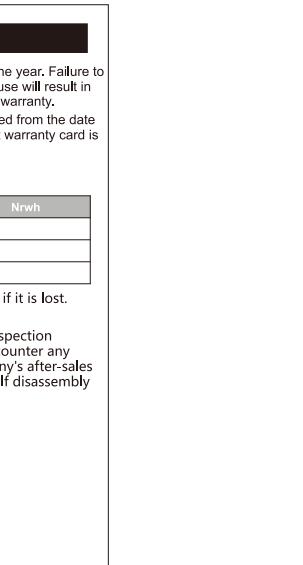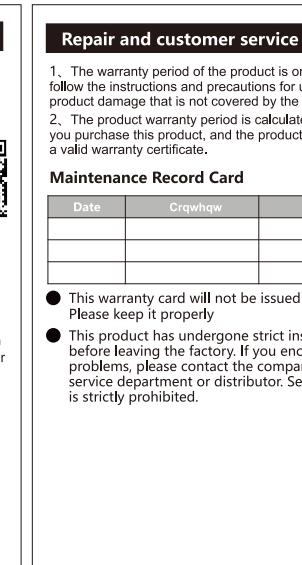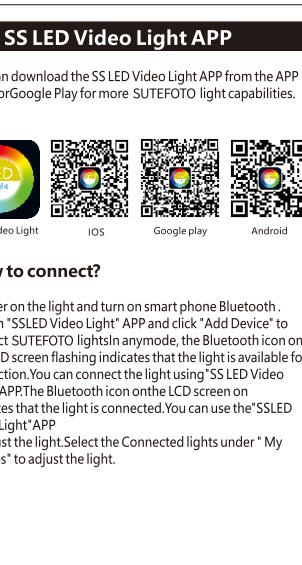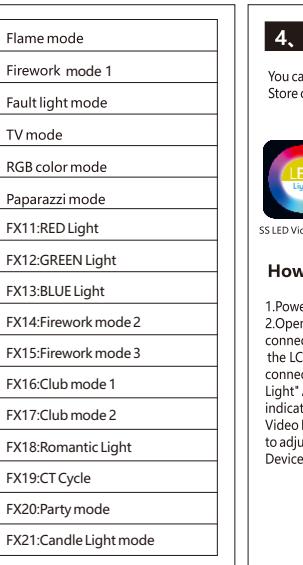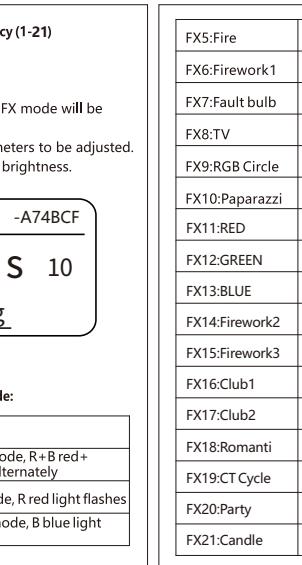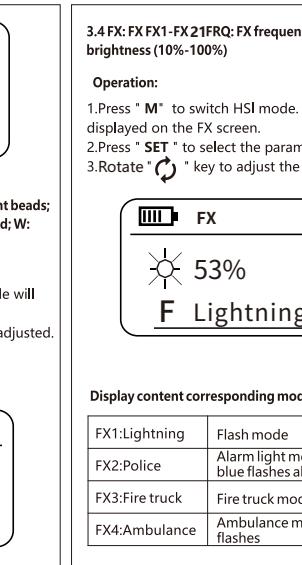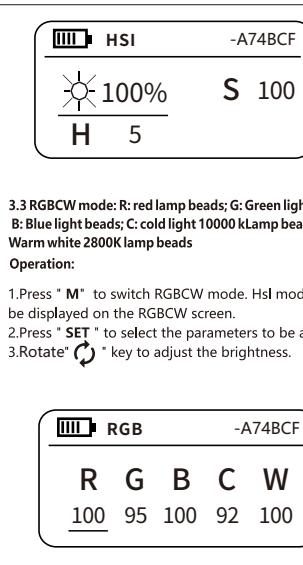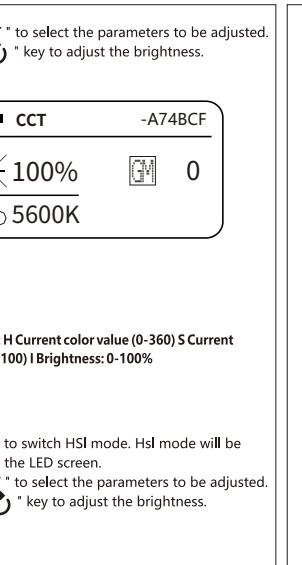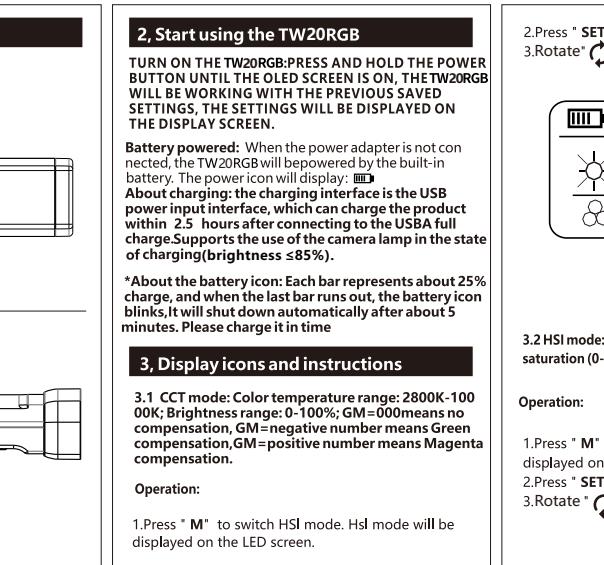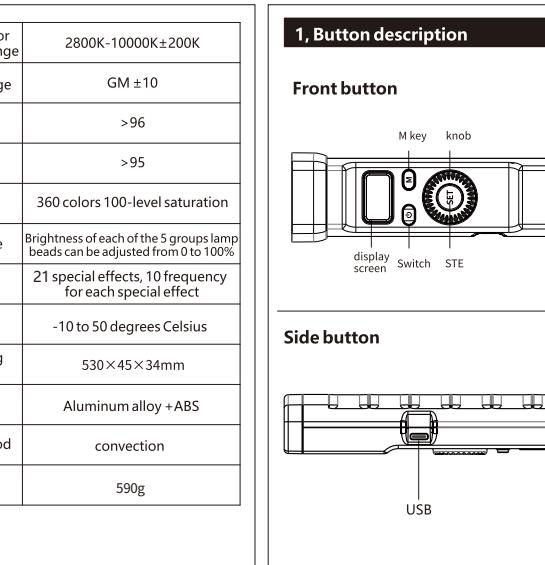






前言
感谢您购买SUTEFOTO产品！
TW20RGB摄影灯光源稳定,显色性好,功能强大,非常适用于直播、视频、影响、静物、人像、婚庆、微距、创意短视频、以及采访布光等。支持APP无线分组调光无线调节亮度功能丰富,操作便捷。

产品具有以下亮点

- 具备4种光效模式(CCT模式、HSI全彩模式、RGBCW模式、FX特效模式)
- 73种色温-CCT模式下色温可以从2800K-10000K之间调节
- 36000种颜色-HSI模式下有360种色彩独立100级饱和度可调
- 102种可调颜色-RGBCW模式下可以独立调节5组灯珠(红色/黄色/蓝色/绿色/白色/2800K色温/10000K色温)的输出比例
- 100种效果-FX特效模式下有21种特效和10级速度的调节
- 显色指数高达95以上,R9高达90以上,TCLI(Qa)>95,真实还原物体色彩
- 内置7.4V5000mAh (37Wh)大容量锂电池。
- LED屏幕准确显示参数自动保存
- 支持手写APP

注意事项
1:在使用本产品前,请认真阅读本使用说明书,并妥善保存以便后续参考查阅。

功率	20W
调光范围	常亮模式0-100% 特效模式10%-100%
CCT模式色温范围	2800K-10000K ±200K
CCT/绿色/洋红色 色校正范围	GM ±10
CCT-CRI	> 96
CCT-TCLI	> 95
HSI模式	360种颜色100级饱和度
RGBCW	RGBCW 5组灯珠单独调节 0-100亮度 DIY模式
FX特效模式	21种特效 每种特效可调节10种频率
内置电池	7.4V 5000mAh
工作环境温度	-10到50摄氏度
产品尺寸	530×45×34mm
显示	LED 0.9寸
灯珠数量	220颗 (RGB44颗 2800K:88颗 10000K:88颗)
材料	铝合金+ABS
散热方式	自然对流
灯体净重	590g

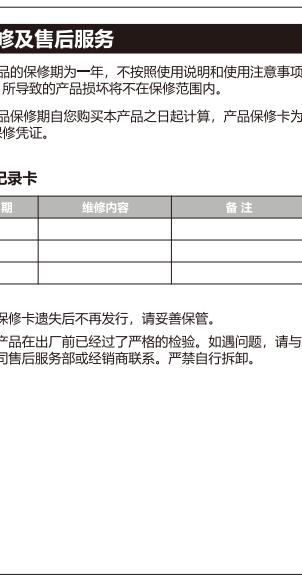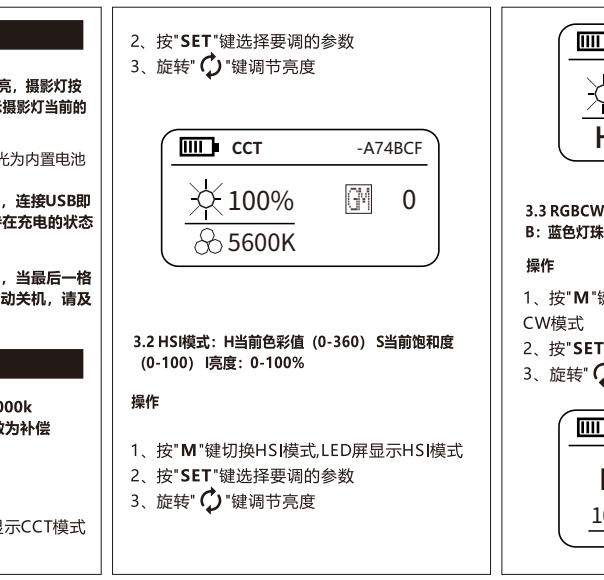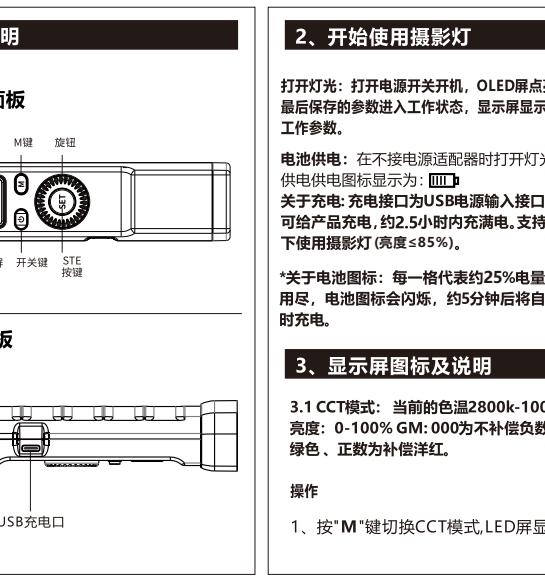





前言
感谢您购买SUTEFOTO产品！
TW20RGB摄影灯光源稳定,显色性好,功能强大,非常适用于直播、视频、影响、静物、人像、婚庆、微距、创意短视频、以及采访布光等。支持APP无线分组调光无线调节亮度功能丰富,操作便捷。

产品具有以下亮点

- 具备4种光效模式(CCT模式、HSI全彩模式、RGBCW模式、FX特效模式)
- 73种色温-CCT模式下色温可以从2800K-10000K之间调节
- 36000种颜色-HSI模式下有360种色彩独立100级饱和度可调
- 102种可调颜色-RGBCW模式下可以独立调节5组灯珠(红色/黄色/蓝色/绿色/白色/2800K色温/10000K色温)的输出比例
- 100种效果-FX特效模式下有21种特效和10级速度的调节
- 显色指数高达95以上,R9高达90以上,TCLI(Qa)>95,真实还原物体色彩
- 内置7.4V5000mAh (37Wh)大容量锂电池。
- LED屏幕准确显示参数自动保存
- 支持手写APP

注意事项
1:在使用本产品前,请认真阅读本使用说明书,并妥善保存以便后续参考查阅。

功率	20W
调光范围	常亮模式0-100% 特效模式10%-100%
CCT模式色温范围	2800K-10000K ±200K
CCT/绿色/洋红色 色校正范围	GM ±10
CCT-CRI	> 96
CCT-TCLI	> 95
HSI模式	360种颜色100级饱和度
RGBCW	RGBCW 5组灯珠单独调节 0-100亮度 DIY模式
FX特效模式	21种特效 每种特效可调节10种频率
内置电池	7.4V 5000mAh
工作环境温度	-10到50摄氏度
产品尺寸	530×45×34mm
显示	LED 0.9寸
灯珠数量	220颗 (RGB44颗 2800K:88颗 10000K:88颗)
材料	铝合金+ABS
散热方式	自然对流
灯体净重	590g

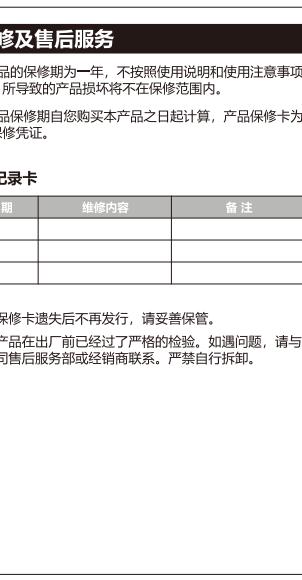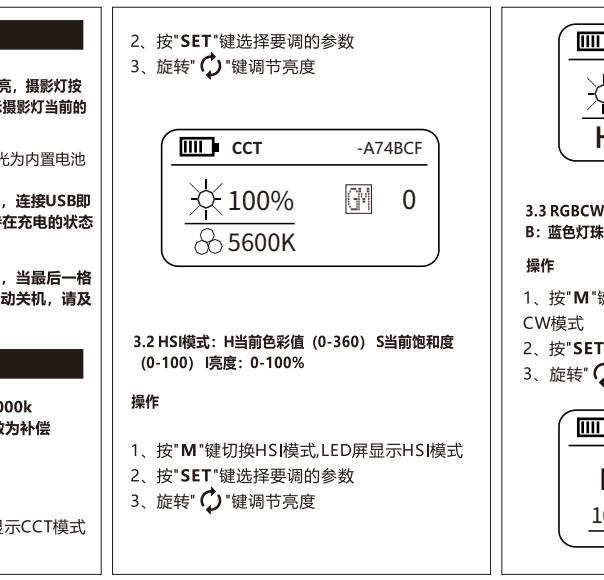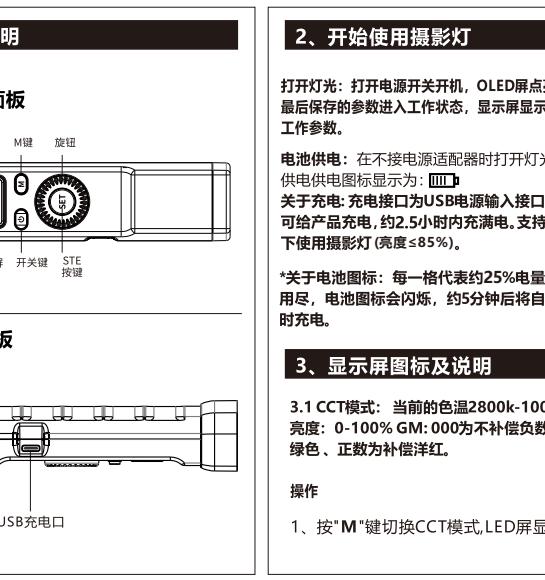

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

The devices has been evaluated to meet general RF exposure requirement , the device can be used in portable exposure condition without restriction