



RF passive parameter testing

Frequency(MHz)	2400	2410	2420	2430	2440	2450	2460	2470	2480
Antenna efficiency (%)	30.76	32.58	33.88	34.2	36.31	37.33	37.41	39.63	41.21
Antenna gain (dBi)	-0.60	-0.26	-0.31	-0.37	-0.16	-0.09	0.13	0.49	0.74
SWR	1.35					1.20			1.70
Smith	60.8					43.67			37.72
LogMag	-16.54					-20.60			-11.65


驻波比 (SWR) 图

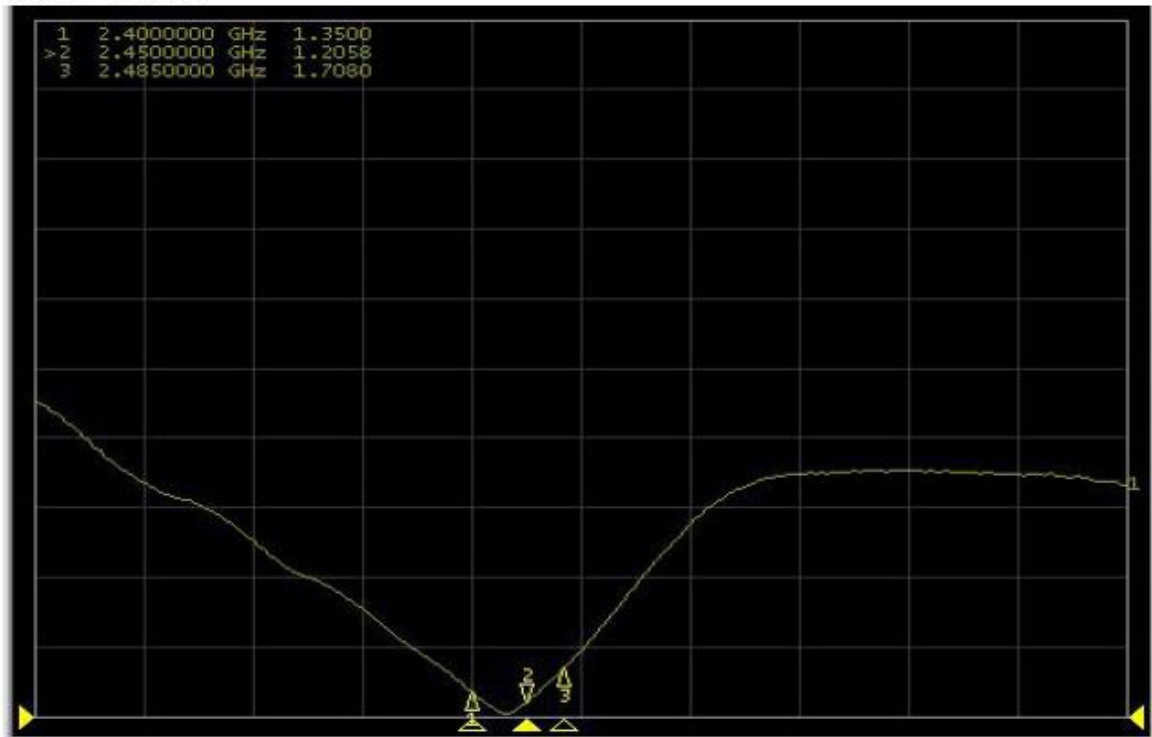




阻抗 (Smith) 图



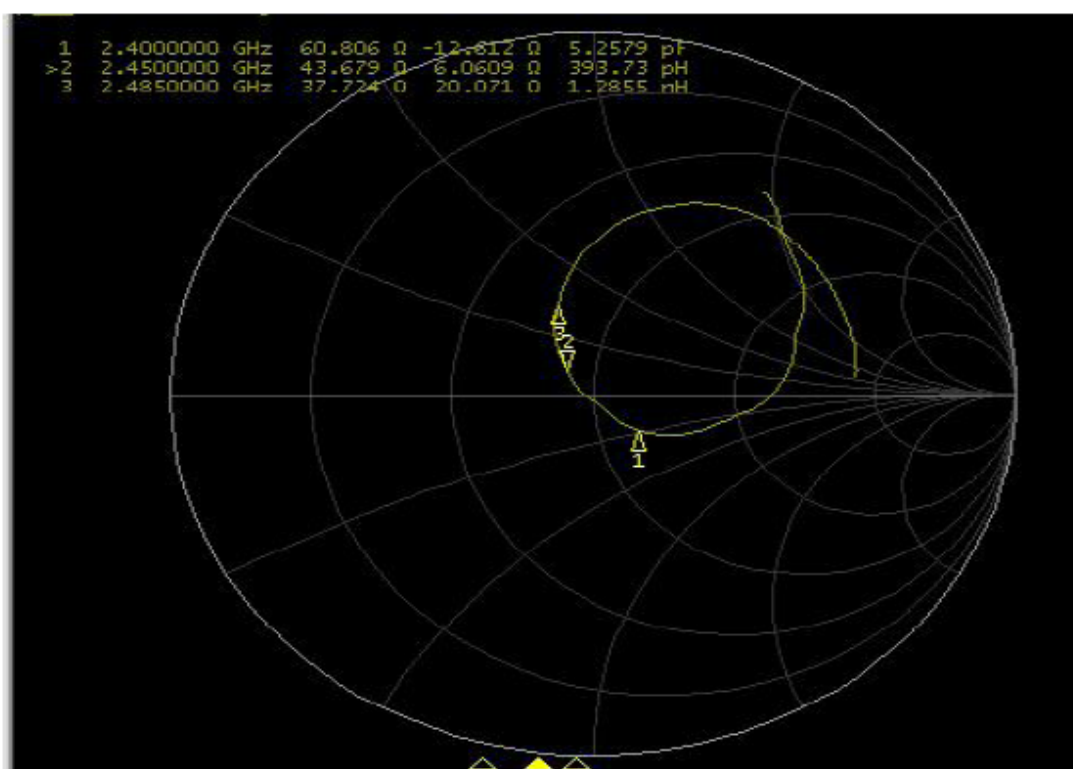





回波损耗 (Log Mag) 图

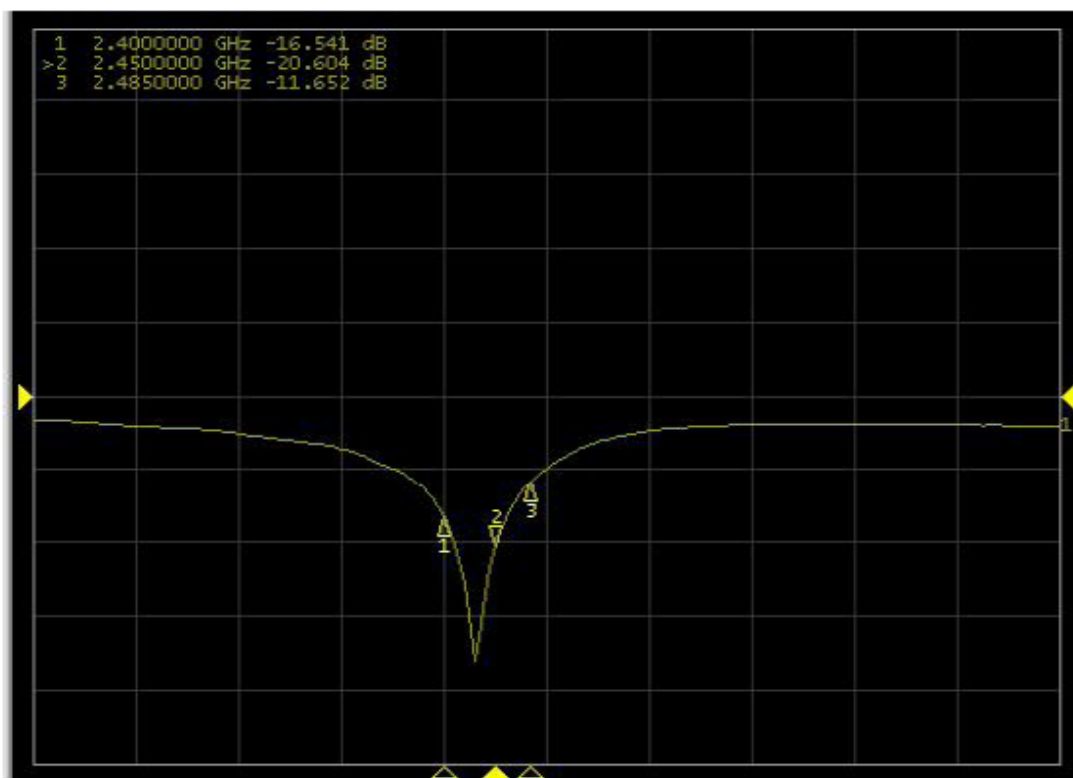



RF Passive Test Direction Diagram

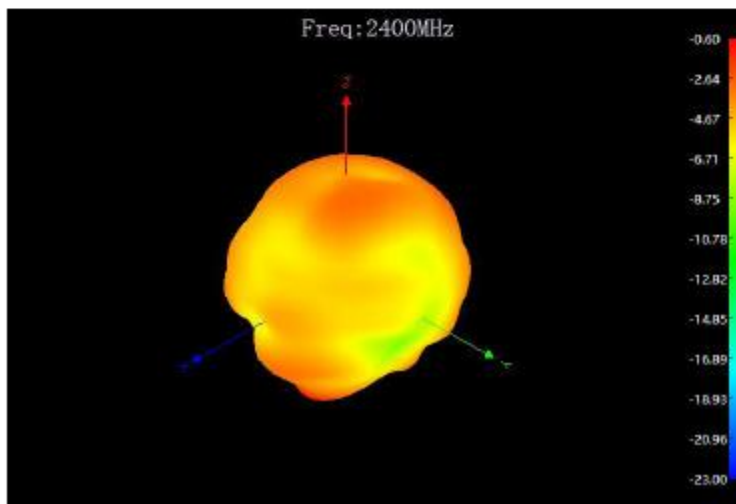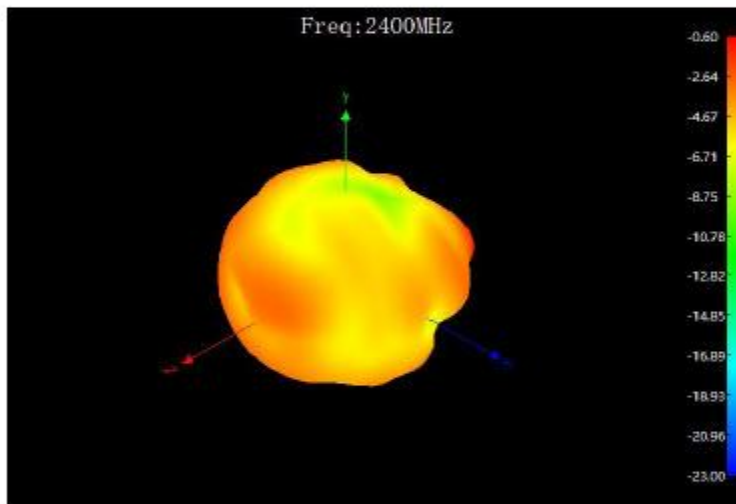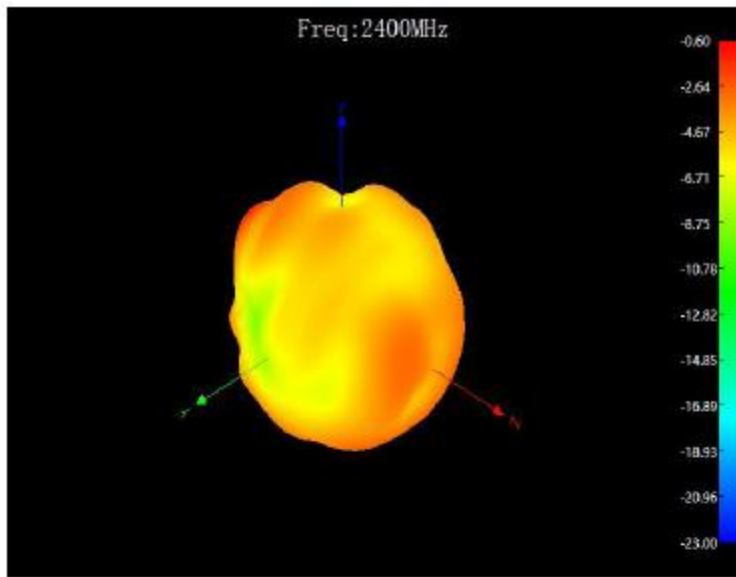

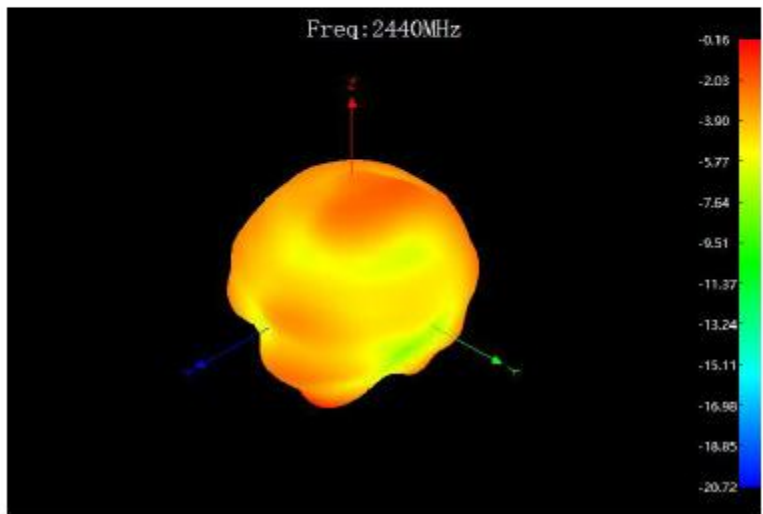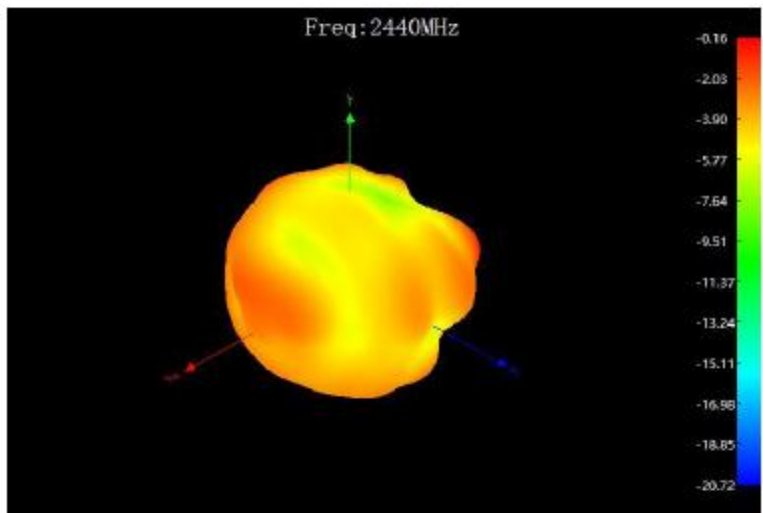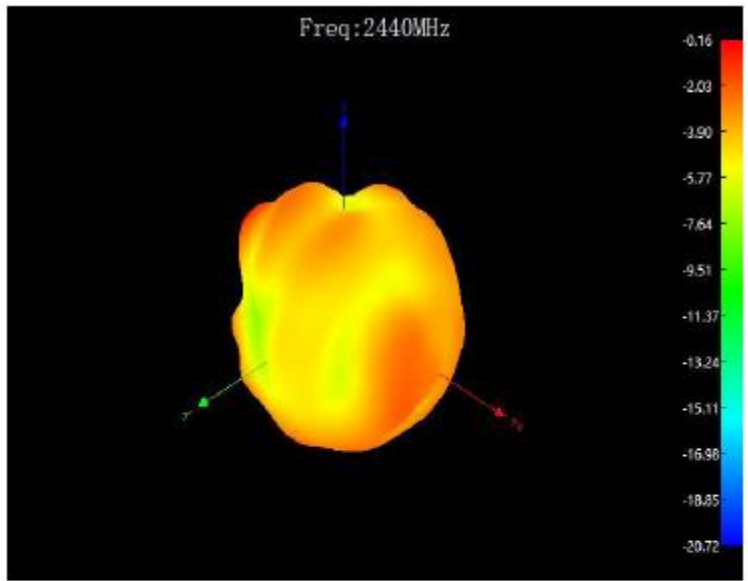

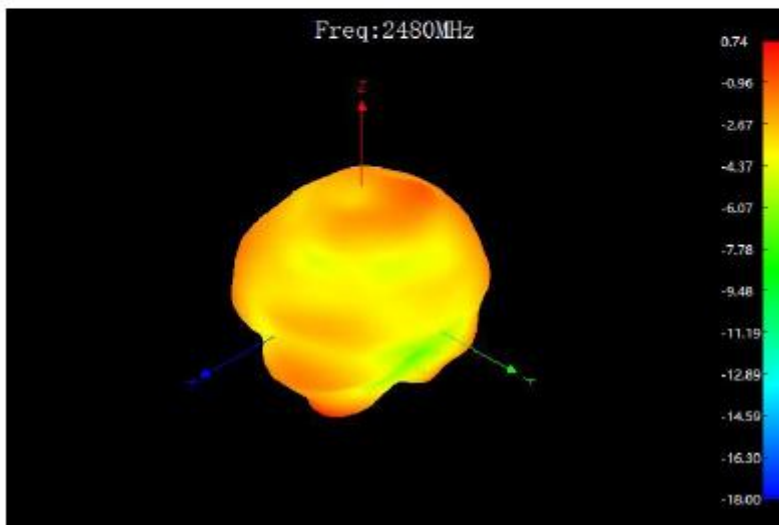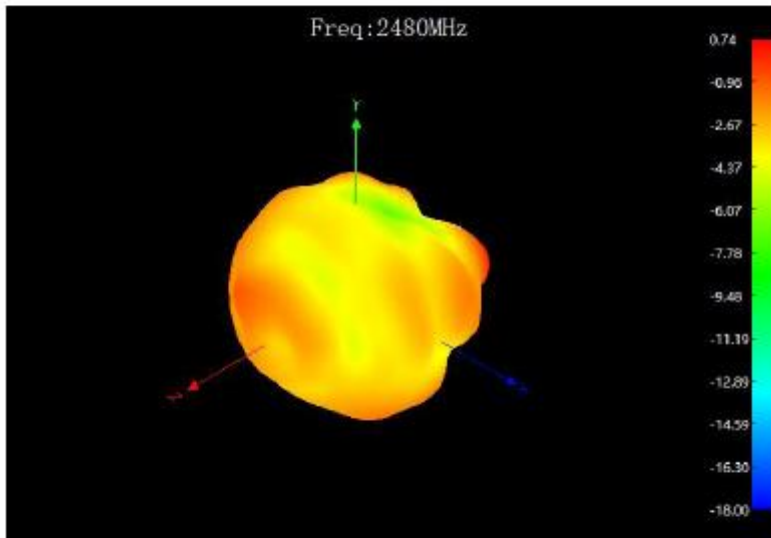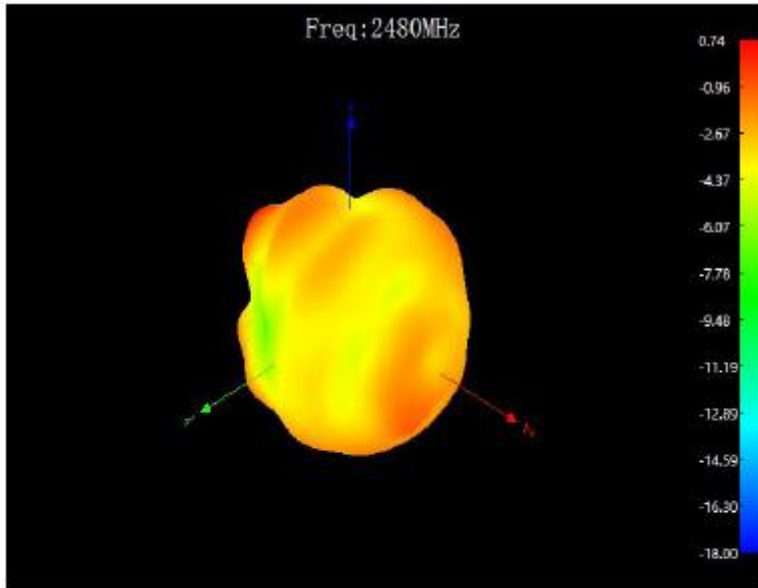

Antenna size diagram

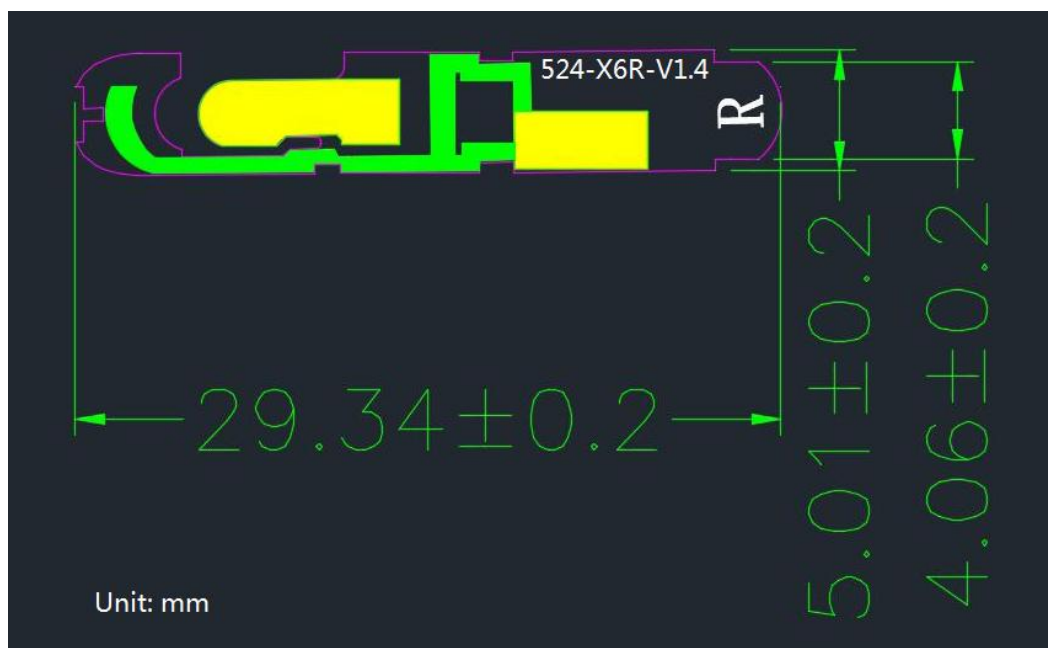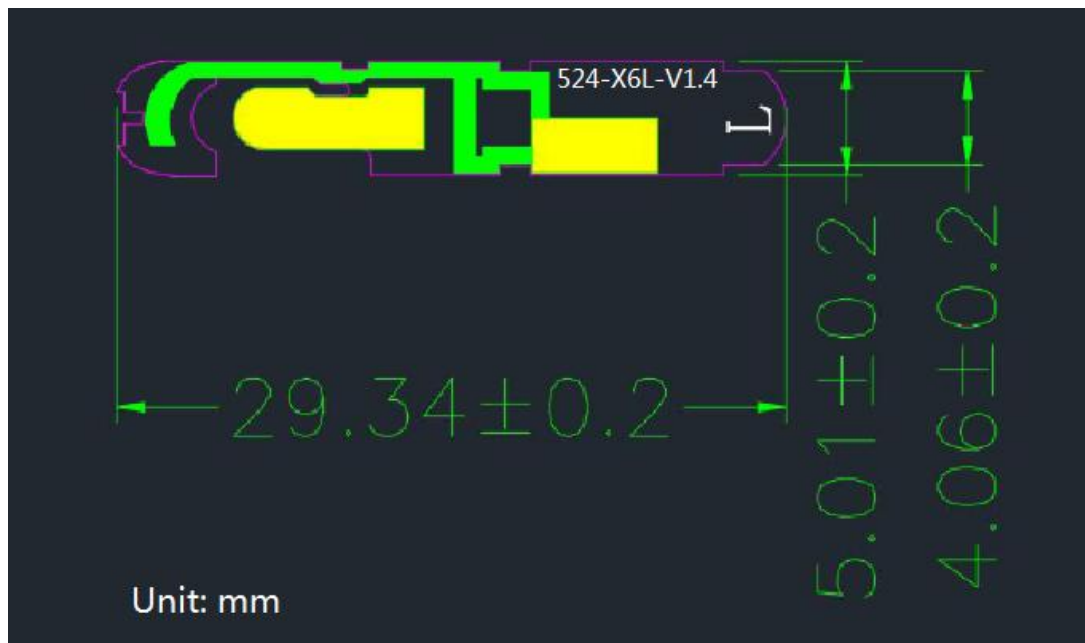

咏成国际科技有限公司

Yongcheng International Technology Co.,Ltd

地址：深圳市宝安区固戍兴裕路锐特科技工业园 A 栋 707

Address: Shenzhen Baoan District Gushu Xingyu Road Rui Technology Industrial Park A building 707