


INSTRUCTIONS LX-410 Pro

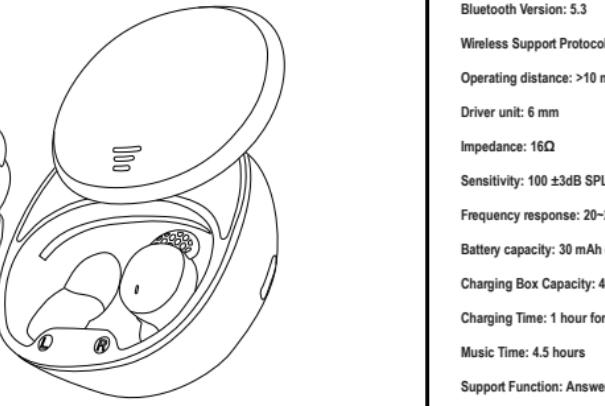


Technical Specifications

Model number: LX-410 pro
FCCID:2B8J-LX-410PRO
Bluetooth Version: 5.3
Wireless Support Protocol: A2DP AVRCP/HFP/HSP/
Operating distance: >10 meters
Driver unit: 6 mm
Impedance: 16Ω
Sensitivity: 100 ±3dB SPL at 1kHz
Frequency response: 20-20,000Hz
Battery capacity: 30 mAh each earbud
Charging Box Capacity: 400 mAh
Charging Time: 1 hour for earbud, 2 hours for charging box
Music Time: 4.5 hours
Support Function: Answer/end/reject/play/pause/previous/next Track/Volume up/down

Charging

- Fully charge the earbuds and the charging case at the first time.
- To prevent damage use the provided Type C cable.
- Dry off the earbuds and the USB port before charging.

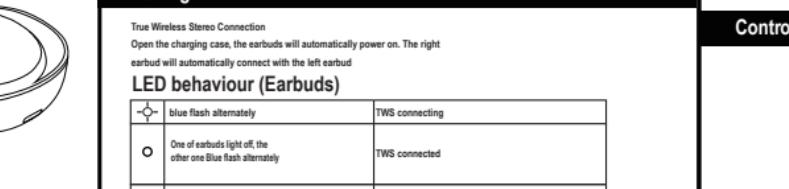


Powering On/Off

Slide up the cover,earbuds will automatically power on.
Place the earbuds back into the charging case and slide down, the earbuds will automatically power off.



Bluetooth Pairing with your Device

The earbuds will enter pairing mode when TWS connected to each other or when powered on in signal mode.You are requested to confirm the connection in your Bluetooth list.



Wearing

1. Choose the ear tips that fit your ears the best.
2. Insert the earbuds into the inner canal of your ears.
3. Adjust and find the most comfortable position.

Pairing

- Power on your LX-410 pro earphones,it will automatically connect to the last connected device if available within the Bluetooth range.
- Single Earbud Mode:
When Bluetooth connected,you can use either Earbud of the earbuds only by putting the other one back into the charging case and closing the cover.

Controls

answer	press 1 times (R)
end a call	press 2 times (R)
reject a call	press and hold for 2 seconds (L/R)
Play / Pause	press 2 times (L/R)
Volume up	press 1 time (R)
Volume down	press 1 times (L)
Sleep mode on/off	press 4 times (R)
Next track	press 3 times (R)
Previous track	press 3 times (L)
Activate Siri or other voice assistant software	press and hold any earbuds for 2 seconds (L/R)

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.
Increase the separation between the equipment and receiver.
Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radio Frequency Statement:

The device has been evaluated to the general RF exposure requirement.

The device can be used in portable exposure condition without restriction.