



# RF TEST REPORT

**Applicant** Mercado Libre SRL

**FCC ID** 2A5U9-MP300

**Product** Mobile POS

**Brand** MercadoPago

**Model** MP300

**Report No.** R2203A0258-R4V3

**Issue Date** July 18, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2021)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Xu Ying

Approved by: Xu Kai

**TA Technology (Shanghai) Co., Ltd.**

*Building 3, No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China*

*TEL: +86-021-50791141/2/3*

*FAX: +86-021-50791141/2/3-8000*



## TABLE OF CONTENT

1. Test Laboratory .....	5
1.1. Notes of the test report.....	5
1.2. Test facility .....	5
1.3. Testing Location.....	5
2. General Description of Equipment under Test.....	6
2.1. Applicant and Manufacturer Information.....	6
2.2. General information.....	6
3. Applied Standards .....	7
4. Test Configuration .....	8
5. Test Case Results .....	9
5.1. Maximum output power .....	9
5.2. 99% Bandwidth and 6dB Bandwidth .....	13
5.3. Band Edge .....	19
5.4. Power Spectral Density .....	23
5.5. Spurious RF Conducted Emissions.....	27
5.6. Unwanted Emission .....	33
5.7. Conducted Emission .....	61
6. Main Test Instruments .....	64
ANNEX A: The EUT Appearance .....	65
ANNEX B: Test Setup Photos .....	66

,



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	May 22, 2022
Rev.1	Update Product name.	June 17, 2022
Rev.2	Update description	July 15, 2022
Rev.3	Update description	July 18, 2022

Note: This revised report (Report No. R2203A0258-R4V3) supersedes and replaces the previously issued report (Report No. R2203A0258-R4V2). Please discard or destroy the previously issued report and dispose of it accordingly.



## Summary of measurement results

Number	Test Case	Clause in FCC rules	Verdict
1	Maximum output power	15.247(b)(3)	PASS
2	6 dB bandwidth	15.247(a)(2)	PASS
3	Power spectral density	15.247(e)	PASS
4	Band Edge	15.247(d)	PASS
5	Spurious RF Conducted Emissions	15.247(d)	PASS
6	Unwanted Emissions	15.247(d),15.205,15.209	PASS
7	Conducted Emissions	15.207	PASS

Date of Testing: April 22, 2022 and May 14, 2022

Date of Sample Received: April 22, 2022

Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.



## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.

Address: Building 3, No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

City: Shanghai

Post code: 201201

Country: P. R. China

Contact: Xu Kai

Telephone: +86-021-50791141/2/3

Fax: +86-021-50791141/2/3-8000

Website: <http://www.ta-shanghai.com>

E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)



## 2. General Description of Equipment under Test

### 2.1. Applicant and Manufacturer Information

Applicant	Mercado Libre SRL
Applicant address	Caseros 3039, Buenos Aires, Argentina Buenos Aires 1264 ARGENTINA
Manufacturer	Dspread Technology (Beijing) Inc.
Manufacturer address	Rm.407, b12c. #10 (Universal Business Park), Jiuxianqiao Road, Chaoyang District, Beijing, China,100015

### 2.2. General information

EUT Description	
Model	MP300
IMEI	864593058276063
Hardware Version	1.0
Software Version	1.0.1
Power Supply	Battery
Antenna Type	Internal Antenna
Antenna Gain	-3.09dBi
additional beamforming gain	NA
Operating Frequency Range(s)	802.11b/g/n(HT20): 2412 ~ 2462 MHz
Modulation Type	802.11b: DSSS 802.11g/n(HT20): OFDM
Max. Conducted Power	Wi-Fi 2.4G: 22.43dBm
EUT Accessory	
Battery	Manufacturer: Beijing Guocai Huayang Technology Co., Ltd. Model: GCHY 643656
USB Cable 1	Manufacturer: JiangXi JieYe Electronics Co., Ltd. Model: JY-C15-09 100cm Cable, Shielded
USB Cable 2	Manufacturer: SHENZHEN LITKCONN TECHNOLOGY CO., LTD Model: ZY-1130018 100cm Cable, Shielded

Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.  
2. There is more than one USB cable/Battery, each one should be applied throughout the compliance test respectively, and however, only the worst case (USB cable 2) will be recorded in this report.



### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**Test standards:**

**FCC CFR47 Part 15C (2021) Radio Frequency Devices**

**ANSI C63.10 - 2013**

**Reference standard:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the loop antenna is vertical, the others are vertical and horizontal. and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

Test Mode	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

## 5. Test Case Results

### 5.1. Maximum output power

#### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Methods of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The following procedure can be used when the maximum available RBW of the instrument is less than the DTS bandwidth:

- a) Set the RBW = 1 MHz.
- b) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- c) Set the span  $\geq [1.5 \times \text{DTS bandwidth}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

#### Test Setup



#### Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

Output Power	$\leq 1\text{W}$ (30dBm)
--------------	--------------------------

#### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44$  dB.

**Test Results**


<b>Test Mode</b>	<b>Carrier frequency (MHz) / Channel</b>	<b>Peak Output Power (dBm)</b>	<b>Limit (dBm)</b>	<b>Conclusion</b>
802.11b	2412/CH 1	20.60	30	PASS
	2417/CH 2	20.49	30	PASS
	2422/CH 3	20.41	30	PASS
	2437/CH 6	19.88	30	PASS
	2462/CH11	18.64	30	PASS
802.11g	2412/CH 1	22.43	30	PASS
	2437/CH 6	22.08	30	PASS
	2462/CH11	20.67	30	PASS
802.11n HT20	2412/CH 1	22.23	30	PASS
	2437/CH 6	22.03	30	PASS
	2462/CH11	20.47	30	PASS




## 802.11b, Channel No.: 1

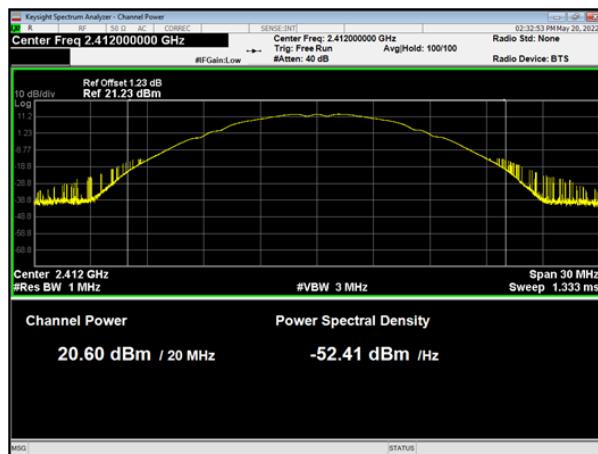


## 802.11b, Channel No.: 2

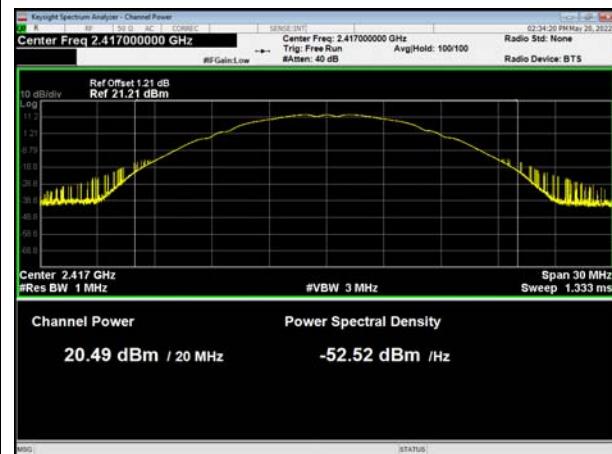

## 802.11b, Channel No.: 3

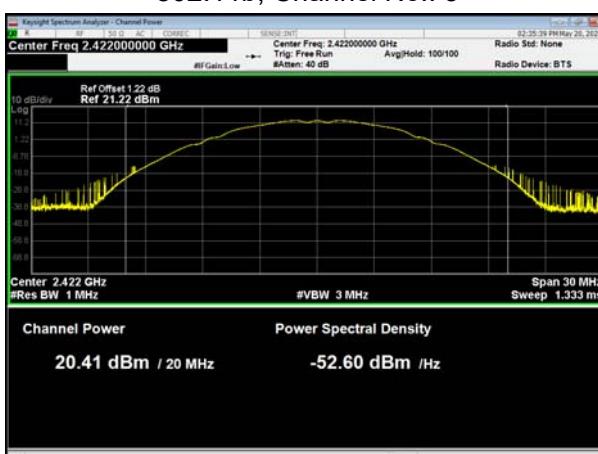

## 802.11b, Channel No.: 6

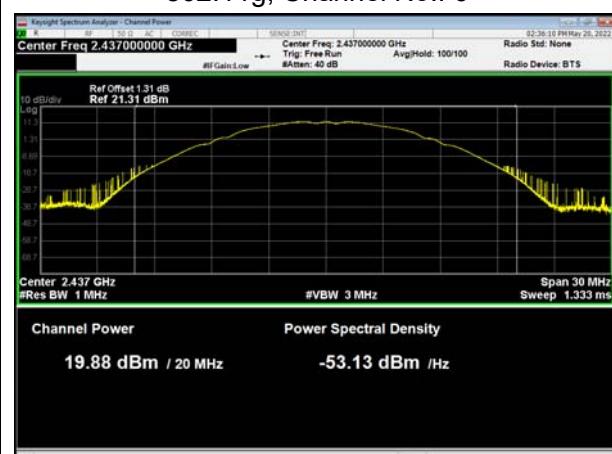


## 802.11b, Channel No.: 11






## 802.11g, Channel No.: 1

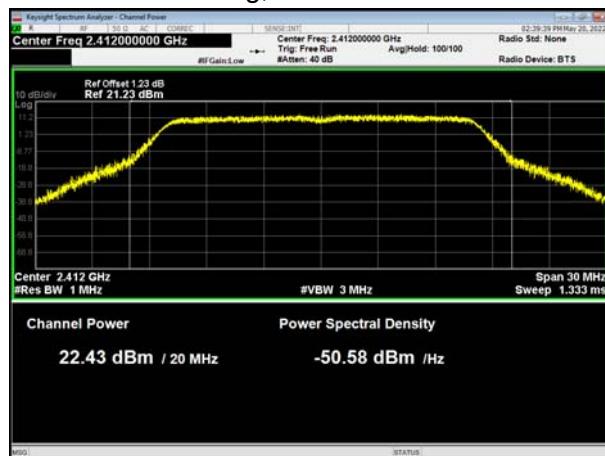


## 802.11n(HT20), Channel No. 1

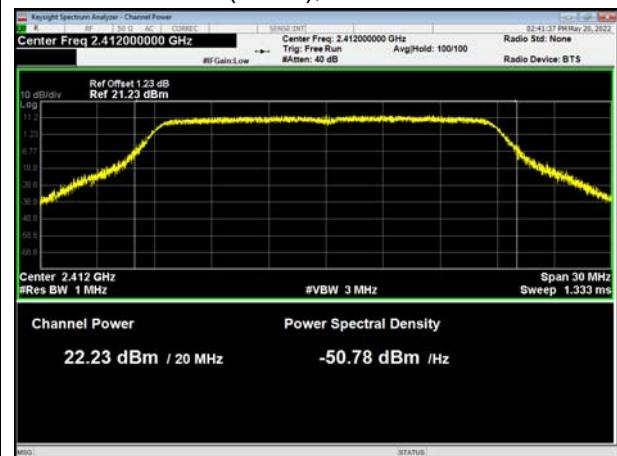


## 802.11g, Channel No.: 6




## 802.11n(HT20), Channel No. 6

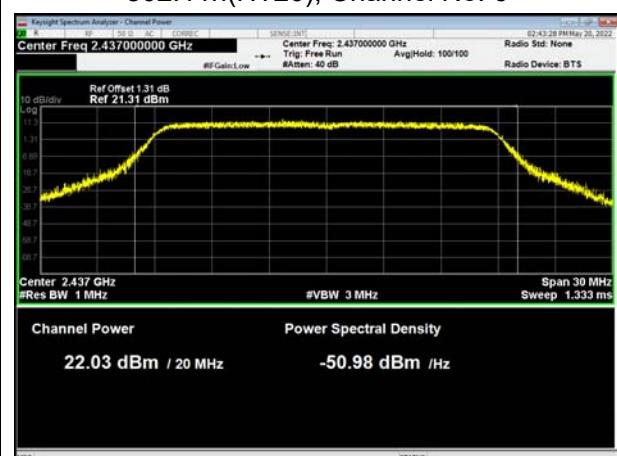

## 802.11g, Channel No.: 11

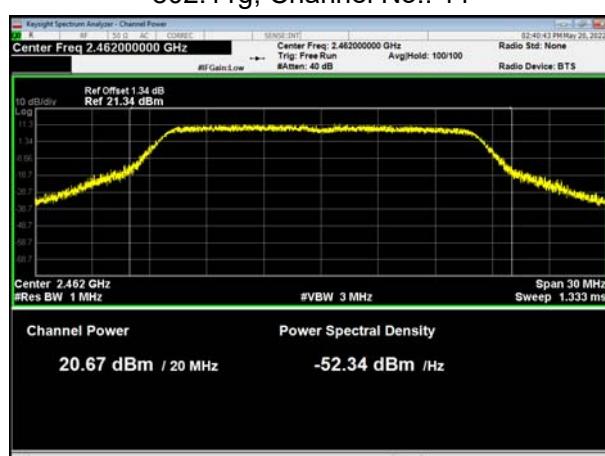

## 802.11n(HT20), Channel No. 11

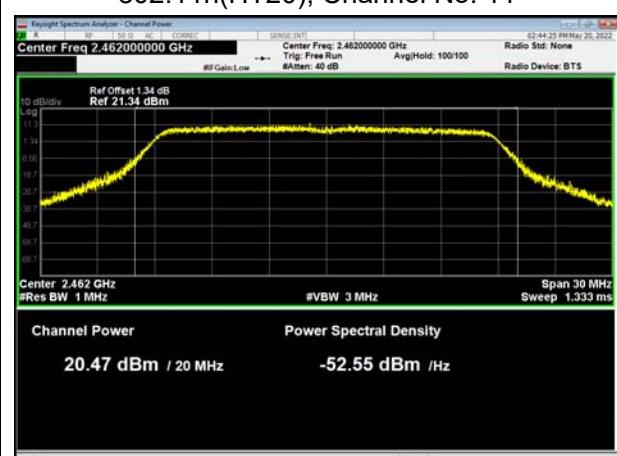

## 5.2. 99% Bandwidth and 6dB Bandwidth

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer. Dector=Peak, Trace mode=max hold.

The EUT was connected to the spectrum analyzer through a known loss cable. The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value.

### Test Setup



### Limits

Rule Part 15.247 (a) (2) specifies that "Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz."

minimum 6 dB bandwidth	$\geq 500$ kHz
------------------------	----------------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

**Test Results:**

Test Mode	Carrier frequency (MHz)	99% bandwidth (MHz)	Minimum 6 dB bandwidth (MHz)	Limit (kHz)	Conclusion
802.11b	2412	12.542	8.083	500	PASS
	2417	12.315	8.099	500	PASS
	2422	12.222	8.566	500	PASS
	2437	12.286	8.549	500	PASS
	2462	11.934	8.549	500	PASS
802.11g	2412	16.661	16.310	500	PASS
	2437	16.840	16.300	500	PASS
	2462	16.822	16.300	500	PASS
802.11n HT20	2412	17.692	16.430	500	PASS
	2437	17.788	16.530	500	PASS
	2462	17.792	16.780	500	PASS

## 99%bandwidth


802.11b, Carrier frequency (MHz): 2412



802.11b, Carrier frequency (MHz): 2417



802.11b, Carrier frequency (MHz): 2422

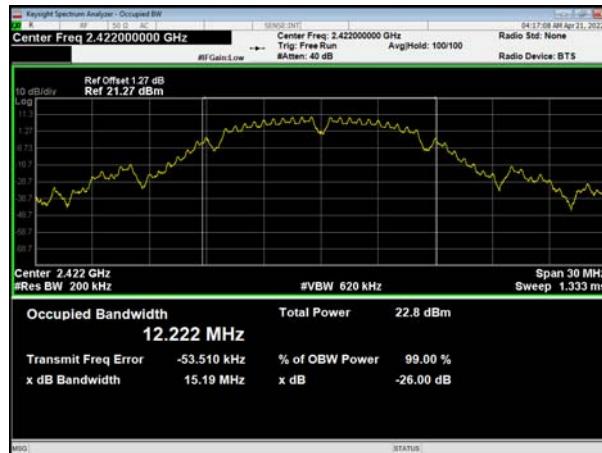

802.11b, Carrier frequency (MHz): 2437




802.11b, Carrier frequency (MHz): 2462






802.11g, Carrier frequency (MHz): 2412

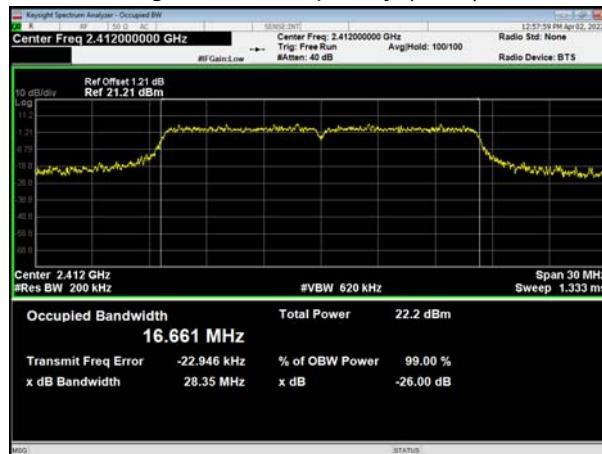


802.11n(HT20), Carrier frequency (MHz): 2412




802.11g, Carrier frequency (MHz): 2437

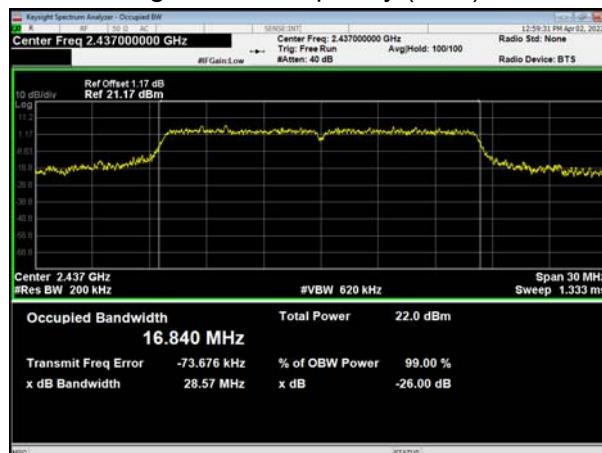


802.11n(HT20), Carrier frequency (MHz): 2437

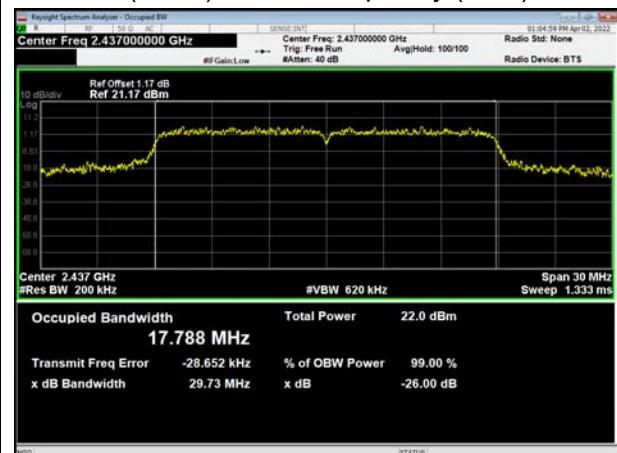

802.11g, Carrier frequency (MHz): 2462

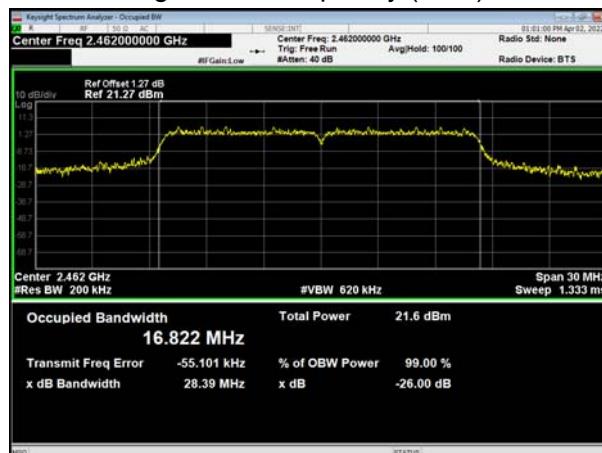

802.11n(HT20), Carrier frequency (MHz): 2462

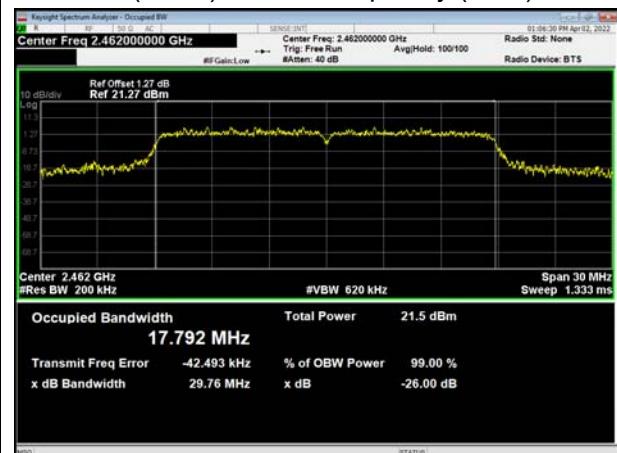



## 6 dB bandwidth

802.11b, Carrier frequency (MHz): 2412



802.11b, Carrier frequency (MHz): 2417



802.11b, Carrier frequency (MHz): 2422



802.11b, Carrier frequency (MHz): 2437



802.11b, Carrier frequency (MHz): 2462







802.11g, Carrier frequency (MHz): 2412




802.11n(HT20), Carrier frequency (MHz): 2412

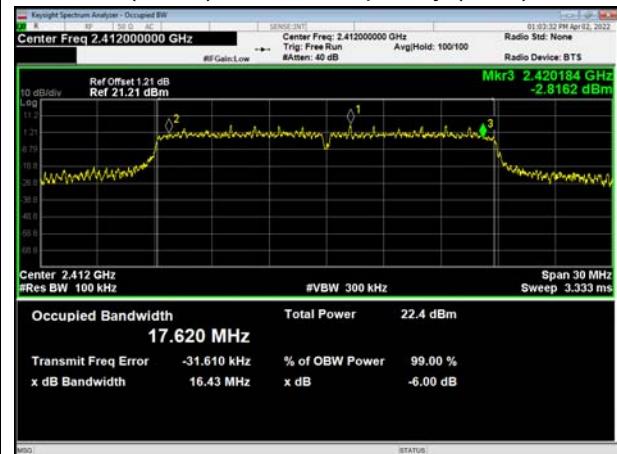

802.11g, Carrier frequency (MHz): 2437

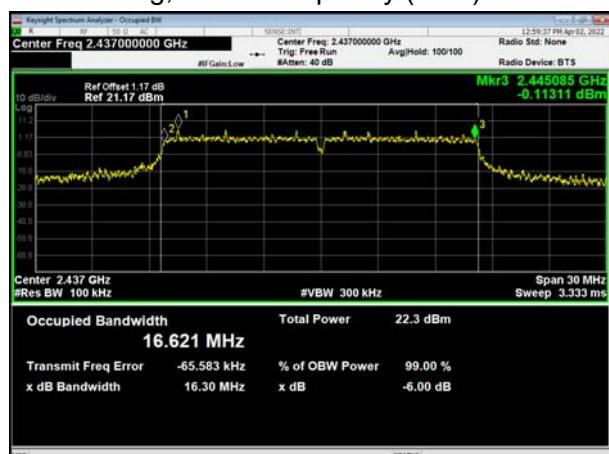


802.11n(HT20), Carrier frequency (MHz): 2437

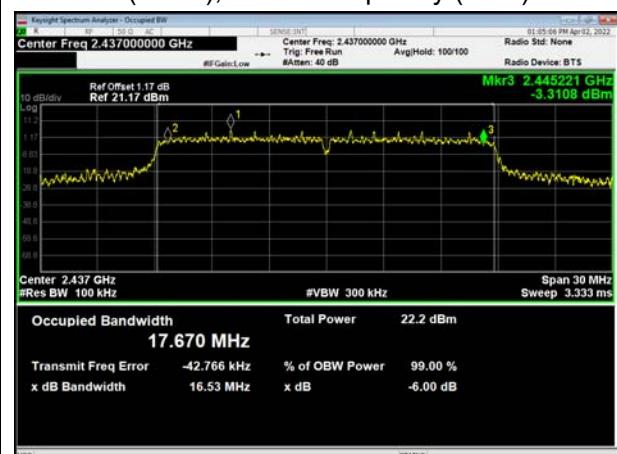

802.11g, Carrier frequency (MHz): 2462



802.11n(HT20), Carrier frequency (MHz): 2462

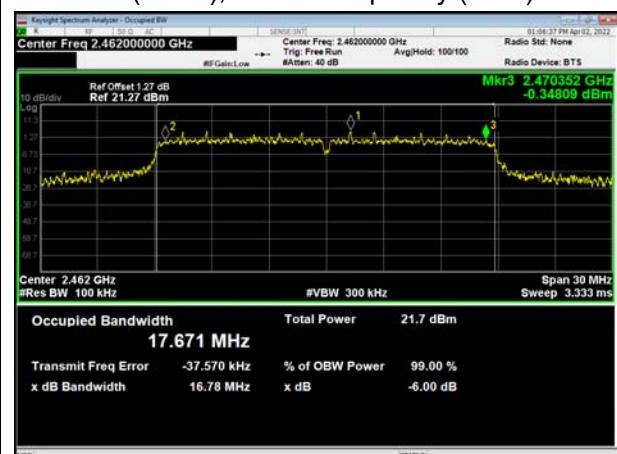

### 5.3. Band Edge


#### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

#### Test Setup

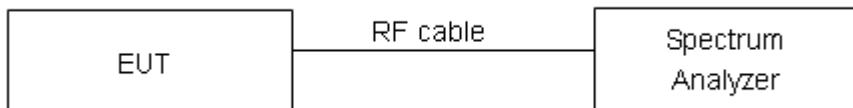

#### Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
2GHz-3GHz	1.407 dB



## Test Results: PASS

## 802.11b, Channel No.: 1



## 802.11b, Channel No.: 2



## 802.11b, Channel No.: 3






## 802.11b, Channel No.: 11



## 802.11g, Channel No.: 1

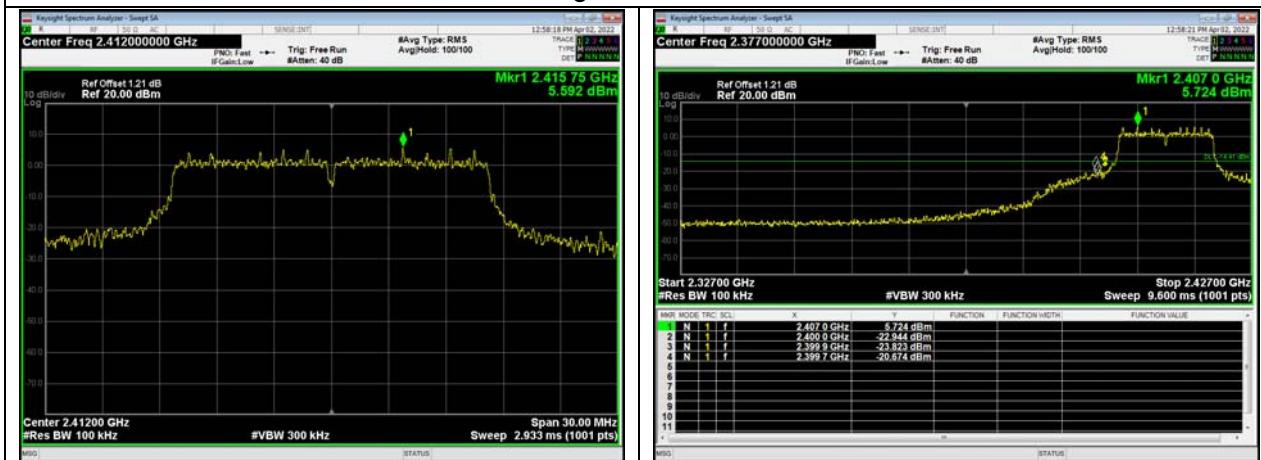




## 802.11g, Channel No.: 11



## 802.11n(HT20), Channel No. 1



## 802.11n(HT20), Channel No. 11

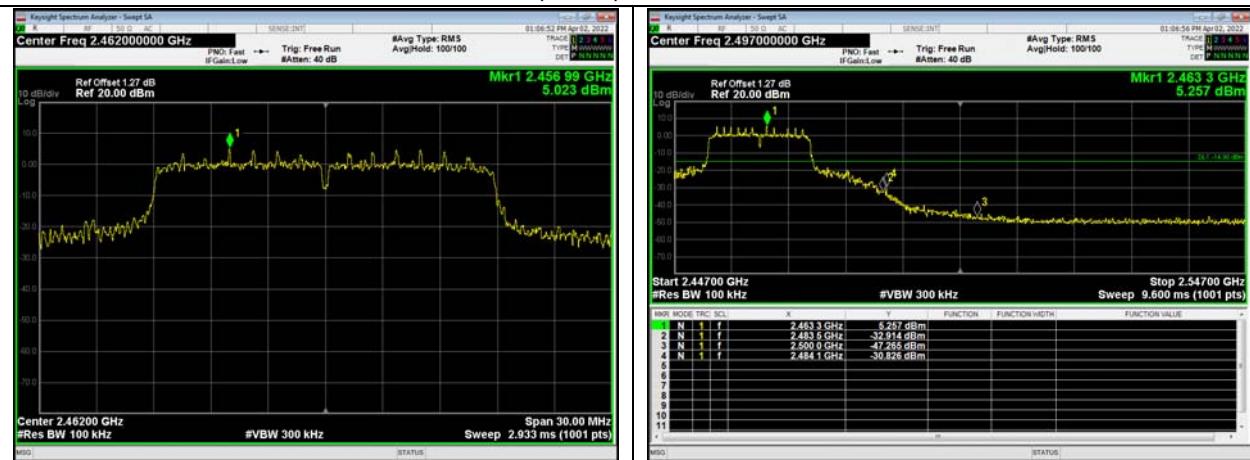

## 5.4. Power Spectral Density

### Ambient condition


Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

### Test setup



### Limits

Rule Part 15.247(e) specifies that "For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission."

Limits	$\leq 8 \text{ dBm} / 3\text{kHz}$
--------	------------------------------------

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75 \text{ dB}$ .

**Test Results:**

Test Mode	Channel Number	Read Value (dBm / 30kHz)	Power Spectral Density (dBm / 3kHz)	Limit (dBm / 3kHz)	Conclusion
802.11b	1	6.42	-3.58	8	PASS
	2	6.56	-3.44	8	PASS
	3	5.95	-4.05	8	PASS
	6	5.86	-4.14	8	PASS
	11	3.99	-6.01	8	PASS
802.11g	1	0.59	-9.41	8	PASS
	6	0.60	-9.40	8	PASS
	11	-0.16	-10.16	8	PASS
802.11n HT20	1	0.72	-9.28	8	PASS
	6	0.78	-9.22	8	PASS
	11	0.27	-9.73	8	PASS

Note: Power Spectral Density =Read Value+10\*log10(3/30)

802.11b, Channel No.: 1



802.11b, Channel No.: 2



802.11b, Channel No.: 3



802.11g, Channel No.: 6




802.11b, Channel No.: 11







802.11g, Channel No.: 1

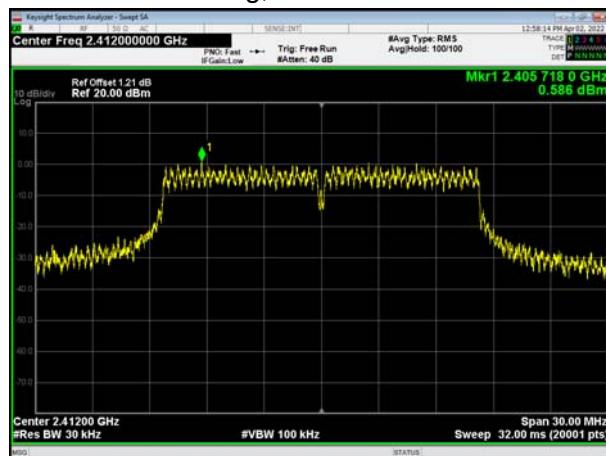


802.11n(HT20), Channel No. 1

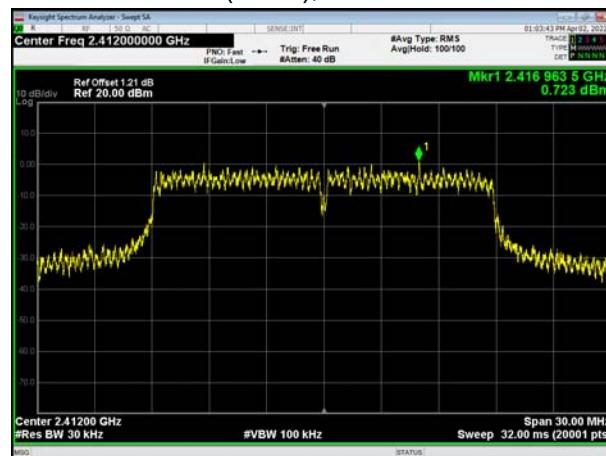


802.11g, Channel No.: 6

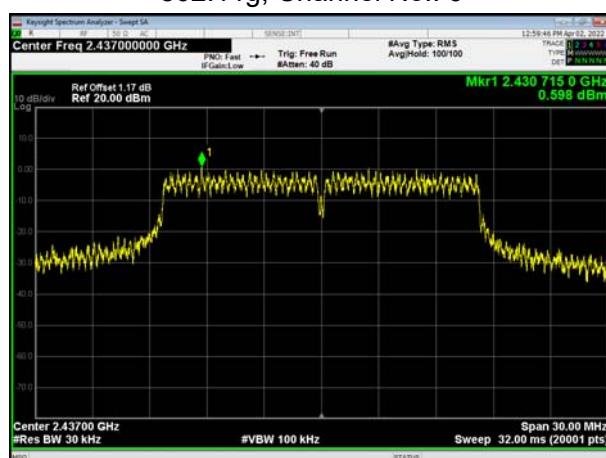

802.11n(HT20), Channel No. 6

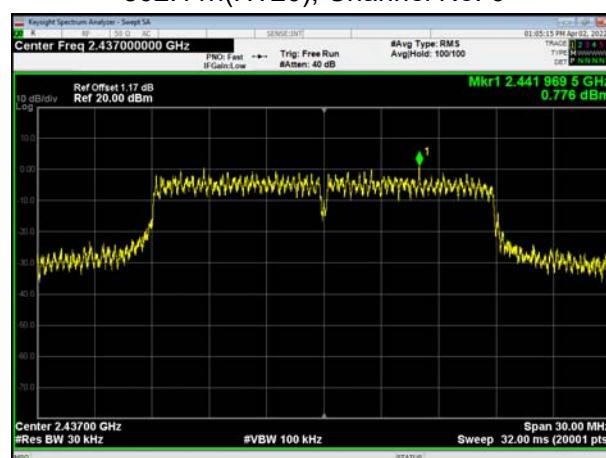

802.11g, Channel No.: 11

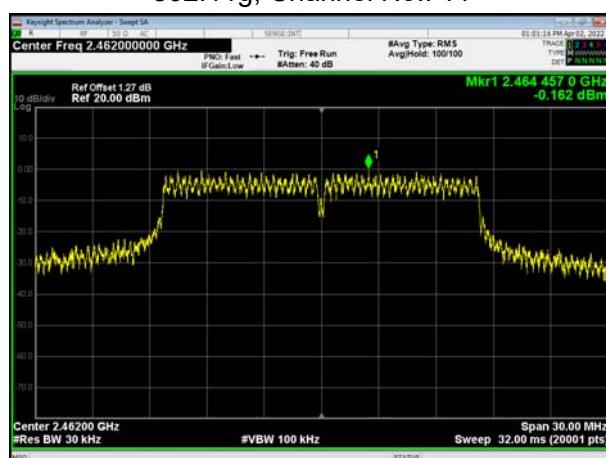

802.11n(HT20), Channel No. 11



## 5.5. Spurious RF Conducted Emissions

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

### Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100 kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

### Test setup



### Limits

Rule Part 15.247(d) specifies that "In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. "

Test Mode	Carrier frequency (MHz)	Reference value (dBm)	Limit
802.11b	2412	9.47	-10.53
	2417	9.50	-10.50
	2422	9.65	-10.35
	2437	8.31	-11.69
	2462	7.07	-12.93
802.11g	2412	5.73	-14.27
	2437	5.53	-14.47
	2462	4.78	-15.22
802.11n HT20	2412	5.25	-14.75
	2437	5.31	-14.69
	2462	5.04	-14.96



### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

Frequency	Uncertainty
100kHz-2GHz	0.684 dB
2GHz-26GHz	1.407 dB



## Test Results:

## 802.11b, Channel No.: 1



## 802.11b, Channel No.: 2



## 802.11b, Channel No.: 3





## 802.11b, Channel No.: 6



## 802.11b, Channel No.: 11






## 802.11g, Channel No.: 1



## 802.11g, Channel No.: 6




## 802.11g, Channel No.: 11

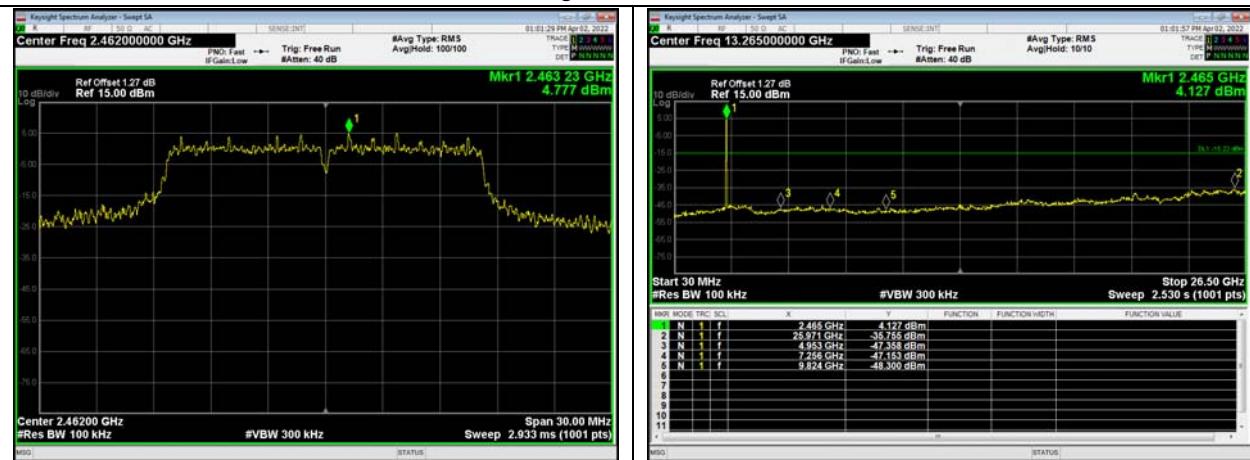




## 802.11n(HT20), Channel No. 1

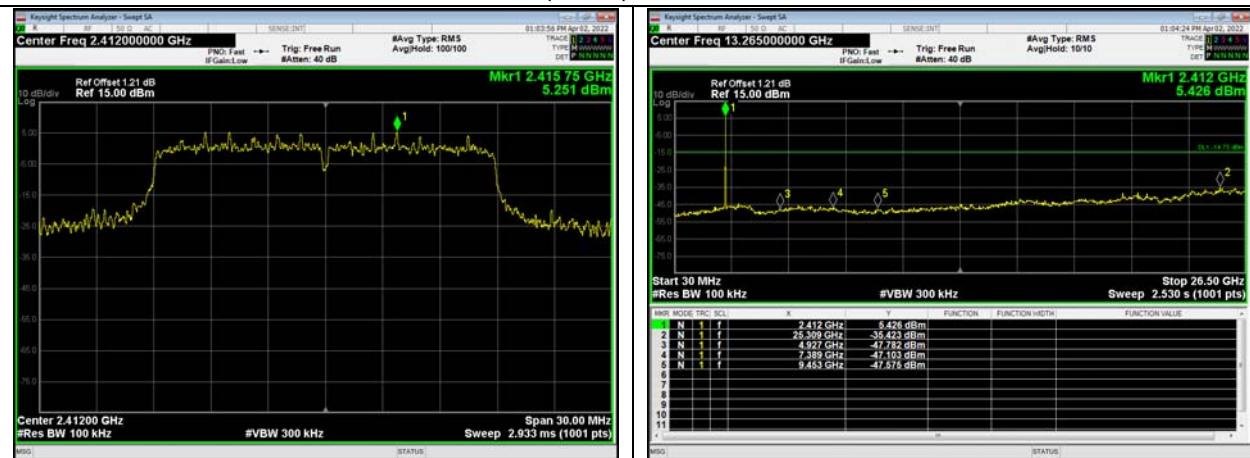

## 802.11n(HT20), Channel No. 6

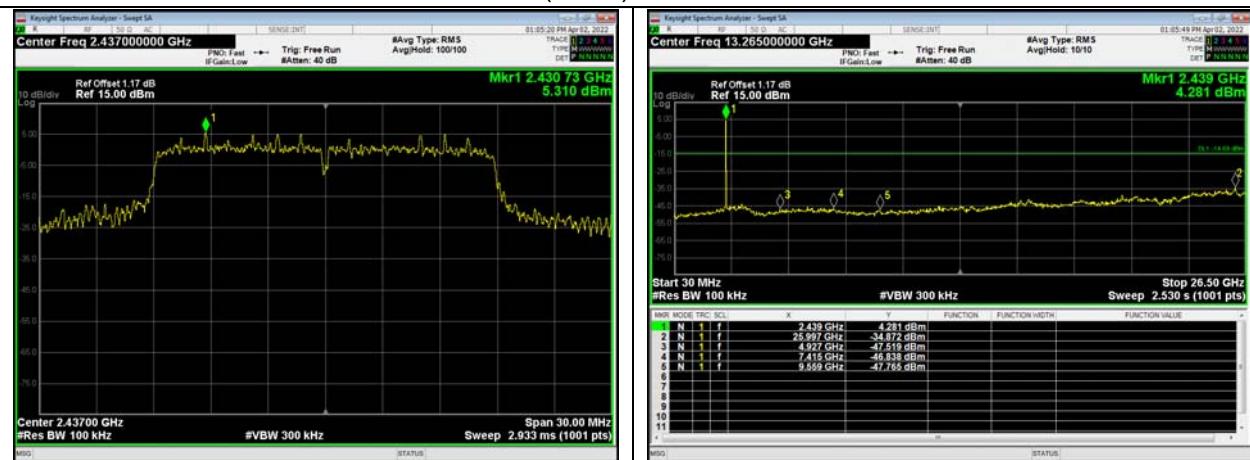

## 802.11n(HT20), Channel No. 11



## 5.6. Unwanted Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	102.5kPa

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9KHz, VBW=30KHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage



averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of  $1 / D$ , where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)




g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.

2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The test is in transmitting mode.

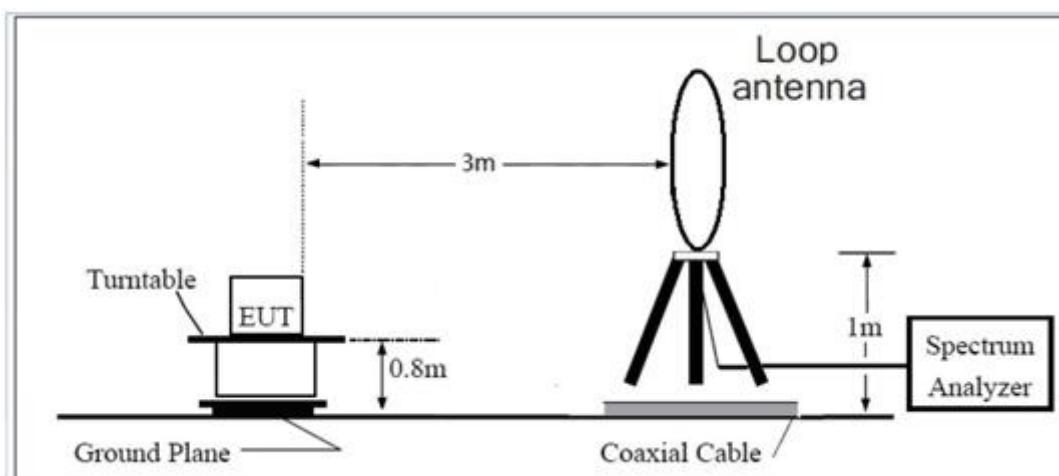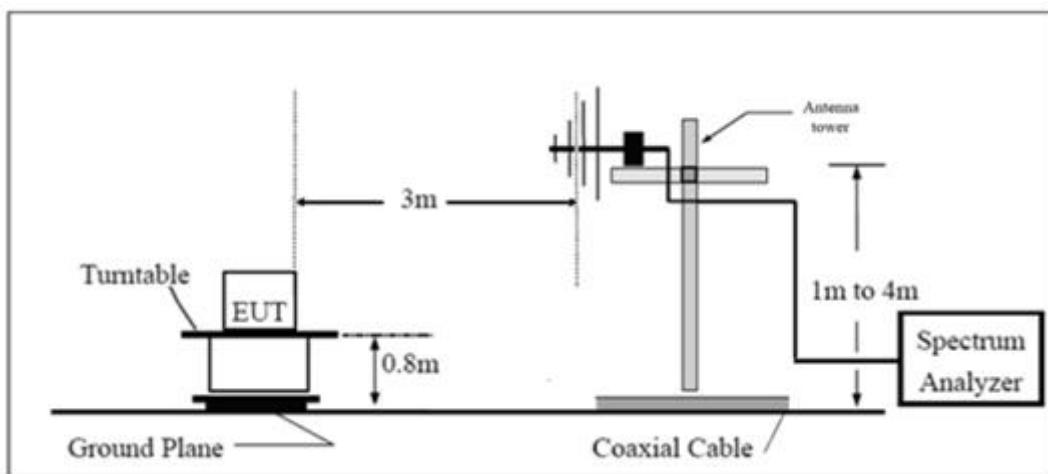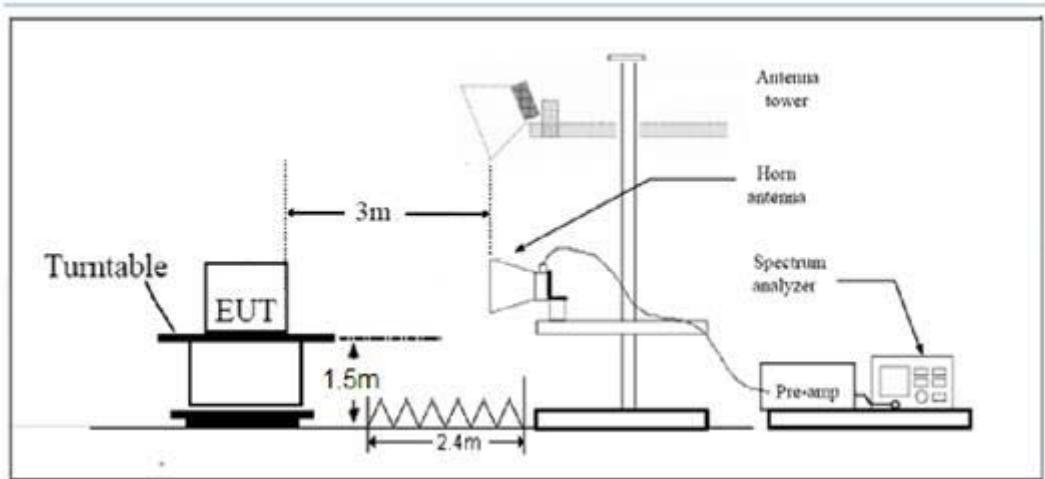**Test setup****9KHz ~ 30MHz****30MHz ~ 1GHz****Above 1GHz**

Note: Area side:2.4mX3.6m

**Limits**

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

**§15.35(b)**

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m




Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			


### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .


Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB

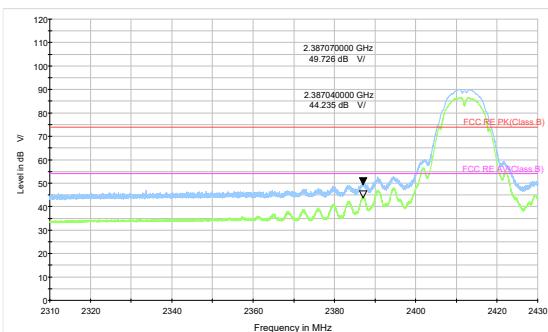**Test Results:**


802.11b-Channel 1 Peak+ Average

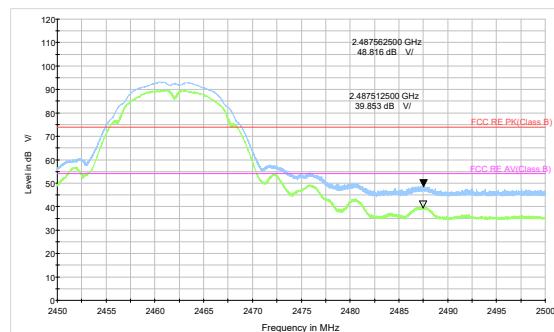


802.11b-Channel 11 Peak+ Average

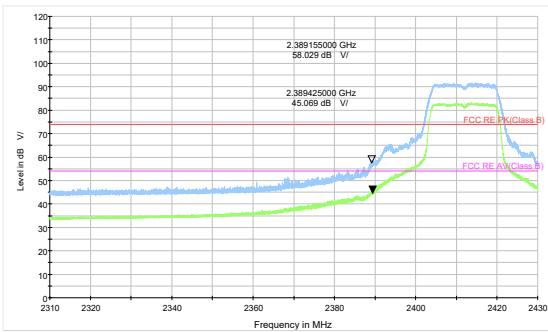


802.11g-Channel 1 Peak+ Average

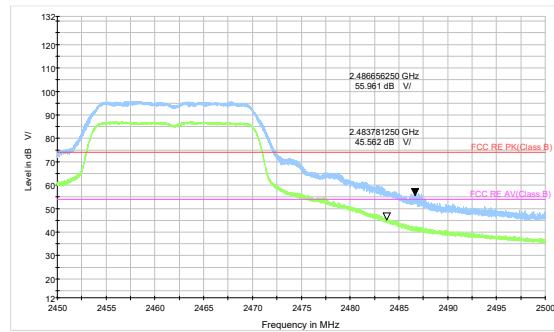

802.11g-Channel 11 Peak+ Average

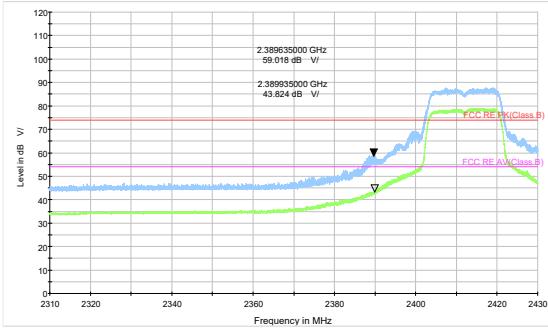

802.11n HT20 -Channel 1 Peak+ Average

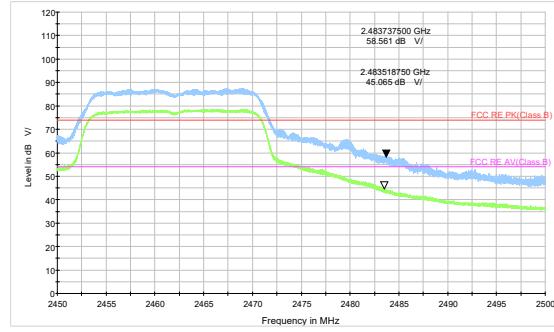

802.11n HT20 -Channel 11 Peak+ Average

## Result of RE


### Test result

The following graphs display the maximum values of horizontal and vertical by software. For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.


During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11b CH1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

A font ( $\text{Level in dB } \mu\text{V/m}$ ) in the test plot = (level in dB  $\mu\text{V/m}$ )

### Continuous TX mode:

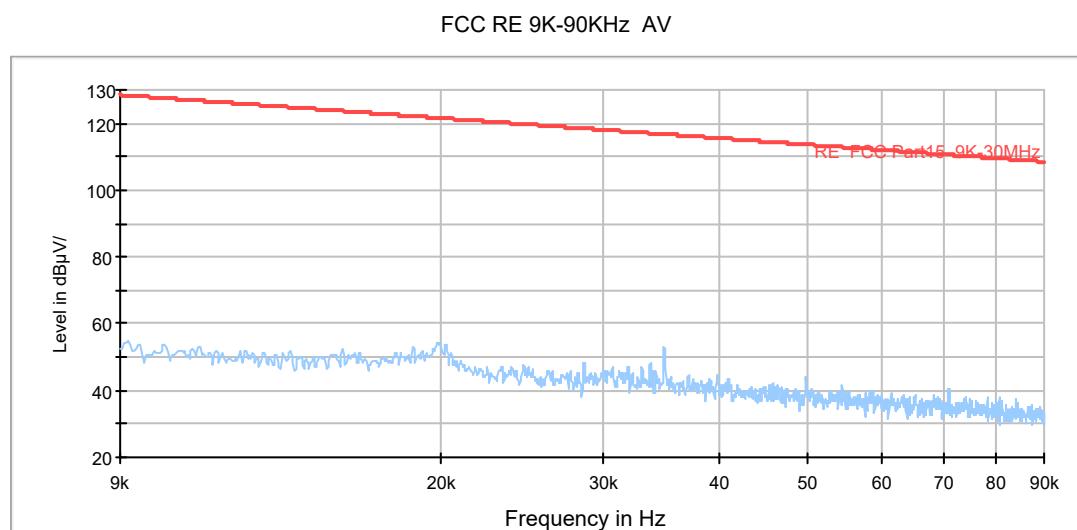


### Radiates Emission from 9KHz to 90KHz

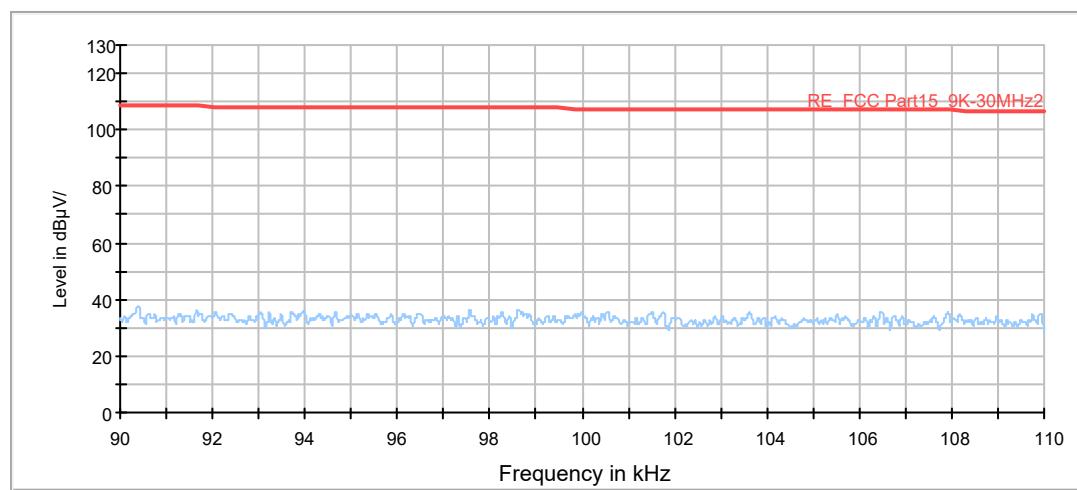


### Radiates Emission from 90KHz to 110KHz

## FCC RE 110K-490KHz AV

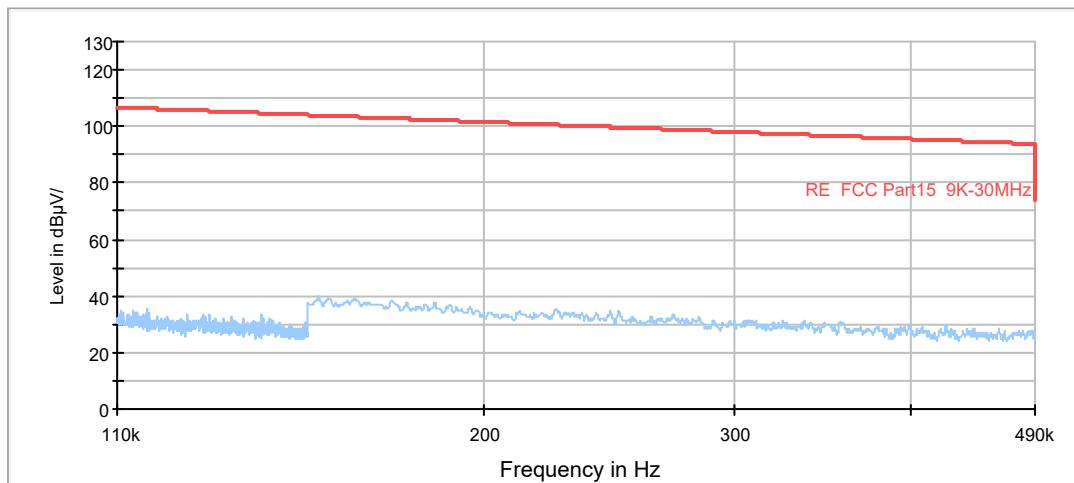


Radiates Emission from 110KHz to 490KHz

## FCC RE 490K-30MHz QP

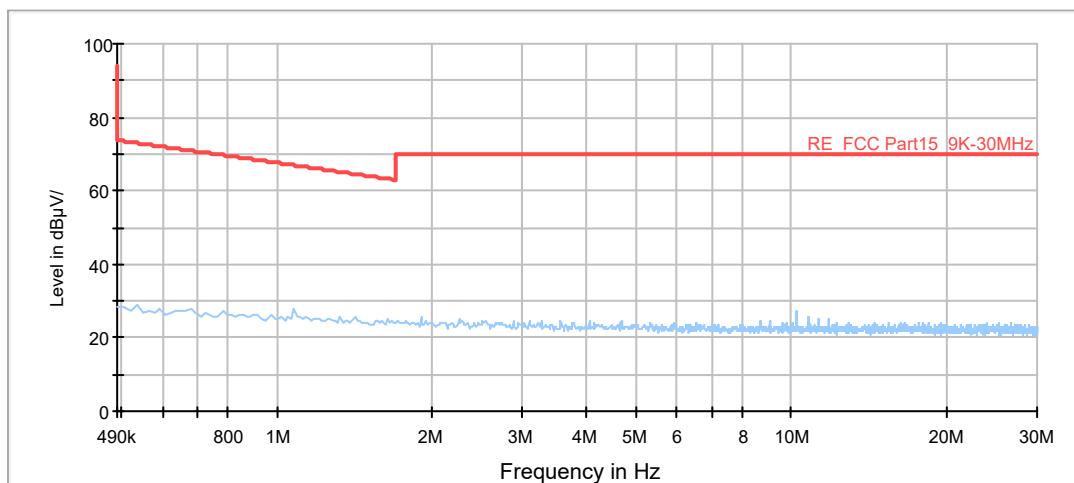

Radiates Emission from 490KHz to 30MHz

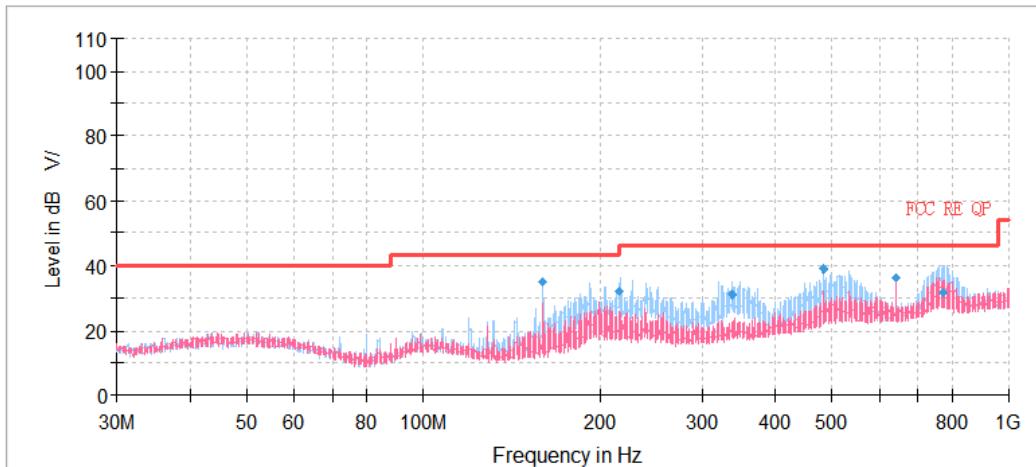


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
159.98	35.21	43.50	8.29	207.0	H	22.00	15
216.03	32.37	46.00	13.63	125.0	H	161.00	18
335.49	30.94	46.00	15.06	100.0	H	270.00	22
479.98	38.93	46.00	7.07	175.0	H	40.00	24
639.98	36.35	46.00	9.65	100.0	V	127.00	27
770.61	31.80	46.00	14.20	100.0	H	92.00	29

Remark: 1. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)


2. Margin = Limit – Quasi-Peak

## 802.11b CH1

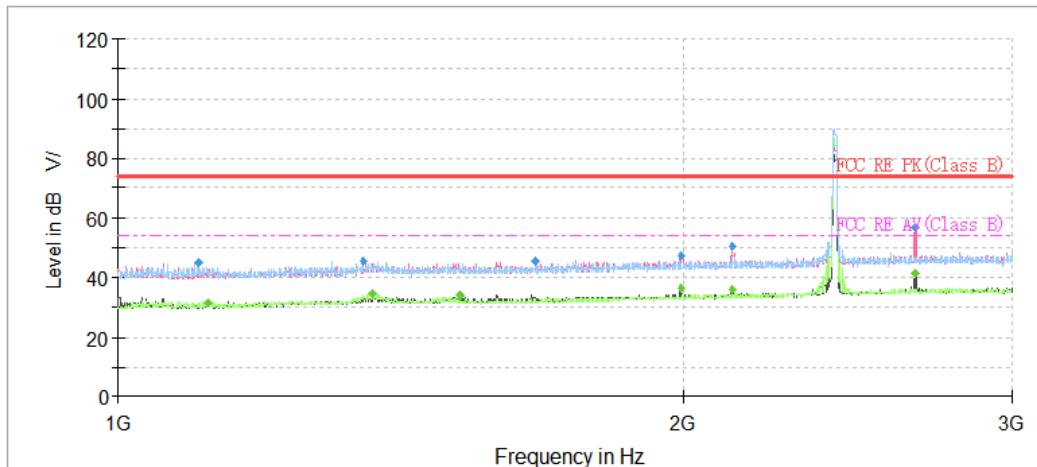

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

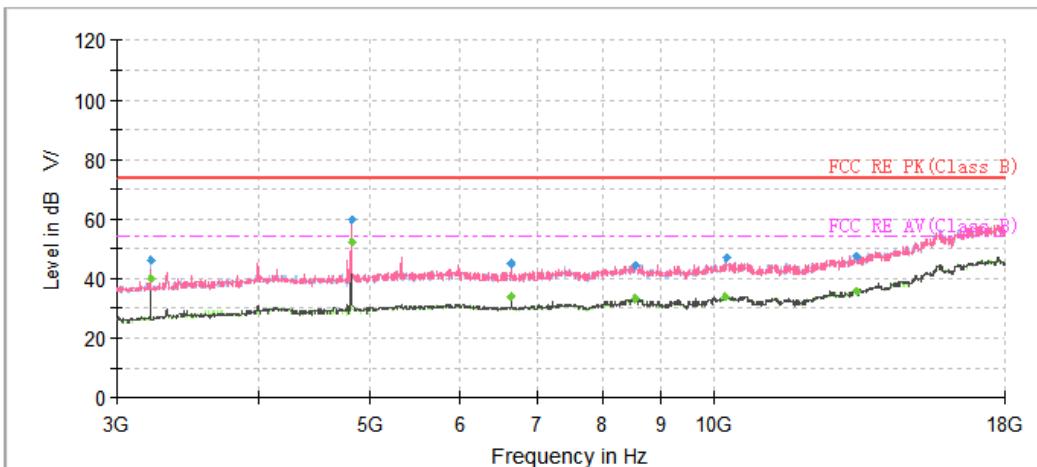


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	Peak (dBuV/m)	Average (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
1104.75	44.77	---	74.00	29.23	100.0	H	19.00	-8
1116.75	---	31.67	54.00	22.33	200.0	V	302.00	-8
1350.00	45.70	---	74.00	28.30	200.0	H	299.00	-7
1367.75	---	34.15	54.00	19.85	200.0	H	308.00	-7
1521.75	---	33.74	54.00	20.26	200.0	V	340.00	-5
1667.75	45.29	---	74.00	28.71	200.0	V	182.00	-5
1999.00	---	36.26	54.00	17.74	100.0	V	208.00	-3
1999.25	47.14	---	74.00	26.86	100.0	V	208.00	-3
2126.00	---	35.46	54.00	18.54	100.0	V	174.00	-2
2126.25	50.64	---	74.00	23.36	100.0	V	184.00	-2
2661.50	---	41.48	54.00	12.52	100.0	V	208.00	0
2661.75	56.46	---	74.00	17.54	100.0	V	208.00	0
4822.50	---	52.57	54.00	1.43	100.0	V	253.00	-2


**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

802.11b CH6

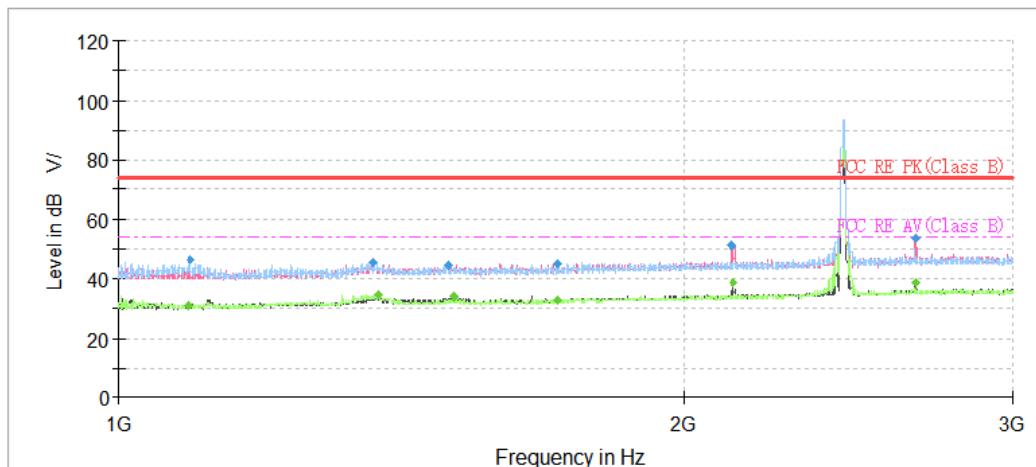

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

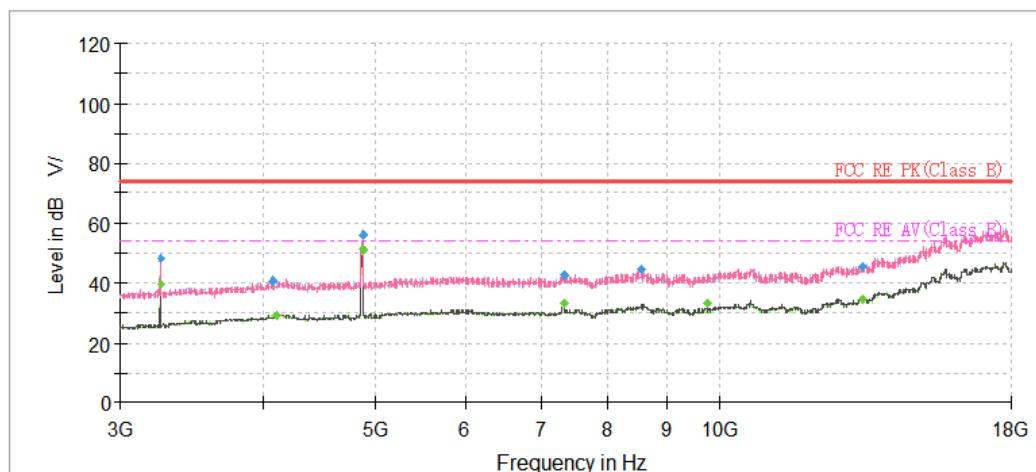


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1089.00	---	30.87	54.00	23.13	200.0	V	263.00	-8
1091.50	46.23	---	74.00	27.77	100.0	H	292.00	-8
1365.75	45.42	---	74.00	28.58	200.0	H	291.00	-7
1375.75	---	34.20	54.00	19.80	200.0	H	287.00	-6
1499.75	44.28	---	74.00	29.72	100.0	V	69.00	-6
1507.00	---	33.64	54.00	20.36	200.0	V	331.00	-6
1714.25	---	32.45	54.00	21.55	200.0	V	336.00	-5
1715.50	44.81	---	74.00	29.19	200.0	H	21.00	-5
2124.75	50.90	---	74.00	23.10	100.0	V	207.00	-2
2128.75	---	38.71	54.00	15.29	100.0	V	183.00	-2
2663.50	53.78	---	74.00	20.22	100.0	V	294.00	0
2664.25	---	38.82	54.00	15.18	100.0	V	294.00	0
4873.13	---	50.98	54.00	3.02	100.0	V	354.00	-2

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

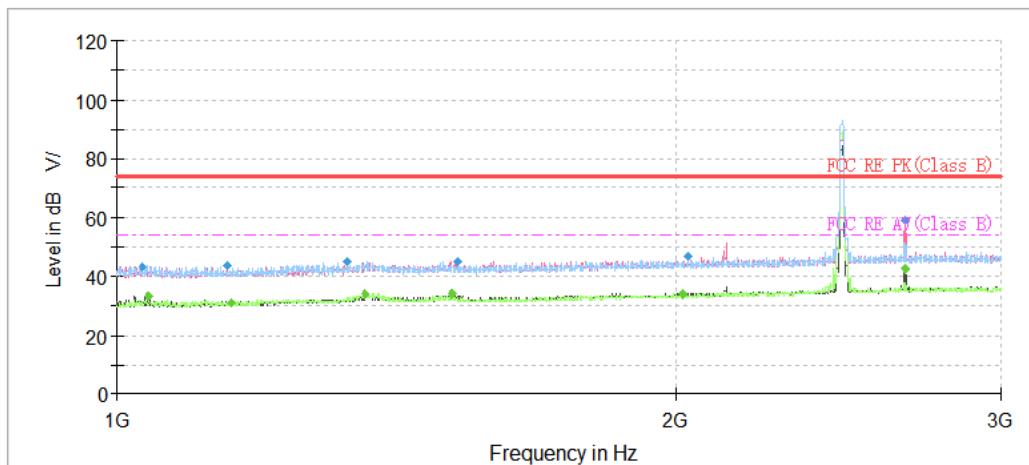

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

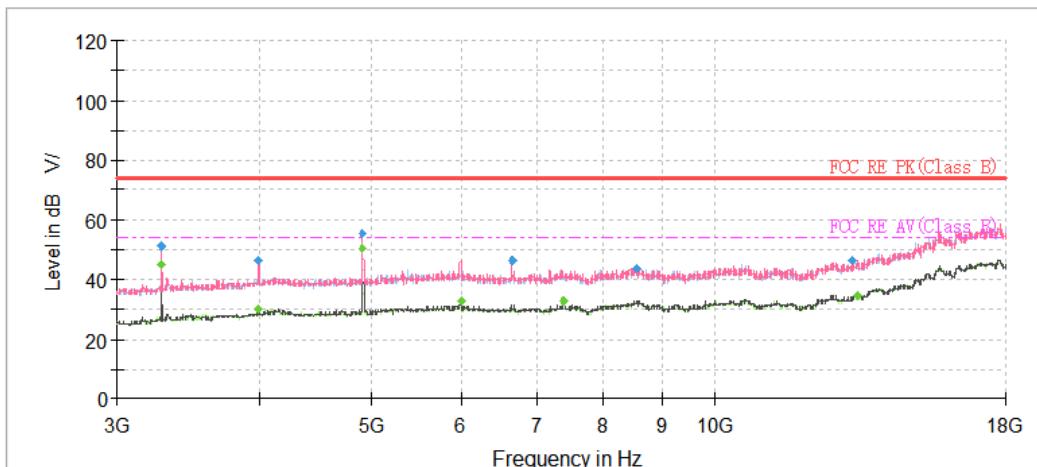


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1032.50	43.32	---	74.00	30.68	200.0	H	39.00	-9
1038.25	---	33.32	54.00	20.68	200.0	V	6.00	-9
1146.00	43.46	---	74.00	30.54	200.0	V	51.00	-8
1153.00	---	30.97	54.00	23.03	200.0	H	298.00	-8
1330.75	45.16	---	74.00	28.84	100.0	V	297.00	-7
1361.75	---	34.02	54.00	19.98	200.0	H	303.00	-7
1516.75	---	33.61	54.00	20.39	200.0	V	339.00	-5
1524.25	44.78	---	74.00	29.22	200.0	H	124.00	-5
2018.50	---	33.95	54.00	20.05	200.0	V	276.00	-3
2032.75	46.78	---	74.00	27.22	100.0	V	341.00	-3
2661.50	---	42.52	54.00	11.48	100.0	V	268.00	0
2665.75	58.95	---	74.00	15.05	100.0	V	268.00	0
4923.75	---	50.20	54.00	3.80	500.00	100.0	V	358.00

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

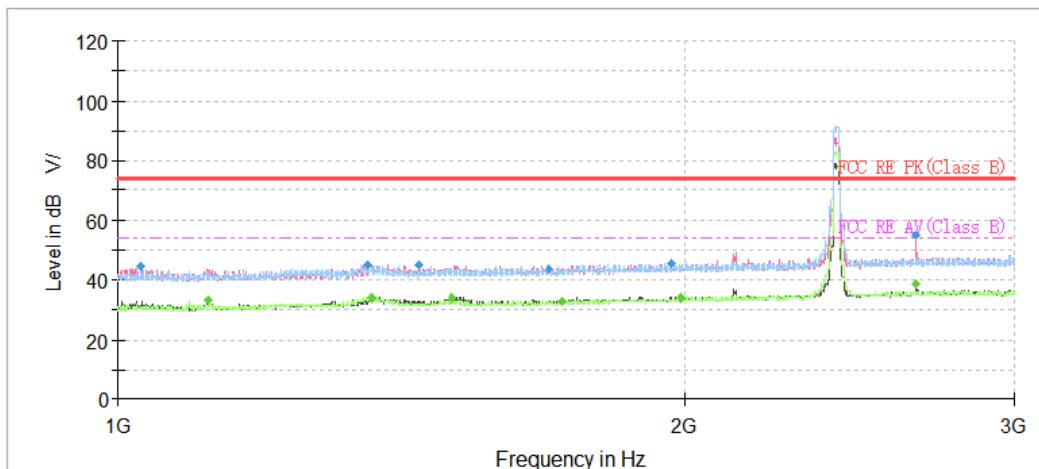

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

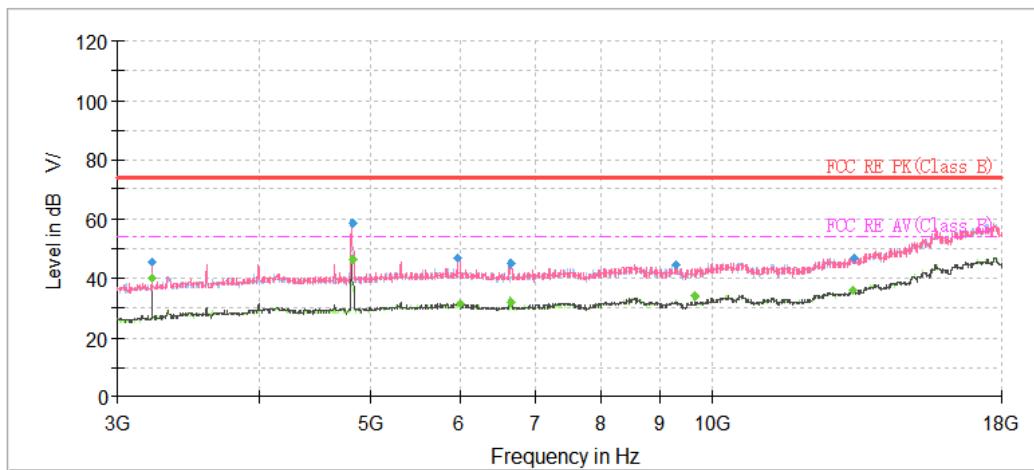


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1027.50	44.02	---	74.00	29.98	200.0	V	358.00	-9
1116.00	---	33.16	54.00	20.84	200.0	V	300.00	-8
1358.50	44.73	---	74.00	29.27	100.0	V	61.00	-7
1363.25	---	33.94	54.00	20.06	200.0	H	295.00	-7
1446.75	44.65	---	74.00	29.35	200.0	V	252.00	-6
1505.75	---	34.01	54.00	19.99	200.0	V	324.00	-6
1697.00	43.72	---	74.00	30.28	100.0	V	157.00	-5
1722.25	---	32.39	54.00	21.61	100.0	V	229.00	-4
1970.25	45.82	---	74.00	28.18	100.0	V	172.00	-3
1994.75	---	34.03	54.00	19.97	200.0	H	314.00	-3
2658.25	---	39.04	54.00	14.96	100.0	V	296.00	0
2658.25	54.79	---	74.00	19.21	100.0	V	296.00	0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11g CH6

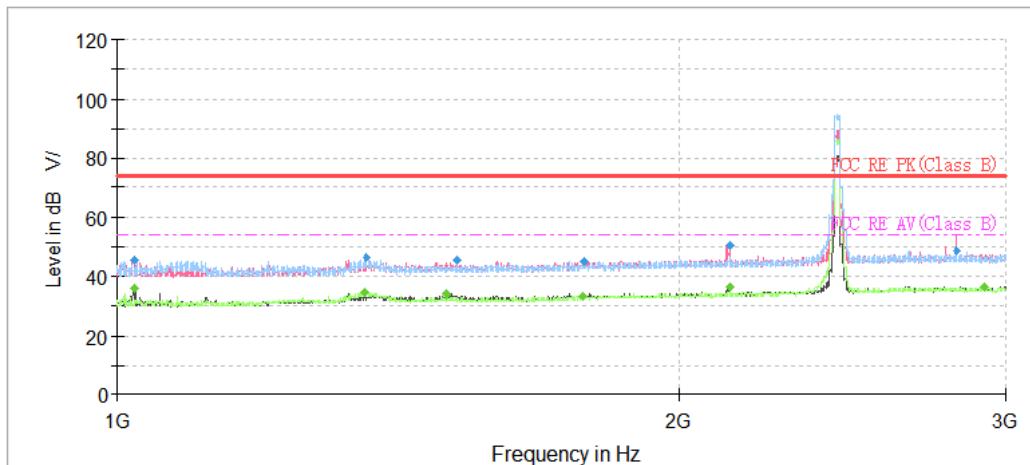

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

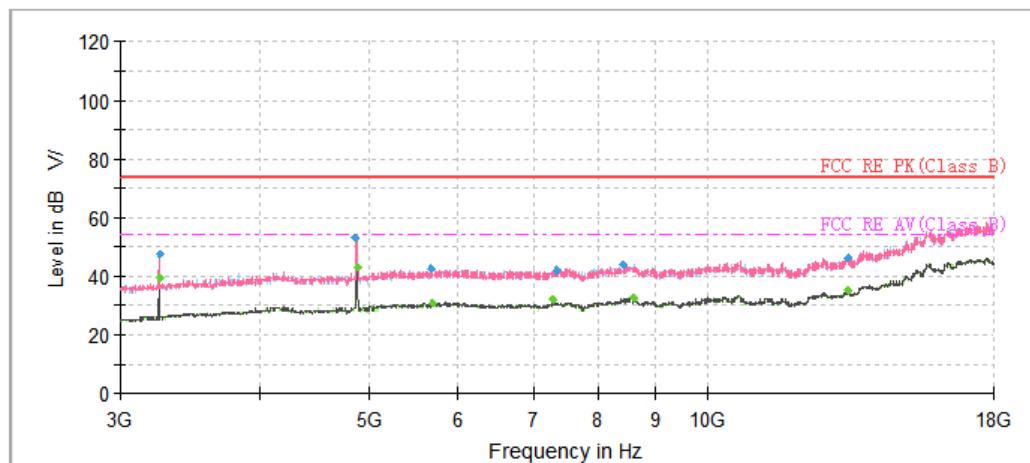


Radiates Emission from 3GHz to 18GHz




Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1019.50	---	35.49	54.00	18.51	200.0	V	344.00	-9
1019.50	45.45	---	74.00	28.55	200.0	V	344.00	-9
1358.75	---	34.20	54.00	19.80	200.0	H	256.00	-7
1360.50	46.22	---	74.00	27.78	200.0	H	288.00	-7
1501.25	---	33.70	54.00	20.30	200.0	V	325.00	-6
1522.25	45.34	---	74.00	28.66	200.0	V	320.00	-5
1777.50	---	33.51	54.00	20.49	200.0	V	239.00	-4
1782.25	45.23	---	74.00	28.77	200.0	V	99.00	-4
2130.00	---	36.22	54.00	17.78	200.0	V	179.00	-2
2131.00	50.26	---	74.00	23.74	200.0	V	184.00	-2
2824.75	48.85	---	74.00	25.15	100.0	V	299.00	1
2921.75	---	36.32	54.00	17.68	200.0	H	89.00	1

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

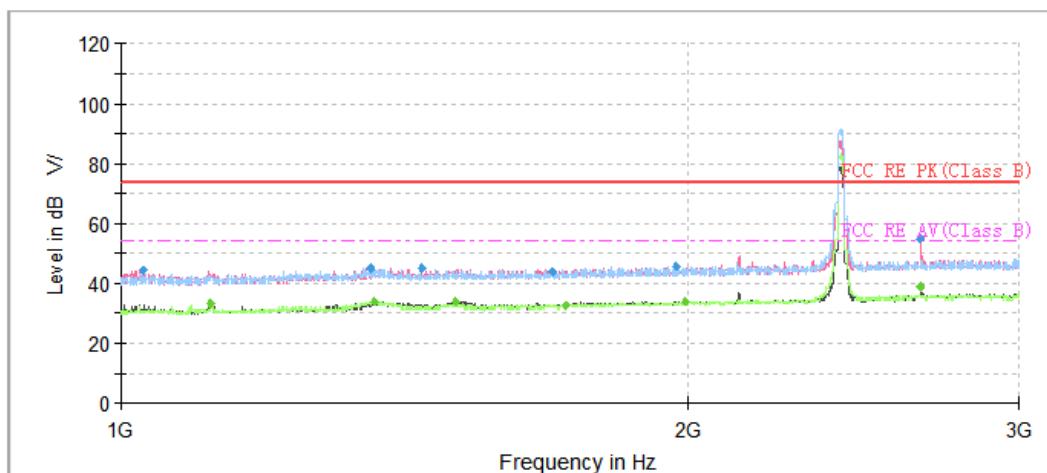

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

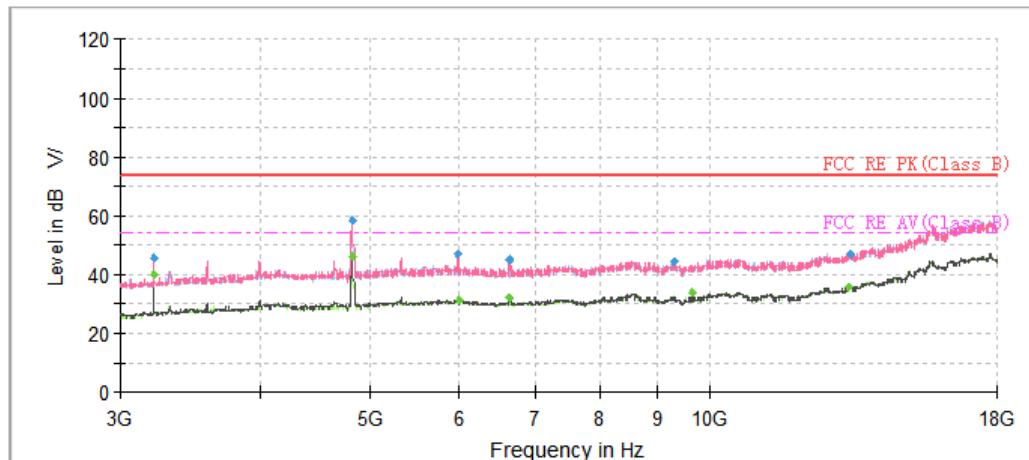


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1010.25	---	34.28	54.00	19.72	200.0	V	1.00	-9
1041.25	44.38	---	74.00	29.62	200.0	V	358.00	-9
1351.50	---	33.97	54.00	20.03	200.0	H	263.00	-7
1361.25	45.83	---	74.00	28.17	100.0	V	66.00	-7
1499.50	44.76	---	74.00	29.24	200.0	H	72.00	-6
1508.75	---	33.72	54.00	20.28	200.0	V	325.00	-6
1808.75	---	33.13	54.00	20.87	200.0	V	234.00	-4
1814.00	44.07	---	74.00	29.93	100.0	H	5.00	-4
2129.50	50.75	---	74.00	23.25	100.0	V	190.00	-2
2129.50	---	37.21	54.00	16.79	100.0	V	190.00	-2
2655.25	53.19	---	74.00	20.81	100.0	V	0.00	0
2664.75	---	38.34	54.00	15.66	100.0	V	0.00	0


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 802.11n (HT20) CH1

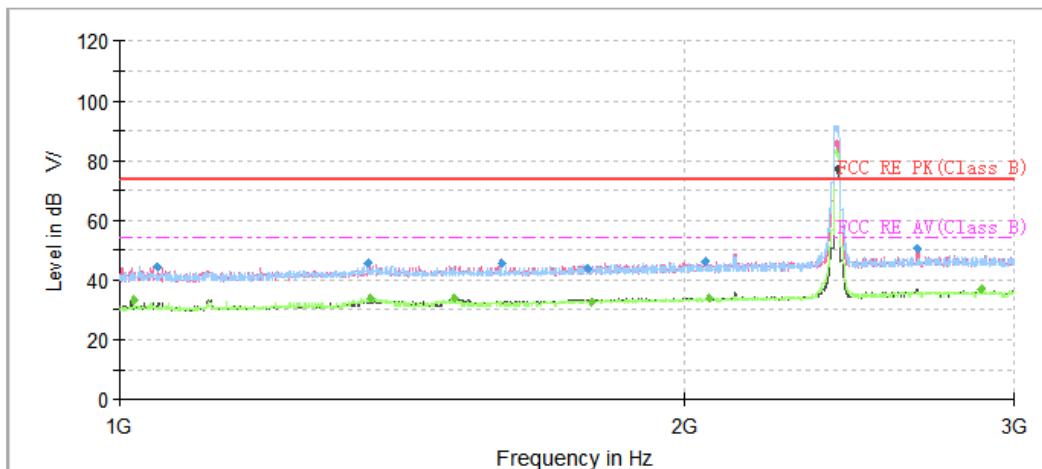

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

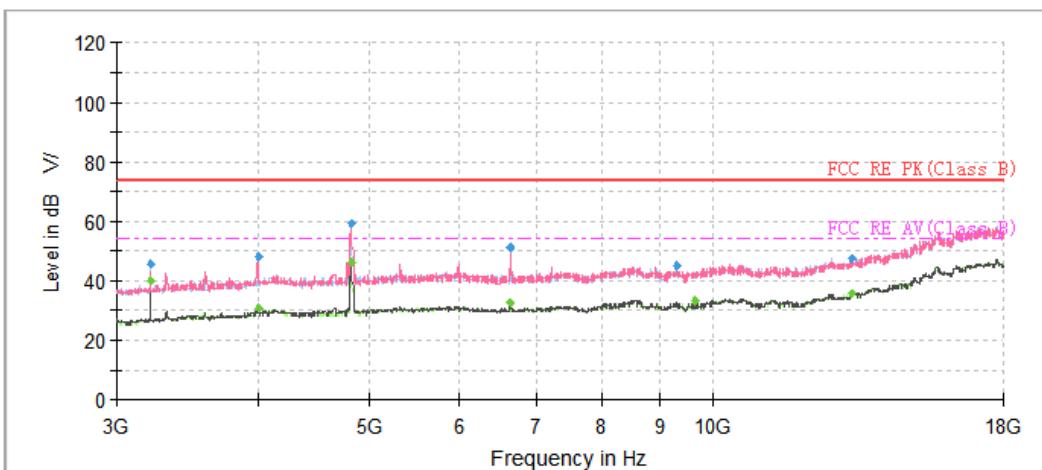


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1017.50	---	33.16	54.00	20.84	200.0	H	40.00	-9
1047.75	44.51	---	74.00	29.49	200.0	V	14.00	-9
1357.00	45.24	---	74.00	28.76	200.0	H	307.00	-7
1359.50	---	34.03	54.00	19.97	200.0	H	302.00	-7
1507.25	---	33.63	54.00	20.37	200.0	V	29.00	-6
1598.50	45.69	---	74.00	28.31	200.0	H	268.00	-5
1777.50	43.64	---	74.00	30.36	200.0	V	121.00	-4
1784.00	---	32.74	54.00	21.26	100.0	V	257.00	-4
2050.75	46.05	---	74.00	27.95	200.0	V	184.00	-3
2061.50	---	33.95	54.00	20.05	200.0	V	296.00	-3
2663.50	50.23	---	74.00	23.77	200.0	V	165.00	0
2878.75	---	37.00	54.00	17.00	100.0	V	340.00	1


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

802.11n (HT20) CH6

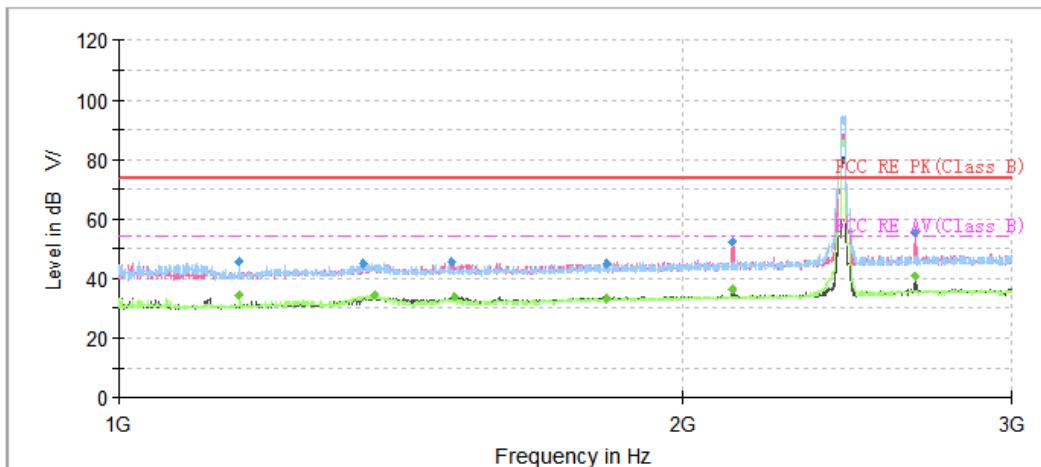

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

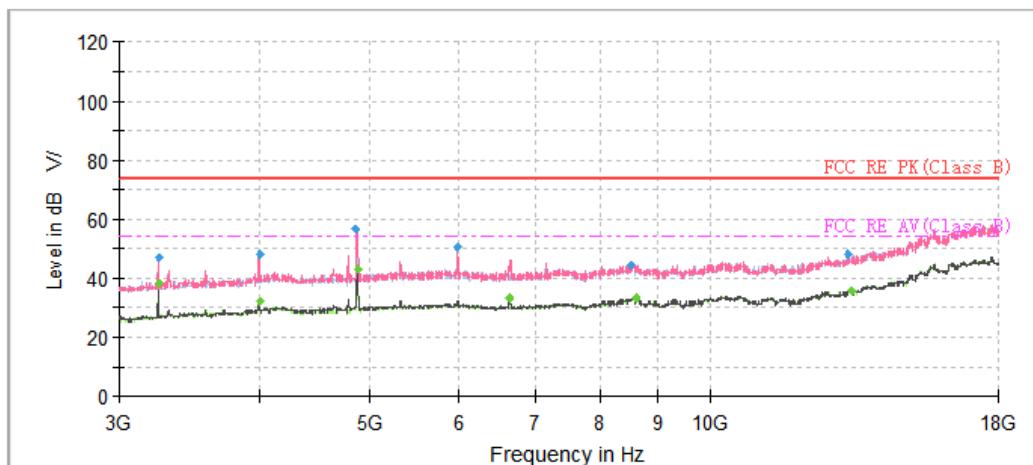


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1159.25	---	34.43	54.00	19.57	200.0	H	17.00	-8
1159.25	45.27	---	74.00	28.73	200.0	H	17.00	-8
1350.50	44.93	---	74.00	29.07	200.0	H	298.00	-7
1368.25	---	34.37	54.00	19.63	100.0	V	59.00	-7
1506.75	45.28	---	74.00	28.72	200.0	V	319.00	-6
1511.75	---	33.88	54.00	20.12	200.0	V	324.00	-6
1820.50	44.78	---	74.00	29.22	100.0	H	114.00	-4
1821.00	---	33.18	54.00	20.82	100.0	V	0.00	-4
2125.00	52.38	---	74.00	21.62	200.0	V	184.00	-2
2126.00	---	36.53	54.00	17.47	200.0	V	188.00	-2
2664.25	---	40.87	54.00	13.13	100.0	V	196.00	0
2664.50	55.68	---	74.00	18.32	100.0	V	196.00	0


**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

802.11n (HT20) CH11

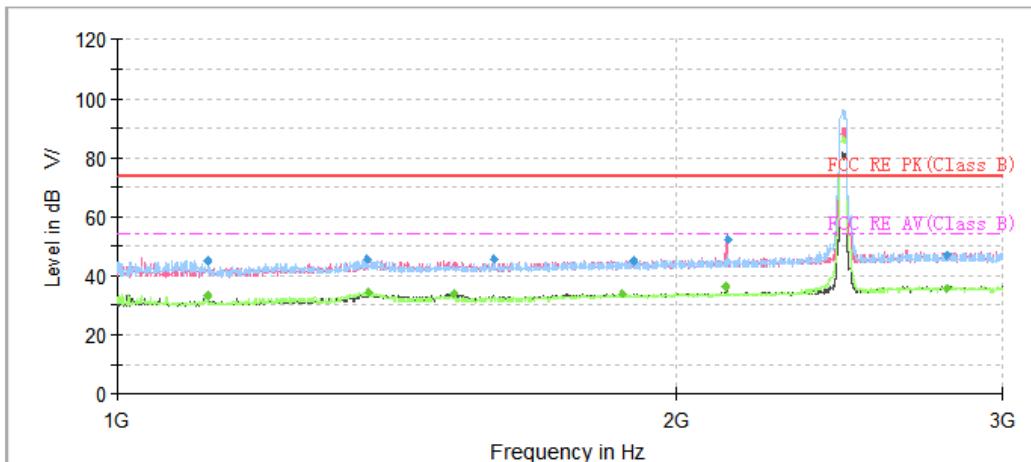

Note: The signal beyond the limit is carrier.

Radiates Emission from 1GHz to 3GHz

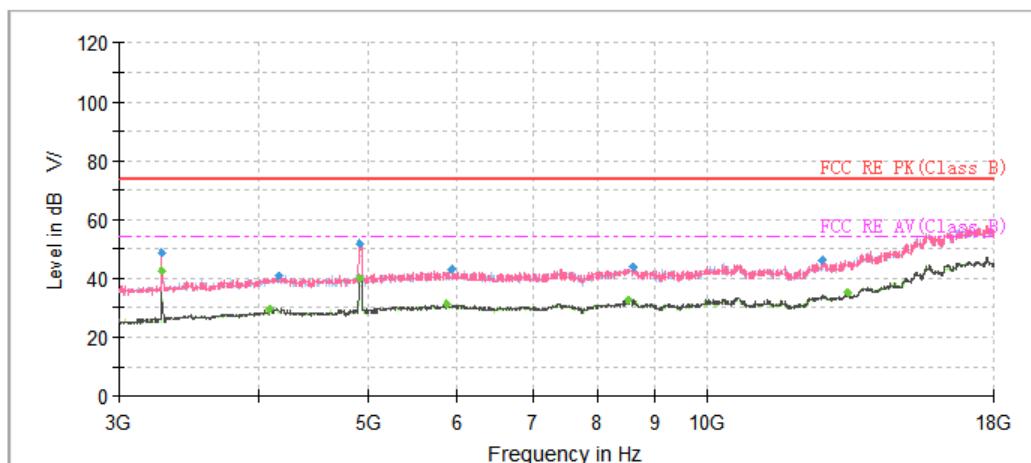


Radiates Emission from 3GHz to 18GHz



Frequency (MHz)	MaxPeak (dB $\mu$ V/m)	Average (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1118.50	---	33.34	54.00	20.66	200.0	V	11.00	-8
1119.25	44.95	---	74.00	29.05	100.0	H	31.00	-8
1362.00	45.26	---	74.00	28.74	200.0	H	286.00	-7
1368.00	---	34.48	54.00	19.52	100.0	V	59.00	-7
1518.00	---	34.02	54.00	19.98	200.0	V	318.00	-5
1597.25	45.60	---	74.00	28.40	200.0	V	323.00	-5
1872.25	---	33.70	54.00	20.30	200.0	V	241.00	-4
1896.75	45.17	---	74.00	28.83	200.0	V	44.00	-4
2127.25	---	36.21	54.00	17.79	100.0	V	169.00	-2
2131.50	52.46	---	74.00	21.54	200.0	V	194.00	-2
2799.25	---	35.88	54.00	18.12	100.0	V	211.00	1
2800.50	47.08	---	74.00	26.92	200.0	H	187.00	1

**Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)**

During the test, the Radiates Emission from 18GHz to 26.5GHz was performed in all modes with all channels, 802.11b CH6 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

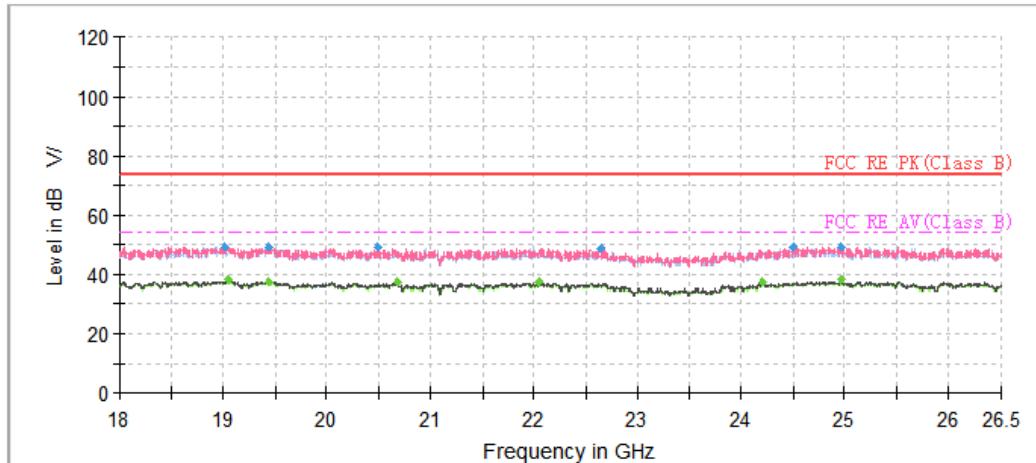

Radiates Emission from 18GHz to 26.5GHz

## 5.7. Conducted Emission

### Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa


### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz.

The measurement result should include both L line and N line.

The test is in transmitting mode.

### Test Setup

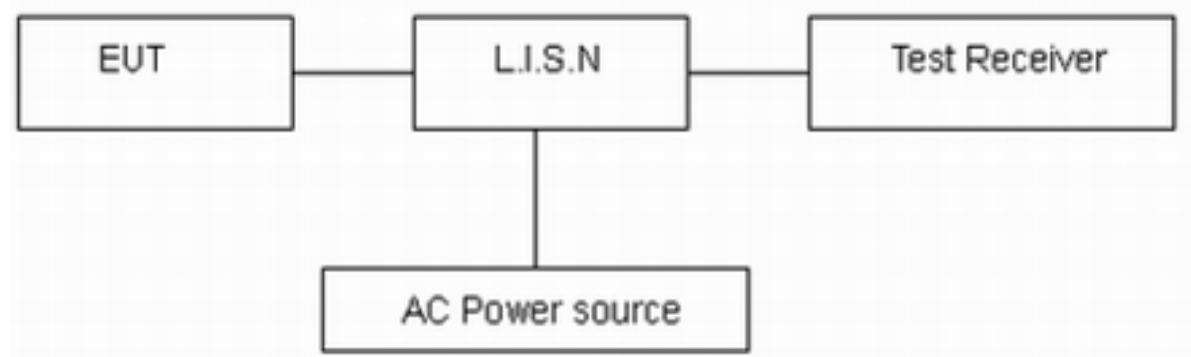

Note: AC Power source is used to change the voltage 110V/60Hz.

### Limits

Frequency (MHz)	Conducted Limits(dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.5 - 5	56	46
5 - 30	60	50


<sup>\*</sup>: Decreases with the logarithm of the frequency.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 2.69$  dB.

**Test Results:**


Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes (WIFI 2.4G) with all channels, 802.11b CH1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

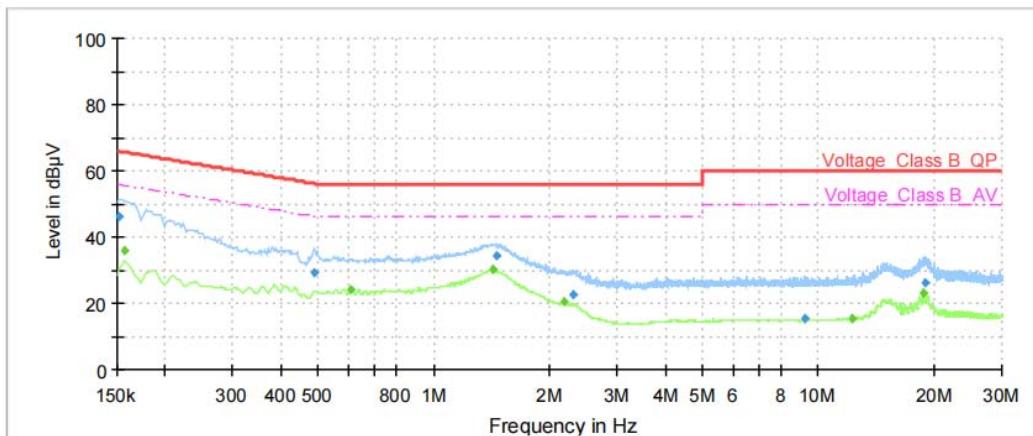

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.15	46.28	---	65.88	19.60	1000.00	9.000	L1	ON	21
0.16	---	35.84	55.63	19.79	1000.00	9.000	L1	ON	21
0.49	29.25	---	56.17	26.92	1000.00	9.000	L1	ON	20
0.61	---	24.32	46.00	21.68	1000.00	9.000	L1	ON	20
1.42	---	30.03	46.00	15.97	1000.00	9.000	L1	ON	20
1.45	34.15	---	56.00	21.85	1000.00	9.000	L1	ON	20
2.17	---	20.36	46.00	25.64	1000.00	9.000	L1	ON	20
2.30	22.53	---	56.00	33.47	1000.00	9.000	L1	ON	19
9.19	15.51	---	60.00	44.49	1000.00	9.000	L1	ON	20
12.31	---	15.19	50.00	34.81	1000.00	9.000	L1	ON	20
18.85	---	22.91	50.00	27.09	1000.00	9.000	L1	ON	20
18.87	26.32	---	60.00	33.68	1000.00	9.000	L1	ON	20

**Remark: Correct factor=cable loss + LISN factor**

L line Conducted Emission from 150 KHz to 30 MHz

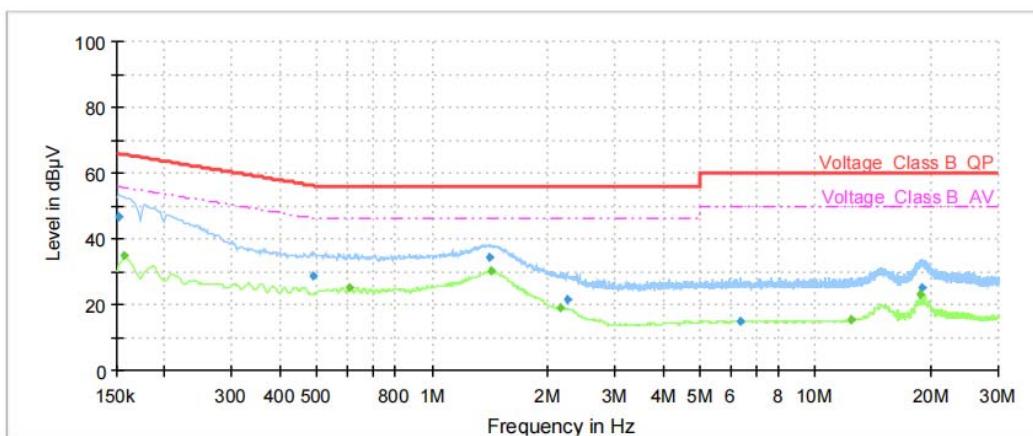

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Average (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.15	46.73	---	65.88	19.15	1000.00	9.000	N	ON	21
0.16	---	34.87	55.63	20.76	1000.00	9.000	N	ON	21
0.49	28.78	---	56.17	27.39	1000.00	9.000	N	ON	20
0.61	---	25.30	46.00	20.70	1000.00	9.000	N	ON	20
1.41	34.39	---	56.00	21.61	1000.00	9.000	N	ON	20
1.42	---	30.23	46.00	15.77	1000.00	9.000	N	ON	20
2.15	---	19.22	46.00	26.78	1000.00	9.000	N	ON	20
2.26	21.36	---	56.00	34.64	1000.00	9.000	N	ON	20
6.39	15.09	---	60.00	44.91	1000.00	9.000	N	ON	20
12.40	---	15.13	50.00	34.87	1000.00	9.000	N	ON	20
18.85	---	23.17	50.00	26.83	1000.00	9.000	N	ON	20
19.01	25.14	---	60.00	34.86	1000.00	9.000	N	ON	20

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 KHz to 30 MHz



## 6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Spectrum Analyzer	R&S	FSV30	100816	2021-12-12	2022-12-11
EMI Test Receiver	R&S	ESR	102389	2021-06-04	2022-06-03
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2020-04-02	2023-04-01
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1023	2020-05-05	2023-05-04
Horn Antenna	Schwarzbeck	BBHA 9120D	430	2021-07-26	2024-07-25
Horn Antenna	STEATITE	QSH-SL-26-40-K-15	16779	2019-12-24	2022-12-23
LISN	R&S	ENV216	101171	2020-12-13	2022-12-12
Software	R&S	EMC32	10.35.10	/	/
Power Sensor	R&S	NRP18S	101954	2021-05-15	2022-05-14
Spectrum Analyzer	KEYSIGHT	N9020A	MY54420163	2021-12-12	2022-12-11

\*\*\*\*\*END OF REPORT\*\*\*\*\*



## ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



## ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.