



TEST REPORT

Product Name: Bluetooth headset
FCC ID: 2BL65-I31
Trademark: N/A
Model Number: i31
Prepared For: Shenzhen Dashenghe Intelligent Technology Co., Ltd
Address: 351, 3rd Floor, Building 102, Shangbu Industrial Zone, No. 3011 Huaqiang North Road, Huahang Community, Huaqiangbei Street, Futian District, Shenzhen
Manufacturer: Shenzhen Dashenghe Intelligent Technology Co., Ltd
Address: 351, 3rd Floor, Building 102, Shangbu Industrial Zone, No. 3011 Huaqiang North Road, Huahang Community, Huaqiangbei Street, Futian District, Shenzhen
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Oct. 28, 2024
Sample tested Date: Oct. 28, 2024 to Nov. 01, 2024
Issue Date: Nov. 01, 2024
Report No.: CTB24102804401RF01
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	12
6.1 Block Diagram Of Test Setup	12
6.2 Limit	12
6.3 Test procedure	12
6.4 Test Result	14
7. RADIATED SPURIOUS EMISSION	16
7.1 Block Diagram Of Test Setup	16
7.2 Limit	16
7.3 Test procedure	17
7.4 Test Result	18
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	27
8.1 Block Diagram Of Test Setup	27
8.2 Limit	27
8.3 Test procedure	27
8.4 Test Result	28
9. CONDUCTED PEAK OUTPUT POWER	35
9.1 Block Diagram Of Test Setup	35
9.2 Limit	35
9.3 Test procedure	35
9.4 Test Result	35
10. 20DB OCCUPIED BANDWIDTH	39
10.1 Block Diagram Of Test Setup	39
10.2 Limit	39
10.3 Test procedure	39
10.4 Test Result	39
11. CARRIER FREQUENCIES SEPARATION	43
11.1 Block Diagram Of Test Setup	43
11.2 Limit	43
11.3 Test procedure	43
11.4 Test Result	43
12. HOPPING CHANNEL NUMBER	47
12.1 Block Diagram Of Test Setup	47
12.2 Limit	47
12.3 Test procedure	47
12.4 Test Result	47

13. DWELL TIME	49
13.1 Block Diagram Of Test Setup	49
13.2 Limit	49
13.3 Test procedure	49
13.4 Test Result	49
14. PSEUDORANDOM FREQUENCY	53
14.1 Limit	53
14.2 Test procedure	53
14.3 Test Result	53
15. ANTENNA REQUIREMENT	54
16. EUT TEST SETUP PHOTOGRAPHS	72

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB24102804401RF01	Nov. 01, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s): i31
 Model Description: N/A
 Bluetooth Version: Bluetooth V5.3
 Hardware Version: V1.0
 Software Version: V1.0

Operation Frequency: Bluetooth: 2402-2480MHz
 Max. RF output power: Bluetooth: 3.016dBm
 Type of Modulation: Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
 Antenna installation: Bluetooth: Chip antenna
 Antenna Gain: Bluetooth: 1.95dBi
 Ratings: DC 5V charging from adapter
 DC 3.3~4.2V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	AE

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)						
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.3V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/6/28
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/6/28
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/6/28
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/6/28
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/6/28
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/6/28
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2025/6/28
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2025/6/30
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2025/6/30
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2025/6/30
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2025/6/28
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/6/28
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2027/6/21
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2025/6/28
18	Amplifier	HP	8447E	2945A02747	/	2025/6/28
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/28
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/28

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/28
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/28
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/28
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/28

Continuous disturbance

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/6/30
3	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2025/6/28
4	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/6/30
5	Coaxial cable	ZDECL	Z302S	18091904	/	2025/6/30
6	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/30
7	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2024/11/16
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/
9	Current Probe	FCC	F-52B	199453	/	2025/5/27
10	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
11	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

Radiated emission(No.2 Chamber)


No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2026/11/14
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/7/07
3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2025/7/06
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/30
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/23
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2024/11/27
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/6/28
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/
9	Coaxial cable	Rosenberg	8m	/	/	2024/11/27
10	Coaxial cable	Times	2m	/	/	2024/11/27



11	Coaxial cable	Times	2m	/	/	2024/11/27
12	Coaxial cable	Times	1m	/	/	2024/11/27
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/29
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/6/28
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/6/28

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

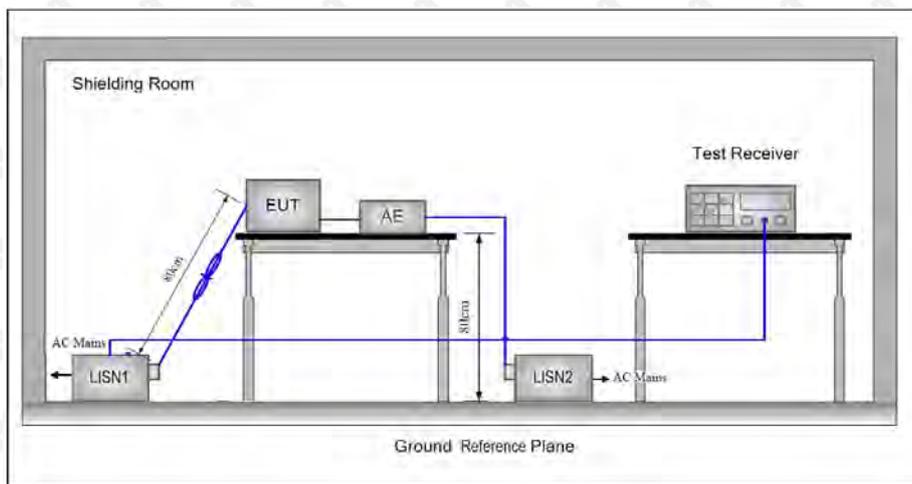

6.2 Limit

Table 4 – AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

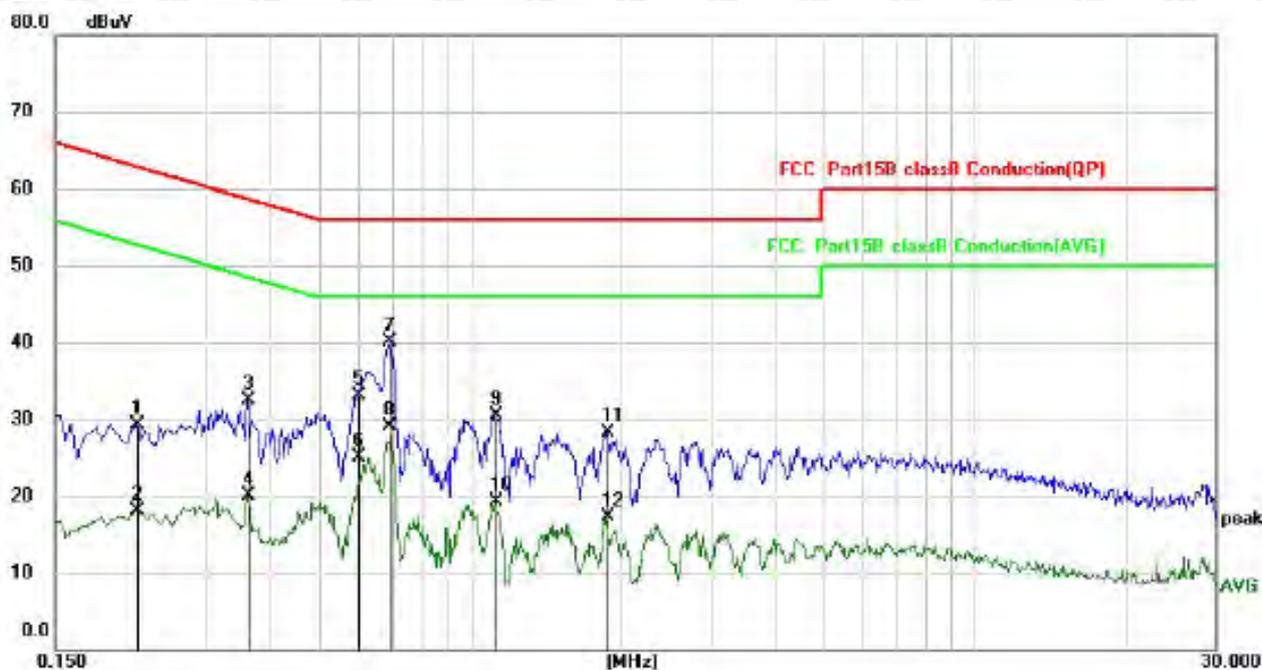


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2180	18.67	10.70	29.37	62.89	-33.52	QP
2		0.2180	7.34	10.70	18.04	52.89	-34.85	AVG
3		0.3620	21.91	10.60	32.51	58.68	-26.17	QP
4		0.3620	9.58	10.60	20.18	48.68	-28.50	AVG
5		0.5980	22.44	10.61	33.05	56.00	-22.95	QP
6		0.5980	14.40	10.61	25.01	46.00	-20.99	AVG
7	*	0.6900	29.32	10.71	40.03	56.00	-15.97	QP
8		0.6900	18.44	10.71	29.15	46.00	-16.85	AVG
9		1.1220	19.42	11.03	30.45	56.00	-25.55	QP
10		1.1220	8.25	11.03	19.28	46.00	-26.72	AVG
11		1.8660	16.71	11.50	28.21	56.00	-27.79	QP
12		1.8660	5.86	11.50	17.36	46.00	-28.64	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

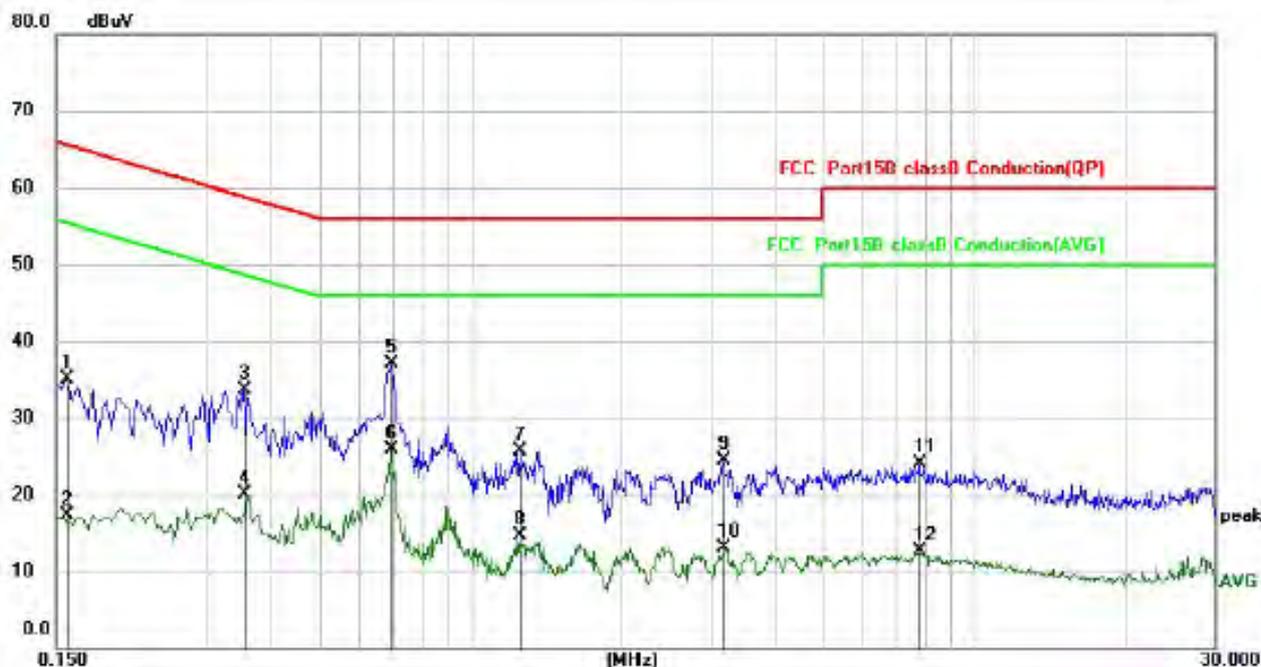

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1580	24.28	10.86	35.14	65.57	-30.43	QP
2		0.1580	6.49	10.86	17.35	55.57	-38.22	AVG
3		0.3540	23.14	10.60	33.74	58.87	-25.13	QP
4		0.3540	9.52	10.60	20.12	48.87	-28.75	AVG
5	*	0.6940	26.41	10.71	37.12	56.00	-18.88	QP
6		0.6940	15.17	10.71	25.88	46.00	-20.12	AVG
7		1.2500	14.59	11.11	25.70	56.00	-30.30	QP
8		1.2500	3.63	11.11	14.74	46.00	-31.26	AVG
9		3.1860	12.62	11.84	24.46	56.00	-31.54	QP
10		3.1860	1.20	11.84	13.04	46.00	-32.96	AVG
11		7.7980	11.02	13.02	24.04	60.00	-35.96	QP
12		7.7980	-0.30	13.02	12.72	50.00	-37.28	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

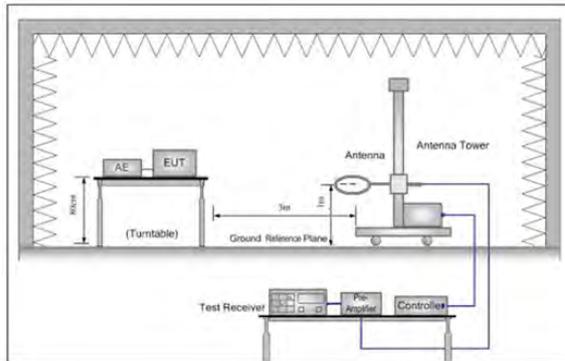


Figure 1. Below 30MHz

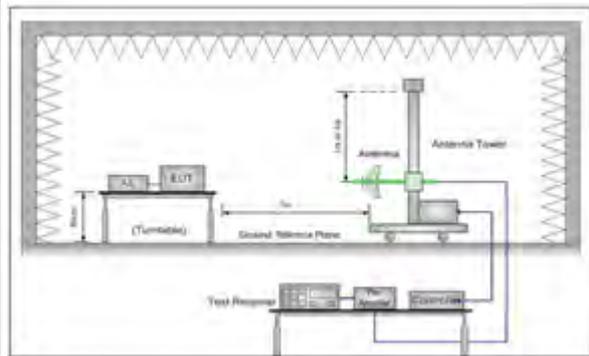


Figure 2. 30MHz to 1GHz

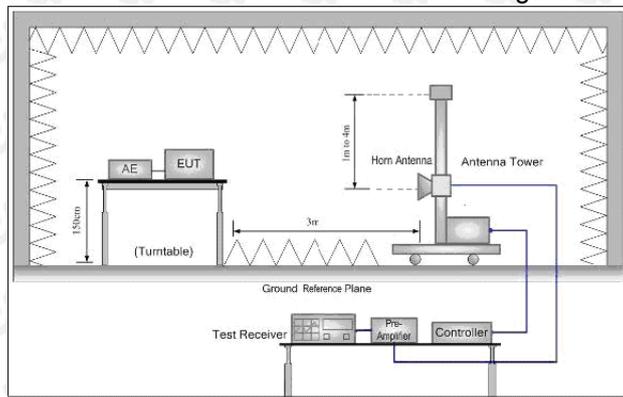


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:
 Antenna polarity: H
 Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	40.9880	29.44	-12.80	16.64	40.00	-23.36	QP
2	80.0805	36.69	-18.39	18.30	40.00	-21.70	QP
3	200.6880	39.55	-17.04	22.51	43.50	-20.99	QP
4	282.9851	38.74	-14.67	24.07	46.00	-21.93	QP
5 *	392.0950	39.92	-12.53	27.39	46.00	-18.61	QP
6	925.7562	26.21	-0.39	25.82	46.00	-20.18	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	30.2111	44.21	-12.94	31.27	40.00	-8.73	QP
2	40.1347	38.02	-12.62	25.40	40.00	-14.60	QP
3	80.3617	44.04	-18.40	25.64	40.00	-14.36	QP
4	169.5990	37.66	-14.32	23.34	43.50	-20.16	QP
5	390.7225	35.83	-12.55	23.28	46.00	-22.72	QP
6	903.3093	25.89	-0.33	25.56	46.00	-20.44	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Above 1 GHz Test Results:

CH Low (2402MHz)
Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	56.73	-3.65	53.08	74.00	-20.92	peak
4804	50.46	-3.65	46.81	54.00	-7.19	AVG
7206	60.83	-0.95	59.88	74.00	-14.12	peak
7206	41.56	-0.95	40.61	54.00	-13.39	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4804	57.39	-3.65	53.74	74.00	-20.26	peak
4804	49.54	-3.65	45.89	54.00	-8.11	AVG
7206	60.96	-0.95	60.01	74.00	-13.99	peak
7206	42.74	-0.95	41.79	54.00	-12.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	60.28	-3.54	56.74	74.00	-17.26	peak
4882.00	47.39	-3.54	43.85	54.00	-10.15	AVG
7323.00	57.81	-0.81	57.00	74.00	-17.00	peak
7323.00	43.20	-0.81	42.39	54.00	-11.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4882.00	59.12	-3.54	55.58	74.00	-18.42	peak
4882.00	49.64	-3.54	46.10	54.00	-7.90	AVG
7323.00	58.11	-0.81	57.30	74.00	-16.70	peak
7323.00	43.84	-0.81	43.03	54.00	-10.97	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH High (2480MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	58.76	-3.43	55.33	74.00	-18.67	peak
4960	48.55	-3.44	45.11	54.00	-8.89	AVG
7440	60.05	-0.77	59.28	74.00	-14.72	peak
7440	41.08	-0.77	40.31	54.00	-13.69	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
4960	58.58	-3.43	55.15	74.00	-18.85	peak
4960	47.62	-3.44	44.18	54.00	-9.82	AVG
7440	59.79	-0.77	59.02	74.00	-14.98	peak
7440	40.87	-0.77	40.10	54.00	-13.90	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	57.84	-5.81	52.03	74.00	-21.97	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.69	-5.84	48.85	74.00	-25.15	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.07	-5.81	50.26	74.00	-23.74	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.02	-5.84	49.18	74.00	-24.82	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	54.92	-5.81	49.11	74.00	-24.89	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.63	-6.06	47.57	74.00	-26.43	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	56.44	-5.81	50.63	74.00	-23.37	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.39	-6.06	49.33	74.00	-24.67	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	54.04	-5.81	48.23	74.00	-25.77	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	53.76	-5.84	47.92	74.00	-26.08	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2310.00	56.15	-5.81	50.34	74.00	-23.66	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	54.13	-5.84	48.29	74.00	-25.71	peak
2390.00	/	-5.84	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	57.77	-5.81	51.96	74.00	-22.04	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.92	-6.06	49.86	74.00	-24.14	peak
2500.00	/	-6.06	/	54.00	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2483.50	55.64	-5.81	49.83	74.00	-24.17	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.26	-6.06	49.20	74.00	-24.80	peak
2500.00	/	-6.06	/	54.00	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

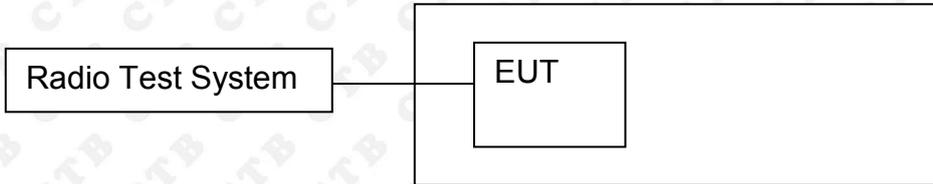


8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 - Below 30MHz:
 - RBW = 100kHz, VBW = 300kHz, Sweep = auto
 - Detector function = peak, Trace = max hold
 - Above 30MHz:
 - RBW = 100KHz, VBW = 300KHz, Sweep = auto
 - Detector function = peak, Trace = max hold

8.4 Test Result

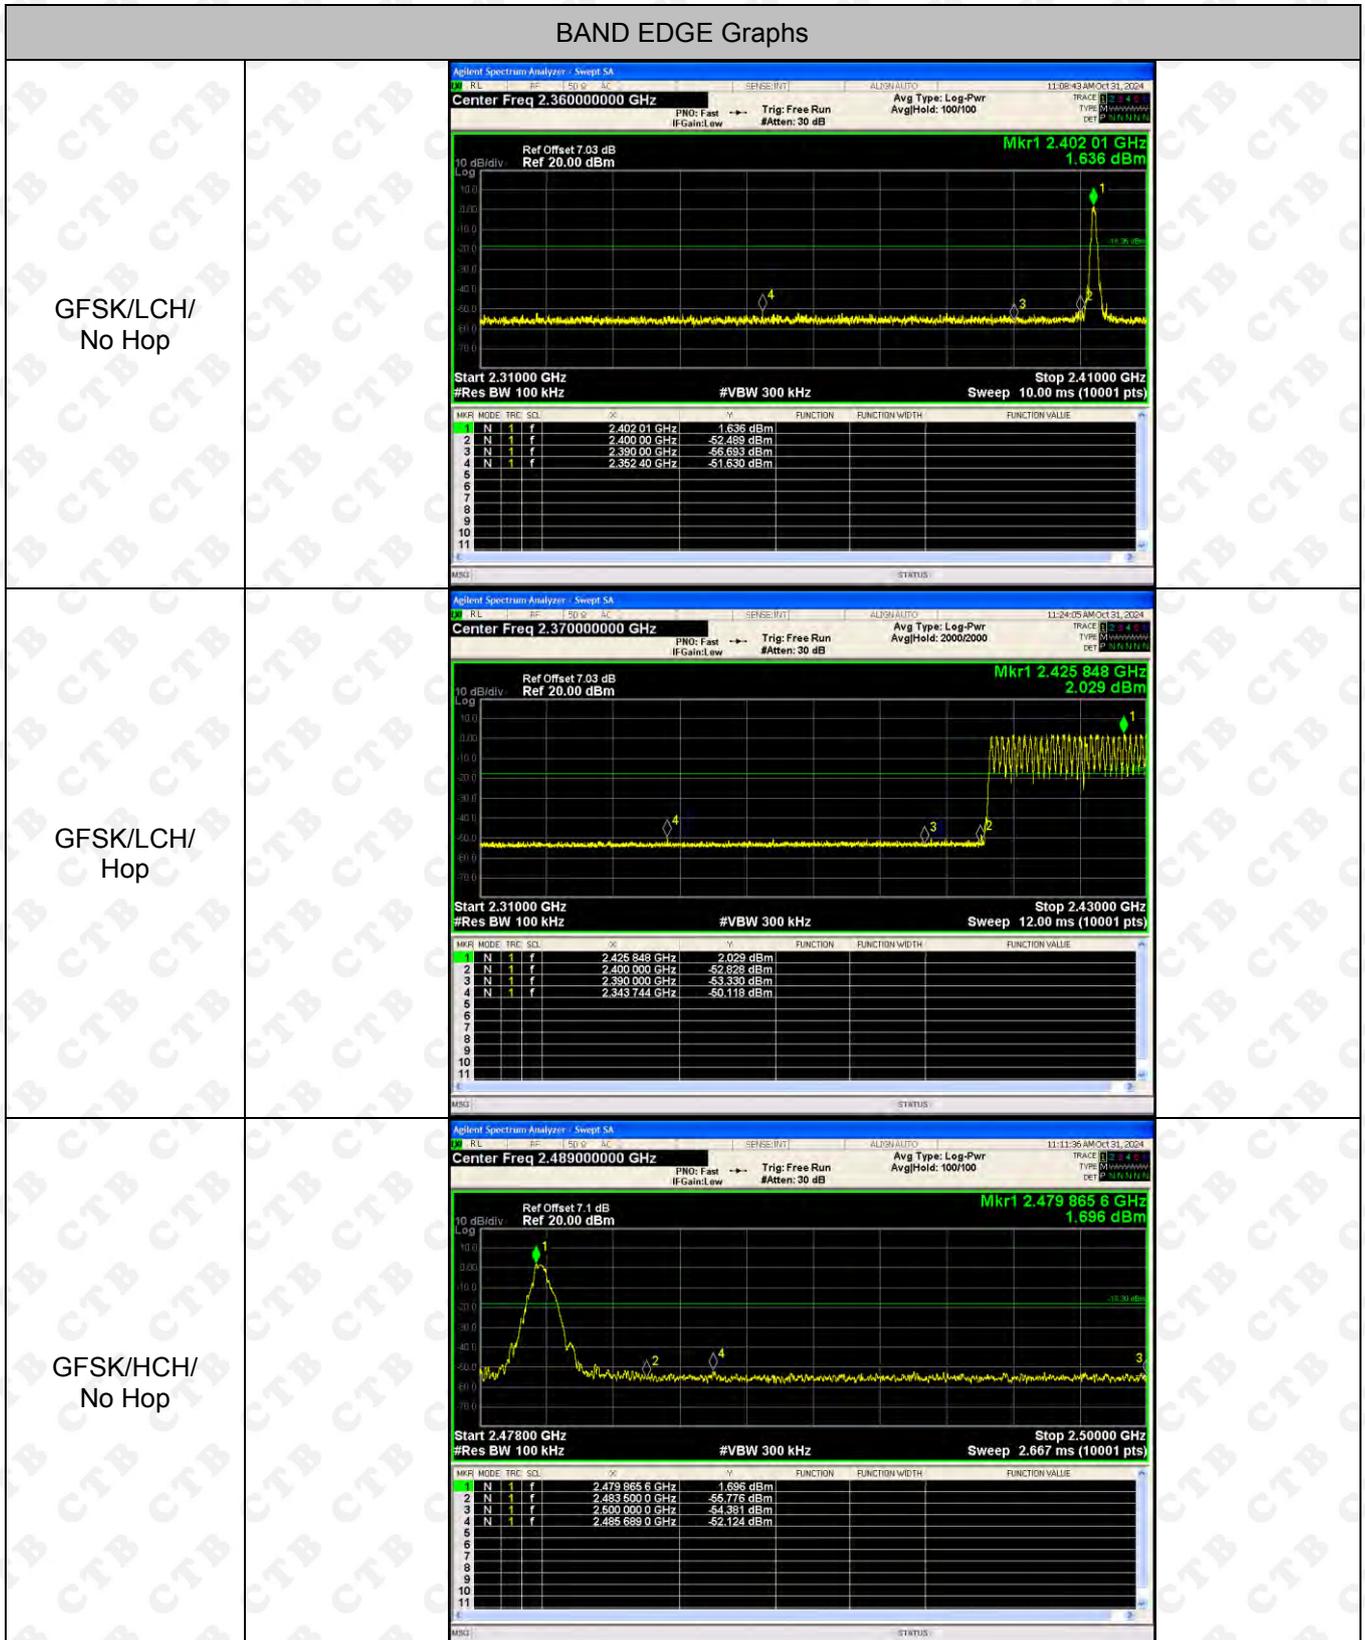


<p>GFSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.468750000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.44184375 GHz 1.970 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.44184375 GHz</td><td>1.970 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.48350000 GHz</td><td>-53.244 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.49000000 GHz</td><td>-53.839 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.48832500 GHz</td><td>-49.321 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.44184375 GHz	1.970 dBm				2	N	1	f	2.48350000 GHz	-53.244 dBm				3	N	1	f	2.49000000 GHz	-53.839 dBm				4	N	1	f	2.48832500 GHz	-49.321 dBm			
MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.44184375 GHz	1.970 dBm																																									
2	N	1	f	2.48350000 GHz	-53.244 dBm																																									
3	N	1	f	2.49000000 GHz	-53.839 dBm																																									
4	N	1	f	2.48832500 GHz	-49.321 dBm																																									
<p>$\pi/4$DQPSK/LCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.360000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.40201 GHz 1.527 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.40201 GHz</td><td>1.527 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.40000 GHz</td><td>-51.483 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.39900 GHz</td><td>-55.437 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.39950 GHz</td><td>-52.324 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.40201 GHz	1.527 dBm				2	N	1	f	2.40000 GHz	-51.483 dBm				3	N	1	f	2.39900 GHz	-55.437 dBm				4	N	1	f	2.39950 GHz	-52.324 dBm			
MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.40201 GHz	1.527 dBm																																									
2	N	1	f	2.40000 GHz	-51.483 dBm																																									
3	N	1	f	2.39900 GHz	-55.437 dBm																																									
4	N	1	f	2.39950 GHz	-52.324 dBm																																									
<p>$\pi/4$DQPSK/LCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.370000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.412156 GHz 1.709 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.412156 GHz</td><td>1.709 dBm</td><td></td><td></td><td></td></tr> <tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.40000 GHz</td><td>-53.103 dBm</td><td></td><td></td><td></td></tr> <tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.39900 GHz</td><td>-52.727 dBm</td><td></td><td></td><td></td></tr> <tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.393200 GHz</td><td>-50.052 dBm</td><td></td><td></td><td></td></tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.412156 GHz	1.709 dBm				2	N	1	f	2.40000 GHz	-53.103 dBm				3	N	1	f	2.39900 GHz	-52.727 dBm				4	N	1	f	2.393200 GHz	-50.052 dBm			
MKR	MODE	TRC	SOL	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.412156 GHz	1.709 dBm																																									
2	N	1	f	2.40000 GHz	-53.103 dBm																																									
3	N	1	f	2.39900 GHz	-52.727 dBm																																									
4	N	1	f	2.393200 GHz	-50.052 dBm																																									

<p>$\pi/4$DQPSK/HCH/ No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48900000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.479 843 6 GHz 0.251 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.479 843 6 GHz</td> <td>0.251 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-54.096 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 0 GHz</td> <td>-54.474 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.488 938 4 GHz</td> <td>-51.713 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 843 6 GHz	0.251 dBm				2	N	1	f	2.483 500 0 GHz	-54.096 dBm				3	N	1	f	2.500 000 0 GHz	-54.474 dBm				4	N	1	f	2.488 938 4 GHz	-51.713 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.479 843 6 GHz	0.251 dBm																																									
2	N	1	f	2.483 500 0 GHz	-54.096 dBm																																									
3	N	1	f	2.500 000 0 GHz	-54.474 dBm																																									
4	N	1	f	2.488 938 4 GHz	-51.713 dBm																																									
<p>$\pi/4$DQPSK/HCH/ Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46875000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.439 993 75 GHz 1.942 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.439 993 75 GHz</td> <td>1.942 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.463 500 00 GHz</td> <td>-52.777 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 000 00 GHz</td> <td>-51.611 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.493 993 75 GHz</td> <td>-49.952 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.439 993 75 GHz	1.942 dBm				2	N	1	f	2.463 500 00 GHz	-52.777 dBm				3	N	1	f	2.500 000 00 GHz	-51.611 dBm				4	N	1	f	2.493 993 75 GHz	-49.952 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.439 993 75 GHz	1.942 dBm																																									
2	N	1	f	2.463 500 00 GHz	-52.777 dBm																																									
3	N	1	f	2.500 000 00 GHz	-51.611 dBm																																									
4	N	1	f	2.493 993 75 GHz	-49.952 dBm																																									
<p>8DPSK/LCH/No Hop</p>	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.36000000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.402 02 GHz 1.471 dBm</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 02 GHz</td> <td>1.471 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 00 GHz</td> <td>-53.876 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 00 GHz</td> <td>-55.421 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.360 68 GHz</td> <td>-49.897 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.402 02 GHz	1.471 dBm				2	N	1	f	2.400 00 GHz	-53.876 dBm				3	N	1	f	2.390 00 GHz	-55.421 dBm				4	N	1	f	2.360 68 GHz	-49.897 dBm			
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.402 02 GHz	1.471 dBm																																									
2	N	1	f	2.400 00 GHz	-53.876 dBm																																									
3	N	1	f	2.390 00 GHz	-55.421 dBm																																									
4	N	1	f	2.360 68 GHz	-49.897 dBm																																									


<p>8DPSK /LCH/Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.429 868 GHz</td> <td>1.871 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-53.384 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-52.468 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.379 048 GHz</td> <td>-50.480 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.429 868 GHz	1.871 dBm				2	N	1	f	2.400 000 GHz	-53.384 dBm				3	N	1	f	2.390 000 GHz	-52.468 dBm				4	N	1	f	2.379 048 GHz	-50.480 dBm				
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.429 868 GHz	1.871 dBm																																										
2	N	1	f	2.400 000 GHz	-53.384 dBm																																										
3	N	1	f	2.390 000 GHz	-52.468 dBm																																										
4	N	1	f	2.379 048 GHz	-50.480 dBm																																										
<p>8DPSK /HCH/No Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 171 4 GHz</td> <td>-1.994 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-55.954 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 000 0 GHz</td> <td>-55.703 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.488 000 2 GHz</td> <td>-52.657 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 171 4 GHz	-1.994 dBm				2	N	1	f	2.483 500 0 GHz	-55.954 dBm				3	N	1	f	2.490 000 0 GHz	-55.703 dBm				4	N	1	f	2.488 000 2 GHz	-52.657 dBm				
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.480 171 4 GHz	-1.994 dBm																																										
2	N	1	f	2.483 500 0 GHz	-55.954 dBm																																										
3	N	1	f	2.490 000 0 GHz	-55.703 dBm																																										
4	N	1	f	2.488 000 2 GHz	-52.657 dBm																																										
<p>8DPSK /HCH/Hop</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>V</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.463 875 00 GHz</td> <td>1.785 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 500 0 GHz</td> <td>-53.041 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.603 000 00 GHz</td> <td>-dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.481 000 25 GHz</td> <td>-50.687 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.463 875 00 GHz	1.785 dBm				2	N	1	f	2.483 500 0 GHz	-53.041 dBm				3	N	1	f	2.603 000 00 GHz	-dBm				4	N	1	f	2.481 000 25 GHz	-50.687 dBm				
MKR	MODE	TRC	SOL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																							
1	N	1	f	2.463 875 00 GHz	1.785 dBm																																										
2	N	1	f	2.483 500 0 GHz	-53.041 dBm																																										
3	N	1	f	2.603 000 00 GHz	-dBm																																										
4	N	1	f	2.481 000 25 GHz	-50.687 dBm																																										

RF Conducted Spurious Emissions Graphs


GFSK/LCH



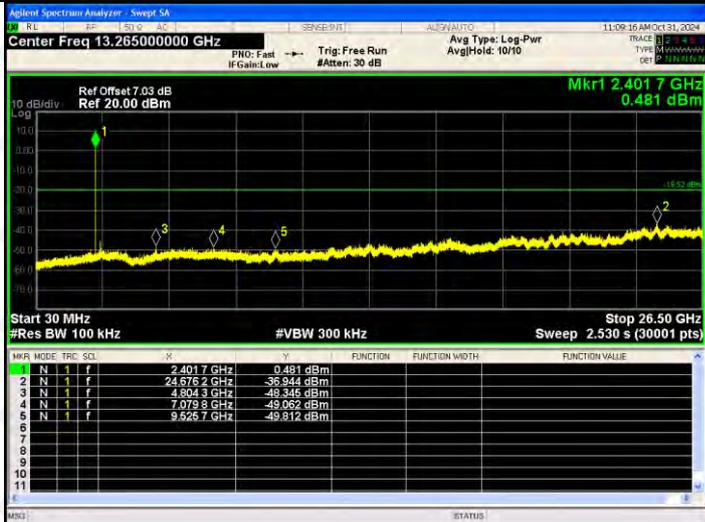





GFSK/MCH

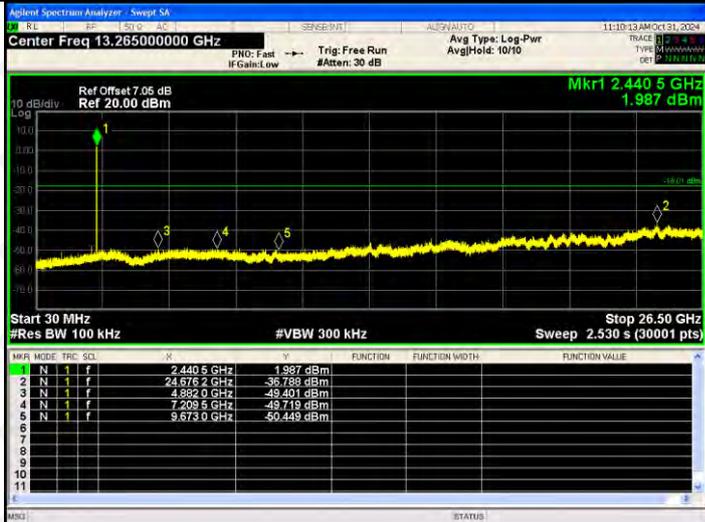

GFSK/HCH

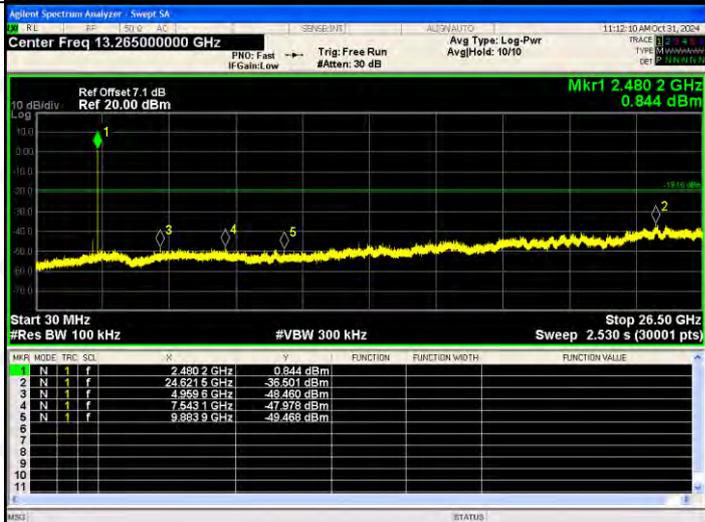

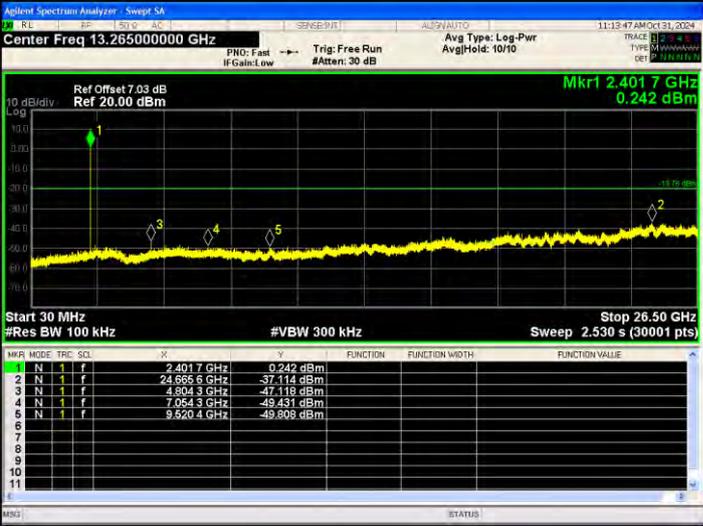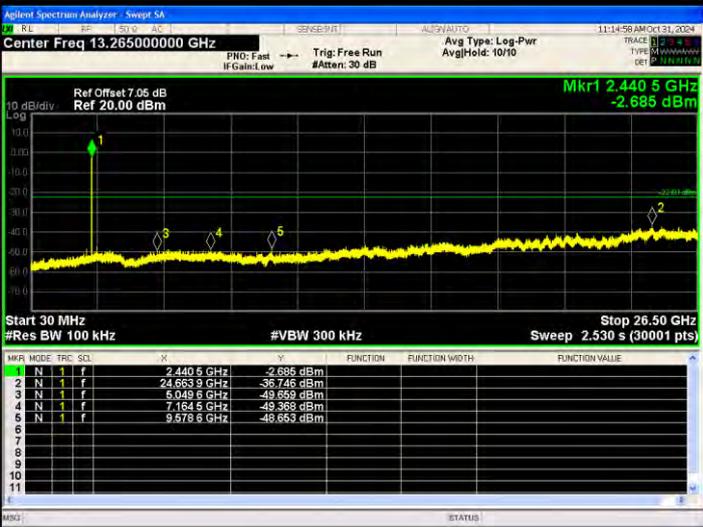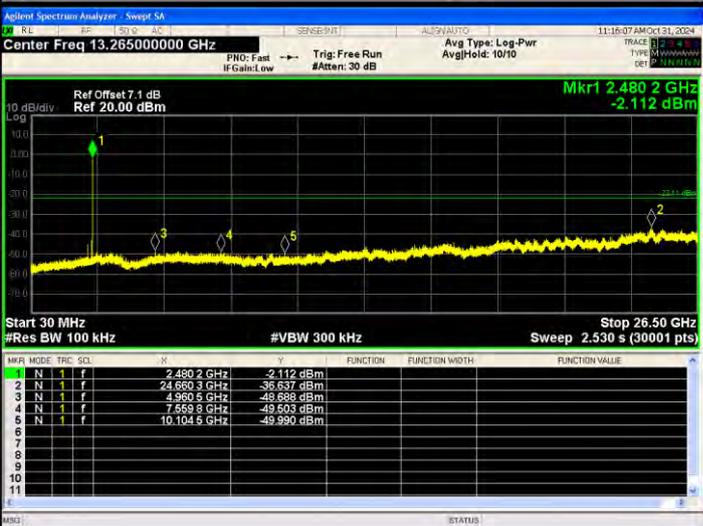
<p>$\pi/4$DQPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.401 7 GHz</td> <td>0.242 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.665 6 GHz</td> <td>-37.114 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.504 3 GHz</td> <td>-47.119 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.054 3 GHz</td> <td>-49.431 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.620 4 GHz</td> <td>-49.808 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 7 GHz	0.242 dBm				2	N	1	f	24.665 6 GHz	-37.114 dBm				3	N	1	f	4.504 3 GHz	-47.119 dBm				4	N	1	f	7.054 3 GHz	-49.431 dBm				5	N	1	f	9.620 4 GHz	-49.808 dBm			
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.401 7 GHz	0.242 dBm																																																		
2	N	1	f	24.665 6 GHz	-37.114 dBm																																																		
3	N	1	f	4.504 3 GHz	-47.119 dBm																																																		
4	N	1	f	7.054 3 GHz	-49.431 dBm																																																		
5	N	1	f	9.620 4 GHz	-49.808 dBm																																																		
<p>$\pi/4$DQPSK/MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 5 GHz</td> <td>-2.685 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.663 9 GHz</td> <td>-36.746 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.048 6 GHz</td> <td>-49.659 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.164 5 GHz</td> <td>-49.388 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.678 6 GHz</td> <td>-48.653 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 5 GHz	-2.685 dBm				2	N	1	f	24.663 9 GHz	-36.746 dBm				3	N	1	f	5.048 6 GHz	-49.659 dBm				4	N	1	f	7.164 5 GHz	-49.388 dBm				5	N	1	f	9.678 6 GHz	-48.653 dBm			
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.440 5 GHz	-2.685 dBm																																																		
2	N	1	f	24.663 9 GHz	-36.746 dBm																																																		
3	N	1	f	5.048 6 GHz	-49.659 dBm																																																		
4	N	1	f	7.164 5 GHz	-49.388 dBm																																																		
5	N	1	f	9.678 6 GHz	-48.653 dBm																																																		
<p>$\pi/4$DQPSK/HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.480 2 GHz</td> <td>-2.112 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.660 3 GHz</td> <td>-36.637 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.960 5 GHz</td> <td>-48.638 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.653 9 GHz</td> <td>-49.603 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>10.104 5 GHz</td> <td>-49.990 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 2 GHz	-2.112 dBm				2	N	1	f	24.660 3 GHz	-36.637 dBm				3	N	1	f	4.960 5 GHz	-48.638 dBm				4	N	1	f	7.653 9 GHz	-49.603 dBm				5	N	1	f	10.104 5 GHz	-49.990 dBm			
MNR	MODE	TRC	SCN	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.480 2 GHz	-2.112 dBm																																																		
2	N	1	f	24.660 3 GHz	-36.637 dBm																																																		
3	N	1	f	4.960 5 GHz	-48.638 dBm																																																		
4	N	1	f	7.653 9 GHz	-49.603 dBm																																																		
5	N	1	f	10.104 5 GHz	-49.990 dBm																																																		
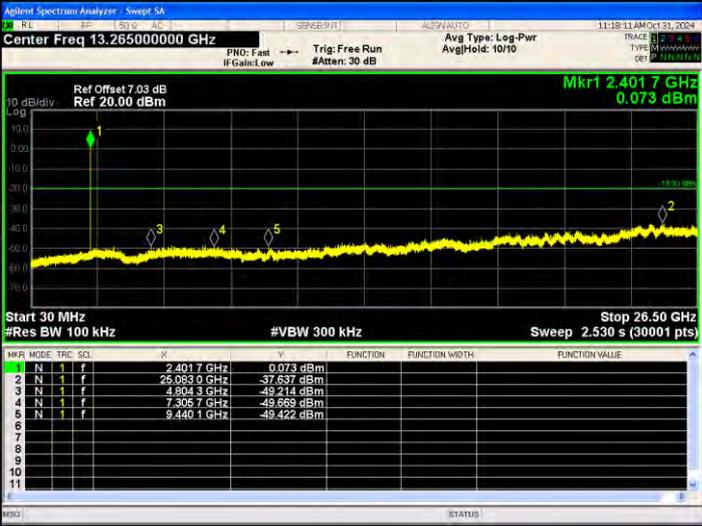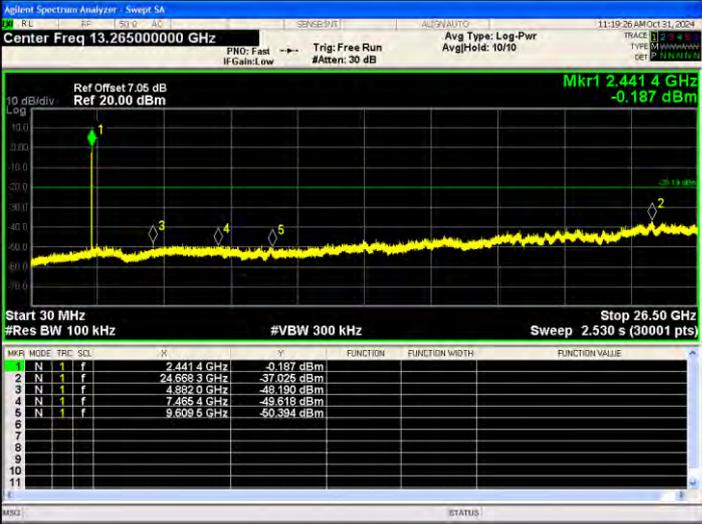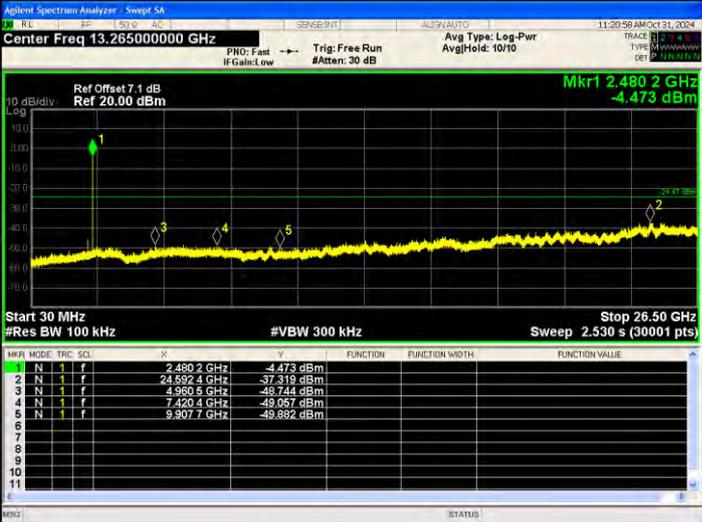
<p>8DPSK /LCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4017 GHz</td> <td>0.073 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.083 GHz</td> <td>-37.637 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8043 GHz</td> <td>-49.214 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.3057 GHz</td> <td>-49.669 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.4401 GHz</td> <td>-49.422 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4017 GHz	0.073 dBm				2	N	1	f	26.083 GHz	-37.637 dBm				3	N	1	f	4.8043 GHz	-49.214 dBm				4	N	1	f	7.3057 GHz	-49.669 dBm				5	N	1	f	9.4401 GHz	-49.422 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4017 GHz	0.073 dBm																																																		
2	N	1	f	26.083 GHz	-37.637 dBm																																																		
3	N	1	f	4.8043 GHz	-49.214 dBm																																																		
4	N	1	f	7.3057 GHz	-49.669 dBm																																																		
5	N	1	f	9.4401 GHz	-49.422 dBm																																																		
<p>8DPSK /MCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4414 GHz</td> <td>-0.187 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.668 GHz</td> <td>-37.026 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.809 GHz</td> <td>-49.199 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4654 GHz</td> <td>-49.618 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.6095 GHz</td> <td>-50.394 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4414 GHz	-0.187 dBm				2	N	1	f	24.668 GHz	-37.026 dBm				3	N	1	f	4.809 GHz	-49.199 dBm				4	N	1	f	7.4654 GHz	-49.618 dBm				5	N	1	f	9.6095 GHz	-50.394 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4414 GHz	-0.187 dBm																																																		
2	N	1	f	24.668 GHz	-37.026 dBm																																																		
3	N	1	f	4.809 GHz	-49.199 dBm																																																		
4	N	1	f	7.4654 GHz	-49.618 dBm																																																		
5	N	1	f	9.6095 GHz	-50.394 dBm																																																		
<p>8DPSK /HCH</p>	 <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4802 GHz</td> <td>-4.473 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.6924 GHz</td> <td>-37.319 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.8605 GHz</td> <td>-48.744 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.4204 GHz</td> <td>-49.057 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.9077 GHz</td> <td>-49.882 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4802 GHz	-4.473 dBm				2	N	1	f	24.6924 GHz	-37.319 dBm				3	N	1	f	4.8605 GHz	-48.744 dBm				4	N	1	f	7.4204 GHz	-49.057 dBm				5	N	1	f	9.9077 GHz	-49.882 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																															
1	N	1	f	2.4802 GHz	-4.473 dBm																																																		
2	N	1	f	24.6924 GHz	-37.319 dBm																																																		
3	N	1	f	4.8605 GHz	-48.744 dBm																																																		
4	N	1	f	7.4204 GHz	-49.057 dBm																																																		
5	N	1	f	9.9077 GHz	-49.882 dBm																																																		

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

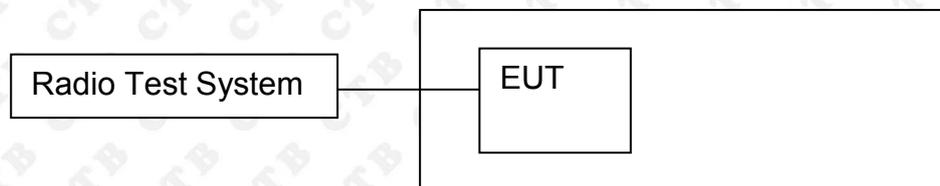

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	1.807	20.97	PASS
	MCH	2.108	20.97	PASS
	HCH	1.769	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	2.529	20.97	PASS
	MCH	2.766	20.97	PASS
	HCH	2.376	20.97	PASS
EDR mode (8DPSK)	LCH	2.846	20.97	PASS
	MCH	3.016	20.97	PASS
	HCH	2.53	20.97	PASS

Test Graph:


Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.40215 GHz 1.807 dBm Span 10.00 MHz #Res BW 2.0 MHz #VBW 6.0 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.441000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.44090 GHz 2.108 dBm Span 10.00 MHz #Res BW 2.0 MHz #VBW 6.0 MHz Sweep 1.000 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.47988 GHz 1.789 dBm Span 10.00 MHz #Res BW 2.0 MHz #VBW 6.0 MHz Sweep 1.000 ms (1001 pts)</p>

<p>$\pi/4$DQPSK/LCH</p>		
<p>$\pi/4$DQPSK/MCH</p>		
<p>$\pi/4$DQPSK/HCH</p>		

<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.401 94 GHz 2.846 dBm #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>	
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.44100000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.440 94 GHz 3.016 dBm #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>	
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 2.48000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.479 97 GHz 2.530 dBm #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)</p>	

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

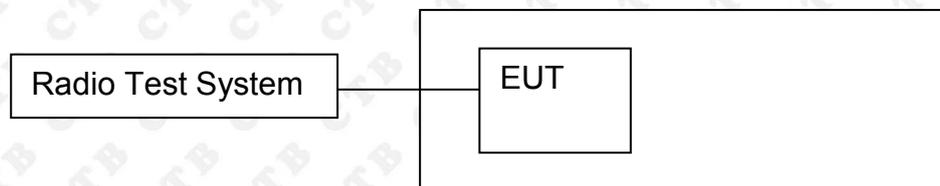

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.869	PASS
	Mid channel	0.876	PASS
	High channel	0.876	PASS
$\pi/4$ DQPSK	Low channel	1.268	PASS
	Mid channel	1.273	PASS
	High channel	1.325	PASS
8DPSK	Low channel	1.289	PASS
	Mid channel	1.295	PASS
	High channel	1.305	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:


<p>GFSK Low channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3: 2.40245 GHz</p> <p>-21.374 dBm</p> <p>Center: 2.402 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 821.29 kHz</p> <p>Total Power: 8.41 dBm</p> <p>Transmit Freq Error: 15.786 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 868.7 kHz</p> <p>x dB: -20.00 dB</p>
<p>GFSK Mid channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.05 dB</p> <p>Ref: 27.05 dBm</p> <p>Mkr3: 2.441453 GHz</p> <p>-19.974 dBm</p> <p>Center: 2.441 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 843.62 kHz</p> <p>Total Power: 8.36 dBm</p> <p>Transmit Freq Error: 14.435 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 876.3 kHz</p> <p>x dB: -20.00 dB</p>
<p>GFSK High channel</p>		<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.1 dB</p> <p>Ref: 27.10 dBm</p> <p>Mkr3: 2.480453 GHz</p> <p>-19.833 dBm</p> <p>Center: 2.48 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 848.14 kHz</p> <p>Total Power: 8.10 dBm</p> <p>Transmit Freq Error: 14.650 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 876.2 kHz</p> <p>x dB: -20.00 dB</p>

<p>$\pi/4$-DQPSK Low channel</p>	 <p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.40200000 GHz Center Freq: 2.40200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.03 dB Ref: 27.03 dBm</p> <p>Mkr3: 2.402654 GHz -19.203 dBm</p> <p>Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>8.05 dBm</td> </tr> <tr> <td>1.1852 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>20.441 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.268 MHz</td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	8.05 dBm	1.1852 MHz			Transmit Freq Error	OBW Power	99.00 %	20.441 kHz	x dB	-20.00 dB	x dB Bandwidth	1.268 MHz	
Occupied Bandwidth	Total Power	8.05 dBm														
1.1852 MHz																
Transmit Freq Error	OBW Power	99.00 %														
20.441 kHz	x dB	-20.00 dB														
x dB Bandwidth	1.268 MHz															
<p>$\pi/4$-DQPSK Mid channel</p>	 <p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.44100000 GHz Center Freq: 2.44100000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.05 dB Ref: 27.05 dBm</p> <p>Mkr3: 2.441654 GHz -19.451 dBm</p> <p>Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>8.13 dBm</td> </tr> <tr> <td>1.1908 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>17.586 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.273 MHz</td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	8.13 dBm	1.1908 MHz			Transmit Freq Error	OBW Power	99.00 %	17.586 kHz	x dB	-20.00 dB	x dB Bandwidth	1.273 MHz	
Occupied Bandwidth	Total Power	8.13 dBm														
1.1908 MHz																
Transmit Freq Error	OBW Power	99.00 %														
17.586 kHz	x dB	-20.00 dB														
x dB Bandwidth	1.273 MHz															
<p>$\pi/4$-DQPSK High channel</p>	 <p>Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.48000000 GHz Center Freq: 2.48000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset: 7.1 dB Ref: 27.10 dBm</p> <p>Mkr3: 2.480687 GHz -22.709 dBm</p> <p>Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>7.85 dBm</td> </tr> <tr> <td>1.1978 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>24.589 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td>1.325 MHz</td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	7.85 dBm	1.1978 MHz			Transmit Freq Error	OBW Power	99.00 %	24.589 kHz	x dB	-20.00 dB	x dB Bandwidth	1.325 MHz	
Occupied Bandwidth	Total Power	7.85 dBm														
1.1978 MHz																
Transmit Freq Error	OBW Power	99.00 %														
24.589 kHz	x dB	-20.00 dB														
x dB Bandwidth	1.325 MHz															

<p>8DPSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB Ref: 27.03 dBm</p> <p>Mkr3: 2.402662 GHz -20.279 dBm</p> <p>Center: 2.402 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1956 MHz</p> <p>Total Power: 7.84 dBm</p> <p>Transmit Freq Error: 17.504 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.289 MHz</p> <p>x dB: -20.00 dB</p>
<p>8DPSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.05 dB Ref: 27.05 dBm</p> <p>Mkr3: 2.441662 GHz -19.566 dBm</p> <p>Center: 2.441 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.1896 MHz</p> <p>Total Power: 8.24 dBm</p> <p>Transmit Freq Error: 14.810 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.295 MHz</p> <p>x dB: -20.00 dB</p>
<p>8DPSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.1 dB Ref: 27.10 dBm</p> <p>Mkr3: 2.480668 GHz -19.901 dBm</p> <p>Center: 2.48 GHz</p> <p>#Res BW: 30 kHz</p> <p>#VBW: 100 kHz</p> <p>Span: 3 MHz</p> <p>Sweep: 3.2 ms</p> <p>Occupied Bandwidth: 1.2103 MHz</p> <p>Total Power: 7.85 dBm</p> <p>Transmit Freq Error: 15.195 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 1.305 MHz</p> <p>x dB: -20.00 dB</p>

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

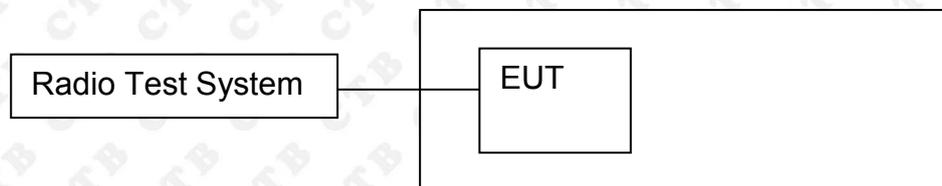

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 20kHz. VBW = 60kHz, Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	1.000	0.579	PASS
GFSK	MCH	1.002	0.584	PASS
GFSK	HCH	1.002	0.584	PASS
$\pi/4$ DQPSK	LCH	1.002	0.845	PASS
$\pi/4$ DQPSK	MCH	1.000	0.849	PASS
$\pi/4$ DQPSK	HCH	1.002	0.883	PASS
8DPSK	LCH	1.002	0.859	PASS
8DPSK	MCH	1.002	0.863	PASS
8DPSK	HCH	1.002	0.870	PASS

Test Graph


Graphs																									
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.000000000 MHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.000 MHz 0.011 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>SQL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td>0.011 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401866 GHz</td> <td></td> <td>-0.590 dBm</td> </tr> </tbody> </table>	MNR	MODE	FREQ	SQL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(Δ)	1.000 MHz	(Δ)	0.011 dB	2	F	1	f		2.401866 GHz		-0.590 dBm
MNR	MODE	FREQ	SQL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	AZ	1	f	(Δ)	1.000 MHz	(Δ)	0.011 dB																		
2	F	1	f		2.401866 GHz		-0.590 dBm																		
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 7.05 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.002 MHz -0.074 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>SQL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td>-0.074 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440866 GHz</td> <td></td> <td>-0.202 dBm</td> </tr> </tbody> </table>	MNR	MODE	FREQ	SQL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(Δ)	1.002 MHz	(Δ)	-0.074 dB	2	F	1	f		2.440866 GHz		-0.202 dBm
MNR	MODE	FREQ	SQL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	AZ	1	f	(Δ)	1.002 MHz	(Δ)	-0.074 dB																		
2	F	1	f		2.440866 GHz		-0.202 dBm																		
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 7.1 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.002 MHz -0.198 dB</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>FREQ</th> <th>SQL</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td>-0.198 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478866 GHz</td> <td></td> <td>-0.455 dBm</td> </tr> </tbody> </table>	MNR	MODE	FREQ	SQL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	AZ	1	f	(Δ)	1.002 MHz	(Δ)	-0.198 dB	2	F	1	f		2.478866 GHz		-0.455 dBm
MNR	MODE	FREQ	SQL	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																		
1	AZ	1	f	(Δ)	1.002 MHz	(Δ)	-0.198 dB																		
2	F	1	f		2.478866 GHz		-0.455 dBm																		

<p>$\pi/4$DQPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.002 MHz -0.970 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OK</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td></td> <td></td> <td>-0.970 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 014 GHz</td> <td></td> <td></td> <td></td> <td>-1.254 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OK	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ Z	1	f	(Δ)	1.002 MHz	(Δ)			-0.970 dB	2	F	1	f		2.402 014 GHz				-1.254 dBm	
MNR	MODE	TRC	SCN	OK	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																							
1	Δ Z	1	f	(Δ)	1.002 MHz	(Δ)			-0.970 dB																							
2	F	1	f		2.402 014 GHz				-1.254 dBm																							
<p>$\pi/4$DQPSK/MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.000000000 MHz</p> <p>Ref Offset 7.05 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.000 MHz 0.434 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OK</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.000 MHz</td> <td>(Δ)</td> <td></td> <td></td> <td>0.434 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441 010 GHz</td> <td></td> <td></td> <td></td> <td>-1.781 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OK	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ Z	1	f	(Δ)	1.000 MHz	(Δ)			0.434 dB	2	F	1	f		2.441 010 GHz				-1.781 dBm	
MNR	MODE	TRC	SCN	OK	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																							
1	Δ Z	1	f	(Δ)	1.000 MHz	(Δ)			0.434 dB																							
2	F	1	f		2.441 010 GHz				-1.781 dBm																							
<p>$\pi/4$DQPSK/HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 7.1 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.002 MHz -0.161 dB</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OK</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td></td> <td></td> <td>-0.161 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 016 GHz</td> <td></td> <td></td> <td></td> <td>-1.554 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OK	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ Z	1	f	(Δ)	1.002 MHz	(Δ)			-0.161 dB	2	F	1	f		2.479 016 GHz				-1.554 dBm	
MNR	MODE	TRC	SCN	OK	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																							
1	Δ Z	1	f	(Δ)	1.002 MHz	(Δ)			-0.161 dB																							
2	F	1	f		2.479 016 GHz				-1.554 dBm																							

<p>8DPSK/LCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.002 MHz 0.185 dB</p> <p>Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OK</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td></td> <td></td> <td>0.185 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 010 GHz</td> <td></td> <td></td> <td></td> <td>-1.970 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OK	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.002 MHz	(Δ)			0.185 dB	2	F	1	f		2.402 010 GHz				-1.970 dBm	
MNR	MODE	TRC	SCN	OK	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																							
1	Δ 2	1	f	(Δ)	1.002 MHz	(Δ)			0.185 dB																							
2	F	1	f		2.402 010 GHz				-1.970 dBm																							
<p>8DPSK /MCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 7.05 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.002 MHz 0.012 dB</p> <p>Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OK</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td></td> <td></td> <td>0.012 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.441 010 GHz</td> <td></td> <td></td> <td></td> <td>-1.697 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OK	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.002 MHz	(Δ)			0.012 dB	2	F	1	f		2.441 010 GHz				-1.697 dBm	
MNR	MODE	TRC	SCN	OK	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																							
1	Δ 2	1	f	(Δ)	1.002 MHz	(Δ)			0.012 dB																							
2	F	1	f		2.441 010 GHz				-1.697 dBm																							
<p>8DPSK /HCH</p>	<p>Agilent Spectrum Analyzer - Swept SA</p> <p>Marker 1 Δ 1.002000000 MHz</p> <p>Ref Offset 7.1 dB Ref 20.00 dBm</p> <p>ΔMkr1 1.002 MHz -0.138 dB</p> <p>Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Sweep 4.800 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCN</th> <th>OK</th> <th>F</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>Δ2</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.002 MHz</td> <td>(Δ)</td> <td></td> <td></td> <td>-0.138 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 012 GHz</td> <td></td> <td></td> <td></td> <td>-1.676 dBm</td> </tr> </tbody> </table>	MNR	MODE	TRC	SCN	OK	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	Δ 2	1	f	(Δ)	1.002 MHz	(Δ)			-0.138 dB	2	F	1	f		2.479 012 GHz				-1.676 dBm	
MNR	MODE	TRC	SCN	OK	F	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																							
1	Δ 2	1	f	(Δ)	1.002 MHz	(Δ)			-0.138 dB																							
2	F	1	f		2.479 012 GHz				-1.676 dBm																							

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

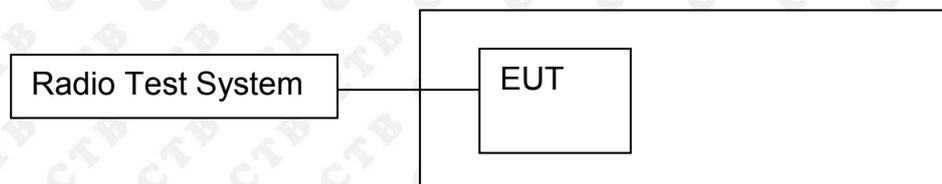

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;

12.4 Test Result


Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS

Test Graph

Graphs																												
GFSK/Hop	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4018370 GHz</td> <td>1.171 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4799930 GHz</td> <td>1.263 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4018370 GHz	1.171 dBm				2	N	1	f	2.4799930 GHz	1.263 dBm			
MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4018370 GHz	1.171 dBm																							
2	N	1	f	2.4799930 GHz	1.263 dBm																							
$\pi/4$ DQPSK/Hop	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4019205 GHz</td> <td>-0.714 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4799930 GHz</td> <td>0.410 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4019205 GHz	-0.714 dBm				2	N	1	f	2.4799930 GHz	0.410 dBm			
MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4019205 GHz	-0.714 dBm																							
2	N	1	f	2.4799930 GHz	0.410 dBm																							
8DPSK/Hop	<table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4018370 GHz</td> <td>-2.012 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.4804105 GHz</td> <td>-2.845 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4018370 GHz	-2.012 dBm				2	N	1	f	2.4804105 GHz	-2.845 dBm			
MNR	MODE	TRC	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																				
1	N	1	f	2.4018370 GHz	-2.012 dBm																							
2	N	1	f	2.4804105 GHz	-2.845 dBm																							

13. DWELL TIME

13.1 Block Diagram Of Test Setup

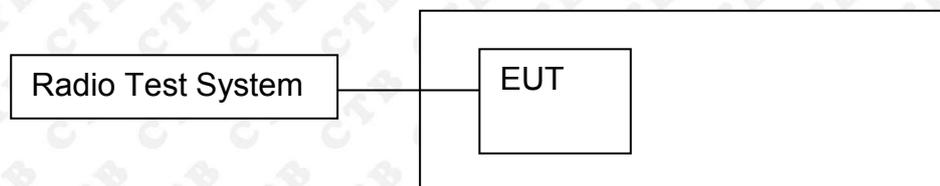

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.383	122.56	400	PASS
	DH1	MCH	0.383	122.56	400	PASS
	DH1	HCH	0.383	122.56	400	PASS
	DH3	LCH	1.637	261.92	400	PASS
	DH3	MCH	1.644	263.04	400	PASS
	DH3	HCH	1.644	263.04	400	PASS
	DH5	LCH	2.894	308.693	400	PASS
	DH5	MCH	2.894	308.693	400	PASS
	DH5	HCH	2.894	308.693	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

DH5: $1600/79/6*0.4*79*(MkrDelta)/1000$

DH3: $1600/79/4*0.4*79*(MkrDelta)/1000$


DH1: $1600/79/2*0.4*79*(MkrDelta)/1000$

Remark: Mkr Delta is once pulse time.


Test Graph




GFSK_DH3/LCH

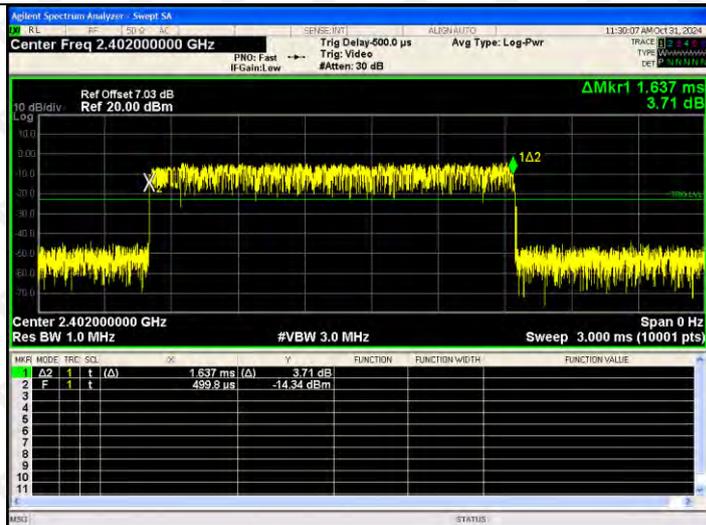


GFSK_DH3/MCH

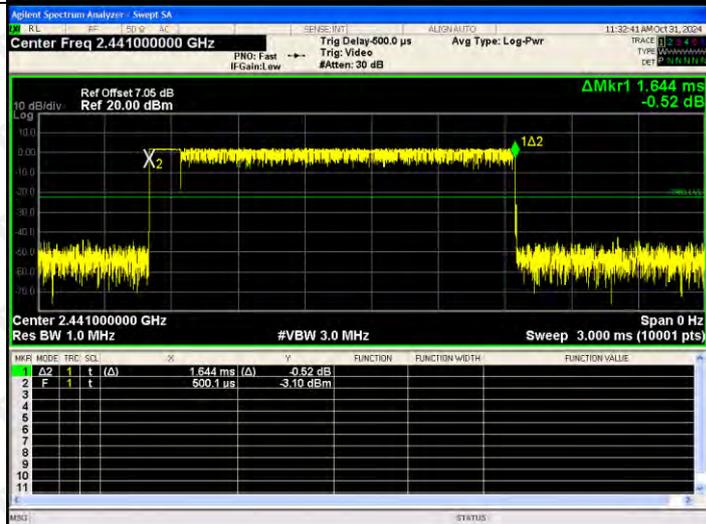


GFSK_DH3/HCH

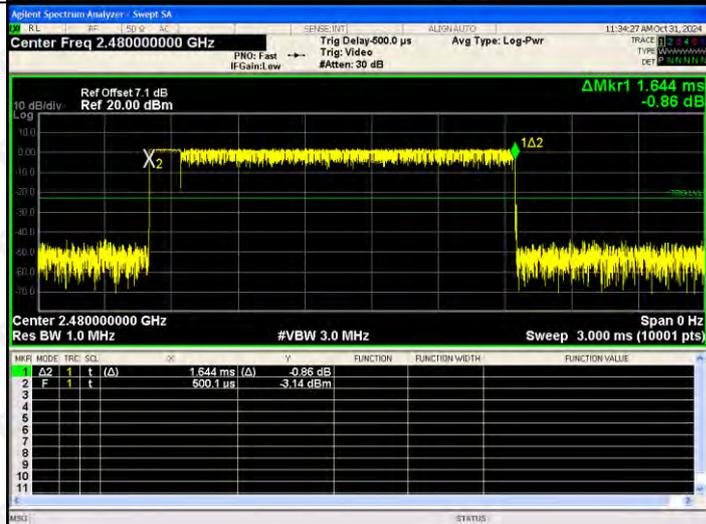


GFSK_DH5/LCH

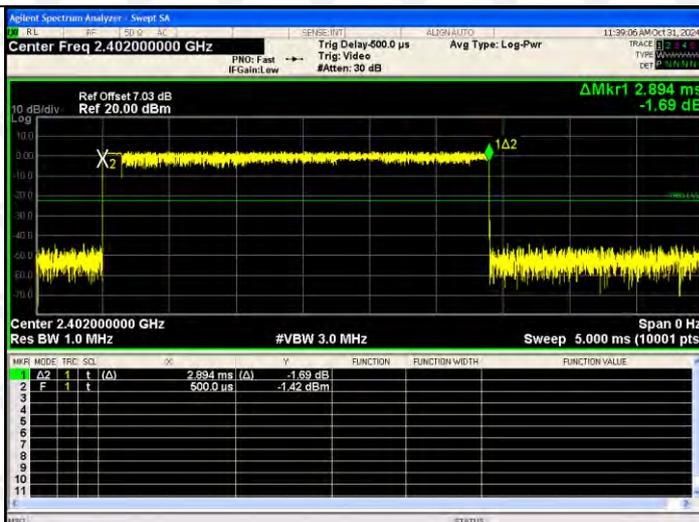

GFSK_DH5/MCH

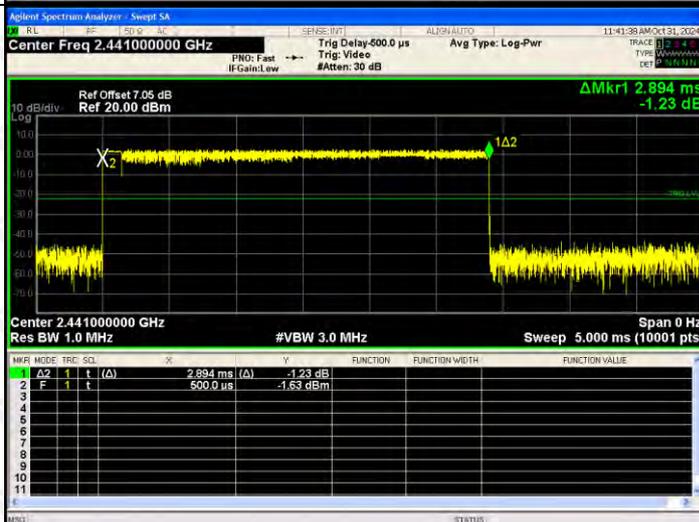

GFSK_DH5/HCH

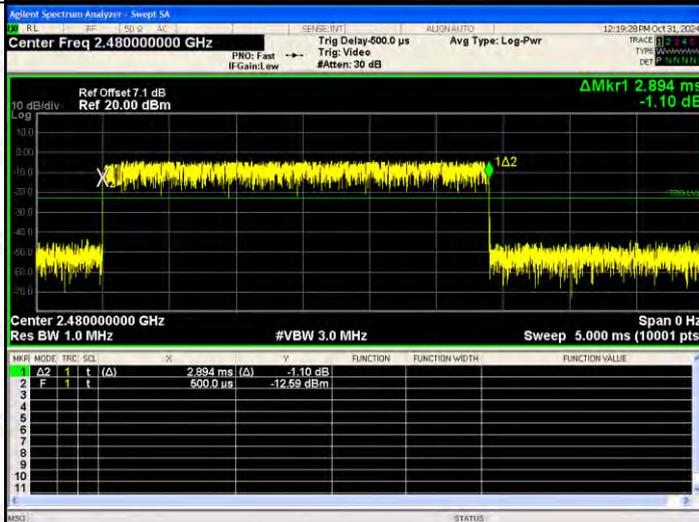

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

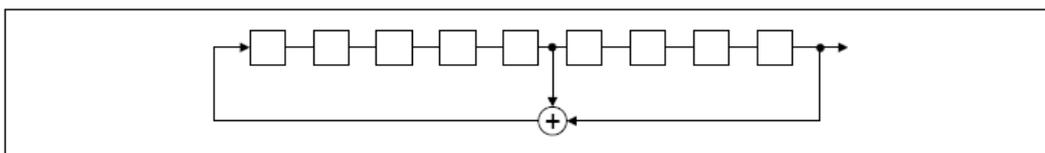

An example of Pseudorandom Frequency Hopping Sequence as follow:

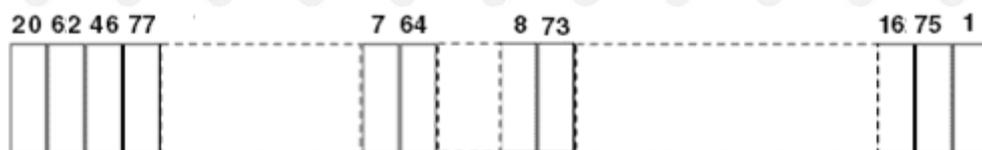

Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Chip antenna. The best case gain of the antenna is 1.95dBi.

16. EUT PHOTOGRAPHS

External Photos EUT Photo 1



EUT Photo 2



EUT Photo 3



EUT Photo 4



EUT Photo 5



EUT Photo 6



EUT Photo 7



EUT Photo 8



EUT Photo 9



EUT Photo 10



EUT Photo 11



EUT Photo 12



EUT Photo 13



EUT Photo 14



EUT Photo 15



EUT Photo 16



EUT Photo 17




EUT Photo 18



EUT Photo 19



EUT Photo 20

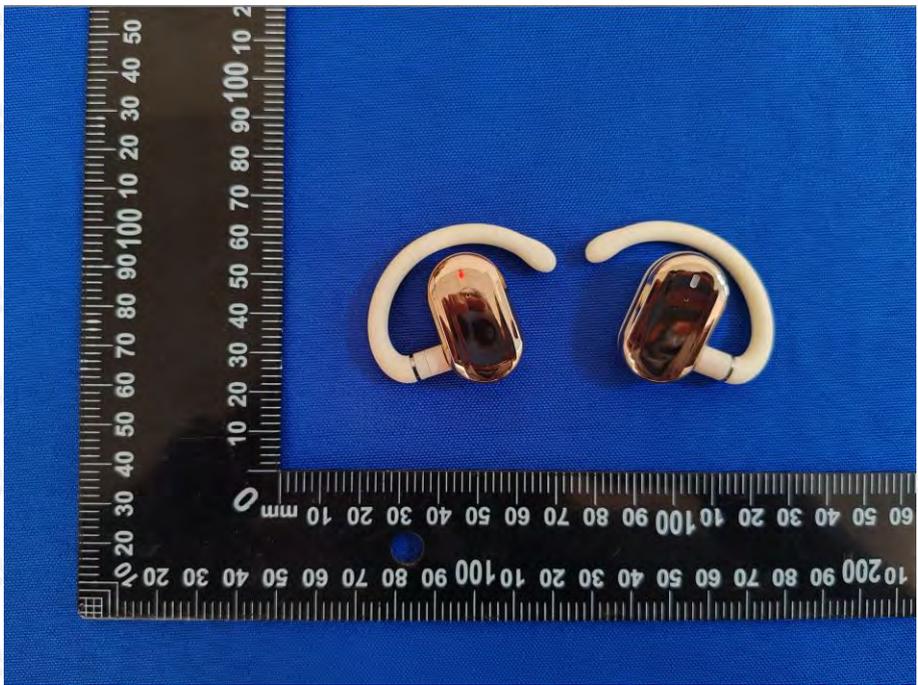


EUT Photo 21

Internal Photos
EUT Photo 1




EUT Photo 2

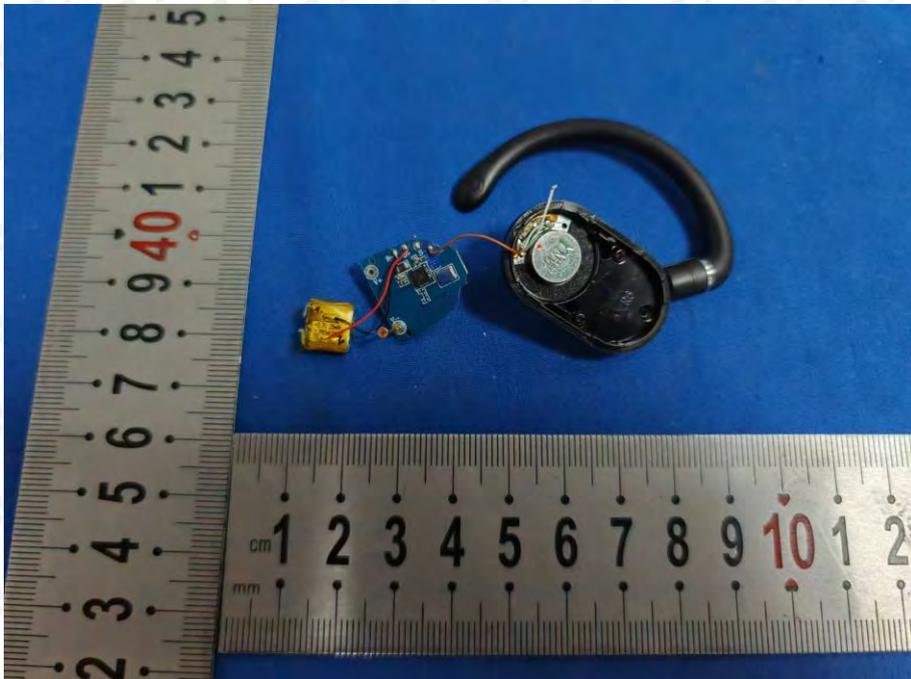


EUT Photo 3



EUT Photo 4

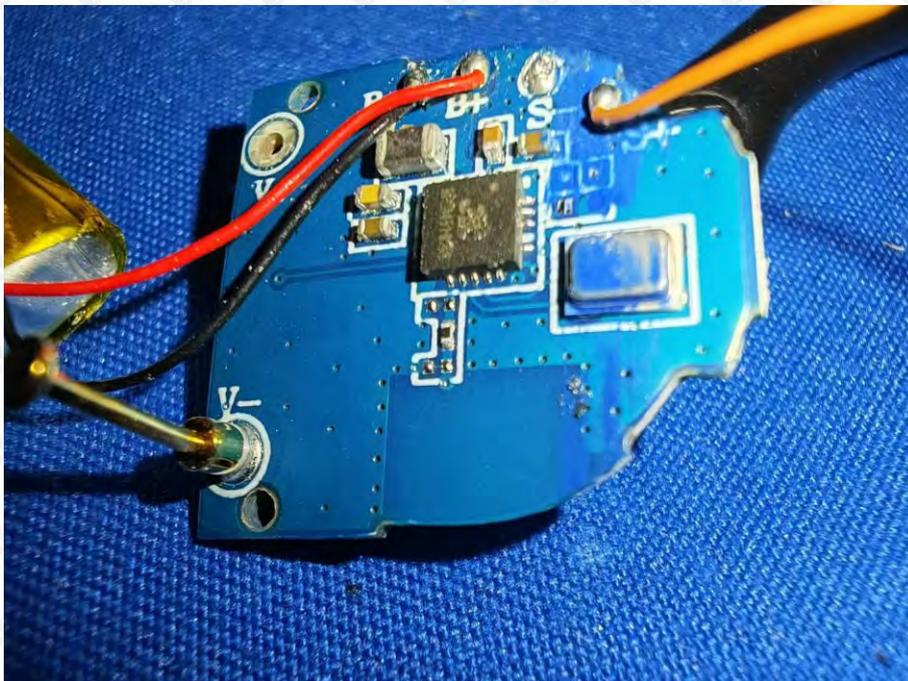


EUT Photo 5

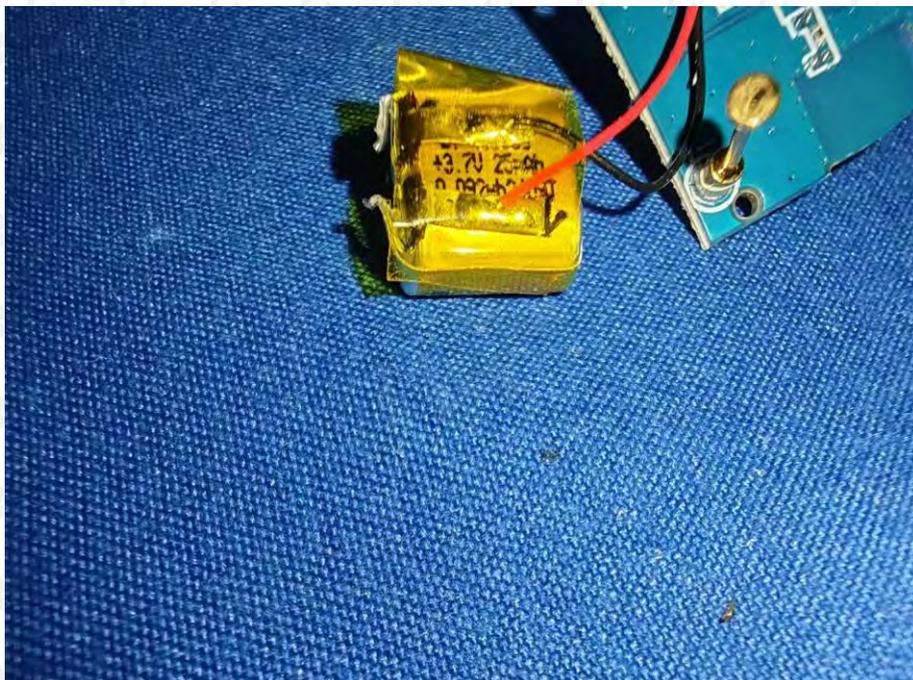


EUT Photo 6




EUT Photo 7

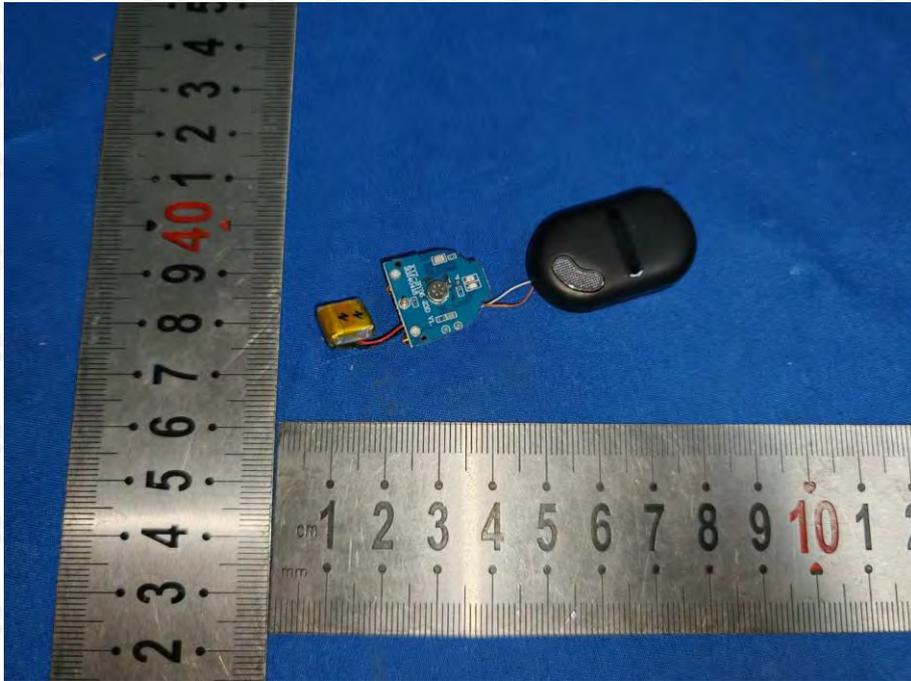


EUT Photo 8

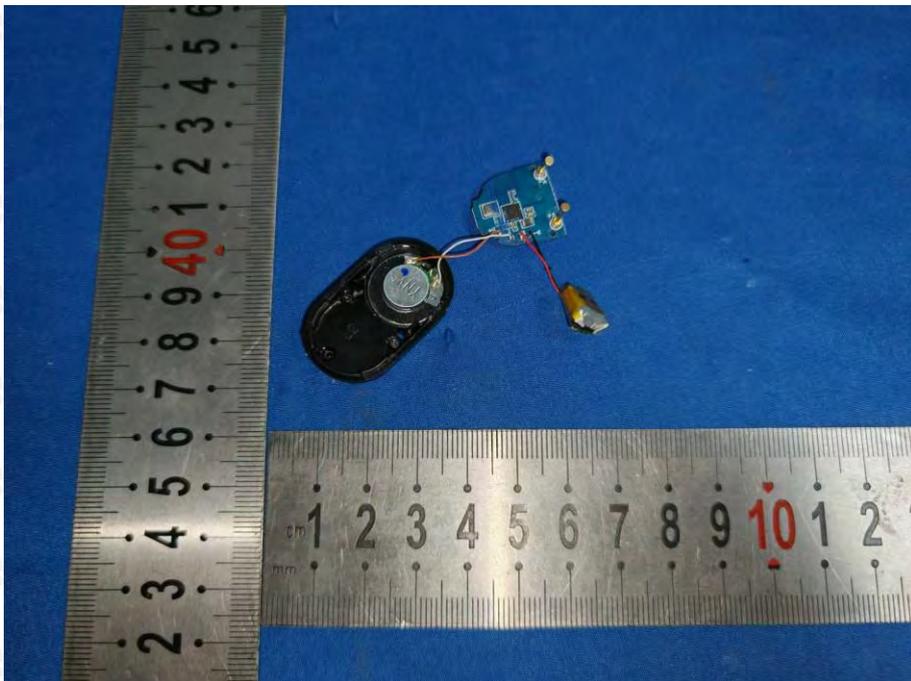


EUT Photo 9

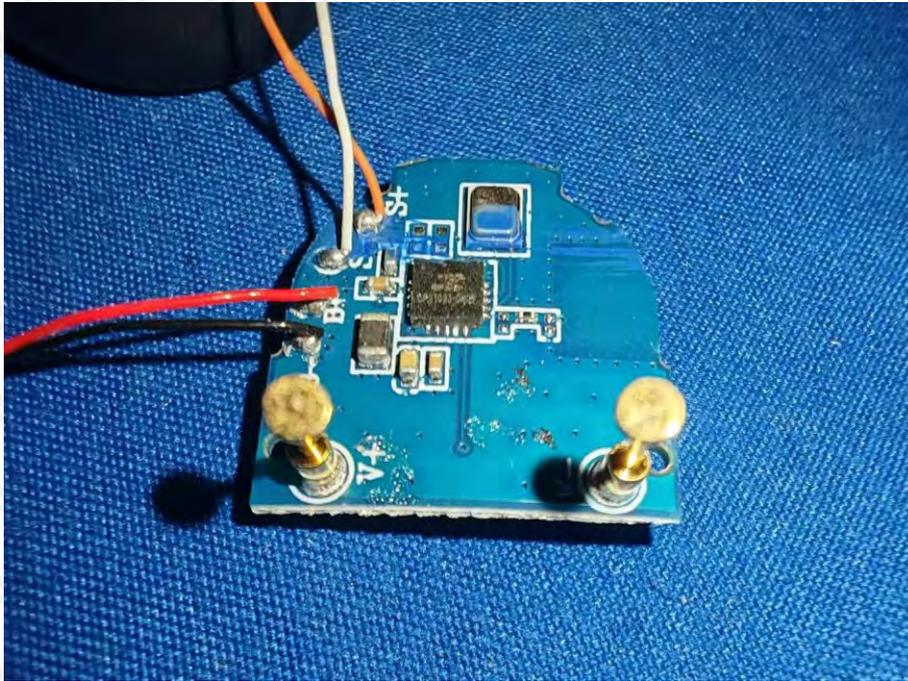

EUT Photo 10

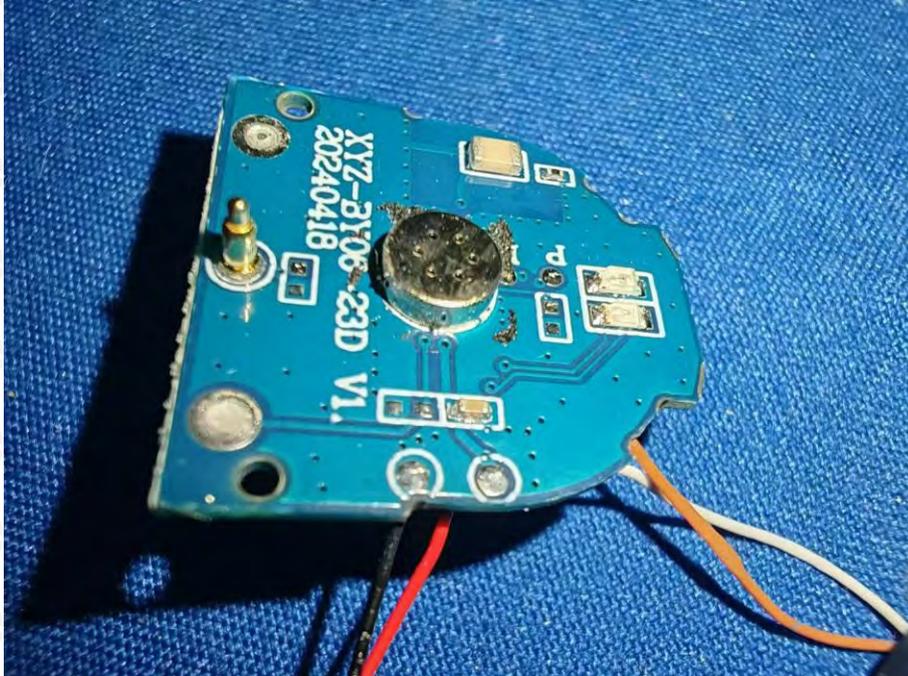


EUT Photo 11

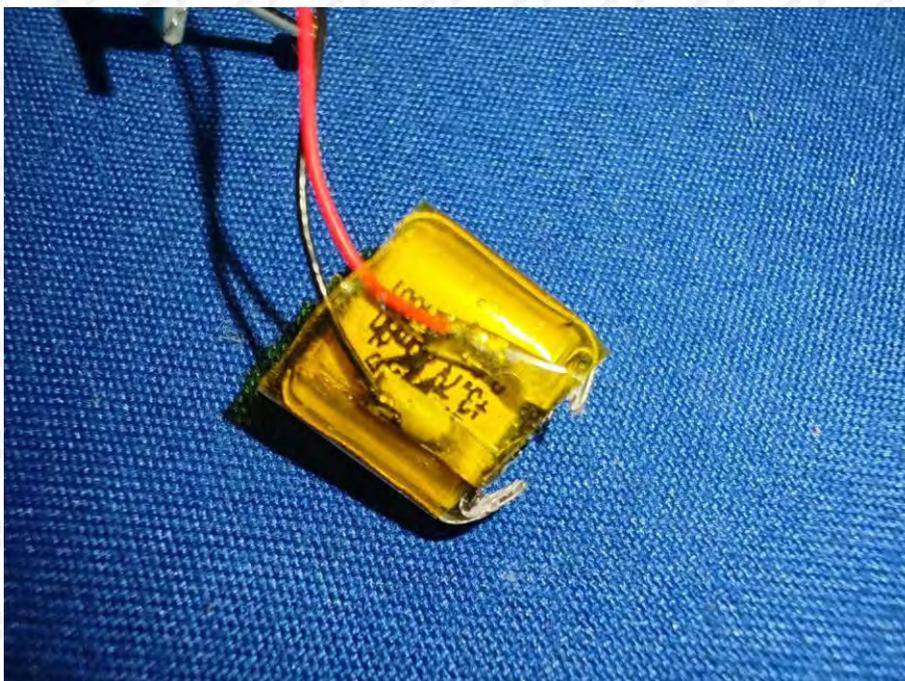

17. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission


Below 1G

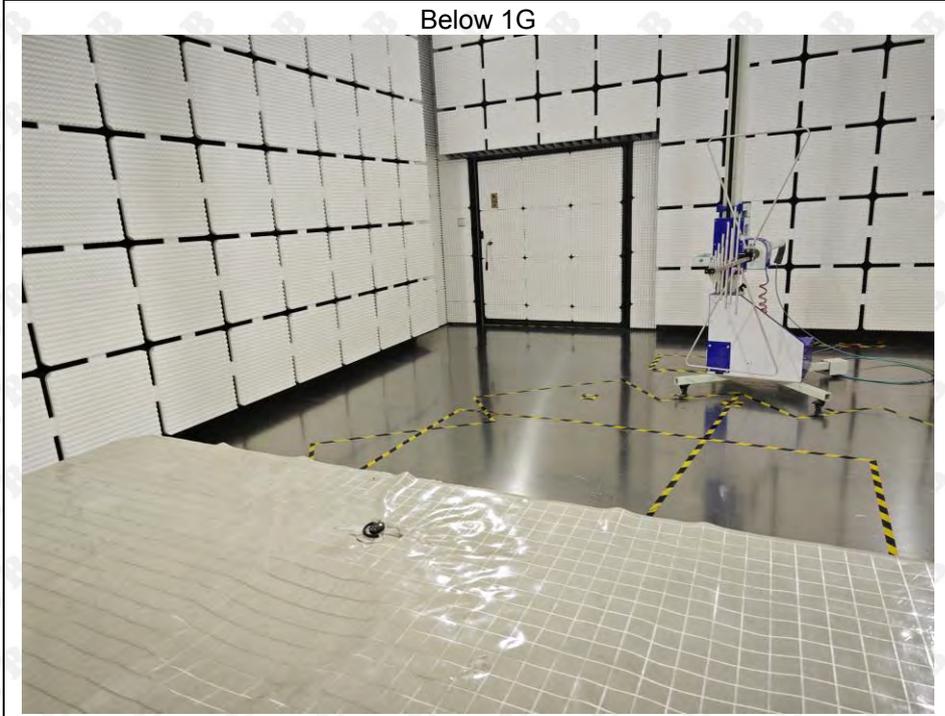

Above 1G



Conducted emissions

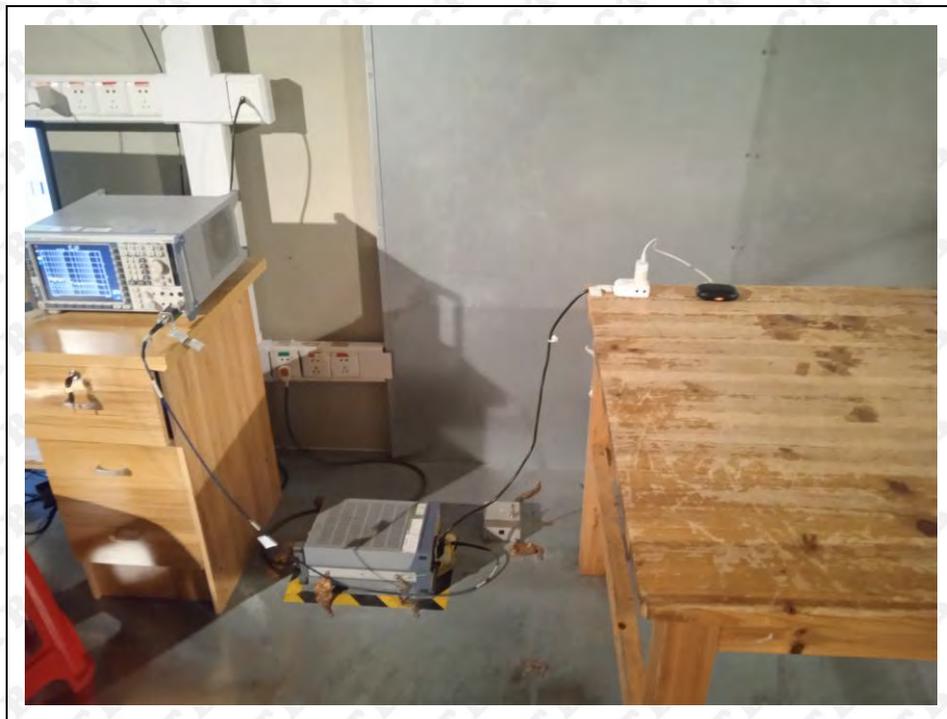

※※※※ END OF REPORT ※※※※