




**-6dB\_Emission\_Bandwidth\_NVNT\_ANT1\_802\_11n(HT20)\_5745\_20M**

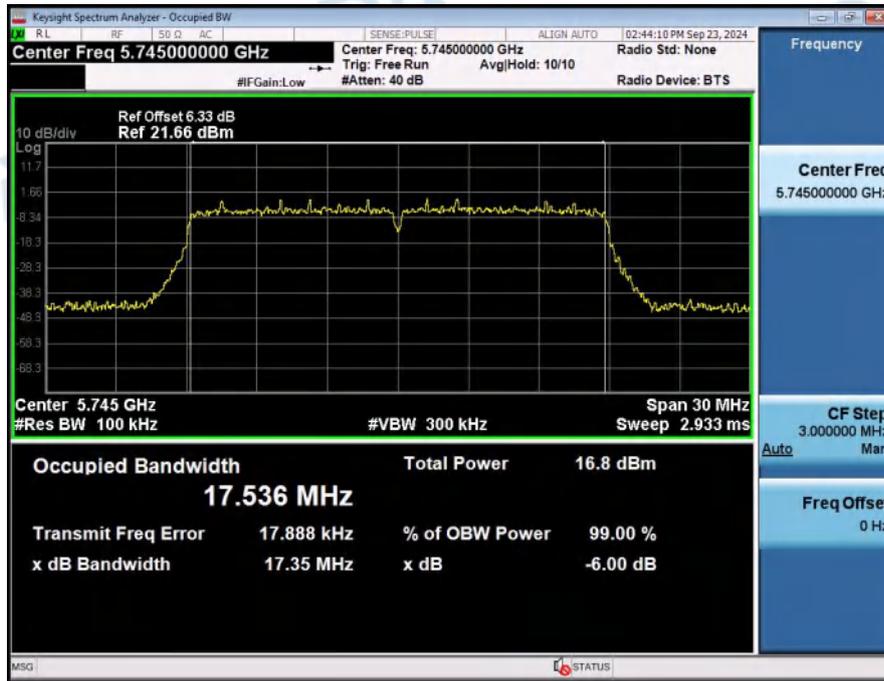


**-6dB\_Emission\_Bandwidth\_NVNT\_ANT1\_802\_11n(HT20)\_5785\_20M**

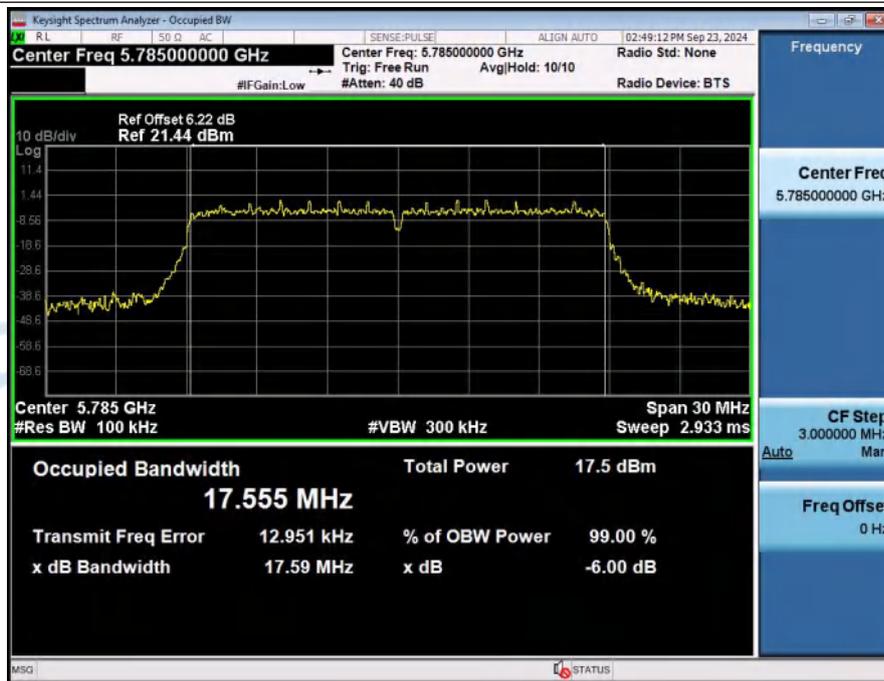

**-6dB\_Emission\_Bandwidth\_NVNT\_ANT1\_802\_11n(HT20)\_5825\_20M**

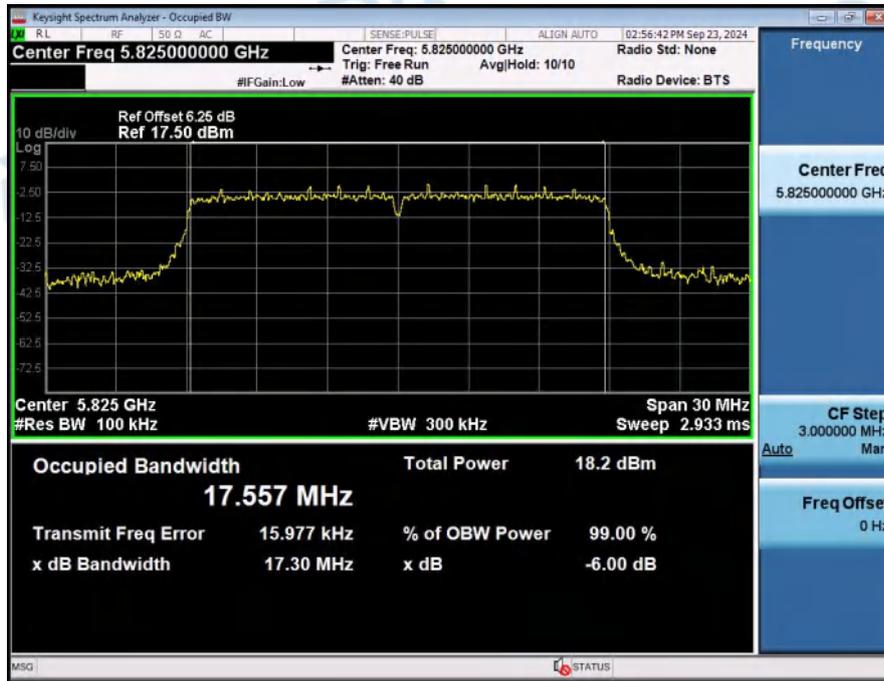

**-6dB\_Emission\_Bandwidth\_NVNT\_ANT1\_802\_11ac(VHT20)\_5745\_20M**

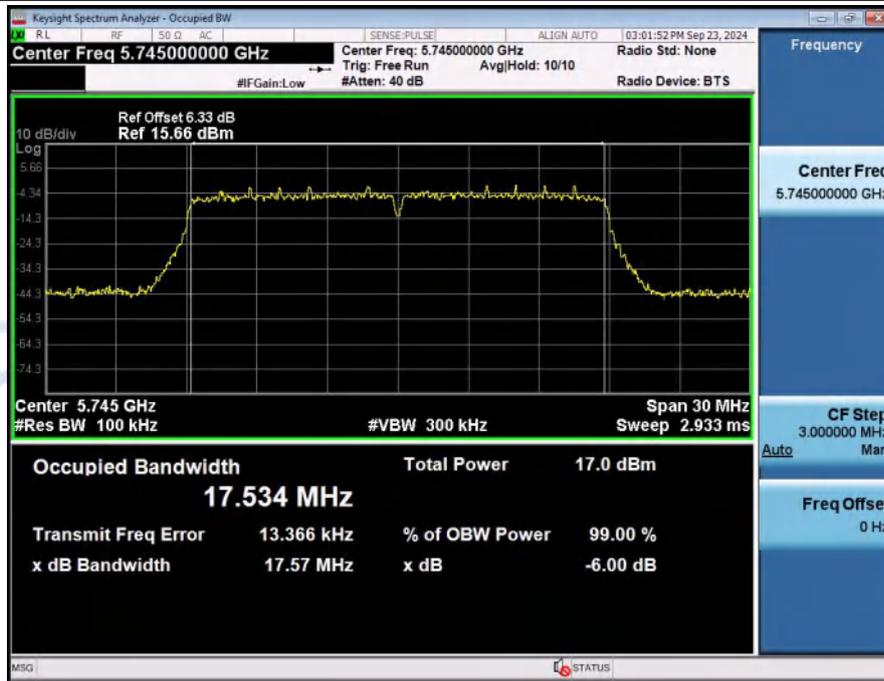


**-6dB\_Emission\_Bandwidth\_NVNT\_ANT1\_802\_11ac(VHT20)\_5785\_20M**



**-6dB\_Emission\_Bandwidth\_NVNT\_ANT1\_802\_11ac(VHT20)\_5825\_20M**




**-6dB\_Emission\_Bandwidth\_NVNT\_ANT1\_802\_11n(HT40)\_5755\_40M**

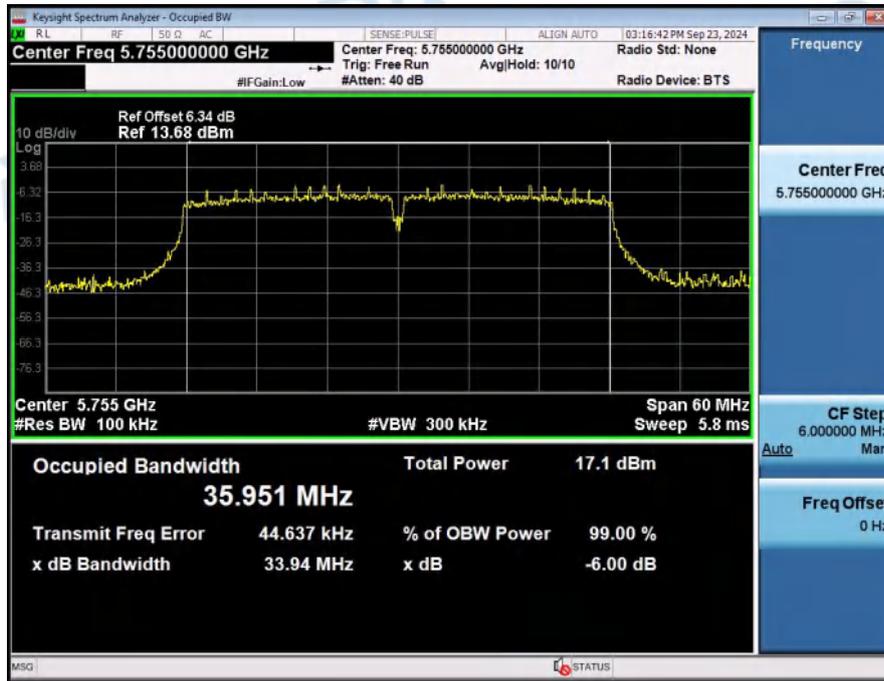


**-6dB\_Emission\_Bandwidth\_NVNT\_ANT1\_802\_11n(HT40)\_5795\_40M**



-6dB\_Emission\_Bandwidth\_NVNT\_ANT1\_802\_11ac(VHT40)\_5755\_40M

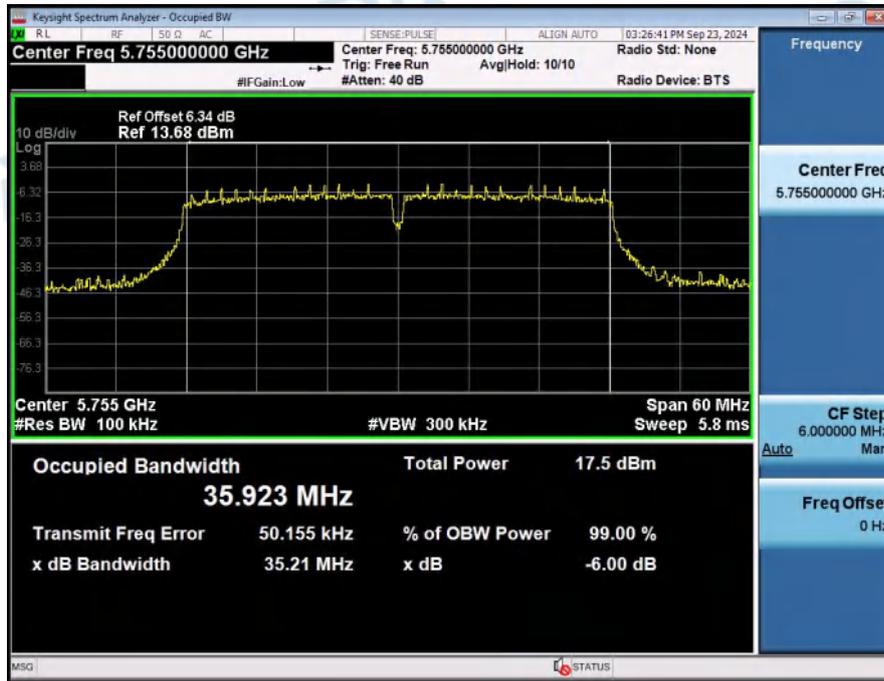

-6dB\_Emission\_Bandwidth\_NVNT\_ANT1\_802\_11ac(VHT40)\_5795\_40M

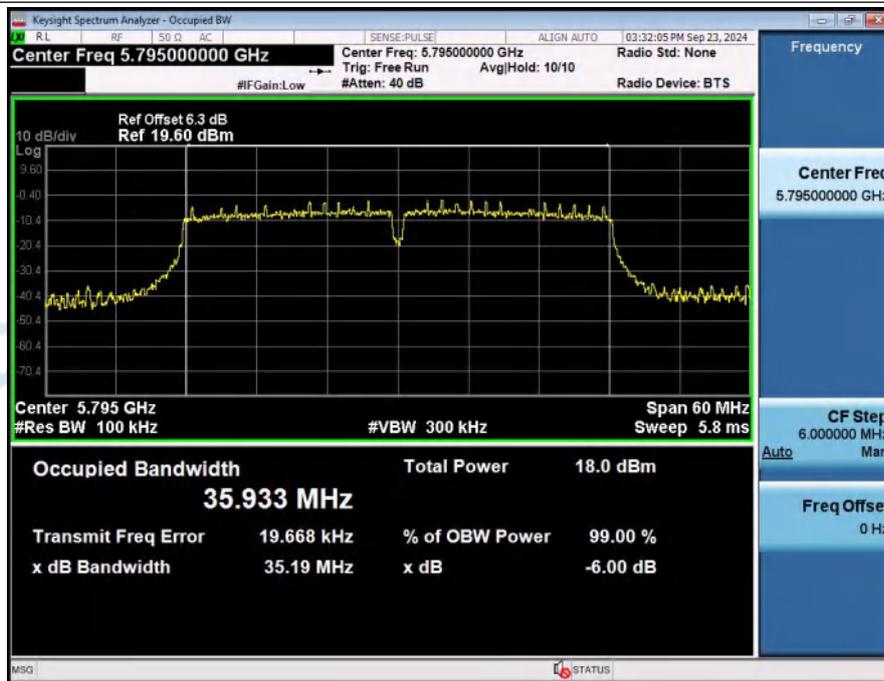

-6dB\_Emission\_Bandwidth\_NVNT\_ANT1\_802\_11ac(VHT80)\_5775\_80M




## 2. -26dB and 99% Emission Bandwidth

Condition	Antenna	Modulation	Frequency(MHz)	-26dB_Emission_Bandwidth (MHz)	Occupied Bandwidth(MHz)
NVNT	ANT1	802.11a	5745.00	18.26	16.41
NVNT	ANT1	802.11a	5785.00	18.28	16.44
NVNT	ANT1	802.11a	5825.00	18.77	16.50
NVNT	ANT1	802.11n(HT20)	5745.00	19.20	17.59
NVNT	ANT1	802.11n(HT20)	5785.00	19.36	17.61
NVNT	ANT1	802.11n(HT20)	5825.00	19.40	17.63
NVNT	ANT1	802.11ac(VHT20)	5745.00	19.19	17.60
NVNT	ANT1	802.11ac(VHT20)	5785.00	19.41	17.63
NVNT	ANT1	802.11ac(VHT20)	5825.00	19.45	17.63
NVNT	ANT1	802.11n(HT40)	5755.00	41.31	36.35
NVNT	ANT1	802.11n(HT40)	5795.00	40.81	36.27
NVNT	ANT1	802.11ac(VHT40)	5755.00	40.70	36.21
NVNT	ANT1	802.11ac(VHT40)	5795.00	41.12	36.21
NVNT	ANT1	802.11ac(VHT80)	5775.00	80.98	74.96

99%\_OCB\_NVNT\_ANT1\_802\_11a\_5745




-26BW\_NVNT\_ANT1\_802\_11a\_5745

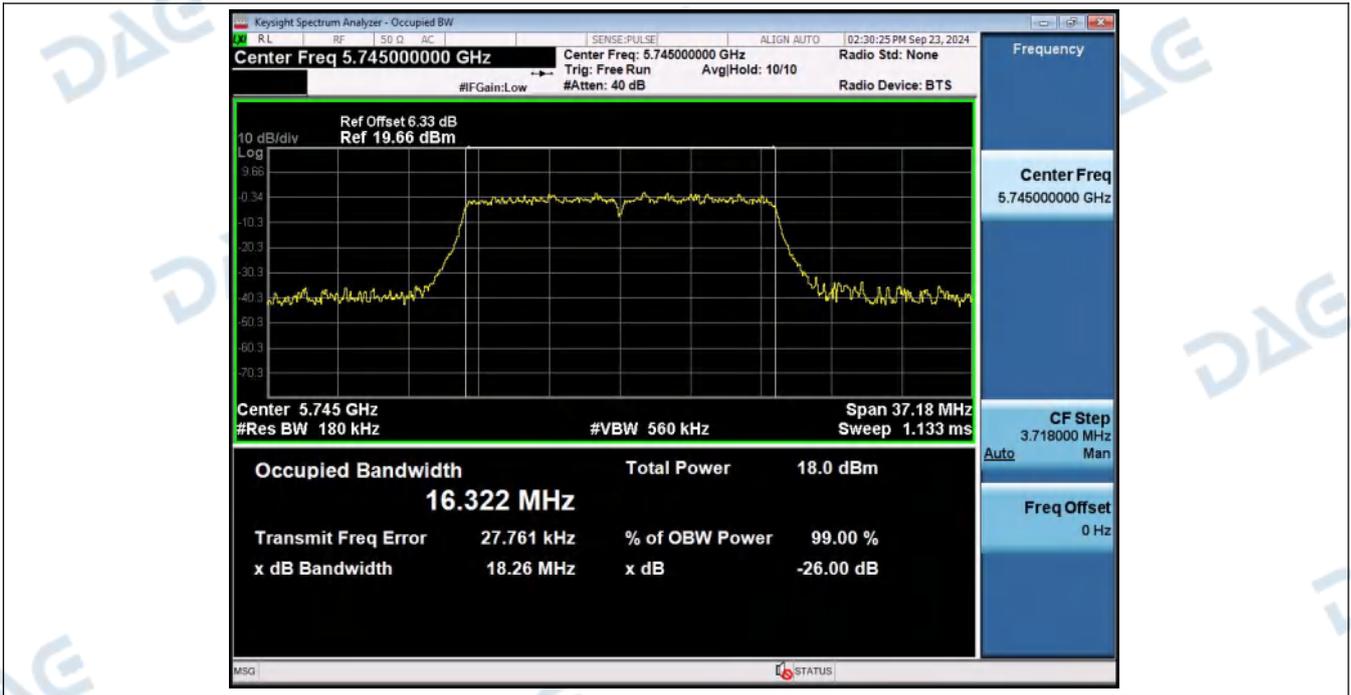

99%\_OCB\_NVNT\_ANT1\_802\_11a\_5785




-26BW\_NVNT\_ANT1\_802\_11a\_5785

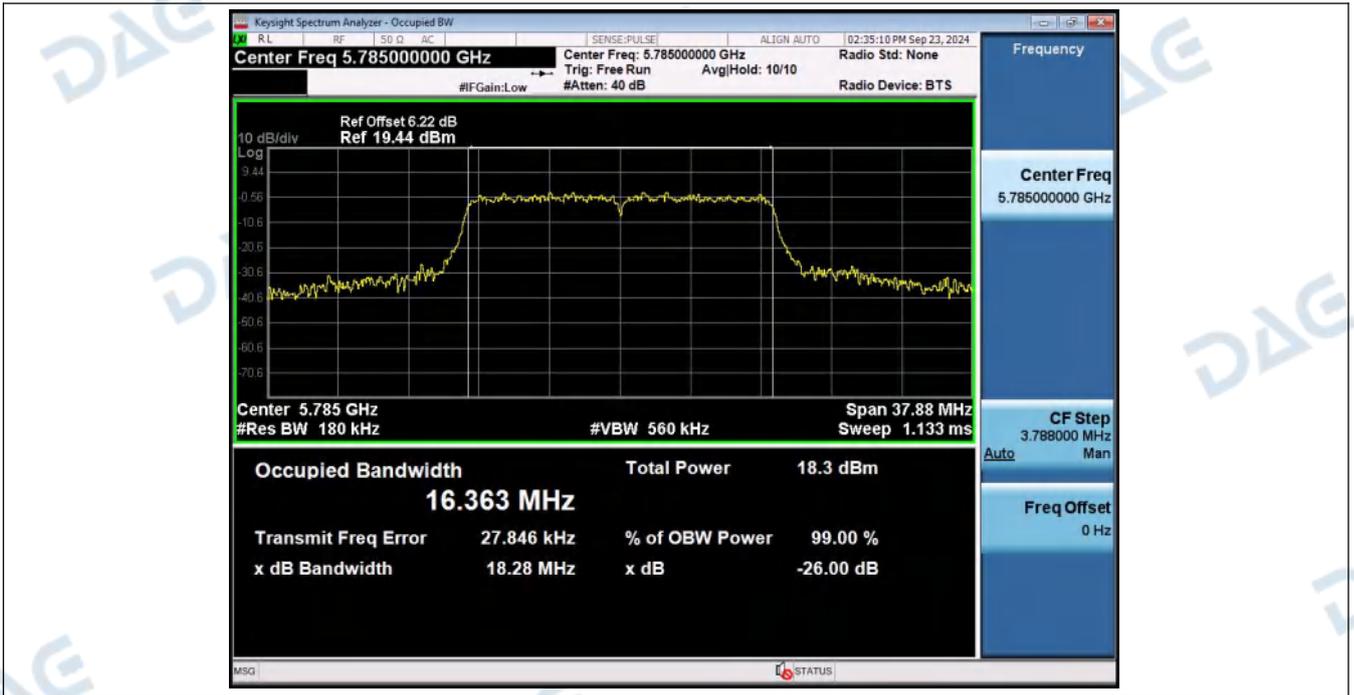


99%\_OCB\_NVNT\_ANT1\_802\_11a\_5825




-26BW\_NVNT\_ANT1\_802\_11a\_5825

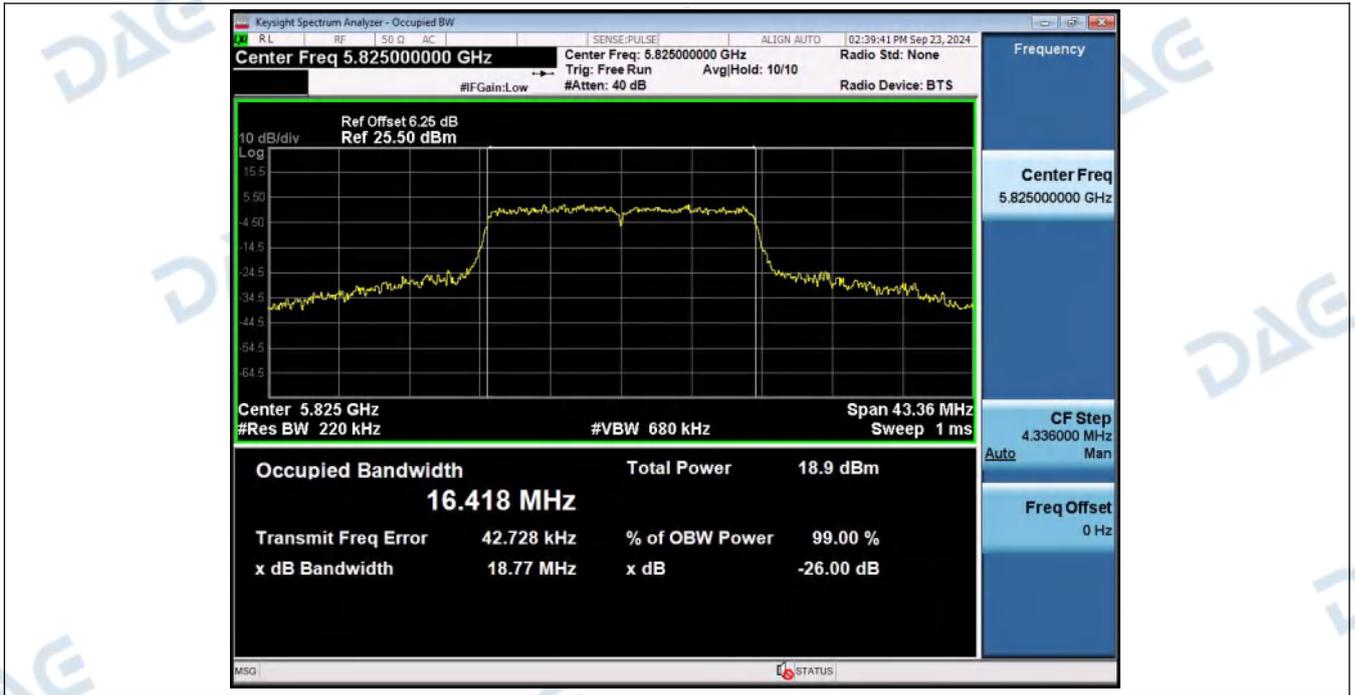

99%\_OCB\_NVNT\_ANT1\_802\_11n(HT20)\_5745

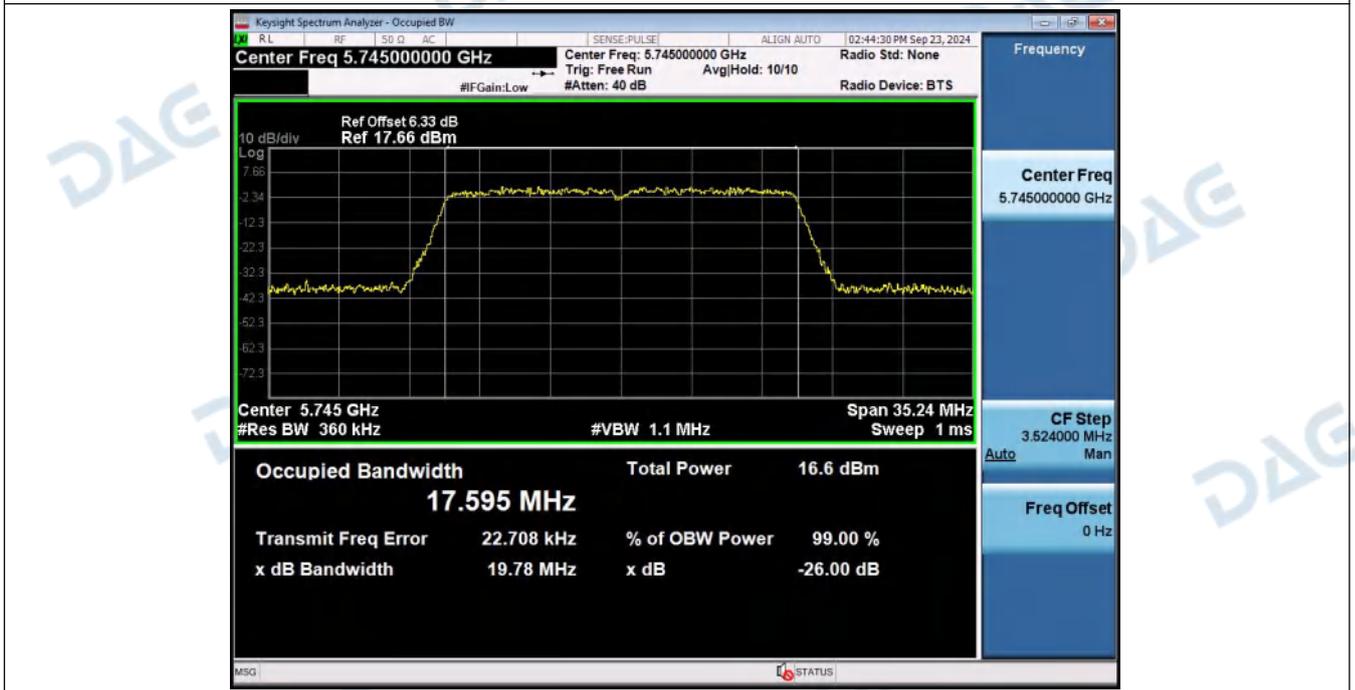


-26BW\_NVNT\_ANT1\_802\_11n(HT20)\_5745

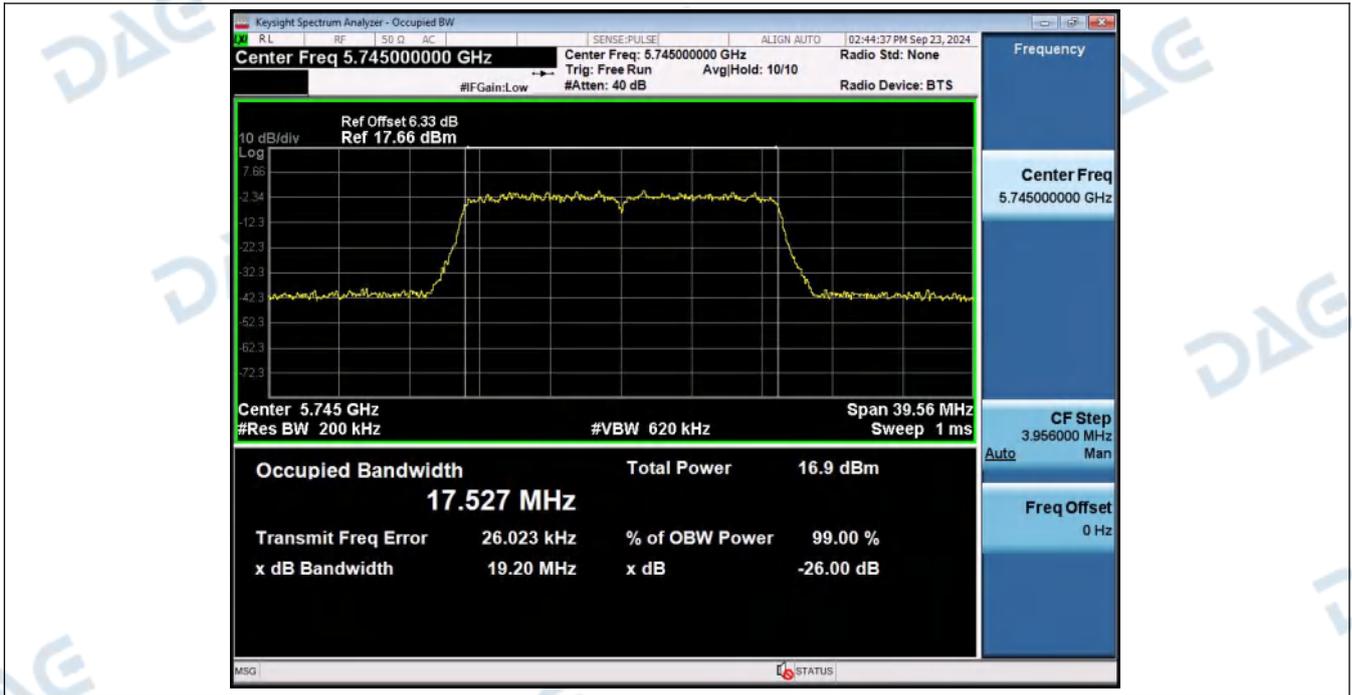

99%\_OCB\_NVNT\_ANT1\_802\_11n(HT20)\_5785




-26BW\_NVNT\_ANT1\_802\_11n(HT20)\_5785

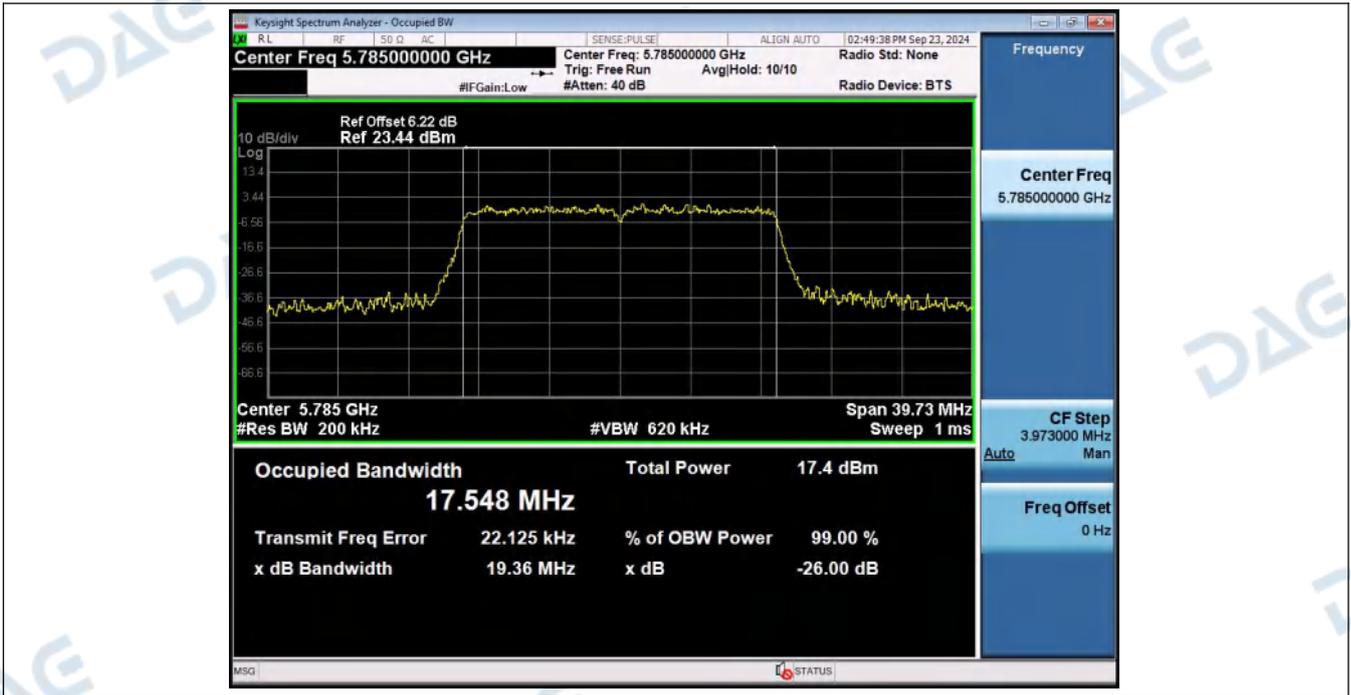


99%\_OCB\_NVNT\_ANT1\_802\_11n(HT20)\_5825




-26BW\_NVNT\_ANT1\_802\_11n(HT20)\_5825

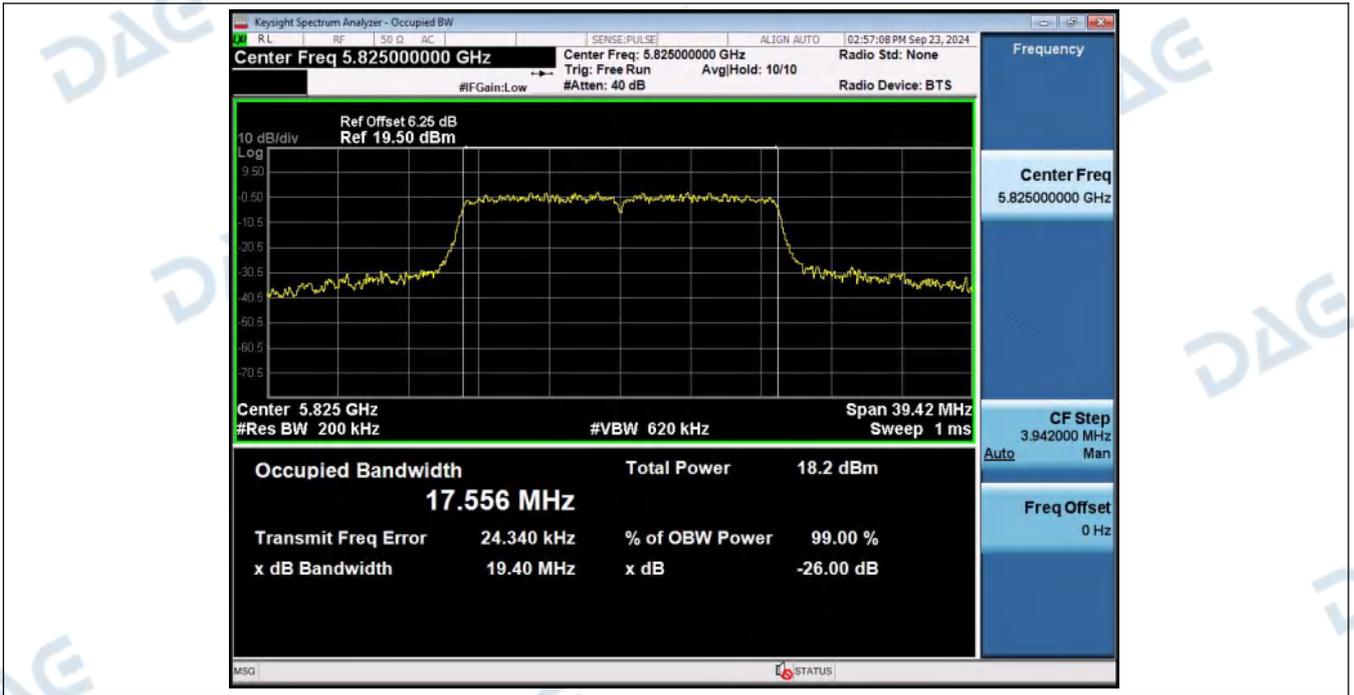


99%\_OCB\_NVNT\_ANT1\_802\_11ac(VHT20)\_5745

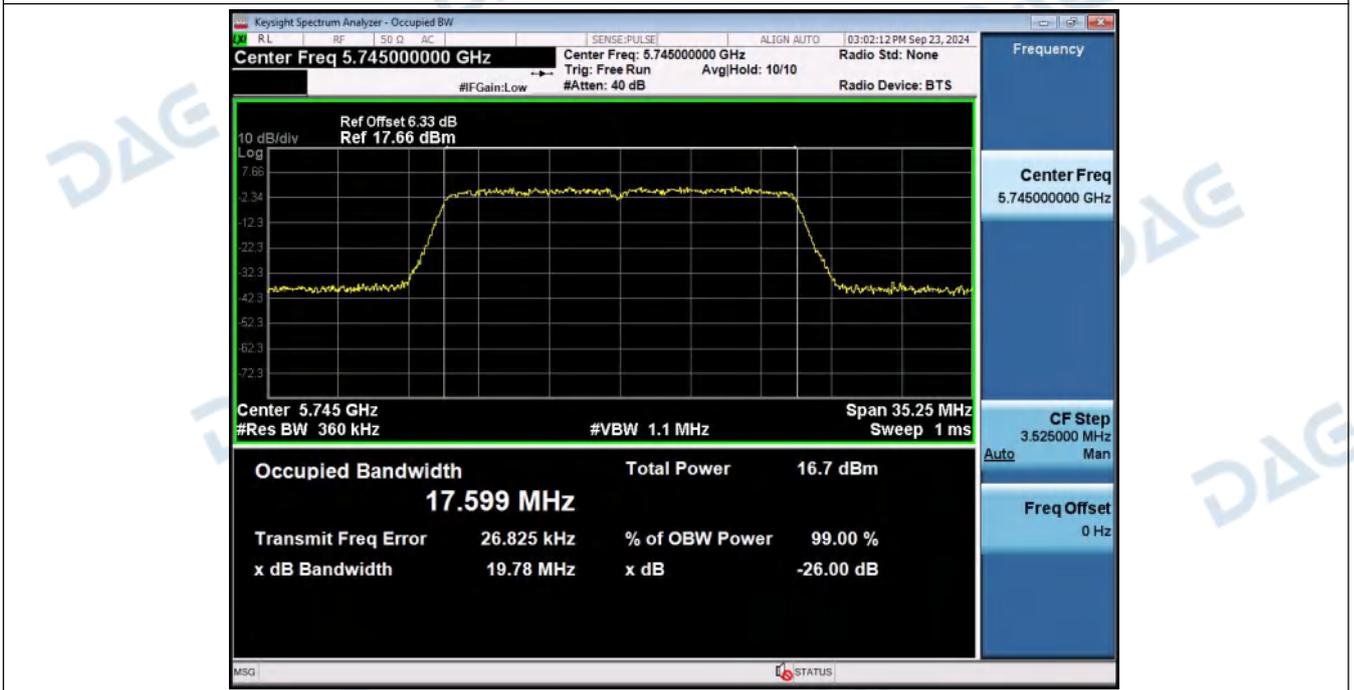


-26BW\_NVNT\_ANT1\_802\_11ac(VHT20)\_5745

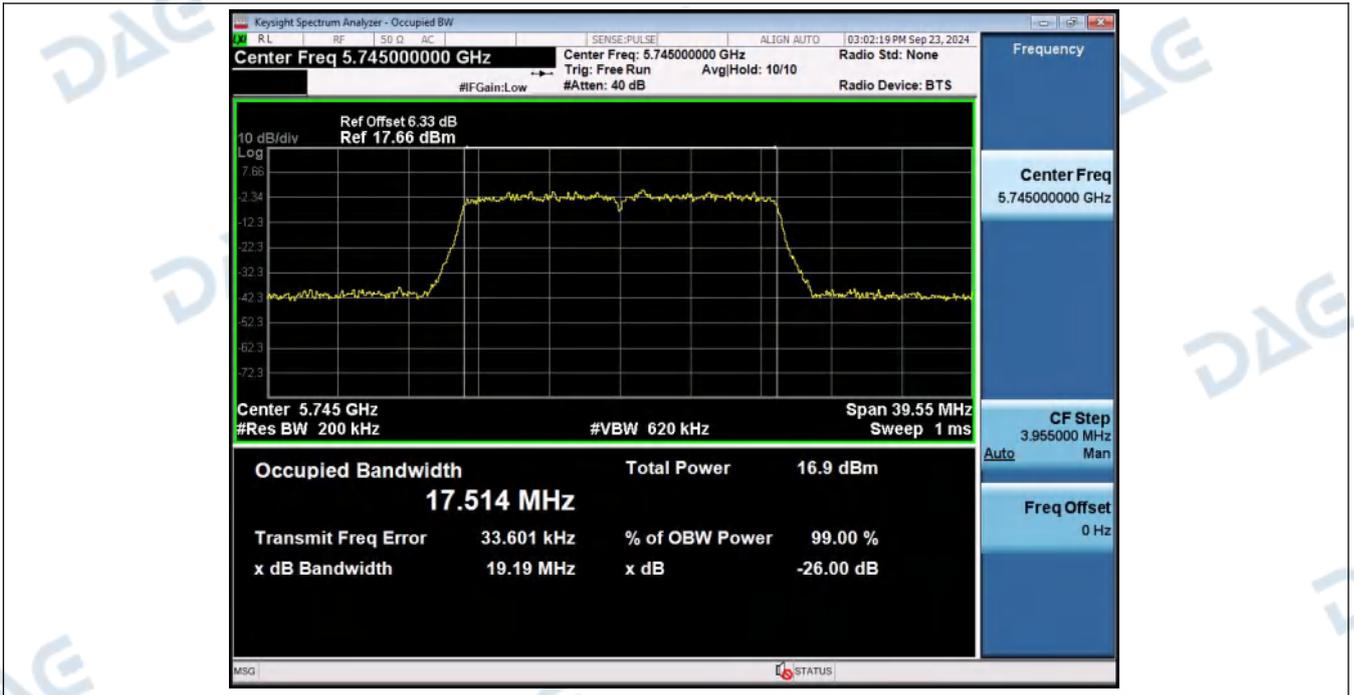

99%\_OCB\_NVNT\_ANT1\_802\_11ac(VHT20)\_5785

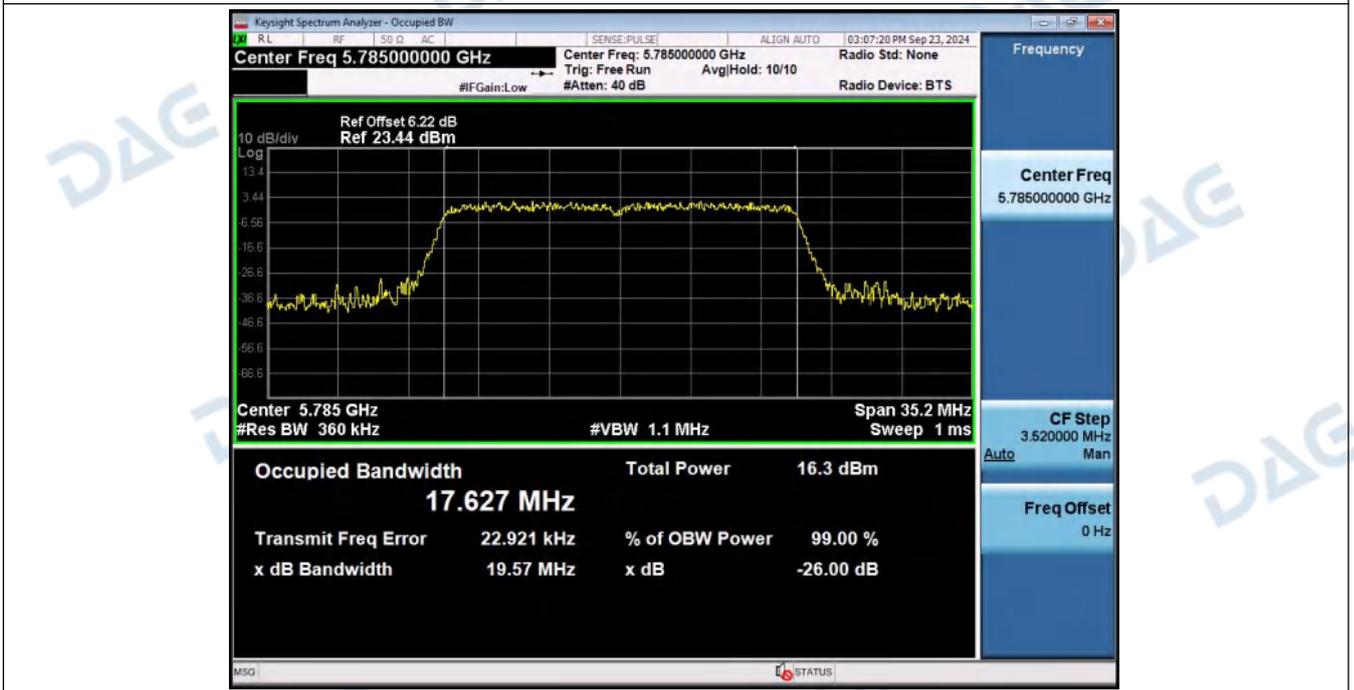


-26BW\_NVNT\_ANT1\_802\_11ac(VHT20)\_5785

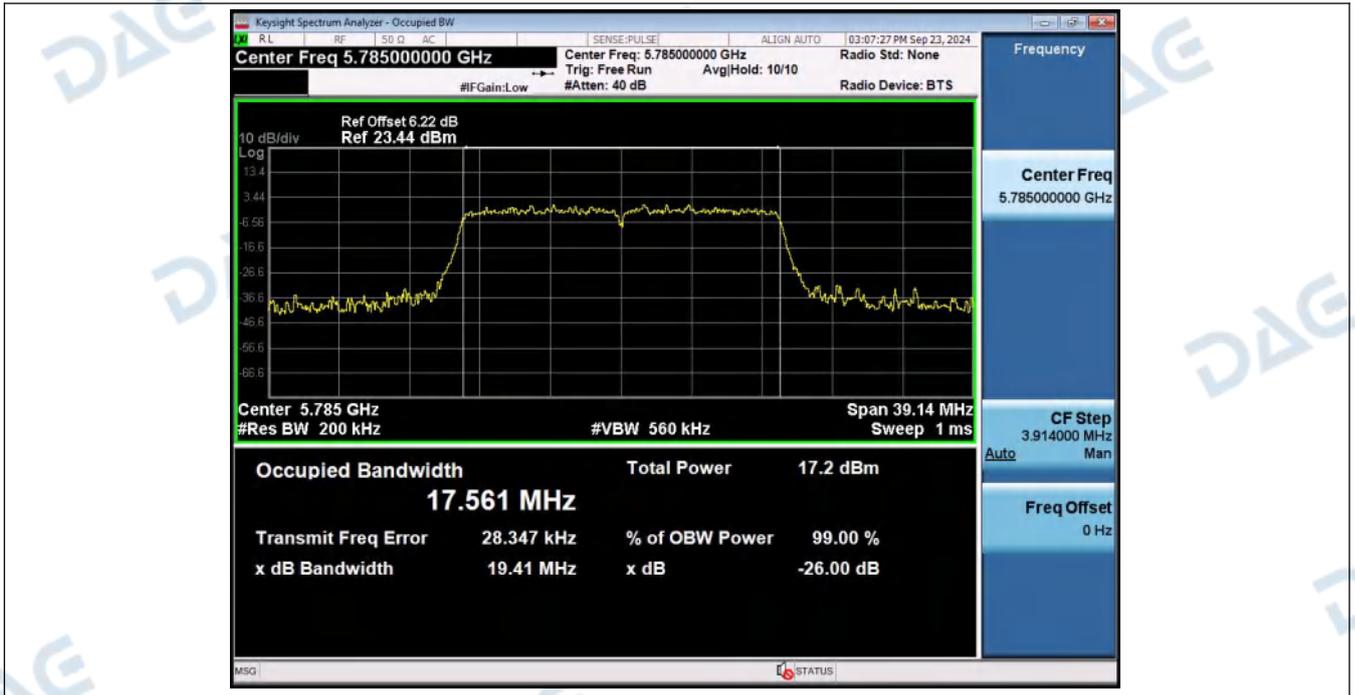


99%\_OCB\_NVNT\_ANT1\_802\_11ac(VHT20)\_5825




-26BW\_NVNT\_ANT1\_802\_11ac(VHT20)\_5825

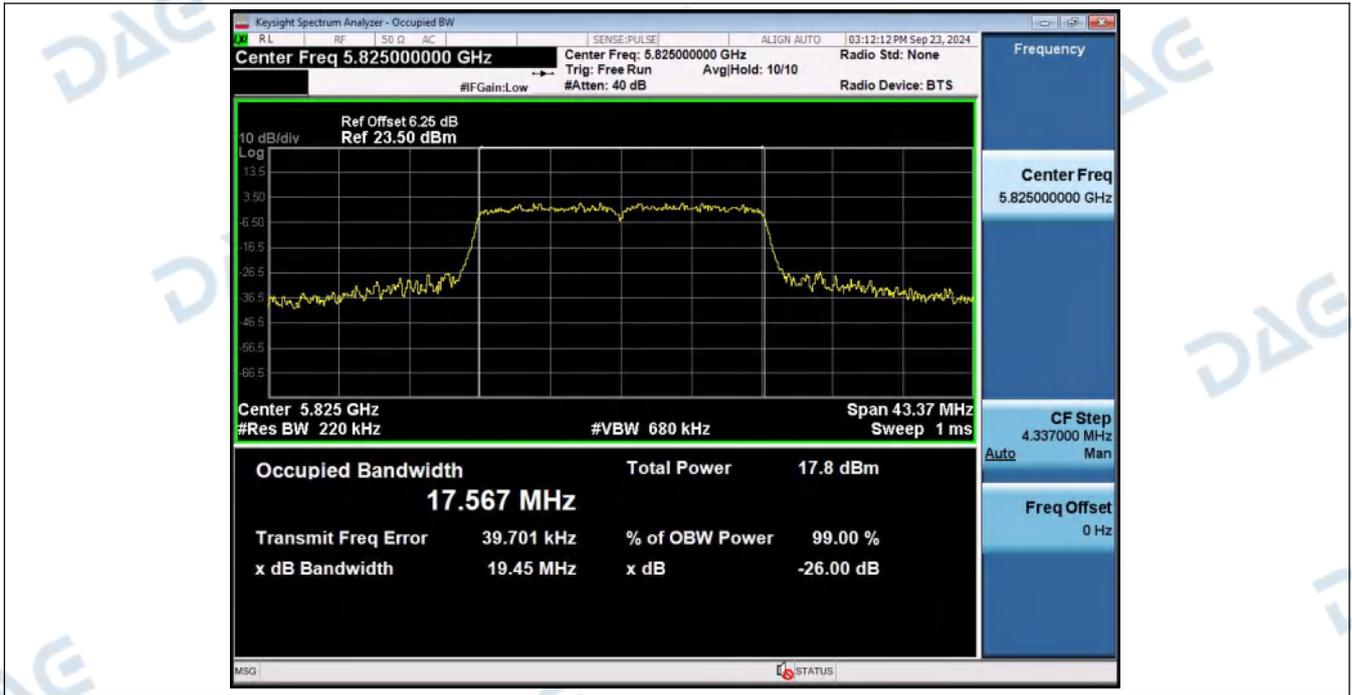


99%\_OCB\_NVNT\_ANT1\_802\_11n(HT40)\_5755

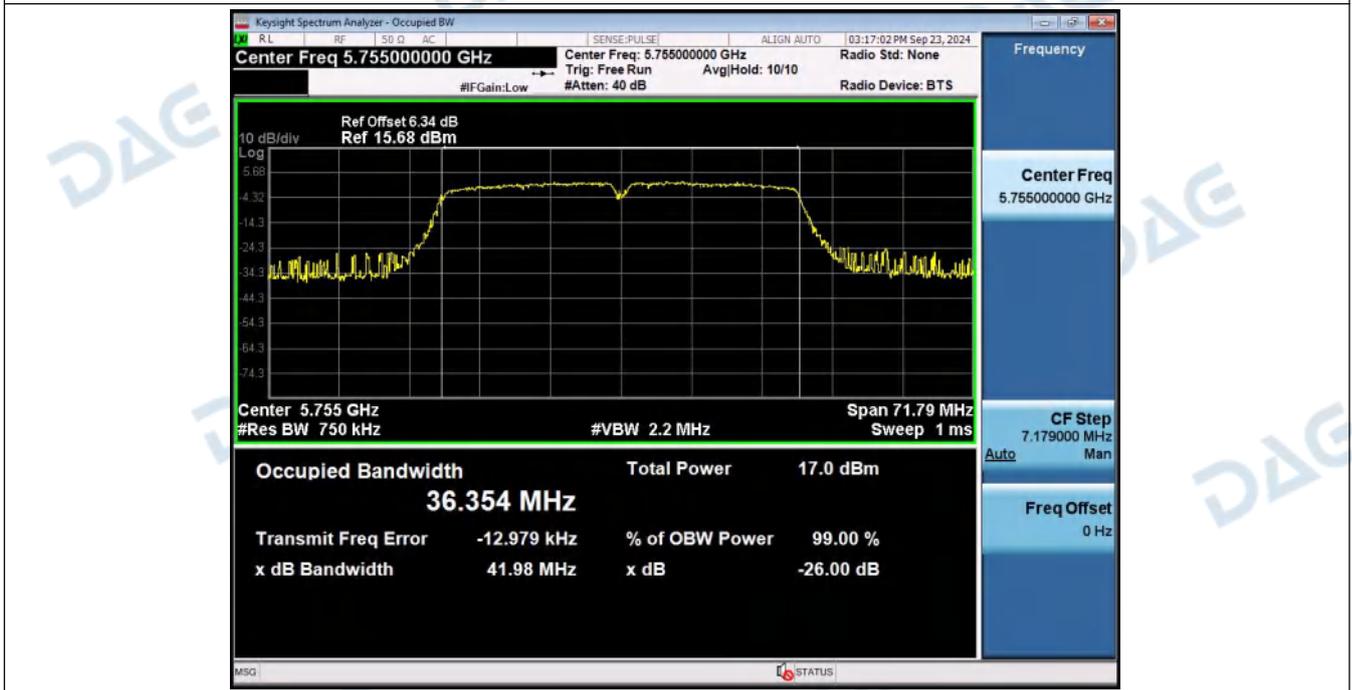


-26BW\_NVNT\_ANT1\_802\_11n(HT40)\_5755

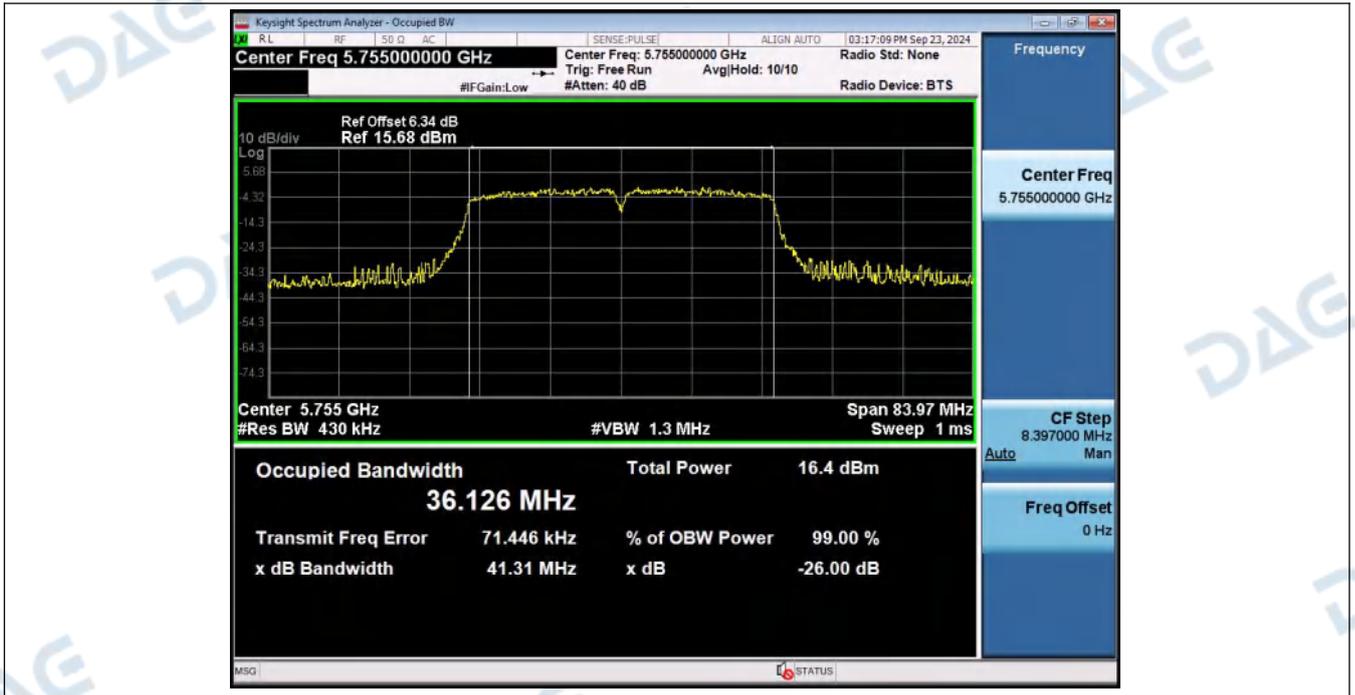


99%\_OCB\_NVNT\_ANT1\_802\_11n(HT40)\_5795

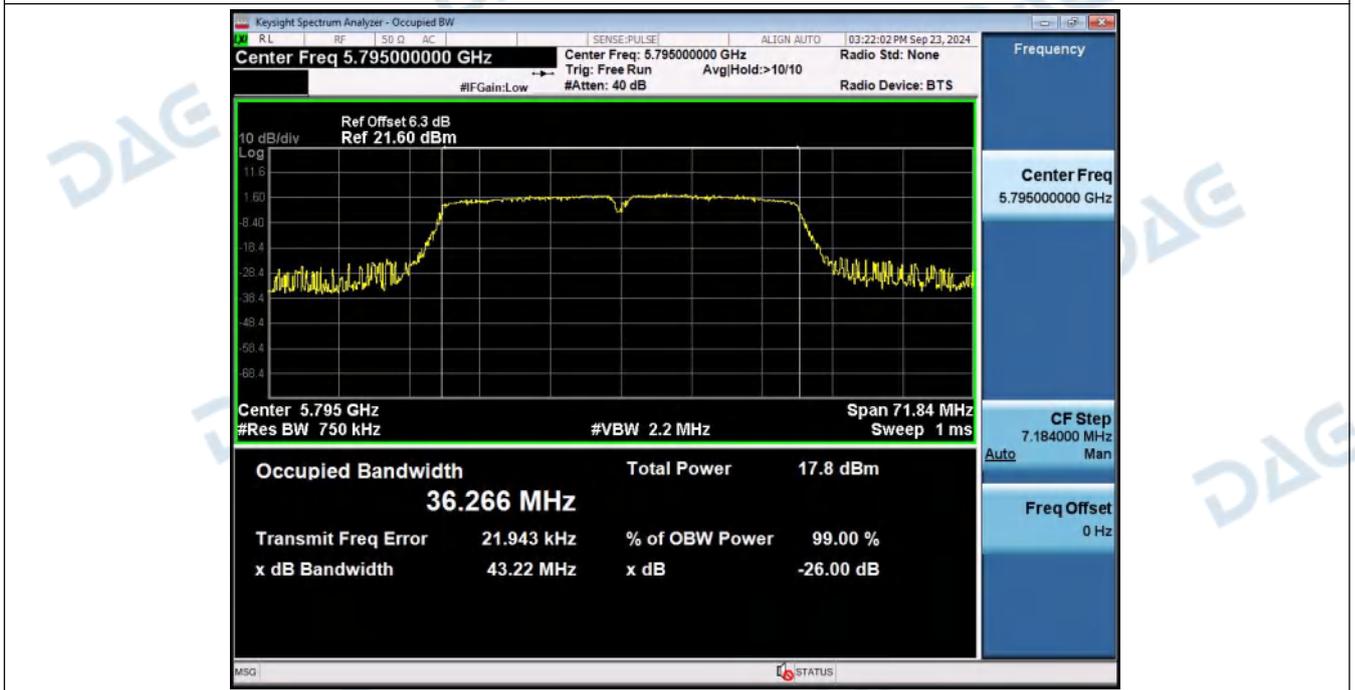


-26BW\_NVNT\_ANT1\_802\_11n(HT40)\_5795

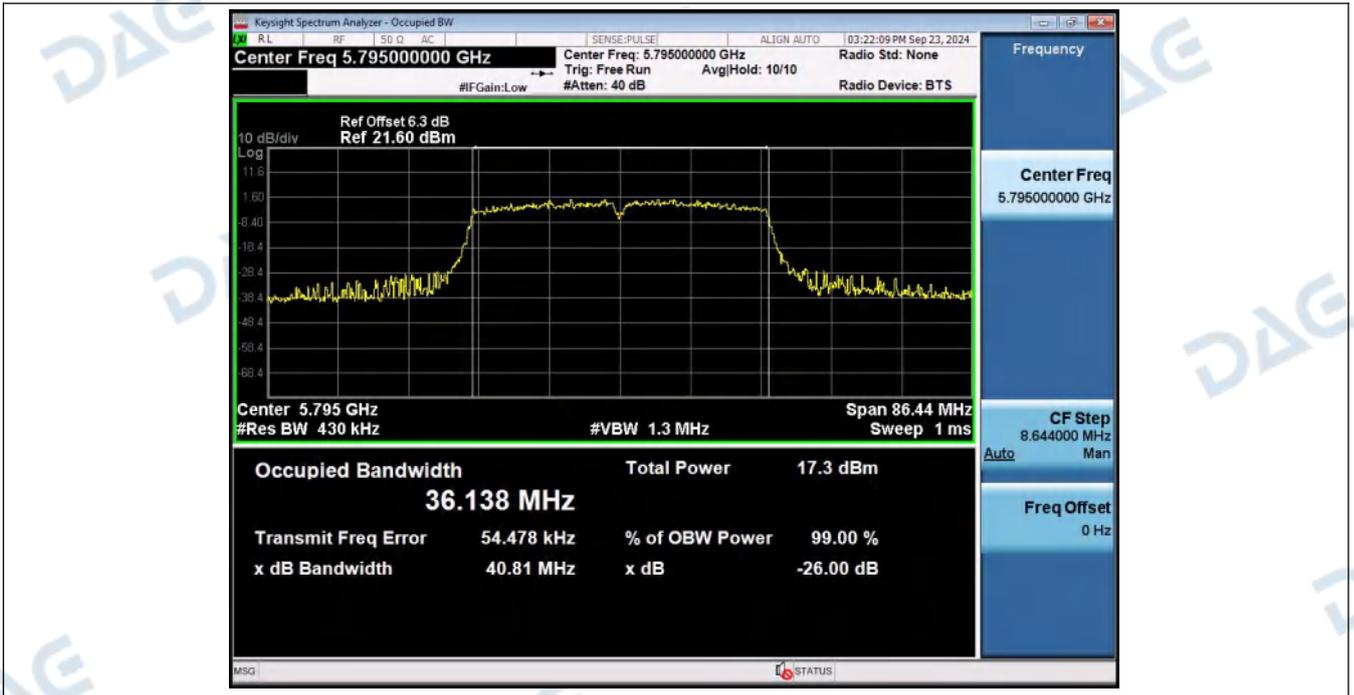


99%\_OCB\_NVNT\_ANT1\_802\_11ac(VHT40)\_5755

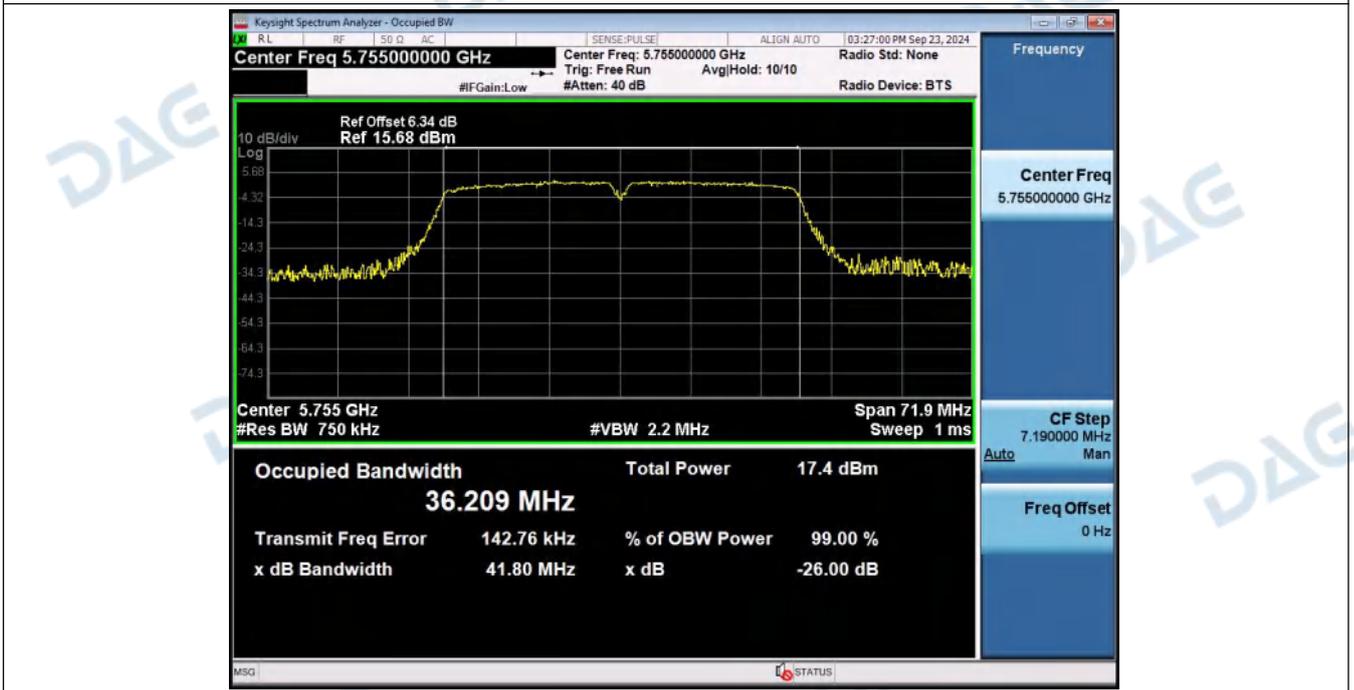


-26BW\_NVNT\_ANT1\_802\_11ac(VHT40)\_5755

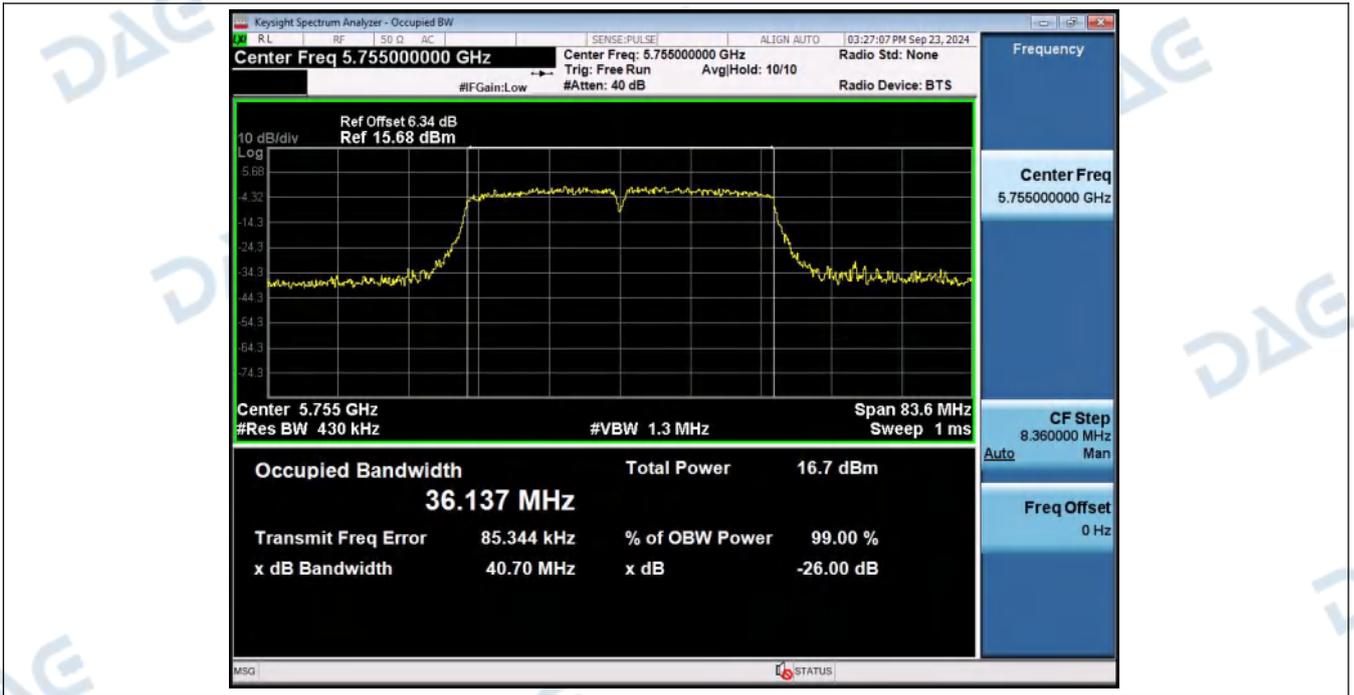

99%\_OCB\_NVNT\_ANT1\_802\_11ac(VHT40)\_5795

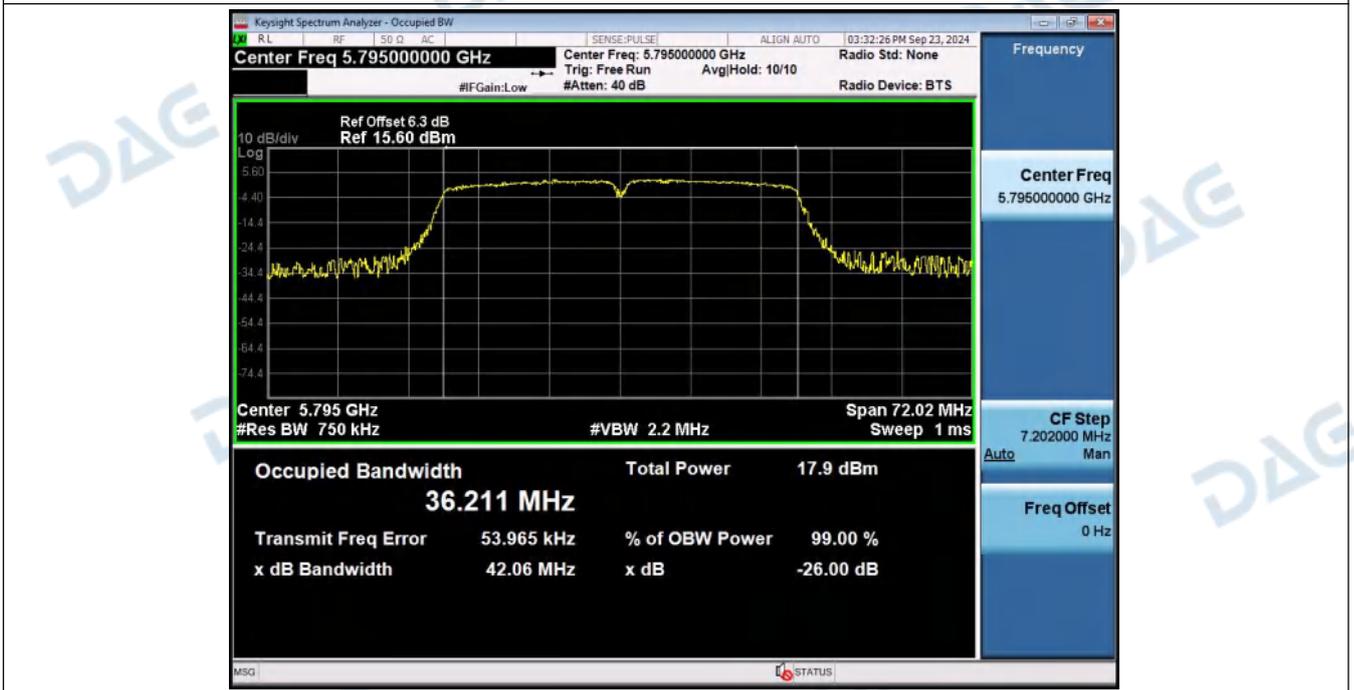


-26BW\_NVNT\_ANT1\_802\_11ac(VHT40)\_5795

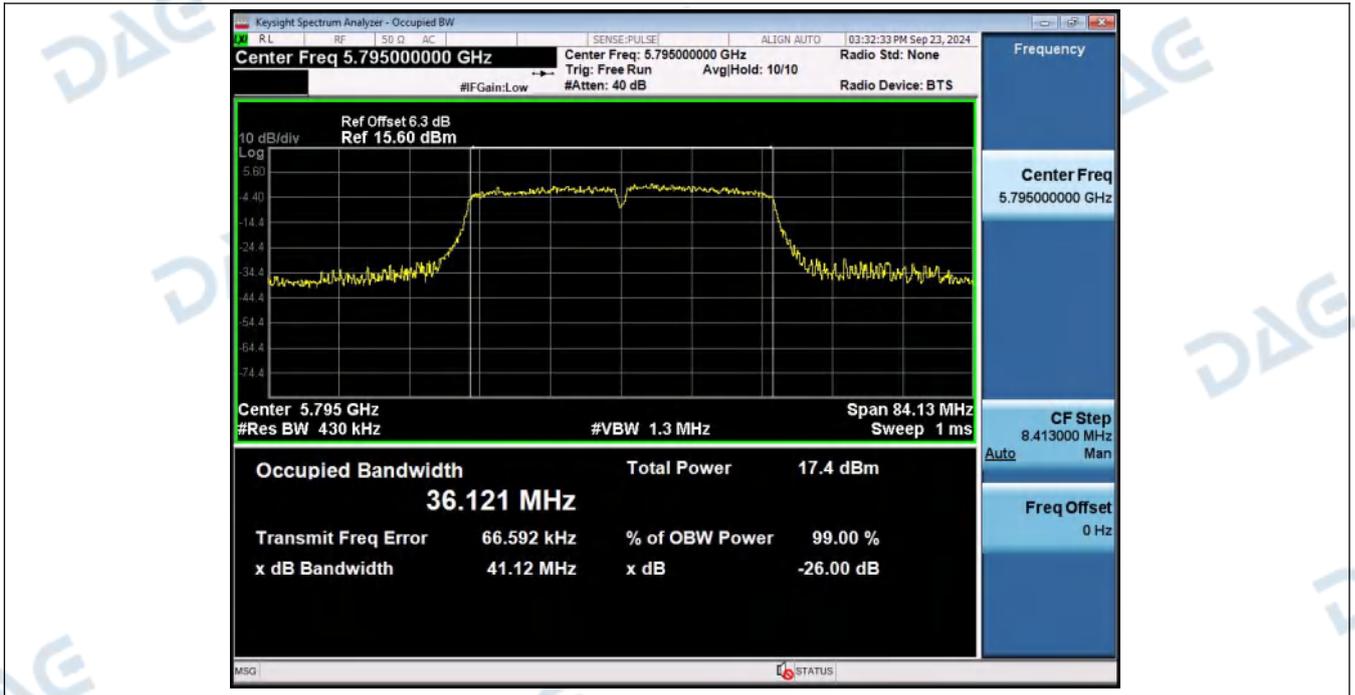

99%\_OCB\_NVNT\_ANT1\_802\_11ac(VHT80)\_5775




-26BW\_NVNT\_ANT1\_802\_11ac(VHT80)\_5775

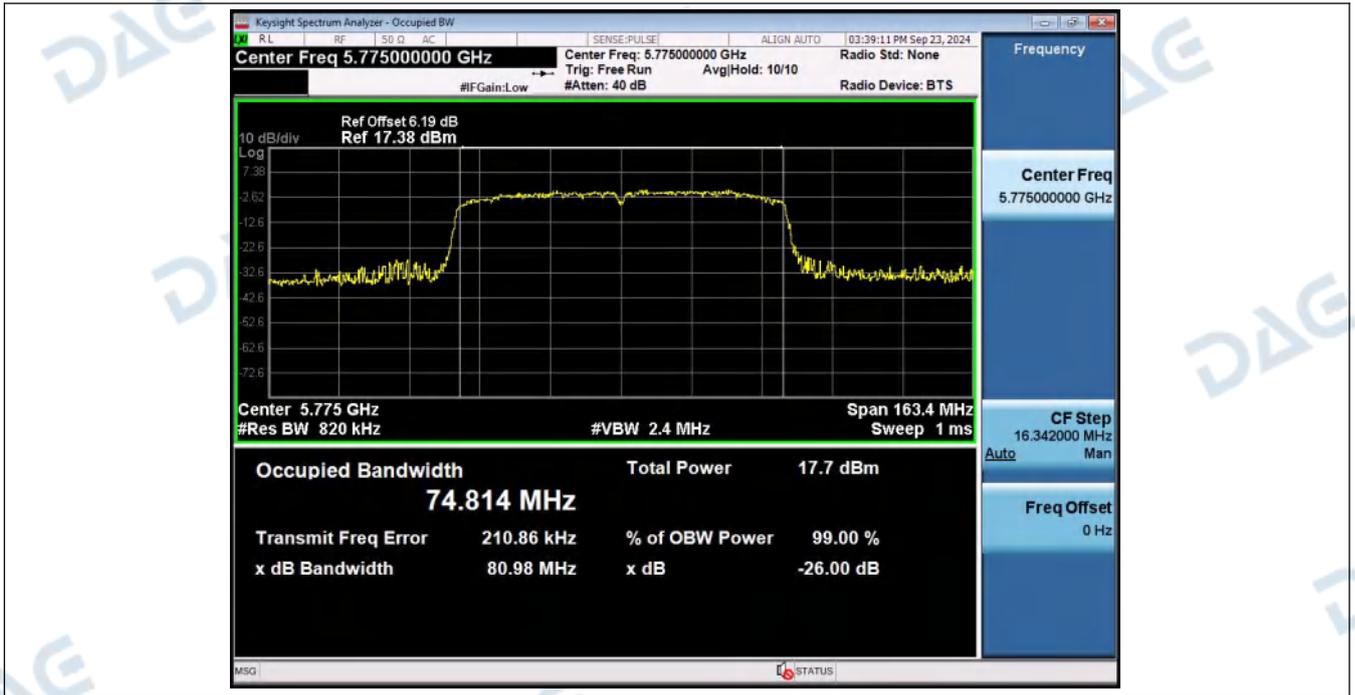

### 3. Maximum Conducted Output Power

Condition	Antenna	Modulation	Frequency (MHz)	Conducted Power(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5745.00	10.13	30	Pass
NVNT	ANT1	802.11a	5785.00	10.38	30	Pass
NVNT	ANT1	802.11a	5825.00	11.12	30	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	8.91	30	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	9.48	30	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	10.39	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	9.04	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	9.49	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	10.09	30	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	8.29	30	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	8.78	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	8.12	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	8.33	30	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	6.82	30	Pass

Maximum\_Conducted\_Output\_Power\_NVNT\_ANT1\_802\_11a\_5745

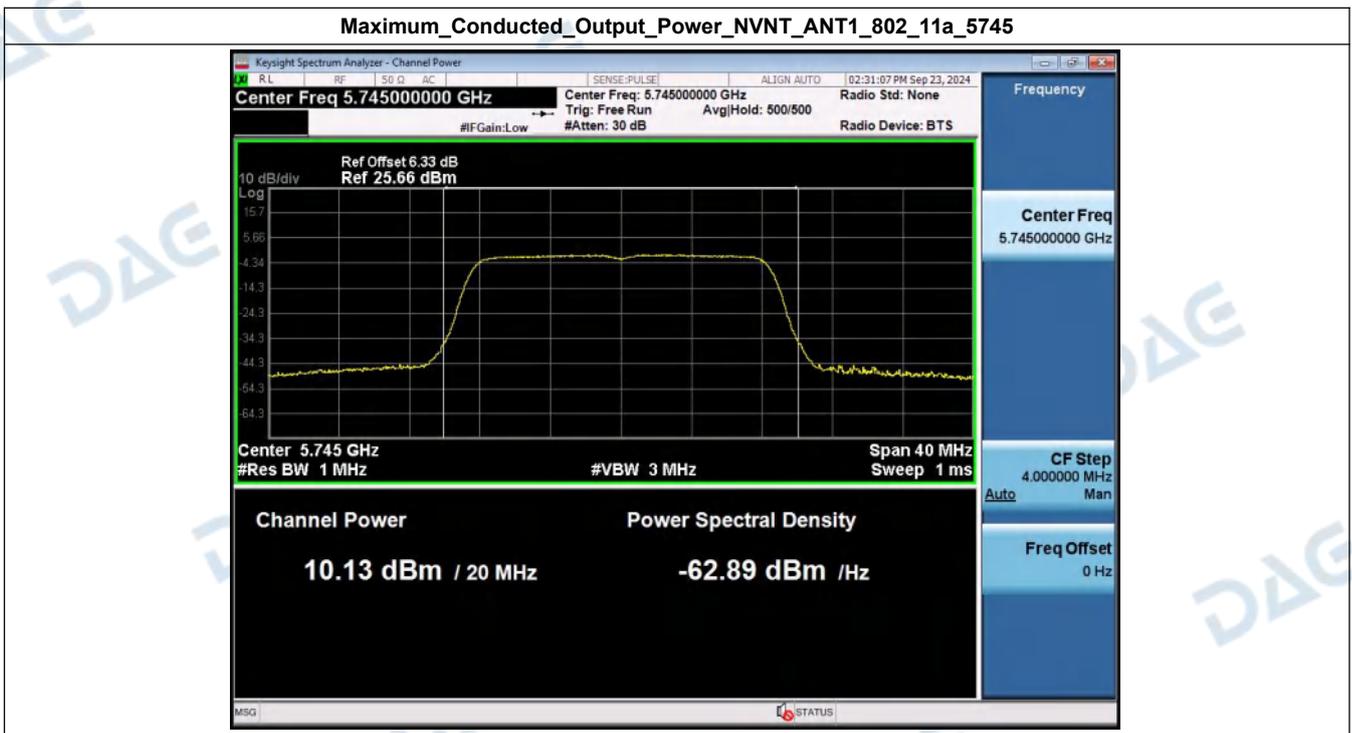

Maximum\_Conducted\_Output\_Power\_NVNT\_ANT1\_802\_11a\_5785




Maximum\_Conducted\_Output\_Power\_NVNT\_ANT1\_802\_11a\_5825



Maximum\_Conducted\_Output\_Power\_NVNT\_ANT1\_802\_11n(HT20)\_5745



Maximum\_Conducted\_Output\_Power\_NVNT\_ANT1\_802\_11n(HT20)\_5785

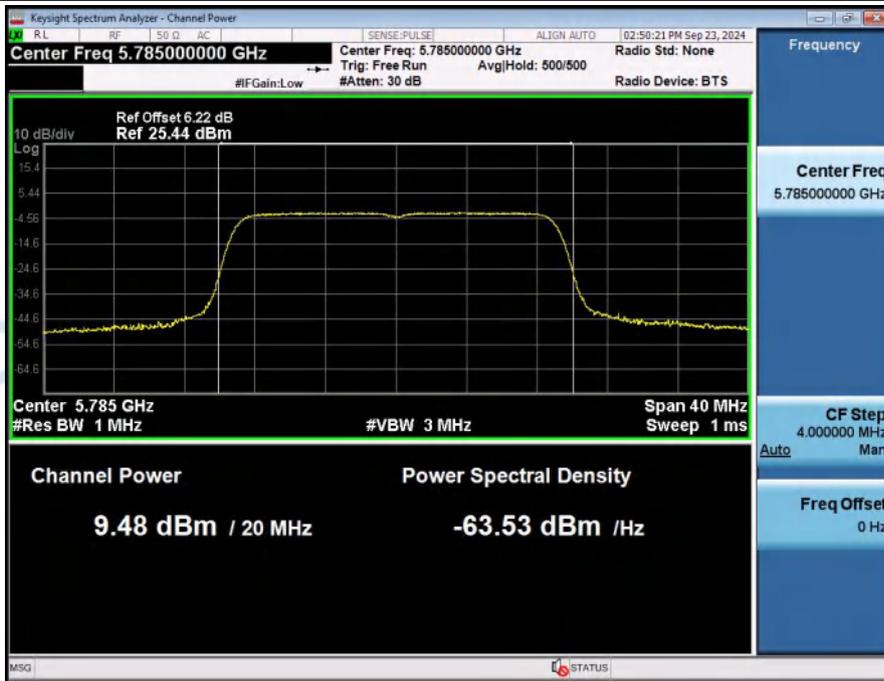

Maximum\_Conducted\_Output\_Power\_NVNT\_ANT1\_802\_11n(HT20)\_5825



Maximum\_Conducted\_Output\_Power\_NVNT\_ANT1\_802\_11ac(VHT20)\_5745



Maximum\_Conducted\_Output\_Power\_NVNT\_ANT1\_802\_11ac(VHT20)\_5785




Maximum\_Conducted\_Output\_Power\_NVNT\_ANT1\_802\_11ac(VHT20)\_5825




Maximum\_Conducted\_Output\_Power\_NVNT\_ANT1\_802\_11n(HT40)\_5755




Maximum\_Conducted\_Output\_Power\_NVNT\_ANT1\_802\_11n(HT40)\_5795

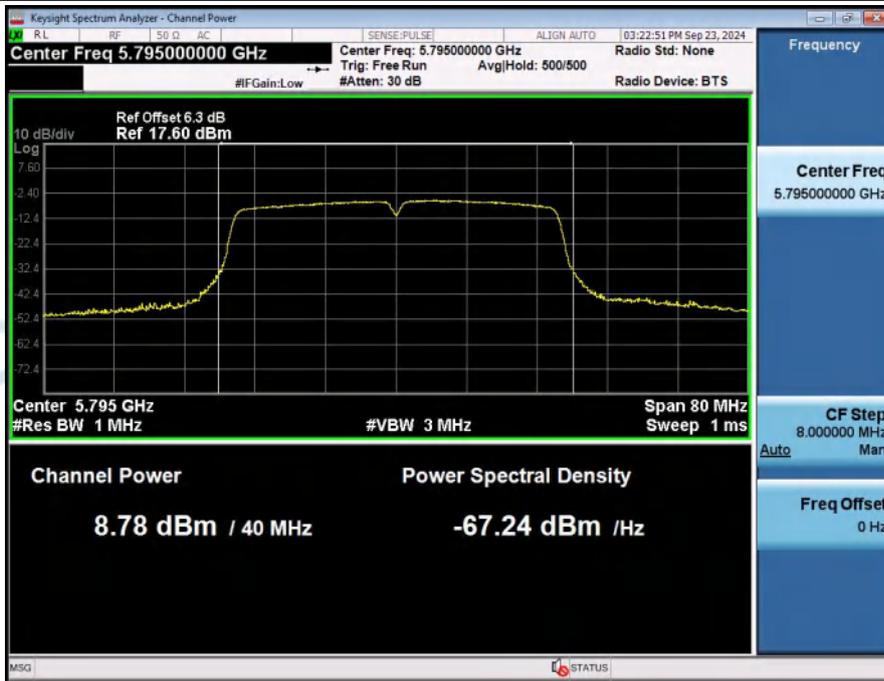


Maximum\_Conducted\_Output\_Power\_NVNT\_ANT1\_802\_11ac(VHT40)\_5755

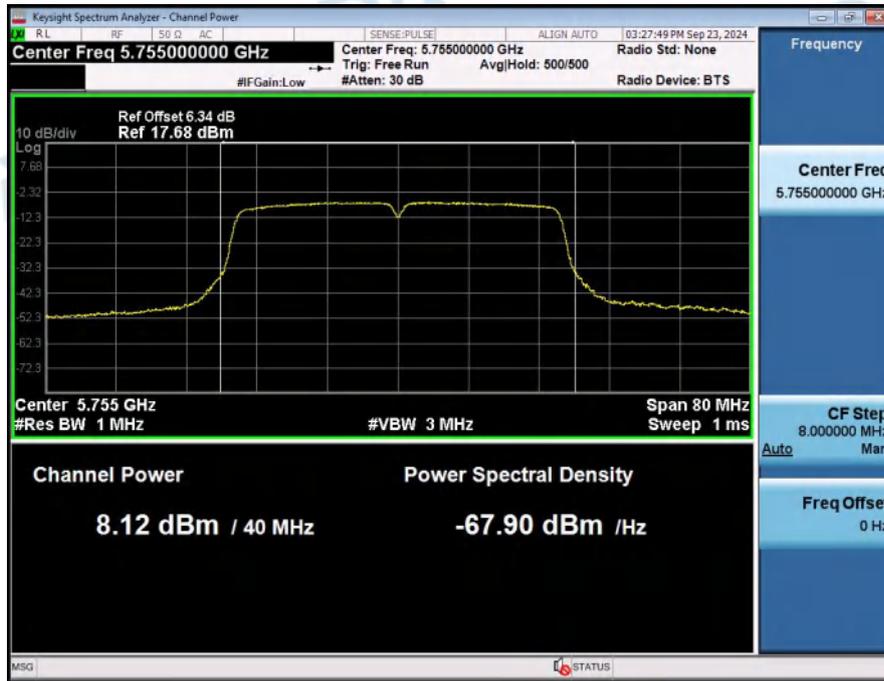

Maximum\_Conducted\_Output\_Power\_NVNT\_ANT1\_802\_11ac(VHT40)\_5795

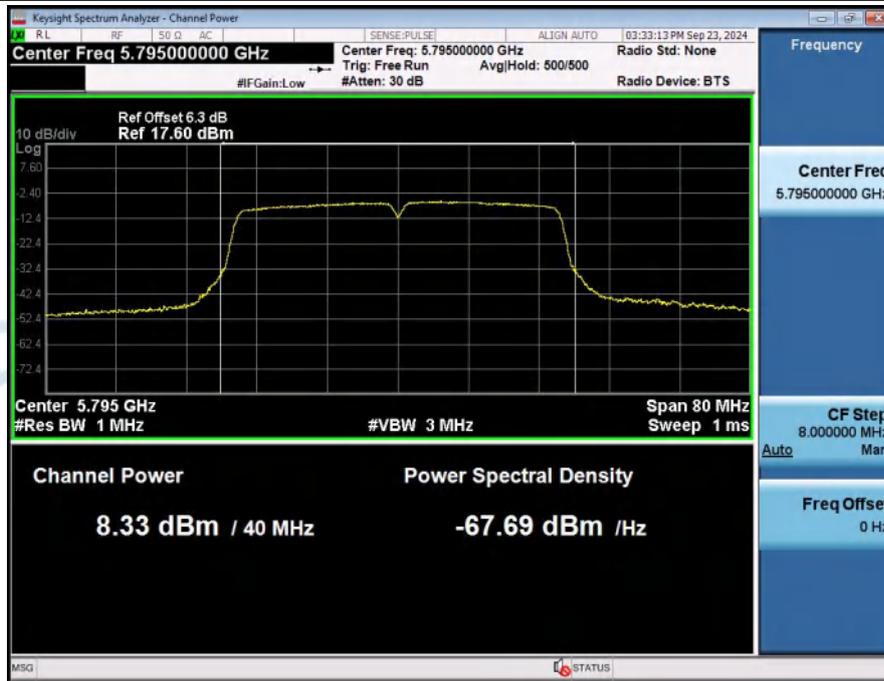

Maximum\_Conducted\_Output\_Power\_NVNT\_ANT1\_802\_11ac(VHT80)\_5775

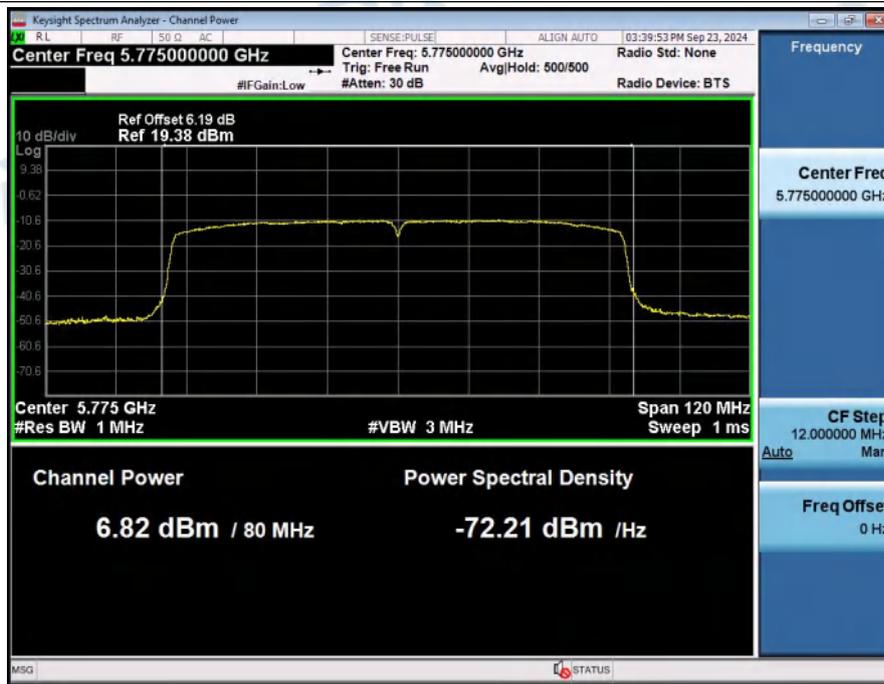


#### 4. Power Spectral Density

Condition	Antenna	Modulation	Frequency (MHz)	PSD_SA (dBm/RBW)	RB factor (dB)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
NVNT	ANT1	802.11a	5745.00	-16.584	-0.086	-16.670	30	Pass
NVNT	ANT1	802.11a	5785.00	-18.275	-0.086	-18.361	30	Pass
NVNT	ANT1	802.11a	5825.00	-19.732	-0.086	-19.818	30	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	-18.866	-0.086	-18.952	30	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	-20.186	-0.086	-20.272	30	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	-19.027	-0.086	-19.113	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	-18.535	-0.086	-18.621	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	-21.216	-0.086	-21.302	30	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	-18.510	-0.086	-18.596	30	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	-35.397	-0.086	-35.483	30	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	-31.424	-0.086	-31.51	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	-30.267	-0.086	-30.353	30	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	-29.862	-0.086	-29.948	30	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	-42.134	-0.086	-42.220	30	Pass

PSD(dBm/500kHz)=PSD\_SA(dBm/510kHz)+RB factor(dB); RB factor(dB)=10\*log(500/510)=-0.086dB

Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11a\_5745

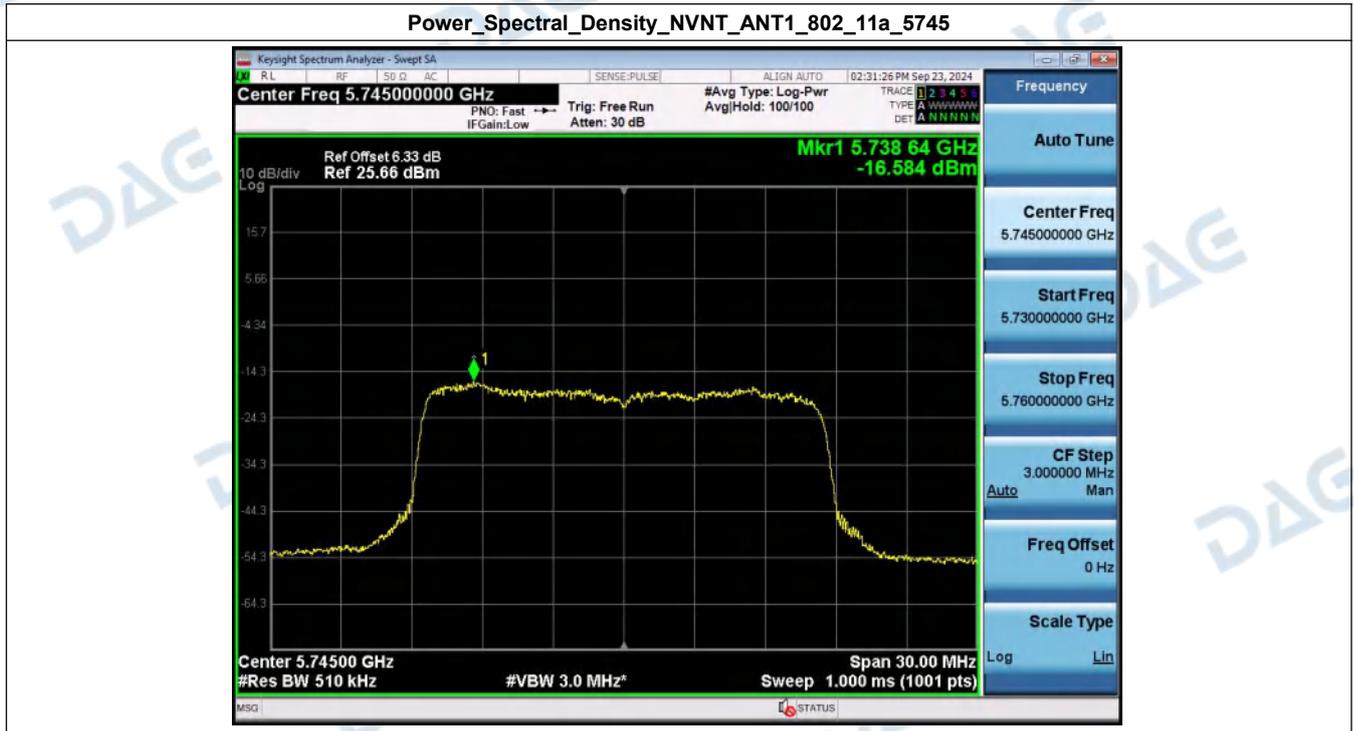

Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11a\_5785



Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11a\_5825



Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11n(HT20)\_5745



Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11n(HT20)\_5785



Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11n(HT20)\_5825




Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11ac(VHT20)\_5745



Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11ac(VHT20)\_5785



Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11ac(VHT20)\_5825

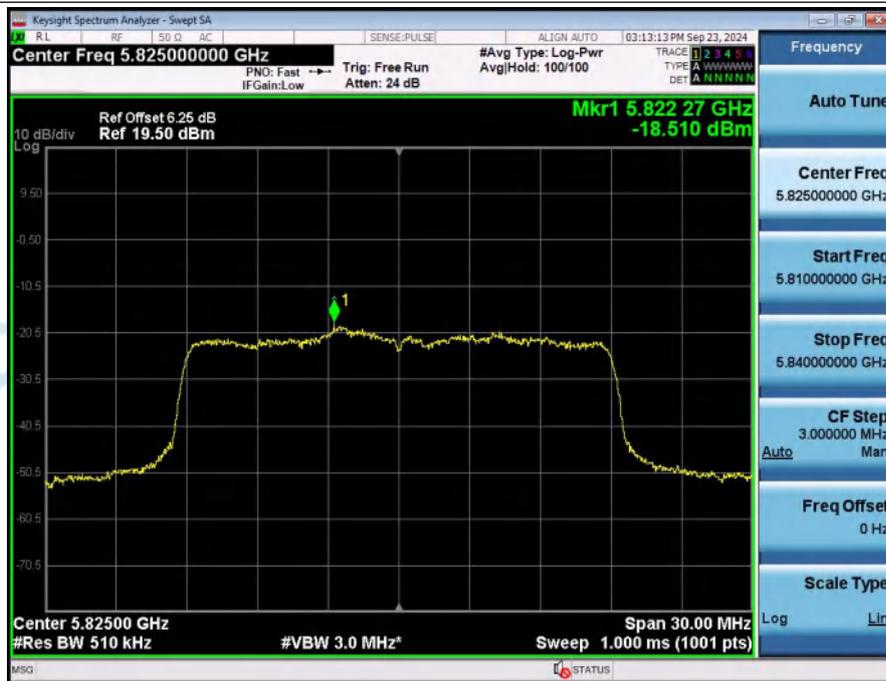

Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11n(HT40)\_5755



Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11n(HT40)\_5795



Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11ac(VHT40)\_5755



Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11ac(VHT40)\_5795



Power\_Spectral\_Density\_NVNT\_ANT1\_802\_11ac(VHT80)\_5775




### 5. Bandedge


Condition	Antenna	Modulation	TX_Frequency (MHz)	Frequency Area(MHz)	Frequency (MHz)	Amplitude (dBm)	Limit (dBm)	Result
NVNT	ANT1	802.11a	LCH	5565-5655	5633.760	-48.54	-27.00	Pass
NVNT	ANT1	802.11a	LCH	5655-5700	5663.370	-48.72	-20.12	Pass
NVNT	ANT1	802.11a	LCH	5700-5720	5719.320	-43.79	15.41	Pass
NVNT	ANT1	802.11a	LCH	5720-5725	5721.120	-40.04	18.15	Pass
NVNT	ANT1	802.11a	HCH	5850-5855	5854.370	-43.33	17.04	Pass
NVNT	ANT1	802.11a	HCH	5855-5875	5858.200	-44.48	14.70	Pass
NVNT	ANT1	802.11a	HCH	5875-5920	5913.655	-48.32	-21.78	Pass
NVNT	ANT1	802.11a	HCH	5920-6005	5924.930	-44.75	-27.00	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5565-5655	5642.760	-48.67	-27.00	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5655-5700	5669.535	-49.23	-15.05	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5700-5720	5701.300	-47.95	10.36	Pass
NVNT	ANT1	802.11n(HT20)	LCH	5720-5725	5723.240	-44.97	22.99	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5850-5855	5850.935	-44.46	24.87	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5855-5875	5872.940	-47.49	10.58	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5875-5920	5910.145	-48.27	-18.90	Pass
NVNT	ANT1	802.11n(HT20)	HCH	5920-6005	5935.640	-42.28	-27.00	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5565-5655	5648.250	-48.95	-27.00	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5655-5700	5667.150	-48.95	-17.01	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5700-5720	5712.120	-47.89	13.39	Pass
NVNT	ANT1	802.11ac(VHT20)	LCH	5720-5725	5721.335	-44.79	18.64	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5850-5855	5850.245	-42.75	26.44	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5855-5875	5860.380	-47.02	14.09	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5875-5920	5914.060	-48.44	-22.12	Pass
NVNT	ANT1	802.11ac(VHT20)	HCH	5920-6005	5931.645	-44.04	-27.00	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5595-5655	5606.580	-48.35	-27.00	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5655-5700	5666.700	-49.05	-17.38	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5700-5720	5717.100	-39.40	14.79	Pass
NVNT	ANT1	802.11n(HT40)	LCH	5720-5725	5720.045	-37.87	15.70	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5850-5855	5854.730	-46.12	16.22	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5855-5875	5865.640	-46.75	12.62	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5875-5920	5918.200	-47.77	-25.52	Pass
NVNT	ANT1	802.11n(HT40)	HCH	5920-5955	5944.885	-43.51	-27.00	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5595-5655	5653.380	-48.47	-27.00	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5655-5700	5658.690	-49.05	-23.97	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5700-5720	5718.260	-41.65	15.11	Pass
NVNT	ANT1	802.11ac(VHT40)	LCH	5720-5725	5720.550	-41.97	16.85	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5850-5855	5854.440	-47.05	16.88	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5855-5875	5871.920	-47.58	10.86	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5875-5920	5914.870	-47.96	-22.78	Pass
NVNT	ANT1	802.11ac(VHT40)	HCH	5920-5955	5935.575	-43.64	-27.00	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5650-5655	5652.290	-48.62	-27.00	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5655-5700	5678.805	-48.72	-7.43	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5700-5720	5715.560	-38.72	14.36	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5720-5725	5722.525	-34.60	21.36	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5850-5855	5854.340	-40.56	17.10	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5855-5875	5864.200	-39.16	13.02	Pass
NVNT	ANT1	802.11ac(VHT80)	MCH	5875-5920	5909.020	-47.48	-17.97	Pass

NVNT	ANT1	802.11ac(VHT80)	MCH	5920-5925	5921.980	-42.22	-27.00	Pass
------	------	-----------------	-----	-----------	----------	--------	--------	------

**Bandedge\_NVNT\_ANT1\_802\_11a\_5745**

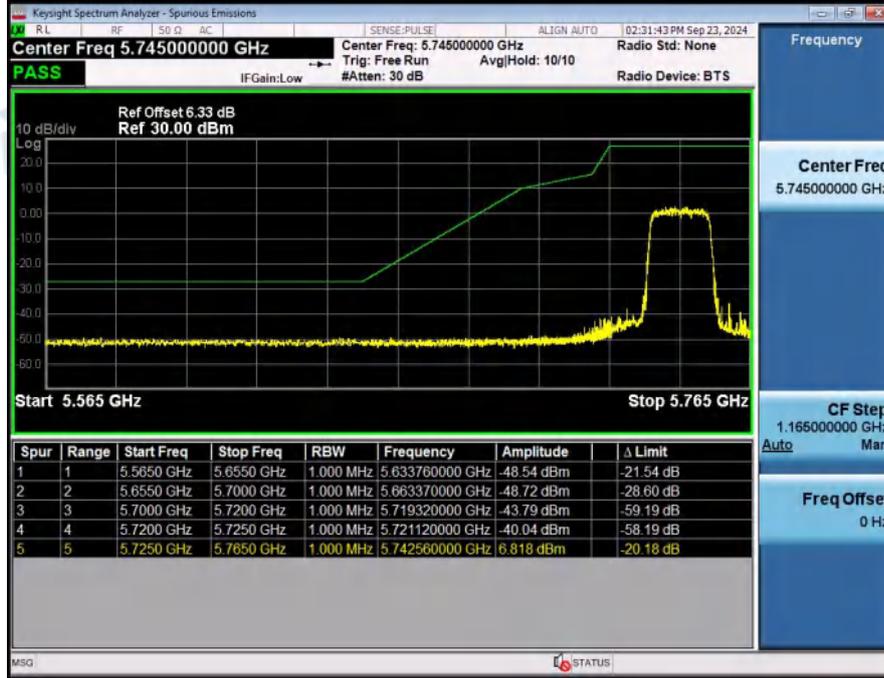


**Bandedge\_NVNT\_ANT1\_802\_11a\_5825**

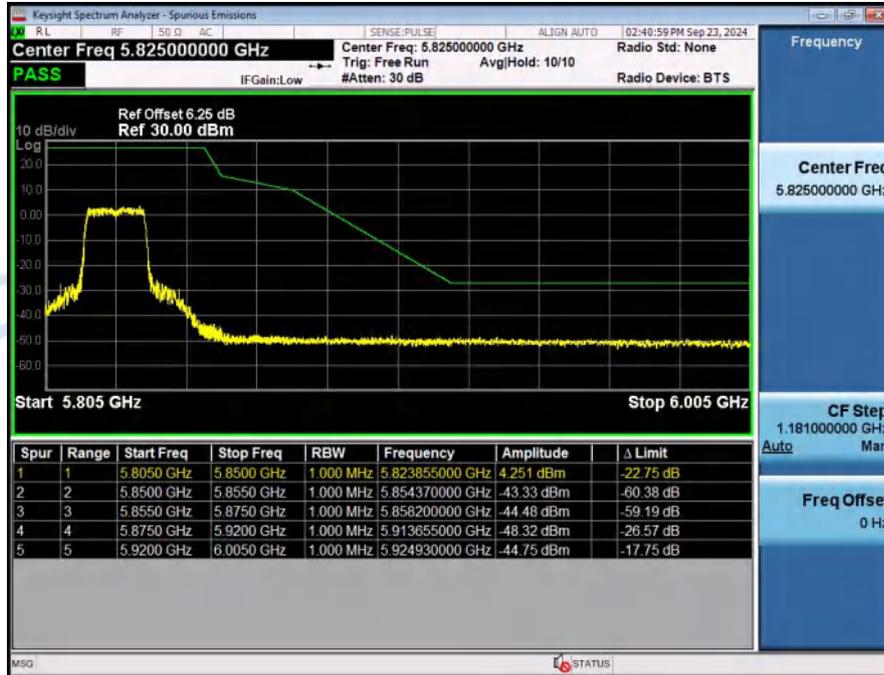


**Bandedge\_NVNT\_ANT1\_802\_11n(HT20)\_5745**



**Bandedge\_NVNT\_ANT1\_802\_11n(HT20)\_5825**

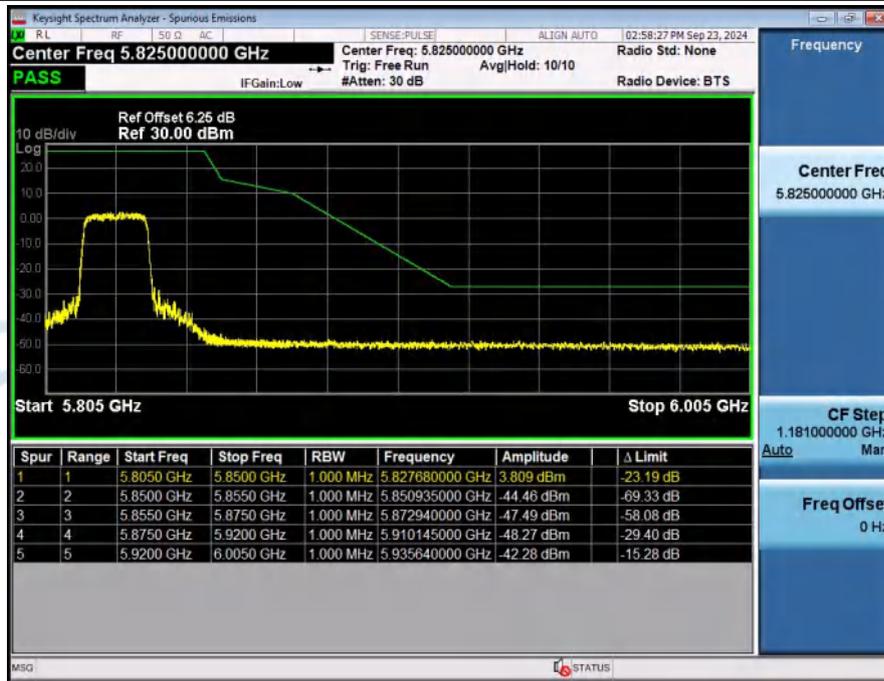


Bandedge\_NVNT\_ANT1\_802\_11ac(VHT20)\_5745

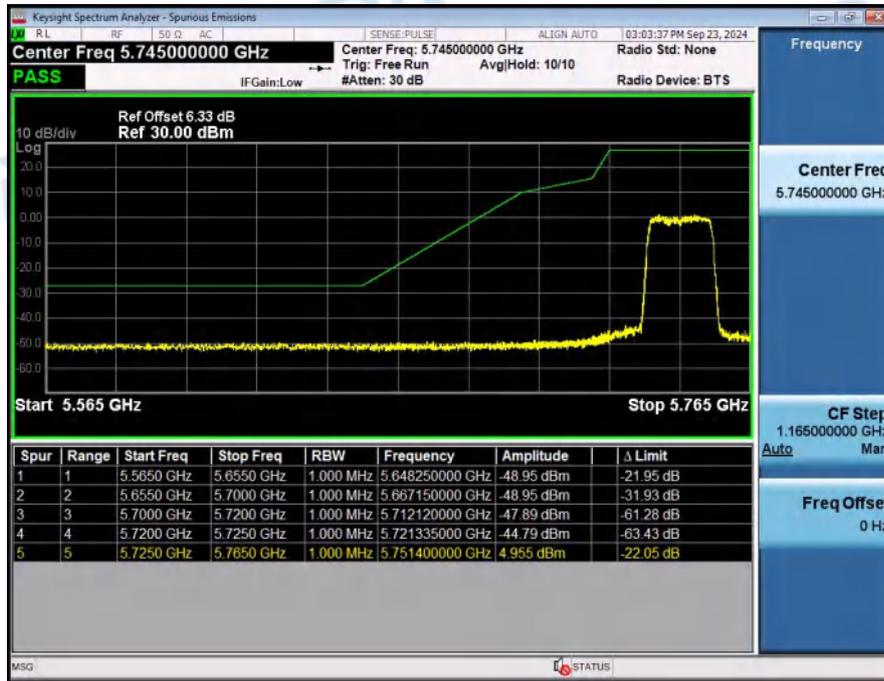

Bandedge\_NVNT\_ANT1\_802\_11ac(VHT20)\_5825




Bandedge\_NVNT\_ANT1\_802\_11n(HT40)\_5755

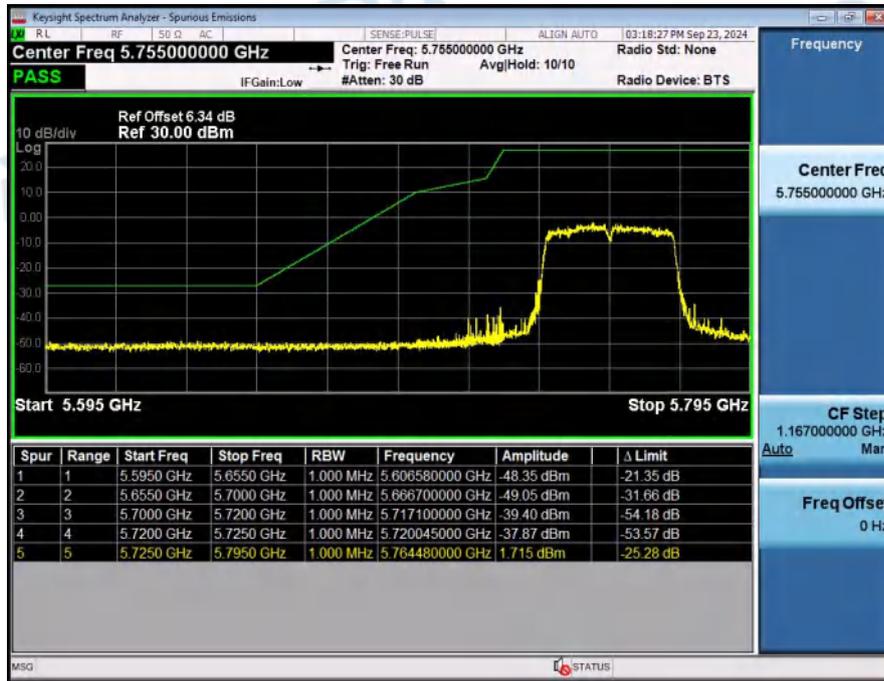

Bandedge\_NVNT\_ANT1\_802\_11n(HT40)\_5795




Bandedge\_NVNT\_ANT1\_802\_11ac(VHT40)\_5755

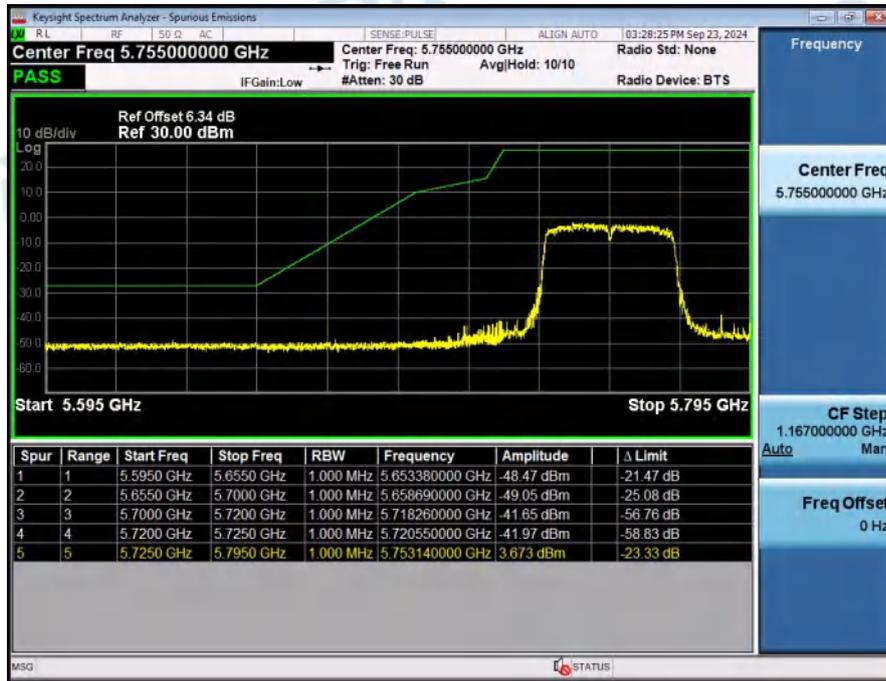

Bandedge\_NVNT\_ANT1\_802\_11ac(VHT40)\_5795



Bandedge\_NVNT\_ANT1\_802\_11ac(VHT80)\_5775\_low

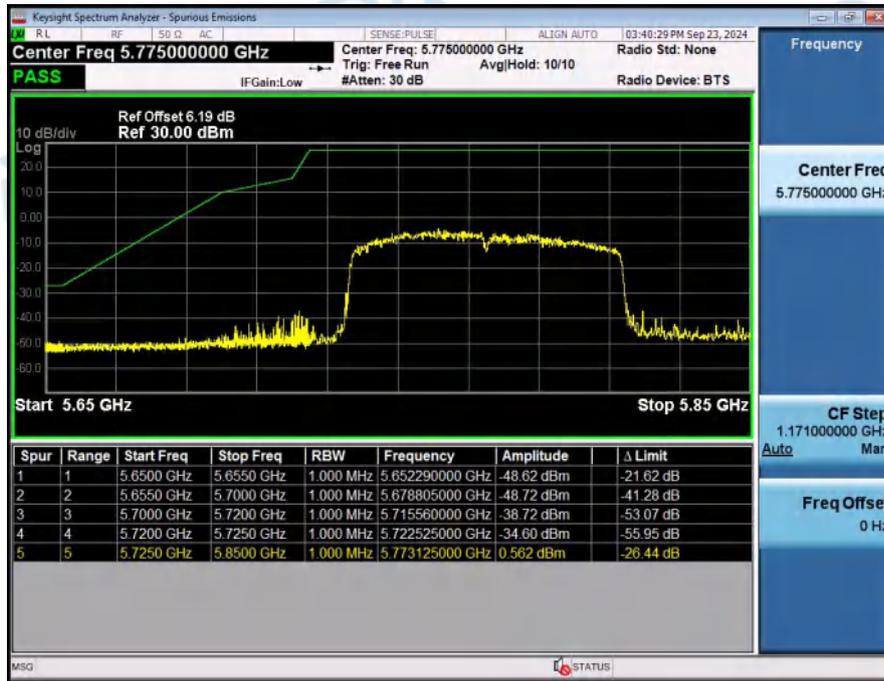


Bandedge\_NVNT\_ANT1\_802\_11ac(VHT80)\_5775\_up



### 6. Spurious Emission

Condition	Antenna	Modulation	TX_Frequency (MHz)	Max. Mark Frequency(MHz)	Spurious level(dBm)	limit(dBm)	Result
NVNT	ANT1	802.11a	5745.00	24165.35	-37.81	-27	Pass
NVNT	ANT1	802.11a	5785.00	24430.05	-38.49	-27	Pass
NVNT	ANT1	802.11a	5825.00	24212.99	-37.51	-27	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	23940.35	-38.71	-27	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	23943.00	-38.23	-27	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	24255.34	-39.34	-27	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	24215.64	-38.77	-27	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	24252.70	-38.08	-27	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	24461.81	-39.20	-27	Pass
NVNT	ANT1	802.11n(HT40)	5755.00	24279.17	-38.56	-27	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	24559.75	-38.57	-27	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	24398.28	-38.12	-27	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	24485.63	-38.52	-27	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	24183.88	-37.69	-27	Pass


Spurious\_Emission\_NVNT\_ANT1\_802\_11a\_5745

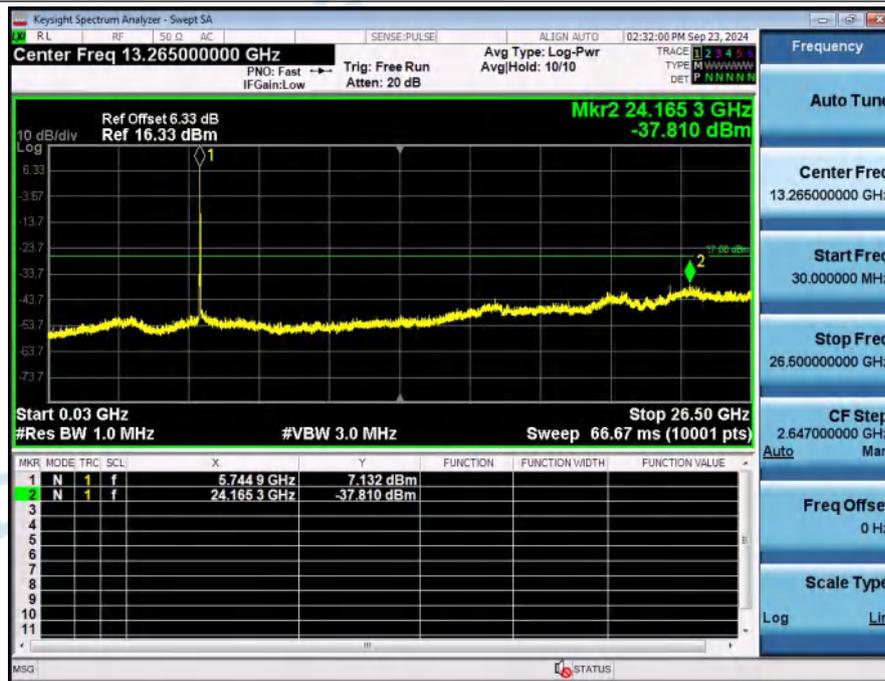


Spurious\_Emission\_NVNT\_ANT1\_802\_11a\_5785




Spurious\_Emission\_NVNT\_ANT1\_802\_11a\_5825

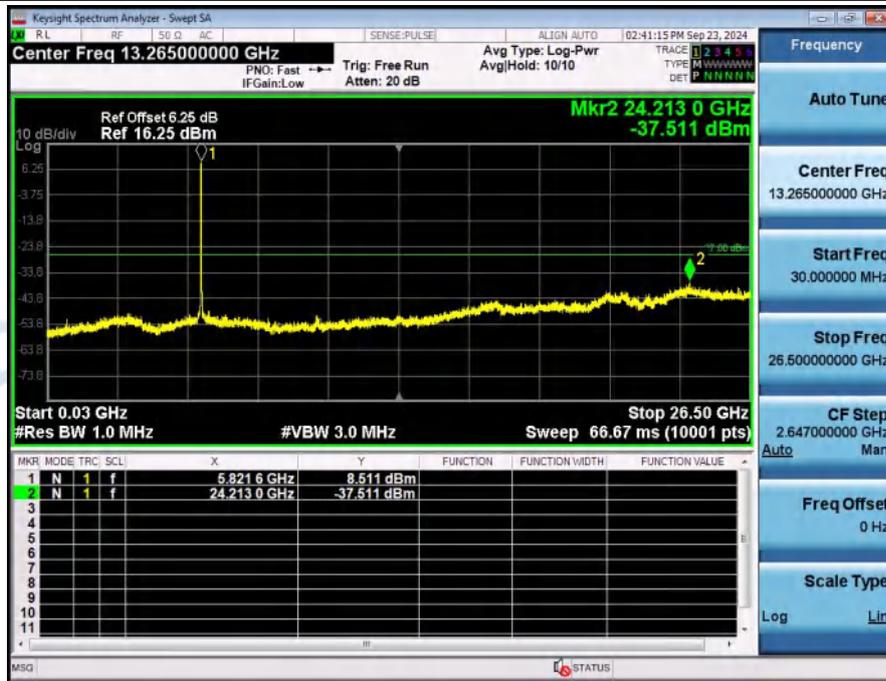


Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT20)\_5745

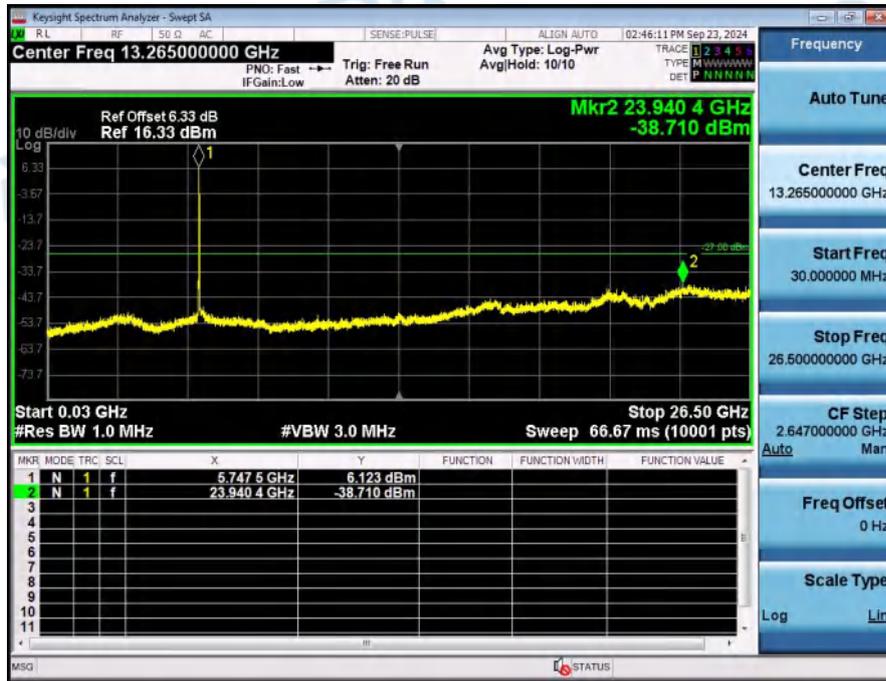


Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT20)\_5785

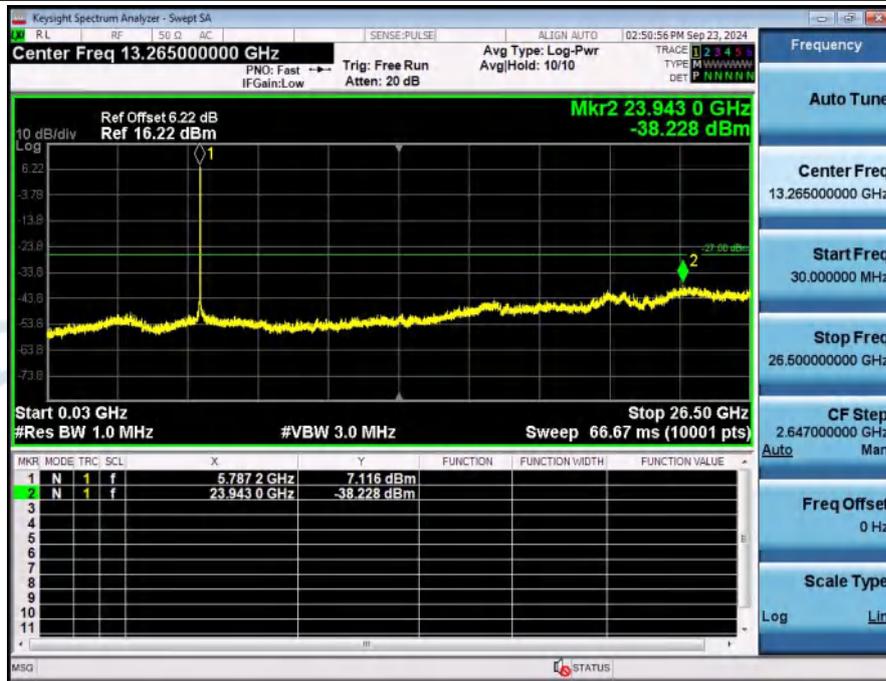


Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT20)\_5825

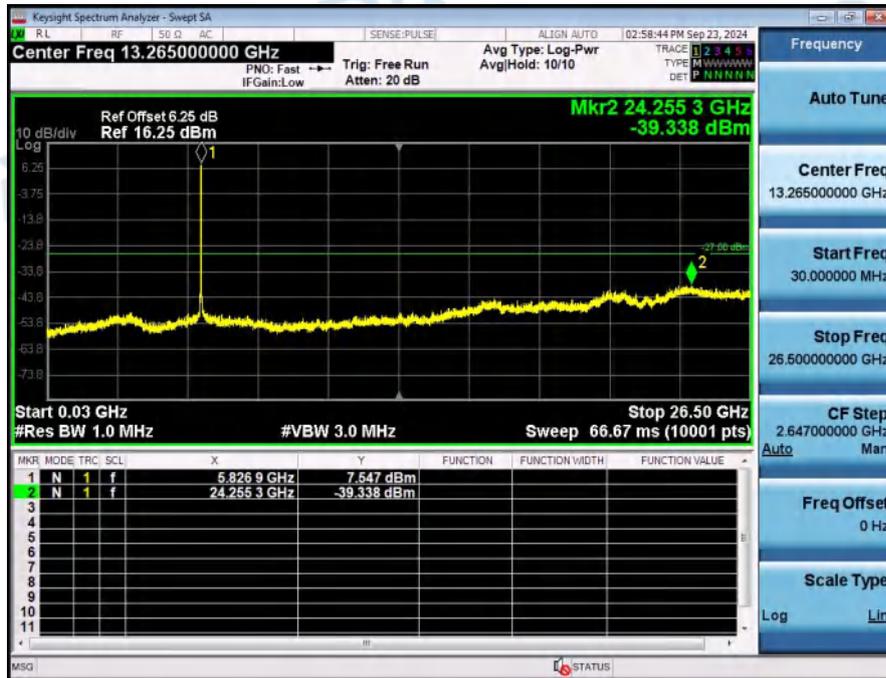


Spurious\_Emission\_NVNT\_ANT1\_802\_11ac(VHT20)\_5745

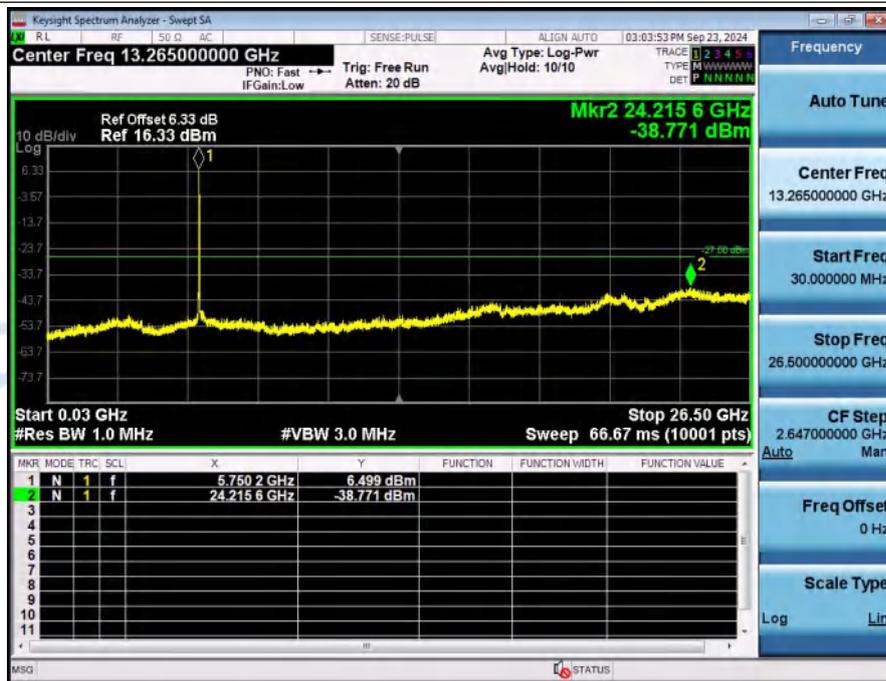


Spurious\_Emission\_NVNT\_ANT1\_802\_11ac(VHT20)\_5785

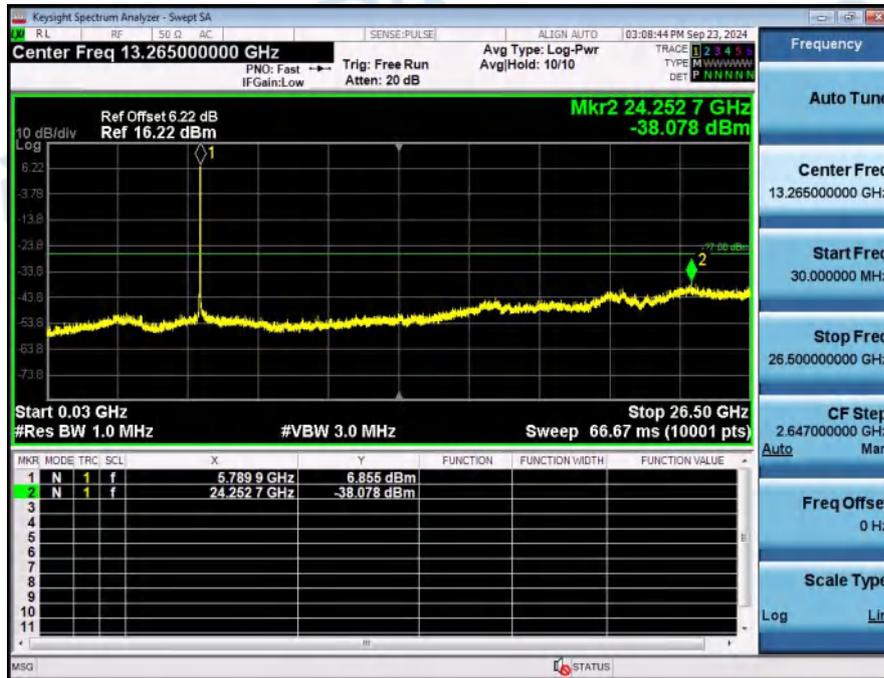


Spurious\_Emission\_NVNT\_ANT1\_802\_11ac(VHT20)\_5825

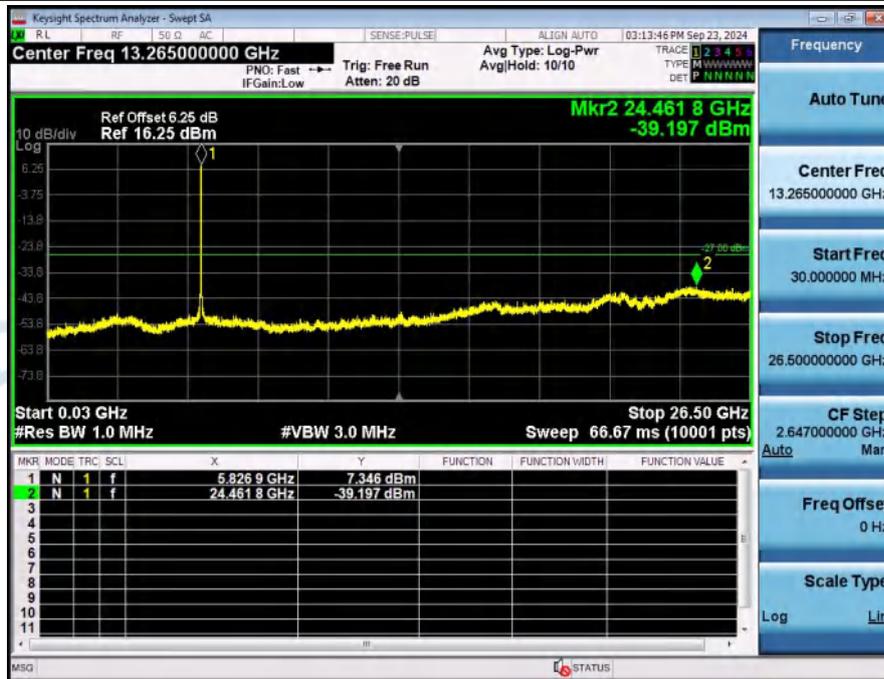


Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT40)\_5755

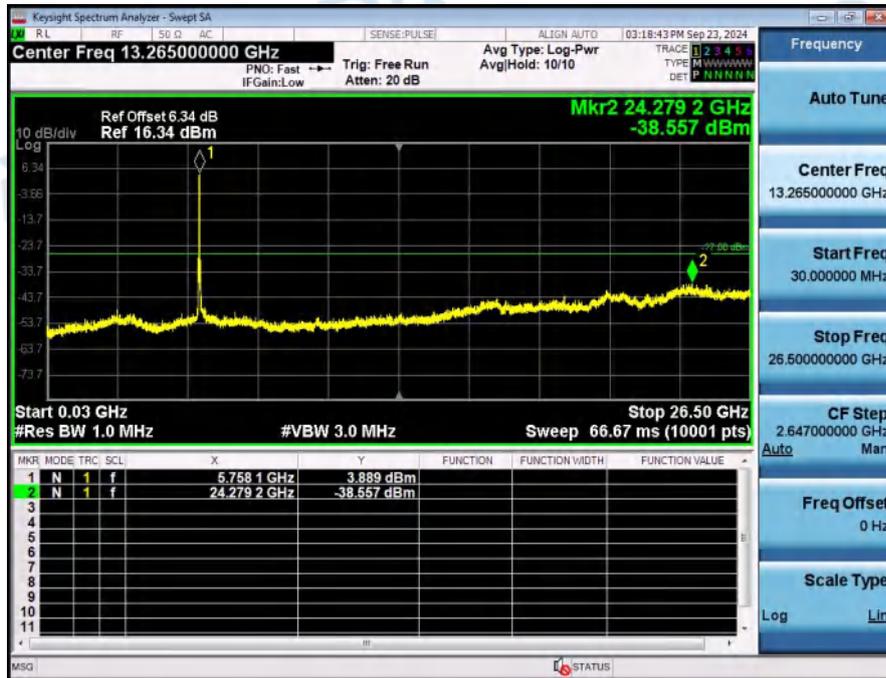


Spurious\_Emission\_NVNT\_ANT1\_802\_11n(HT40)\_5795

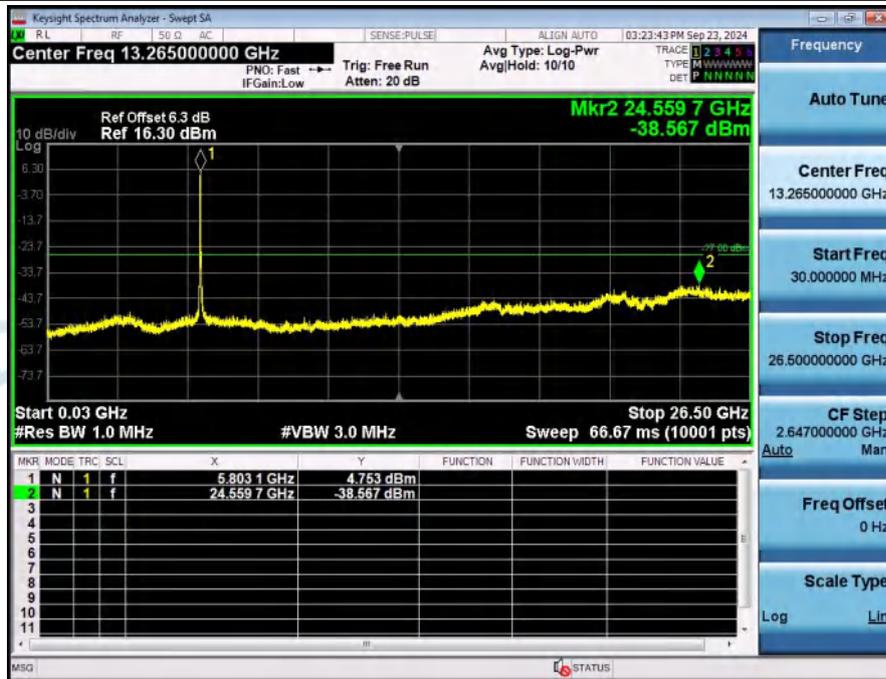


Spurious\_Emission\_NVNT\_ANT1\_802\_11ac(VHT40)\_5755

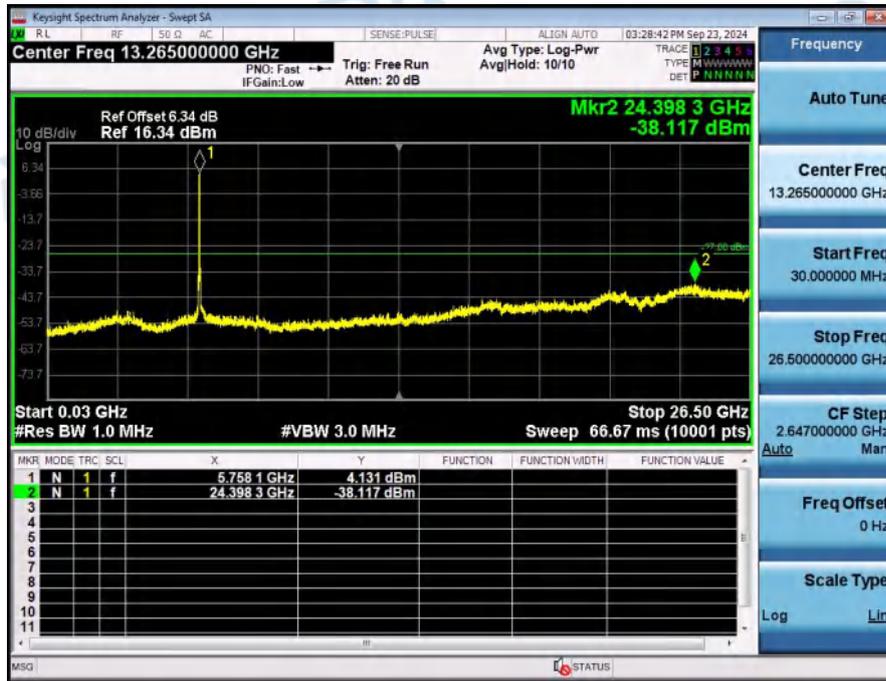

Spurious\_Emission\_NVNT\_ANT1\_802\_11ac(VHT40)\_5795

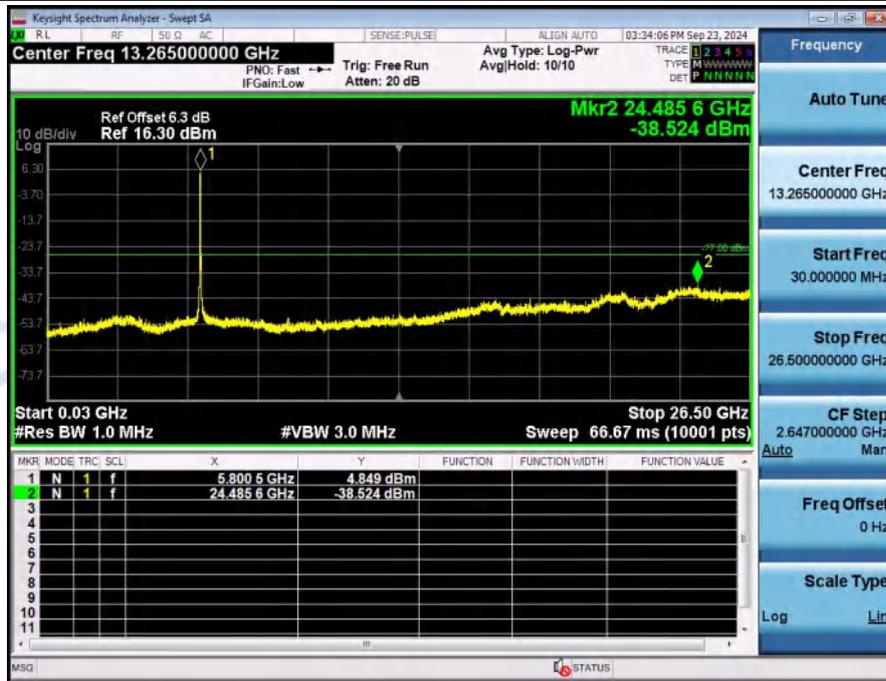

Spurious\_Emission\_NVNT\_ANT1\_802\_11ac(VHT80)\_5775

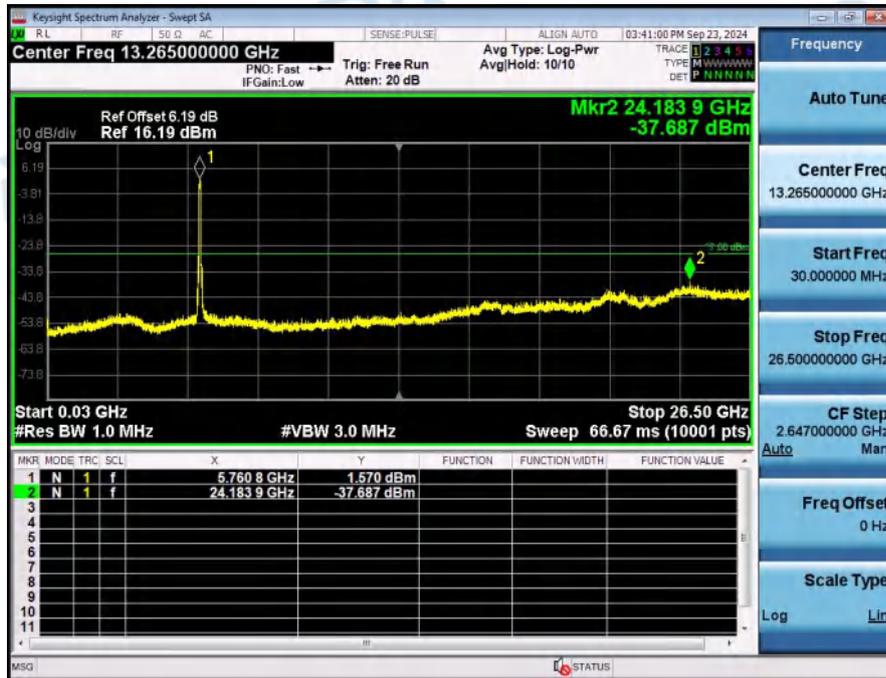

### 7. Frequency Stability

Condition	Antenna	Modulation	Frequency (MHz)	Fc(MHz)	Fl(MHz)	Fh(MHz)	Limit(MHz)	Result
NVHT	ANT1	802.11a	5745.00	5745.030	5736.668	5753.392	5725~5850	Pass
NVLT	ANT1	802.11a	5745.00	5745.022	5736.828	5753.216	5725~5850	Pass
NVNT	ANT1	802.11a	5745.00	5745.022	5736.912	5753.132	5725~5850	Pass
HVNT	ANT1	802.11a	5745.00	5745.020	5736.976	5753.064	5725~5850	Pass
LVNT	ANT1	802.11a	5745.00	5745.024	5737.040	5753.008	5725~5850	Pass
NVHT	ANT1	802.11a	5785.00	5785.028	5777.132	5792.924	5725~5850	Pass
NVLT	ANT1	802.11a	5785.00	5785.026	5777.180	5792.872	5725~5850	Pass
NVNT	ANT1	802.11a	5785.00	5785.024	5777.228	5792.820	5725~5850	Pass
HVNT	ANT1	802.11a	5785.00	5785.030	5777.284	5792.776	5725~5850	Pass
LVNT	ANT1	802.11a	5785.00	5785.028	5777.340	5792.716	5725~5850	Pass
NVHT	ANT1	802.11a	5825.00	5825.038	5817.148	5832.928	5725~5850	Pass
NVLT	ANT1	802.11a	5825.00	5825.038	5817.208	5832.868	5725~5850	Pass
NVNT	ANT1	802.11a	5825.00	5825.032	5817.260	5832.804	5725~5850	Pass
HVNT	ANT1	802.11a	5825.00	5825.044	5817.316	5832.772	5725~5850	Pass
LVNT	ANT1	802.11a	5825.00	5825.034	5817.368	5832.700	5725~5850	Pass
NVHT	ANT1	802.11n(HT20)	5745.00	5745.020	5736.580	5753.460	5725~5850	Pass
NVLT	ANT1	802.11n(HT20)	5745.00	5745.034	5736.640	5753.428	5725~5850	Pass
NVNT	ANT1	802.11n(HT20)	5745.00	5745.036	5736.688	5753.384	5725~5850	Pass
HVNT	ANT1	802.11n(HT20)	5745.00	5745.044	5736.744	5753.344	5725~5850	Pass
LVNT	ANT1	802.11n(HT20)	5745.00	5745.044	5736.804	5753.284	5725~5850	Pass
NVHT	ANT1	802.11n(HT20)	5785.00	5785.032	5776.572	5793.492	5725~5850	Pass
NVLT	ANT1	802.11n(HT20)	5785.00	5785.042	5776.636	5793.448	5725~5850	Pass
NVNT	ANT1	802.11n(HT20)	5785.00	5785.042	5776.680	5793.404	5725~5850	Pass
HVNT	ANT1	802.11n(HT20)	5785.00	5785.038	5776.732	5793.344	5725~5850	Pass
LVNT	ANT1	802.11n(HT20)	5785.00	5785.034	5776.788	5793.280	5725~5850	Pass
NVHT	ANT1	802.11n(HT20)	5825.00	5825.032	5816.576	5833.488	5725~5850	Pass
NVLT	ANT1	802.11n(HT20)	5825.00	5825.040	5816.640	5833.440	5725~5850	Pass
NVNT	ANT1	802.11n(HT20)	5825.00	5825.046	5816.688	5833.404	5725~5850	Pass
HVNT	ANT1	802.11n(HT20)	5825.00	5825.040	5816.736	5833.344	5725~5850	Pass
LVNT	ANT1	802.11n(HT20)	5825.00	5825.048	5816.784	5833.312	5725~5850	Pass
NVHT	ANT1	802.11ac(VHT20)	5745.00	5745.036	5736.596	5753.476	5725~5850	Pass
NVLT	ANT1	802.11ac(VHT20)	5745.00	5745.036	5736.652	5753.420	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT20)	5745.00	5745.034	5736.704	5753.364	5725~5850	Pass
HVNT	ANT1	802.11ac(VHT20)	5745.00	5745.036	5736.760	5753.312	5725~5850	Pass
LVNT	ANT1	802.11ac(VHT20)	5745.00	5745.004	5736.808	5753.200	5725~5850	Pass
NVHT	ANT1	802.11ac(VHT20)	5785.00	5785.022	5776.084	5793.960	5725~5850	Pass
NVLT	ANT1	802.11ac(VHT20)	5785.00	5785.018	5776.232	5793.804	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT20)	5785.00	5785.018	5776.312	5793.724	5725~5850	Pass
HVNT	ANT1	802.11ac(VHT20)	5785.00	5785.024	5776.392	5793.656	5725~5850	Pass
LVNT	ANT1	802.11ac(VHT20)	5785.00	5785.020	5776.452	5793.588	5725~5850	Pass
NVHT	ANT1	802.11ac(VHT20)	5825.00	5825.030	5816.576	5833.484	5725~5850	Pass
NVLT	ANT1	802.11ac(VHT20)	5825.00	5825.038	5816.640	5833.436	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT20)	5825.00	5825.028	5816.688	5833.368	5725~5850	Pass
HVNT	ANT1	802.11ac(VHT20)	5825.00	5825.032	5816.744	5833.320	5725~5850	Pass
LVNT	ANT1	802.11ac(VHT20)	5825.00	5825.038	5816.796	5833.280	5725~5850	Pass
NVHT	ANT1	802.11n(HT40)	5755.00	5755.048	5736.856	5773.240	5725~5850	Pass
NVLT	ANT1	802.11n(HT40)	5755.00	5755.056	5737.048	5773.064	5725~5850	Pass

NVNT	ANT1	802.11n(HT40)	5755.00	5755.032	5737.168	5772.896	5725~5850	Pass
HVNT	ANT1	802.11n(HT40)	5755.00	5755.056	5737.352	5772.760	5725~5850	Pass
LVNT	ANT1	802.11n(HT40)	5755.00	5755.068	5737.520	5772.616	5725~5850	Pass
NVHT	ANT1	802.11n(HT40)	5795.00	5795.032	5776.824	5813.240	5725~5850	Pass
NVLT	ANT1	802.11n(HT40)	5795.00	5795.024	5777.008	5813.040	5725~5850	Pass
NVNT	ANT1	802.11n(HT40)	5795.00	5795.040	5777.192	5812.888	5725~5850	Pass
HVNT	ANT1	802.11n(HT40)	5795.00	5795.032	5777.360	5812.704	5725~5850	Pass
LVNT	ANT1	802.11n(HT40)	5795.00	5795.052	5777.488	5812.616	5725~5850	Pass
NVHT	ANT1	802.11ac(VHT40)	5755.00	5755.052	5736.856	5773.248	5725~5850	Pass
NVLT	ANT1	802.11ac(VHT40)	5755.00	5755.068	5737.072	5773.064	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT40)	5755.00	5755.092	5737.248	5772.936	5725~5850	Pass
HVNT	ANT1	802.11ac(VHT40)	5755.00	5755.104	5737.424	5772.784	5725~5850	Pass
LVNT	ANT1	802.11ac(VHT40)	5755.00	5755.124	5737.552	5772.696	5725~5850	Pass
NVHT	ANT1	802.11ac(VHT40)	5795.00	5795.040	5776.832	5813.248	5725~5850	Pass
NVLT	ANT1	802.11ac(VHT40)	5795.00	5795.044	5777.040	5813.048	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT40)	5795.00	5795.060	5777.208	5812.912	5725~5850	Pass
HVNT	ANT1	802.11ac(VHT40)	5795.00	5795.092	5777.392	5812.792	5725~5850	Pass
LVNT	ANT1	802.11ac(VHT40)	5795.00	5795.084	5777.520	5812.648	5725~5850	Pass
NVHT	ANT1	802.11ac(VHT80)	5775.00	5775.084	5737.260	5812.908	5725~5850	Pass
NVLT	ANT1	802.11ac(VHT80)	5775.00	5775.168	5737.752	5812.584	5725~5850	Pass
NVNT	ANT1	802.11ac(VHT80)	5775.00	5775.210	5738.220	5812.200	5725~5850	Pass
HVNT	ANT1	802.11ac(VHT80)	5775.00	5775.324	5738.772	5811.876	5725~5850	Pass
LVNT	ANT1	802.11ac(VHT80)	5775.00	5775.354	5739.252	5811.456	5725~5850	Pass

\*\*\*\*\* End of Report \*\*\*\*\*