


IEEE 802.11n HT40 mode/5230MHz


Detector mode: Peak

Polarity: Horizontal

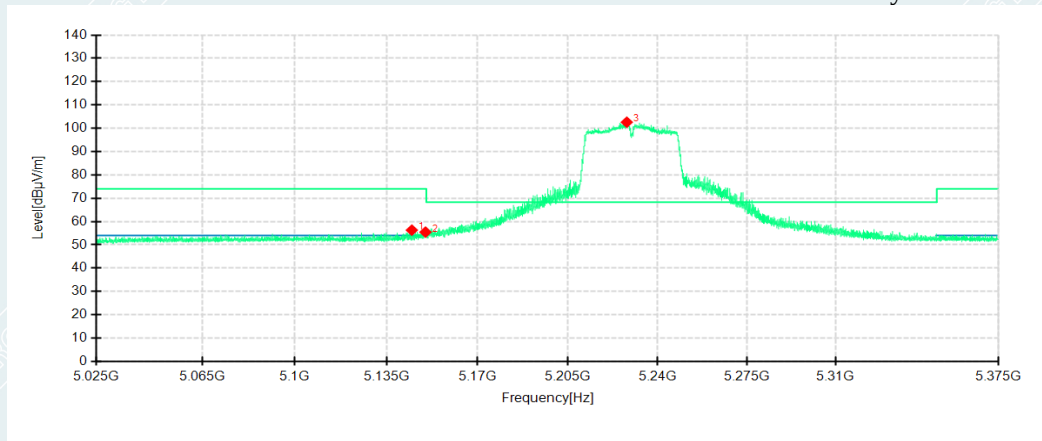

Detector mode: Peak

Polarity: Vertical

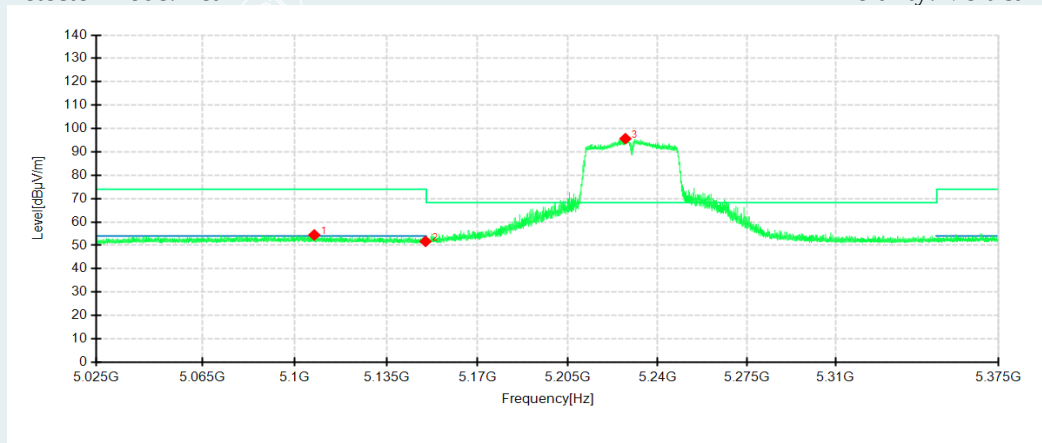


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5144.7350	42.42	56.30	13.88	74.00	17.70	200	191	Horizontal	/
2	5150.0000	41.68	55.45	13.77	74.00	18.55	200	191	Horizontal	/
3	5227.9300	88.05	102.59	14.54	68.30	-34.29	200	163	Horizontal	No limit
1	5107.4250	39.76	54.45	14.69	74.00	19.55	200	300	Vertical	/
2	5150.0000	37.93	51.70	13.77	74.00	22.30	200	238	Vertical	/
3	5227.4050	81.12	95.67	14.55	68.30	-27.37	200	142	Vertical	No limit

IEEE 802.11n HT40 mode/5230MHz


Detector mode: Average

Polarity: Horizontal

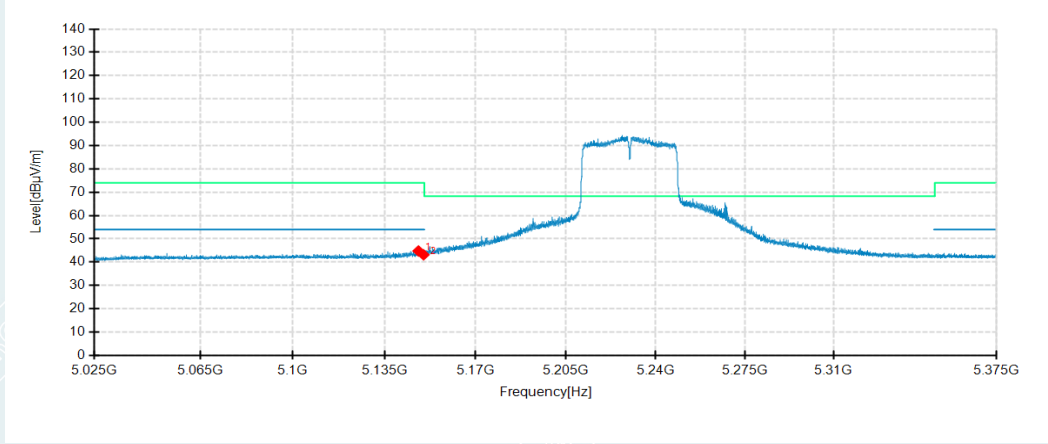

Detector mode: Average

Polarity: Vertical

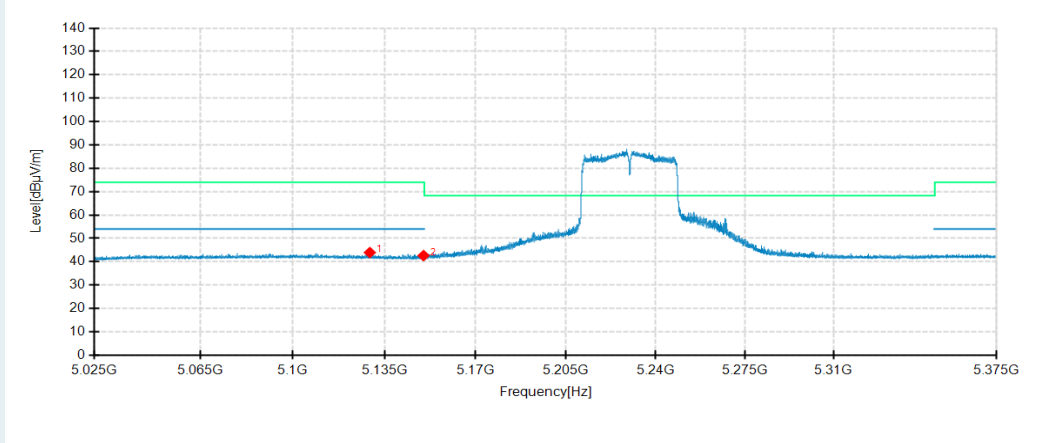


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5148.0600	30.98	44.79	13.81	54.00	9.21	200	197	Horizontal	/
2	5150.0000	29.40	43.17	13.77	54.00	10.83	200	176	Horizontal	/
1	5129.4050	29.72	43.93	14.21	54.00	10.07	200	142	Vertical	/
2	5150.0000	28.85	42.62	13.77	54.00	11.38	200	142	Vertical	/

IEEE 802.11ac VHT20 mode/5180MHz


Detector mode: Peak

Polarity: Horizontal

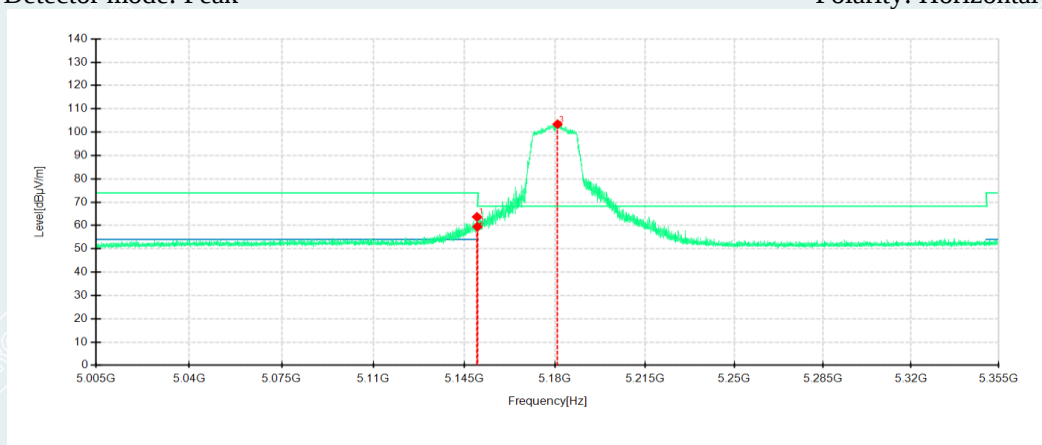

Detector mode: Peak

Polarity: Vertical

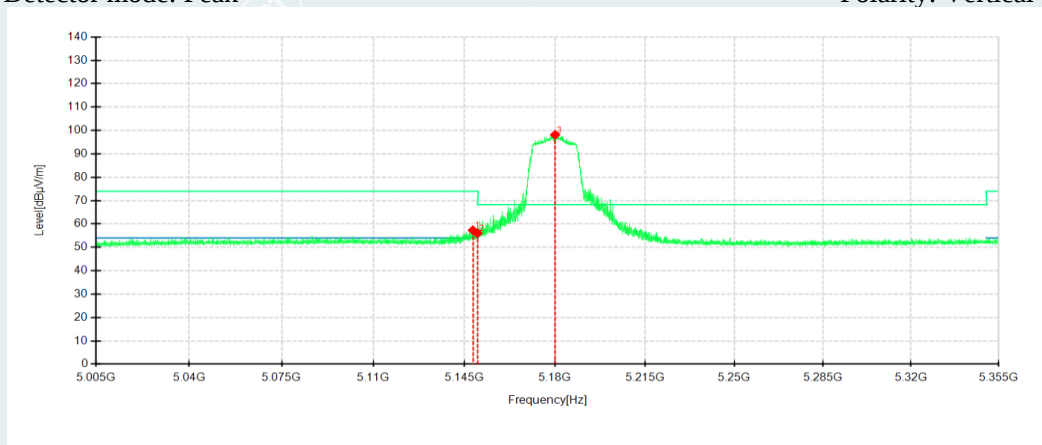


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5149.83	49.92	63.69	13.77	74.00	10.31	200	196	Horizontal	/
2	5150	45.72	59.49	13.77	74.00	14.51	200	189	Horizontal	/
3	5180.98	88.88	103.41	14.53	68.30	-35.11	200	159	Horizontal	No limit
1	5148.22	43.48	57.29	13.81	74.00	16.71	200	142	Vertical	/
2	5150	42.25	56.02	13.77	74.00	17.98	200	142	Vertical	/
3	5180.035	83.64	98.14	14.50	68.30	-29.84	200	142	Vertical	No limit

IEEE 802.11ac VHT20 mode/5180MHz


Detector mode: Average

Polarity: Horizontal

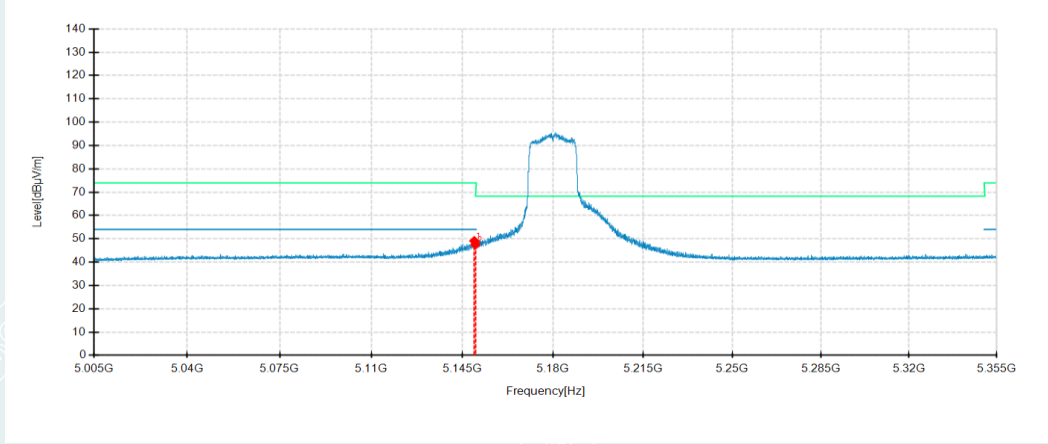

Detector mode: Average


Polarity: Vertical

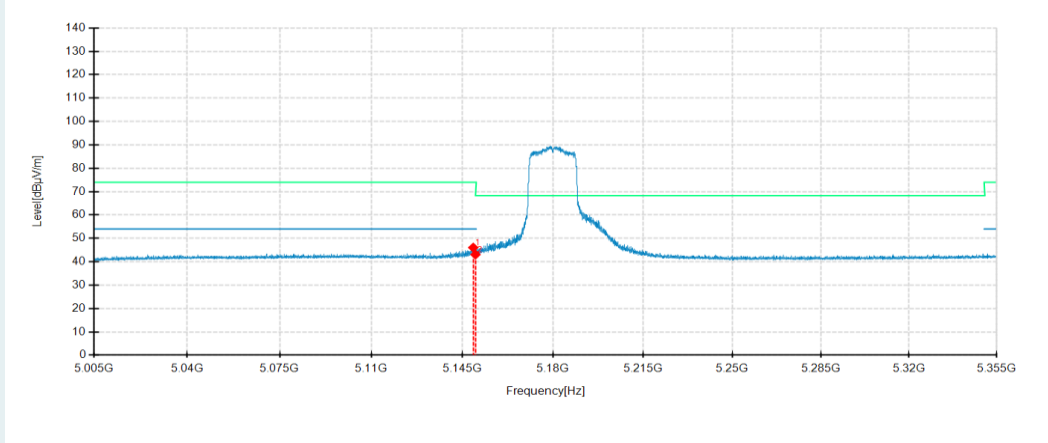

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5149.55	35.30	49.08	13.78	54.00	4.92	200	156	Horizontal	/
2	5150	33.73	47.50	13.77	54.00	6.50	200	197	Horizontal	/
1	5149.13	32.25	46.04	13.79	54.00	7.96	200	142	Vertical	/
2	5150	29.29	43.06	13.77	54.00	10.94	200	142	Vertical	/


IEEE 802.11ac VHT20 mode/5200MHz
Detector mode: Peak

Polarity: Horizontal

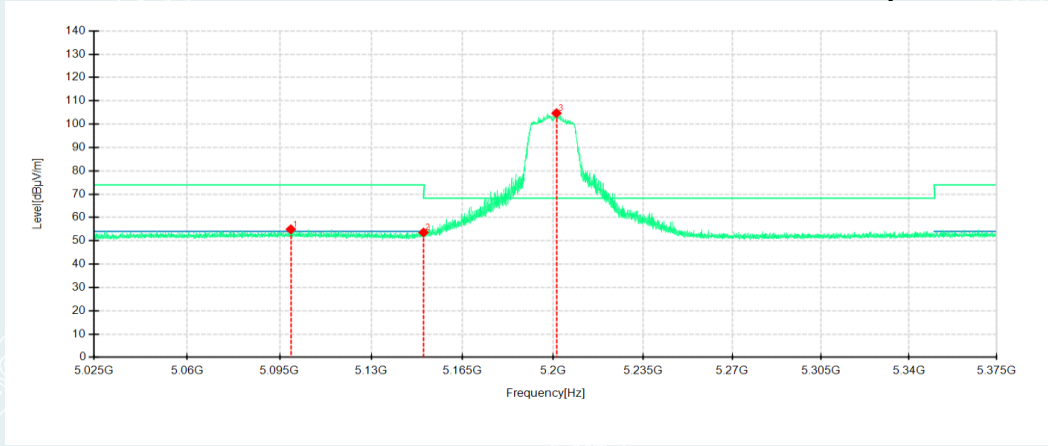

Detector mode: Peak

Polarity: Vertical

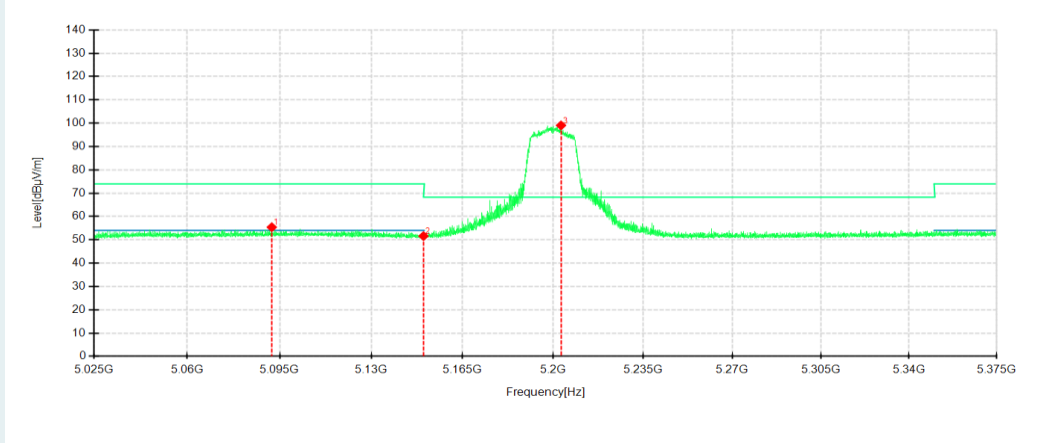


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5099.27	40.09	54.93	14.84	74.00	19.07	200	218	Horizontal	/
2	5150	39.80	53.57	13.77	74.00	20.43	200	163	Horizontal	/
3	5201.365	89.75	104.72	14.97	68.30	-36.42	200	157	Horizontal	No limit
1	5092.025	40.62	55.40	14.78	74.00	18.60	100	4	Vertical	/
2	5150	37.83	51.60	13.77	74.00	22.40	200	348	Vertical	/
3	5203.115	84.10	99.04	14.94	68.30	-30.74	200	142	Vertical	No limit

IEEE 802.11ac VHT20 mode/5200MHz


Detector mode: Average

Polarity: Horizontal

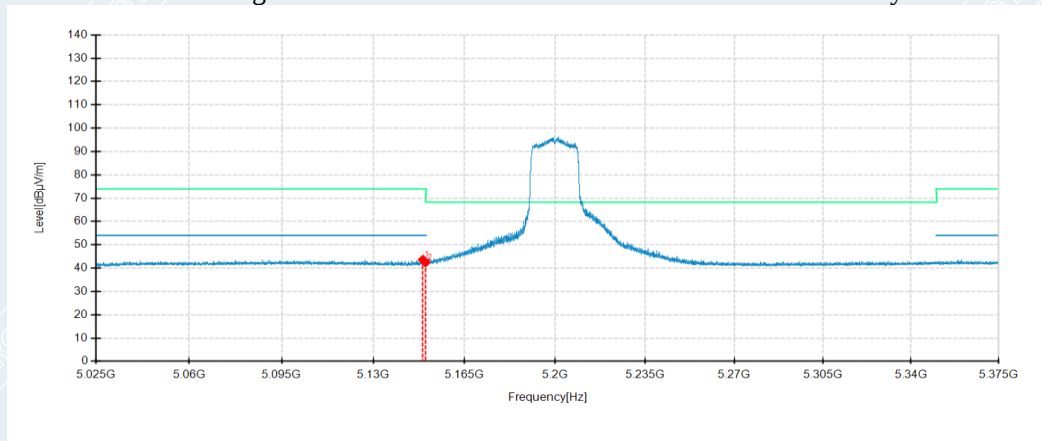

Detector mode: Average


Polarity: Vertical

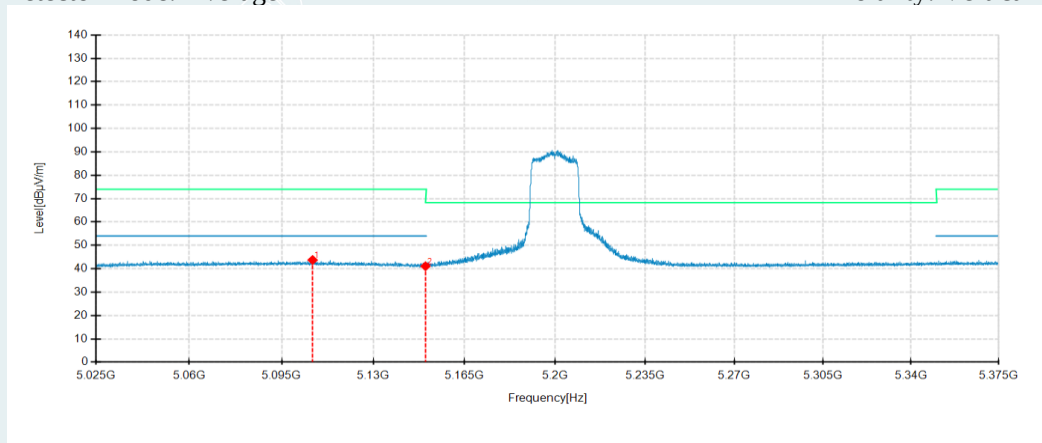

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5149.005	29.87	43.66	13.79	54.00	10.34	200	161	Horizontal	/
2	5150	28.67	42.44	13.77	54.00	11.56	200	161	Horizontal	/
1	5106.795	29.03	43.73	14.70	54.00	10.27	100	38	Vertical	/
2	5150	27.31	41.08	13.77	54.00	12.92	200	142	Vertical	/


IEEE 802.11ac VHT20 mode/5240MHz
Detector mode: Peak

Polarity: Horizontal

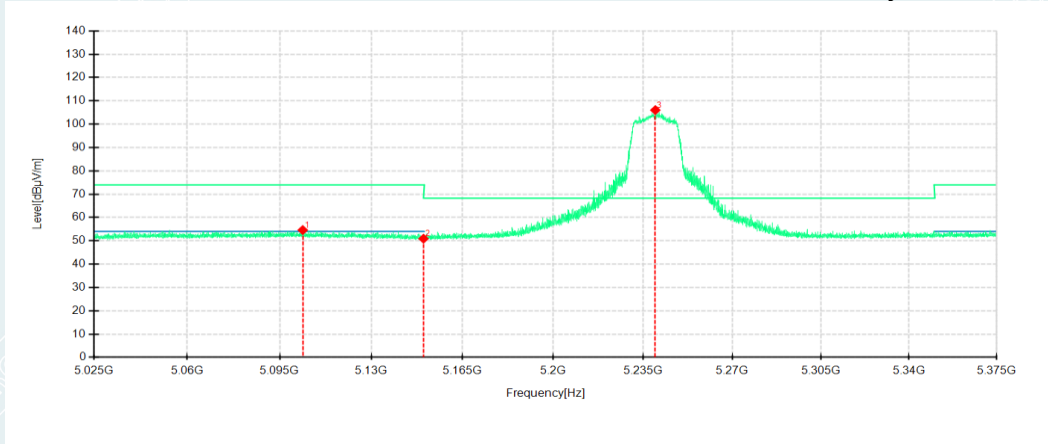

Detector mode: Peak

Polarity: Vertical

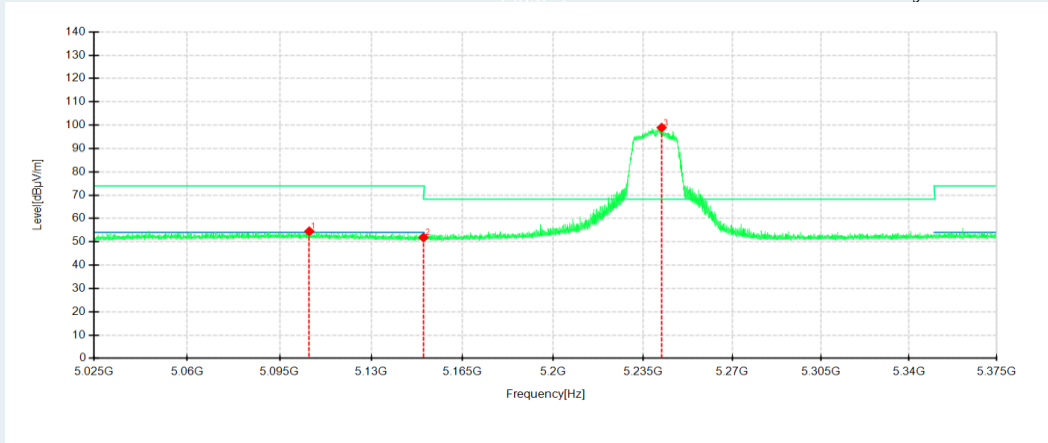


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5103.785	39.83	54.60	14.77	74.00	19.40	200	204	Horizontal	/
2	5150	37.14	50.91	13.77	74.00	23.09	100	272	Horizontal	/
3	5239.865	91.71	106.05	14.34	68.30	-37.75	200	163	Horizontal	No limit
1	5106.305	39.78	54.49	14.71	74.00	19.51	100	218	Vertical	/
2	5150	38.09	51.86	13.77	74.00	22.14	100	170	Vertical	/
3	5242.35	84.66	98.96	14.30	68.30	-30.66	200	142	Vertical	No limit

IEEE 802.11ac VHT20 mode/5240MHz


Detector mode: Average

Polarity: Horizontal

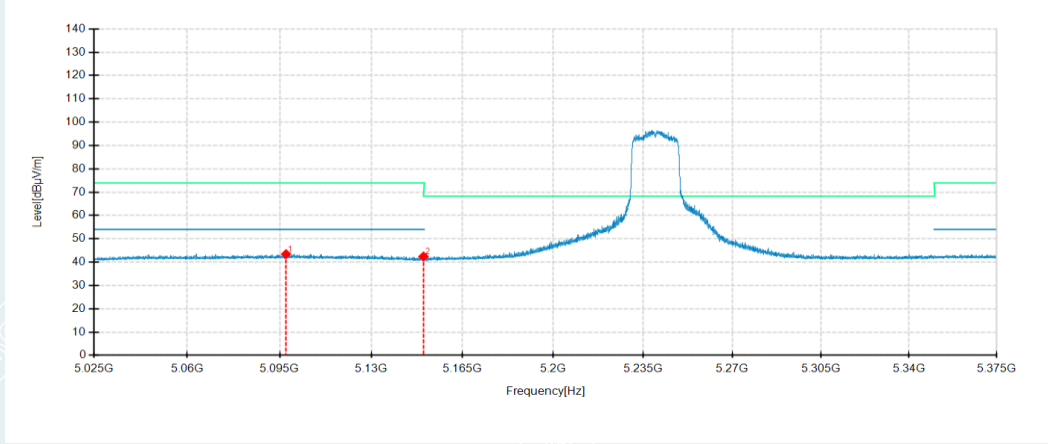

Detector mode: Average

Polarity: Vertical

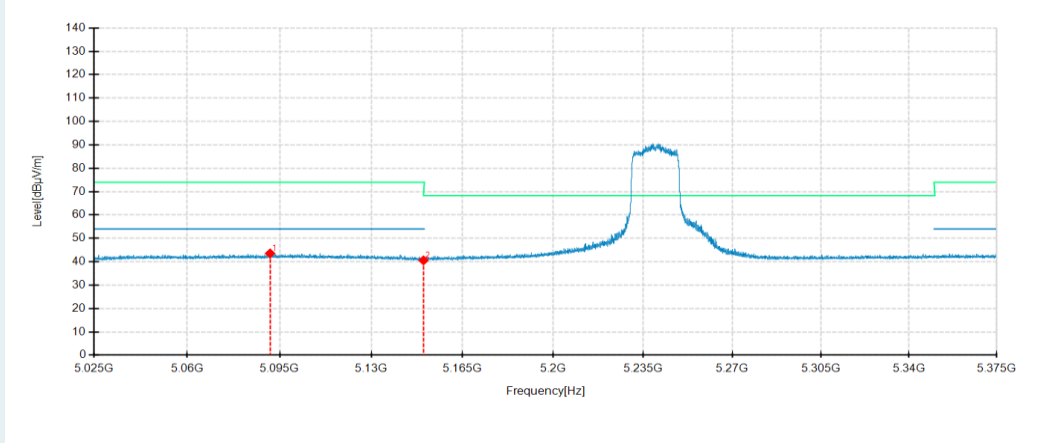


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5097.45	28.62	43.45	14.83	54.00	10.55	200	122	Horizontal	/
2	5150	28.66	42.43	13.77	54.00	11.57	200	149	Horizontal	/
1	5091.36	28.79	43.56	14.77	54.00	10.44	200	149	Vertical	/
2	5150	26.81	40.58	13.77	54.00	13.42	100	204	Vertical	/

IEEE 802.11ac VHT40 mode/5190MHz


Detector mode: Peak

Polarity: Horizontal

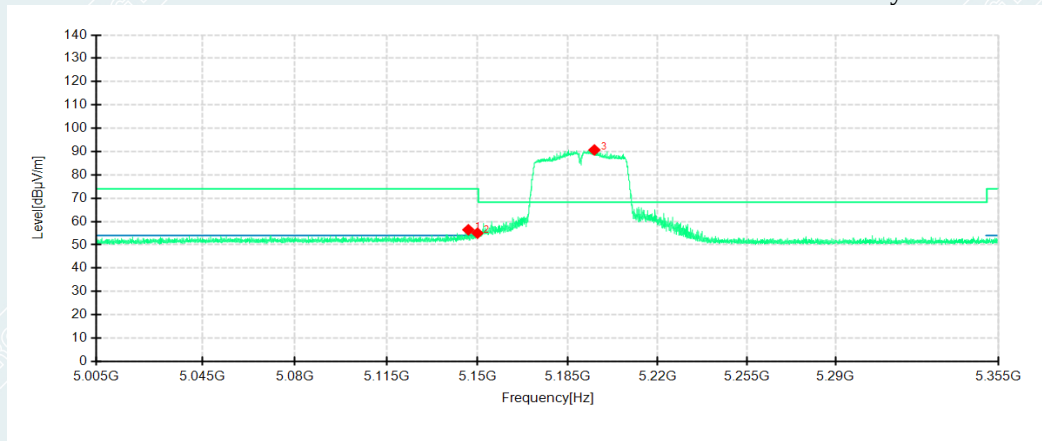

Detector mode: Peak

Polarity: Vertical

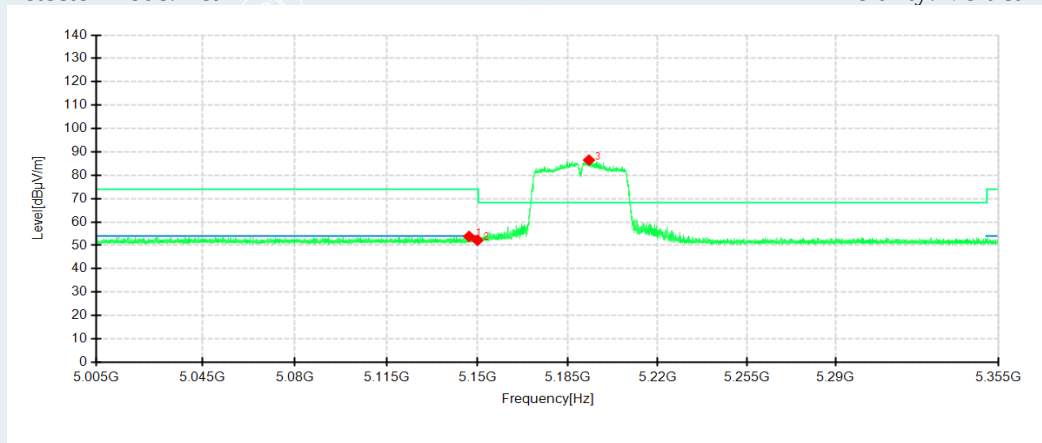


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5146.4700	42.26	56.45	14.19	74.00	17.55	200	266	Horizontal	/
2	5150.0000	40.81	54.99	14.18	74.00	19.01	200	13	Horizontal	/
3	5195.2950	76.74	90.68	13.94	68.30	-22.38	200	266	Horizontal	No limit
1	5146.7500	39.74	53.82	14.08	74.00	20.18	200	95	Vertical	/
2	5150.0000	38.10	52.18	14.08	74.00	21.82	200	255	Vertical	/
3	5193.1950	72.46	86.49	14.03	68.30	-18.19	200	304	Vertical	No limit

IEEE 802.11ac VHT40 mode/5190MHz


Detector mode: Average

Polarity: Horizontal

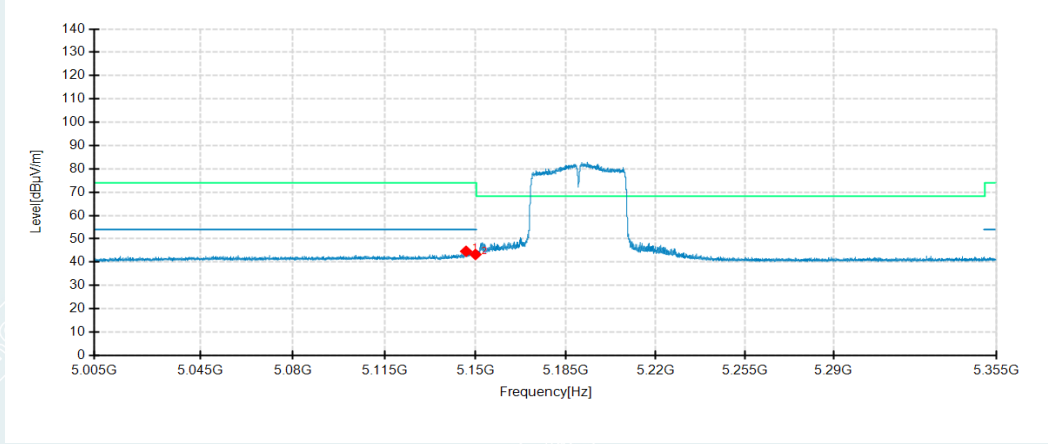

Detector mode: Average

Polarity: Vertical

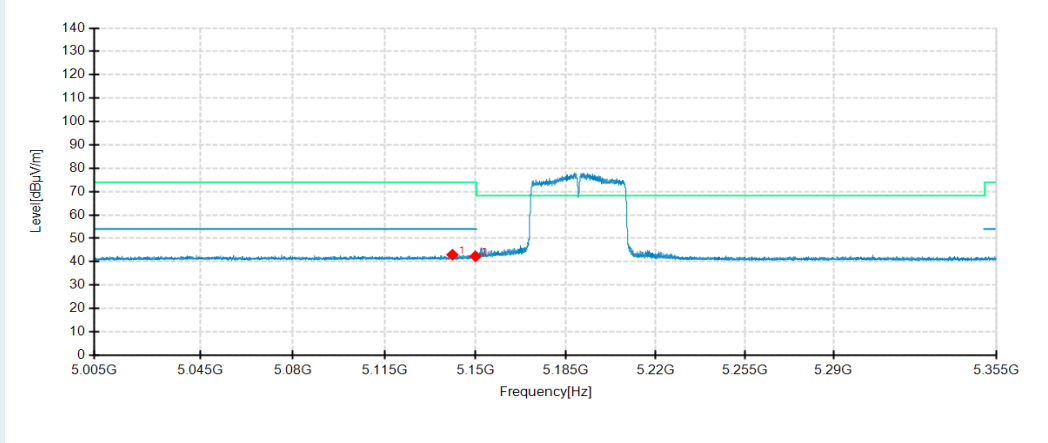


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5146.3650	30.46	44.65	14.19	54.00	9.35	200	265	Horizontal	/
2	5150.0000	29.11	43.29	14.18	54.00	10.71	200	265	Horizontal	/
1	5141.1150	28.91	43.00	14.09	54.00	11.00	200	112	Vertical	/
2	5150.0000	28.25	42.33	14.08	54.00	11.67	200	246	Vertical	/

IEEE 802.11ac VHT40 mode/5230MHz


Detector mode: Peak

Polarity: Horizontal

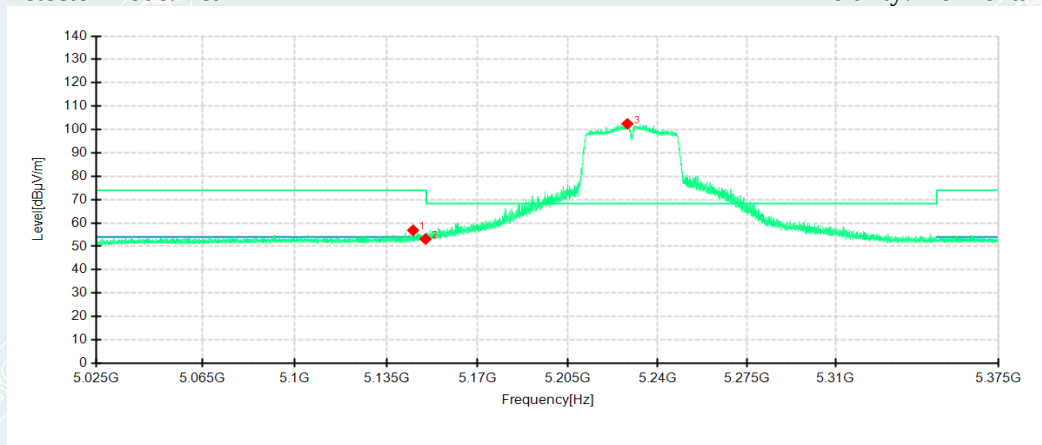

Detector mode: Peak

Polarity: Vertical

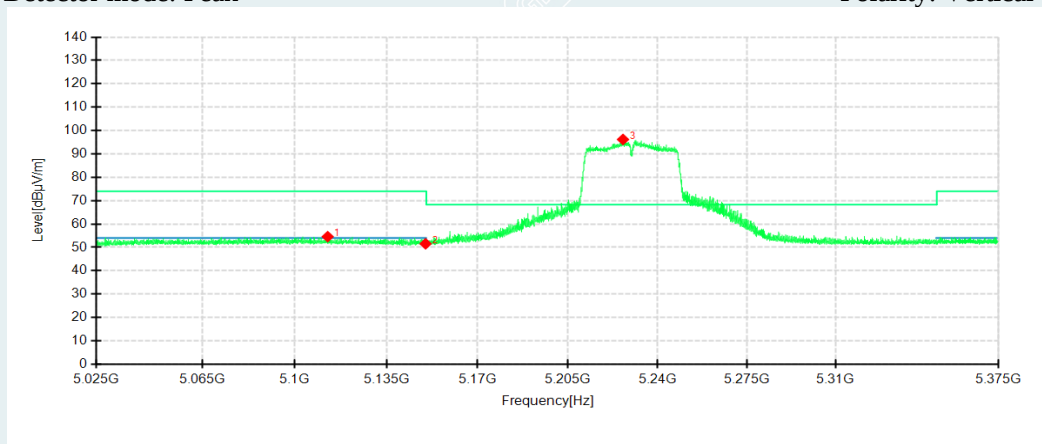


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5145.2250	43.00	56.87	13.87	74.00	17.13	200	190	Horizontal	/
2	5150.0000	39.36	53.13	13.77	74.00	20.87	100	177	Horizontal	/
3	5228.1750	87.92	102.45	14.53	68.30	-34.15	200	163	Horizontal	No limit
1	5112.5350	40.00	54.58	14.58	74.00	19.42	200	142	Vertical	/
2	5150.0000	37.76	51.53	13.77	74.00	22.47	200	142	Vertical	/
3	5226.4600	81.62	96.18	14.56	68.30	-27.88	200	142	Vertical	No limit

IEEE 802.11ac VHT40 mode/5230MHz


Detector mode: Average

Polarity: Horizontal

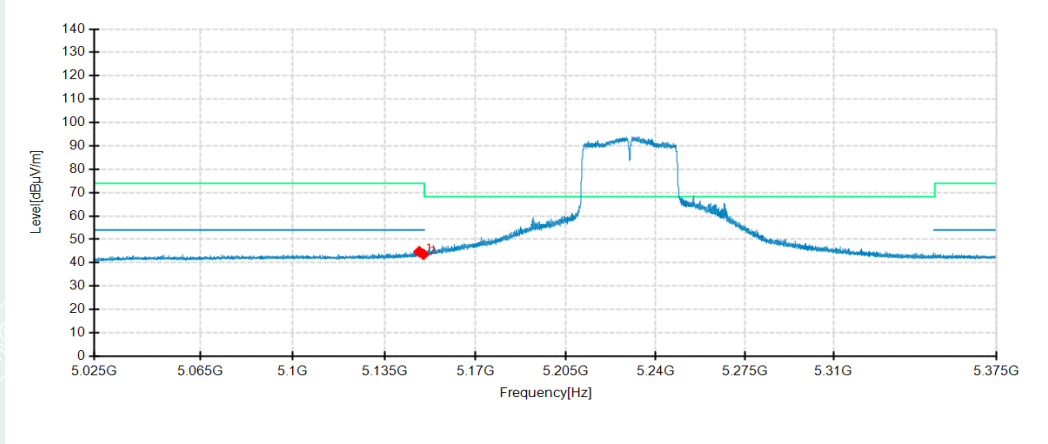

Detector mode: Average

Polarity: Vertical

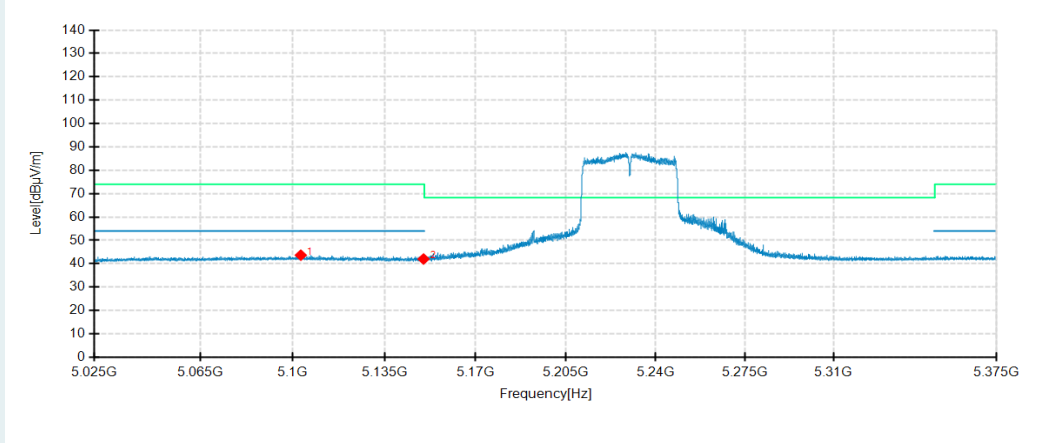


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5148.3750	30.94	44.75	13.81	54.00	9.25	200	156	Horizontal	/
2	5150.0000	29.81	43.58	13.77	54.00	10.42	200	170	Horizontal	/
1	5103.0500	28.89	43.67	14.78	54.00	10.33	200	142	Vertical	/
2	5150.0000	28.25	42.02	13.77	54.00	11.98	200	245	Vertical	/

IEEE 802.11ac VHT80 mode/5210MHz


Detector mode: Peak

Polarity: Horizontal

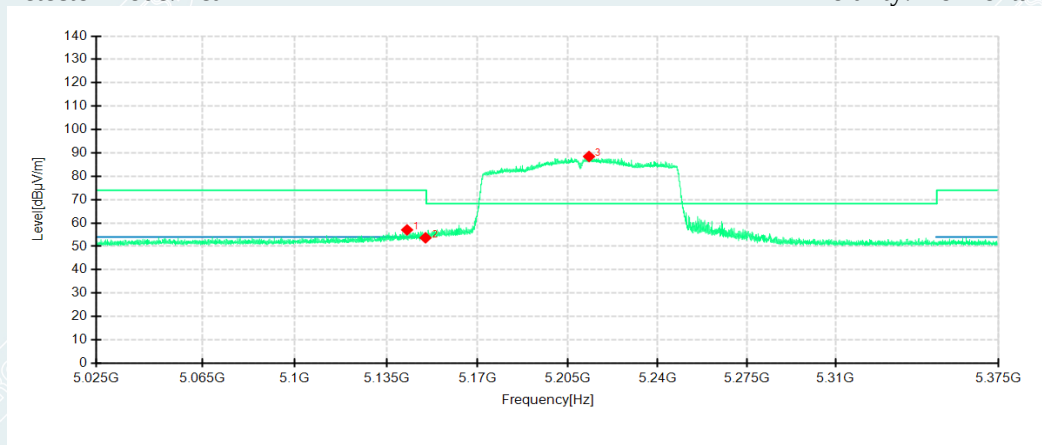

Detector mode: Peak

Polarity: Vertical

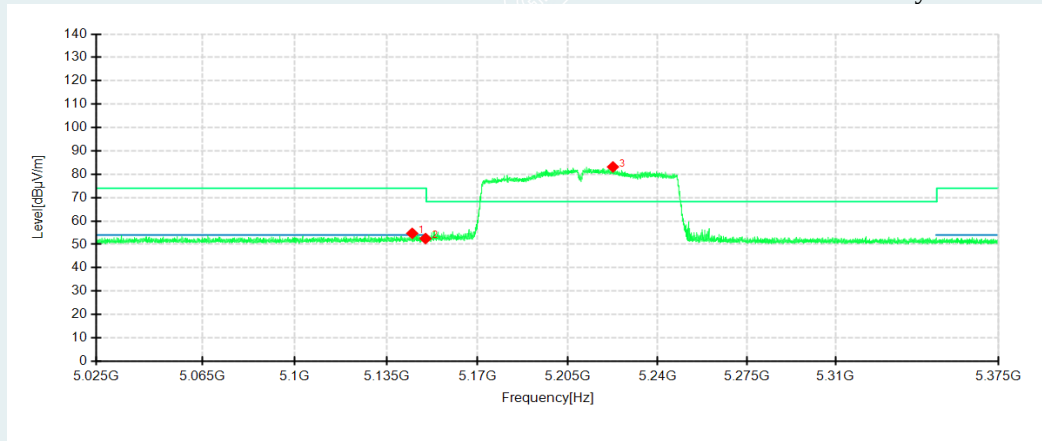


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5142.9150	42.85	57.05	14.20	74.00	16.95	200	0	Horizontal	/
2	5150.0000	39.48	53.66	14.18	74.00	20.34	200	0	Horizontal	/
3	5213.2300	74.57	88.45	13.88	68.30	-20.15	200	264	Horizontal	No limit
1	5144.8750	40.63	54.71	14.08	74.00	19.29	200	95	Vertical	/
2	5150.0000	38.42	52.50	14.08	74.00	21.50	200	95	Vertical	/
3	5222.5400	69.10	83.15	14.05	68.30	-14.85	200	95	Vertical	No limit

IEEE 802.11ac VHT80 mode/5210MHz


Detector mode: Average

Polarity: Horizontal

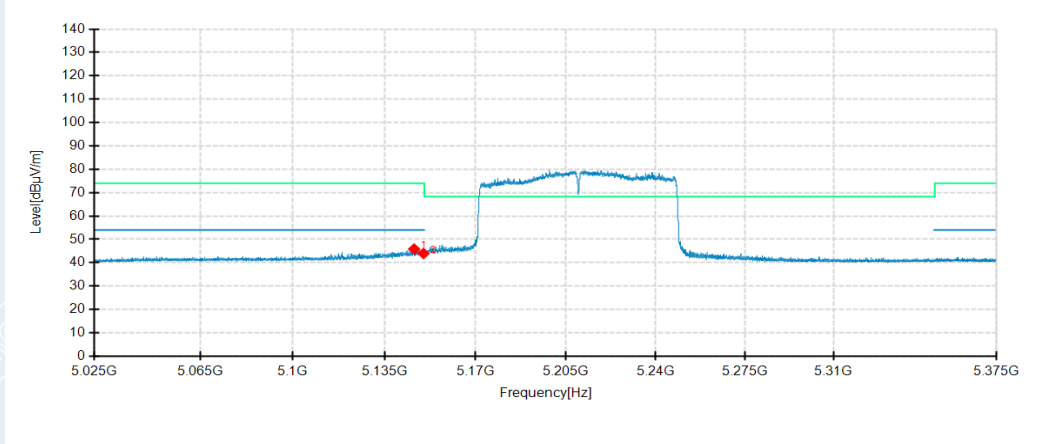

Detector mode: Average

Polarity: Vertical

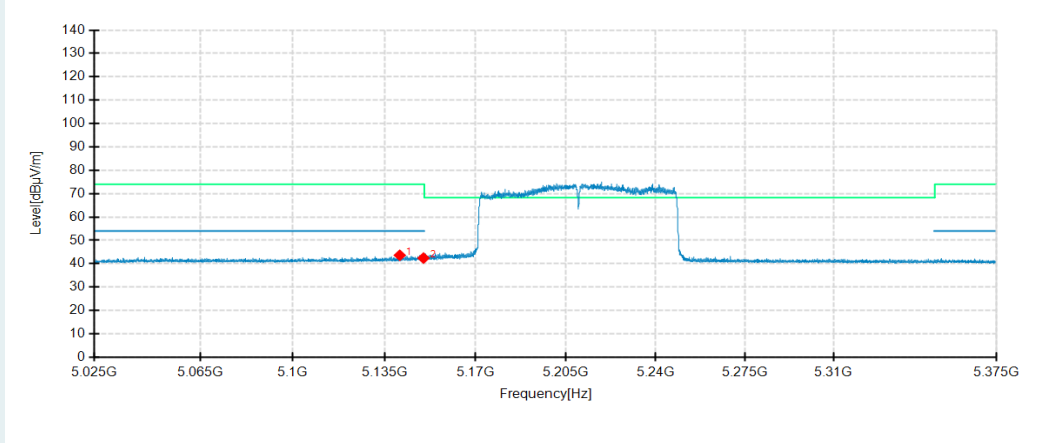


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Liit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5146.3800	31.67	45.86	14.19	54.00	8.14	200	265	Horizontal	/
2	5150.0000	29.77	43.95	14.18	54.00	10.05	200	265	Horizontal	/
1	5140.8850	29.53	43.62	14.09	54.00	10.38	200	292	Vertical	/
2	5150.0000	28.34	42.42	14.08	54.00	11.58	200	96	Vertical	/

IEEE 802.11a mode/5745MHz


Detector mode: Peak

Polarity: Horizontal

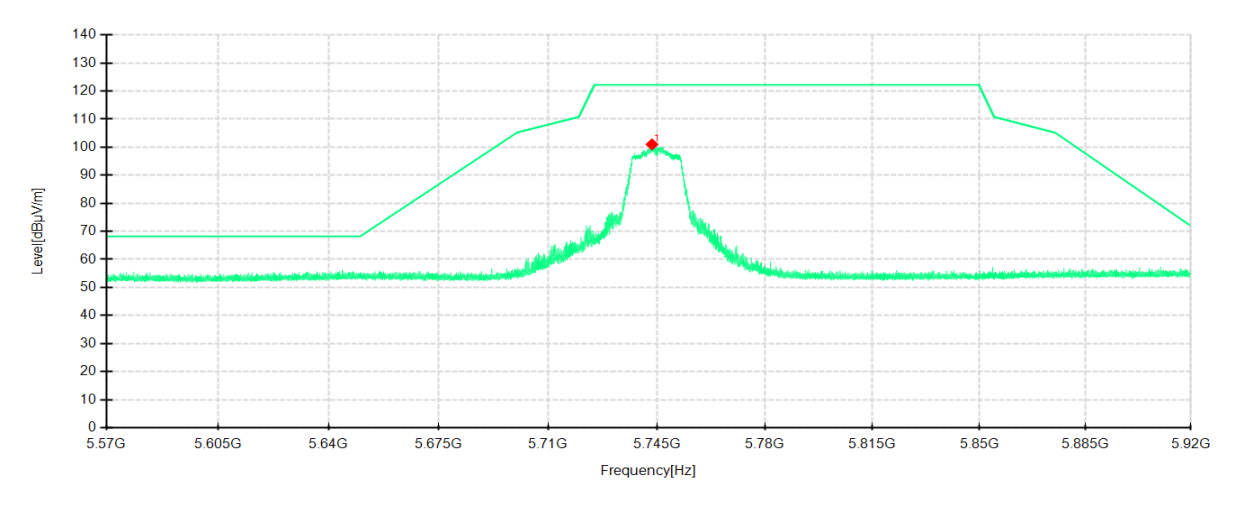

Detector mode: Peak

Polarity: Vertical

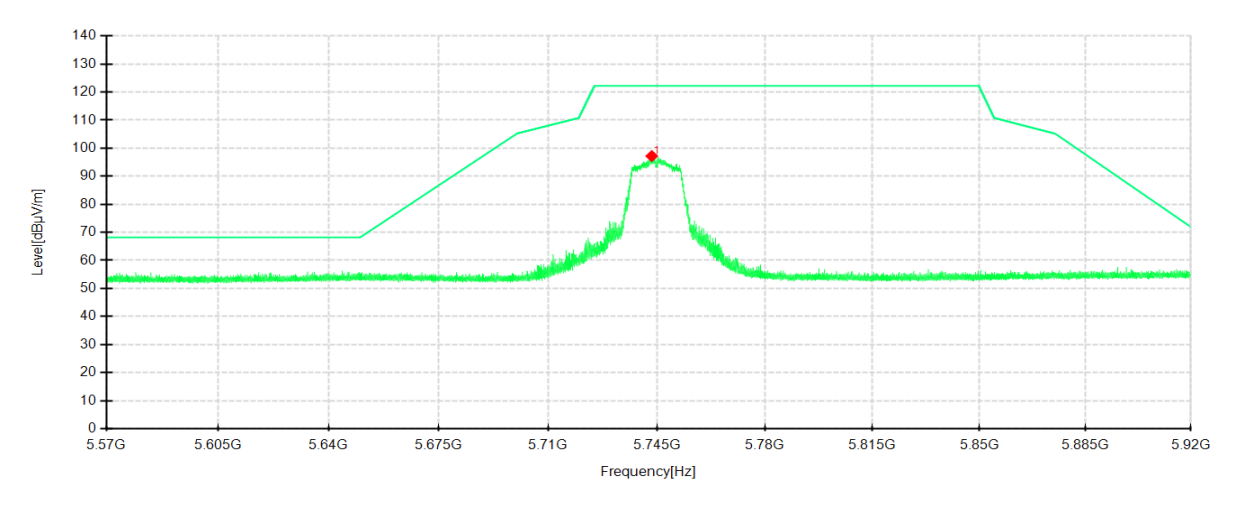


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5743.4250	83.85	100.98	17.13	122.20	21.22	200	148	Horizontal	/
1	5743.3550	80.06	97.19	17.13	122.20	25.01	200	282	Vertical	/

IEEE 802.11a mode/5785MHz


Detector mode: Peak

Polarity: Horizontal

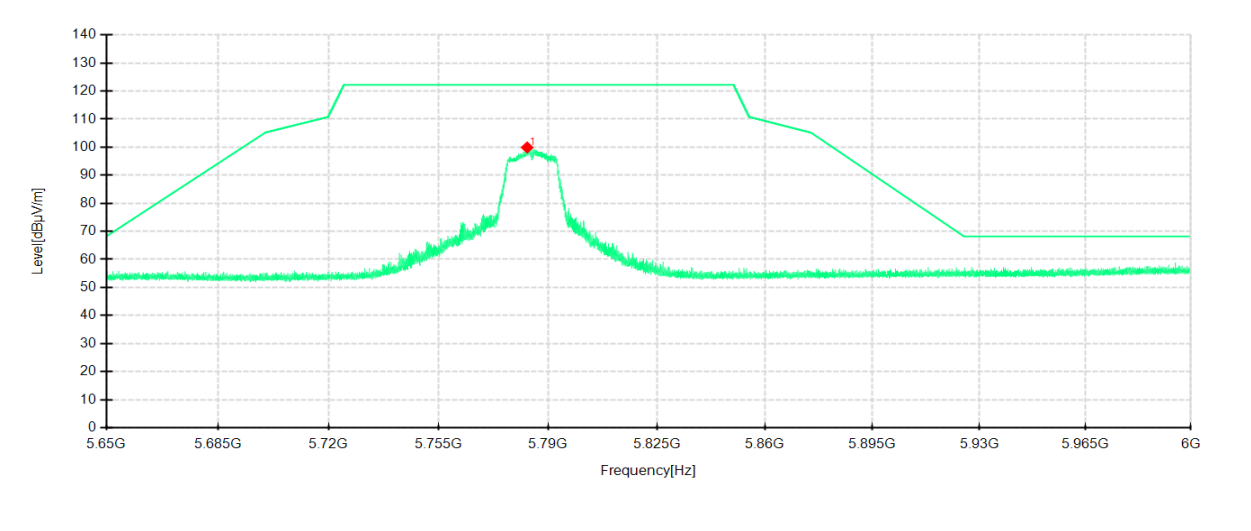

Detector mode: Peak

Polarity: Vertical

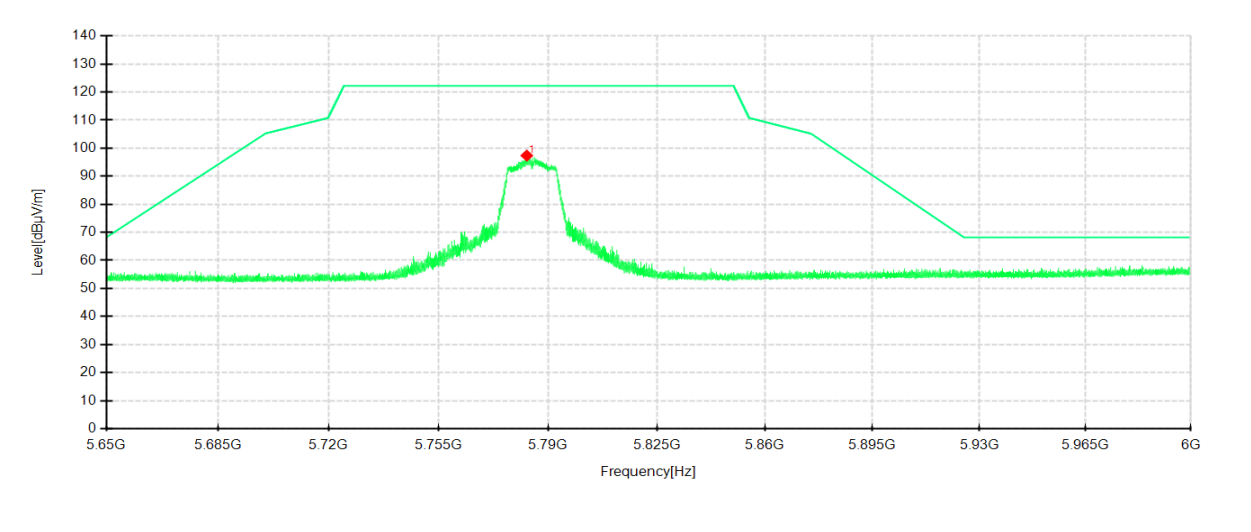


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5783.3150	82.78	99.90	17.12	122.20	22.30	200	142	Horizontal	/
1	5783.2100	80.23	97.35	17.12	122.20	24.85	200	64	Vertical	/

IEEE 802.11a mode/5825MHz


Detector mode: Peak

Polarity: Horizontal

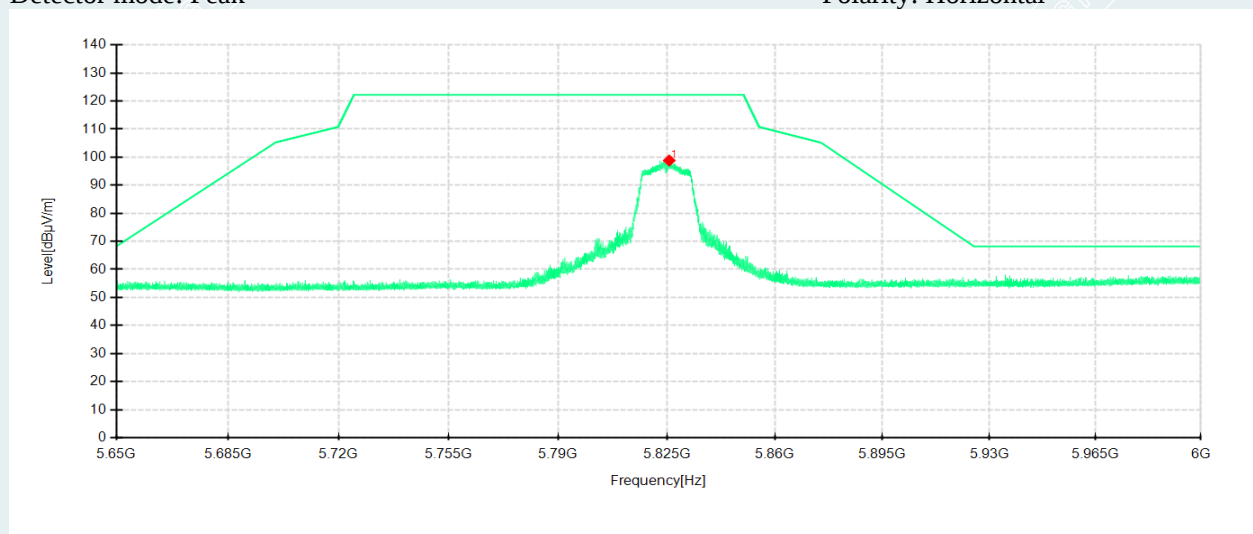

Detector mode: Peak

Polarity: Vertical

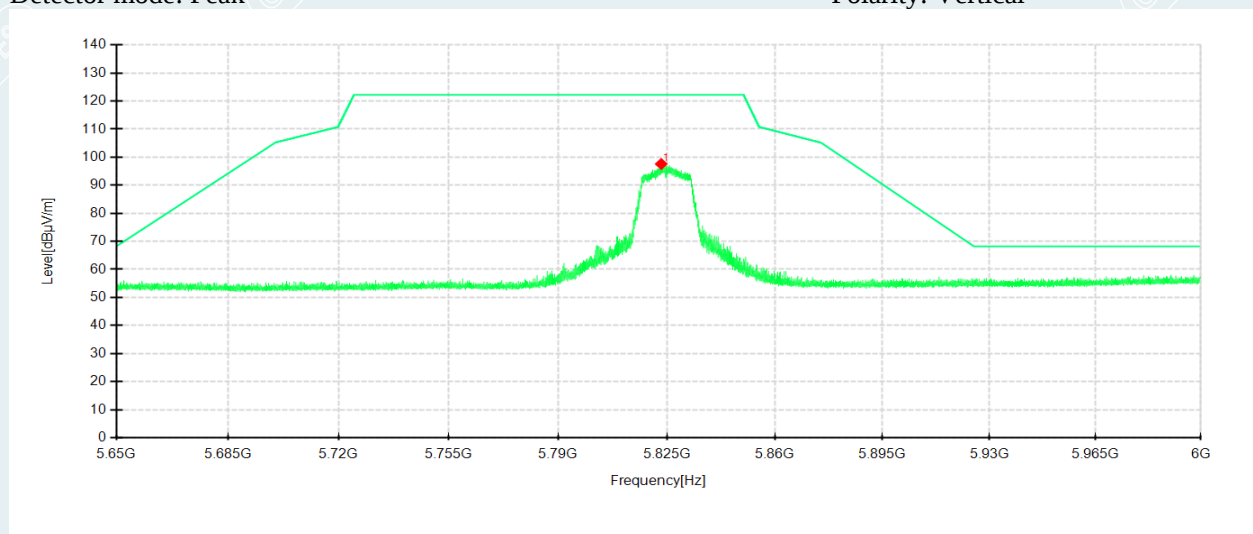


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5825.8050	81.74	98.82	17.08	122.20	23.38	200	141	Horizontal	/
1	5823.2150	80.51	97.58	17.07	122.20	24.62	200	134	Vertical	/

IEEE 802.11n HT20 mode/5745MHz


Detector mode: Peak

Polarity: Horizontal

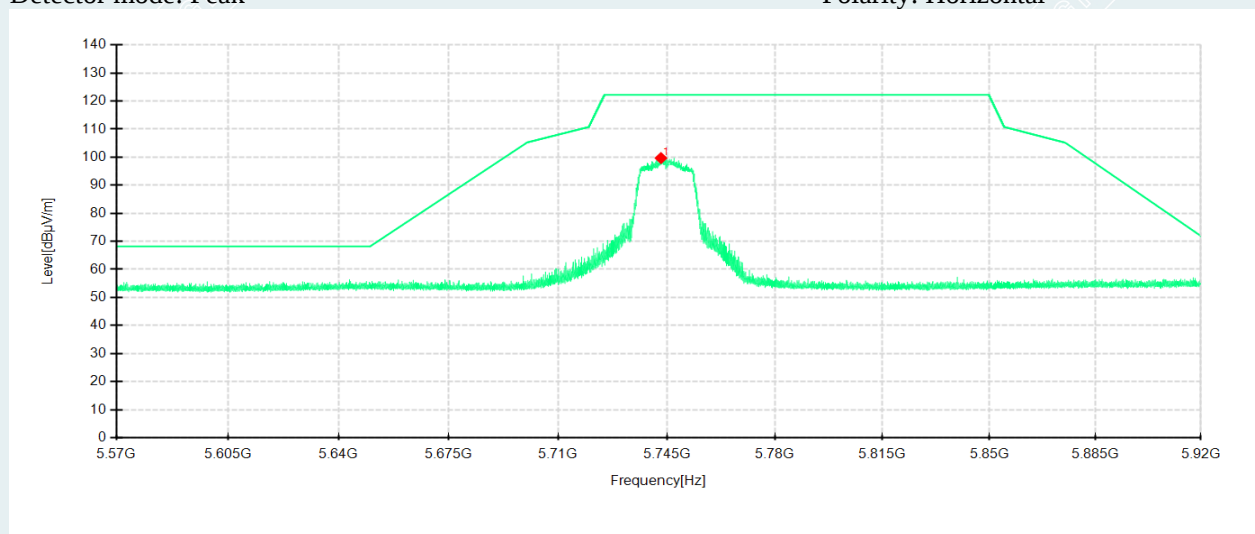

Detector mode: Peak

Polarity: Vertical

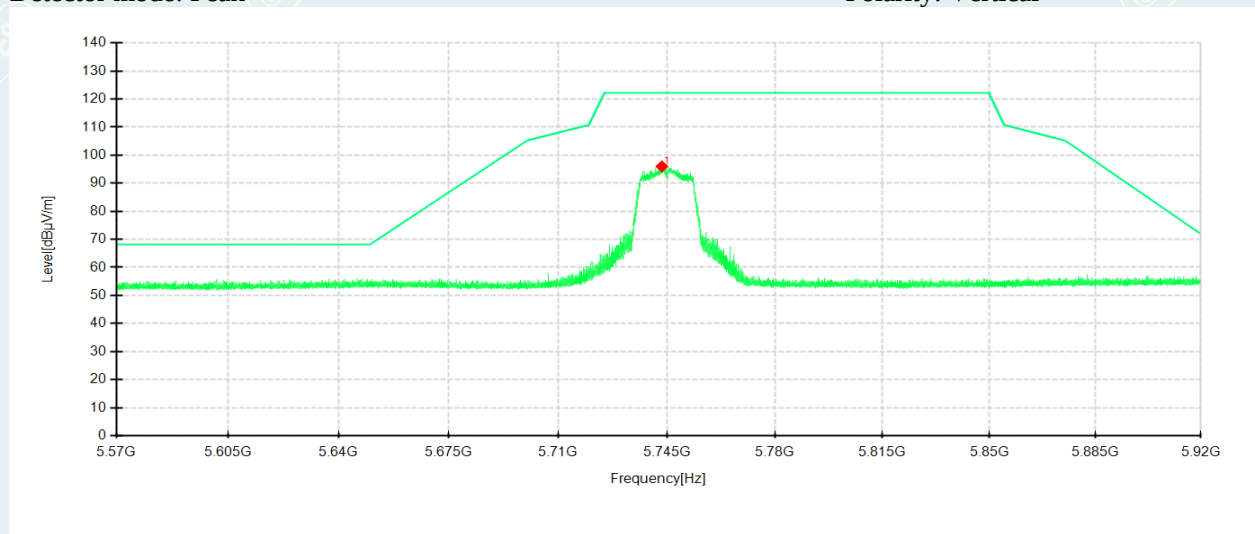


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5743.0925	82.56	99.68	17.12	122.20	22.52	200	164	Horizontal	/
1	5743.4075	78.85	95.98	17.13	122.20	26.22	200	287	Vertical	/

IEEE 802.11n HT20 mode/5785MHz


Detector mode: Peak

Polarity: Horizontal

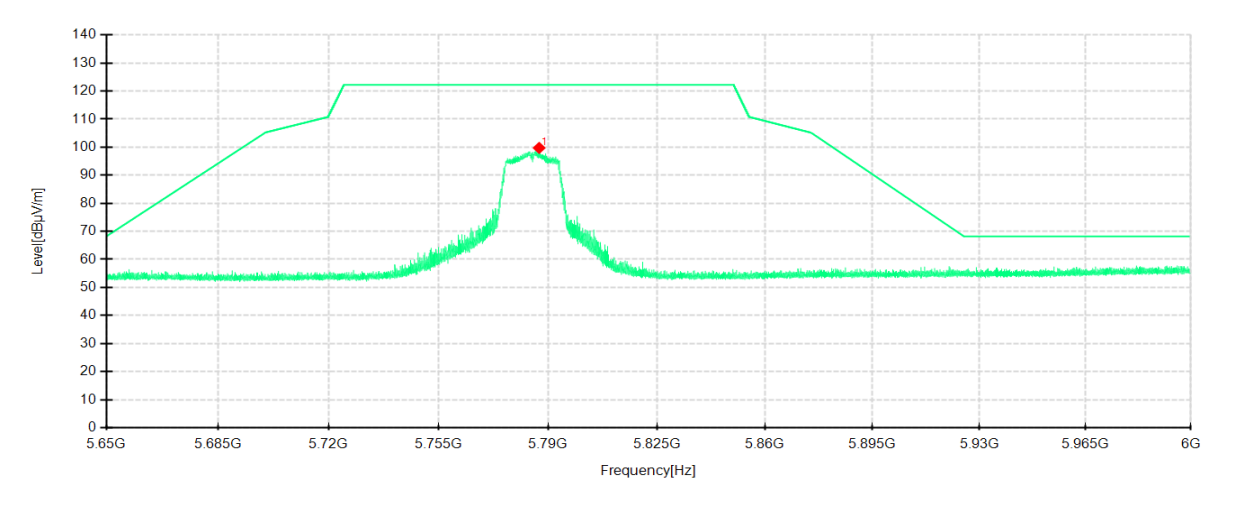

Detector mode: Peak

Polarity: Vertical

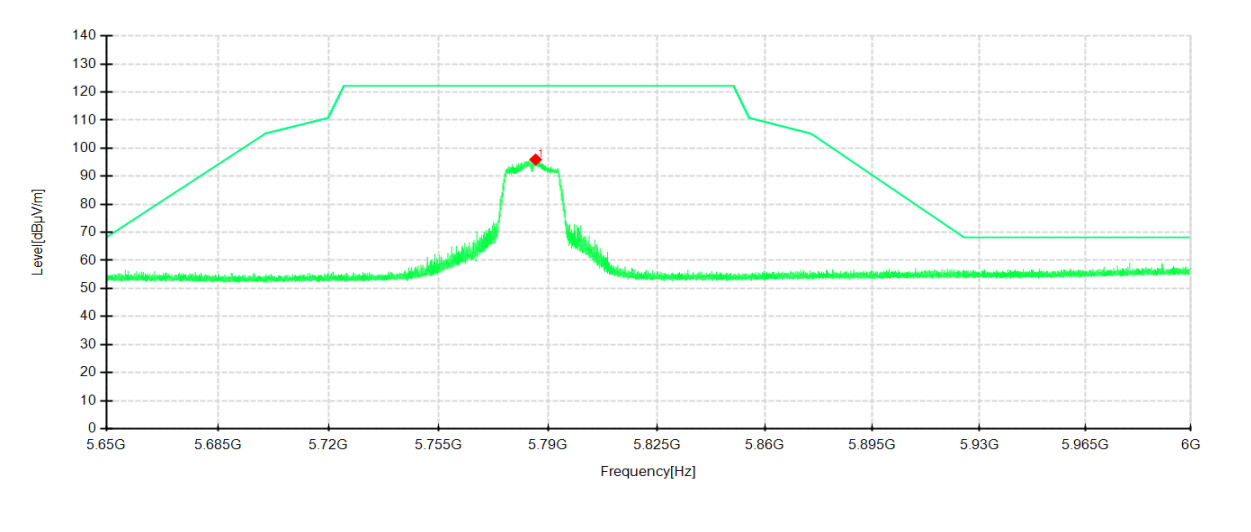


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5787.1650	82.63	99.74	17.11	122.20	22.46	200	148	Horizontal	/
1	5786.0275	78.83	95.94	17.11	122.20	26.26	200	64	Vertical	/

IEEE 802.11n HT20 mode/5825MHz


Detector mode: Peak

Polarity: Horizontal

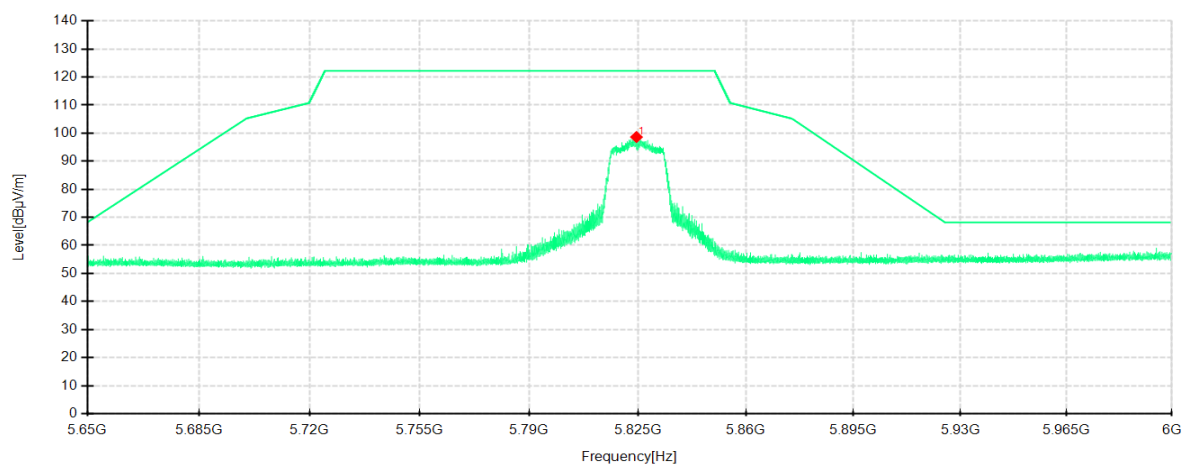

Detector mode: Peak

Polarity: Vertical

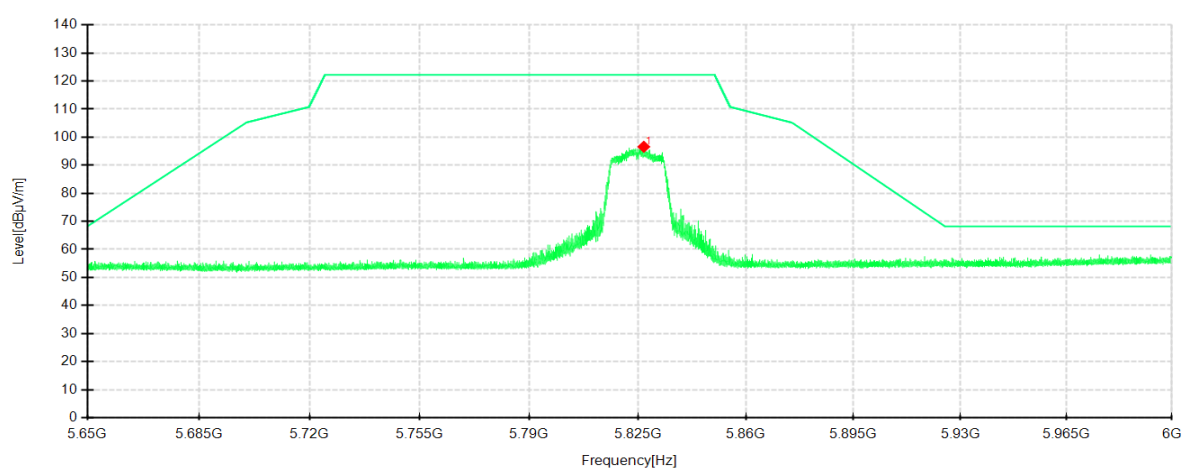


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5824.5800	81.56	98.63	17.07	122.20	23.57	200	148	Horizontal	/
1	5826.9600	79.50	96.58	17.08	122.20	25.62	200	134	Vertical	/

IEEE 802.11ac VHT20 mode/5745MHz


Detector mode: Peak

Polarity: Horizontal

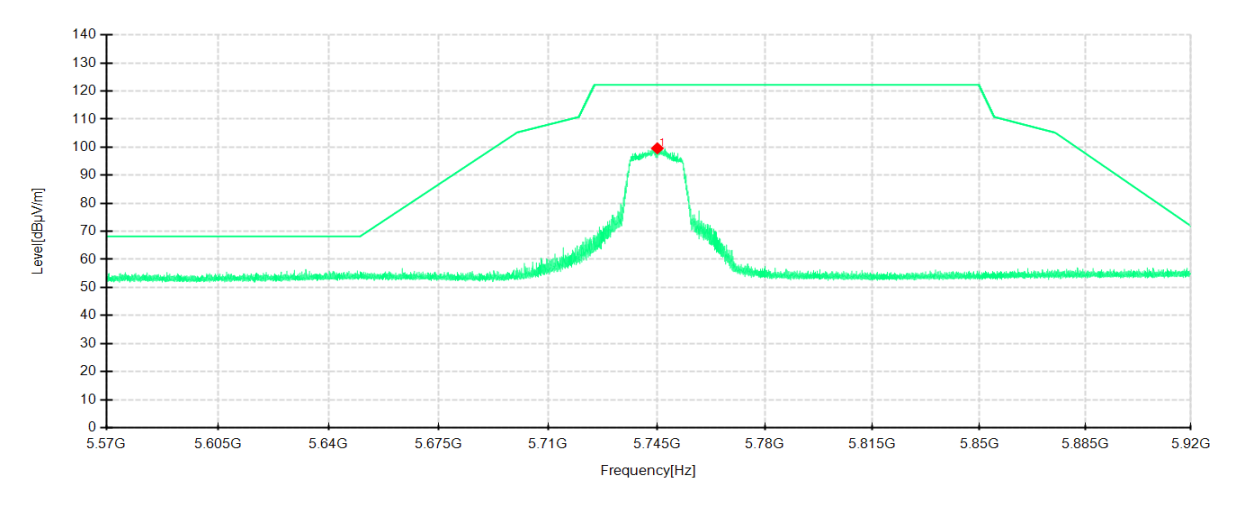

Detector mode: Peak


Polarity: Vertical

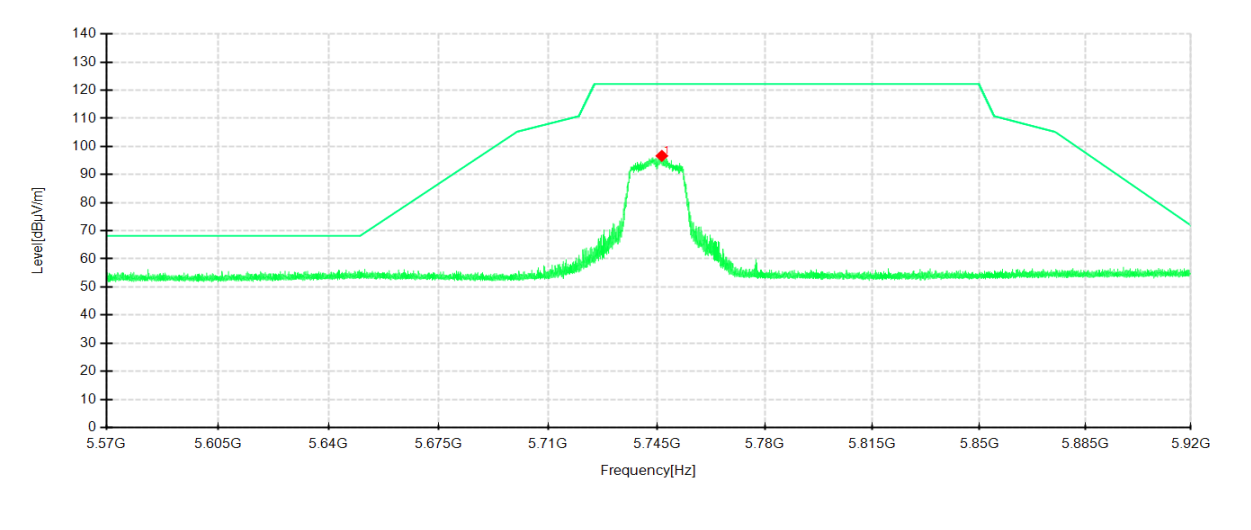

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5745.1575	82.43	99.59	17.16	122.20	22.61	100	141	Horizontal	/
1	5746.6100	79.47	96.66	17.19	122.20	25.54	200	64	Vertical	/


IEEE 802.11ac VHT20 mode/5785MHz
Detector mode: Peak

Polarity: Horizontal

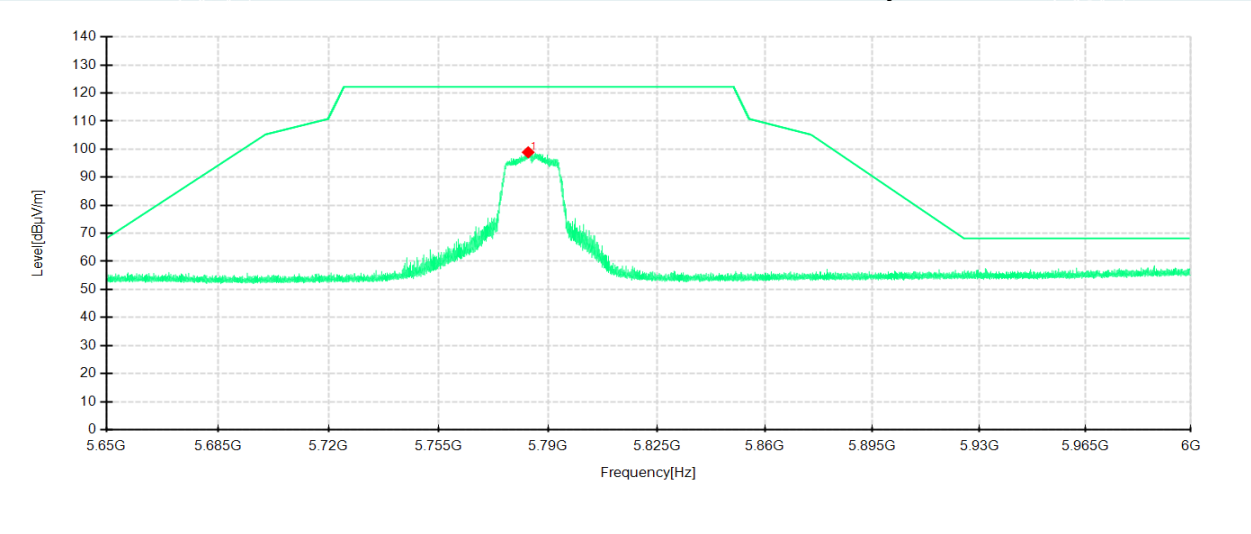

Detector mode: Peak

Polarity: Vertical

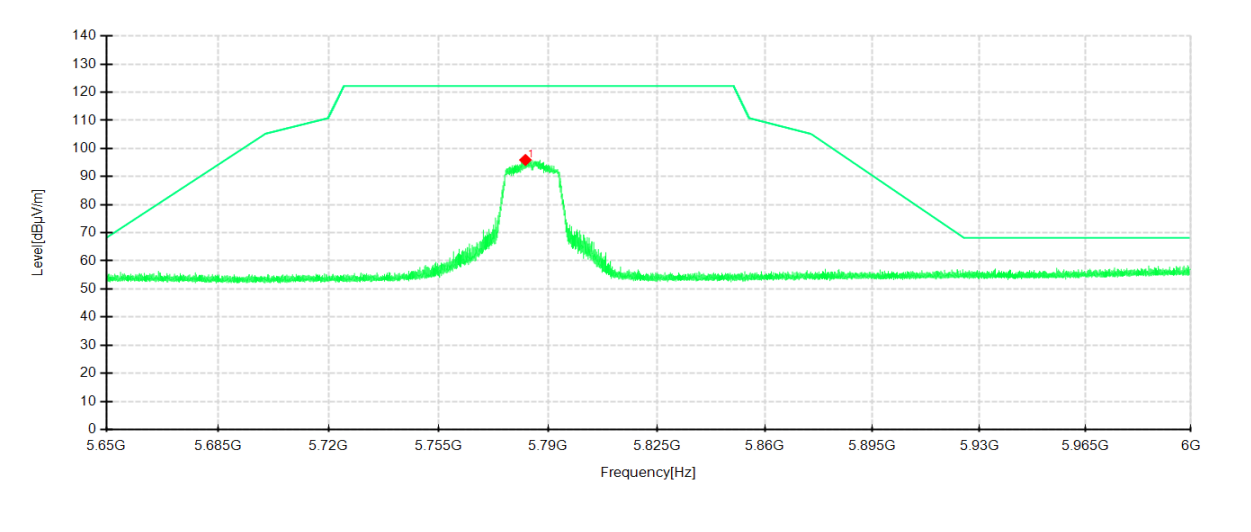


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5783.6650	81.78	98.90	17.12	122.20	23.30	200	149	Horizontal	/
1	5782.7725	78.78	95.91	17.13	122.20	26.29	200	63	Vertical	/

IEEE 802.11ac VHT20 mode/5825MHz


Detector mode: Peak

Polarity: Horizontal

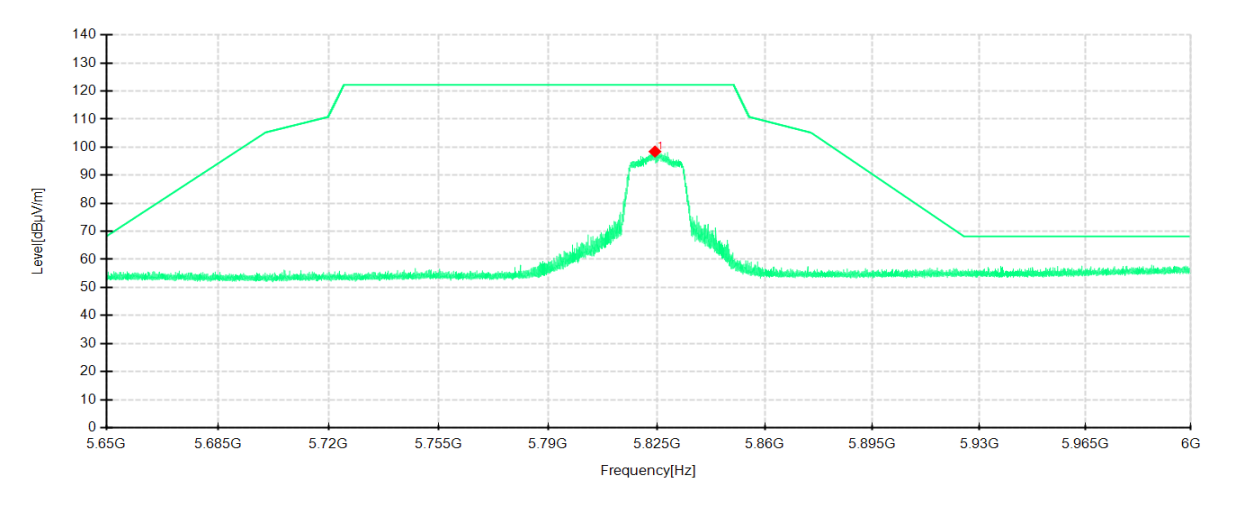

Detector mode: Peak

Polarity: Vertical

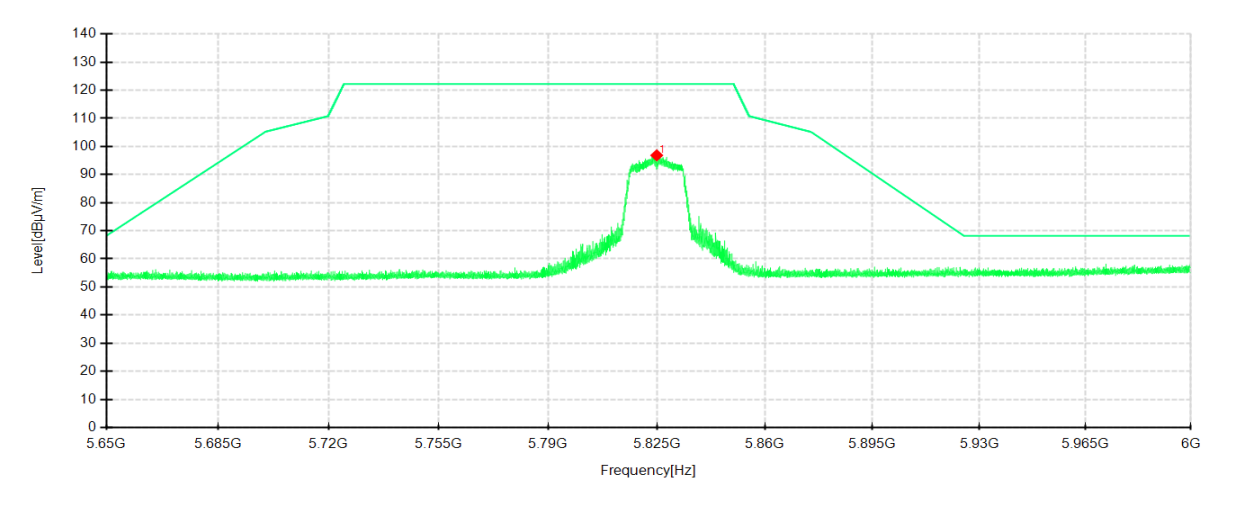


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5824.4225	81.37	98.44	17.07	122.20	23.76	200	148	Horizontal	/
1	5824.9825	79.77	96.84	17.07	122.20	25.36	200	133	Vertical	/

IEEE 802.11n HT40 mode/5755MHz


Detector mode: Peak

Polarity: Horizontal

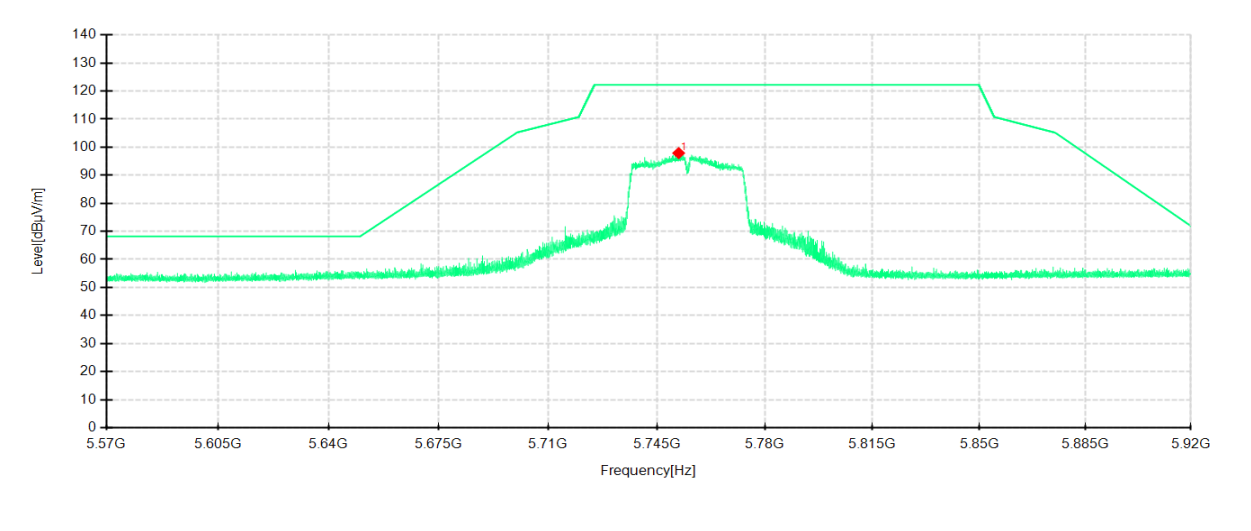

Detector mode: Peak

Polarity: Vertical

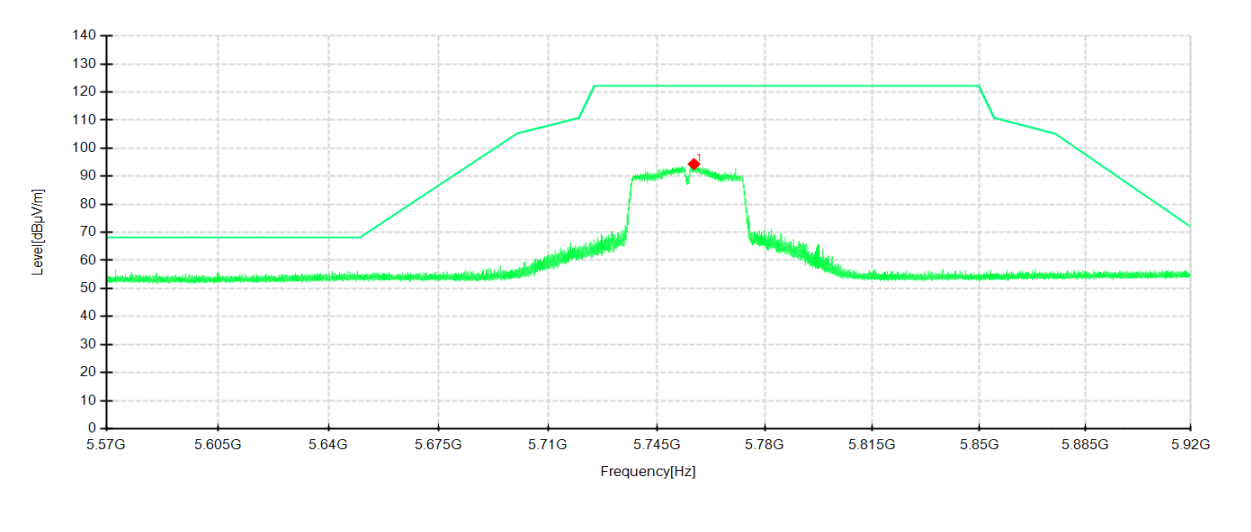


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5752.0350	80.65	97.89	17.24	122.20	24.31	100	134	Horizontal	/
1	5756.9875	77.12	94.34	17.22	122.20	27.86	200	63	Vertical	/

IEEE 802.11n HT40 mode/5795MHz


Detector mode: Peak

Polarity: Horizontal

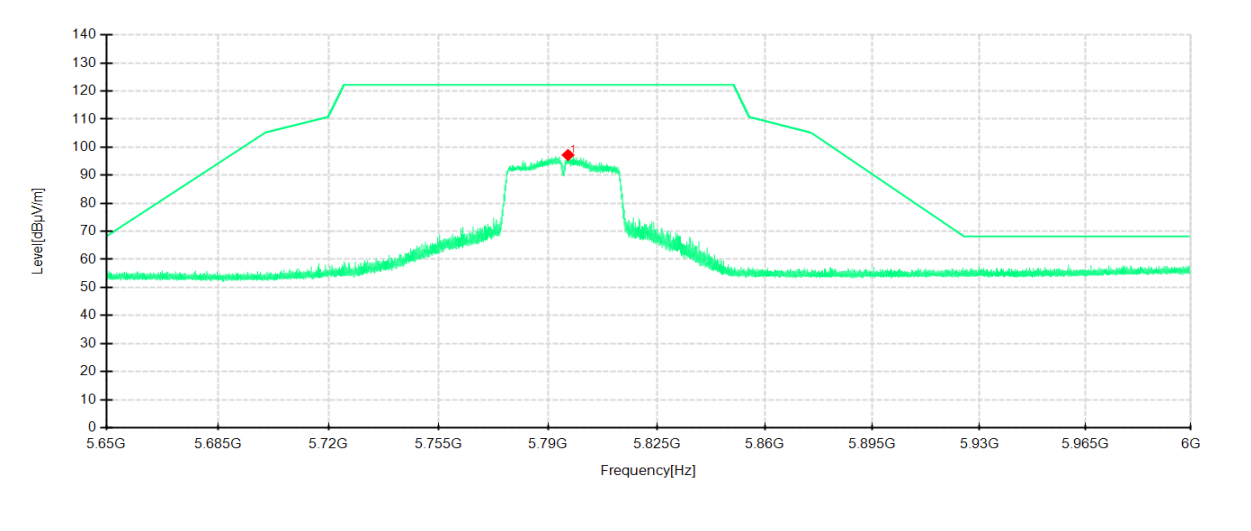

Detector mode: Peak

Polarity: Vertical

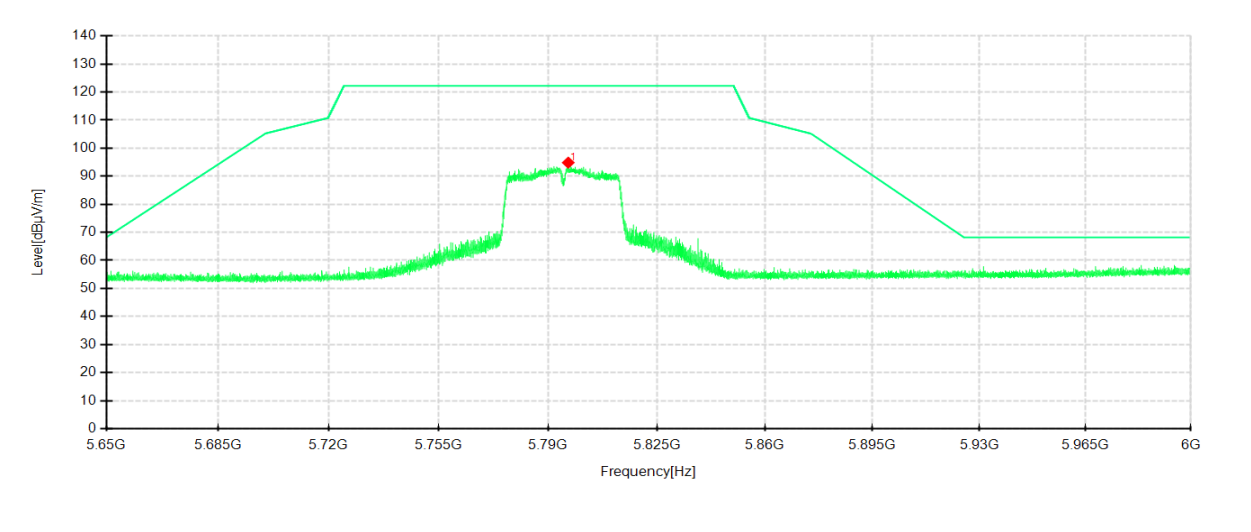


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5796.4225	80.14	97.21	17.07	122.20	24.99	200	149	Horizontal	/
1	5796.5100	77.78	94.85	17.07	122.20	27.35	200	133	Vertical	/

IEEE 802.11ac VHT40 mode/5755MHz


Detector mode: Peak

Polarity: Horizontal

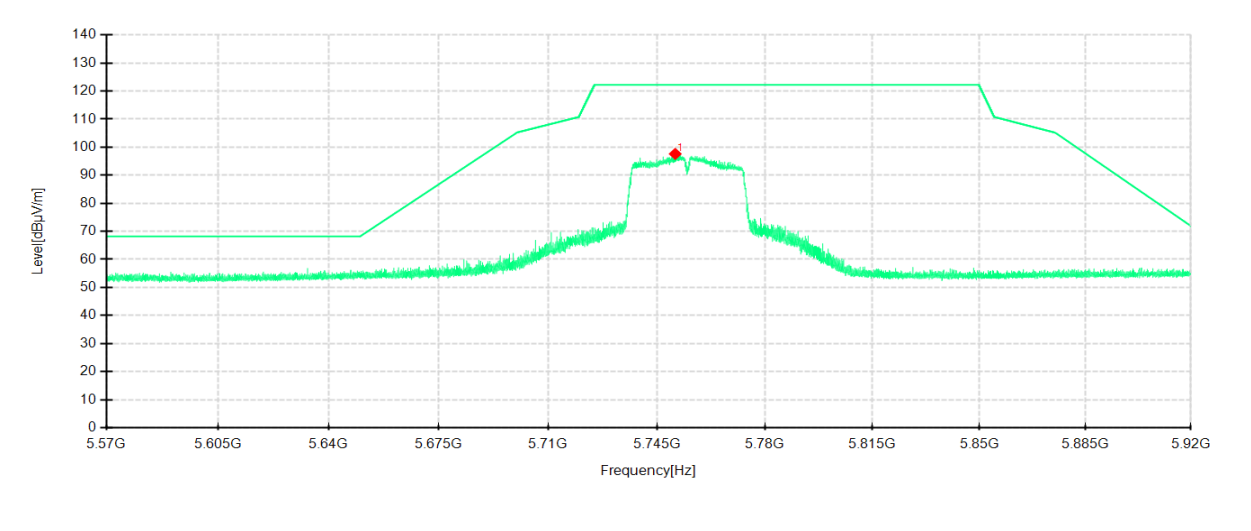

Detector mode: Peak

Polarity: Vertical

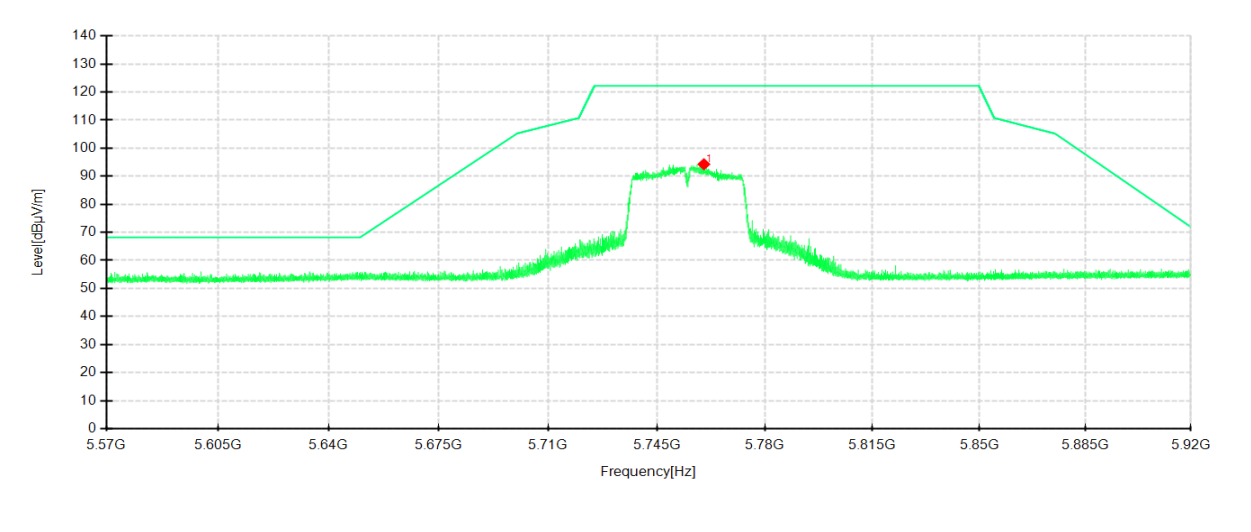


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5750.9325	80.36	97.61	17.25	122.20	24.59	200	132	Horizontal	/
1	5760.1900	77.07	94.28	17.21	122.20	27.92	200	62	Vertical	/

IEEE 802.11ac VHT40 mode/5795MHz


Detector mode: Peak

Polarity: Horizontal

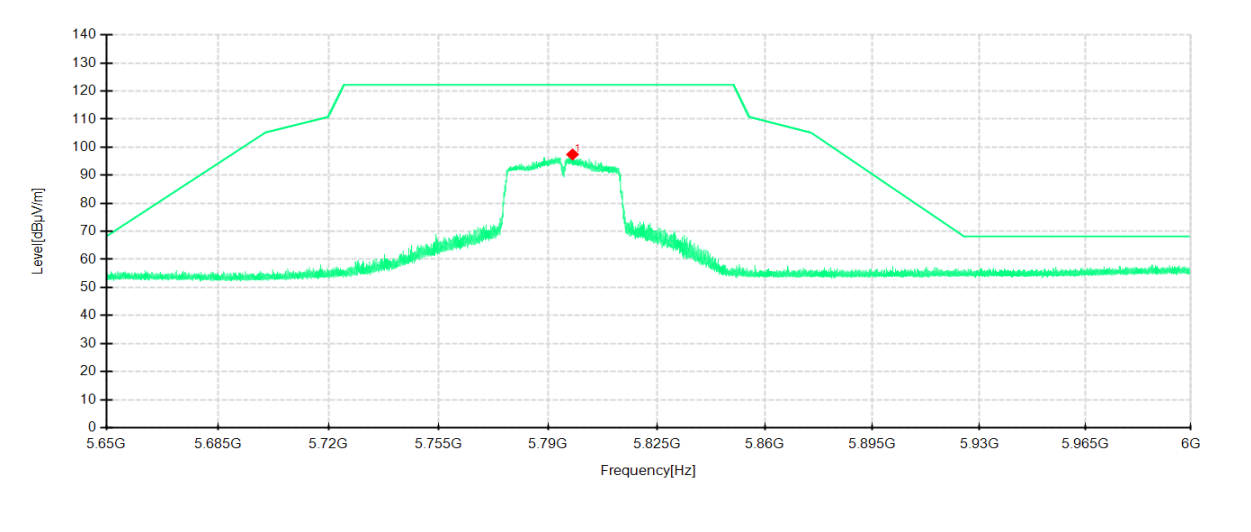

Detector mode: Peak

Polarity: Vertical

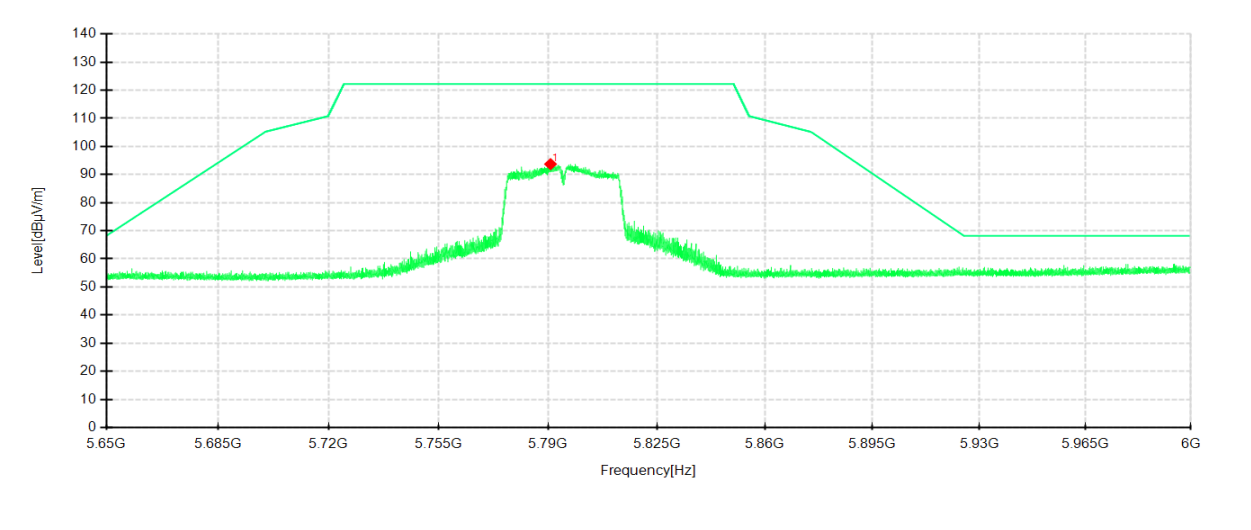


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBuV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5797.8750	80.32	97.39	17.07	122.20	24.81	200	149	Horizontal	/
1	5790.8050	76.63	93.72	17.09	122.20	28.48	200	258	Vertical	/

IEEE 802.11ac VHT80 mode/5775MHz


Detector mode: Peak

Polarity: Horizontal

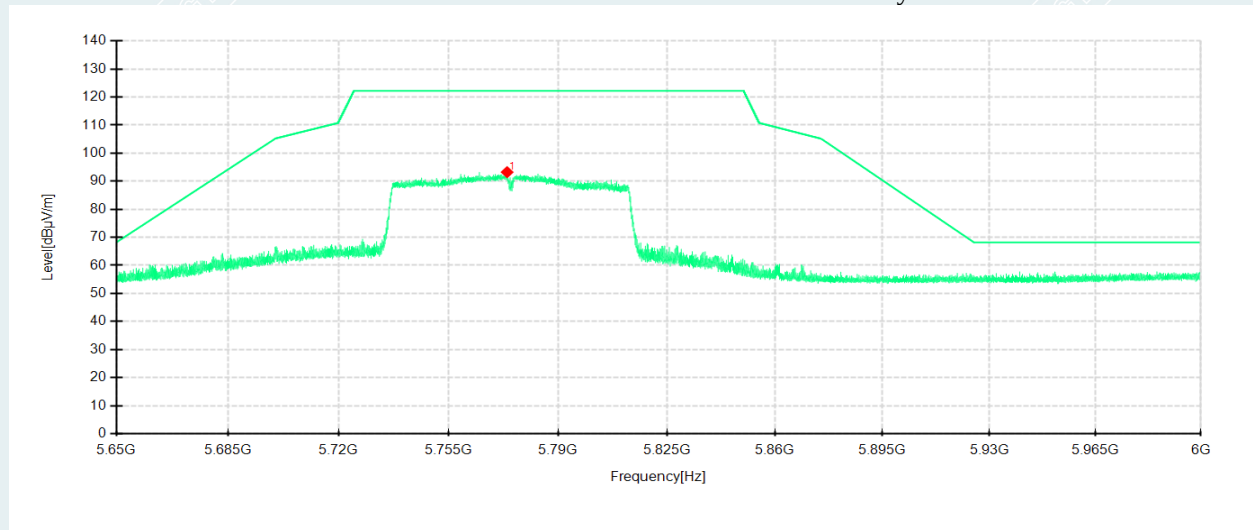

Detector mode: Peak

Polarity: Vertical

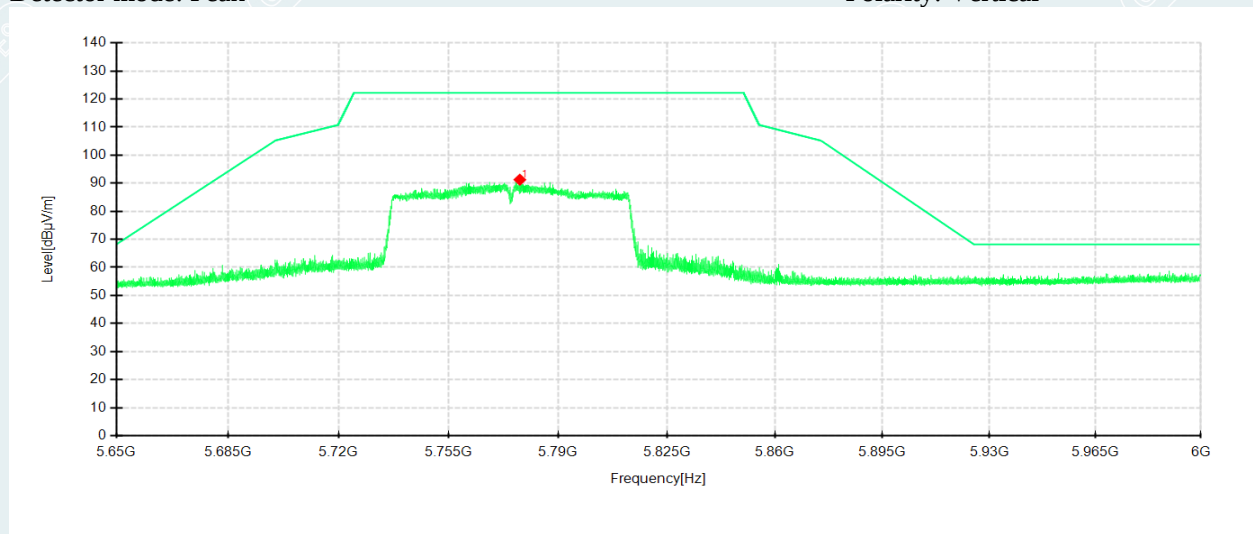

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Comment
1	5773.7075	76.08	93.24	17.16	122.20	28.96	200	149	Horizontal	/
1	5777.7675	74.12	91.26	17.14	122.20	30.94	200	64	Vertical	/

Remark: Max field strength in 3m distance. No any other emission which falls in restricted bands can be detected and be reported.

8. 6DB BANDWIDTH & 26DB BANDWIDTH & 99% OCCUPIED BANDWIDTH

8.1. LIMITS

Band	Frequency (MHz)	Test Item	Limit
U-NII-1	5150-5250	26dB Bandwidth&99% Occupied Bandwidth	N/A
U-NII-3	5725-5850	6dB Bandwidth&99% Occupied Bandwidth	6dB Bandwidth $\geq$ 500KHz

8.2. TEST PROCEDURES

For 26dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with table 1.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurements as needed until the RBW/EBW ratio is approximately 1%.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 6dB Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with table 2.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
- Repeat above procedures until all modes and channels were measured.
- Record the results in the test report.

For 99% Occupied Bandwidth Measurement :

- Connect EUT antenna terminal to the spectrum analyzer with RF cable.
- Spectrum analyzer setting parameters in accordance with table 3.
- Set the EUT transmit continuously with maximum output power.
- Allow trace to stabilize, use the 99% power bandwidth function to measure bandwidth.
- Repeat above procedures until all modes and channels were measured.

Record the results in the test report.

Table 1:

26dB Bandwidth	
Spectrum Parameters	Setting
RBW	approximately 1% of the emission bandwidth
VBW	> RBW
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold


Table 2:

6dB Bandwidth	
Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	40MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

Table 3:

99% Occupied Bandwidth	
Spectrum Parameters	Setting
RBW	approximately 1% of the emission bandwidth
VBW	approximately three times the RBW
Span	between 1.5 times and 5.0 times the OBW
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

8.3. TEST SETUP

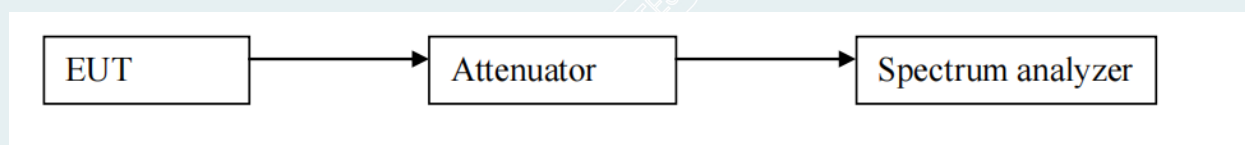

8.4. TEST RESULTS

Environmental Conditions	22.6°C/48%RH	Test Voltage	AC120V/60Hz
Tested By	Deng Weihao	Tested Date	2022-04-18

6dB BANDWIDTH

Test Mode	Antenna	Frequency [MHz]	6dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
IEEE 802.11a	Ant1	5745	16.28	5736.88	5753.16	0.5	PASS
		5785	16.32	5776.84	5793.16	0.5	PASS
		5825	16.32	5816.84	5833.16	0.5	PASS
IEEE 802.11n HT20	Ant1	5745	17.56	5736.24	5753.80	0.5	PASS
		5785	17.56	5776.24	5793.80	0.5	PASS
		5825	17.56	5816.24	5833.80	0.5	PASS
IEEE 802.11n HT40	Ant1	5755	35.84	5737.08	5772.92	0.5	PASS
		5795	35.52	5777.24	5812.76	0.5	PASS
IEEE 802.11ac VHT20	Ant1	5745	17.56	5736.24	5753.80	0.5	PASS
		5785	17.56	5776.24	5793.80	0.5	PASS
		5825	17.56	5816.24	5833.80	0.5	PASS
IEEE 802.11ac VHT40	Ant1	5755	35.76	5737.16	5772.92	0.5	PASS
		5795	35.36	5777.24	5812.60	0.5	PASS
IEEE 802.11ac VHT80	Ant1	5775	75.20	5737.40	5812.60	0.5	PASS


26dB BANDWIDTH


Test Mode	Antenna	Frequency [MHz]	26dB EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
IEEE 802.11a	Ant1	5180	21.20	5169.40	5190.60	0.5	PASS
		5200	21.16	5189.44	5210.60	0.5	PASS
		5240	21.20	5229.28	5250.48	0.5	PASS
IEEE 802.11n HT20	Ant1	5180	21.56	5169.32	5190.88	0.5	PASS
		5200	21.72	5189.24	5210.96	0.5	PASS
		5240	21.80	5229.08	5250.88	0.5	PASS
IEEE 802.11n HT40	Ant1	5190	40.08	5170.00	5210.08	0.5	PASS
		5230	40.00	5210.00	5250.00	0.5	PASS
IEEE 802.11ac VHT20	Ant1	5180	21.48	5169.32	5190.80	0.5	PASS
		5200	21.72	5189.24	5210.96	0.5	PASS
		5240	21.56	5229.28	5250.84	0.5	PASS
IEEE 802.11ac VHT40	Ant1	5190	40.40	5169.92	5210.32	0.5	PASS
		5230	40.00	5210.08	5250.08	0.5	PASS
IEEE 802.11ac VHT80	Ant1	5210	80.96	5170.00	5250.96	0.5	PASS


99% OCCUPIED BANDWIDTH


Test Mode	Antenna	Frequency [MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
IEEE 802.11a	Ant1	5180	17.662	5171.289	5188.951	---	PASS
		5200	17.782	5190.969	5208.751	---	PASS
		5240	17.822	5231.129	5248.951	---	PASS
		5745	17.702	5736.089	5753.791	---	PASS
		5785	17.782	5776.089	5793.871	---	PASS
		5825	17.942	5816.009	5833.951	---	PASS
IEEE 802.11n HT20	Ant1	5180	18.661	5170.649	5189.311	---	PASS
		5200	18.741	5190.569	5209.311	---	PASS
		5240	18.741	5230.649	5249.391	---	PASS
		5745	18.701	5735.689	5754.391	---	PASS
		5785	18.541	5775.769	5794.311	---	PASS
		5825	18.581	5815.769	5834.351	---	PASS
IEEE 802.11n HT40	Ant1	5190	36.523	5171.858	5208.382	---	PASS
		5230	36.523	5211.858	5248.382	---	PASS
		5755	36.763	5736.698	5773.462	---	PASS
		5795	36.683	5776.698	5813.382	---	PASS
IEEE 802.11ac VHT20	Ant1	5180	18.741	5170.649	5189.391	---	PASS
		5200	18.781	5190.649	5209.431	---	PASS
		5240	18.541	5230.809	5249.351	---	PASS
		5745	18.701	5735.689	5754.391	---	PASS
		5785	18.901	5775.609	5794.510	---	PASS
		5825	18.741	5815.450	5834.191	---	PASS
IEEE 802.11ac VHT40	Ant1	5190	36.603	5171.698	5208.302	---	PASS
		5230	36.683	5211.698	5248.382	---	PASS
		5755	36.763	5736.698	5773.462	---	PASS
		5795	36.683	5776.698	5813.382	---	PASS
IEEE 802.11ac VHT80	Ant1	5210	75.445	5172.278	5247.722	---	PASS
		5775	76.084	5736.958	5813.042	---	PASS


6dB BANDWIDTH

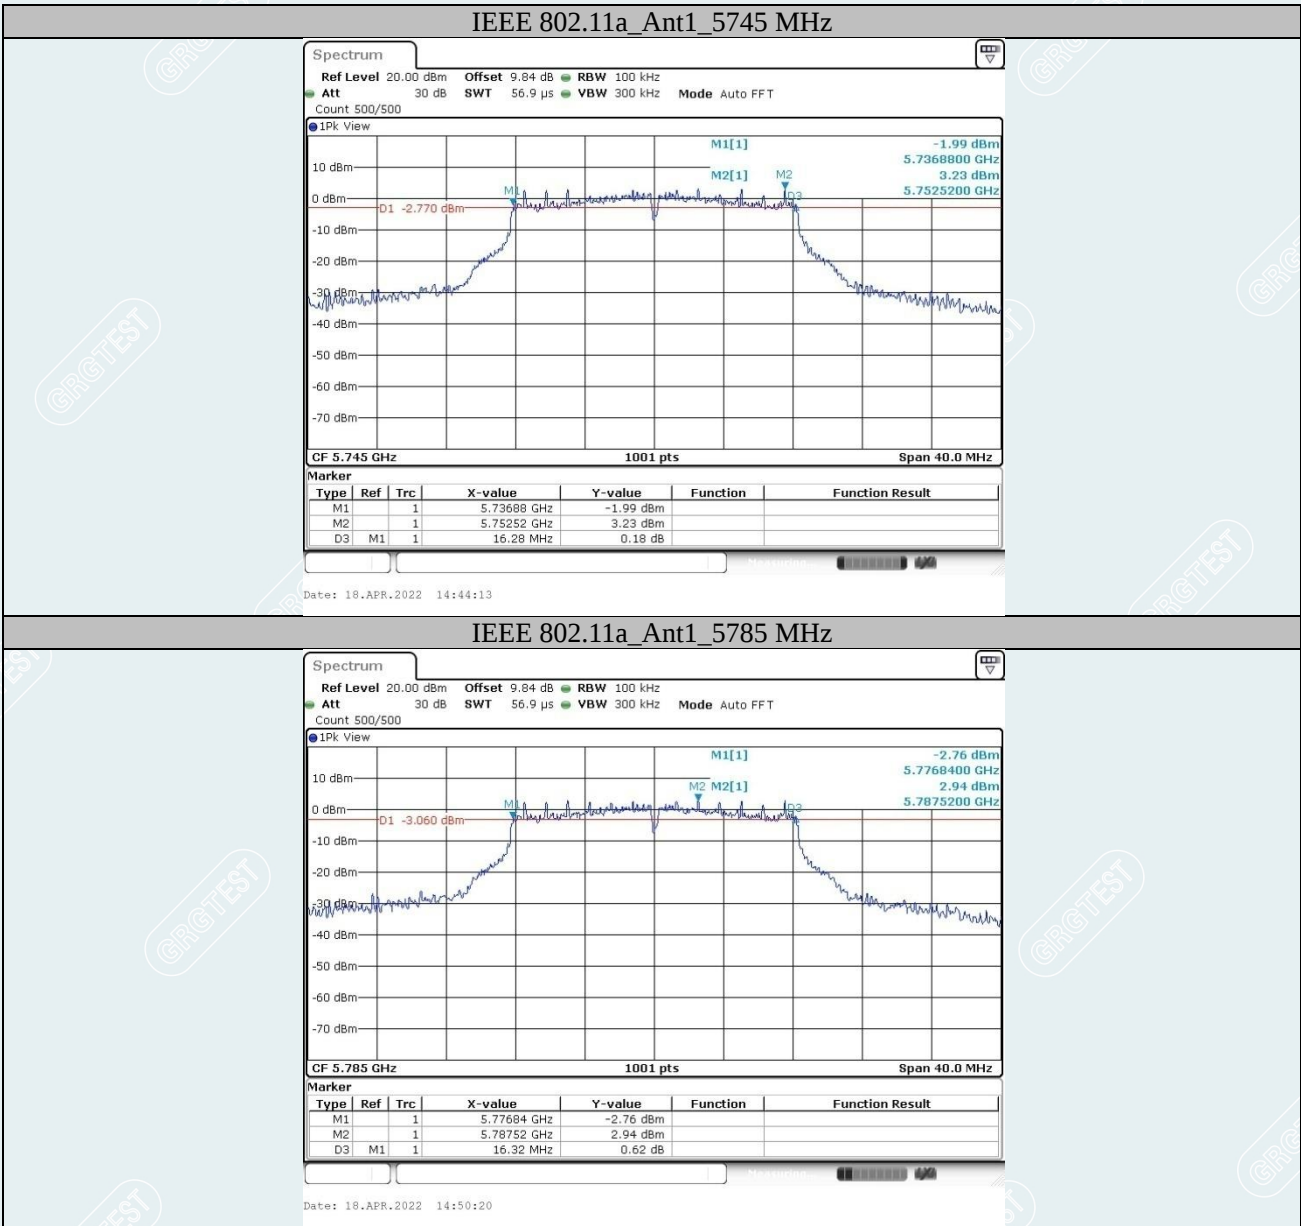


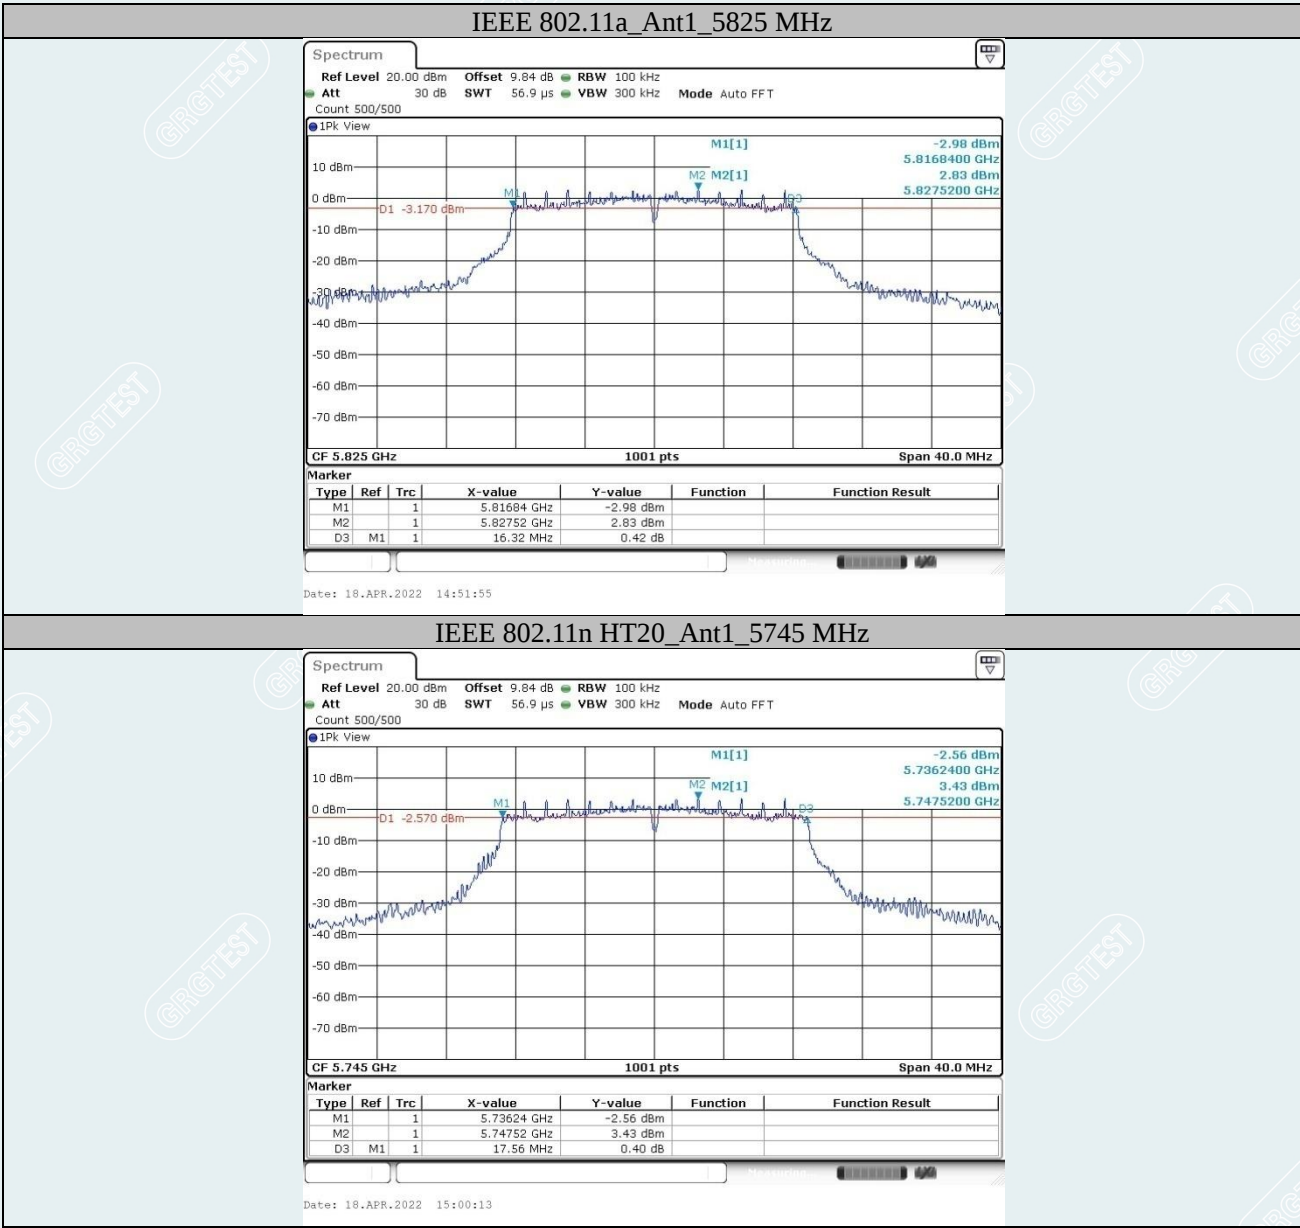


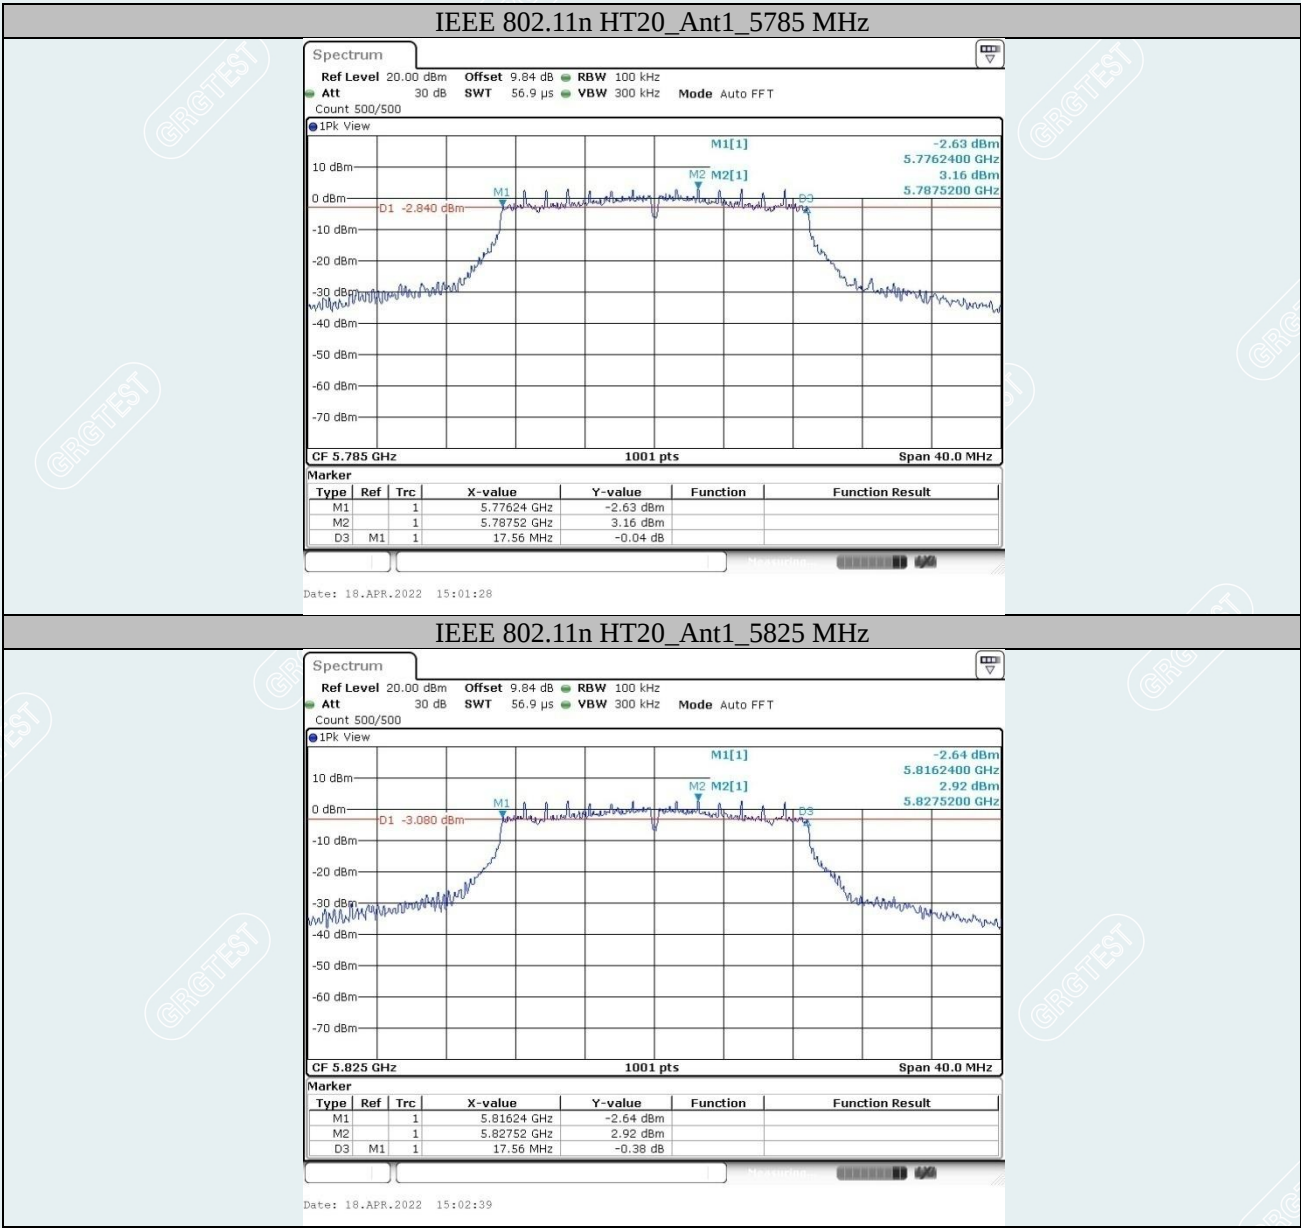

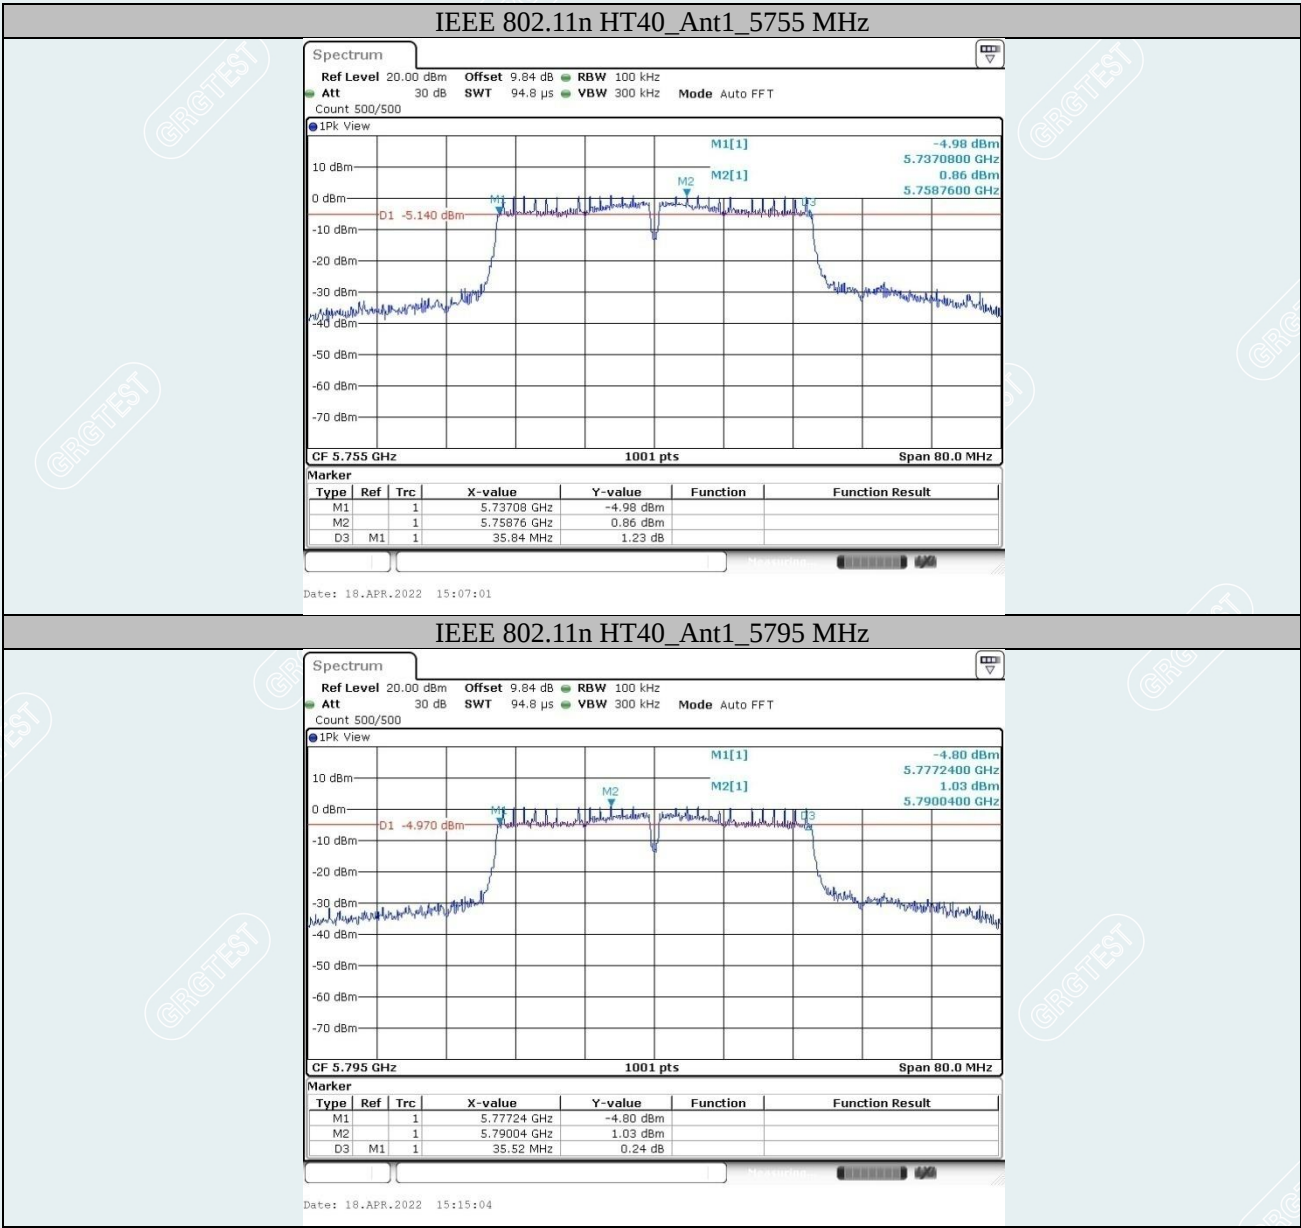

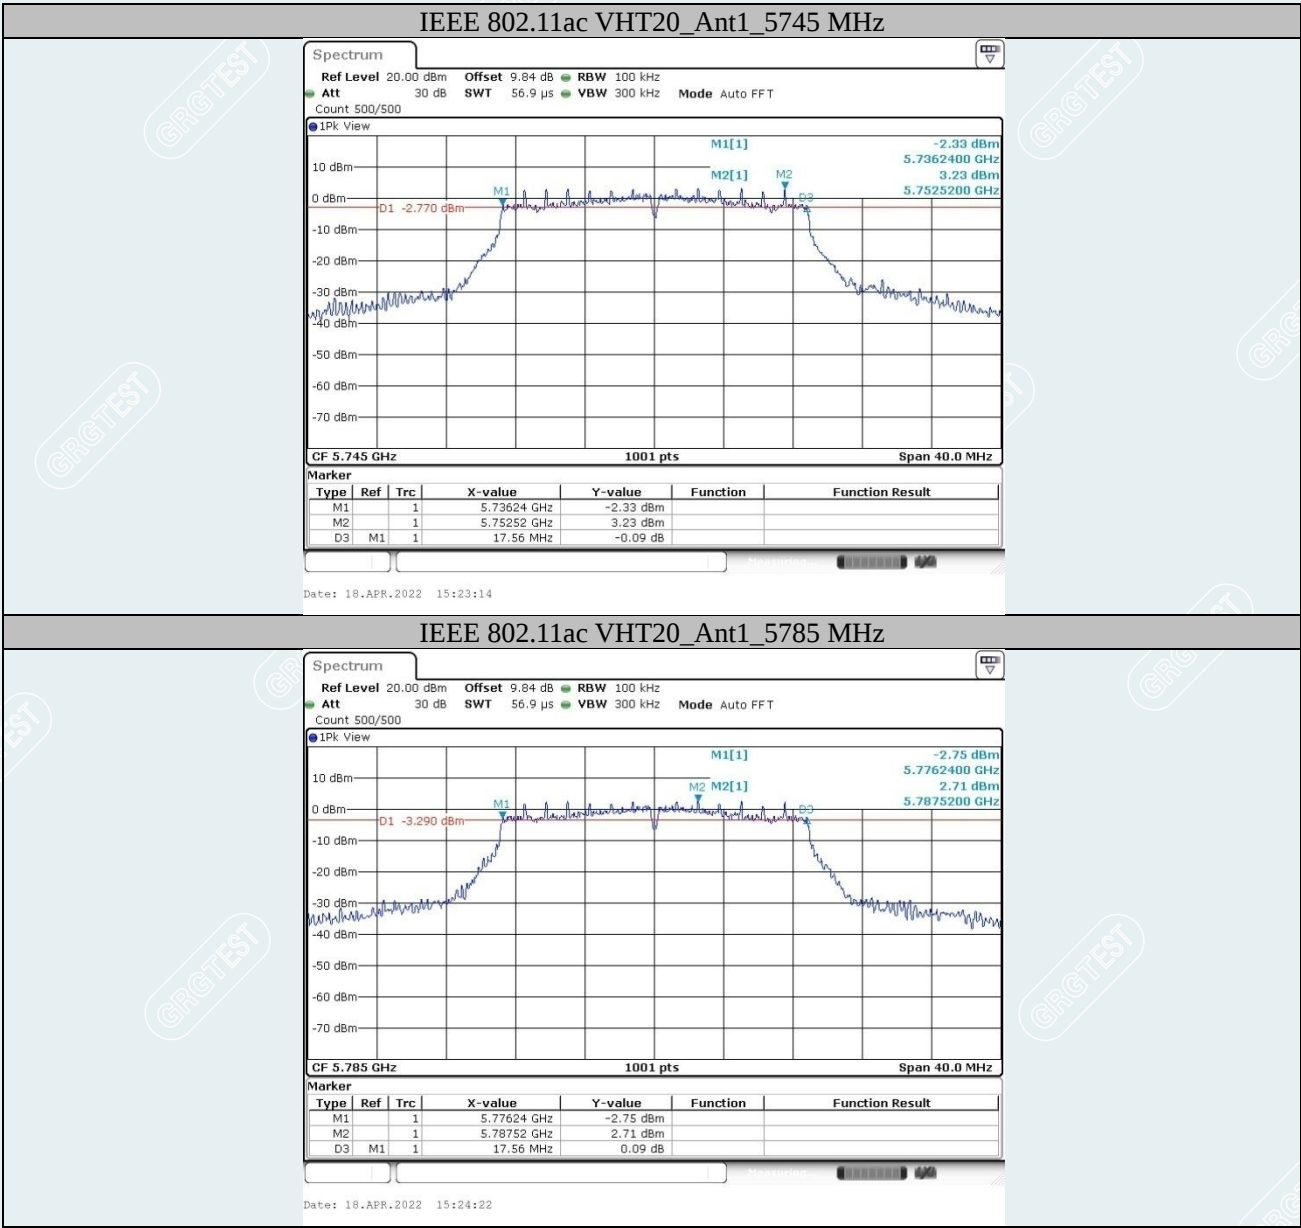

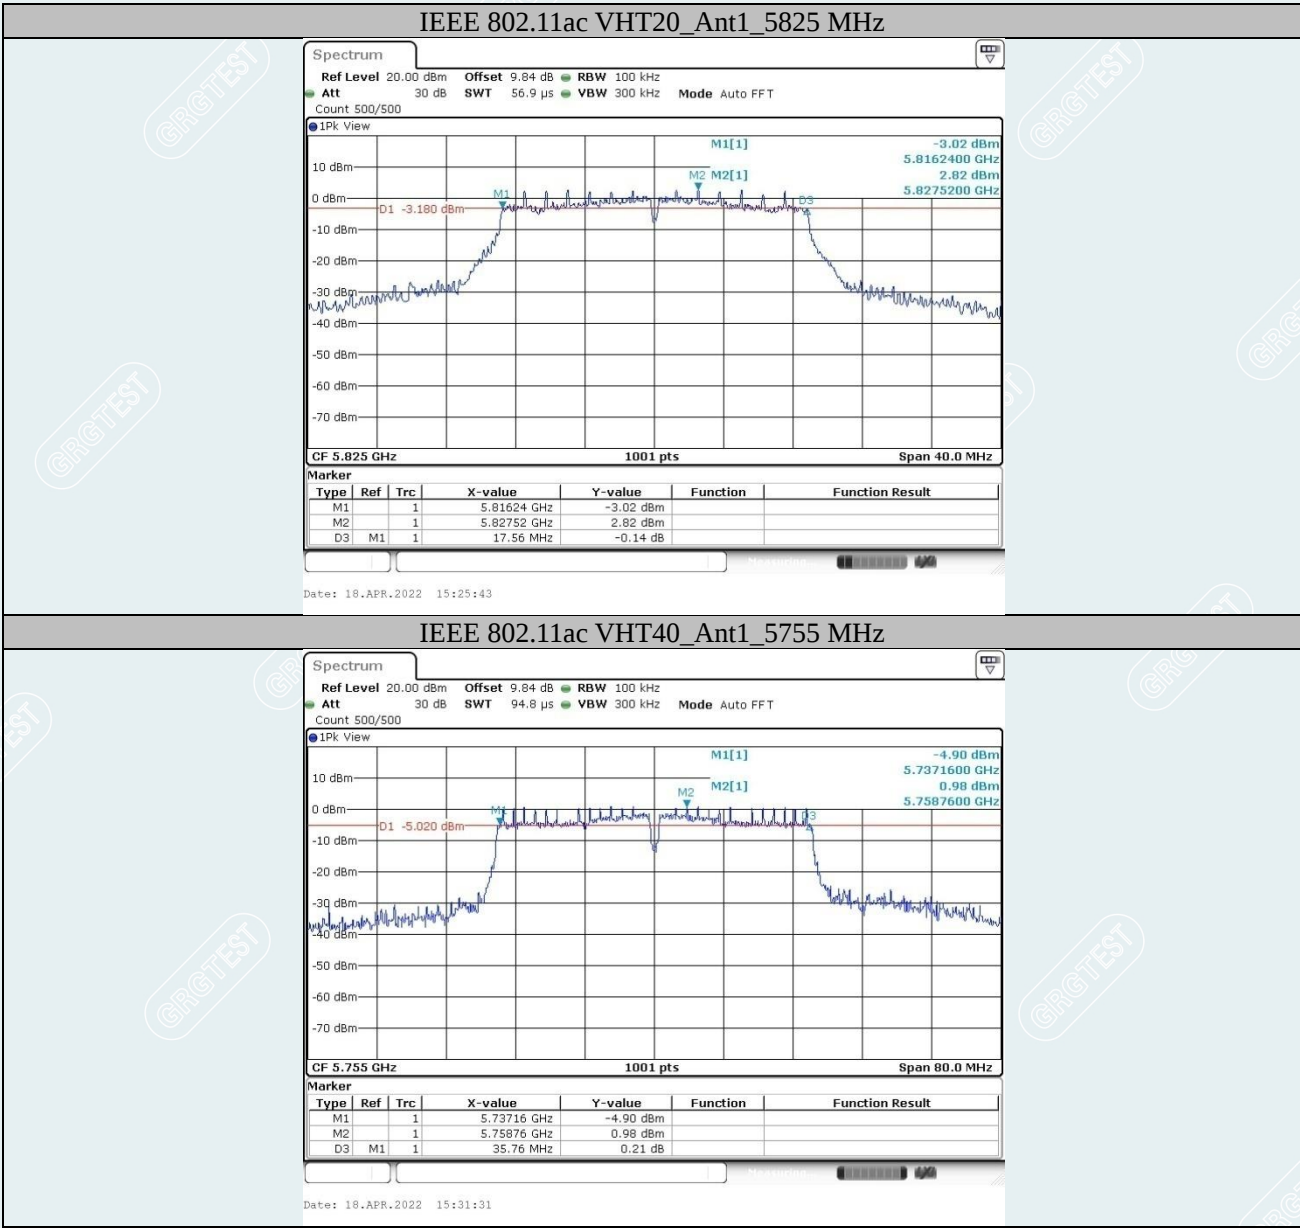

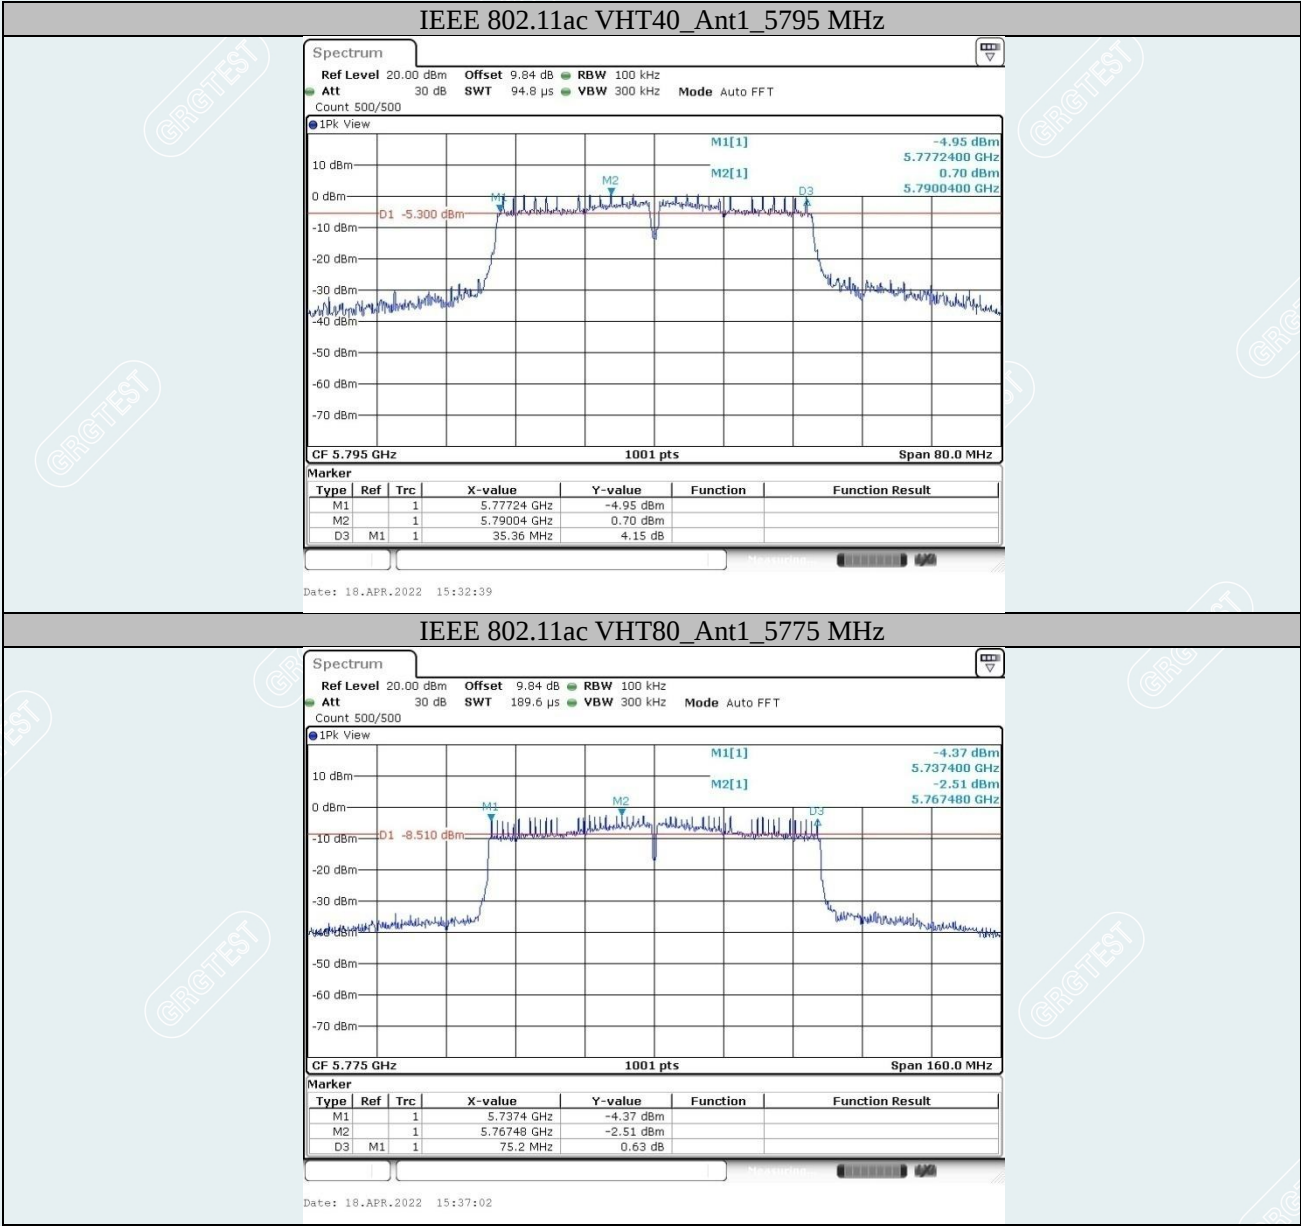

26dB BANDWIDTH

