



**Shenzhen GUOREN Certification Technology Service Co., Ltd.**

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community,  
Fenghuang Street, Guangming District, Shenzhen, China

# TEST REPORT

## FCC Part 24 Subpart E

Report Reference No.....: GRCTR250502011-01

FCC ID.....: 2BLXD-ACOM664L

Compiled by

( position+printed name+signature) : Testing Engineer Jimmy Wang

Supervised by

( position+printed name+signature) : Project Engineer Kelley Zhang

Approved by

( position+printed name+signature) : Manager Sam Wang

Date of issue.....: Jun. 23, 2025

Testing Laboratory Name.....: Shenzhen GUOREN Certification Technology Service Co., Ltd.

Address.....: 101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

Applicant's name.....: Shenzhen ejoin technology co.,ltd.

Address.....: 301, Jinhongfeng Business Building, Xingdong Community,71 Block, Bao an District. Shenzhen City

Test specification.....:

FCC CFR Title 47 Part 2, Part 24E

Standard.....: ANSI/TIA-603-E-2016

KDB 971168 D01

**Shenzhen GUOREN Certification Technology Service Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen GUOREN Certification Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen GUOREN Certification Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: SMS Gateway

Trade Mark.....: /

Manufacturer.....: Shenzhen ejoin technology co.,ltd.

Model/Type reference.....: ACOM664L-64-EG91

Listed Models .....: ACOM504,ACOM508,ACOM516,ACOM532,ACOM604,ACOM608,ACOM616,ACOM632,ACOM664,ACOM708,ACOM716,SIMPOOL,ACOMT128,ACOMU08,ACOMU16,ACOMU32,ACOMU64,ACOMU128

Hardware version.....: V1.0

Software version .....: V1.0

Frequency.....: E-UTRA Band 2

Ratings.....: DC 12V from external circuit

Result.....: **PASS**



## TEST REPORT

Equipment under Test : SMS Gateway

Model /Type : ACOM664L-64-EG91

Listed Models : ACOM504,ACOM508,ACOM516,ACOM532,ACOM604,ACOM608,ACOM616,ACOM632,ACOM664,ACOM708,ACOM716,SIMPOOL,ACOMT128,ACOMU08,ACOMU16,ACOMU32,ACOMU64,ACOMU128

**Applicant** : **Shenzhen ejoin technology co.,ltd.**

Address : 301, Jinhongfeng Business Building, Xingdong Community,71 Block, Bao an District. Shenzhen City

**Manufacturer** : **Shenzhen ejoin technology co.,ltd.**

Address : 301, Jinhongfeng Business Building, Xingdong Community,71 Block, Bao an District. Shenzhen City

|                    |             |
|--------------------|-------------|
| <b>Test result</b> | <b>Pass</b> |
|--------------------|-------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

# Contents

|  |           |
|--|-----------|
| <b>1 SUMMARY .....</b>   | <b>4</b>  |
| 1.1 TEST STANDARDS .....   | 4         |
| 1.2 TEST DESCRIPTION .....   | 4         |
| 1.3 ADDRESS OF THE TEST LABORATORY .....                             | 5         |
| 1.4 TEST FACILITY .....  | 5         |
| 1.5 STATEMENT OF THE MEASUREMENT UNCERTAINTY .....                   | 5         |
| <b>2 GENERAL INFORMATION .....</b>                                   | <b>7</b>  |
| 2.1 ENVIRONMENTAL CONDITIONS .....                                   | 7         |
| 2.2 GENERAL DESCRIPTION OF EUT .....                                 | 7         |
| 2.3 DESCRIPTION OF TEST MODES AND TEST FREQUENCY .....               | 7         |
| 2.4 EQUIPMENTS USED DURING THE TEST .....                            | 8         |
| 2.5 RELATED SUBMITTAL(S) / GRANT (S) .....                           | 9         |
| 2.6 MODIFICATIONS .....  | 9         |
| <b>3 TEST CONDITIONS AND RESULTS .....</b>                           | <b>10</b> |
| 3.1 OUTPUT POWER .....   | 10        |
| 3.2 PEAK-TO-AVERAGE RATIO (PAR) .....                                | 14        |
| 3.3 OCCUPIED BANDWIDTH AND EMISSION BANDWIDTH .....                  | 15        |
| 3.4 BAND EDGE COMPLIANCE .....                                       | 16        |
| 3.5 SPURIOUS EMISSION .....  | 17        |
| 3.6 FREQUENCY STABILITY UNDER TEMPERATURE & VOLTAGE VARIATIONS ..... | 20        |
| <b>4 TEST SETUP PHOTOS OF THE EUT .....</b>                          | <b>22</b> |
| <b>5 PHOTOS OF THE EUT .....</b>                                     | <b>23</b> |

# 1 SUMMARY

## 1.1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 2:](#) FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[FCC Part 24 Subpart E:](#) PUBLIC MOBILE SERVICES

[ANSI/TIA-603-E-2016:](#) Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015:](#) IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[FCC KDB971168D01](#) Power Meas License Digital Systems

## 1.2 Test Description

| Test Item                              | Section in CFR 47                  | Result |
|--|------------------------------------|--------|
| RF Output Power                        | Part 2.1046<br>Part 24.232 (c)     | Pass   |
| Peak-to-Average Ratio                  | Part 24.232 (d)                    | Pass   |
| 99% & -26 dB Occupied Bandwidth        | Part 2.1049<br>Part 24.238         | Pass   |
| Spurious Emissions at Antenna Terminal | Part 2.1051<br>Part 24.238 (a)     | Pass   |
| Field Strength of Spurious Radiation   | Part 2.1053<br>Part 24.238 (a)     | Pass   |
| Out of band emission, Band Edge        | Part 22.917 (a)<br>Part 24.238 (a) | Pass   |
| Frequency stability                    | Part 2.1055<br>Part 24.235         | Pass   |

### 1.3 Address of the test laboratory

**Shenzhen GUOREN Certification Technology Service Co., Ltd.**

101#, Building K & Building T, The Second Industrial Zone, Jiazitang Community, Fenghuang Street, Guangming District, Shenzhen, China

### 1.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 920798 Designation Number: CN1304**

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

**A2LA-Lab Cert. No.: 6202.01**

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

**ISED#: 27264 CAB identifier: CN0115**

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

**CNAS-Lab Code: L15631**

Shenzhen GUOREN Certification Technology Service Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories for the Competence of Testing and Calibration Laboratories.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.

### 1.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2 " and is documented in the Shenzhen GUOREN Certification Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GUOREN Certification Technology Service Co., Ltd.:

| Test                                    | Range       | Measurement Uncertainty | Notes |
|---|-------------|-------------------------|-------|
| Radiated Emission                       | 30~1000MHz  | 4.06 dB                 | (1)   |
| Radiated Emission                       | 1~18GHz     | 5.14 dB                 | (1)   |
| Radiated Emission                       | 18-40GHz    | 5.38 dB                 | (1)   |
| Conducted Disturbance                   | 0.15~30MHz  | 2.14 dB                 | (1)   |
| Conducted Power                         | 30MHz~18GHz | 0.54 dB                 | (1)   |
| Power spectral density                  | /           | 0.56 dB                 | (1)   |
| Spectrum bandwidth                      | /           | 1.2%                    | (1)   |
| Radiated spurious emission (30MHz-1GHz) | 30~1000MHz  | 3.75 dB                 | (1)   |

|   |          |         |     |
|---|----------|---------|-----|
| Radiated spurious emission<br>(1GHz-18GHz)  | 1~18GHz  | 4.12 dB | (1) |
| Radiated spurious emission<br>(18GHz-40GHz) | 18-40GHz | 5.06 dB | (1) |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 2 GENERAL INFORMATION

### 2.1 Environmental conditions

|                                |   |               |
|--------------------------------|---|---------------|
| Date of receipt of test sample | : | May. 12, 2025 |
|                                |   |               |
| Testing commenced on           | : | May. 12, 2025 |
|                                |   |               |
| Testing concluded on           | : | Jun. 23, 2025 |

During the measurement the environmental conditions were within the listed ranges:

|                     |              |
|---------------------|--------------|
| Normal Temperature: | 15-35 °C     |
| Relative Humidity:  | 30-60 %      |
| Air Pressure:       | 950-1050mbar |

### 2.2 General Description of EUT

|   |  |
|---|--|
| Product Name:   | SMS Gateway  |
| Model/Type reference:   | ACOM664L-64-EG91   |
| Listed Models:  | ACOM504,ACOM508,ACOM516,ACOM532,ACOM604,ACOM608,ACOM616,ACOM632,ACOM664,ACOM708,ACOM716,SIMPOOL,ACOMT128,ACOMU08,ACOMU16,ACOMU32,ACOMU64,ACOMU128(The products are identical in interior structure, electrical circuits and components, just model names are different.) |
| Power supply:   | DC 12V from external circuit   |
| Adapter information:  | M/N:GM152-1201250-F<br>Input:100-240~ 50/60Hz 2.5A<br>Output:12.0V---12.5A 150.0W  |
| Testing sample ID:  | GRCTR250502011-1# (Engineer sample),<br>GRCTR250502011-2# (Normal sample)  |
| <b>LTE</b>  |  |
| Operation Band:   | E-UTRA Band 2  |
| Support Bandwidth:  | Band 2: 1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz  |
| TX/RXFrequency Range:   | E-UTRA Band 2(1850 MHz -1910MHz)   |
| Modulation Type:  | QPSK, 16QAM  |
| Release Version:  | Release 9  |
| Category:   | Cat 1  |
| Antenna Type:   | External antenna   |
| Antenna Gain*(Supplied by the customer):  | Band 2: 1.79 dBi   |
| Remark:*When the information provided by the customer was used to calculate test results, if the information provided by the customer is not accurate, shenzhen GUOREN Certification Technology Service Co., Ltd. does not assume any responsibility. |  |

Note: For more details, refer to the user's manual of the EUT.

### 2.3 Description of Test Modes and Test Frequency

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

## 2.4 Equipments Used during the Test

| Test Equipment                | Manufacturer           | Model No.   | Equipment No. | Calibration Date | Calibration Due Date |
|-------------------------------|------------------------|-------------|---------------|------------------|----------------------|
| LISN                          | R&S                    | ENV216      | GRCTEE009     | 2024/09/19       | 2025/09/18           |
| LISN                          | R&S                    | ENV216      | GRCTEE010     | 2024/09/19       | 2025/09/18           |
| EMI Test Receiver             | R&S                    | ESPI        | GRCTEE017     | 2024/09/19       | 2025/09/18           |
| EMI Test Receiver             | R&S                    | ESCI        | GRCTEE008     | 2024/09/19       | 2025/09/18           |
| Spectrum Analyzer             | Agilent                | N9020A      | GRCTEE002     | 2024/09/19       | 2025/09/18           |
| Spectrum Analyzer             | R&S                    | FSP         | GRCTEE003     | 2024/09/20       | 2025/09/19           |
| Vector Signal generator       | Agilent                | N5181A      | GRCTEE007     | 2024/09/19       | 2025/09/18           |
| Analog Signal Generator       | R&S                    | SML03       | GRCTEE006     | 2024/09/19       | 2025/09/18           |
| Climate Chamber               | QIYA                   | LCD-9530    | GRCTES016     | 2024/09/19       | 2025/09/18           |
| Universal Radio Communication | R&S                    | CMW500      | GRCTEE001     | 2024/09/19       | 2025/09/18           |
| Ultra-Broadband Antenna       | Schwarzbeck            | VULB9163    | GRCTEE018     | 2023/09/28       | 2026/09/27           |
| Horn Antenna                  | Schwarzbeck            | BBHA 9120D  | GRCTEE019     | 2023/09/28       | 2026/09/27           |
| Loop Antenna                  | Zhinan                 | ZN30900C    | GRCTEE020     | 2023/10/15       | 2026/10/14           |
| Horn Antenna                  | Beijing Hangwei Dayang | OBH100400   | GRCTEE049     | 2023/09/28       | 2026/09/27           |
| Ultra-Broadband Antenna       | Schwarzbeck            | VULB9163    | GRCTEE081     | 2023/09/28       | 2026/09/27           |
| Horn Antenna                  | Schwarzbeck            | BBHA 9120D  | GRCTEE082     | 2023/09/28       | 2026/09/27           |
| Horn Antenna                  | Beijing Hangwei Dayang | OBH100400   | GRCTEE083     | 2023/09/28       | 2026/09/27           |
| Amplifier                     | Schwarzbeck            | BBV 9745    | GRCTEE021     | 2024/09/19       | 2025/09/18           |
| Amplifier                     | Taiwan chengyi         | EMC051845B  | GRCTEE022     | 2024/09/19       | 2025/09/18           |
| Amplifier                     | Schwarzbeck            | BBV 9745    | GRCTEE084     | 2024/09/19       | 2025/09/18           |
| Amplifier                     | R&S                    | SCU18F      | GRCTEE085     | 2024/09/19       | 2025/09/18           |
| Temperature/Humidity Meter    | Huaguan                | HG-308      | GRCTES037     | 2024/09/19       | 2025/09/18           |
| Directional coupler           | NARDA                  | 4226-10     | GRCTEE004     | 2024/09/19       | 2025/09/18           |
| High-Pass Filter              | XingBo                 | XBLBQ-GTA18 | GRCTEE053     | 2024/09/19       | 2025/09/18           |
| High-Pass Filter              | XingBo                 | XBLBQ-GTA27 | GRCTEE054     | 2024/09/19       | 2025/09/18           |
| Automated filter bank         | Tonscend               | JS0806-F    | GRCTEE055     | 2024/09/19       | 2025/09/18           |
| Power Sensor                  | Agilent                | U2021XA     | GRCTEE070     | 2024/09/19       | 2025/09/18           |
| Cable                         | Times                  | Cable-CE    | GRCTEE086     | 2024/09/19       | 2025/09/18           |
| Cable                         | Times                  | Cable-RE-1  | GRCTEE087     | 2024/09/19       | 2025/09/18           |
| Cable                         | Times                  | Cable-RE-2  | GRCTEE088     | 2024/09/19       | 2025/09/18           |
| EMI Test Software             | ROHDE & SCHWARZ        | ESK1-V1.71  | GRCTEE060     | N/A              | N/A                  |
| EMI Test Software             | Fera                   | EZ-EMC      | GRCTEE061     | N/A              | N/A                  |



## **2.5 Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for the device filing to comply with of the FCC Part 24 Rules.

## **2.6 Modifications**

No modifications were implemented to meet testing criteria.

### 3 TEST CONDITIONS AND RESULTS


#### 3.1 Output Power

##### LIMIT


Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p.

##### TEST CONFIGURATION

Conducted Power Measurement

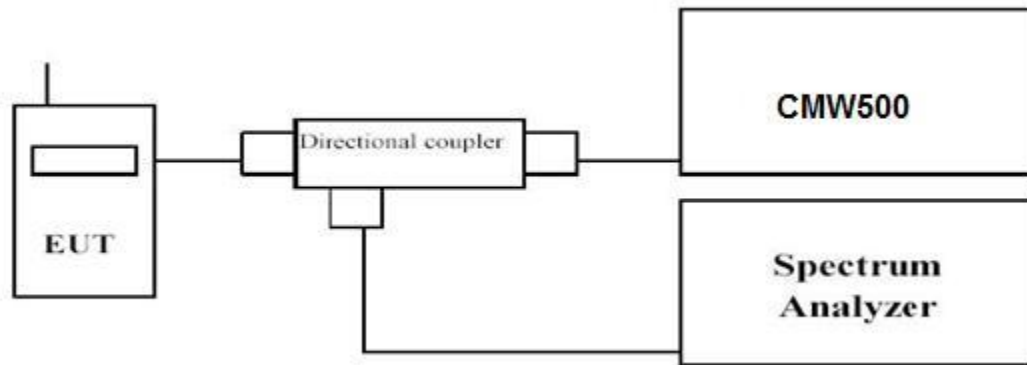

Radiated Power Measurement:

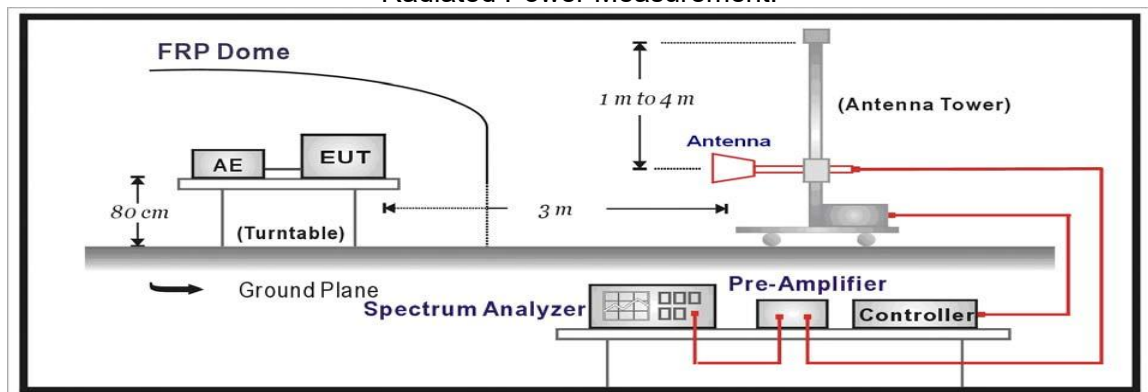

##### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

##### **Conducted Power Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

##### **Radiated Power Measurement:**

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.

- f) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g) The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h) The maximum signal level detected by the measuring receiver shall be noted.
- i) The transmitter shall be replaced by a substitution antenna.
- j) The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k) The substitution antenna shall be connected to a calibrated signal generator.
- l) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m) The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n) The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o) The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p) The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q) Test site anechoic chamber refer to ANSI C63.4.

## **TEST RESULTS**

### ***Passed***

***The EUT supports 64 LTE modules. All LTE modules are the same, so we tested LTE module 1.***

***Please refer to the appendix test data.***

**Radiated Measurement:***Remark:*

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2; recorded worst case for each Channel Bandwidth of LTE FDD Band 2.
2.  $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$
3. The EUT supports 64 LTE modules. We tested all LTE modules and recorded the worst case at LTE module 1.

*LTE FDD Band 2\_Channel Bandwidth 1.4MHz\_QPSK*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1850.7          | -18.26                 | 3.62                 | 9.82                            | 35.08                | 23.02      | 33.01       | -9.99       | V            |
| 1880.0          | -18.84                 | 3.76                 | 9.73                            | 35.61                | 22.74      | 33.01       | -10.27      | V            |
| 1909.3          | -18.42                 | 3.82                 | 9.71                            | 35.72                | 23.19      | 33.01       | -9.82       | V            |

*LTE FDD Band 2\_Channel Bandwidth 3MHz\_QPSK*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1851.5          | -18.79                 | 3.61                 | 9.78                            | 35.12                | 22.50      | 33.01       | -10.51      | V            |
| 1880.0          | -18.38                 | 3.76                 | 9.73                            | 35.61                | 23.20      | 33.01       | -9.81       | V            |
| 1908.5          | -18.11                 | 3.81                 | 9.68                            | 35.44                | 23.20      | 33.01       | -9.81       | V            |

*LTE FDD Band 2\_Channel Bandwidth 5MHz\_QPSK*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1852.5          | -18.24                 | 3.61                 | 9.92                            | 35.23                | 23.30      | 33.01       | -9.71       | V            |
| 1880.0          | -18.12                 | 3.76                 | 9.73                            | 35.61                | 23.46      | 33.01       | -9.55       | V            |
| 1907.5          | -18.58                 | 3.80                 | 9.54                            | 35.28                | 22.44      | 33.01       | -10.57      | V            |

*LTE FDD Band 2\_Channel Bandwidth 10MHz\_QPSK*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1855.0          | -18.48                 | 3.72                 | 9.78                            | 35.52                | 23.10      | 33.01       | -9.91       | V            |
| 1880.0          | -18.20                 | 3.76                 | 9.73                            | 35.61                | 23.38      | 33.01       | -9.63       | V            |
| 1905.0          | -18.32                 | 3.78                 | 9.67                            | 35.37                | 22.94      | 33.01       | -10.07      | V            |

*LTE FDD Band 2\_Channel Bandwidth 15MHz\_QPSK*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1857.5          | -18.78                 | 3.74                 | 9.83                            | 35.48                | 22.79      | 33.01       | -10.22      | V            |
| 1880.0          | -18.29                 | 3.76                 | 9.73                            | 35.61                | 23.29      | 33.01       | -9.72       | V            |
| 1902.5          | -18.23                 | 3.79                 | 9.76                            | 35.29                | 23.03      | 33.01       | -9.98       | V            |

*LTE FDD Band 2\_Channel Bandwidth 20MHz\_QPSK*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1860.0          | -18.11                 | 3.75                 | 9.75                            | 35.65                | 23.54      | 33.01       | -9.47       | V            |
| 1880.0          | -18.56                 | 3.76                 | 9.73                            | 35.61                | 23.02      | 33.01       | -9.99       | V            |
| 1900.0          | -18.75                 | 3.78                 | 9.54                            | 35.58                | 22.59      | 33.01       | -10.42      | V            |

*LTE FDD Band 2\_Channel Bandwidth 1.4MHz\_16QAM*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1850.7          | -19.30                 | 3.62                 | 9.82                            | 35.08                | 21.98      | 33.01       | -11.03      | V            |
| 1880.0          | -19.62                 | 3.76                 | 9.73                            | 35.61                | 21.96      | 33.01       | -11.05      | V            |
| 1909.3          | -19.55                 | 3.82                 | 9.71                            | 35.72                | 22.06      | 33.01       | -10.95      | V            |

*LTE FDD Band 2\_Channel Bandwidth 3MHz\_16QAM*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1851.5          | -19.68                 | 3.61                 | 9.76                            | 35.12                | 21.59      | 33.01       | -11.42      | V            |
| 1880.0          | -19.71                 | 3.76                 | 9.73                            | 35.61                | 21.87      | 33.01       | -11.14      | V            |
| 1908.5          | -19.52                 | 3.81                 | 9.68                            | 35.44                | 21.79      | 33.01       | -11.22      | V            |

*LTE FDD Band 2\_Channel Bandwidth 5MHz\_16QAM*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1852.5          | -20.53                 | 3.61                 | 9.92                            | 35.23                | 21.01      | 33.01       | -12.00      | V            |
| 1880.0          | -19.50                 | 3.76                 | 9.73                            | 35.61                | 22.08      | 33.01       | -10.93      | V            |
| 1907.5          | -19.45                 | 3.80                 | 9.54                            | 35.28                | 21.57      | 33.01       | -11.44      | V            |

*LTE FDD Band 2\_Channel Bandwidth 10MHz\_16QAM*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1855.0          | -20.99                 | 3.72                 | 9.78                            | 35.52                | 20.59      | 33.01       | -12.42      | V            |
| 1880.0          | -20.89                 | 3.76                 | 9.73                            | 35.61                | 20.69      | 33.01       | -12.32      | V            |
| 1905.0          | -20.16                 | 3.78                 | 9.67                            | 35.37                | 21.10      | 33.01       | -11.91      | V            |

*LTE FDD Band 2\_Channel Bandwidth 15MHz\_16QAM*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1857.5          | -19.80                 | 3.74                 | 9.83                            | 35.48                | 21.77      | 33.01       | -11.24      | V            |
| 1880.0          | -19.50                 | 3.76                 | 9.73                            | 35.61                | 22.08      | 33.01       | -10.93      | V            |
| 1902.5          | -19.61                 | 3.79                 | 9.76                            | 35.29                | 21.65      | 33.01       | -11.36      | V            |

*LTE FDD Band 2\_Channel Bandwidth 20MHz\_16QAM*


| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1860.0          | -20.96                 | 3.75                 | 9.75                            | 35.65                | 20.69      | 33.01       | -12.32      | V            |
| 1880.0          | -20.80                 | 3.76                 | 9.73                            | 35.61                | 20.78      | 33.01       | -12.23      | V            |
| 1900.0          | -19.02                 | 3.78                 | 9.54                            | 35.58                | 22.32      | 33.01       | -10.69      | V            |

### 3.2 Peak-to-Average Ratio (PAR)

#### LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

#### TEST CONFIGURATION

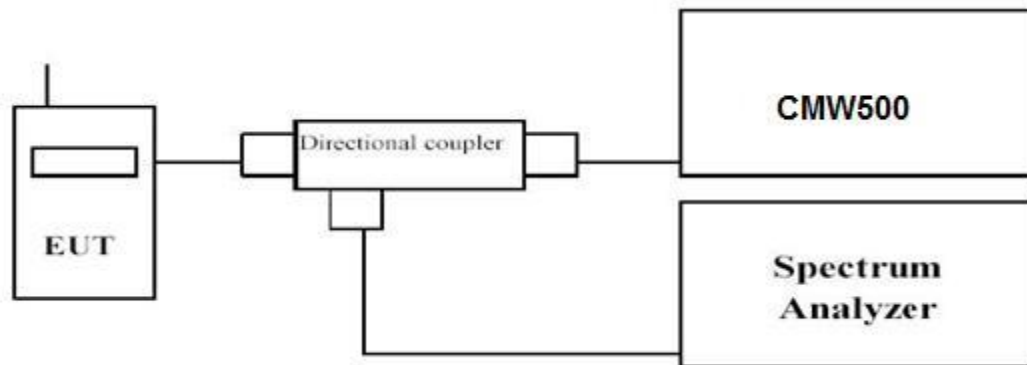

#### TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms,
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

#### TEST RESULTS

##### ***Passed***


***The EUT supports 64 LTE modules. All LTE modules are the same, so we tested LTE module 1.***

***Please refer to the appendix test data.***

### 3.3 Occupied Bandwidth and Emission Bandwidth LIMIT

N/A

#### TEST CONFIGURATION

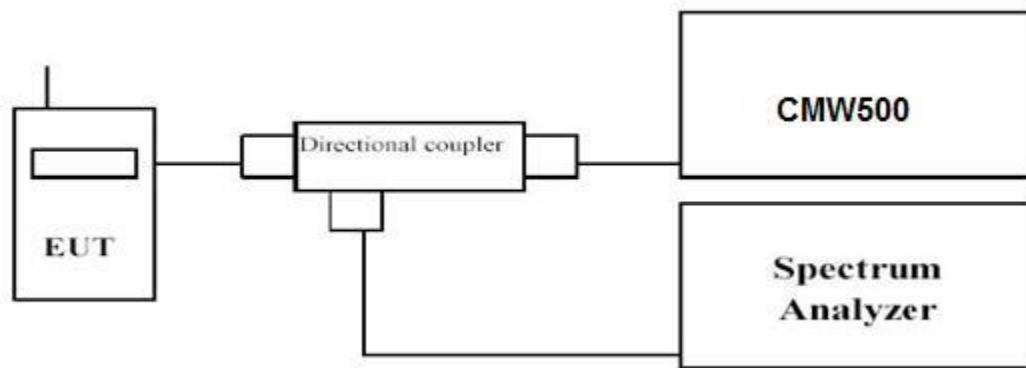

#### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded.

Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW.

-26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

#### TEST RESULTS

**Passed**

**The EUT supports 64 LTE modules. All LTE modules are the same, so we tested LTE module 1.**


**Please refer to the appendix test data.**

### 3.4 Band Edge compliance

#### LIMIT

Per FCC §24.238 the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

#### TEST CONFIGURATION

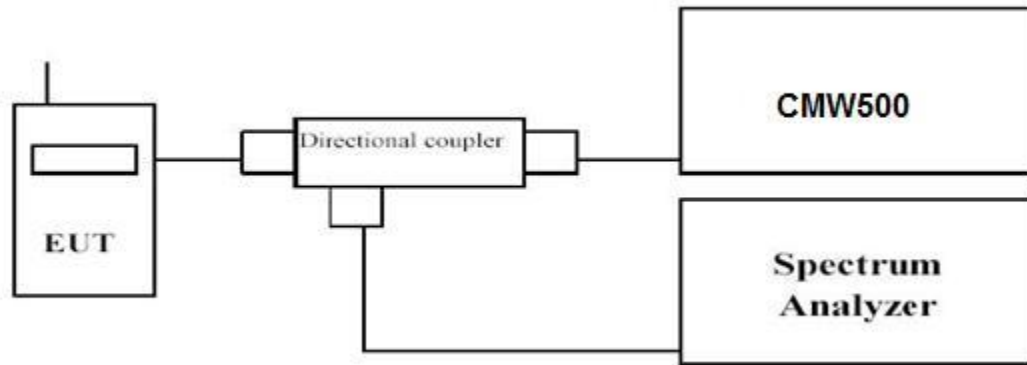

#### TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum

#### TEST RESULTS

##### ***Passed***

***The EUT supports 64 LTE modules. All LTE modules are the same, so we tested LTE module 1.***

***Please refer to the appendix test data.***




### 3.5 Spurious Emission

#### LIMIT


Per FCC §24.238, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10\log(P)$  dB.

#### TEST CONFIGURATION

Conducted Spurious Measurement:

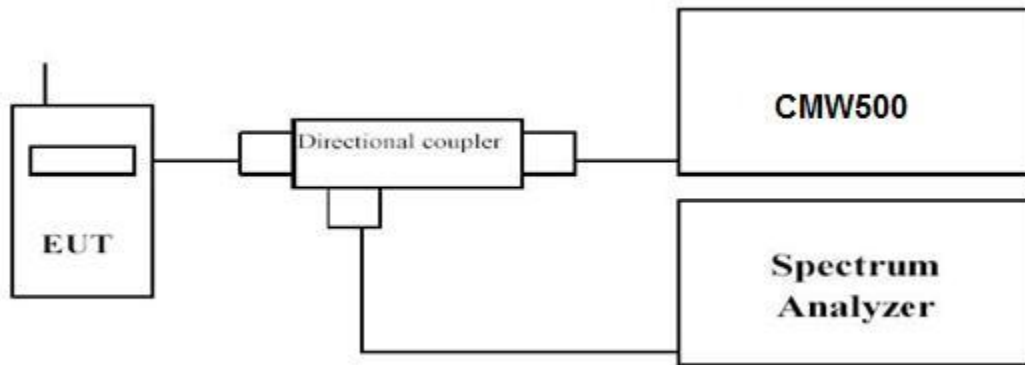

Radiated Spurious Measurement:

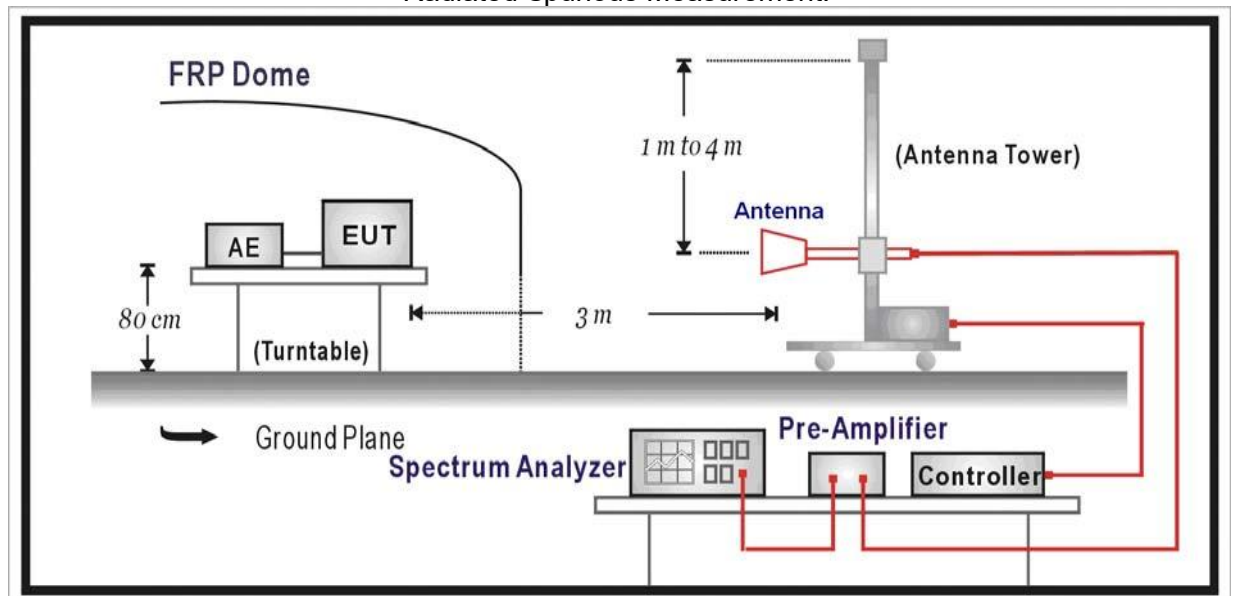

#### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

##### **Conducted Spurious Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Coupler.
- EUT Communicate with CMW500 then selects a channel for testing.
- Add a correction factor to the display of spectrum, and then test.
- The resolution bandwidth of the spectrum analyzer was set sufficient scans were taken to show the out of band Emission if any up to 10th harmonic.

**Radiated Spurious Measurement:**

- a. The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- b. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter
- c. The output of the test antenna shall be connected to the measuring receiver.
- d. The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- e. The test antenna shall be raised and lowered through the specified range of height until a maximum signal level is detected by the measuring receiver.
- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.

**TEST RESULTS****Conducted Measurement:*****Passed***

***The EUT supports 64 LTE modules. All LTE modules are the same, so we tested LTE module 1.***

***Please refer to the appendix test data.***

**Radiated Measurement:***Remark:*

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 2, the report recorded the worst data.
2.  $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + G_a(dBi)$
3.  $ERP = EIRP - 2.15\text{ dBi}$  as EIRP by subtracting the gain of the dipole.
4.  $\text{Margin} = \text{Limit} - EIRP$ .
5. The EUT supports 64 LTE modules. We tested all LTE modules and recorded the worst case at LTE module 1.

*LTE FDD Band 2\_Channel Bandwidth 20MHz\_QPSK\_Low Channel*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | Distance (m) | G <sub>a</sub> Antenna Gain(dB) | Peak EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|--------------|---------------------------------|-----------------|-------------|-------------|--------------|
| 3715.0          | -43.90                 | 5.23                 | 3.00         | 13.62                           | -35.51          | -13.00      | -22.51      | H            |
| 5572.5          | -46.82                 | 5.97                 | 3.00         | 13.74                           | -39.05          | -13.00      | -26.05      | H            |
| 3715.0          | -42.14                 | 5.23                 | 3.00         | 13.62                           | -33.75          | -13.00      | -20.75      | V            |
| 5572.5          | -55.89                 | 5.97                 | 3.00         | 13.74                           | -48.12          | -13.00      | -35.12      | V            |

*LTE FDD Band 2\_Channel Bandwidth 20MHz\_QPSK\_Middle Channel*

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | Distance (m) | G <sub>a</sub> Antenna Gain(dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|--------------|---------------------------------|------------|-------------|-------------|--------------|
| 3720.0          | -40.92                 | 5.29                 | 3.00         | 13.84                           | -32.37     | -13.00      | -19.37      | H            |
| 5580.0          | -53.94                 | 5.98                 | 3.00         | 13.68                           | -46.24     | -13.00      | -33.24      | H            |
| 3720.0          | -40.06                 | 5.29                 | 3.00         | 13.84                           | -31.51     | -13.00      | -18.51      | V            |
| 5580.0          | -52.75                 | 5.98                 | 3.00         | 13.68                           | -45.05     | -13.00      | -32.05      | V            |

*LTE FDD Band 2\_Channel Bandwidth 20MHz\_QPSK\_High Channel*


| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | Distance (m) | G <sub>a</sub> Antenna Gain(dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|--------------|---------------------------------|------------|-------------|-------------|--------------|
| 3800.0          | -42.53                 | 5.33                 | 3.00         | 13.00                           | -34.86     | -13.00      | -21.86      | H            |
| 5700.0          | -51.62                 | 6.01                 | 3.00         | 13.90                           | -43.73     | -13.00      | -30.73      | H            |
| 3800.0          | -41.03                 | 5.33                 | 3.00         | 13.00                           | -33.36     | -13.00      | -20.36      | V            |
| 5700.0          | -54.74                 | 6.01                 | 3.00         | 13.90                           | -46.85     | -13.00      | -33.85      | V            |

### 3.6 Frequency Stability under Temperature & Voltage Variations

#### LIMIT

According to §24.235, §2.1055 requirement, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation and should not exceed 2.5ppm.

#### TEST CONFIGURATION

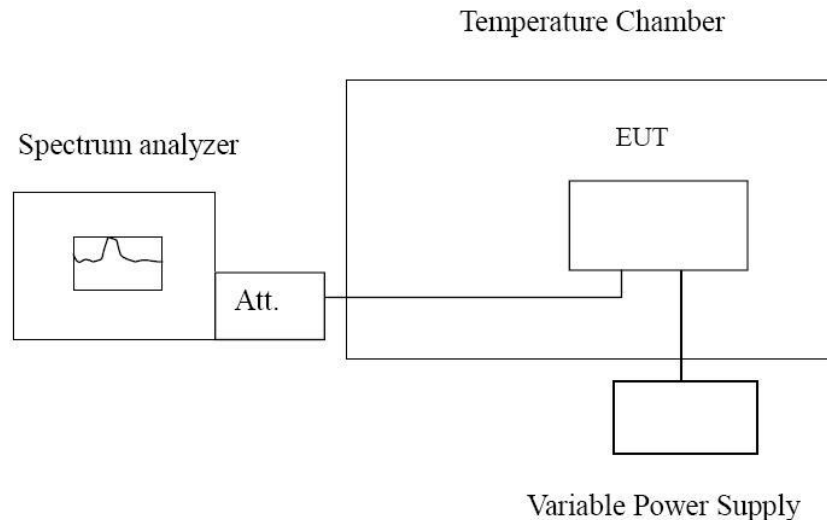

#### TEST PROCEDURE

The EUT was setup according to EIA/TIA 603D

##### **Frequency Stability under Temperature Variations:**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 2, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

##### **Frequency Stability under Voltage Variations:**

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation (±15%) and endpoint, record the maximum frequency change.




## **TEST RESULTS**

***Passed***

***The EUT supports 64 LTE modules. All LTE modules are the same, so we tested LTE module 1.***




***Please refer to the appendix test data.***



#### 4 Test Setup Photos of the EUT

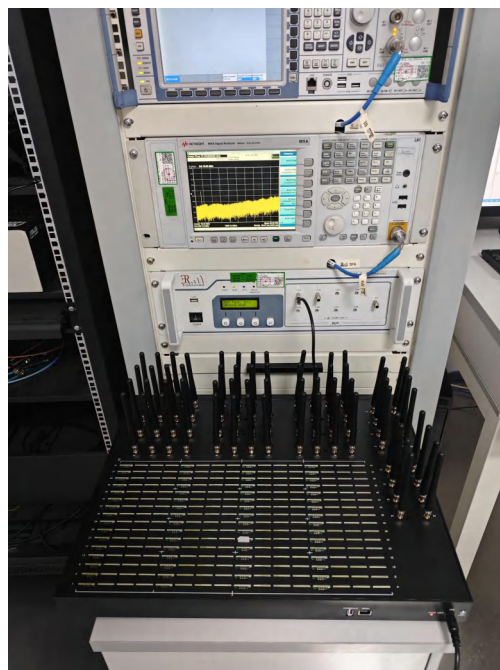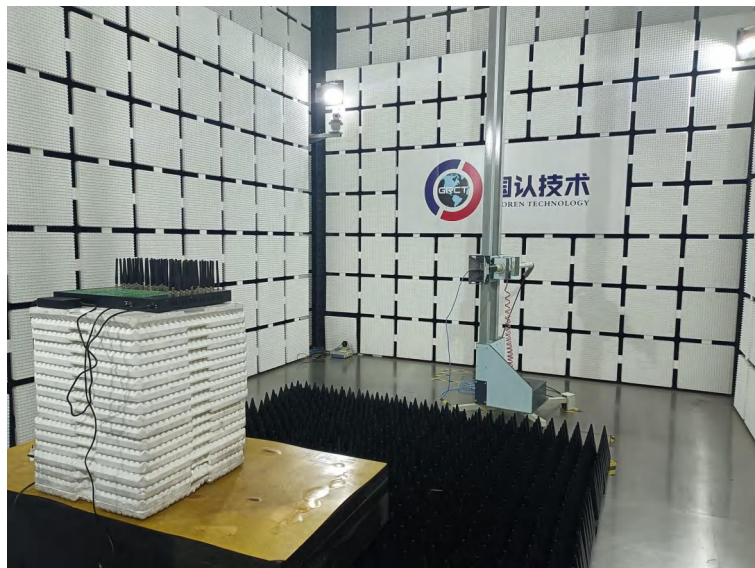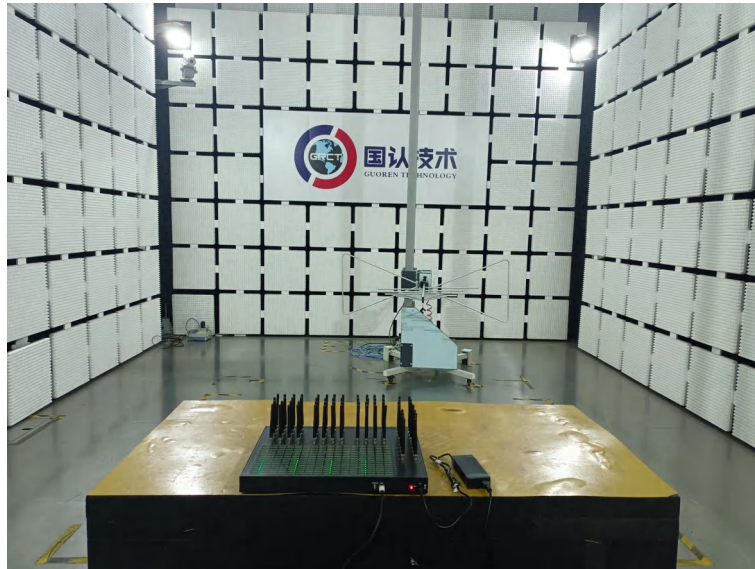





## 5 Photos of the EUT

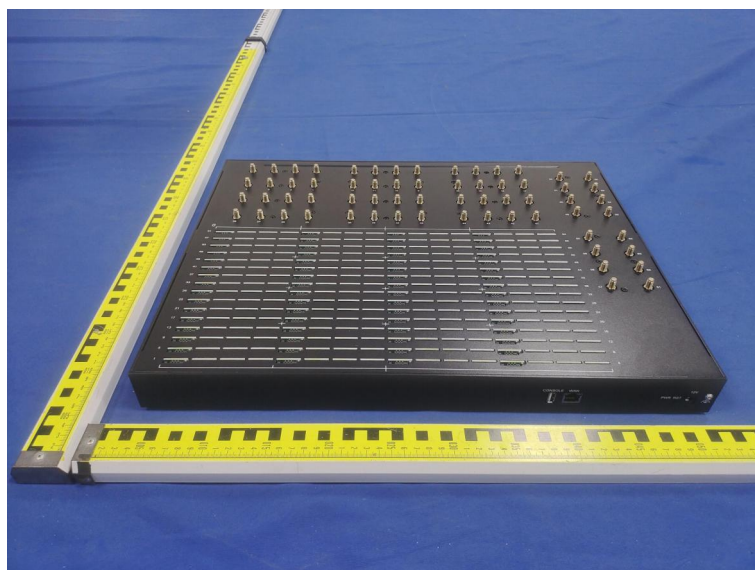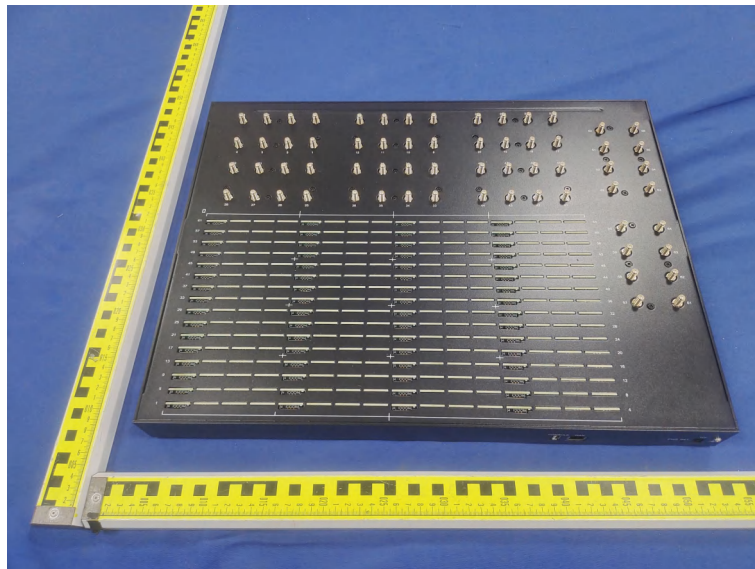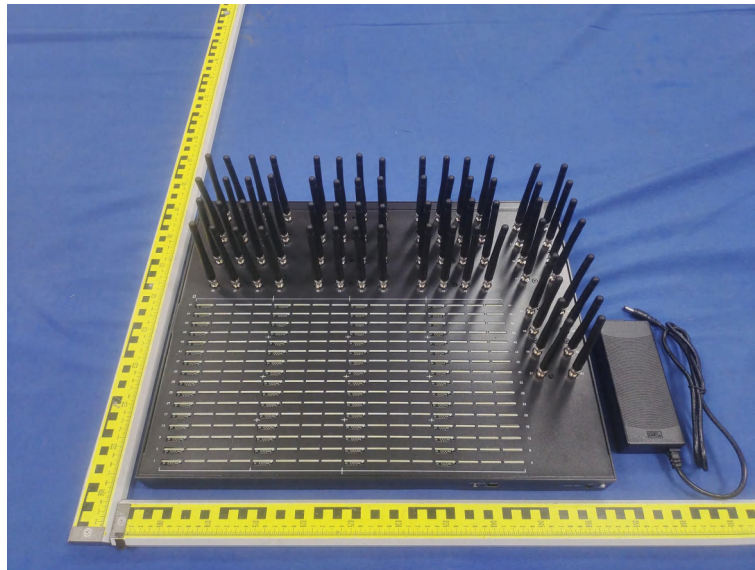



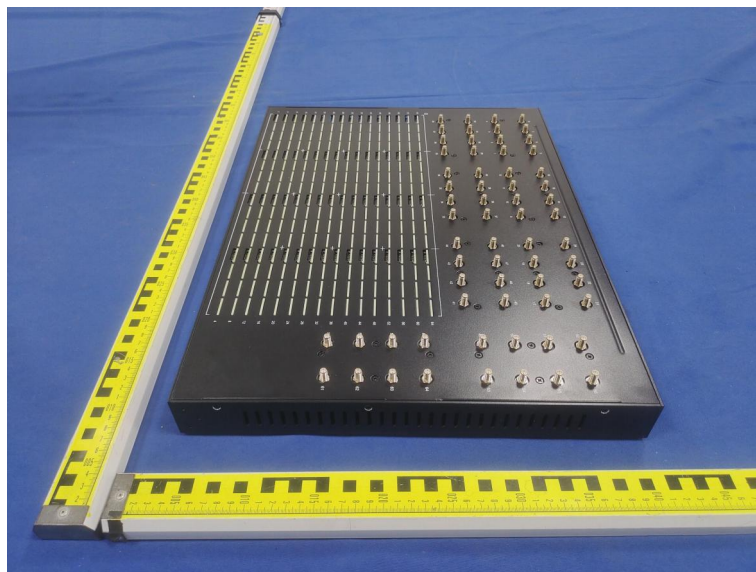
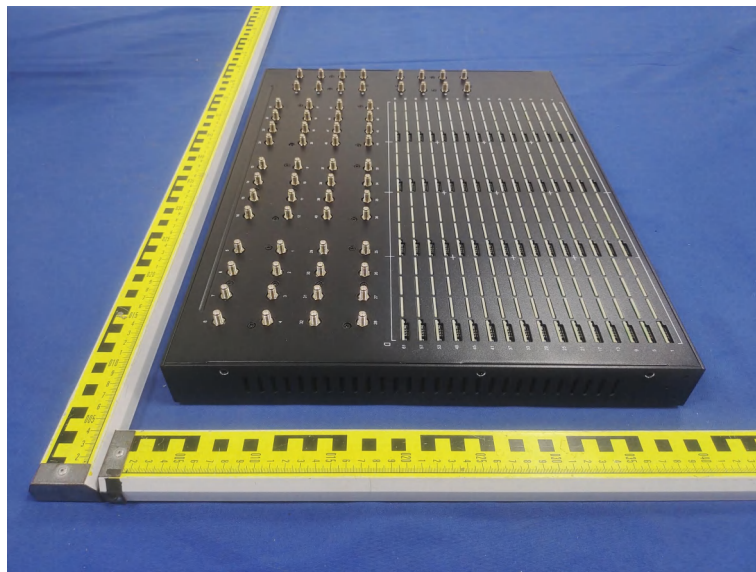





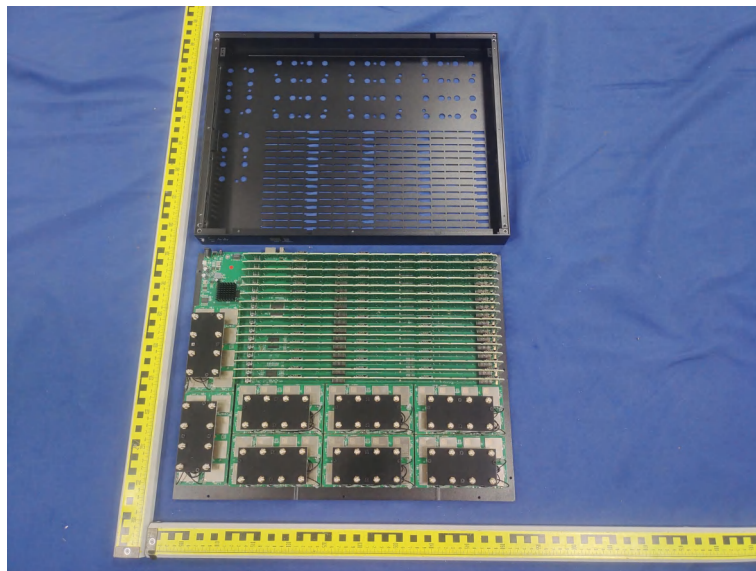
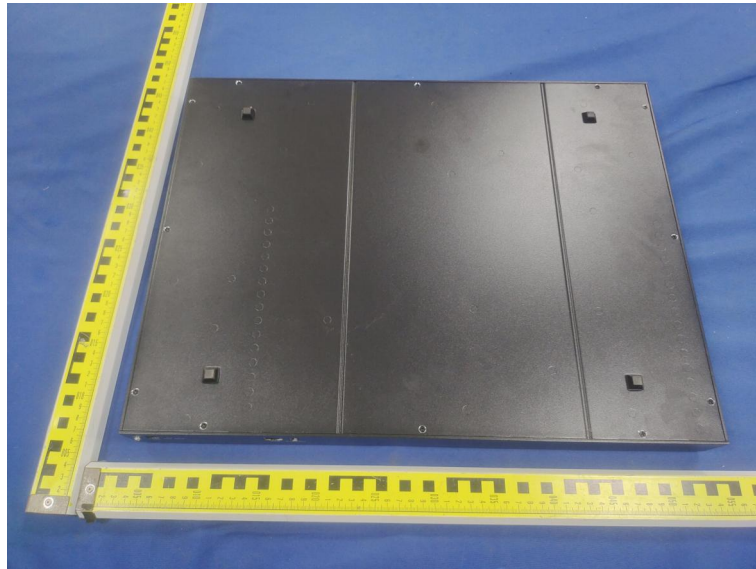


LTE  
Antenna

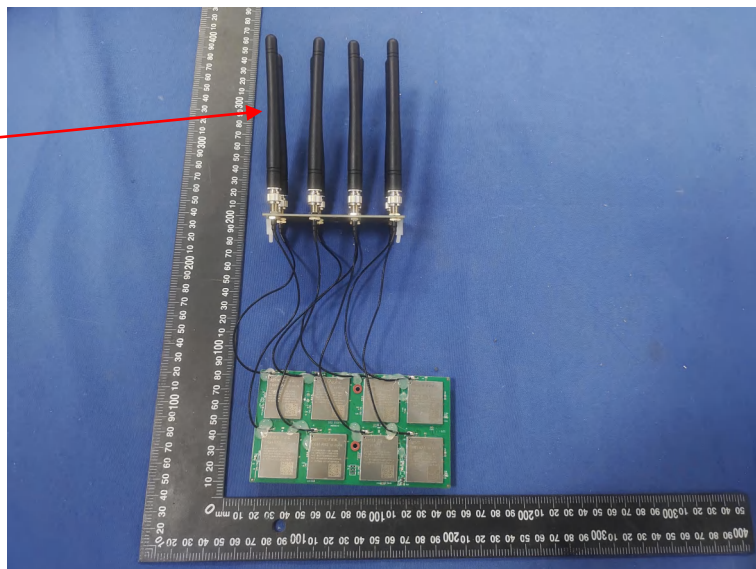

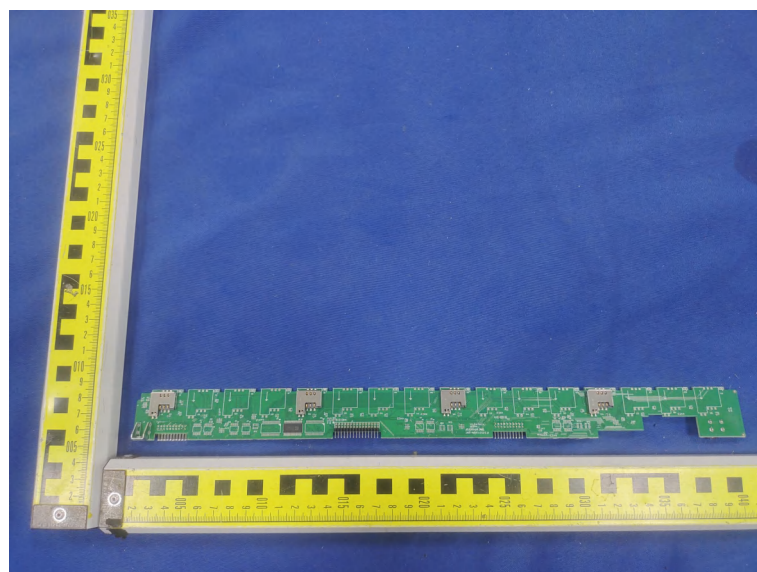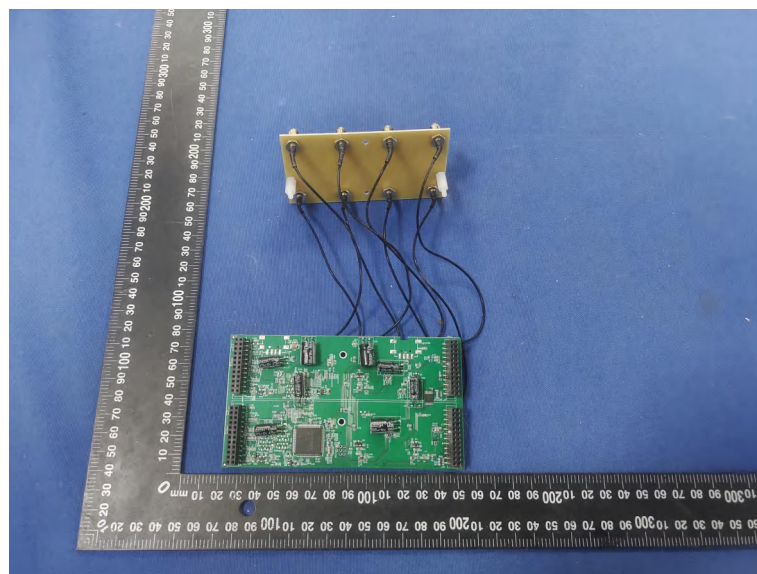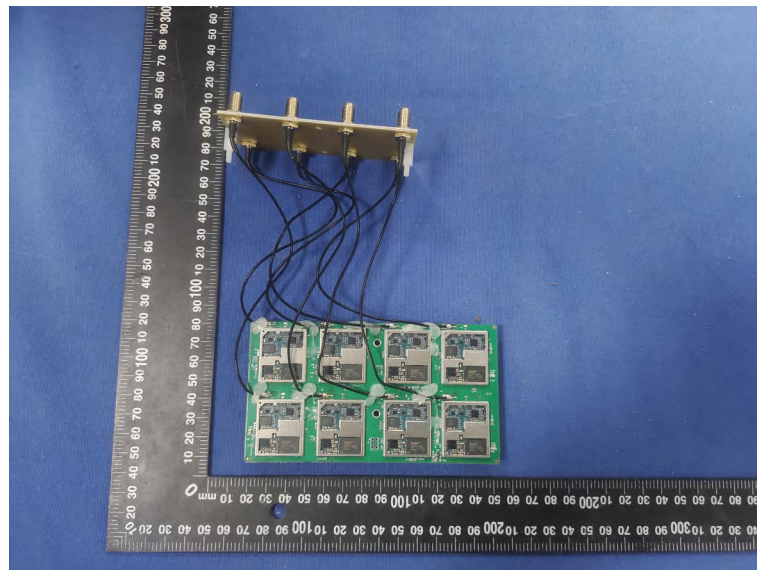



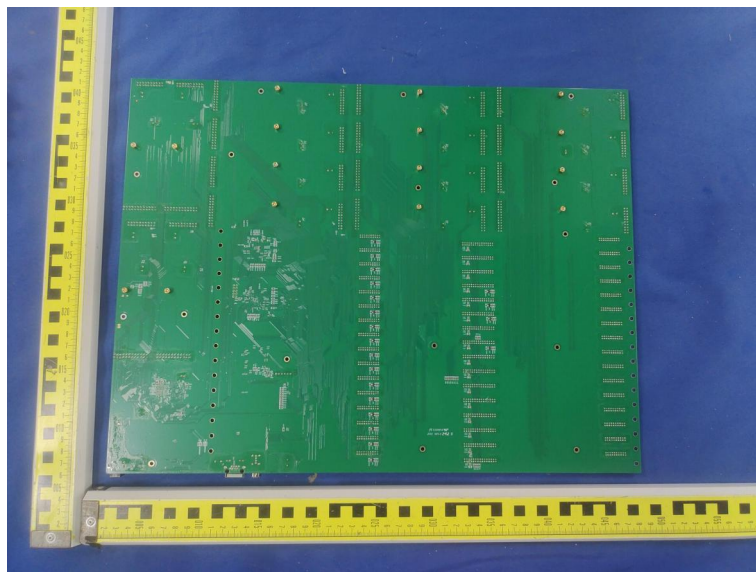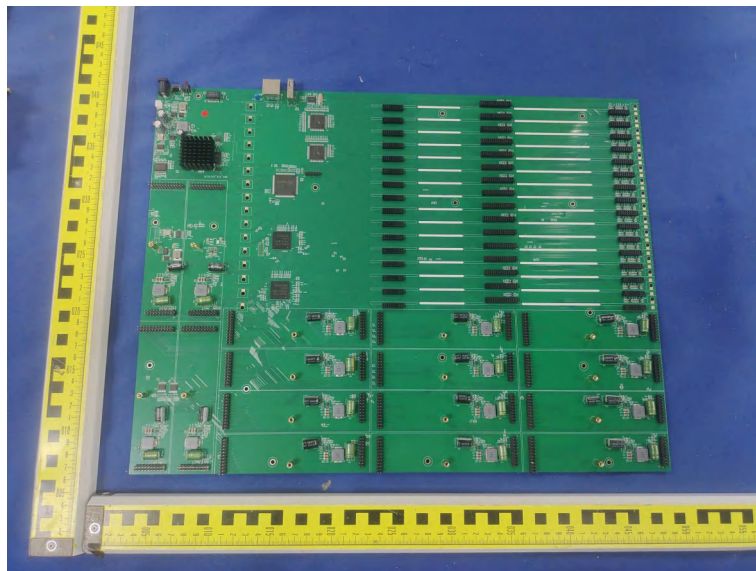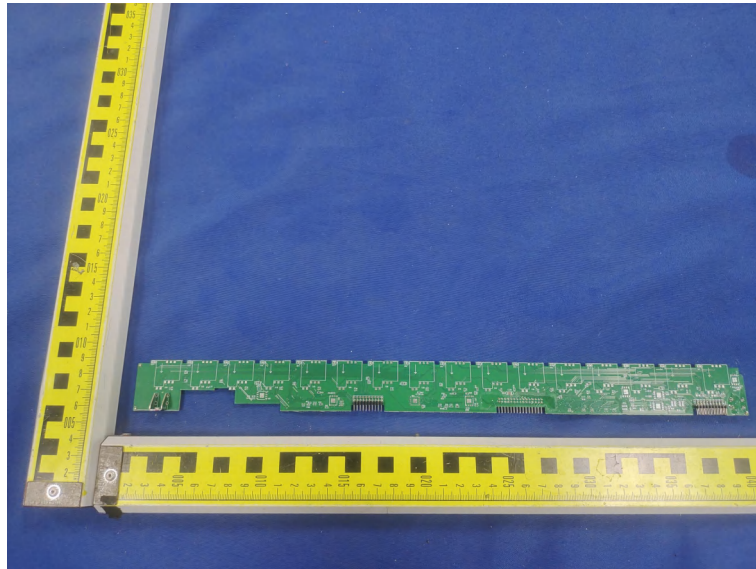

\*\*\*\*\* End of Report \*\*\*\*\*