



## FCC Test Report

Report Reference No.....: HK2502110488-20E  
FCC ID.....: 2BNQ8-K8ACTIVE  
Compiled by  
( position+printed name+signature)...: Testing Engineer Len Liao

Supervised by  
( position+printed name+signature)...: Technical Manager Sliver Wan

Approved by  
( position+printed name+signature)...: Authorized Signatory Jason Zhou

Date of issue.....: Mar. 27, 2025

Testing Laboratory Name .....: Shenzhen HUAKE Testing Technology Co., Ltd.

Address .....: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park,  
Heping, Fuhai Street, Bao'an District, Shenzhen, Guangdong,  
China

Applicant's name .....: AOZORA WIRELESS INC.

Address .....: 8605 Santa Monica Blvd 30327, West Hollywood California 90069  
United States

Test specification .....:

Standard .....: FCC CFR Title 47 Part 2, Part 27

TRF Originator.....: Shenzhen HUAKE Testing Technology Co., Ltd.

**Shenzhen HUAKE Testing Technology Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description .....: Rugged Tablet

Trade Mark .....: AOZORA

Manufacturer.....: AOZORA WIRELESS INC.

Model/Type reference.....: K8 Active

Series Models .....: K8

Modulation Type .....: QPSK, 16QAM

Rating .....: DC 5V from Type-C or DC 3.86V from Battery

Hardware version .....: V2.0

Software version .....: V2.0

Result.....: PASS

Len Liao

Sliver Wan

Jason Zhou

**TEST REPORT**

|                          |                         |                                |
|--------------------------|-------------------------|--------------------------------|
| <b>Test Report No. :</b> | <b>HK2502110488-20E</b> | Mar. 27, 2025<br>Date of issue |
|--------------------------|-------------------------|--------------------------------|

Equipment under Test : Rugged Tablet

Model /Type : K8 Active

Series Models : K8

**Applicant** : **AOZORA WIRELESS INC.**

Address : 8605 Santa Monica Blvd 30327, West Hollywood California  
90069 United States

**Manufacturer** : **AOZORA WIRELESS INC.**

Address : 8605 Santa Monica Blvd 30327, West Hollywood California  
90069 United States

|                    |             |
|--------------------|-------------|
| <b>Test result</b> | <b>Pass</b> |
|--------------------|-------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



## Contents

|          |                                                            |           |
|----------|------------------------------------------------------------|-----------|
| <b>1</b> | <b>Summary</b>                                             | <b>5</b>  |
| 1.1      | Test Standards                                             | 5         |
| 1.2      | Test Description                                           | 5         |
| 1.3      | Information of The Test Laboratory                         | 6         |
| 1.4      | Statement of The Measurement Uncertainty                   | 6         |
| <b>2</b> | <b>General Information</b>                                 | <b>7</b>  |
| 2.1      | Environmental Conditions                                   | 7         |
| 2.2      | Description of Test Modes                                  | 7         |
| 2.3      | Test Frequency List                                        | 7         |
| 2.4      | Equipments Used during the Test                            | 8         |
| 2.5      | Related Submittal(s) / Grant (s)                           | 10        |
| 2.6      | Modifications                                              | 10        |
| <b>3</b> | <b>Test Conditions and Results</b>                         | <b>11</b> |
| 3.1      | Output Power                                               | 11        |
| 3.2      | Peak-to-Average Ratio (PAR)                                | 17        |
| 3.3      | Occupied Bandwidth and Emission Bandwidth                  | 24        |
| 3.4      | Band Edge Compliance                                       | 31        |
| 3.5      | Spurious Emission                                          | 38        |
| 3.6      | Frequency Stability under Temperature & Voltage Variations | 65        |
| <b>4</b> | <b>Test Setup Photos of the EUT</b>                        | <b>67</b> |
| <b>5</b> | <b>Photos of the EUT</b>                                   | <b>68</b> |



**\*\* Modified History \*\***

| Revision     | Description                 | Issued Data   | Remark     |
|--------------|-----------------------------|---------------|------------|
| Revision 1.0 | Initial Test Report Release | Mar. 27, 2025 | Jason Zhou |
|              |                             |               |            |
|              |                             |               |            |





## 1 Summary

### 1.1 Test Standards

The tests were performed according to following standards:

[FCC Part 27](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES.

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards 47 CFR FCC Part 15 Subpart B: - Unintentional Radiators.

[FCC Part 2](#): FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS.

[KDB 971168 D01 v03r01](#): Measurement Guidance For Certification Of Licensed Digital Transmitters.

### 1.2 Test Description

| Test Item                              | Section in CFR 47               | Result |
|----------------------------------------|---------------------------------|--------|
| RF Output Power                        | Part 2.1046<br>Part 27.50(d)(4) | Pass   |
| Peak-to-Average Ratio                  | Part 27.50(d)(4)                | Pass   |
| 99% & -26 dB Occupied Bandwidth        | Part 2.1049<br>Part 27.53(h)    | Pass   |
| Spurious Emissions at Antenna Terminal | Part 2.1051<br>Part 27.53(h)    | Pass   |
| Field Strength of Spurious Radiation   | Part 2.1053<br>Part 27.53(h)    | Pass   |
| Out of band emission, Band Edge        | Part 2.1051<br>Part 27.53(h)    | Pass   |
| Frequency stability                    | Part 2.1055<br>Part 27.54       | Pass   |



### 1.3 Information of The Test Laboratory

Shenzhen HUAKE Testing Technology Co., Ltd.  
Add.: 1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,  
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Testing Laboratory Authorization:

A2LA Accreditation Code is 4781.01.  
FCC Designation Number is CN1229.  
Canada IC CAB identifier is CN0045.  
CNAS Registration Number is L9589.

### 1.4 Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen HUAKE Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen HUAKE Testing Technology Co., Ltd. is reported:

| Test                  | Range      | Measurement Uncertainty | Notes |
|-----------------------|------------|-------------------------|-------|
| Radiated Emission     | 30~1000MHz | 4.10dB                  | (1)   |
| Radiated Emission     | Above 1GHz | 4.32dB                  | (1)   |
| Conducted Disturbance | 0.15~30MHz | 3.20dB                  | (1)   |

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .



## **2 General Information**

### **2.1 Environmental Conditions**

During the measurement the environmental conditions were within the listed ranges:

|                     |         |
|---------------------|---------|
| Normal Temperature: | 25°C    |
| Relative Humidity:  | 55 %    |
| Air Pressure:       | 101 kPa |

### **2.2 Description of Test Modes**

The EUT has been tested under typical operating condition. The CMW500 used to control the EUT staying in continuous transmitting and receiving mode for testing. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.

Note:

1. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.
2. Test method and refer to 3GPP TS136521.

### **2.3 Test Frequency List**

| TX Channel Bandwidth | Frequency (MHz) | channel |
|----------------------|-----------------|---------|
| 1.4 MHz              | 1710.7          | 131979  |
|                      | 1745            | 132322  |
|                      | 1779.3          | 132665  |
| 3 MHz                | 1711.5          | 131987  |
|                      | 1745            | 132322  |
|                      | 1778.5          | 132657  |
| 5 MHz                | 1712.5          | 131997  |
|                      | 1745            | 132322  |
|                      | 1777.5          | 132647  |
| 10 MHz               | 1715.0          | 132022  |
|                      | 1745            | 132322  |
|                      | 1775.0          | 132622  |
| 15 MHz               | 1717.5          | 132047  |
|                      | 1745            | 132322  |
|                      | 1772.5          | 132597  |
| 20 MHz               | 1720.0          | 132072  |
|                      | 1745            | 132322  |
|                      | 1770.0          | 132572  |



## 2.4 Equipments Used during the Test

| Item | Test Equipment                  | Manufacturer    | Model No.             | Serial No. | Calibration Date | Calibration Due Date |
|------|---------------------------------|-----------------|-----------------------|------------|------------------|----------------------|
| 1    | L.I.S.N.                        | R&S             | ENV216                | HKE-002    | 2024/02/20       | 2025/02/19           |
| 2    | L.I.S.N.                        | R&S             | ENV216                | HKE-059    | 2024/02/20       | 2025/02/19           |
| 3    | EMI Test Receiver               | R&S             | ESR                   | HKE-005    | 2024/02/20       | 2025/02/19           |
| 4    | Spectrum analyzer               | Agilent         | N9020A                | HKE-117    | 2024/02/20       | 2025/02/19           |
| 5    | Spectrum analyzer               | R&S             | FSV3044               | HKE-126    | 2024/02/20       | 2025/02/19           |
| 6    | Preamplifier                    | EMCI            | EMC051845S            | HKE-006    | 2024/02/20       | 2025/02/19           |
| 7    | Preamplifier                    | Schwarzbeck     | BBV 9743              | HKE-016    | 2024/02/20       | 2025/02/19           |
| 8    | Preamplifier                    | A.H. Systems    | SAS-574               | HKE-182    | 2024/02/20       | 2025/02/19           |
| 9    | 6dB Attenuator                  | Pasternack      | 6db                   | HKE-184    | 2024/02/20       | 2025/02/19           |
| 10   | EMI Test Receiver               | Rohde & Schwarz | ESR-7                 | HKE-010    | 2024/02/20       | 2025/02/19           |
| 11   | Broadband Antenna               | Schwarzbeck     | VULB9168              | HKE-167    | 2024/02/21       | 2026/02/20           |
| 12   | Loop Antenna                    | COM-POWER       | AL-130R               | HKE-014    | 2024/02/21       | 2026/02/20           |
| 13   | Horn Antenna                    | Schwarzbeck     | 9120D                 | HKE-013    | 2024/02/21       | 2026/02/20           |
| 14   | EMI Test Software               | Tonscend        | JS32-CE 2.5.0.6       | HKE-081    | /                | /                    |
| 15   | EMI Test Software               | Tonscend        | JS32-RE 5.0.0         | HKE-082    | /                | /                    |
| 16   | RF Automatic control unit       | Tonscend        | JS0806-1              | HKE-096    | 2024/02/20       | 2025/02/19           |
| 17   | High pass filter unit           | Tonscend        | JS0806-F              | HKE-055    | 2024/02/20       | 2025/02/19           |
| 18   | Wireless Communication Test Set | R&S             | CMU200                | HKE-026    | 2024/02/20       | 2025/02/19           |
| 19   | Wireless Communication Test Set | R&S             | CMW500                | HKE-027    | 2024/02/20       | 2025/02/19           |
| 20   | High-low temperature chamber    | Guangke         | HT-80L                | HKE-118    | 2024/06/10       | 2025/06/09           |
| 21   | Temperature and humidity meter  | Boyang          | HTC-1                 | HKE-075    | 2024/06/10       | 2025/06/09           |
| 22   | RF Test Software                | Tonscend        | JS1120 Version 3.1.46 | HKE-183    | /                | /                    |
| 23   | RSE Test Software               | Tonscend        | JS36-RSE 5.0.0        | HKE-184    | /                | /                    |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China





| Item | Test Equipment                  | Manufacturer    | Model No.             | Serial No. | Calibration Date | Calibration Due Date |
|------|---------------------------------|-----------------|-----------------------|------------|------------------|----------------------|
| 1    | L.I.S.N.                        | R&S             | ENV216                | HKE-002    | 2025/02/19       | 2026/02/18           |
| 2    | L.I.S.N.                        | R&S             | ENV216                | HKE-059    | 2025/02/19       | 2026/02/18           |
| 3    | EMI Test Receiver               | R&S             | ESR                   | HKE-005    | 2025/02/19       | 2026/02/18           |
| 4    | Spectrum analyzer               | Agilent         | N9020A                | HKE-117    | 2025/02/19       | 2026/02/18           |
| 5    | Spectrum analyzer               | R&S             | FSV3044               | HKE-126    | 2025/02/19       | 2026/02/18           |
| 6    | Preamplifier                    | EMCI            | EMC051845S            | HKE-006    | 2025/02/19       | 2026/02/18           |
| 7    | Preamplifier                    | Schwarzbeck     | BBV 9743              | HKE-016    | 2025/02/19       | 2026/02/18           |
| 8    | Preamplifier                    | A.H. Systems    | SAS-574               | HKE-182    | 2025/02/19       | 2026/02/18           |
| 9    | 6d Attenuator                   | Pasternack      | 6db                   | HKE-184    | 2025/02/19       | 2026/02/18           |
| 10   | EMI Test Receiver               | Rohde & Schwarz | ESR-7                 | HKE-010    | 2024/02/20       | 2025/02/19           |
| 11   | Broadband Antenna               | Schwarzbeck     | VULB9168              | HKE-167    | 2024/02/21       | 2026/02/20           |
| 12   | Loop Antenna                    | COM-POWER       | AL-130R               | HKE-014    | 2024/02/21       | 2026/02/20           |
| 13   | Horn Antenna                    | Schwarzbeck     | 9120D                 | HKE-013    | 2024/02/21       | 2026/02/20           |
| 14   | EMI Test Software               | Tonscend        | JS32-CE 2.5.0.6       | HKE-081    | /                | /                    |
| 15   | EMI Test Software               | Tonscend        | JS32-RE 5.0.0         | HKE-082    | /                | /                    |
| 16   | RF Automatic control unit       | Tonscend        | JS0806-1              | HKE-096    | 2025/02/19       | 2026/02/18           |
| 17   | High pass filter unit           | Tonscend        | JS0806-F              | HKE-055    | 2025/02/19       | 2026/02/18           |
| 18   | Wireless Communication Test Set | R&S             | CMU200                | HKE-026    | 2025/02/19       | 2026/02/18           |
| 19   | Wireless Communication Test Set | R&S             | CMW500                | HKE-027    | 2025/02/19       | 2026/02/18           |
| 20   | High-low temperature chamber    | Guangke         | HT-80L                | HKE-118    | 2024/06/10       | 2025/06/09           |
| 21   | Temperature and humidity meter  | Boyang          | HTC-1                 | HKE-075    | 2024/06/10       | 2025/06/09           |
| 22   | RF Test Software                | Tonscend        | JS1120 Version 3.1.46 | HKE-183    | /                | /                    |
| 23   | RSE Test Software               | Tonscend        | JS36-RSE 5.0.0        | HKE-184    | /                | /                    |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



## 2.5 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2BNQ8-K8ACTIVE filing to comply with of the FCC Part 27 Rules.

## 2.6 Modifications

No modifications were implemented to meet testing criteria.



### **3 Test Conditions and Results**


#### **3.1 Output Power**

##### **LIMIT**


According to §27.50 (d) (4): Fixed, mobile, and portable (hand- held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

##### **TEST CONFIGURATION**

###### **Conducted Power Measurement**

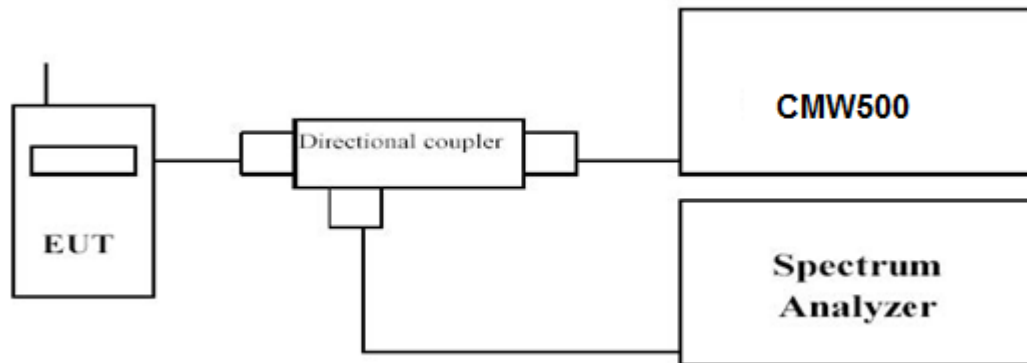

###### **Radiated Power Measurement:**

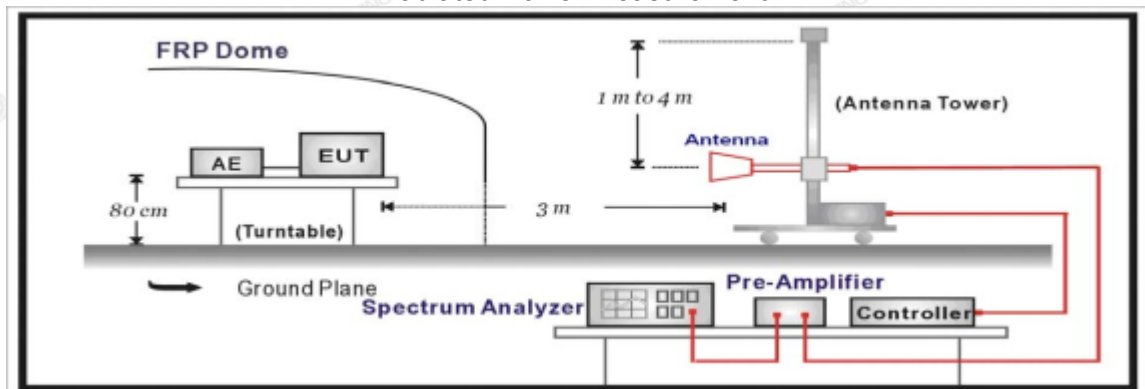

##### **TEST PROCEDURE**

The EUT was setup according to EIA/TIA 603D.

###### **Conducted Power Measurement:**

- Place the EUT on a bench and set it in transmitting mode.
- Connect a low loss RF cable from the antenna port to a spectrum analyzer and CMW500 by a Directional Couple.
- EUT Communicate with CMW500, then select a channel for testing.
- Add a correction factor to the display of spectrum, and then test.

###### **Radiated Power Measurement:**

- The EUT shall be placed at the specified height on a support, and in the position closest to normal use as declared by provider.
- The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter.
- The output of the test antenna shall be connected to the measuring receiver.
- The transmitter shall be switched on and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- The test antenna shall be raised and lowered through the specified range of height until a maximum signal



level is detected by the measuring receiver.

- f. The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- g. The test antenna shall be raised and lowered again through the specified range of height until a maximum signal level is detected by the measuring receiver.
- h. The maximum signal level detected by the measuring receiver shall be noted.
- i. The transmitter shall be replaced by a substitution antenna.
- j. The substitution antenna shall be orientated for vertical polarization and the length of the substitution antenna shall be adjusted to correspond to the frequency of the transmitter.
- k. The substitution antenna shall be connected to a calibrated signal generator.
- l. If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- m. The test antenna shall be raised and lowered through the specified range of height to ensure that the maximum signal is received.
- n. The input signal to the substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuator setting of the measuring receiver.
- o. The measurement shall be repeated with the test antenna and the substitution antenna orientated for horizontal polarization.
- p. The measure of the effective radiated power is the larger of the two levels recorded at the input to the substitution antenna, corrected for gain of the substitution antenna if necessary.
- q. Test site anechoic chamber refer to ANSI C63.4.

## TEST RESULTS

### Conducted Measurement:

| LTE FDD Band 66      |                 |                |                     |       |
|----------------------|-----------------|----------------|---------------------|-------|
| TX Channel Bandwidth | Frequency (MHz) | RB Size/Offset | Average Power [dBm] |       |
|                      |                 |                | QPSK                | 16QAM |
| 1.4 MHz              | 1710.7          | 1 RB low       | 22.37               | 21.09 |
|                      |                 | 1 RB high      | 22.41               | 21.13 |
|                      |                 | 50% RB mid     | 22.34               | 21.25 |
|                      |                 | 100% RB        | 22.50               | 21.24 |
|                      | 1745            | 1 RB low       | 22.26               | 21.14 |
|                      |                 | 1 RB high      | 22.33               | 21.04 |
|                      |                 | 50% RB mid     | 22.30               | 21.05 |
|                      |                 | 100% RB        | 22.36               | 21.05 |
|                      | 1779.3          | 1 RB low       | 22.47               | 21.40 |
|                      |                 | 1 RB high      | 22.71               | 21.53 |
|                      |                 | 50% RB mid     | 22.49               | 21.48 |
|                      |                 | 100% RB        | 22.74               | 21.40 |
| 3 MHz                | 1711.5          | 1 RB low       | 22.66               | 21.56 |
|                      |                 | 1 RB high      | 22.44               | 21.36 |
|                      |                 | 50% RB mid     | 22.39               | 21.68 |
|                      |                 | 100% RB        | 21.46               | 20.61 |
|                      | 1745            | 1 RB low       | 22.55               | 21.31 |
|                      |                 | 1 RB high      | 22.30               | 21.15 |
|                      |                 | 50% RB mid     | 22.35               | 21.11 |
|                      |                 | 100% RB        | 21.35               | 20.30 |
|                      | 1778.5          | 1 RB low       | 22.68               | 21.61 |
|                      |                 | 1 RB high      | 22.60               | 21.64 |
|                      |                 | 50% RB mid     | 22.54               | 21.53 |
|                      |                 | 100% RB        | 21.70               | 20.65 |





|        |        |            |       |       |
|--------|--------|------------|-------|-------|
| 5 MHz  | 1712.5 | 1 RB low   | 22.65 | 21.45 |
|        |        | 1 RB high  | 22.66 | 21.56 |
|        |        | 50% RB mid | 22.68 | 21.68 |
|        |        | 100% RB    | 21.45 | 20.50 |
|        | 1745   | 1 RB low   | 22.58 | 21.52 |
|        |        | 1 RB high  | 22.38 | 21.43 |
|        |        | 50% RB mid | 22.28 | 21.17 |
|        |        | 100% RB    | 21.43 | 20.54 |
|        | 1777.5 | 1 RB low   | 22.99 | 21.95 |
|        |        | 1 RB high  | 22.82 | 21.69 |
|        |        | 50% RB mid | 22.77 | 21.66 |
|        |        | 100% RB    | 21.83 | 20.73 |
| 10 MHz | 1715.0 | 1 RB low   | 22.05 | 20.89 |
|        |        | 1 RB high  | 22.56 | 21.47 |
|        |        | 50% RB mid | 22.74 | 21.78 |
|        |        | 100% RB    | 21.49 | 20.44 |
|        | 1745   | 1 RB low   | 21.88 | 20.93 |
|        |        | 1 RB high  | 22.37 | 21.17 |
|        |        | 50% RB mid | 22.67 | 21.45 |
|        |        | 100% RB    | 21.36 | 20.37 |
|        | 1775.0 | 1 RB low   | 22.06 | 21.00 |
|        |        | 1 RB high  | 22.73 | 21.67 |
|        |        | 50% RB mid | 23.01 | 22.11 |
|        |        | 100% RB    | 22.57 | 20.54 |
| 15 MHz | 1717.5 | 1 RB low   | 22.85 | 21.64 |
|        |        | 1 RB high  | 22.35 | 21.34 |
|        |        | 50% RB mid | 22.44 | 21.38 |
|        |        | 100% RB    | 21.34 | 21.30 |
|        | 1745   | 1 RB low   | 22.44 | 21.66 |
|        |        | 1 RB high  | 22.05 | 21.32 |
|        |        | 50% RB mid | 22.12 | 21.27 |
|        |        | 100% RB    | 21.26 | 21.23 |
|        | 1772.5 | 1 RB low   | 22.58 | 21.48 |
|        |        | 1 RB high  | 22.44 | 21.39 |
|        |        | 50% RB mid | 22.62 | 21.59 |
|        |        | 100% RB    | 21.42 | 21.40 |
| 20 MHz | 1720.0 | 1 RB low   | 22.58 | 21.39 |
|        |        | 1 RB high  | 22.25 | 21.34 |
|        |        | 50% RB mid | 22.79 | 21.76 |
|        |        | 100% RB    | 21.32 | 20.27 |
|        | 1745   | 1 RB low   | 22.21 | 21.29 |
|        |        | 1 RB high  | 22.27 | 21.30 |
|        |        | 50% RB mid | 22.45 | 21.51 |
|        |        | 100% RB    | 21.31 | 20.36 |
|        | 1770.0 | 1 RB low   | 21.96 | 20.91 |
|        |        | 1 RB high  | 22.54 | 21.42 |
|        |        | 50% RB mid | 22.85 | 21.79 |
|        |        | 100% RB    | 21.24 | 20.17 |

**Radiated Measurement:**

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 66; recorded worst case for each Channel Bandwidth of LTE FDD Band 66.
2.  $EIRP = P_{Mea}(dBm) - P_{cl}(dB) + P_{Ag}(dB) + G_a(dBi)$

**LTE FDD Band 66\_Channel Bandwidth 1.4MHz\_QPSK**

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Ag}$ (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|------------|-------------|-------------|--------------|
| 1710.7          | -19.43          | 3.06          | 9.68                   | 34.80         | 21.99      | 30.00       | 8.01        | V            |
| 1745            | -20.8           | 3.17          | 9.68                   | 34.80         | 20.51      | 30.00       | 9.49        | V            |
| 1779.3          | -20.81          | 3.22          | 9.75                   | 34.80         | 20.52      | 30.00       | 9.48        | V            |
| 1710.7          | -21.51          | 3.06          | 9.68                   | 34.80         | 19.91      | 30.00       | 10.09       | H            |
| 1745            | -20.83          | 3.17          | 9.68                   | 34.80         | 20.48      | 30.00       | 9.52        | H            |
| 1779.3          | -20.61          | 3.22          | 9.75                   | 34.80         | 20.72      | 30.00       | 9.28        | H            |

**LTE FDD Band 66\_Channel Bandwidth 3MHz\_QPSK**

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Ag}$ (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|------------|-------------|-------------|--------------|
| 1711.5          | -19.21          | 3.06          | 9.68                   | 34.80         | 22.21      | 30.00       | 7.79        | V            |
| 1745            | -20.63          | 3.17          | 9.68                   | 34.80         | 20.68      | 30.00       | 9.32        | V            |
| 1778.5          | -20.64          | 3.22          | 9.75                   | 34.80         | 20.69      | 30.00       | 9.31        | V            |
| 1711.5          | -21.18          | 3.06          | 9.68                   | 34.80         | 20.24      | 30.00       | 9.76        | H            |
| 1745            | -20.83          | 3.17          | 9.68                   | 34.80         | 20.48      | 30.00       | 9.52        | H            |
| 1778.5          | -20.56          | 3.22          | 9.75                   | 34.80         | 20.77      | 30.00       | 9.23        | H            |

**LTE FDD Band 66\_Channel Bandwidth 5MHz\_QPSK**

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Ag}$ (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|------------|-------------|-------------|--------------|
| 1712.5          | -18.82          | 3.06          | 9.68                   | 34.80         | 22.6       | 30.00       | 7.4         | V            |
| 1745            | -21.01          | 3.17          | 9.68                   | 34.80         | 20.3       | 30.00       | 9.7         | V            |
| 1777.5          | -20.32          | 3.22          | 9.75                   | 34.80         | 21.01      | 30.00       | 8.99        | V            |
| 1712.5          | -21.27          | 3.06          | 9.68                   | 34.80         | 20.15      | 30.00       | 9.85        | H            |
| 1745            | -20.5           | 3.17          | 9.68                   | 34.80         | 20.81      | 30.00       | 9.19        | H            |
| 1777.5          | -21.17          | 3.22          | 9.75                   | 34.80         | 20.16      | 30.00       | 9.84        | H            |

**LTE FDD Band 66\_Channel Bandwidth 10MHz\_QPSK**

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Ag}$ (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|------------|-------------|-------------|--------------|
| 1715.0          | -19.01          | 3.06          | 9.68                   | 34.80         | 22.41      | 30.00       | 7.59        | V            |
| 1745            | -21.05          | 3.17          | 9.68                   | 34.80         | 20.26      | 30.00       | 9.74        | V            |
| 1775.0          | -20.81          | 3.22          | 9.75                   | 34.80         | 20.52      | 30.00       | 9.48        | V            |
| 1715.0          | -20.63          | 3.06          | 9.68                   | 34.80         | 20.79      | 30.00       | 9.21        | H            |
| 1745            | -21             | 3.17          | 9.68                   | 34.80         | 20.31      | 30.00       | 9.69        | H            |
| 1775.0          | -20.2           | 3.22          | 9.75                   | 34.80         | 21.13      | 30.00       | 8.87        | H            |

**LTE FDD Band 66\_Channel Bandwidth 15MHz\_QPSK**

| Frequency (MHz) | $P_{Mea}$ (dBm) | $P_{cl}$ (dB) | $G_a$ Antenna Gain(dB) | $P_{Ag}$ (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|-----------------|---------------|------------------------|---------------|------------|-------------|-------------|--------------|
| 1717.5          | -19.64          | 3.06          | 9.68                   | 34.80         | 21.78      | 30.00       | 8.22        | V            |
| 1745            | -20.85          | 3.17          | 9.68                   | 34.80         | 20.46      | 30.00       | 9.54        | V            |
| 1772.5          | -20.86          | 3.22          | 9.75                   | 34.80         | 20.47      | 30.00       | 9.53        | V            |
| 1717.5          | -20.59          | 3.06          | 9.68                   | 34.80         | 20.83      | 30.00       | 9.17        | H            |
| 1745            | -20.86          | 3.17          | 9.68                   | 34.80         | 20.45      | 30.00       | 9.55        | H            |
| 1772.5          | -20.47          | 3.22          | 9.75                   | 34.80         | 20.86      | 30.00       | 9.14        | H            |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**LTE FDD Band 66\_Channel Bandwidth 20MHz\_QPSK**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1720.0          | -17.99                 | 3.06                 | 9.68                            | 34.80                | 23.43      | 30.00       | 6.57        | V            |
| 1745            | -21.33                 | 3.17                 | 9.68                            | 34.80                | 19.98      | 30.00       | 10.02       | V            |
| 1770.0          | -20.5                  | 3.22                 | 9.75                            | 34.80                | 20.83      | 30.00       | 9.17        | V            |
| 1720.0          | -20.75                 | 3.06                 | 9.68                            | 34.80                | 20.67      | 30.00       | 9.33        | H            |
| 1745            | -20.56                 | 3.17                 | 9.68                            | 34.80                | 20.75      | 30.00       | 9.25        | H            |
| 1770.0          | -20.71                 | 3.22                 | 9.75                            | 34.80                | 20.62      | 30.00       | 9.38        | H            |

**LTE FDD Band 66\_Channel Bandwidth 1.4MHz\_16QAM**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1710.7          | -19.33                 | 3.06                 | 9.68                            | 34.80                | 22.09      | 30.00       | 7.91        | V            |
| 1745            | -20.51                 | 3.17                 | 9.68                            | 34.80                | 20.8       | 30.00       | 9.2         | V            |
| 1779.3          | -20.63                 | 3.22                 | 9.75                            | 34.80                | 20.7       | 30.00       | 9.3         | V            |
| 1710.7          | -21.09                 | 3.06                 | 9.68                            | 34.80                | 20.33      | 30.00       | 9.67        | H            |
| 1745            | -20.86                 | 3.17                 | 9.68                            | 34.80                | 20.45      | 30.00       | 9.55        | H            |
| 1779.3          | -20.56                 | 3.22                 | 9.75                            | 34.80                | 20.77      | 30.00       | 9.23        | H            |

**LTE FDD Band 66\_Channel Bandwidth 3MHz\_16QAM**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1711.5          | -19.52                 | 3.06                 | 9.68                            | 34.80                | 21.9       | 30.00       | 8.1         | V            |
| 1745            | -20.7                  | 3.17                 | 9.68                            | 34.80                | 20.61      | 30.00       | 9.39        | V            |
| 1778.5          | -19.94                 | 3.22                 | 9.75                            | 34.80                | 21.39      | 30.00       | 8.61        | V            |
| 1711.5          | -21.49                 | 3.06                 | 9.68                            | 34.80                | 19.93      | 30.00       | 10.07       | H            |
| 1745            | -20.89                 | 3.17                 | 9.68                            | 34.80                | 20.42      | 30.00       | 9.58        | H            |
| 1778.5          | -21.11                 | 3.22                 | 9.75                            | 34.80                | 20.22      | 30.00       | 9.78        | H            |

**LTE FDD Band 66\_Channel Bandwidth 5MHz\_16QAM**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1712.5          | -19.04                 | 3.06                 | 9.68                            | 34.80                | 22.38      | 30.00       | 7.62        | V            |
| 1745            | -20.43                 | 3.17                 | 9.68                            | 34.80                | 20.88      | 30.00       | 9.12        | V            |
| 1777.5          | -20.09                 | 3.22                 | 9.75                            | 34.80                | 21.24      | 30.00       | 8.76        | V            |
| 1712.5          | -20.9                  | 3.06                 | 9.68                            | 34.80                | 20.52      | 30.00       | 9.48        | H            |
| 1745            | -20.52                 | 3.17                 | 9.68                            | 34.80                | 20.79      | 30.00       | 9.21        | H            |
| 1777.5          | -21.02                 | 3.22                 | 9.75                            | 34.80                | 20.31      | 30.00       | 9.69        | H            |

**LTE FDD Band 66\_Channel Bandwidth 10MHz\_16QAM**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1715.0          | -19.65                 | 3.06                 | 9.68                            | 34.80                | 21.77      | 30.00       | 8.23        | V            |
| 1745            | -20.43                 | 3.17                 | 9.68                            | 34.80                | 20.88      | 30.00       | 9.12        | V            |
| 1775.0          | -20.27                 | 3.22                 | 9.75                            | 34.80                | 21.06      | 30.00       | 8.94        | V            |
| 1715.0          | -21.04                 | 3.06                 | 9.68                            | 34.80                | 20.38      | 30.00       | 9.62        | H            |
| 1745            | -21.05                 | 3.17                 | 9.68                            | 34.80                | 20.26      | 30.00       | 9.74        | H            |
| 1775.0          | -20.92                 | 3.22                 | 9.75                            | 34.80                | 20.41      | 30.00       | 9.59        | H            |



**LTE FDD Band 66\_Channel Bandwidth 15MHz\_16QAM**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1717.5          | -18.87                 | 3.06                 | 9.68                            | 34.80                | 22.55      | 30.00       | 7.45        | V            |
| 1745            | -20.59                 | 3.17                 | 9.68                            | 34.80                | 20.72      | 30.00       | 9.28        | V            |
| 1772.5          | -20.69                 | 3.22                 | 9.75                            | 34.80                | 20.64      | 30.00       | 9.36        | V            |
| 1717.5          | -21.23                 | 3.06                 | 9.68                            | 34.80                | 20.19      | 30.00       | 9.81        | H            |
| 1745            | -21.02                 | 3.17                 | 9.68                            | 34.80                | 20.29      | 30.00       | 9.71        | H            |
| 1772.5          | -20.27                 | 3.22                 | 9.75                            | 34.80                | 21.06      | 30.00       | 8.94        | H            |

**LTE FDD Band 66\_Channel Bandwidth 20MHz\_16QAM**

| Frequency (MHz) | P <sub>Mea</sub> (dBm) | P <sub>cl</sub> (dB) | G <sub>a</sub> Antenna Gain(dB) | P <sub>Ag</sub> (dB) | EIRP (dBm) | Limit (dBm) | Margin (dB) | Polarization |
|-----------------|------------------------|----------------------|---------------------------------|----------------------|------------|-------------|-------------|--------------|
| 1720.0          | -18.25                 | 3.06                 | 9.68                            | 34.80                | 23.17      | 30.00       | 6.83        | V            |
| 1745            | -21.1                  | 3.17                 | 9.68                            | 34.80                | 20.21      | 30.00       | 9.79        | V            |
| 1770.0          | -20.13                 | 3.22                 | 9.75                            | 34.80                | 21.2       | 30.00       | 8.8         | V            |
| 1720.0          | -21                    | 3.06                 | 9.68                            | 34.80                | 20.42      | 30.00       | 9.58        | H            |
| 1745            | -21.02                 | 3.17                 | 9.68                            | 34.80                | 20.29      | 30.00       | 9.71        | H            |
| 1770.0          | -21.06                 | 3.22                 | 9.75                            | 34.80                | 20.27      | 30.00       | 9.73        | H            |






### 3.2 Peak-to-Average Ratio (PAR)

#### LIMIT

The Peak-to-Average Ratio (PAR) of the transmission may not exceed 13 dB.

#### TEST CONFIGURATION

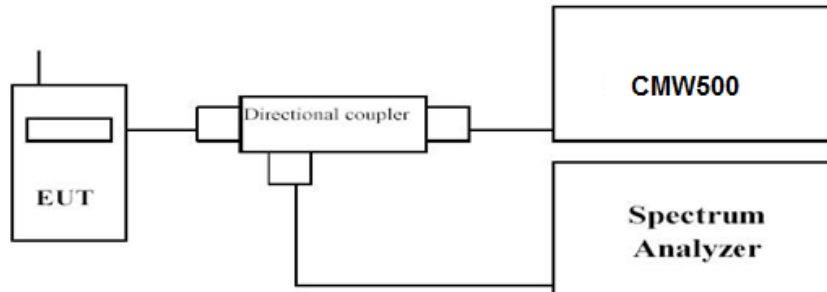

#### TEST PROCEDURE

1. Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
2. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
3. Set the number of counts to a value that stabilizes the measured CCDF curve;
4. Set the measurement interval as follows:
  - 1). for continuous transmissions, set to 1 ms;
  - 2). for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
5. Record the maximum PAPR level associated with a probability of 0.1%.

#### TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 66; recorded worst case for each Channel Bandwidth of LTE FDD Band 66.

| LTE FDD Band 66      |                 |                |           |       |
|----------------------|-----------------|----------------|-----------|-------|
| TX Channel Bandwidth | Frequency (MHz) | RB Size/Offset | PAPR (dB) |       |
|                      |                 |                | QPSK      | 16QAM |
| 1.4 MHz              | 1710.7          | 1RB#0          | 5.44      | 6.33  |
|                      | 1745            |                | 4.36      | 5.19  |
|                      | 1779.3          |                | 4.26      | 5.24  |
| 3 MHz                | 1711.5          | 1RB#0          | 5.43      | 6.23  |
|                      | 1745            |                | 4.20      | 5.02  |
|                      | 1778.5          |                | 4.13      | 5.04  |
| 5 MHz                | 1712.5          | 1RB#0          | 5.43      | 6.08  |
|                      | 1745            |                | 4.17      | 4.89  |
|                      | 1777.5          |                | 4.08      | 4.82  |
| 10 MHz               | 1715.0          | 1RB#0          | 5.74      | 6.60  |
|                      | 1745            |                | 4.27      | 5.11  |
|                      | 1775.0          |                | 4.89      | 5.81  |
| 15 MHz               | 1717.5          | 1RB#0          | 5.48      | 6.32  |
|                      | 1745            |                | 3.84      | 4.67  |
|                      | 1772.5          |                | 5.15      | 6.10  |
| 20 MHz               | 1720.0          | 1RB#0          | 5.42      | 6.10  |
|                      | 1745            |                | 4.10      | 5.09  |
|                      | 1770.0          |                | 5.43      | 6.15  |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.


TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China




## LTE FDD Band 66-1.4MHz Channel Bandwidth PAPR

## QPSK

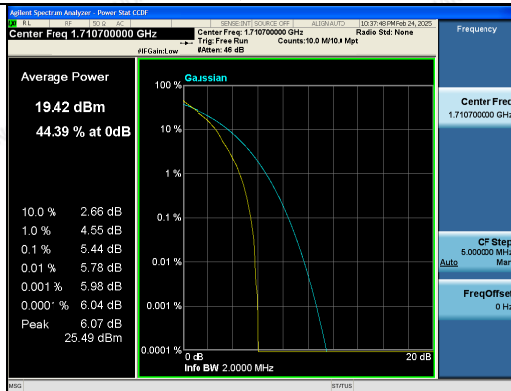


1RB#0

## 16QAM

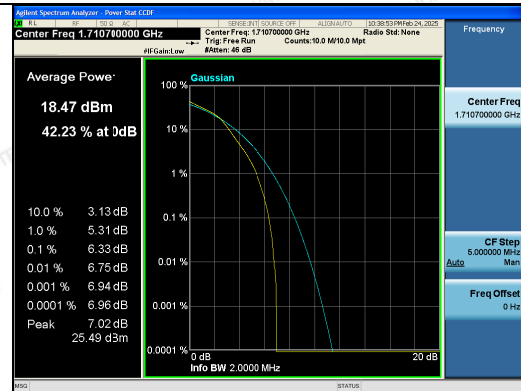


1RB#0

## Low Channel

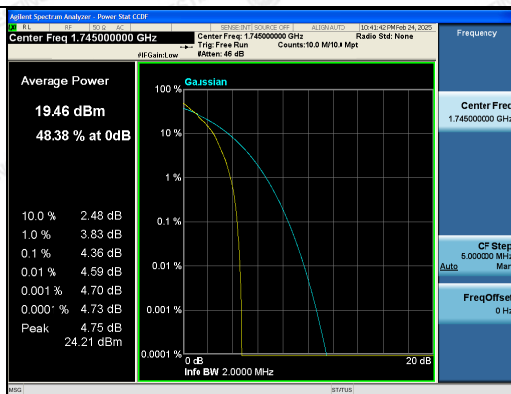


1RB#0

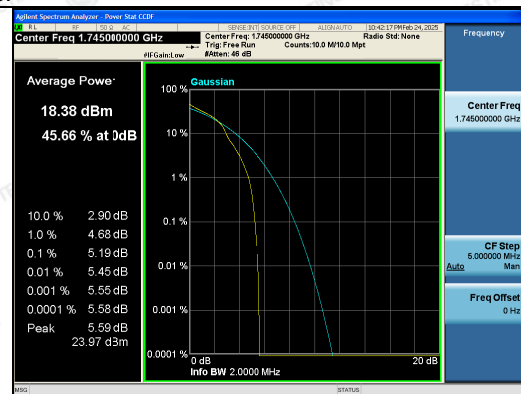


1RB#0

## Middle Channel

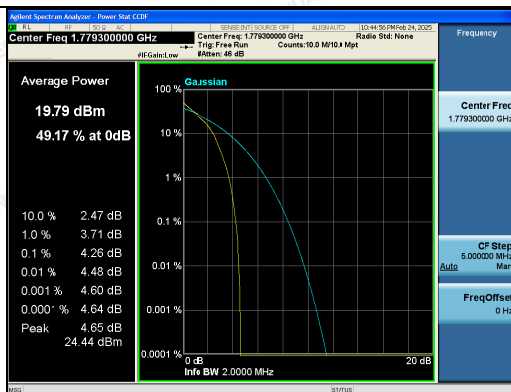

1RB#0

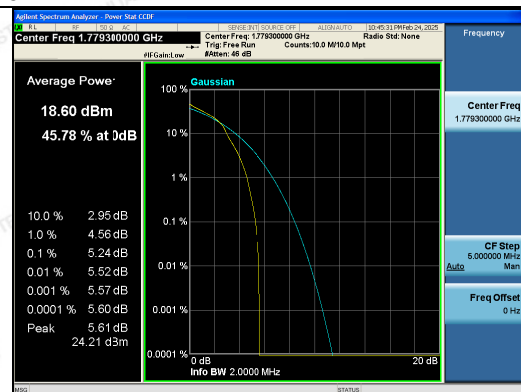


1RB#0

## High Channel




## LTE FDD Band 66-3MHz Channel Bandwidth PAPR

## QPSK

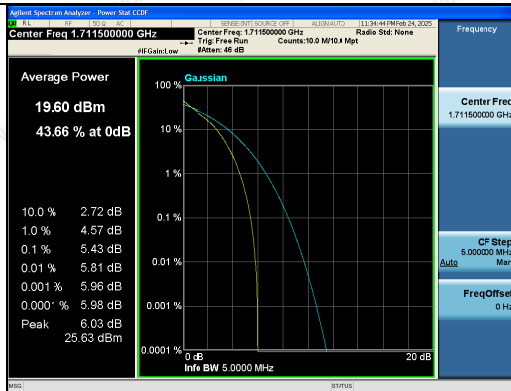


1RB#0

## 16QAM

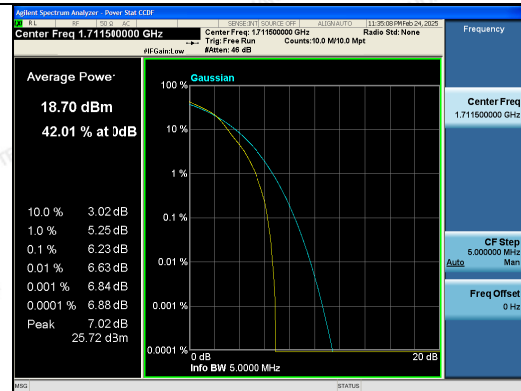


1RB#0

## Low Channel

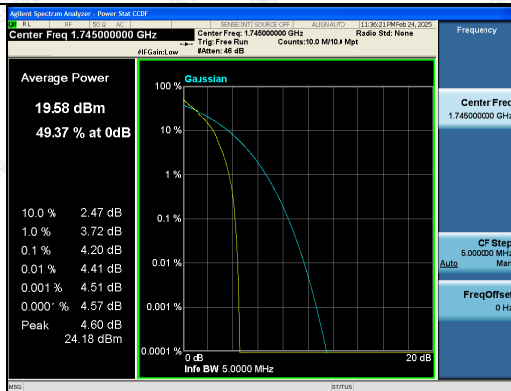


1RB#0

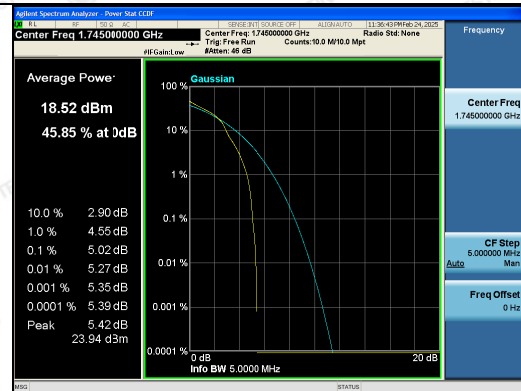


1RB#0

## Middle Channel

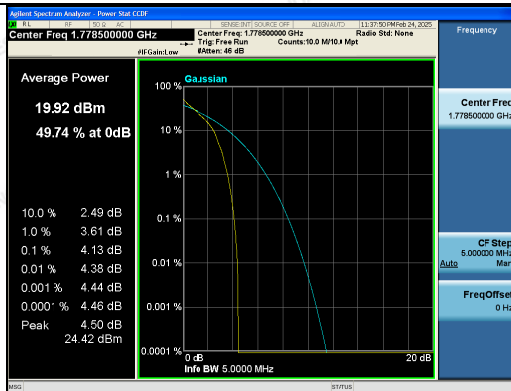

1RB#0

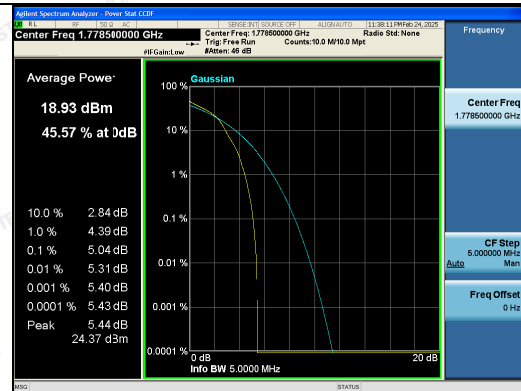


1RB#0

## High Channel




## LTE FDD Band 66-5MHz Channel Bandwidth PAPR

## QPSK

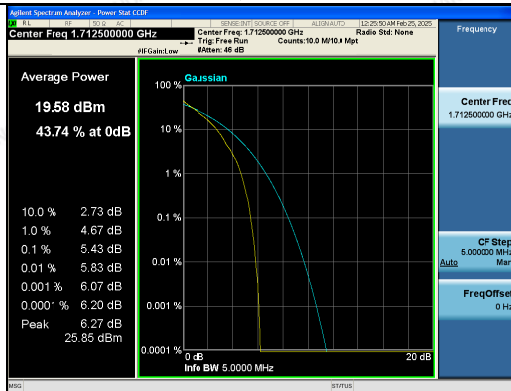


1RB#0

## 16QAM

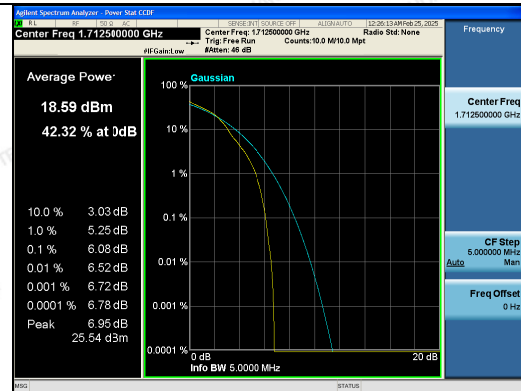


1RB#0

## Low Channel

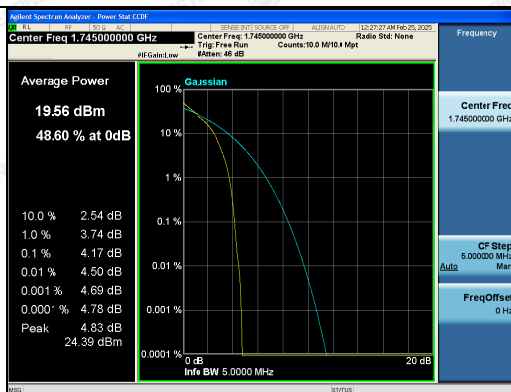


1RB#0

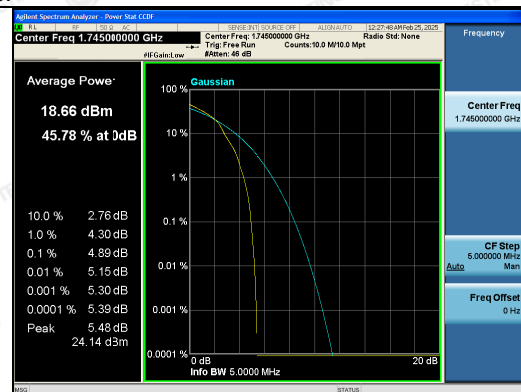


1RB#0

## Middle Channel

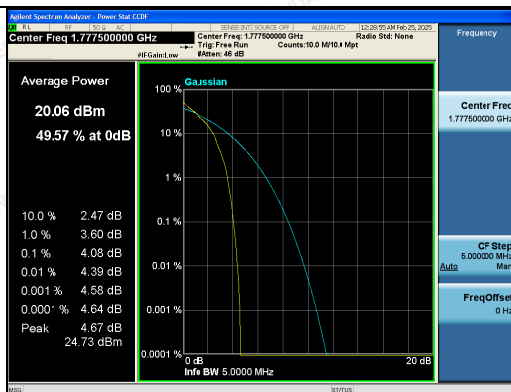

1RB#0

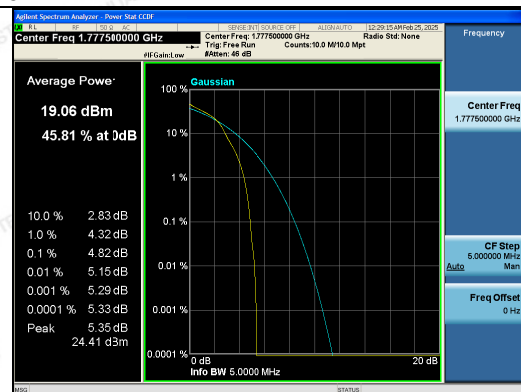

1RB#0


## High Channel






## LTE FDD Band 66-10MHz Channel Bandwidth PAPR

## QPSK

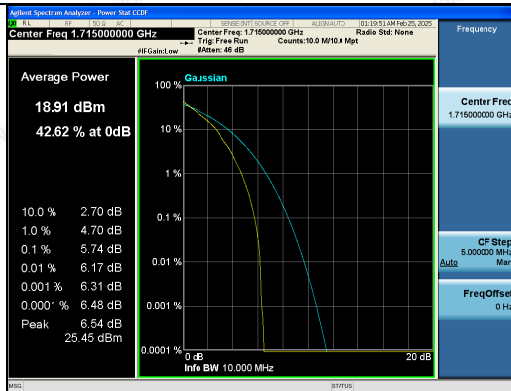


1RB#0

## 16QAM

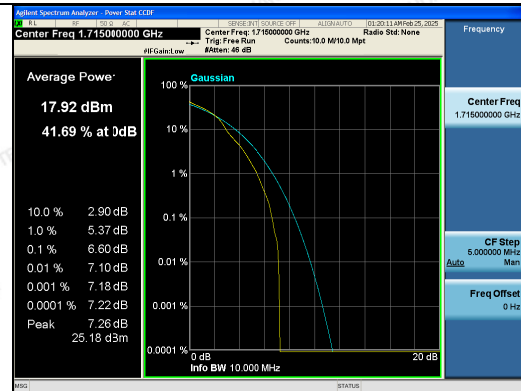


1RB#0

## Low Channel

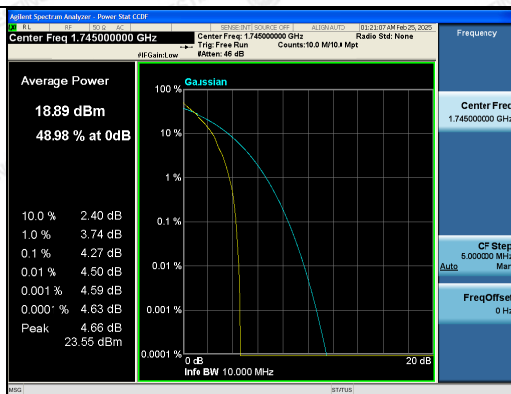


1RB#0

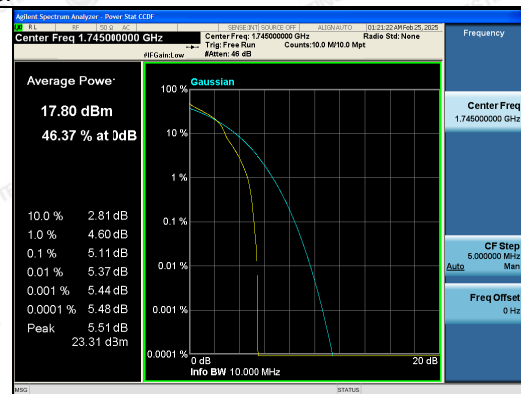


1RB#0

## Middle Channel

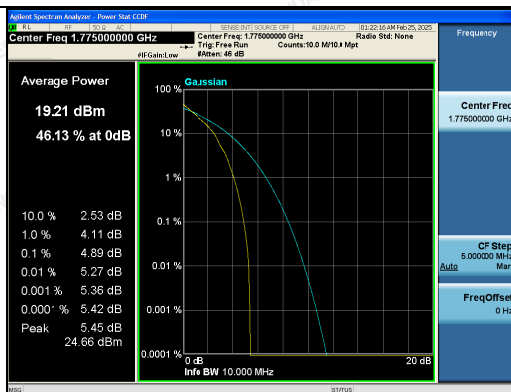

1RB#0

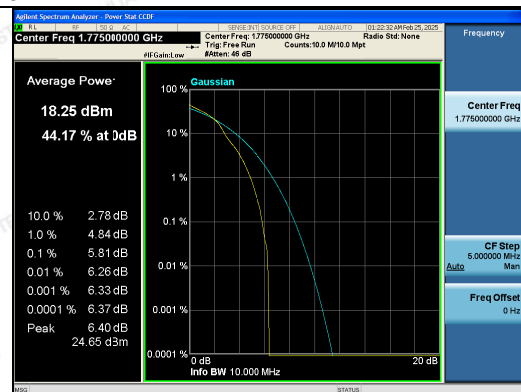


1RB#0

## High Channel




## LTE FDD Band 66-15MHz Channel Bandwidth PAPR

## QPSK

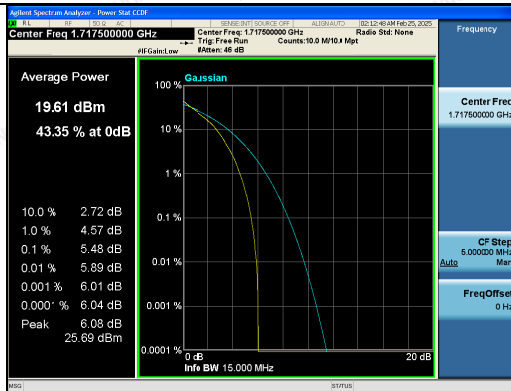


1RB#0

## 16QAM

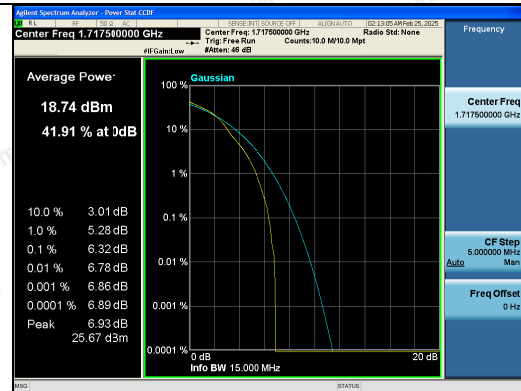


1RB#0

## Low Channel

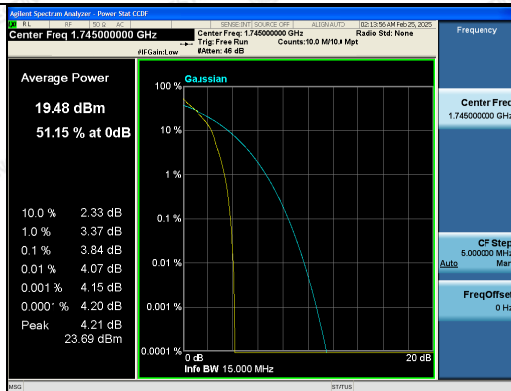


1RB#0

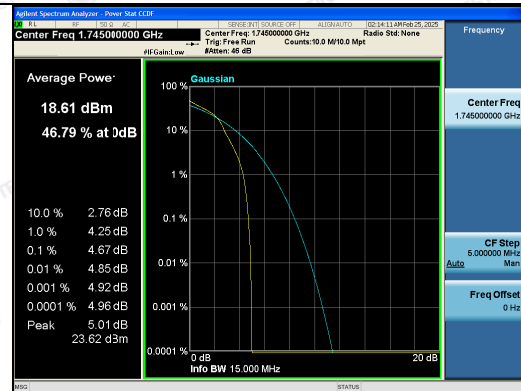


1RB#0

## Middle Channel

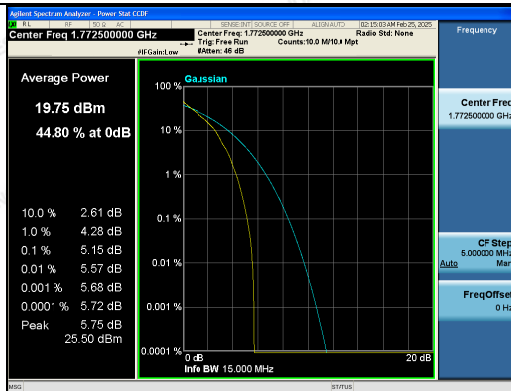

1RB#0

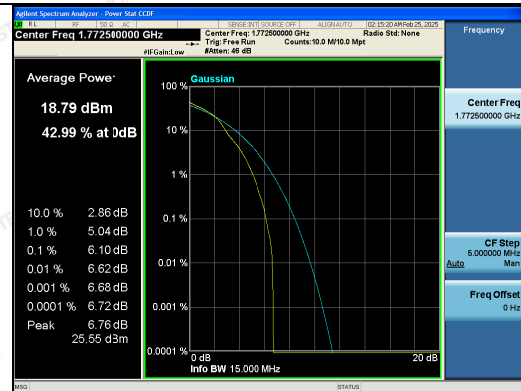


1RB#0

## High Channel




## LTE FDD Band 66-20MHz Channel Bandwidth PAPR

## QPSK

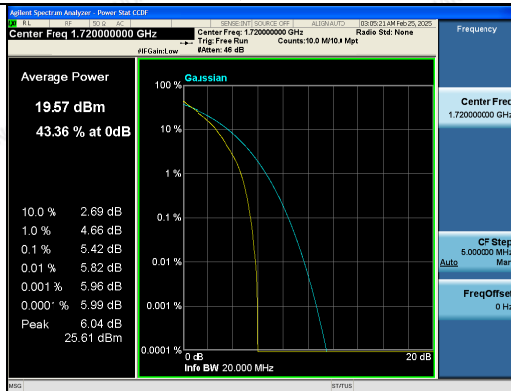


1RB#0

## 16QAM

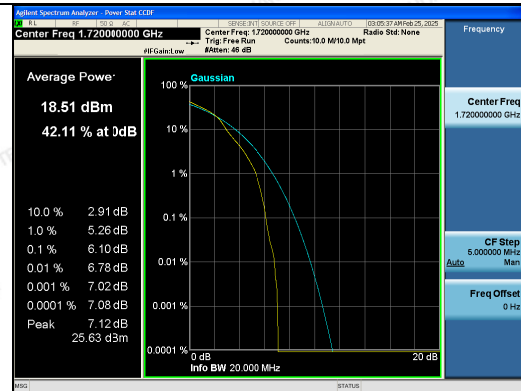


1RB#0

## Low Channel

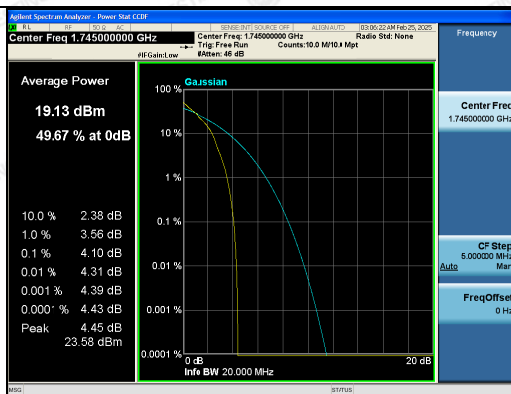


1RB#0

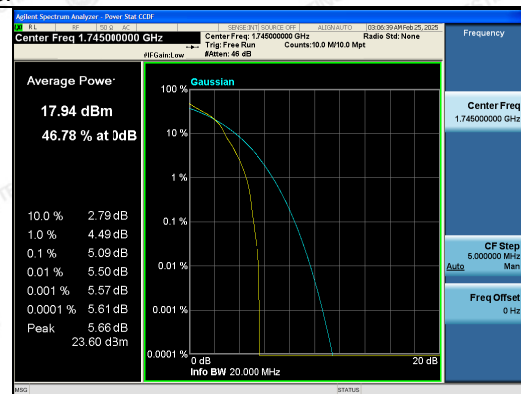


1RB#0

## Middle Channel

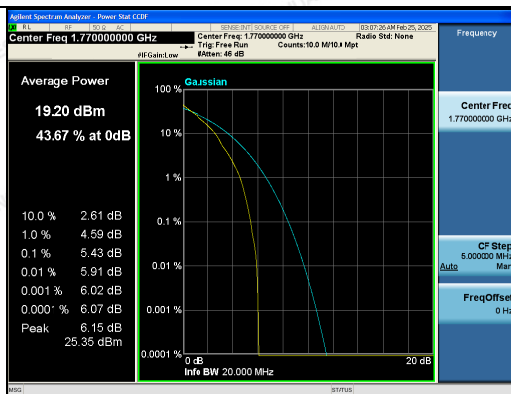

1RB#0

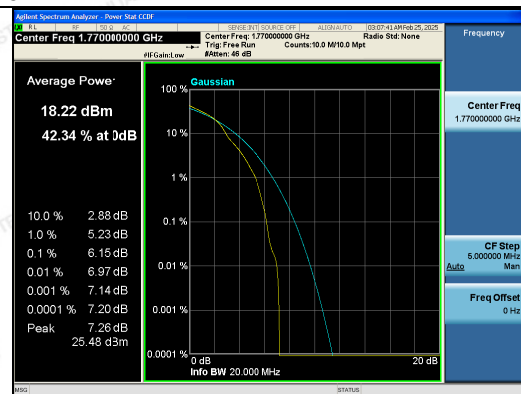

1RB#0

## High Channel




## 3.3 Occupied Bandwidth and Emission Bandwidth

### LIMIT

N/A

### TEST CONFIGURATION

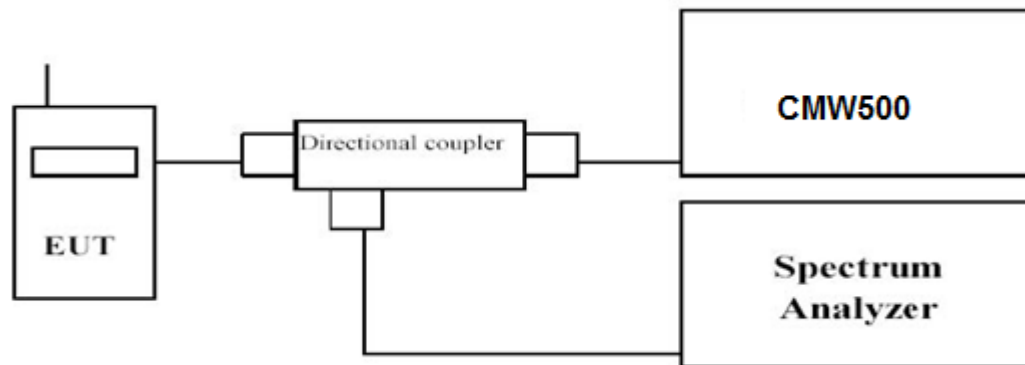

### TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at low, middle and high channel in each band. The -26dBc Emission bandwidth was also measured and recorded. Set RBW was set to about 1% of emission BW, VBW $\geq$ 3 times RBW. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

### TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 66; recorded worst case for each Channel Bandwidth of LTE FDD Band 66.

| LTE FDD Band 66      |                |                 |                                 |       |                              |        |
|----------------------|----------------|-----------------|---------------------------------|-------|------------------------------|--------|
| TX Channel Bandwidth | RB Size/Offset | Frequency (MHz) | -26dBc Emission bandwidth (MHz) |       | 99% Occupied bandwidth (MHz) |        |
|                      |                |                 | QPSK                            | 16QAM | QPSK                         | 16QAM  |
| 1.4 MHz              | 6RB#0          | 1710.7          | 1.295                           | 1.287 | 1.0941                       | 1.1019 |
|                      |                | 1745            | 1.283                           | 1.290 | 1.0957                       | 1.0986 |
|                      |                | 1779.3          | 1.304                           | 1.293 | 1.0931                       | 1.1000 |
| 3 MHz                | 15RB#0         | 1711.5          | 2.979                           | 2.972 | 2.7015                       | 2.6925 |
|                      |                | 1745            | 2.974                           | 2.974 | 2.7019                       | 2.7003 |
|                      |                | 1778.5          | 2.961                           | 2.954 | 2.7019                       | 2.6924 |
| 5 MHz                | 25RB#0         | 1712.5          | 5.028                           | 4.984 | 4.5146                       | 4.5027 |
|                      |                | 1745            | 5.001                           | 5.025 | 4.4995                       | 4.5093 |
|                      |                | 1777.5          | 5.028                           | 4.994 | 4.5087                       | 4.5022 |
| 10 MHz               | 50RB#0         | 1715.0          | 9.950                           | 9.903 | 8.9874                       | 8.9761 |
|                      |                | 1745            | 9.944                           | 9.896 | 8.9973                       | 9.0008 |
|                      |                | 1775.0          | 9.935                           | 9.806 | 8.9724                       | 8.9689 |
| 15 MHz               | 75RB#0         | 1717.5          | 14.80                           | 14.71 | 13.511                       | 13.486 |
|                      |                | 1745            | 14.89                           | 14.78 | 13.482                       | 13.493 |
|                      |                | 1772.5          | 14.78                           | 14.68 | 13.469                       | 13.446 |
| 20 MHz               | 100RB#0        | 1720.0          | 19.55                           | 19.51 | 17.968                       | 17.972 |
|                      |                | 1745            | 19.68                           | 19.51 | 17.970                       | 17.950 |
|                      |                | 1770.0          | 19.53                           | 19.55 | 17.933                       | 17.944 |

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAKE, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : service@cer-mark.com


Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China






## LTE FDD Band 66-1.4MHz Channel Bandwidth

## QPSK

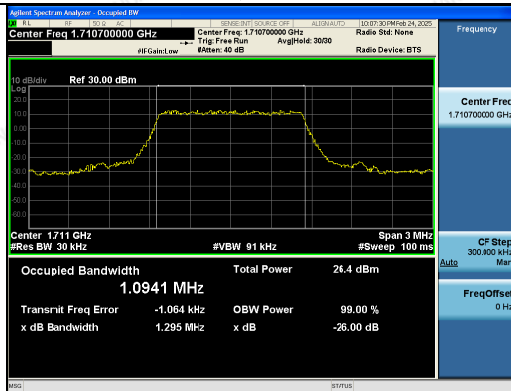


## 16QAM

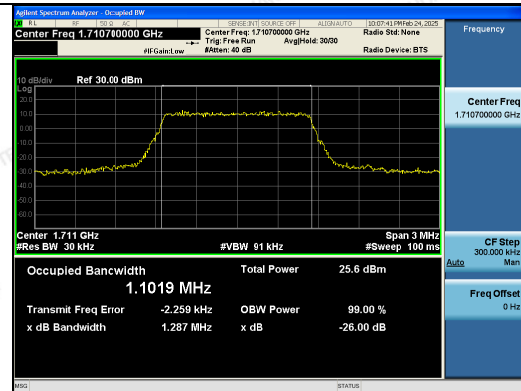

6RB#0

6RB#0

## Low Channel

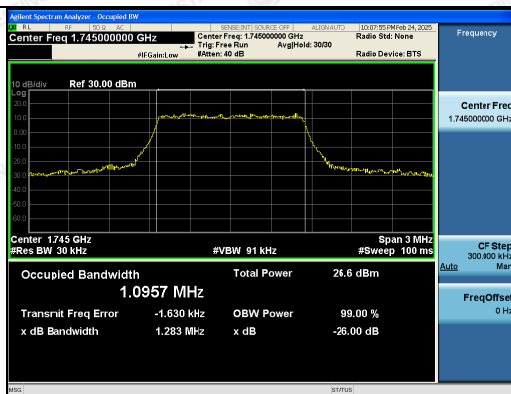


6RB#0




6RB#0

## Middle Channel

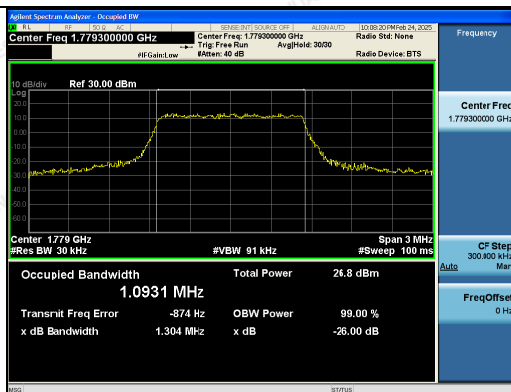



6RB#0

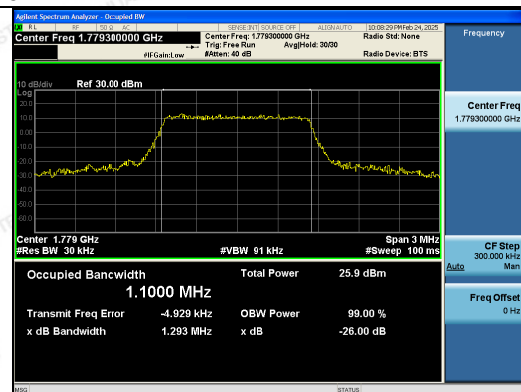

6RB#0


## High Channel

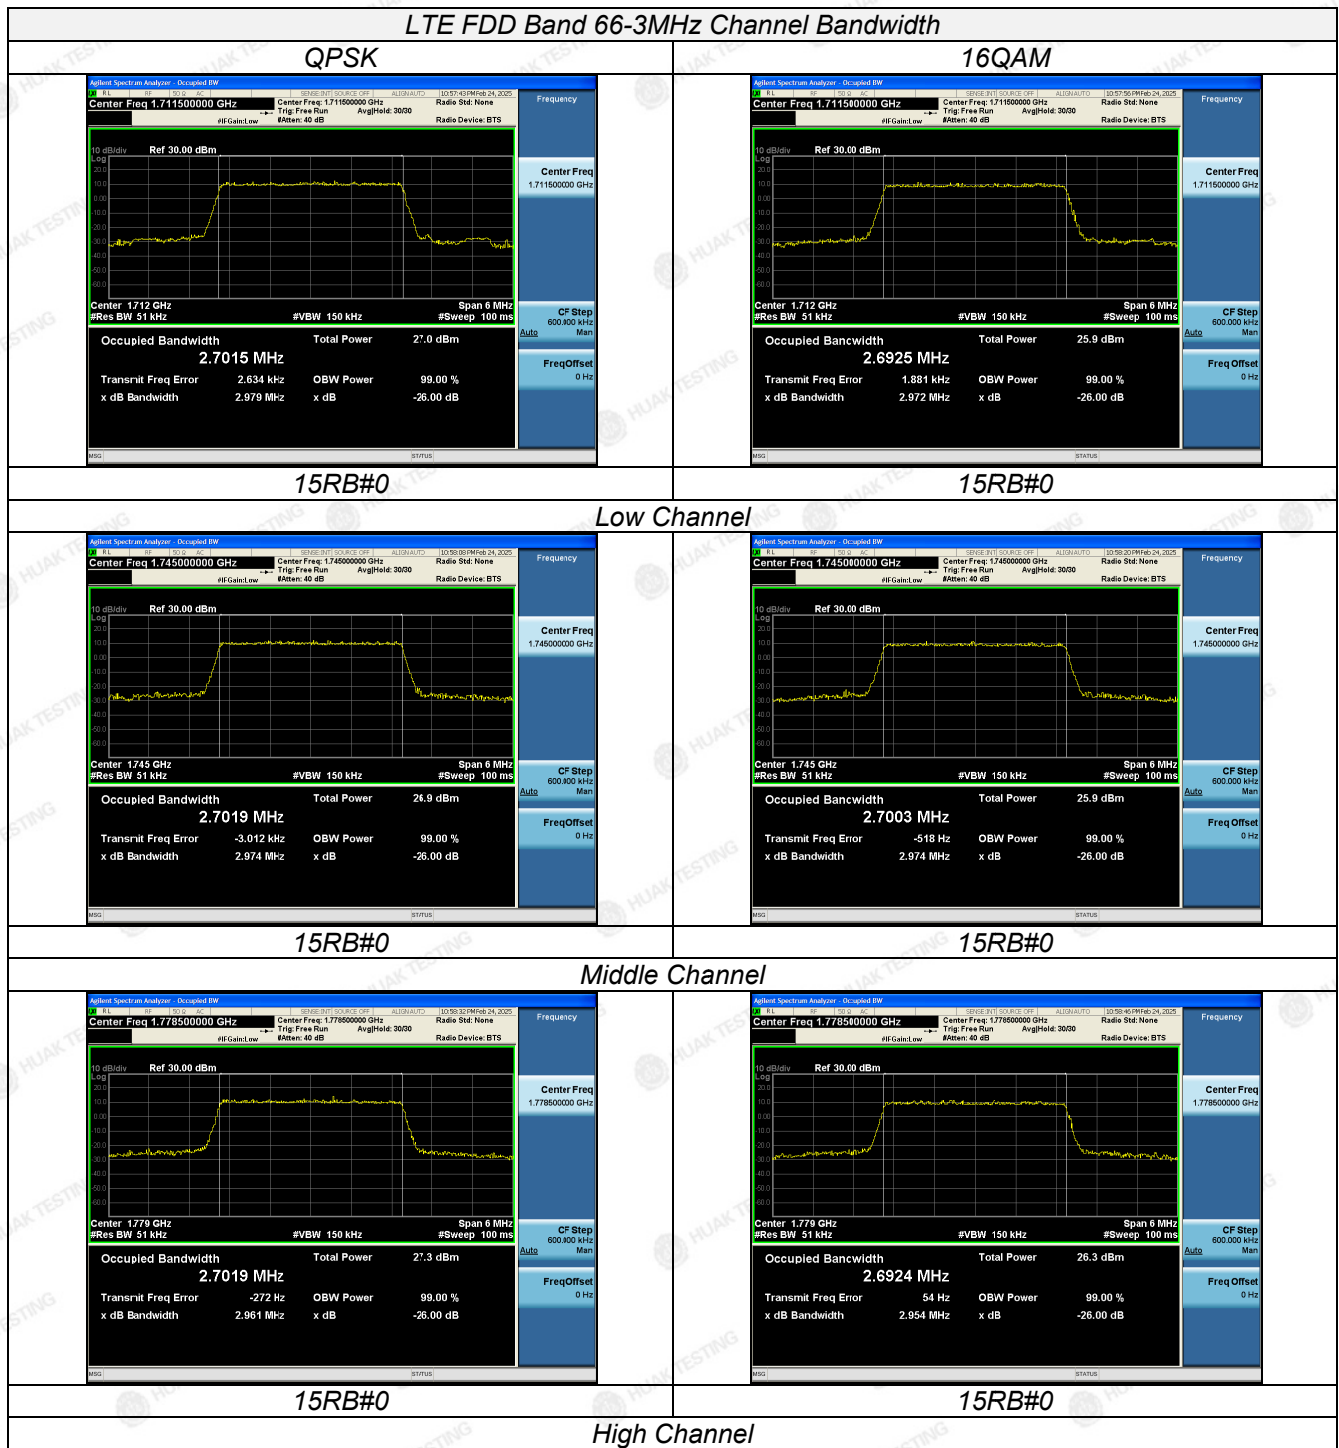


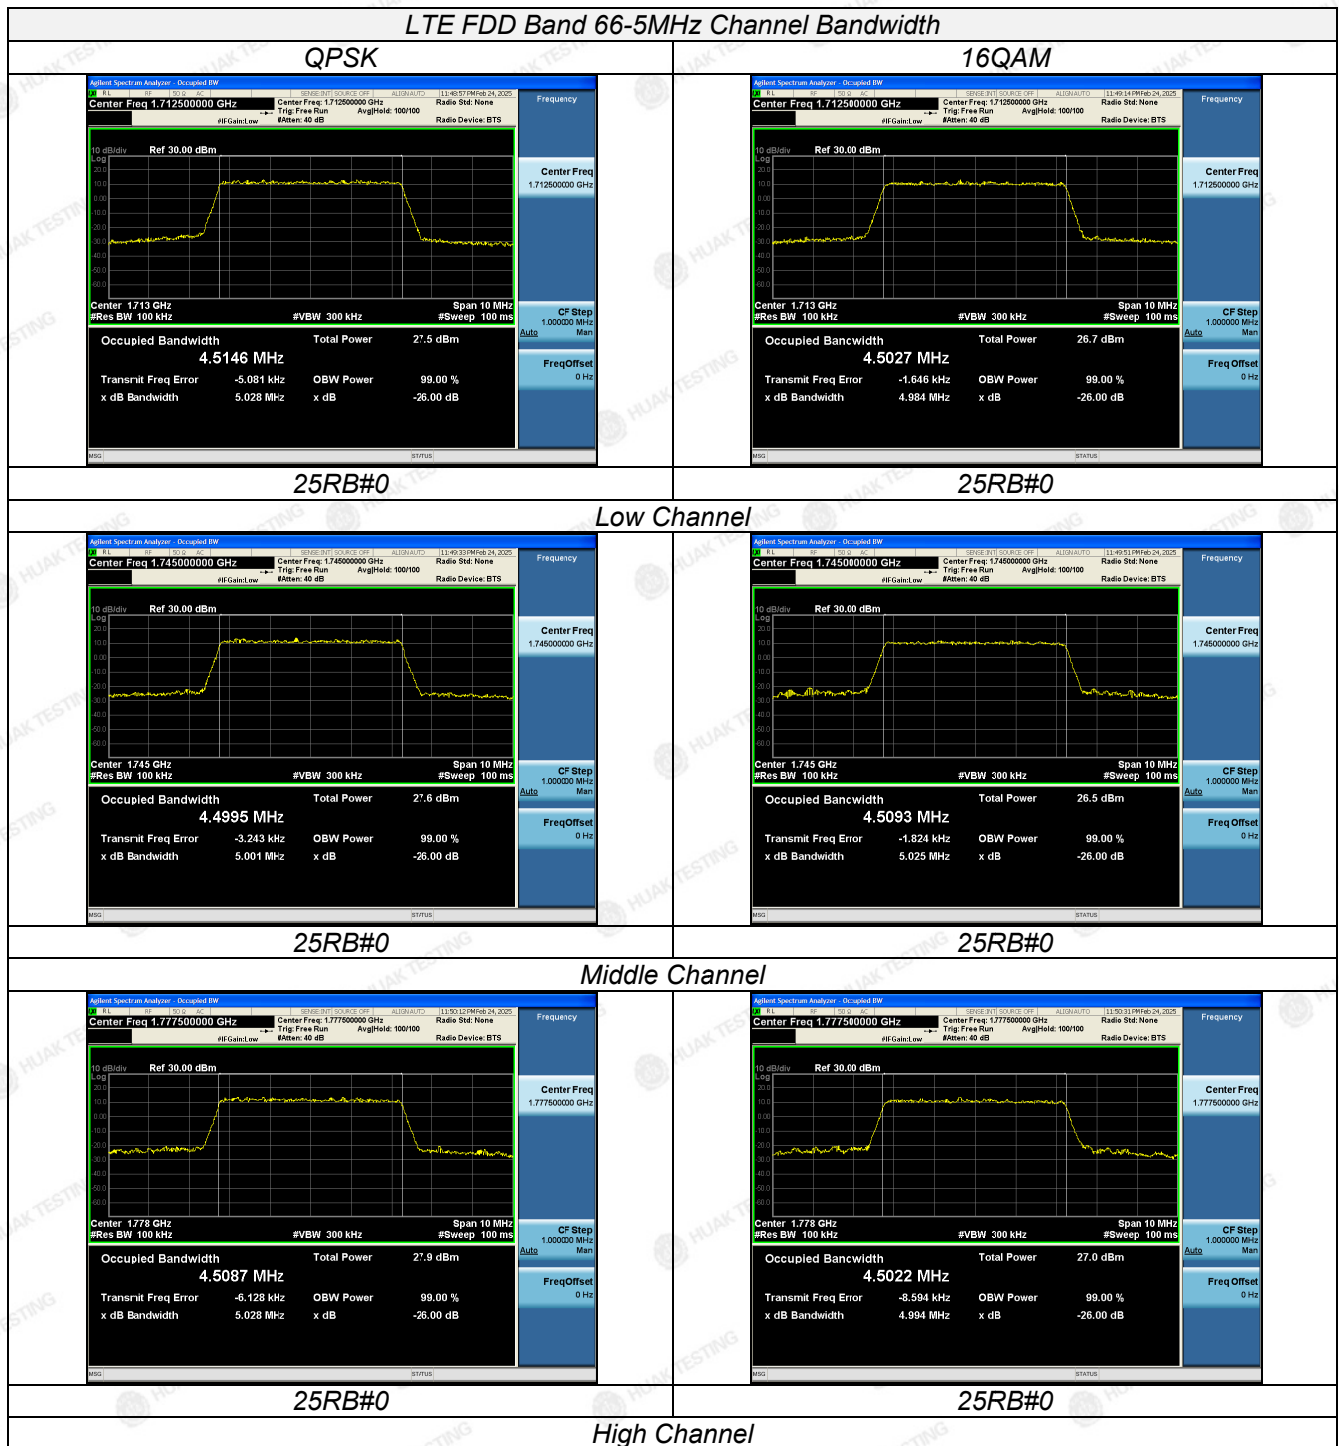





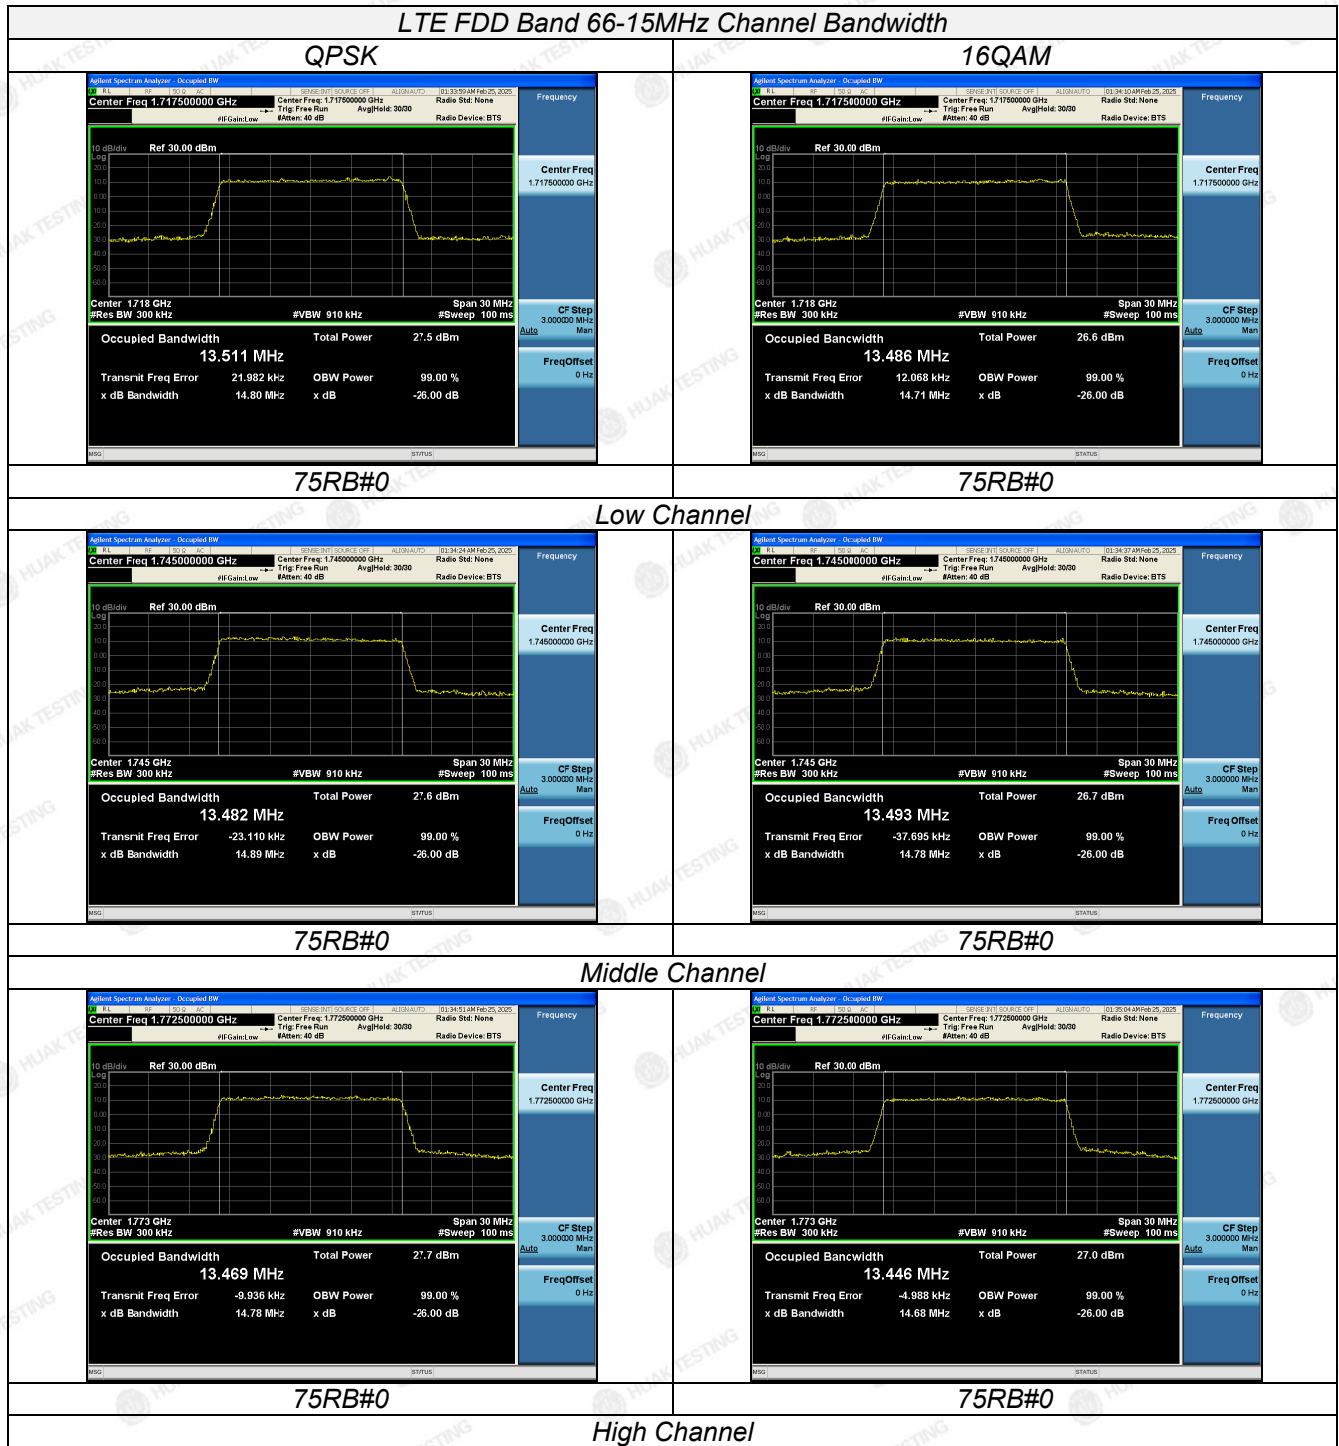

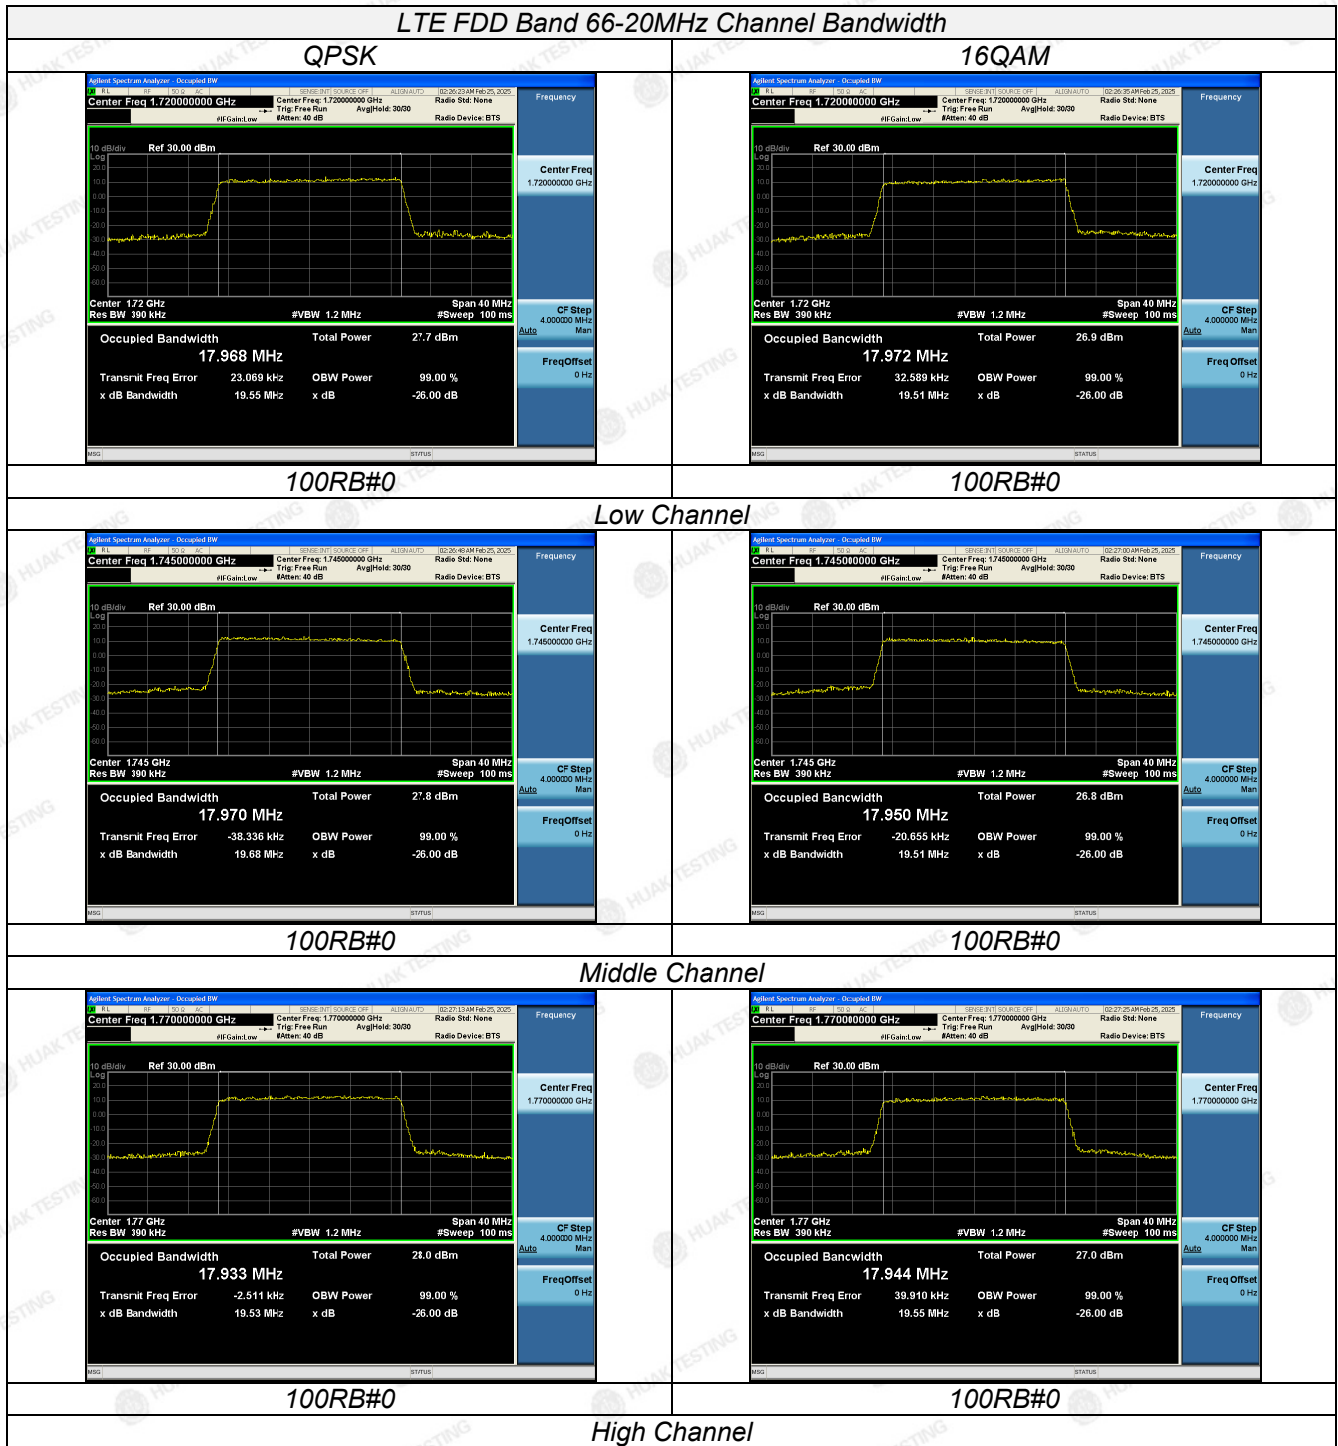




### 3.4 Band Edge Compliance

#### LIMIT

According to §27.53 (h): For operations in the 1710–1755 MHz and 2110–2155 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dB.

#### TEST CONFIGURATION

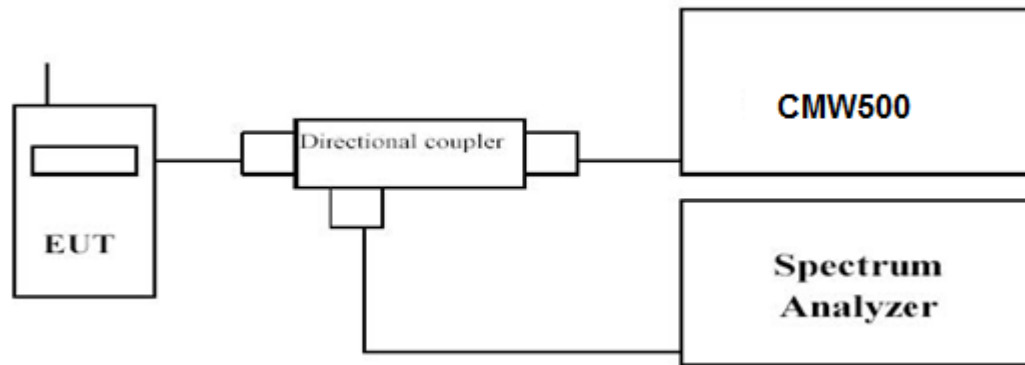


#### TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest and highest channels for each band and different modulation.
5. Measure Band edge using RMS (Average) detector by spectrum.

#### TEST RESULTS

Remark:

1. We were tested all RB Configuration refer 3GPP TS136 521 for each Channel Bandwidth of LTE FDD Band 66; recorded worst case for each Channel Bandwidth of LTE FDD Band 66.

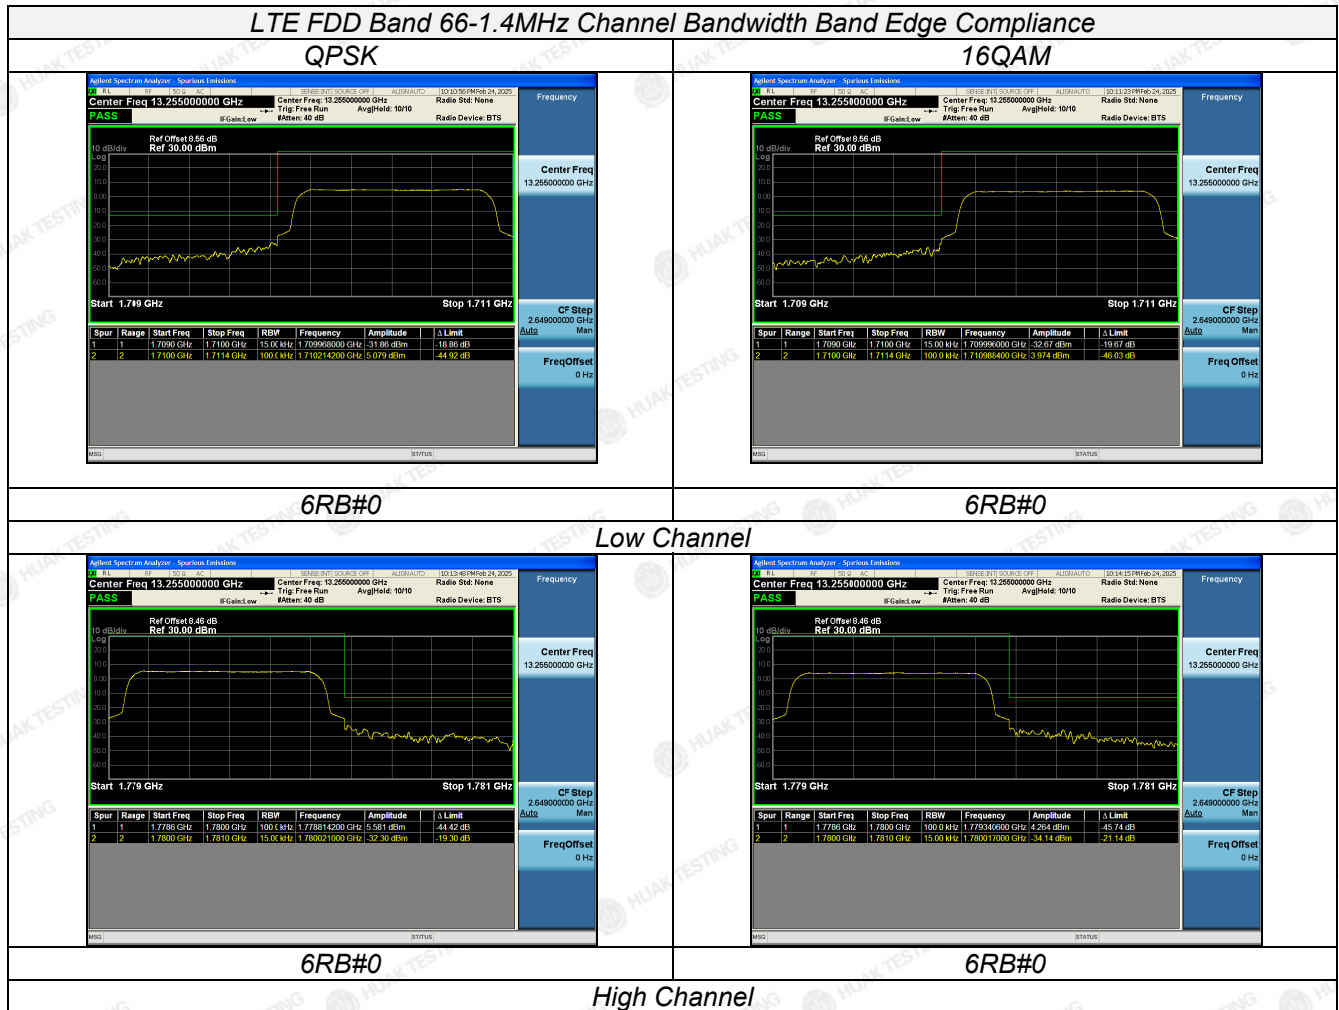







## LTE FDD Band 66-3MHz Channel Bandwidth Band Edge Compliance

## QPSK

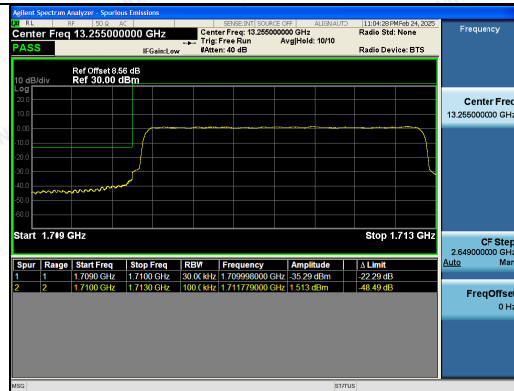



## 16QAM

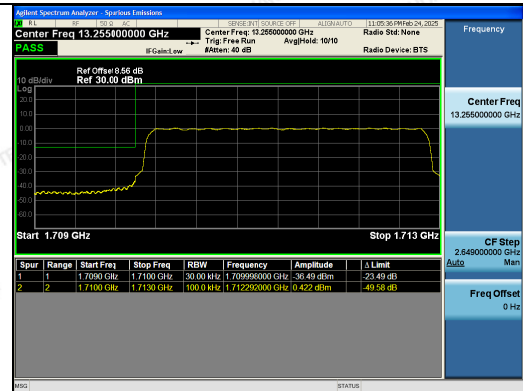

## 15RB#0

## 15RB#0

## Low Channel

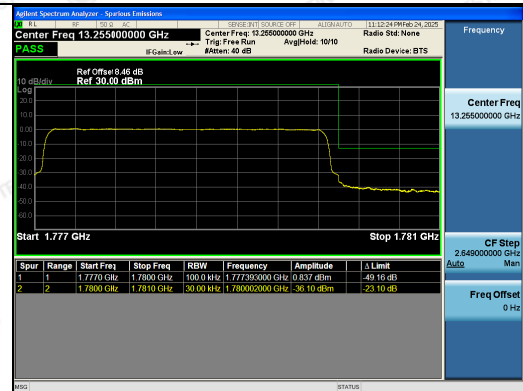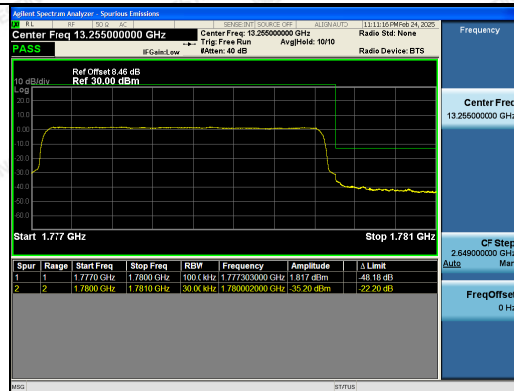

## 15RB#0


## 15RB#0

## High Channel




## LTE FDD Band 66-5MHz Channel Bandwidth Band Edge Compliance

## QPSK

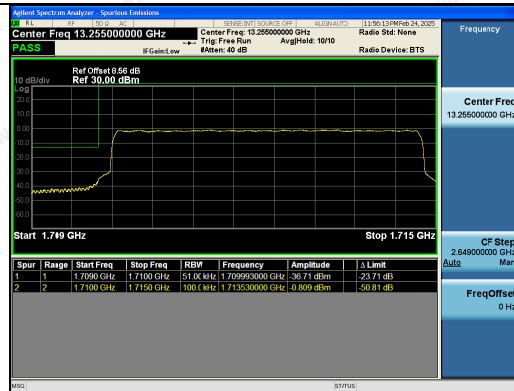



## 16QAM

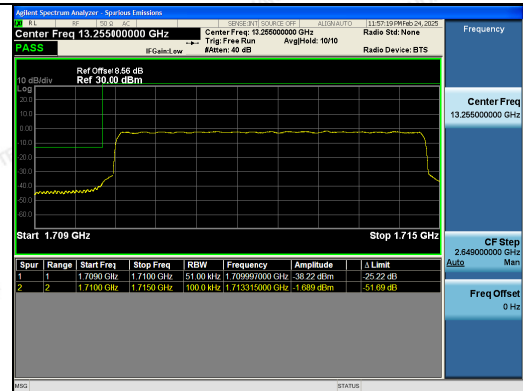

## 25RB#0

## 25RB#0

## Low Channel

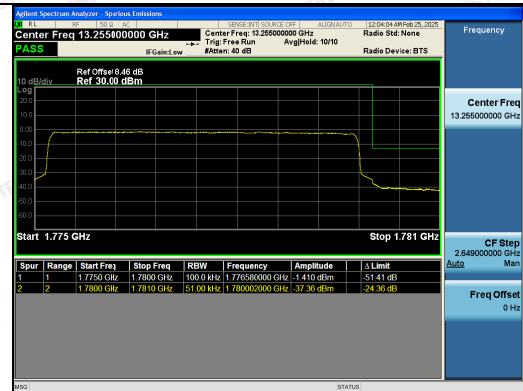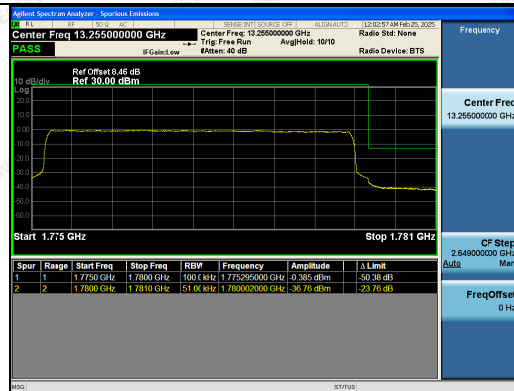

## 25RB#0

## 25RB#0

## High Channel