


Audio ambient light



Datasheet:

Size	75*75*70mm
Power	Lamp: 1.0W ±10% Speaker: 3.2W±10%
Voltage	DC 5V
Color Temperature	3000K/4000K/6000K
Color Rendering Index	Ra>80
Lumen	MAX:100LM±10%
Battery capacity	3000mAh
Working Time	Speaker: 4-5H (80% volume) Lamp: 6-7H
Charging input	5V/2A max
Charging time	2.5-3H
Charging type	Type-C USB
Material	PC+PS
Storage environment	-25°C~+40°C
Bluetooth Distance	2-10M

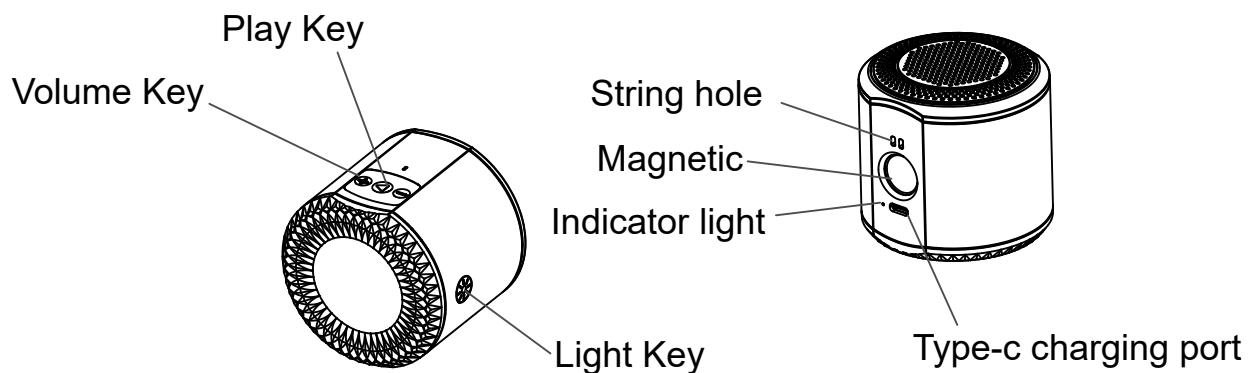

Instruction of the keys:

▷ Play Key:


- 1.Long press to power on or off the speaker.
- 2.While connected, short press to pause/play music or answer/end phone calls.
- 3.Double press to connect or disconnect the device.
- 4.The speaker will enter sleep mode if not connected within 10 minutes.
- 5.If you have two identical speakers, they can be used as left and right channels. Press the key three times on either speaker to connect both speakers simultaneously.

+ - Volume Key:

- 1.Short press to adjust the speaker volume.
- 2.Long press to skip to the previous or next song.

-:O: Light Key:

- 1.Short press to power on and select a light mode: white light, dynamic light, music light, or turn off the light.
- 2.Long press to adjust brightness.
- 3.Double press to turn off the light in any mode, while retaining the memory of the last light mode and brightness setting.

Packaging including		
Picture	Item	Quantity
	Bluetooth speaker lamp	1pc
	Wall installation base	1pc
	Double sided tape	1pc
	Screw	2pcs
	String	1pc
	USB Cable	1pc

Warnings:

1. Please don't put the device into fire or where higher than 60°C temperature,otherwise, it may cause an explosion.
2. Please don't look at the light directly to harm your eyes.
3. Please don't put the device into water or get wet in the rain,or the device will not work anymore.
4. When the brightness of the light goes weaker,please charge in time.
5. Please keep away from flammable and explosive materials when charging, and the charging time should not exceed 12 hours. Try to avoid using while charging as much as possible.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure statement

The device has been evaluatec to mee general RF exposure requirement. The device can be used in portable exposure condition without restriction.