



1. Maximum Peak Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	0.18	0.18	21	Pass
NVNT	1-DH5	2441	Ant1	0.12	0.12	21	Pass
NVNT	1-DH5	2480	Ant1	-0.05	-0.05	21	Pass
NVNT	2-DH5	2402	Ant1	0.96	0.96	21	Pass
NVNT	2-DH5	2441	Ant1	0.84	0.84	21	Pass
NVNT	2-DH5	2480	Ant1	0.62	0.62	21	Pass
NVNT	3-DH5	2402	Ant1	1.03	1.03	21	Pass
NVNT	3-DH5	2441	Ant1	1	1	21	Pass
NVNT	3-DH5	2480	Ant1	0.95	0.95	21	Pass

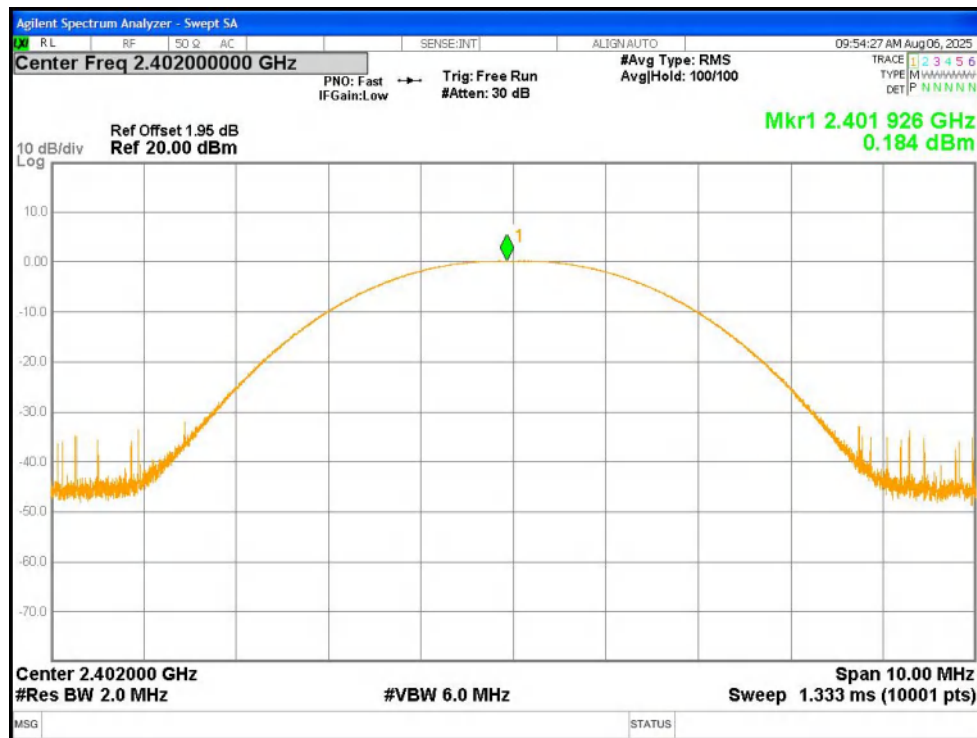


Peak Power NVNT 1-DH5 2402MHz Ant1

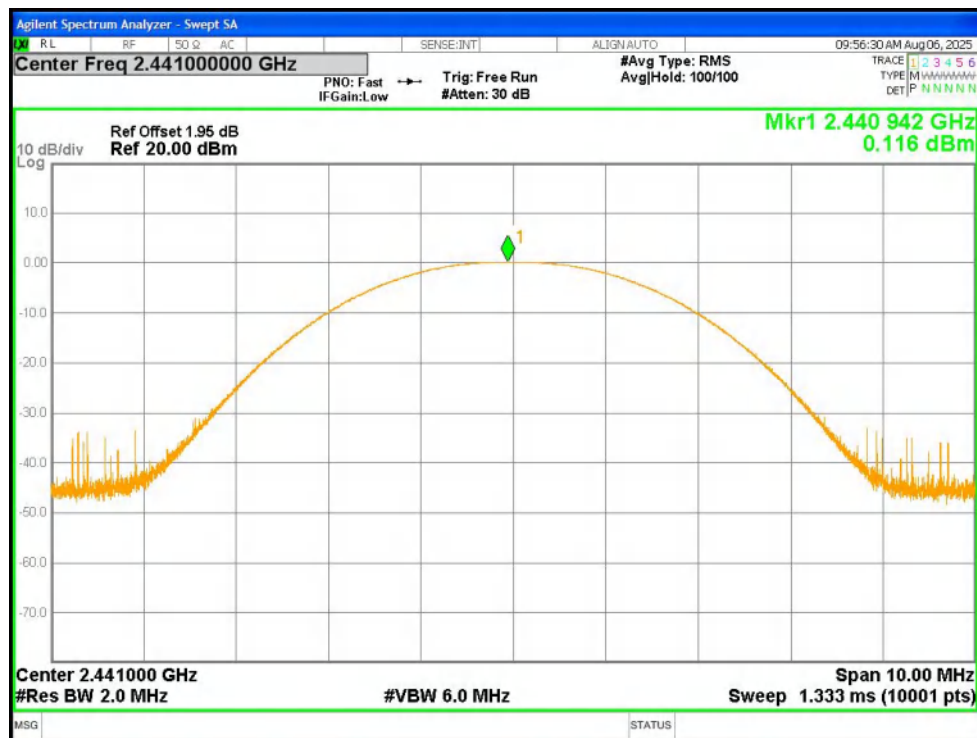


Peak Power NVNT 1-DH5 2441MHz Ant1

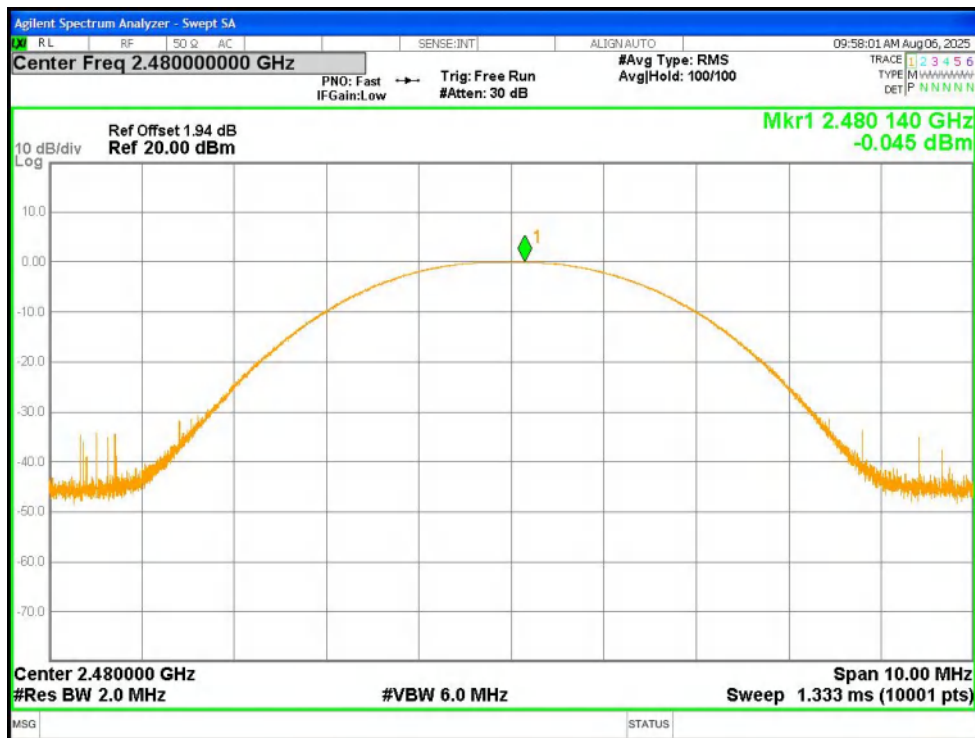


Peak Power NVNT 1-DH5 2480MHz Ant1

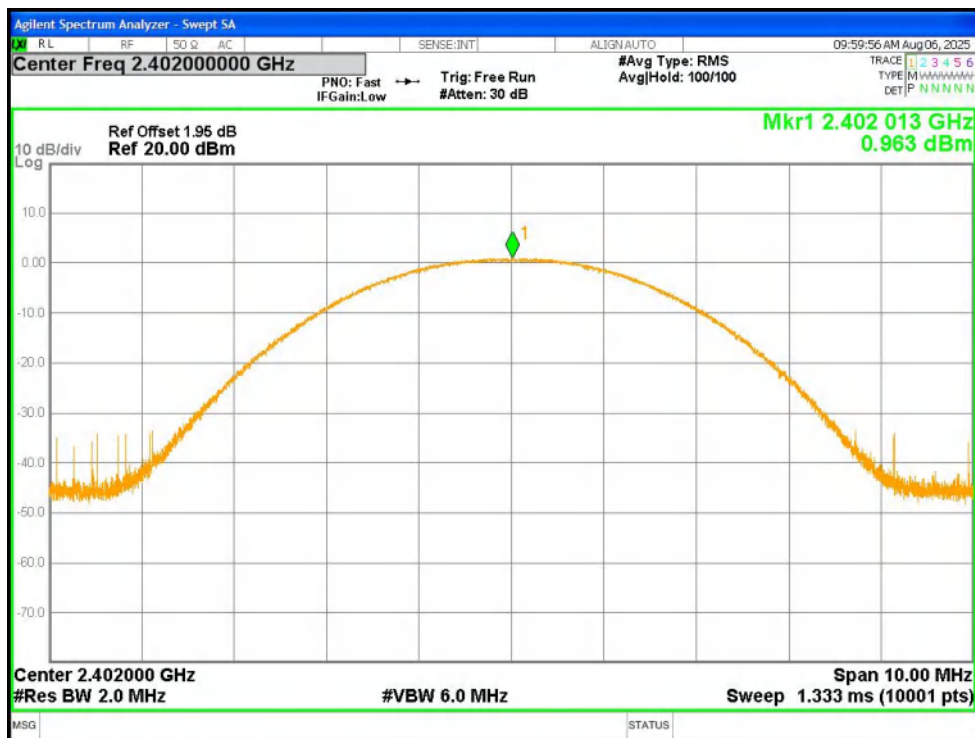


Peak Power NVNT 2-DH5 2402MHz Ant1

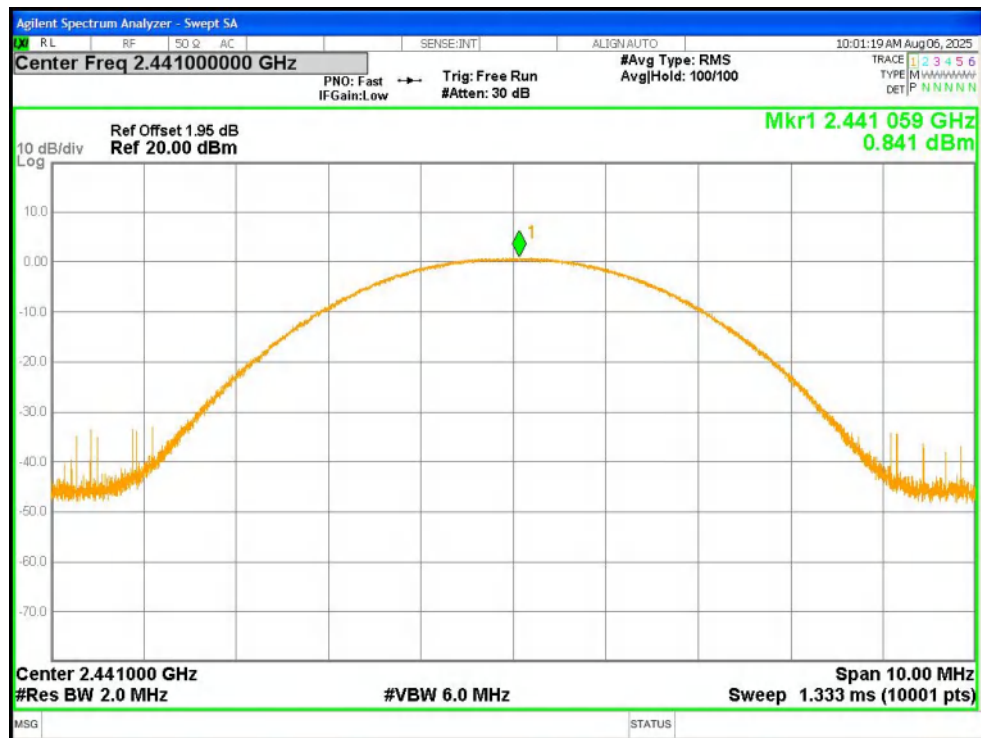


Peak Power NVNT 2-DH5 2441MHz Ant1

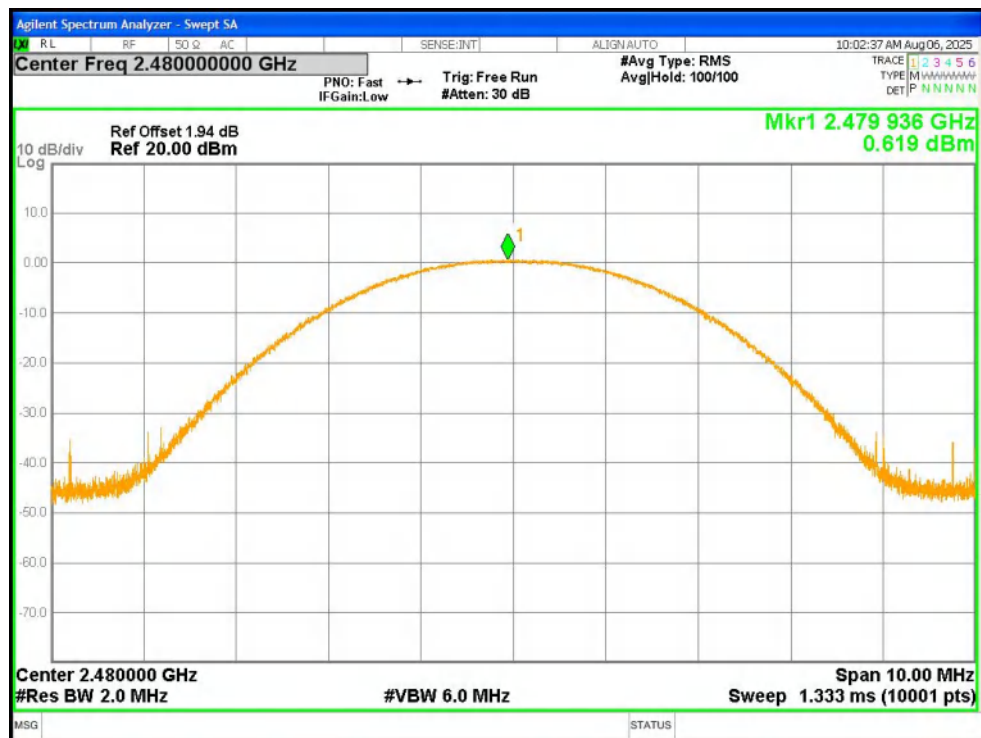


Peak Power NVNT 2-DH5 2480MHz Ant1

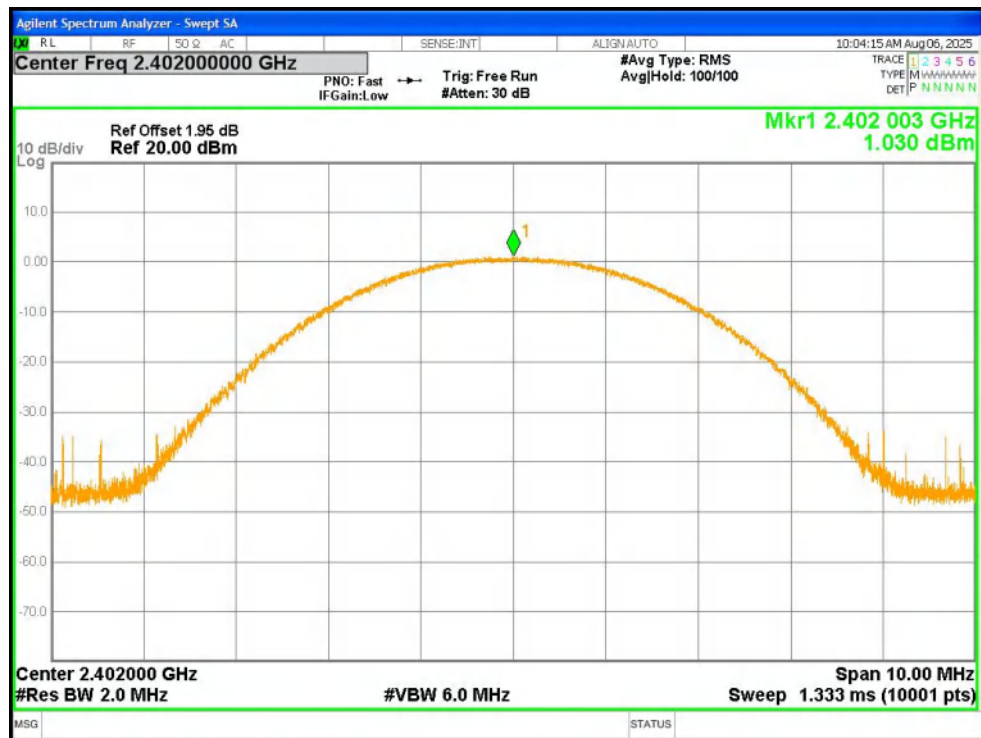

Peak Power NVNT 3-DH5 2402MHz Ant1

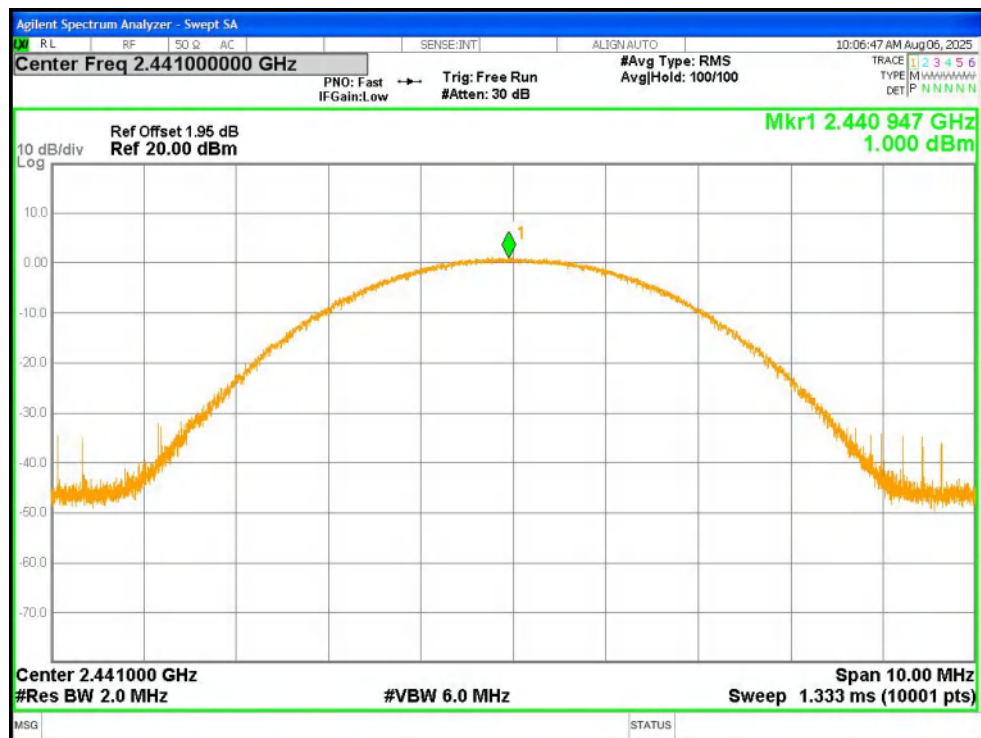


Peak Power NVNT 3-DH5 2441MHz Ant1

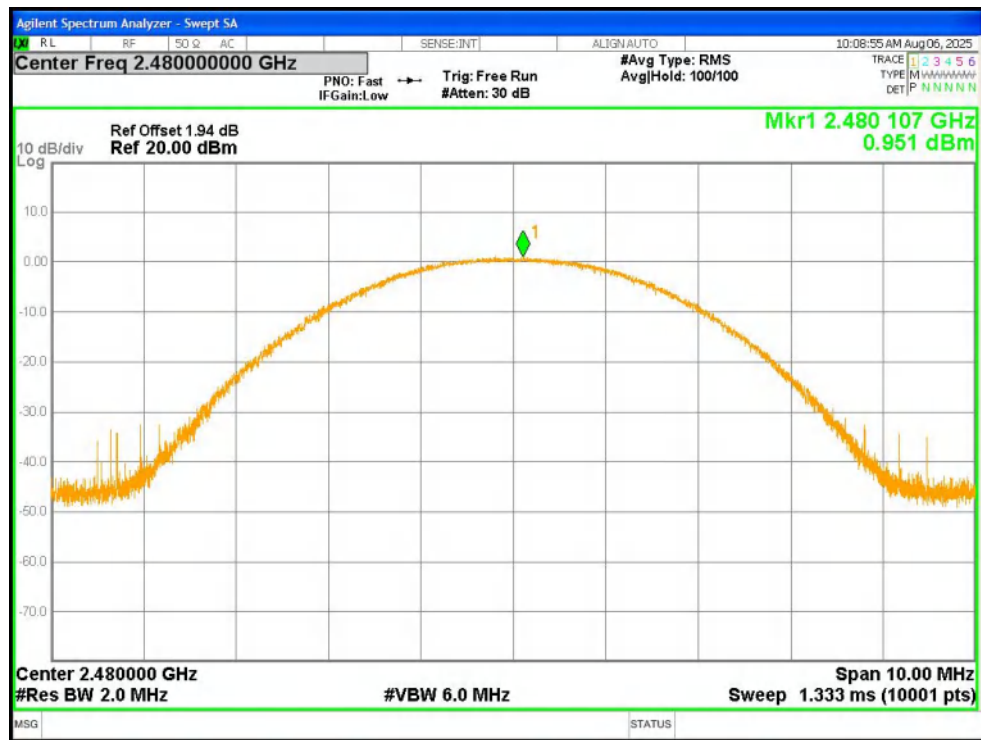


Peak Power NVNT 3-DH5 2480MHz Ant1

2. -20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	0.947	N/A	Pass
NVNT	1-DH5	2441	Ant1	0.955	N/A	Pass
NVNT	1-DH5	2480	Ant1	0.976	N/A	Pass
NVNT	2-DH5	2402	Ant1	1.312	N/A	Pass
NVNT	2-DH5	2441	Ant1	1.274	N/A	Pass
NVNT	2-DH5	2480	Ant1	1.283	N/A	Pass
NVNT	3-DH5	2402	Ant1	1.269	N/A	Pass
NVNT	3-DH5	2441	Ant1	1.265	N/A	Pass
NVNT	3-DH5	2480	Ant1	1.248	N/A	Pass

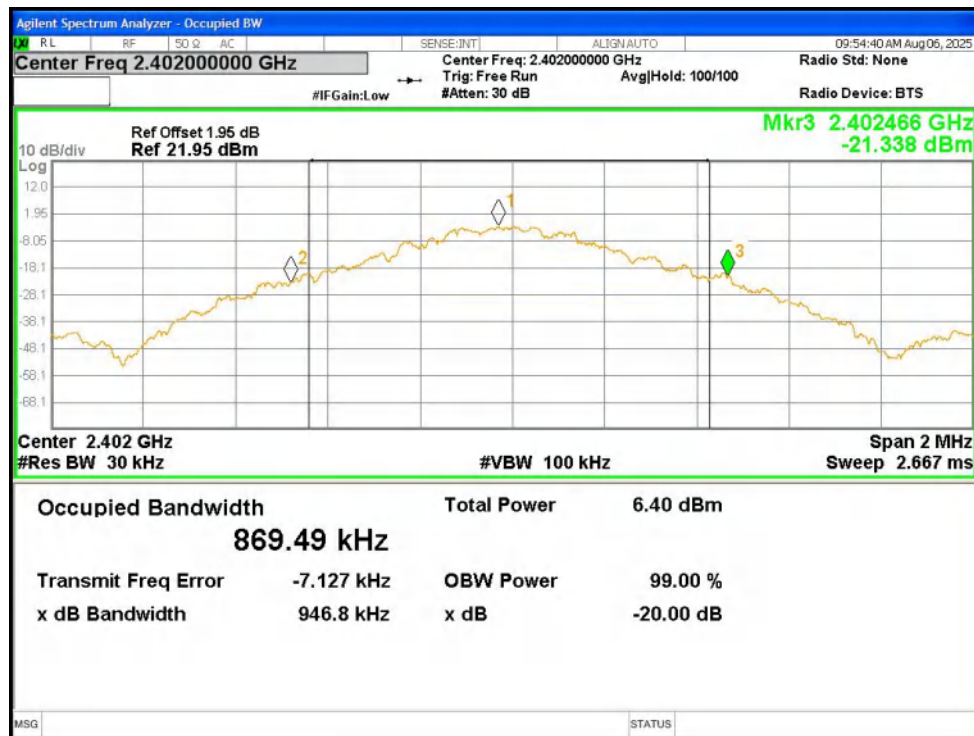


-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

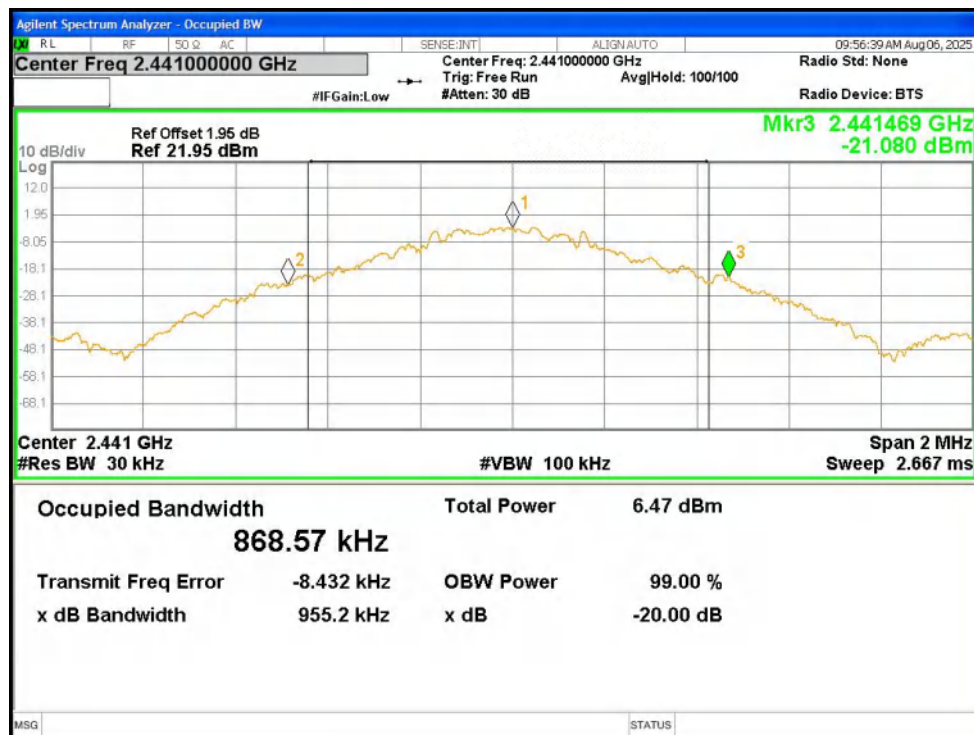


-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

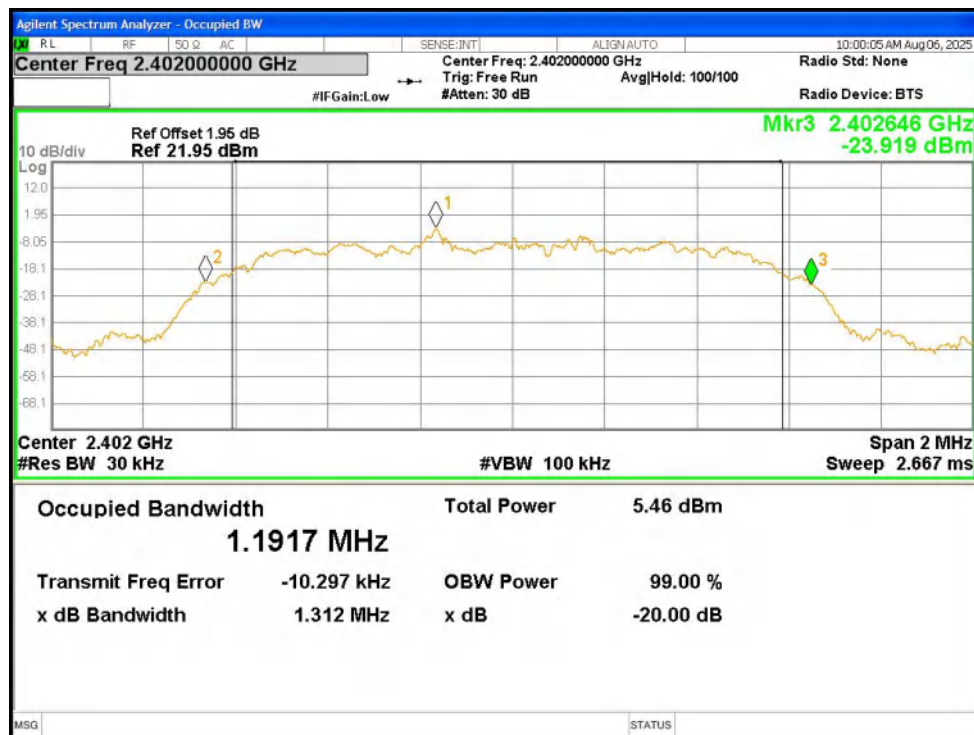


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

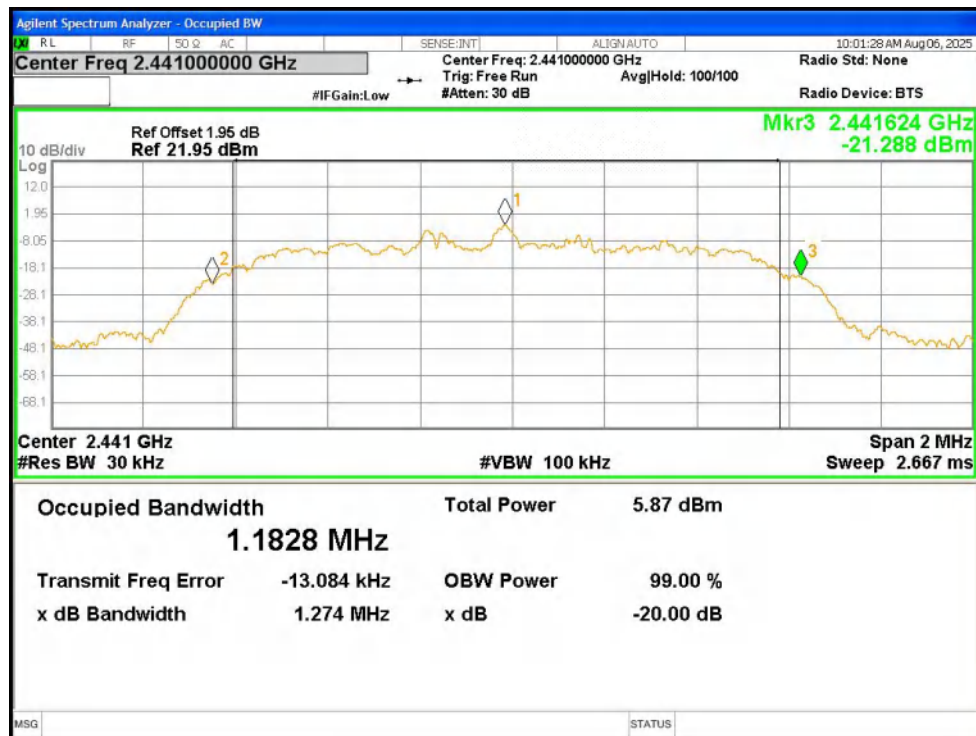


-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

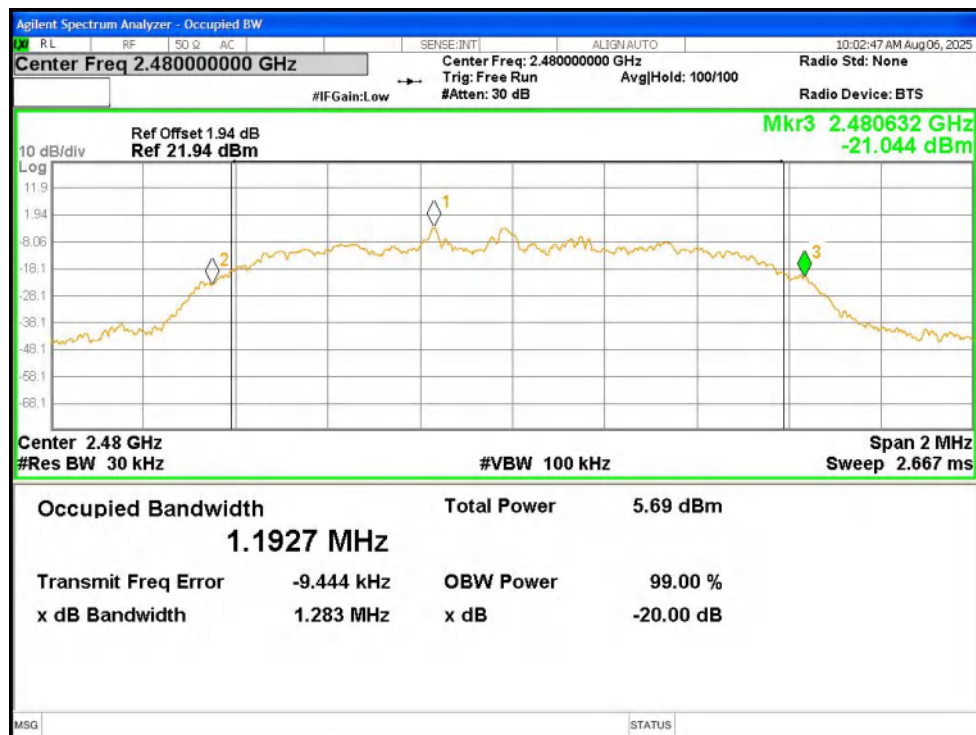


-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1

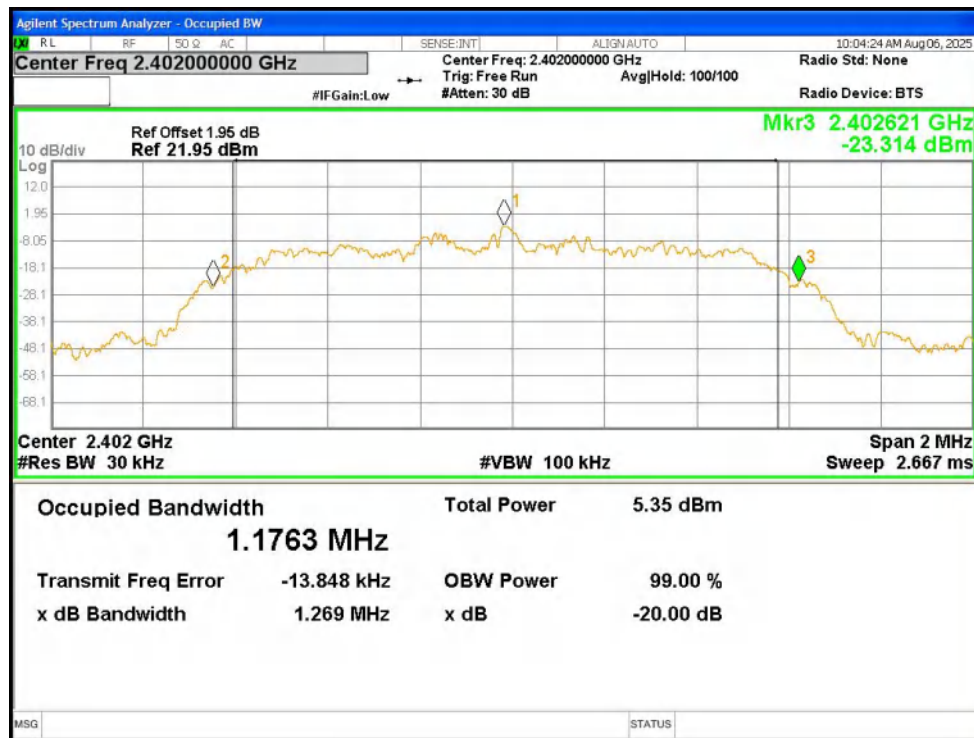

-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

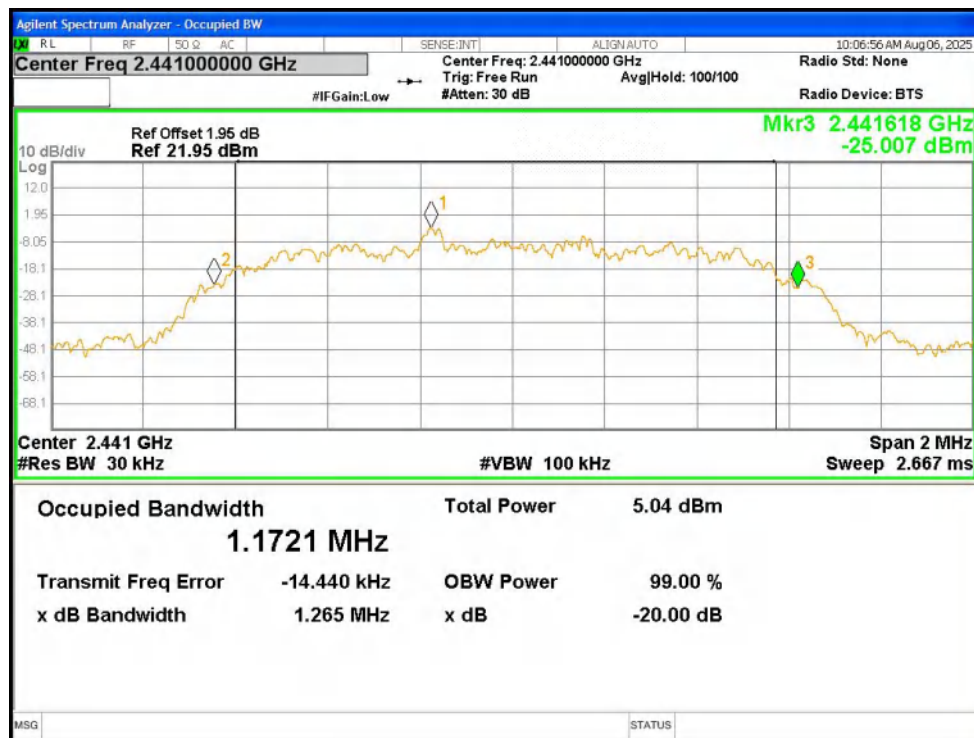

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

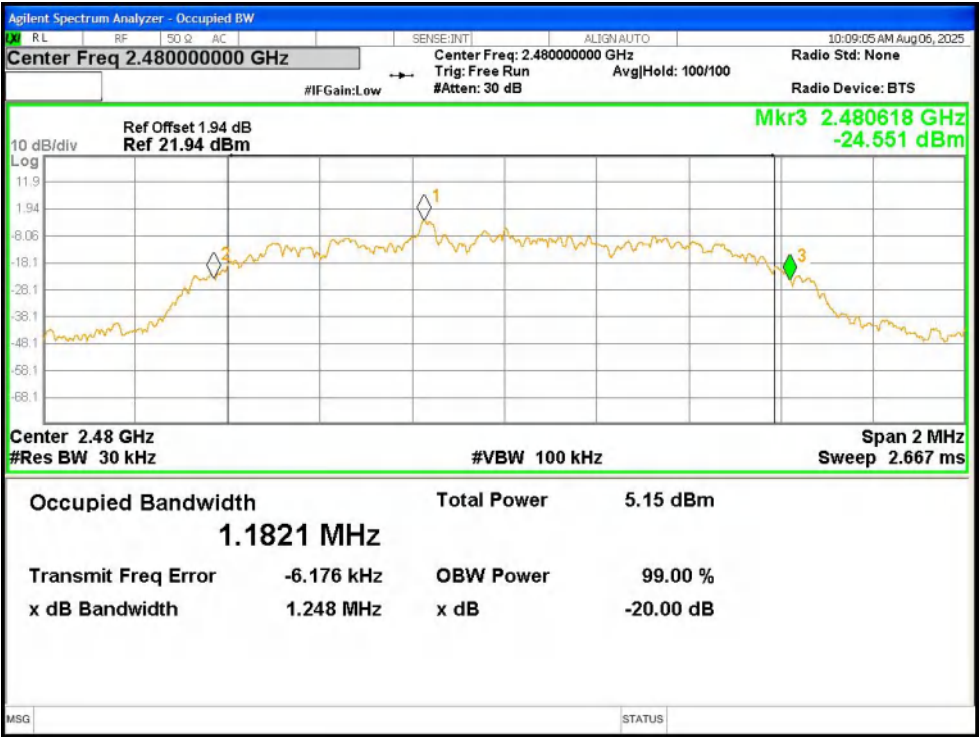

-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

3. Carrier Frequencies Separation

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2401.91	2402.904	0.994	0.631	Pass
NVNT	1-DH5	Ant1	2441	2441.98	0.98	0.637	Pass
NVNT	1-DH5	Ant1	2478.962	2479.986	1.024	0.651	Pass
NVNT	2-DH5	Ant1	2401.986	2403.334	1.348	0.875	Pass
NVNT	2-DH5	Ant1	2440.848	2441.976	1.128	0.849	Pass
NVNT	2-DH5	Ant1	2478.838	2479.83	0.992	0.855	Pass
NVNT	3-DH5	Ant1	2401.97	2402.836	0.866	0.846	Pass
NVNT	3-DH5	Ant1	2440.99	2441.986	0.996	0.843	Pass
NVNT	3-DH5	Ant1	2478.998	2479.988	0.99	0.832	Pass

Note: For conducted power less than 0.125 W, the limit can be set using hopping channel carrier frequencies that are separated by 25 kHz or two thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.




CFS NVNT 1-DH5 2402MHz Ant1




CFS NVNT 1-DH5 2441MHz Ant1




CFS NVNT 1-DH5 2480MHz Ant1

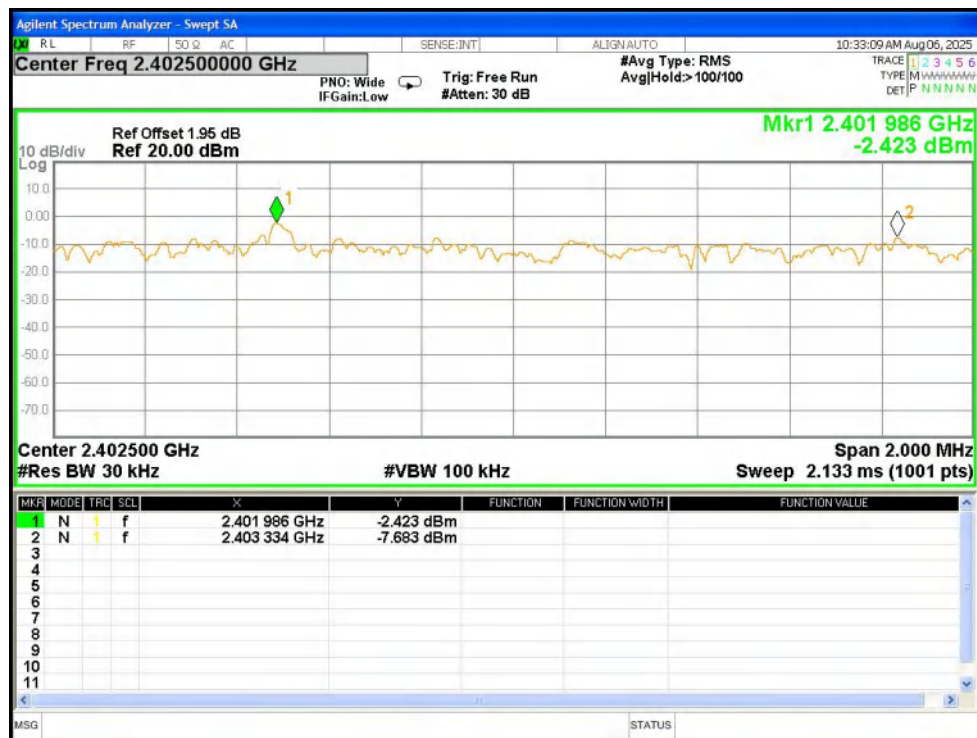


CFS NVNT 2-DH5 2402MHz Ant1

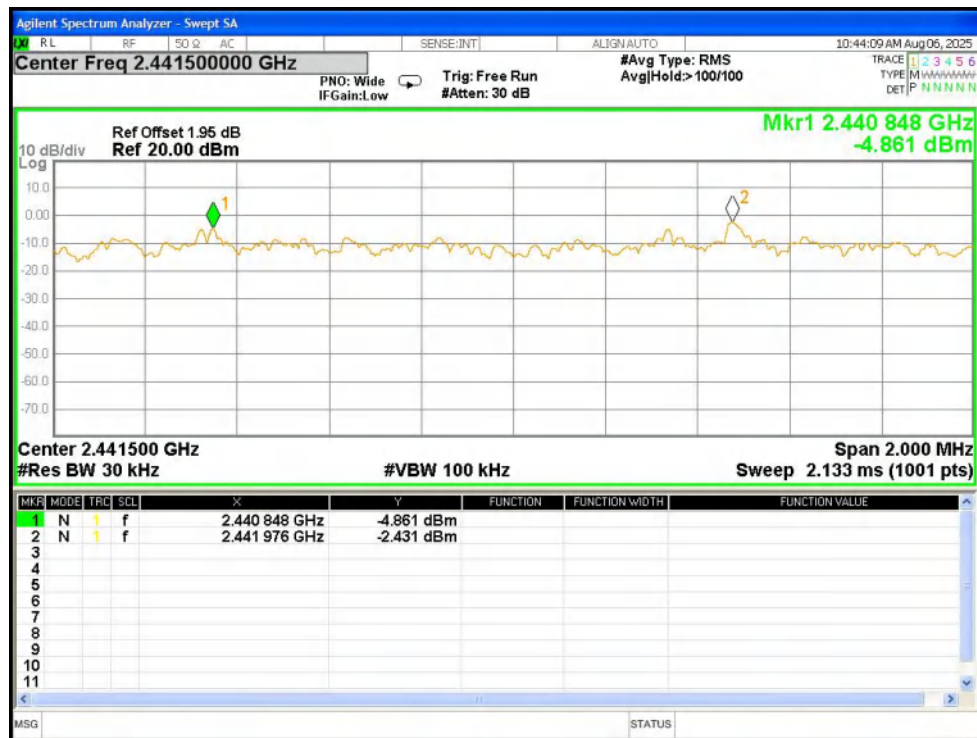


CFS NVNT 2-DH5 2441MHz Ant1

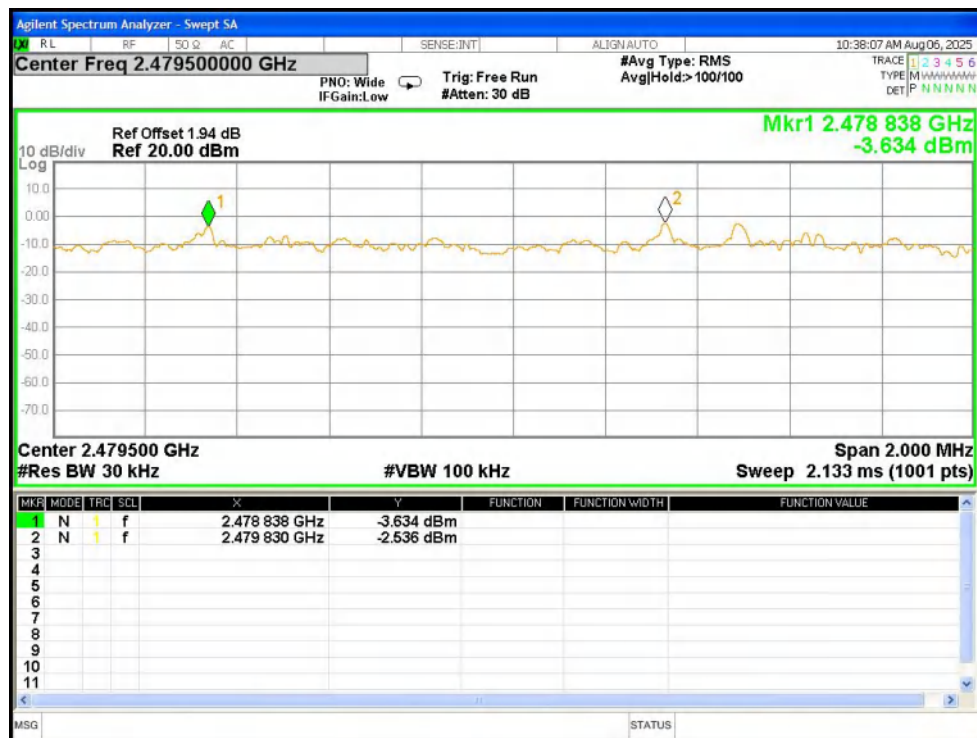


CFS NVNT 2-DH5 2480MHz Ant1

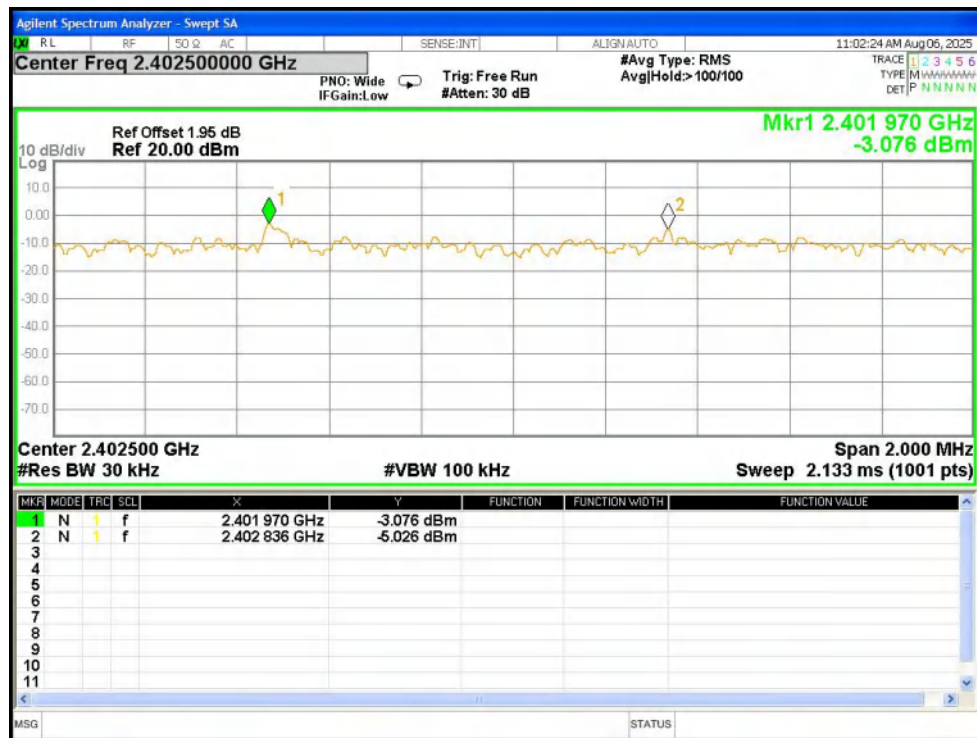

CFS NVNT 3-DH5 2402MHz Ant1

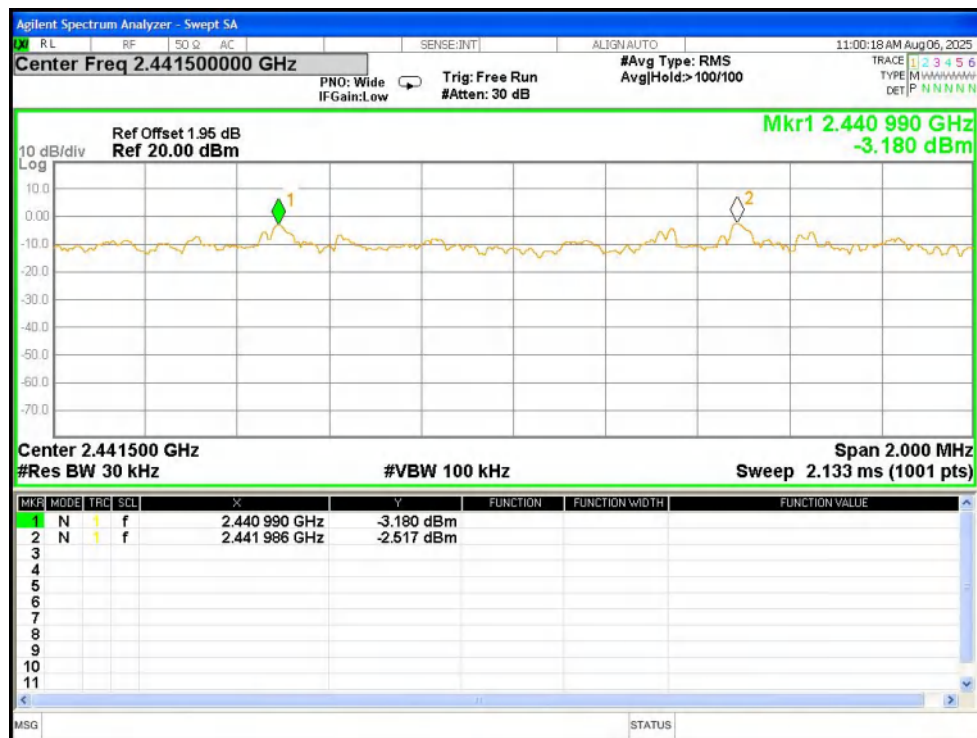


CFS NVNT 3-DH5 2441MHz Ant1

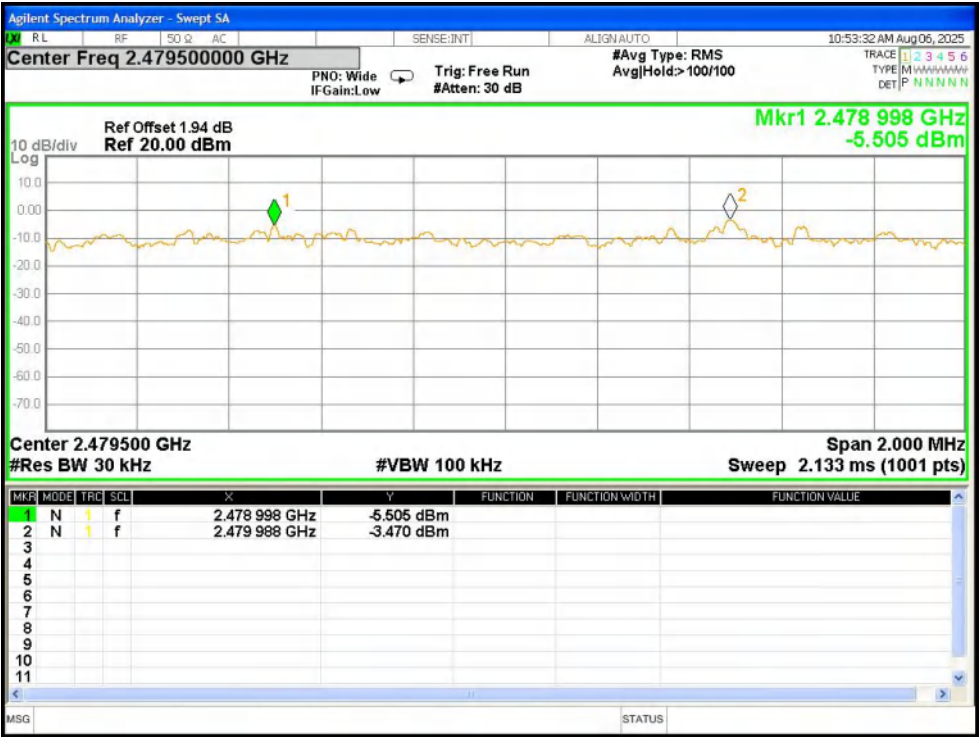


CFS NVNT 3-DH5 2480MHz Ant1

4. Number of Hopping Channel

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass

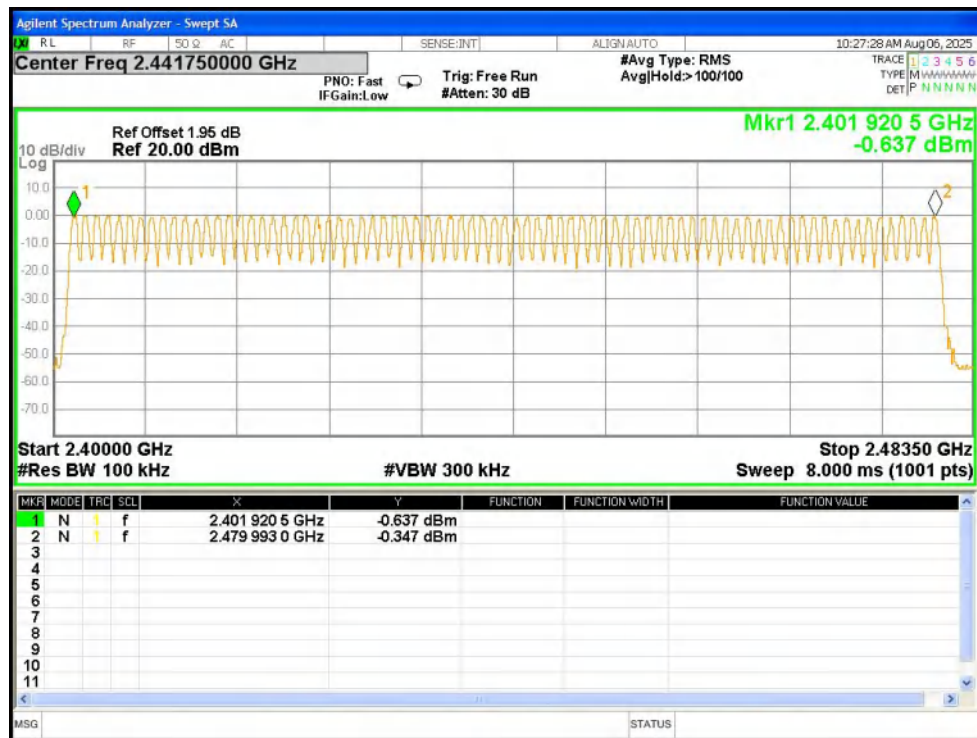

Hopping No. NVNT 1-DH5 2402MHz Ant1

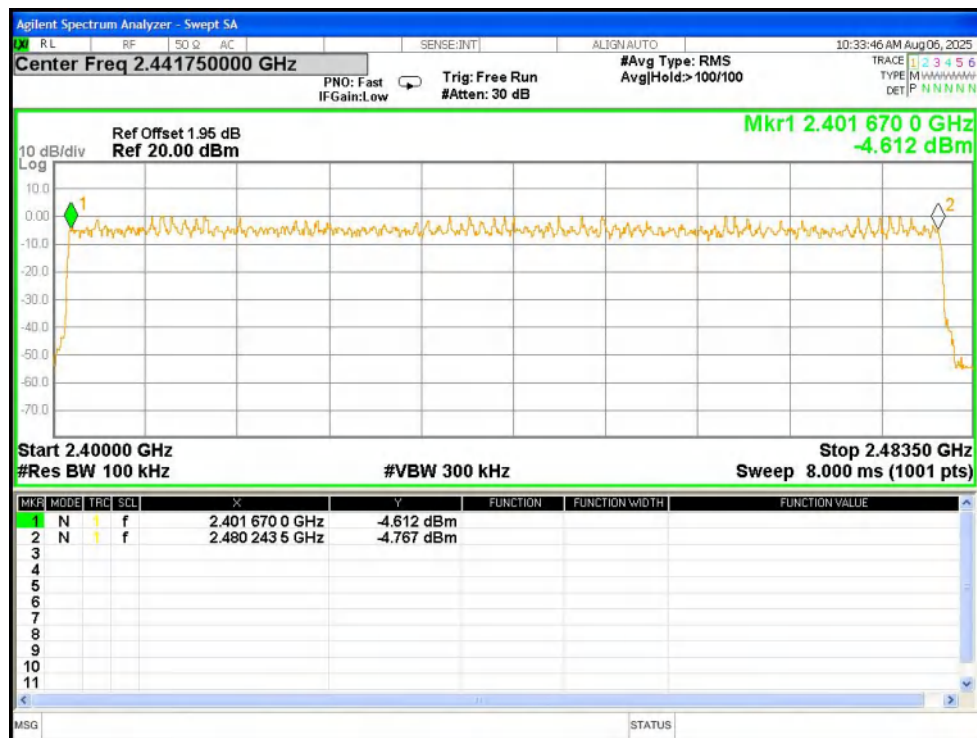


Hopping No. NVNT 2-DH5 2402MHz Ant1



Hopping No. NVNT 3-DH5 2402MHz Ant1

5. Dwell Time


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2441	Ant1	2.887	326.231	113	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.891	297.773	103	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.892	349.932	121	31600	400	Pass

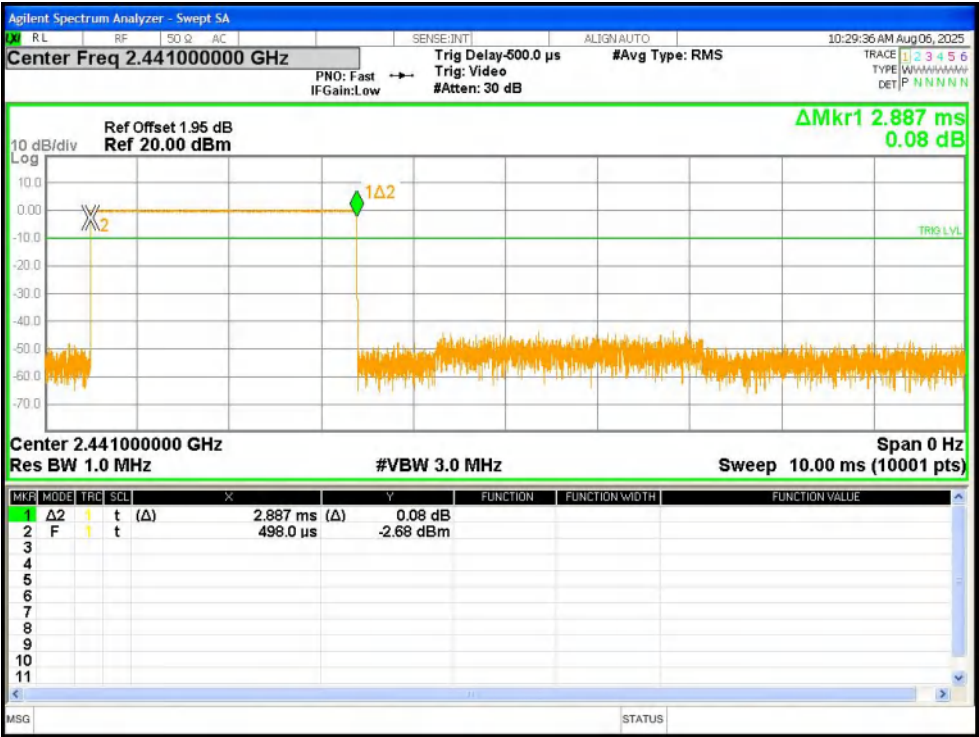

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst




Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

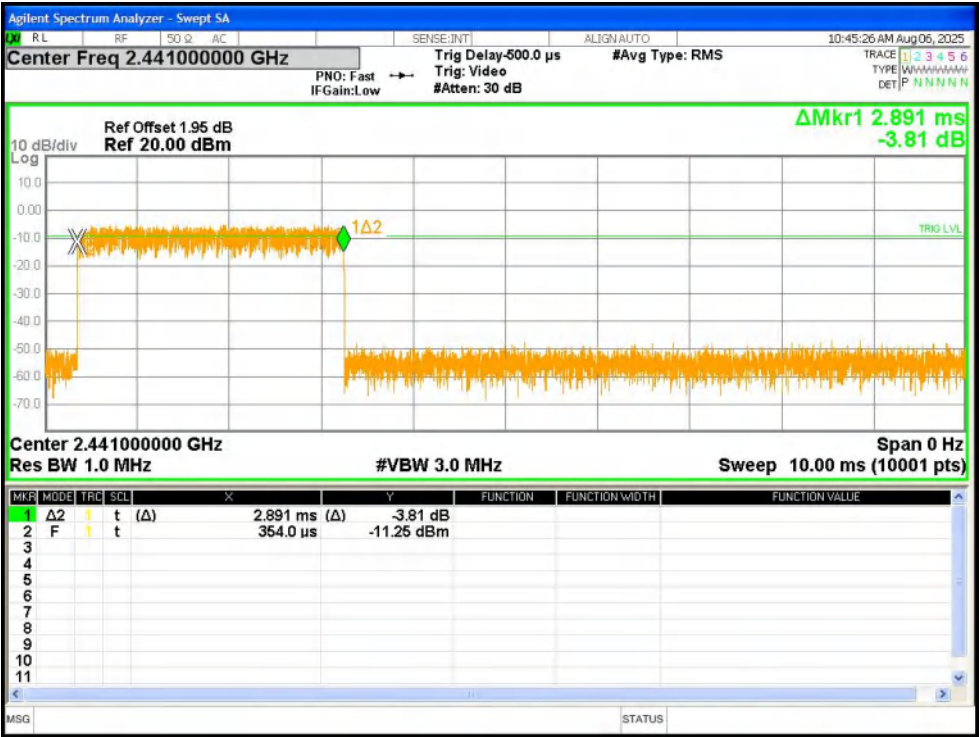

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst



Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

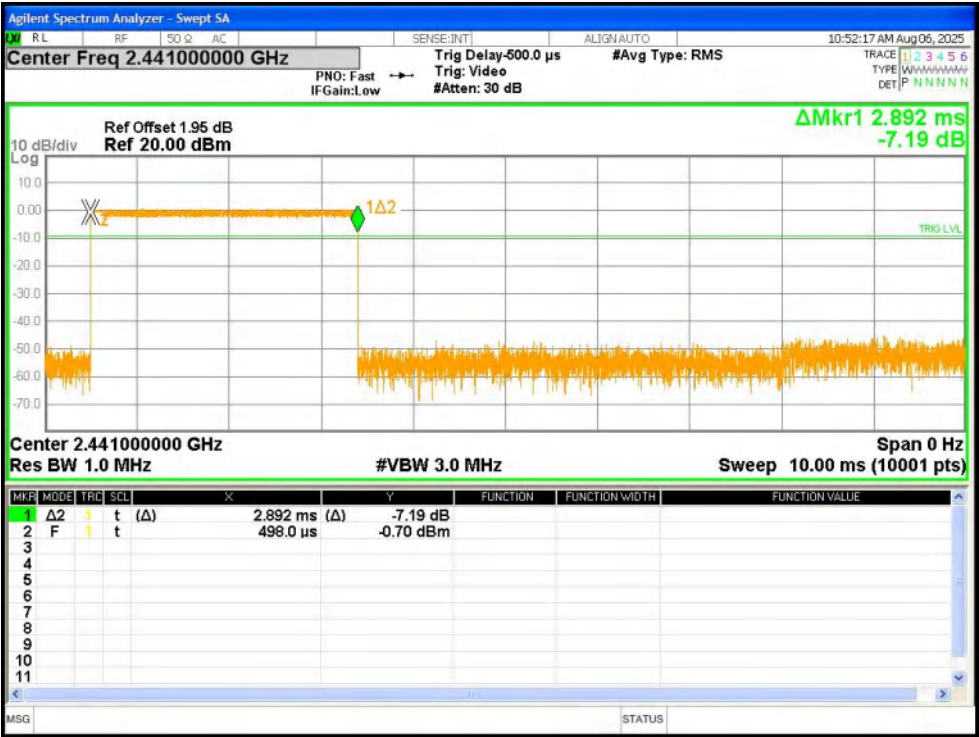


Dwell NVNT 3-DH5 2441MHz Ant1 One Burst




Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-50.11	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-53.25	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-53.89	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-52.02	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-48.59	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-52.75	-20	Pass

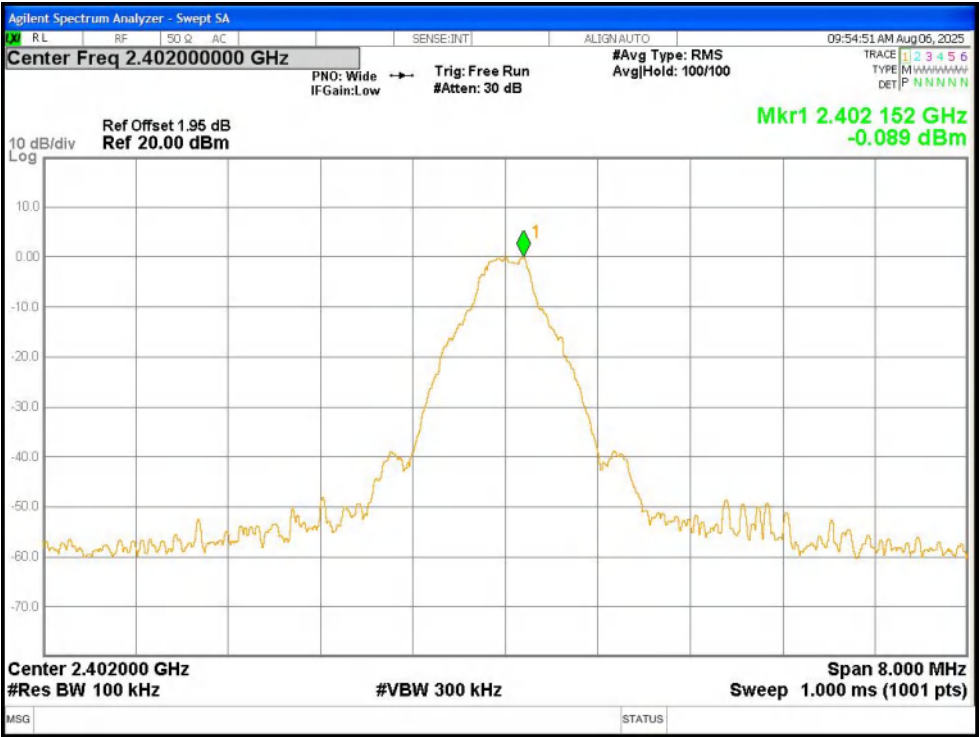


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

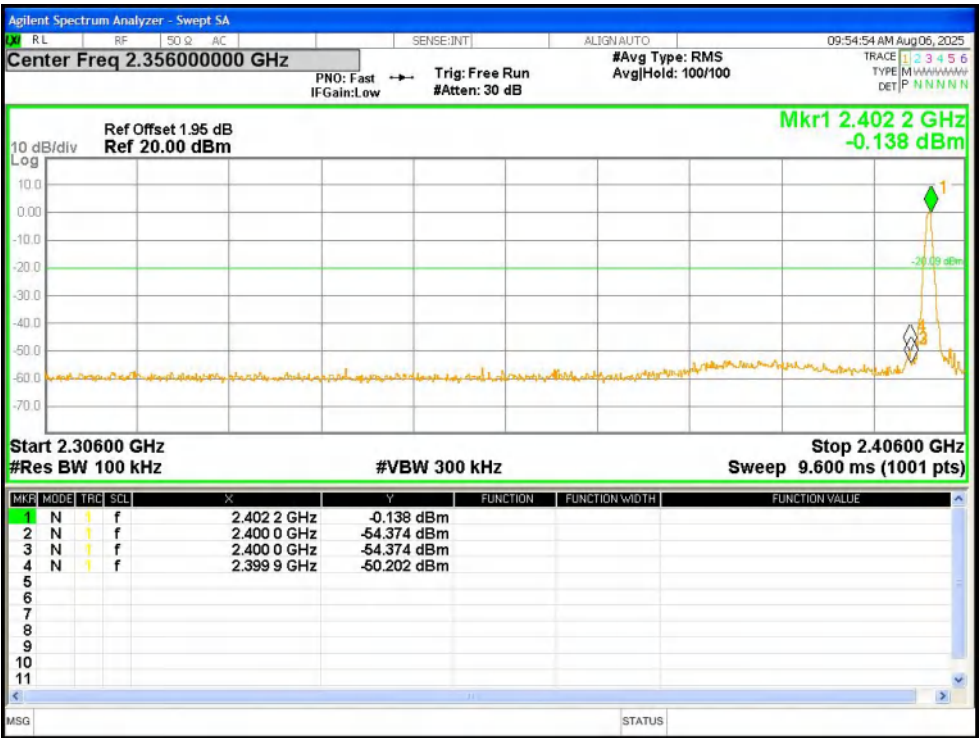


Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission




Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Ref

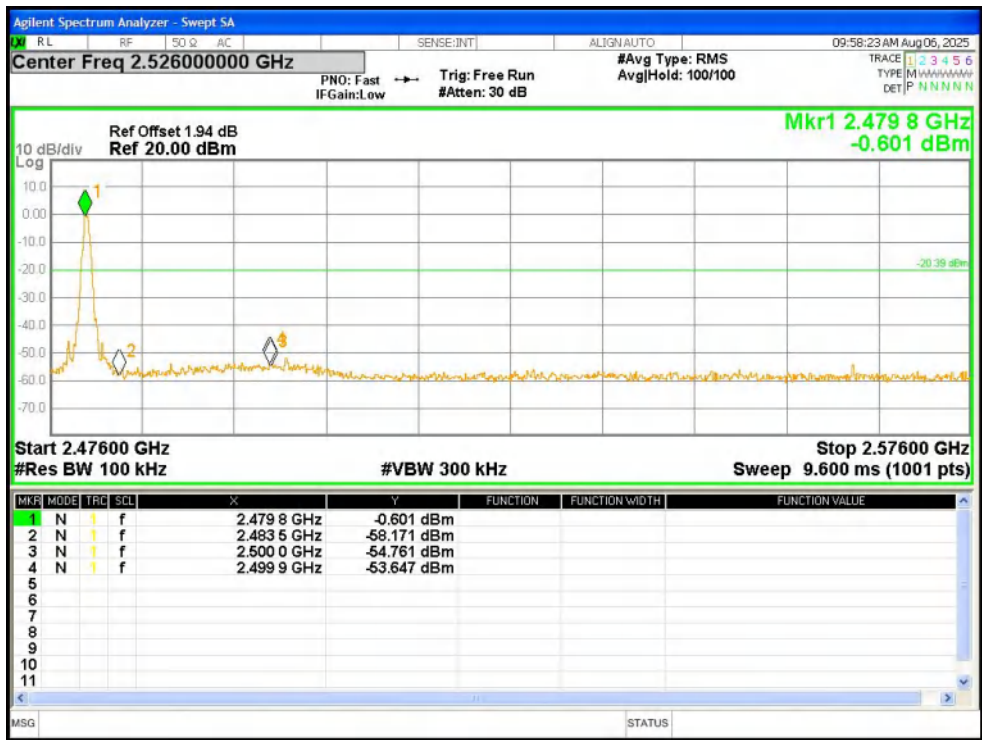

Band Edge NVNT 1-DH5 2480MHz Ant1 No-Hopping Emission

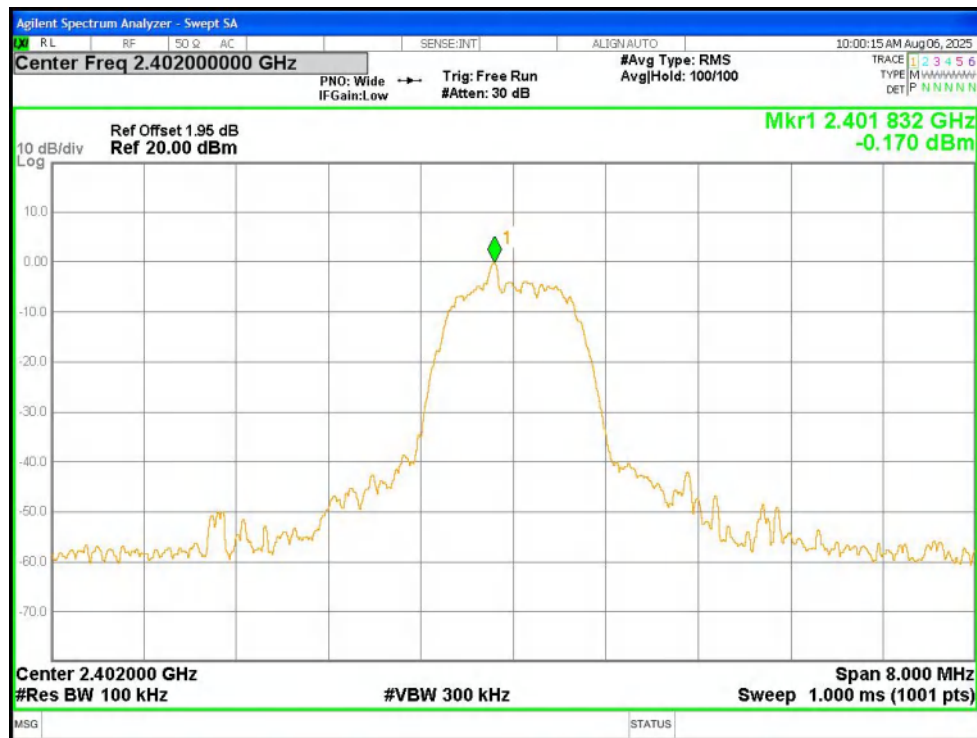


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Ref

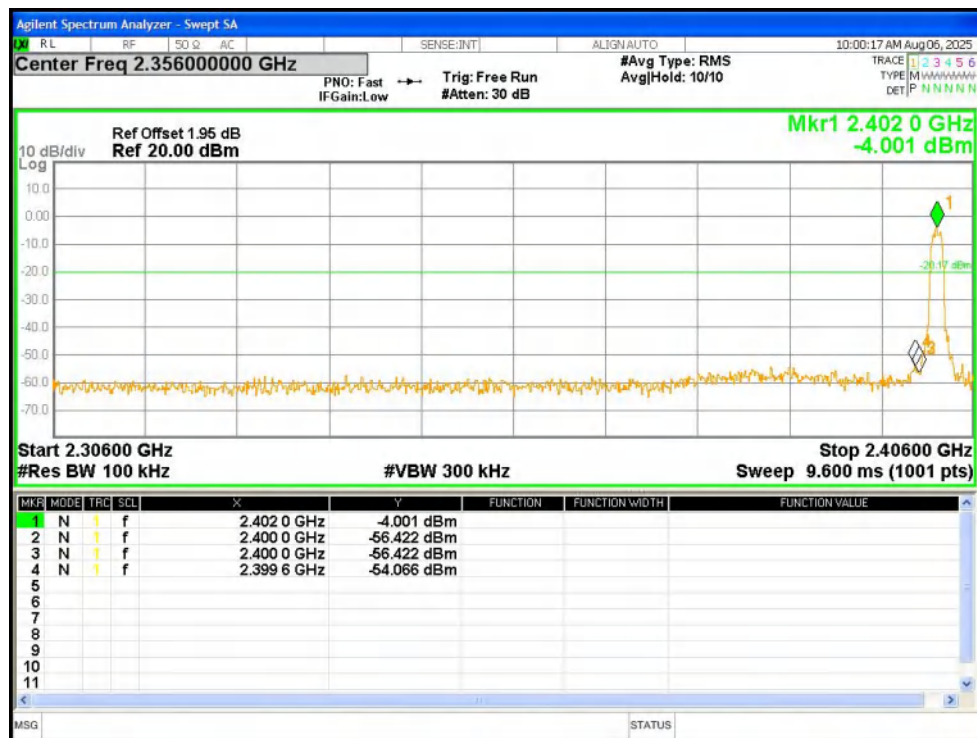


Band Edge NVNT 2-DH5 2402MHz Ant1 No-Hopping Emission




Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Ref

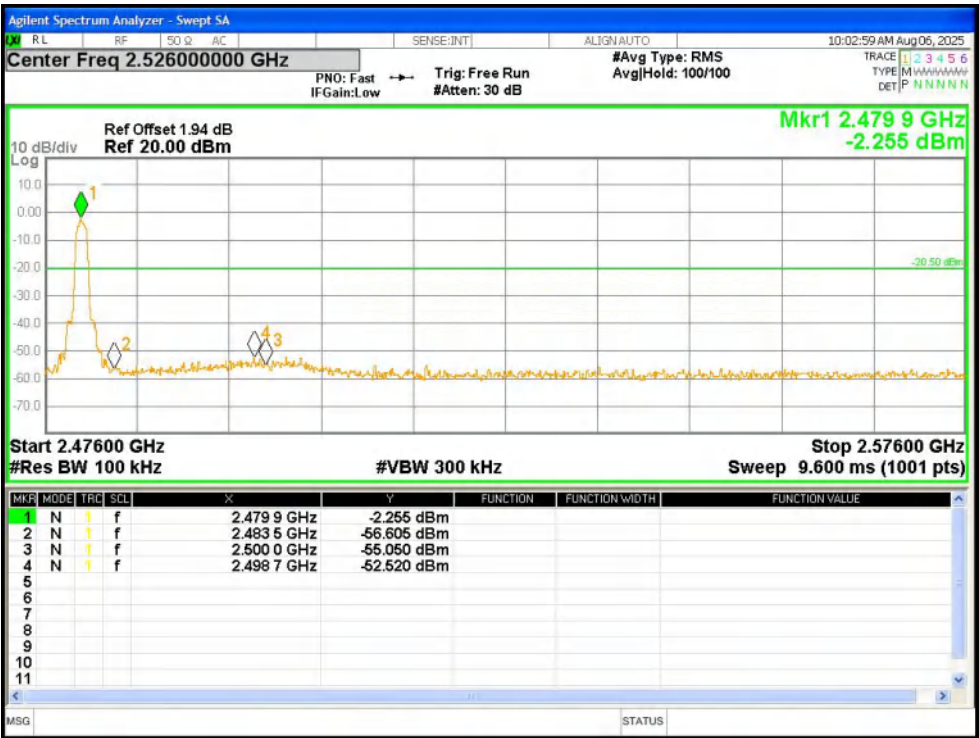


Band Edge NVNT 2-DH5 2480MHz Ant1 No-Hopping Emission

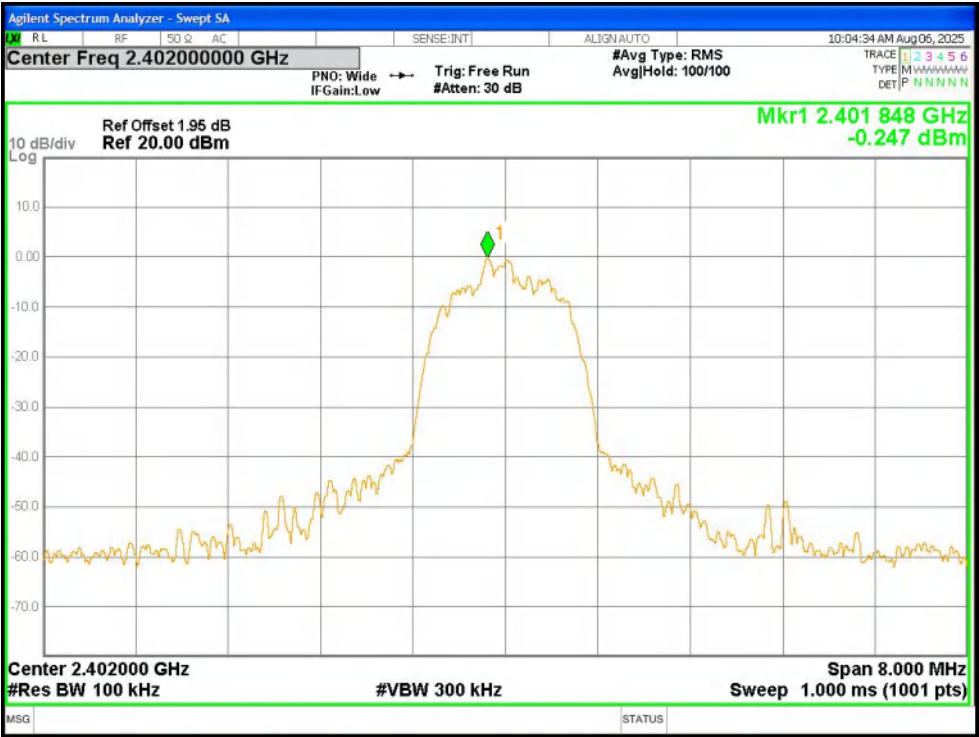


Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Ref

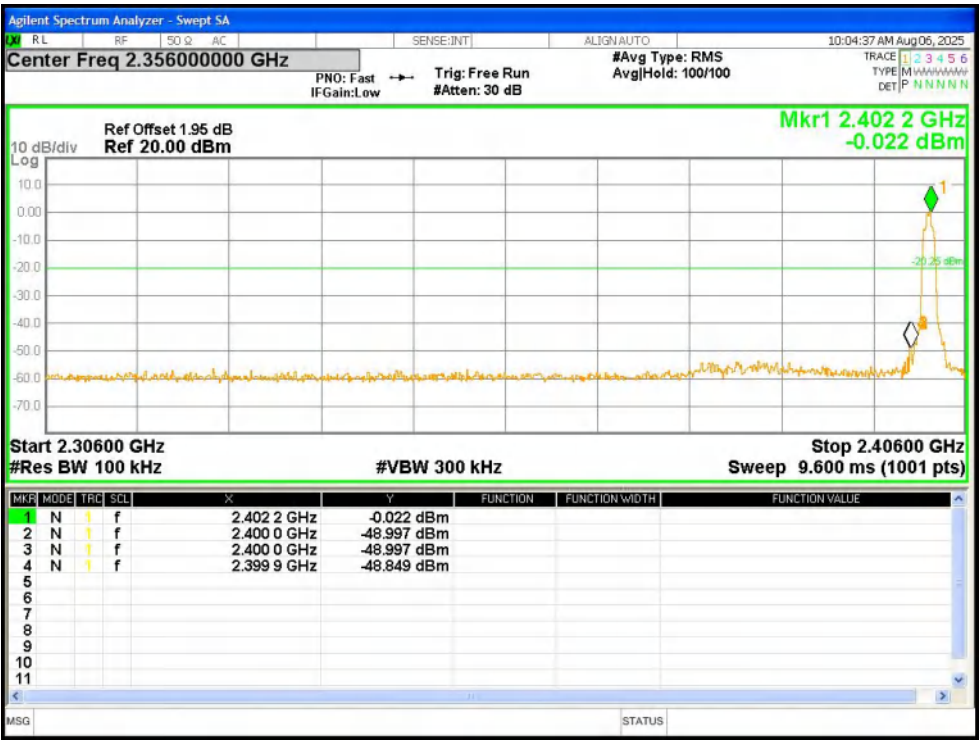

Band Edge NVNT 3-DH5 2402MHz Ant1 No-Hopping Emission

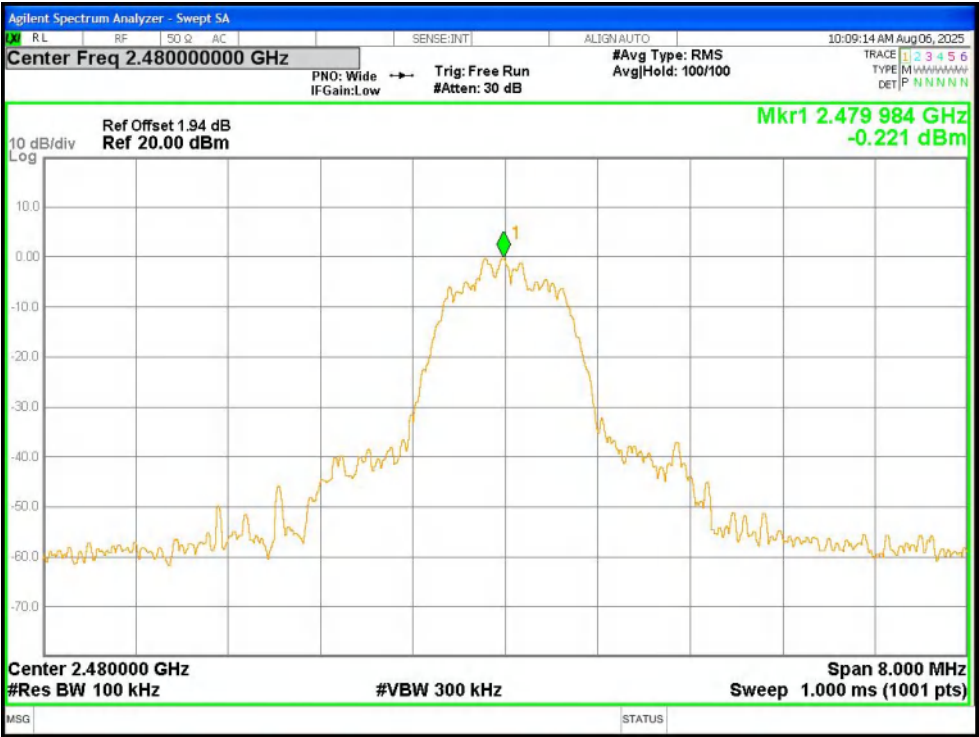

Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Ref

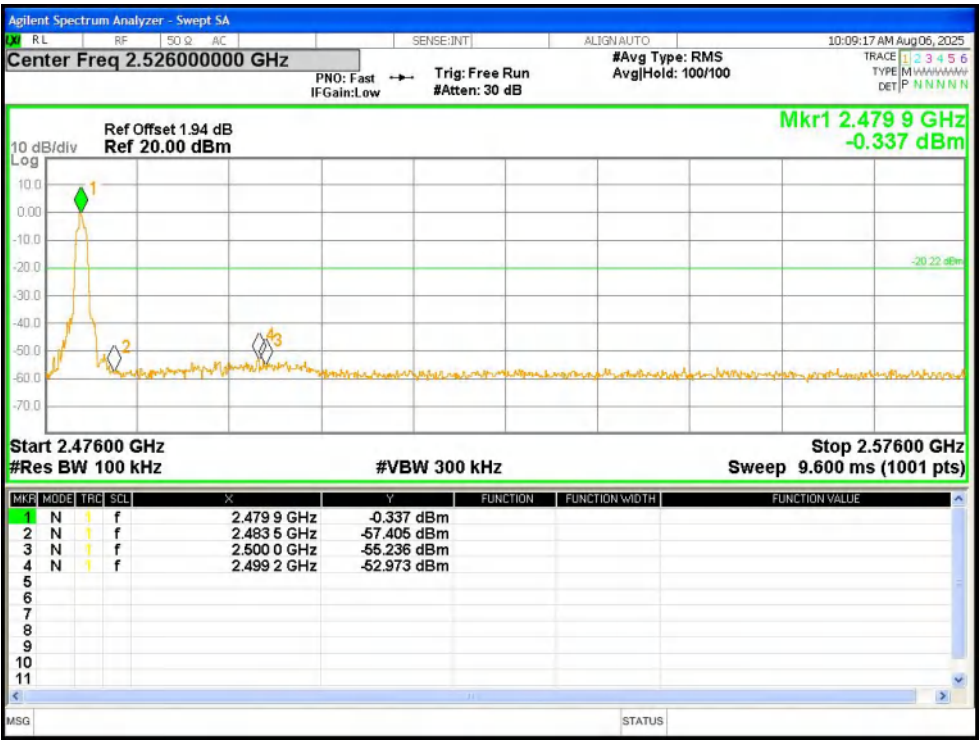


Band Edge NVNT 3-DH5 2480MHz Ant1 No-Hopping Emission

7. Band Edge(Hopping)


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-52.61	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-52.73	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-52.67	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-51.58	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-52.45	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-50.61	-20	Pass




Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref

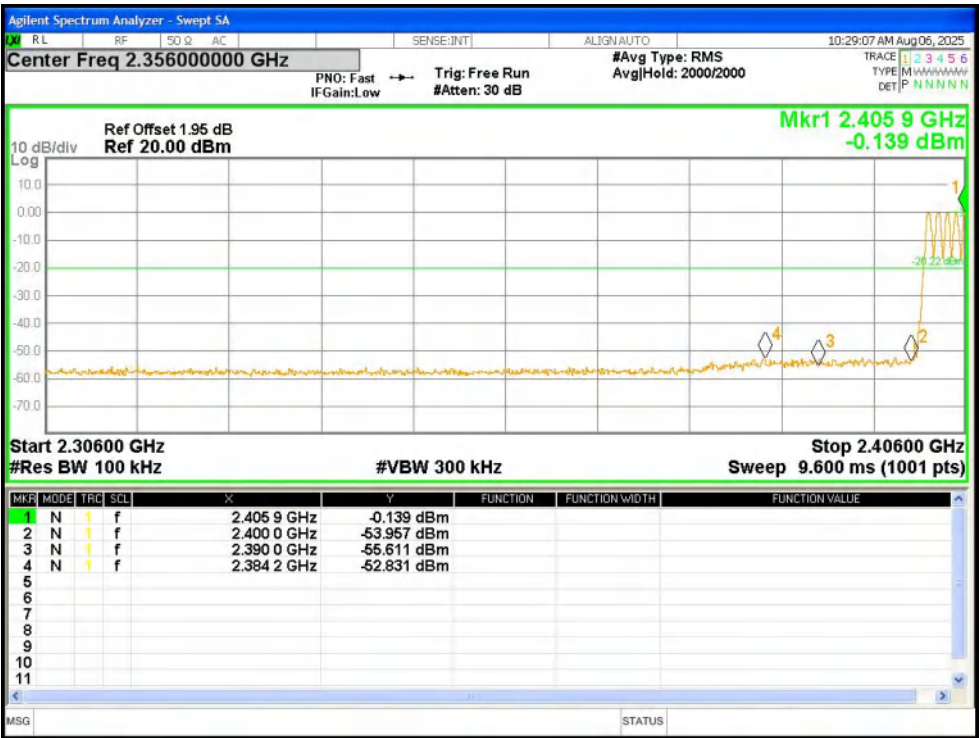

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

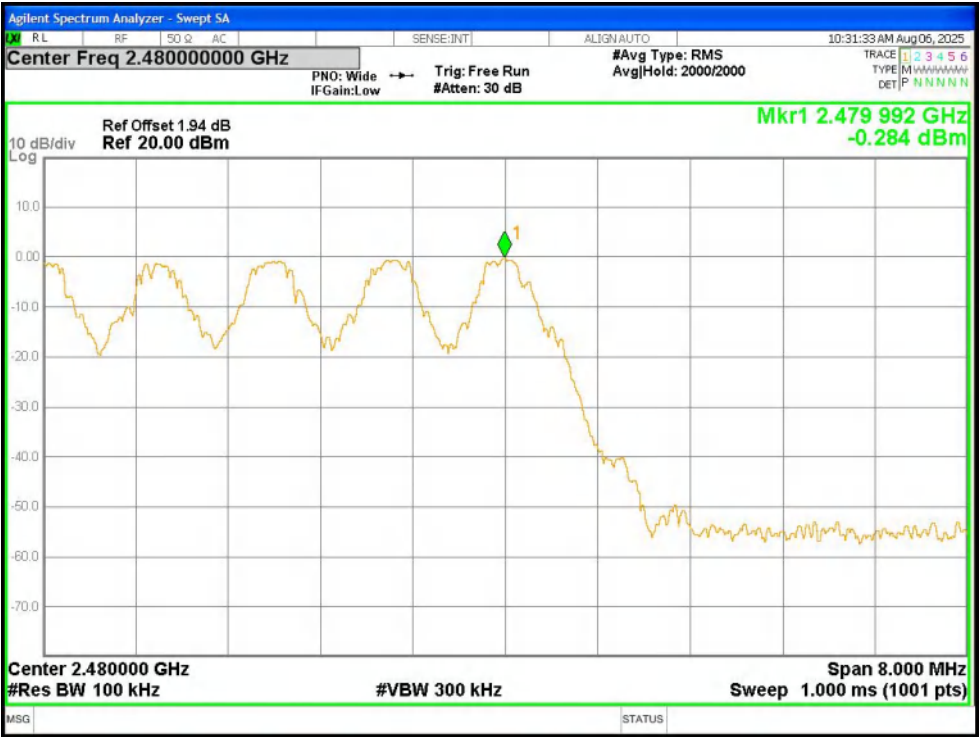


Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Ref

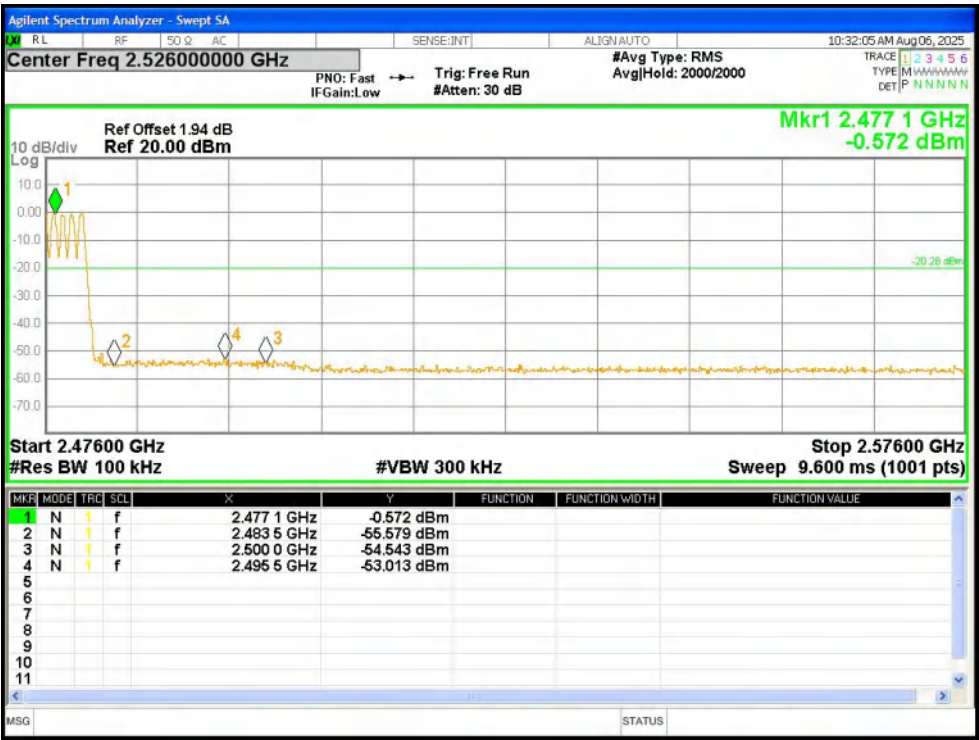

Band Edge(Hopping) NVNT 1-DH5 2480MHz Ant1 Hopping Emission




Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Ref

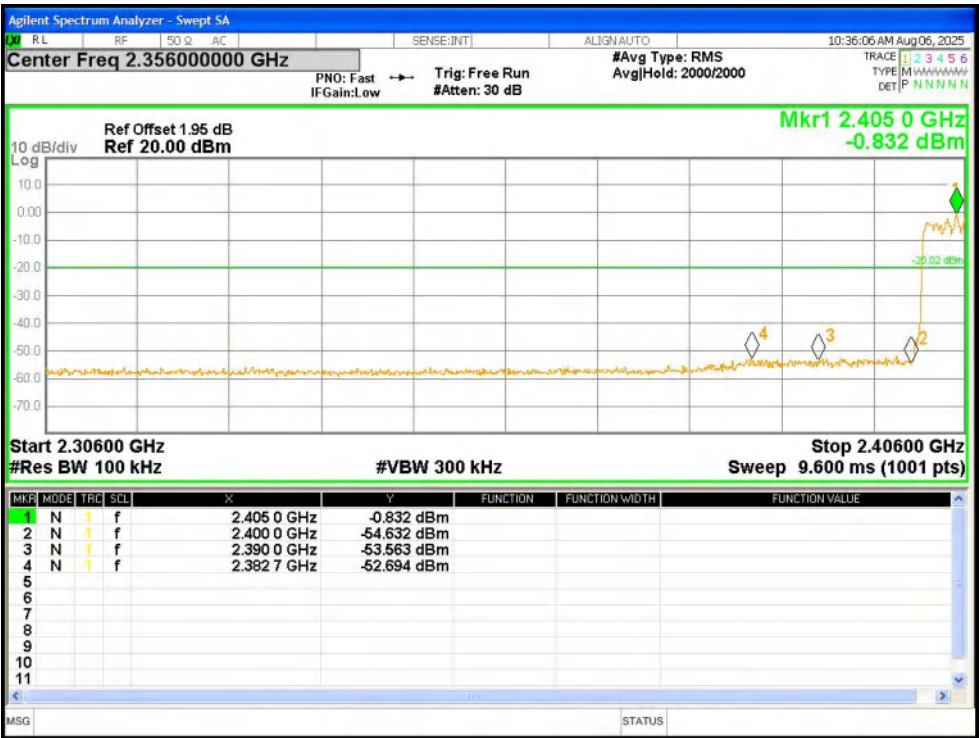

Band Edge(Hopping) NVNT 2-DH5 2402MHz Ant1 Hopping Emission




Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Ref

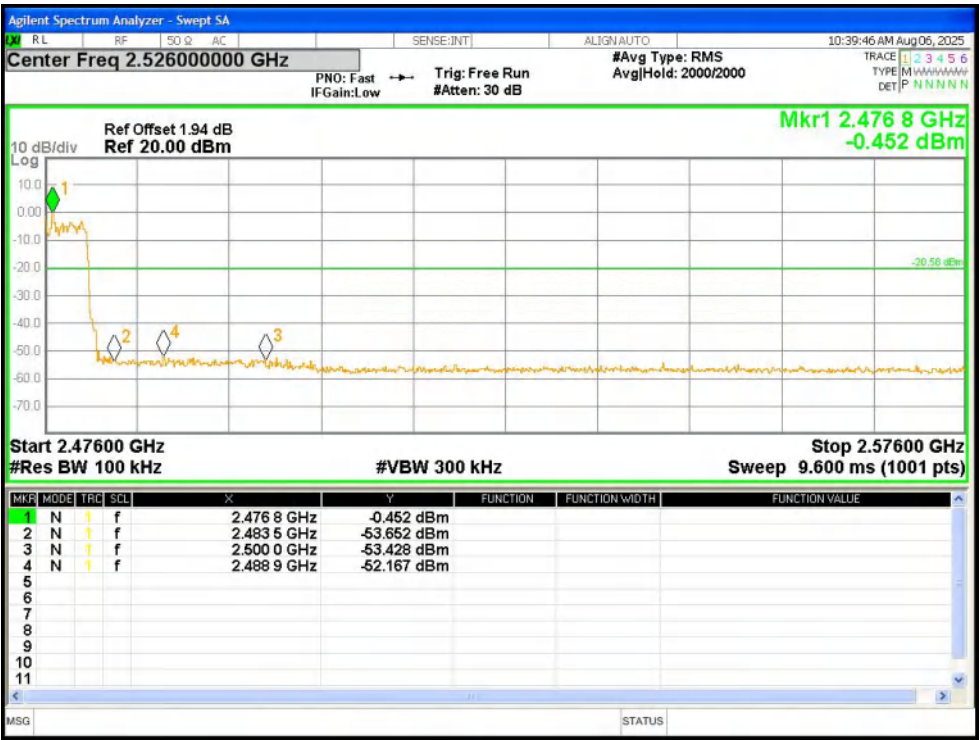

Band Edge(Hopping) NVNT 2-DH5 2480MHz Ant1 Hopping Emission




Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Ref

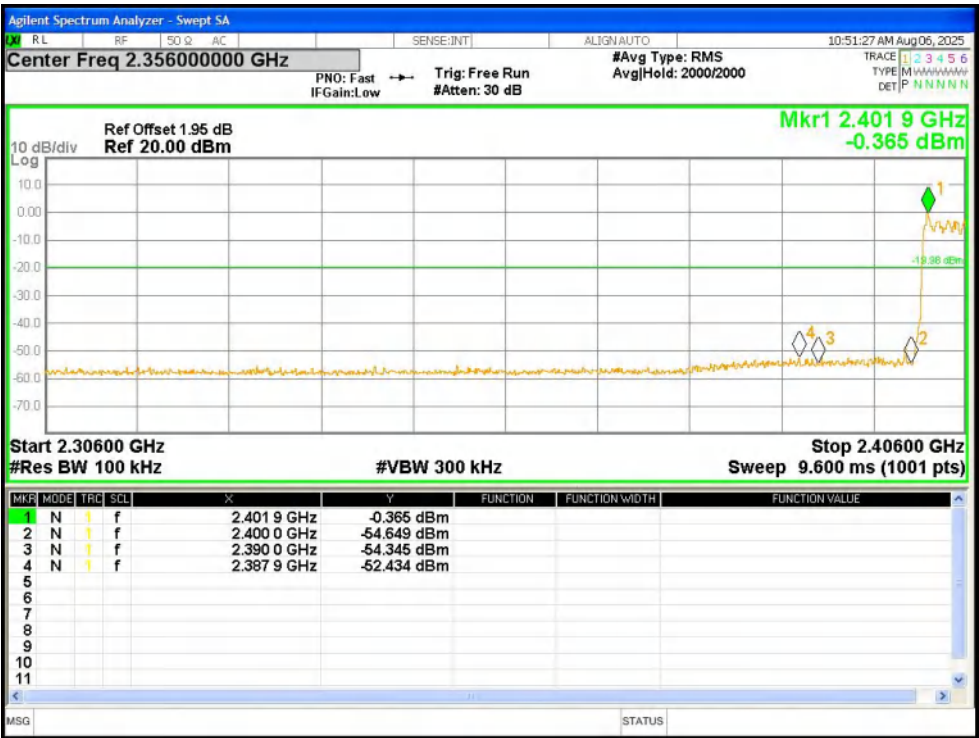

Band Edge(Hopping) NVNT 3-DH5 2402MHz Ant1 Hopping Emission



Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Ref

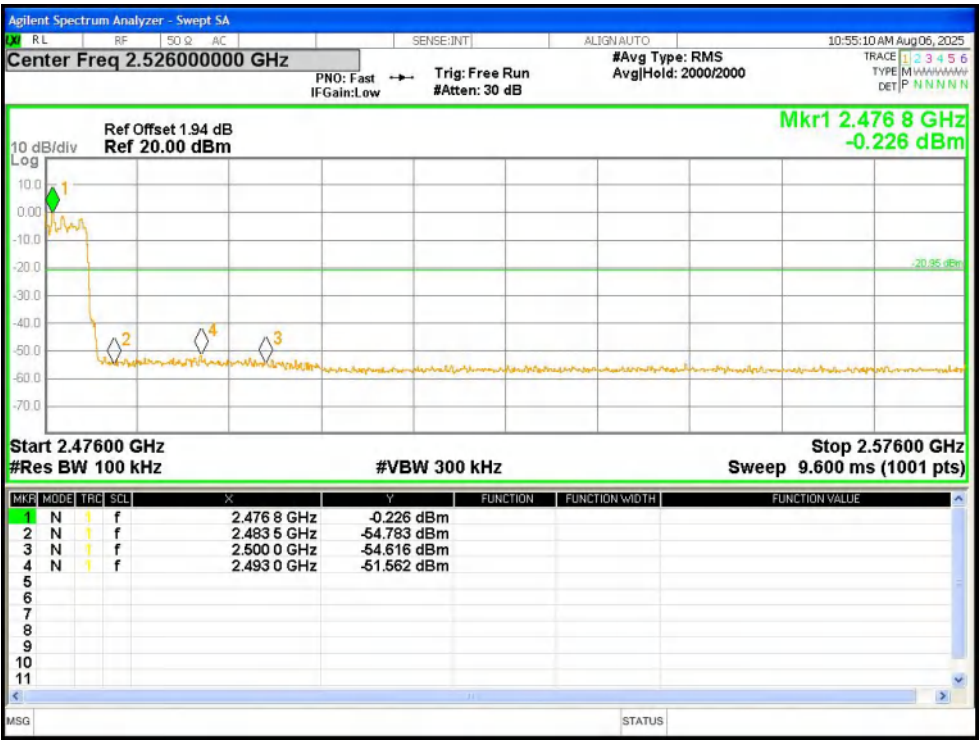


Band Edge(Hopping) NVNT 3-DH5 2480MHz Ant1 Hopping Emission


8. Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	-46.5	-20	Pass
NVNT	1-DH5	2441	Ant1	-46.75	-20	Pass
NVNT	1-DH5	2480	Ant1	-49.05	-20	Pass
NVNT	2-DH5	2402	Ant1	-52.47	-20	Pass
NVNT	2-DH5	2441	Ant1	-54.78	-20	Pass
NVNT	2-DH5	2480	Ant1	-51.87	-20	Pass
NVNT	3-DH5	2402	Ant1	-53.81	-20	Pass
NVNT	3-DH5	2441	Ant1	-54.74	-20	Pass
NVNT	3-DH5	2480	Ant1	-53.57	-20	Pass


Note: input compensation coefficient (dB)= Cable Loss (dB)

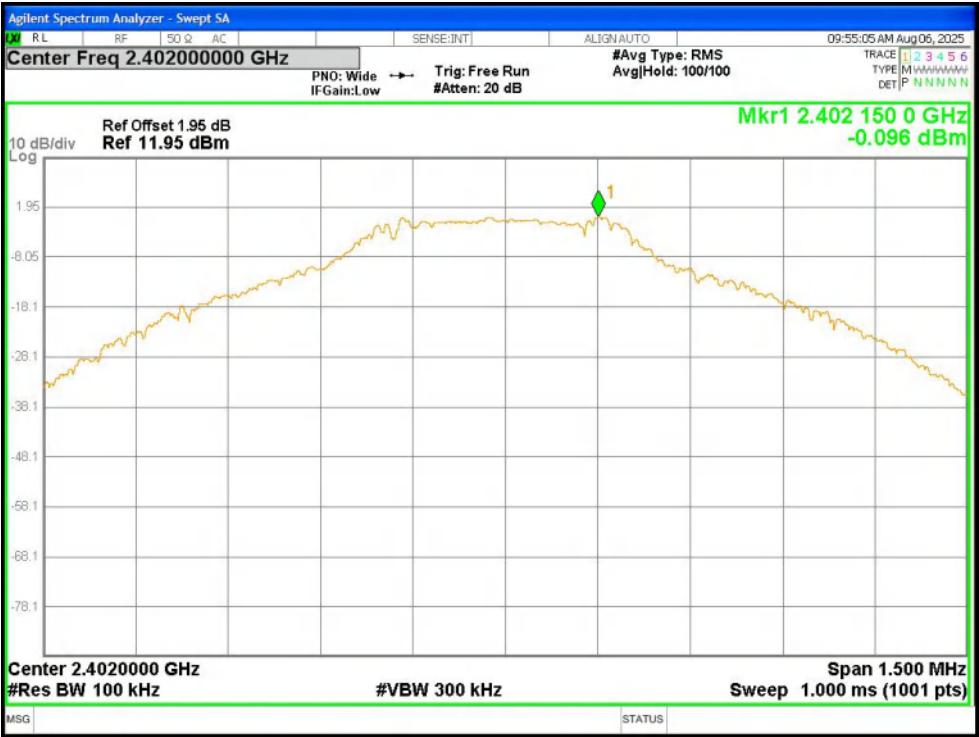


Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

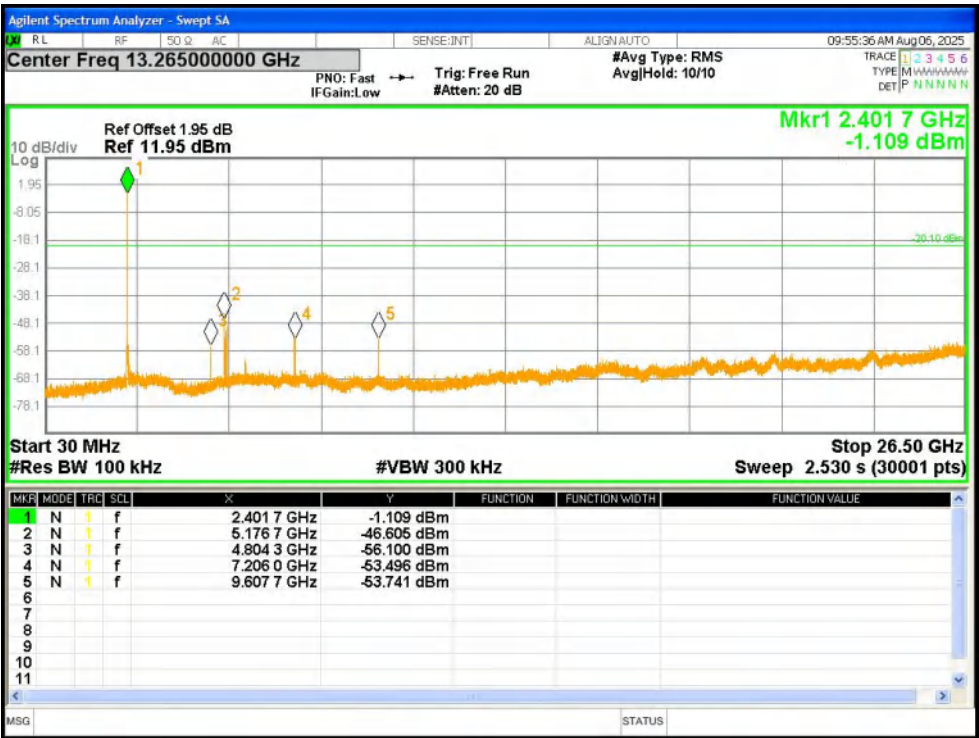


Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

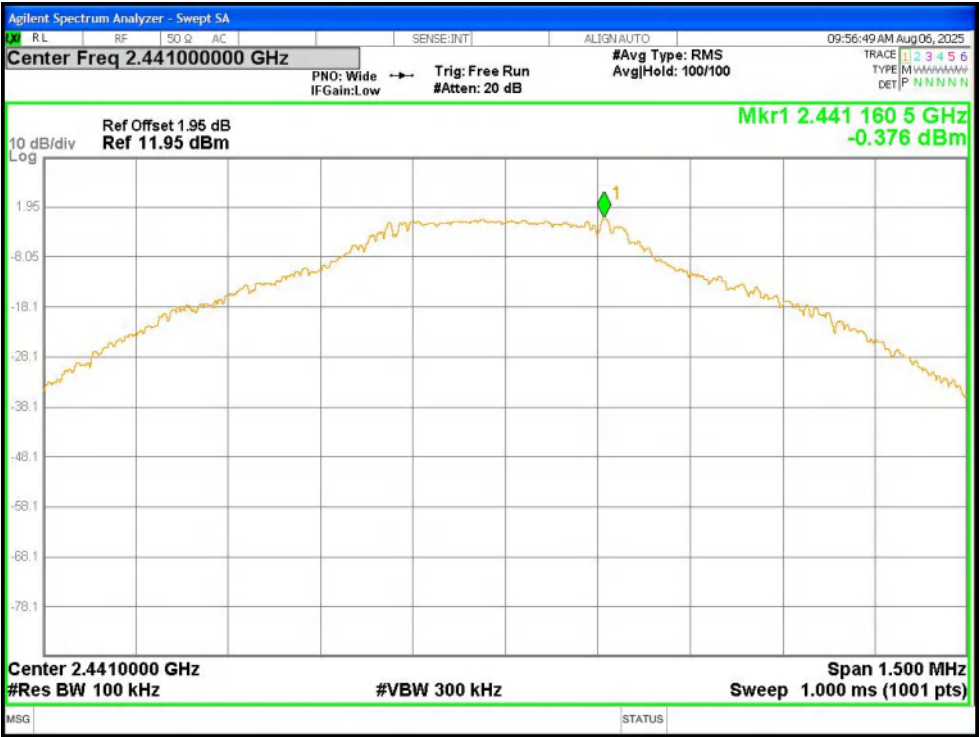


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

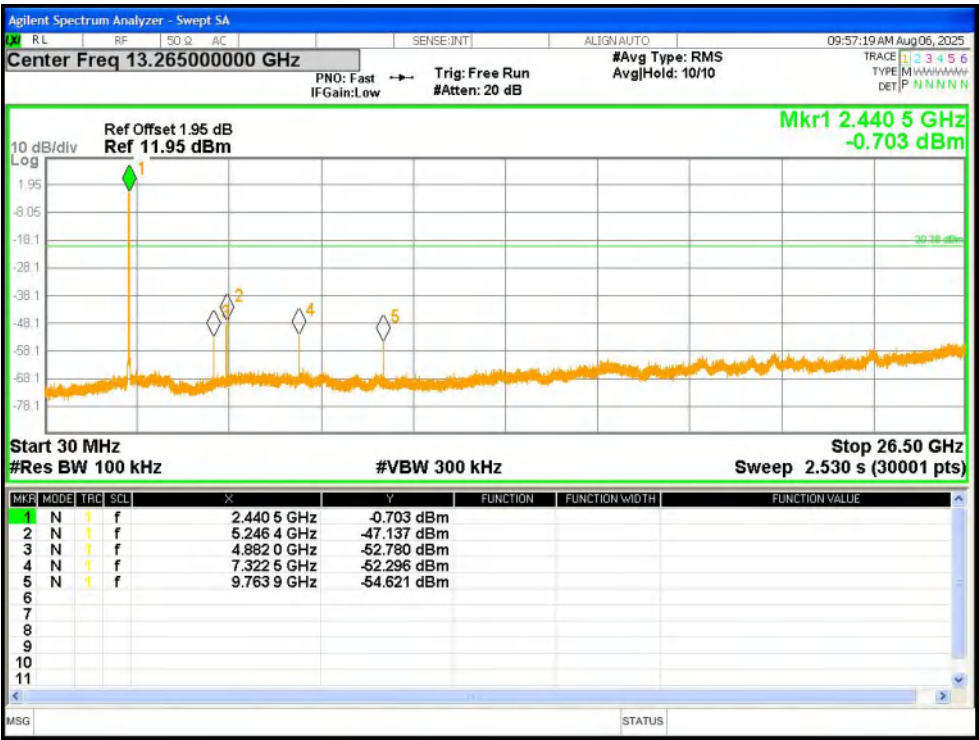


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

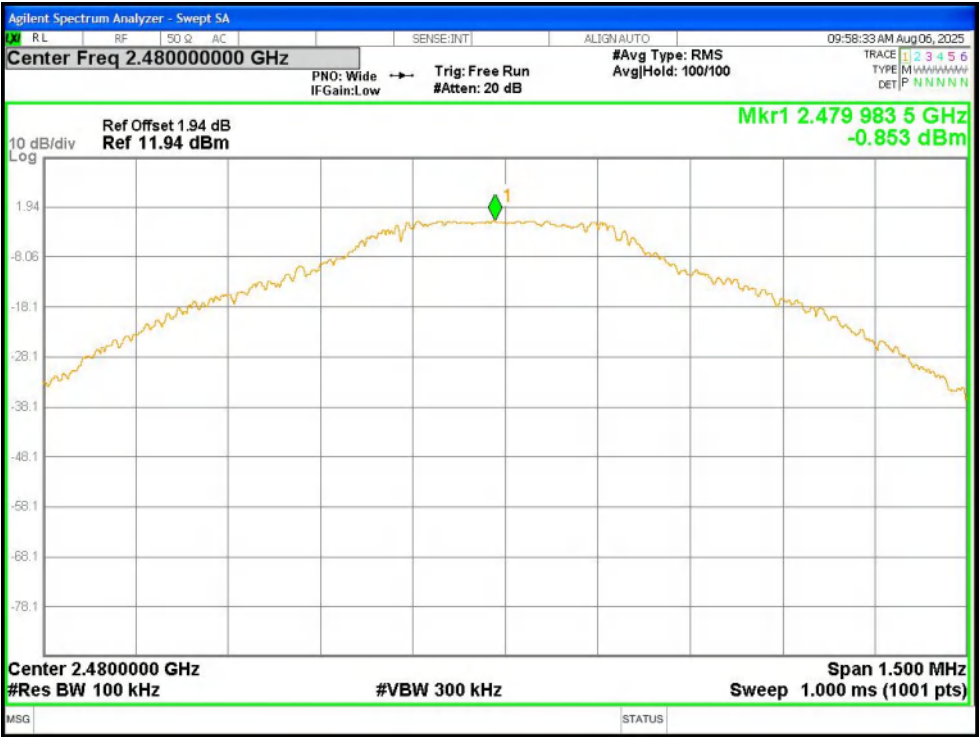


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

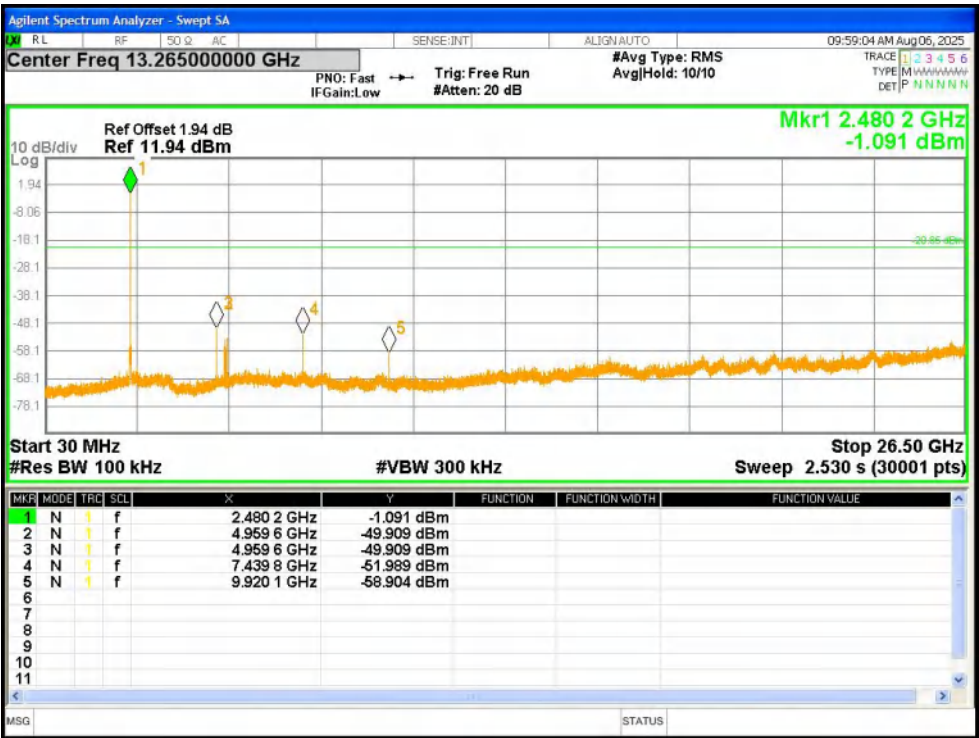


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

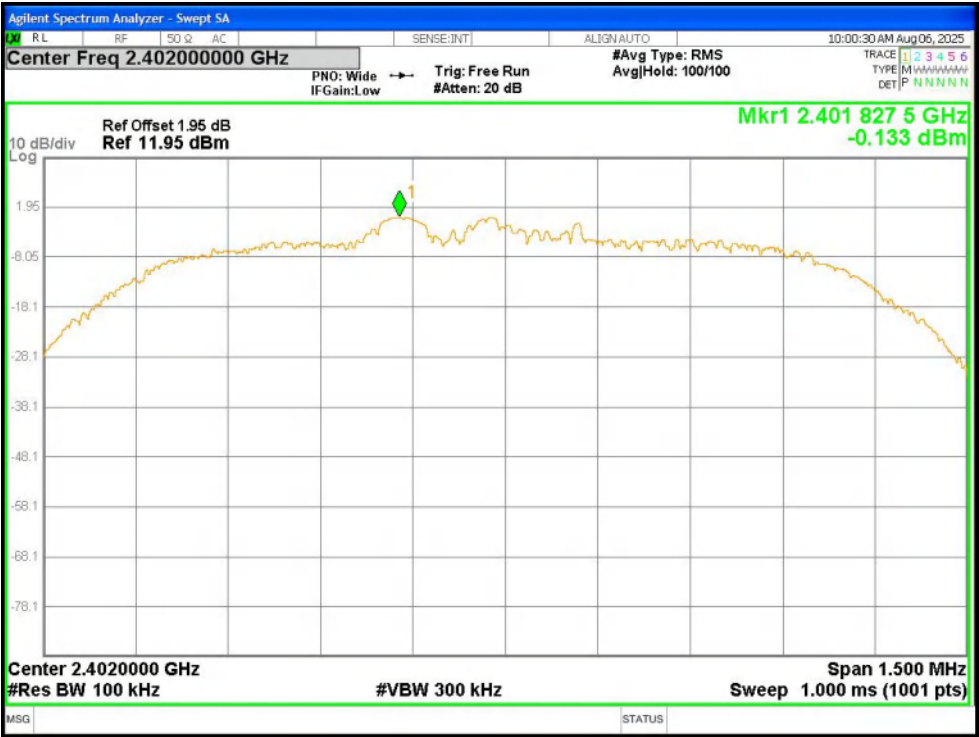


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

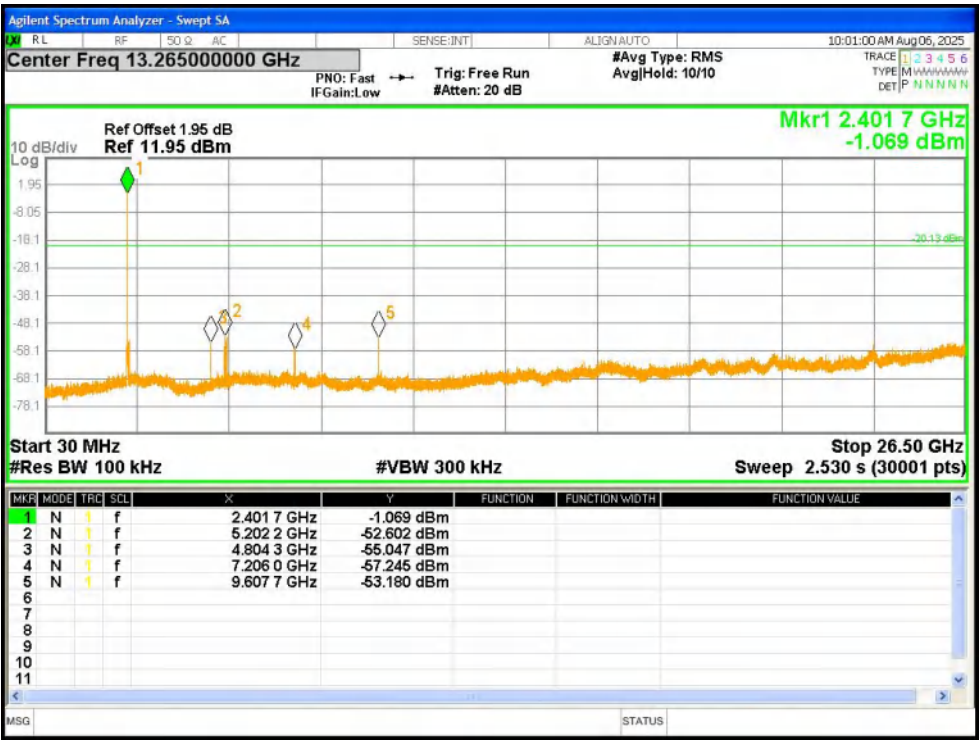


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

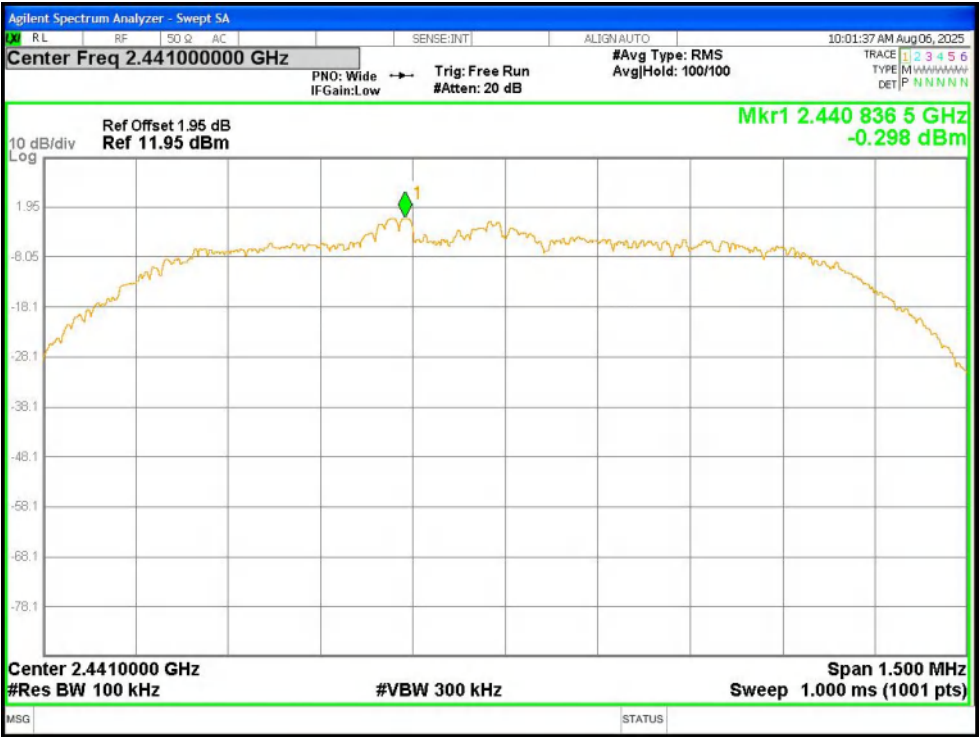


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

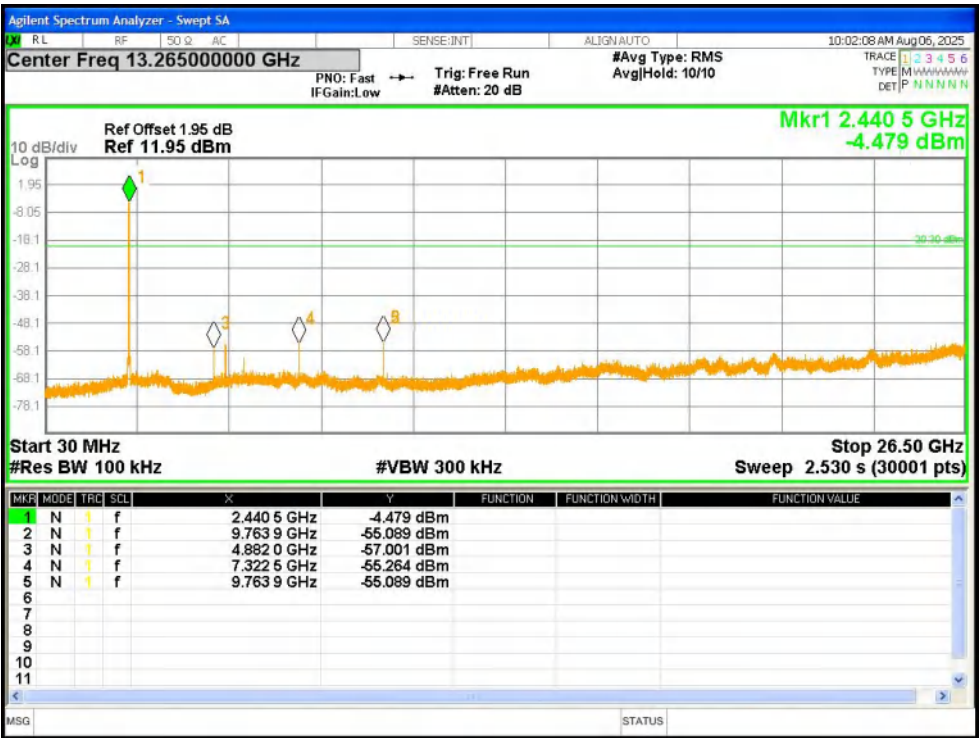


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

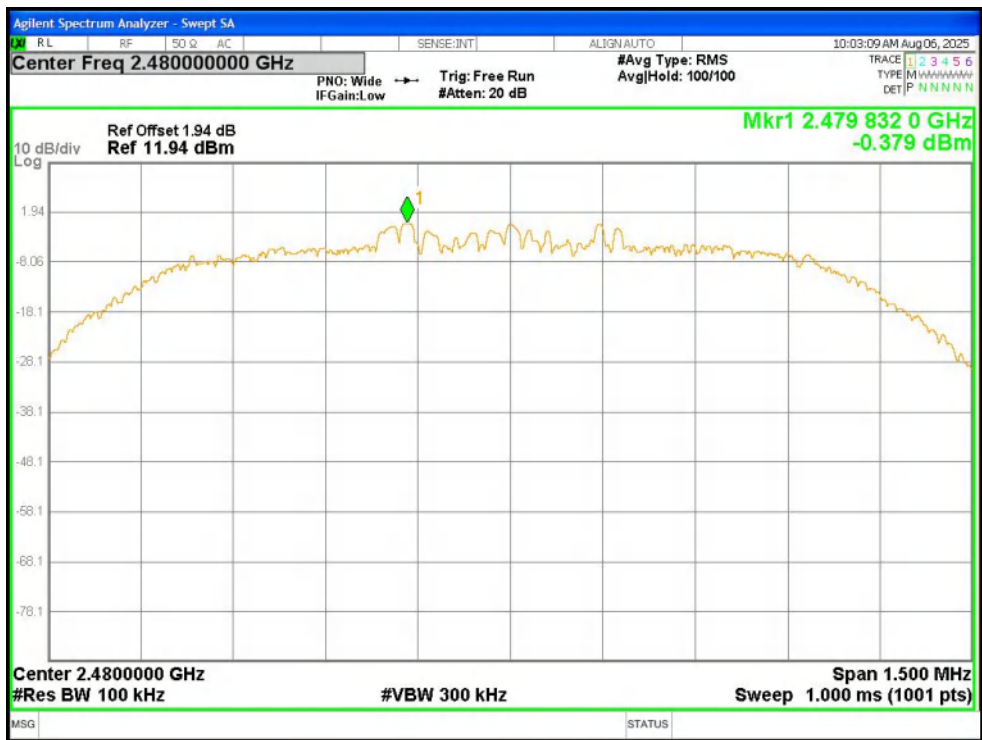


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

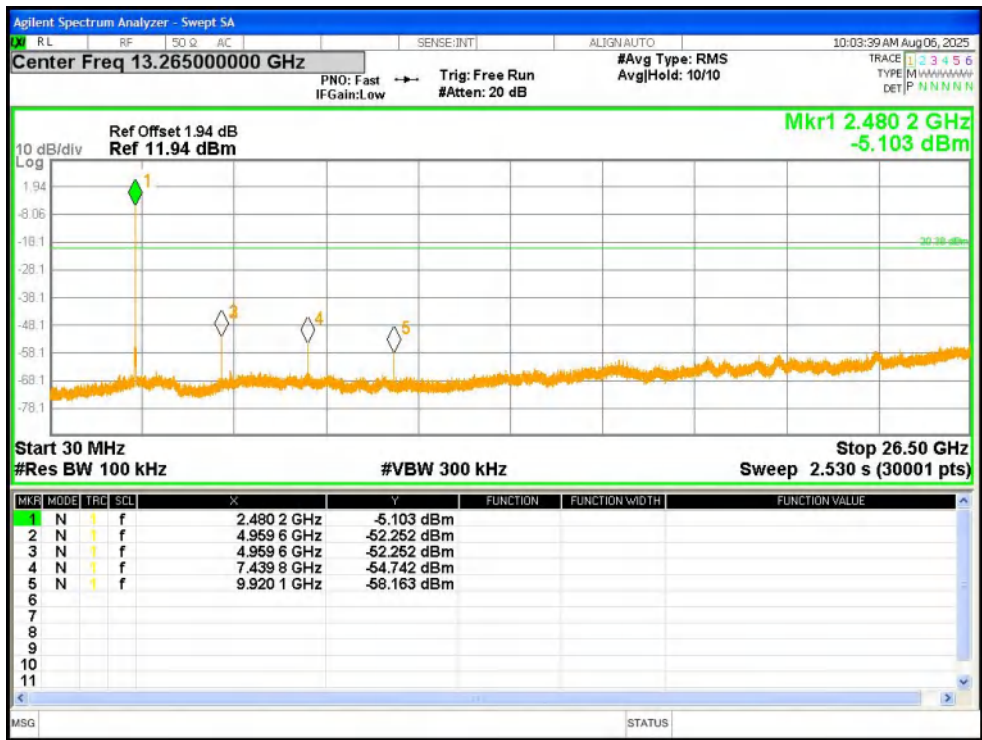


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

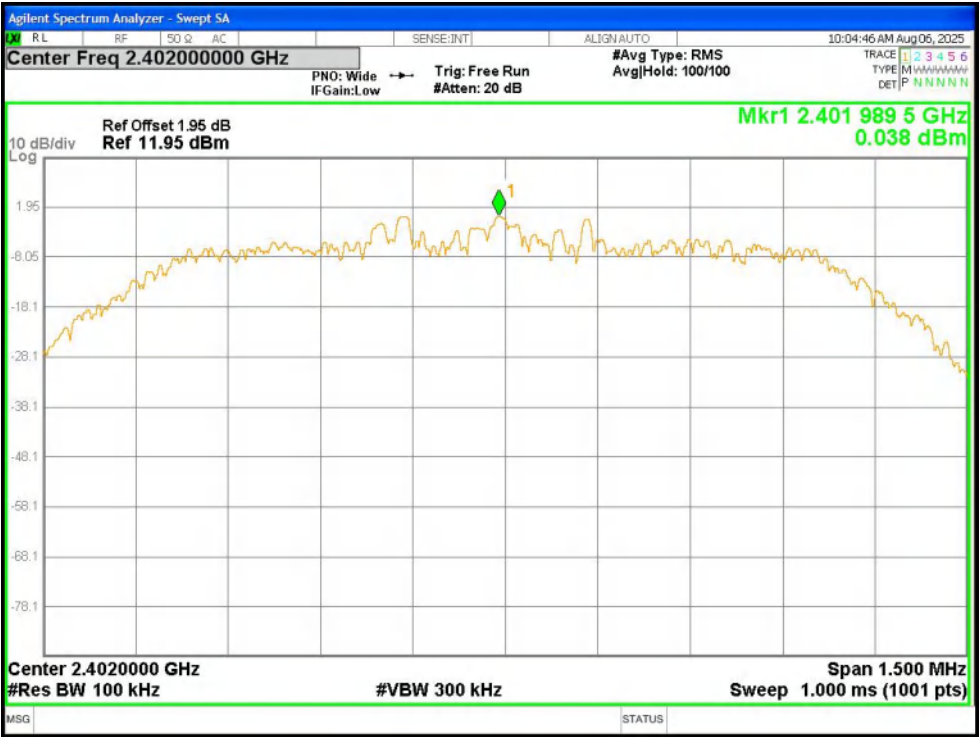


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

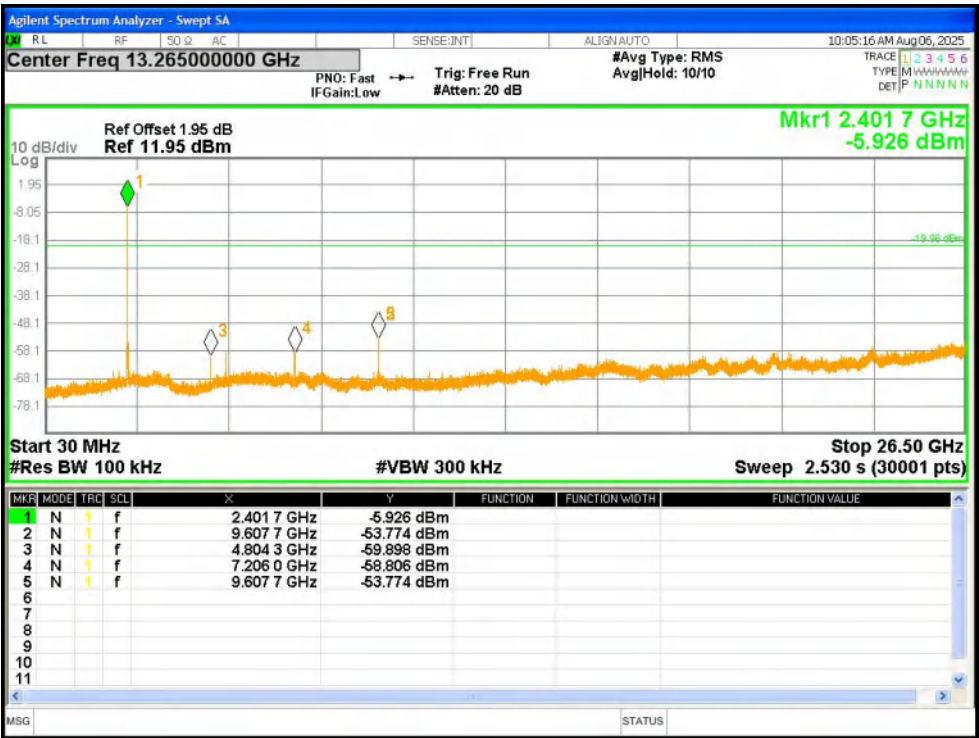


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

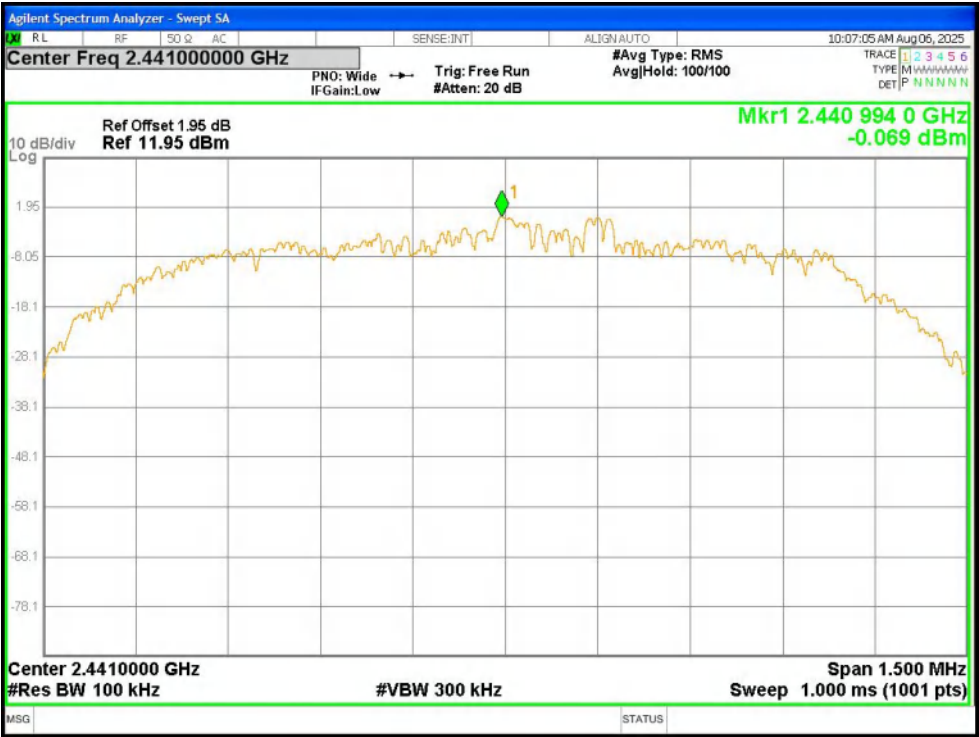


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

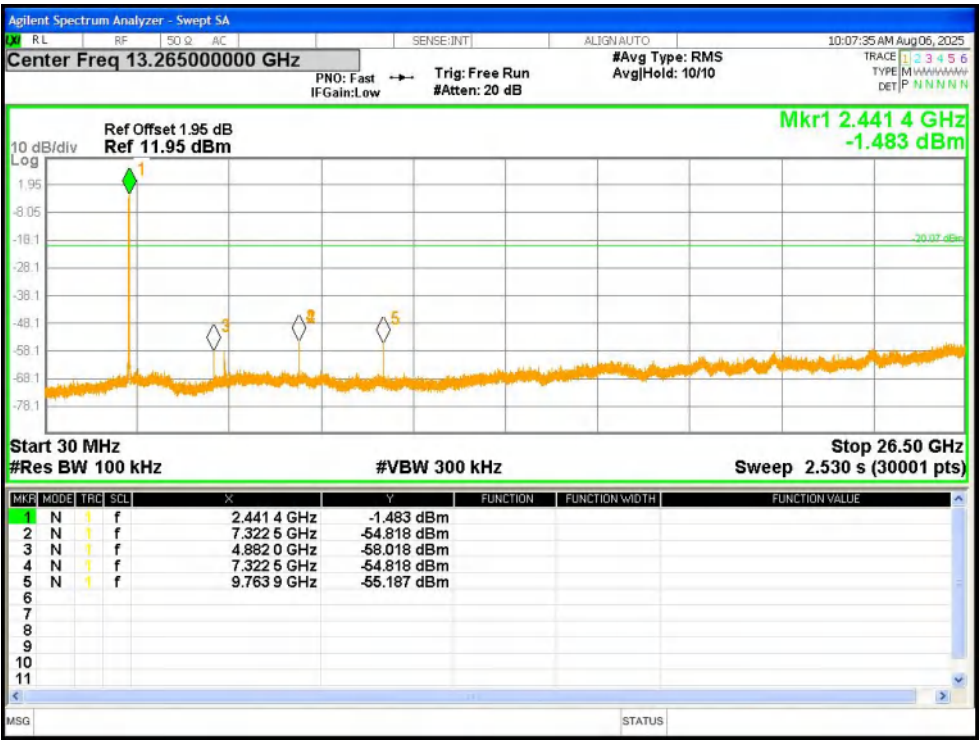

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

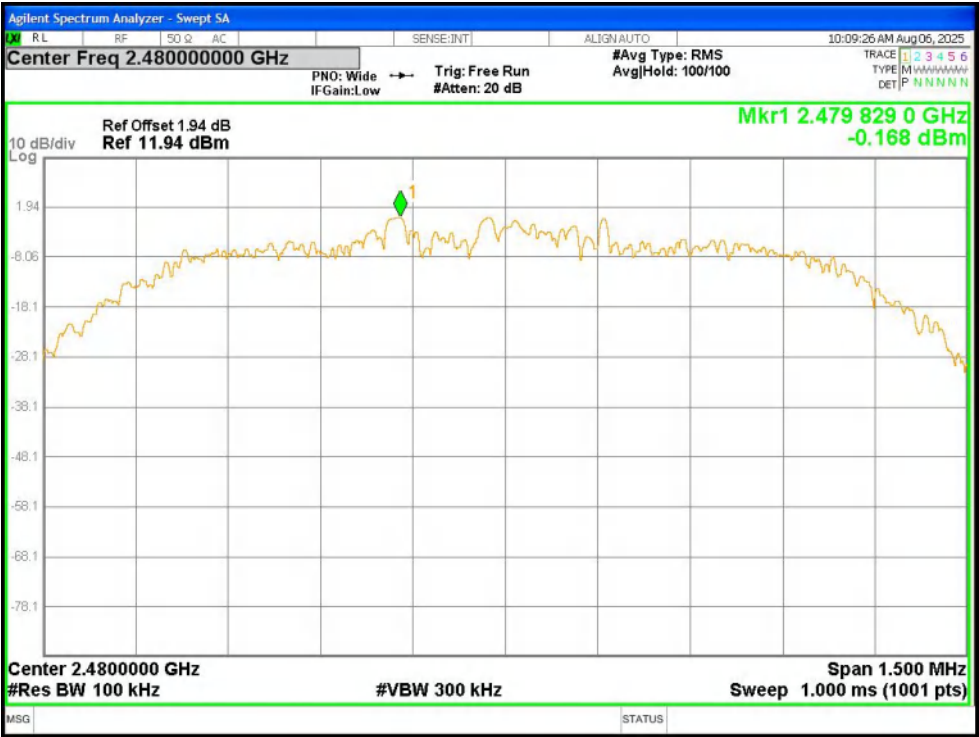

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

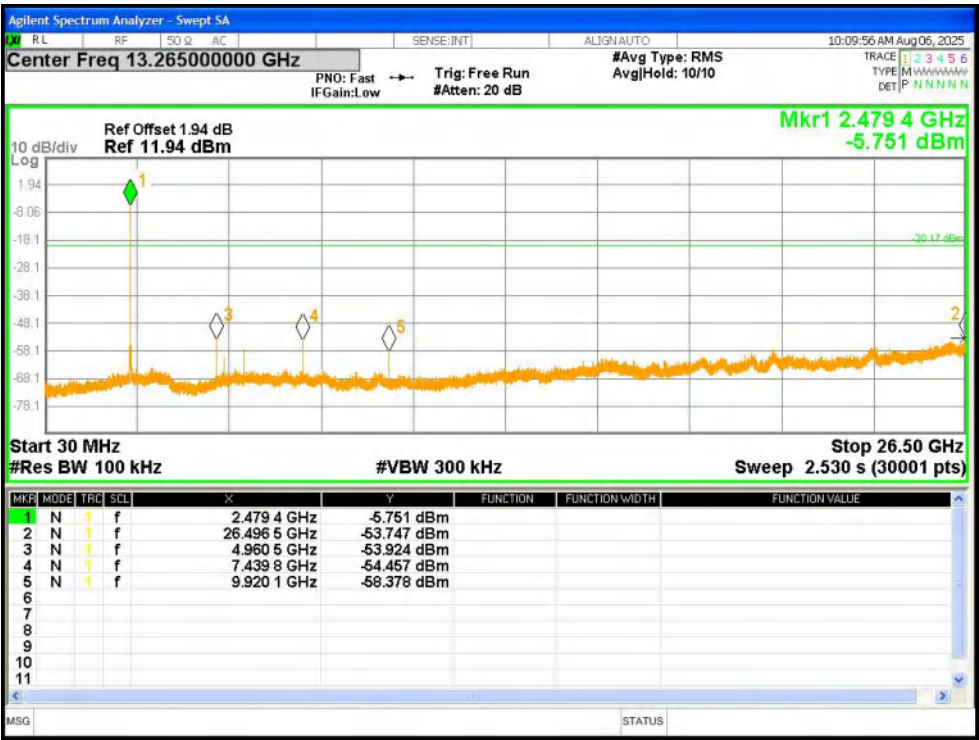

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission