



## TEST REPORT

Product Name: Impabear-Antelope Sound Ows  
FCC ID: 2BQMK-TT52D  
Trademark: IMPABEAR  
Model Number: TT52D, D118  
Prepared For: Ksana Technology (Shenzhen) Co., LTD  
Address: 513-515, Baoneng Zhichuang Valley, Longgang District, Shenzhen  
Manufacturer: Chandasung Tech (Shenzhen) Co., Ltd.  
Address: Room 308, Building B, Hongrongyuan Xiyuan Liangao Business Building, east of Baoan Avenue, Xinqiao Street,  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Jun. 18, 2025  
Sample tested Date: Jun. 18, 2025 to Jul. 02, 2025  
Issue Date: Jul. 02, 2025  
Report No.: CTB25061800501RF01  
Test Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247  
ANSI C63.10:2020  
Test Results: PASS  
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu

Bin Mei

Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

Test Report Declaration	Page
<b>1. VERSION .....</b>	<b>3</b>
<b>2. TEST SUMMARY .....</b>	<b>4</b>
<b>3. MEASUREMENT UNCERTAINTY .....</b>	<b>5</b>
<b>4. PRODUCT INFORMATION AND TEST SETUP .....</b>	<b>6</b>
4.1 Product Information .....	6
4.2 Test Setup Configuration .....	6
4.3 Support Equipment .....	6
4.4 Channel List .....	7
4.5 Test Mode .....	7
4.6 Test Environment .....	7
<b>5. TEST FACILITY AND TEST INSTRUMENT USED .....</b>	<b>8</b>
5.1 Test Facility .....	8
5.2 Test Instrument Used .....	8
<b>6. AC POWER LINE CONDUCTED EMISSION .....</b>	<b>11</b>
6.1 Block Diagram Of Test Setup .....	11
6.2 Limit .....	11
6.3 Test procedure .....	11
6.4 Test Result .....	13
<b>7. RADIATED SPURIOUS EMISSION .....</b>	<b>15</b>
7.1 Block Diagram Of Test Setup .....	15
7.2 Limit .....	15
7.3 Test procedure .....	16
7.4 Test Result .....	17
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>24</b>
8.1 Block Diagram Of Test Setup .....	24
8.2 Limit .....	24
8.3 Test procedure .....	24
8.4 Test Result .....	25
<b>9. CONDUCTED OUTPUT POWER .....</b>	<b>29</b>
9.1 Block Diagram Of Test Setup .....	29
9.2 Limit .....	29
9.3 Test procedure .....	29
9.4 Test Result .....	30
<b>10. 6DB OCCUPIED BANDWIDTH .....</b>	<b>33</b>
10.1 Block Diagram Of Test Setup .....	33
10.2 Limit .....	33
10.3 Test procedure .....	33
10.4 Test Result .....	33
<b>11. POWER SPECTRAL DENSITY .....</b>	<b>36</b>
11.1 Block Diagram Of Test Setup .....	36
11.2 Limit .....	36
11.3 Test procedure .....	36
11.4 Test Result .....	36
<b>12. ANTENNA REQUIREMENT .....</b>	<b>39</b>
<b>13. EUT TEST SETUP PHOTOGRAPHS .....</b>	<b>40</b>

*(Note: N/A means not applicable)*

**1. VERSION**

Report No.	Issue Date	Description	Approved
CTB25061800501RF01	Jul. 02, 2025	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2020	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2020	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2020	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2020	PASS
<b>Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2020	PASS
<b>Power Spectral Density</b>	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2020/ KDB 558074 D01v05r02	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS

Remark:

Test according to ANSI C63.10-2020.



### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9K-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 <sup>-7</sup>
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s):	TT52D, D118
Model Description:	All the model are the same circuit and RF module, only the model names are different. Test sample model: TT52D
Bluetooth Version:	Bluetooth 5.0
Hardware Version:	D118_JL7003D_V2.0
Software Version:	D118_AC7003D_V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 1M: 2.896dBm Bluetooth: 2M: 3.053dBm
Type of Modulation:	Bluetooth: GFSK
Antenna installation:	Bluetooth: Chip antenna
Antenna Gain:	Bluetooth: 2.5dBi
Ratings:	DC 5V charging from adapter DC 3.7V by battery

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Adapter	JIYIN	JY-05100C	/	AE

**Notes:**

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK)	2402MHz	2440MHz	2480MHz

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	3.7V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: CN1276

### 5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated Date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2025/5/23	2026/5/22
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2025/5/23	2026/5/22
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2025/5/23	2026/5/22
4	Communication test set	R&S	CMW500	108058	V3.5.80	2025/5/23	2026/5/22
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2025/5/22	2026/5/21
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2025/5/22	2026/5/21
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 ( E1962B )	2025/5/22	2026/5/21
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	/	2025/6/18	2026/6/17
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	/	2025/6/18	2026/6/17
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	/	2025/5/24	2026/5/23
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	/	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024/10/31	2025/10/30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2025/5/22	2026/5/21
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/	/
16	966 chamber	C.R.T.	966	/	/	2024/6/23	2027/6/22





17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 ( 104489/003 )	2025/5/23	2026/5/22
18	Amplifier	HP	8447E	2945A02747	/	2025/5/23	2026/5/22
19	Amplifier	Agilent	8449B	3008A01838	/	2025/6/2	2026/6/1
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2025/6/29	2026/6/28
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2025/6/1	2026/5/31
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2025/6/2	2026/6/1
26	Amplifier	AEROFLEX	Aeroflex	097	/	2025/6/2	2026/6/1
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2025/6/2	2026/6/1

## Continuous disturbance

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2024/6/22	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	831551852	/	2025/5/22	2026/5/21
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428	V4.42.SP3	2025/5/22	2026/5/21
4	Coaxial cable	ZDECL	Z302S	18091904	/	2025/5/22	2026/5/21
5	ISN	Schwarzbeck	NTFM8158	183	/	2025/6/18	2026/6/17
6	Voltage sensor	Schwarzbeck	TK 9420	01189	/	2024/10/26	2025/10/25
7	EZ-EMC	Frad	EMC-con3A1.1	/	/	/	/
8	Current Probe	FCC	F-52B	199453	/	2025/5/24	2026/5/23
9	Communication test set	R&S	CMW500	108058	B.19.07 ( E1962B )	2025/5/23	2026/5/22
10	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

## Radiated emission(No.2 Chamber)


No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated Date	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2024/6/8	2027/6/7
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2025/6/1	2026/5/31



3	Broadband Antenna	Schwarzbeck	VULB 9168	1471	/	2024/10/26	2025/10/25
4	Amplifier	Agilent	8449B	3008A01838	/	2025/6/3	2026/6/2
5	Preamplifier	Schwarzbeck	BBV 9743 B	00500	/	2025/5/30	2026/5/29
6	EMI TEST RECEIVER	R&S	ESCI7	100861	/	2024/10/26	2025/10/25
7	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2025/5/23	2026/5/22
8	EMI test software	Farad	EZ-EMC	/	Ver. FARAD-3A1+	/	/
9	Coaxial cable	Rosenberg	8m	/	/	2024/10/26	2025/10/25
10	Coaxial cable	Times	2m	/	/	2024/10/26	2025/10/25
11	Coaxial cable	Times	2m	/	/	2024/10/26	2025/10/25
12	Coaxial cable	Times	1m	/	/	2024/10/26	2025/10/25
13	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2025/6/2	2026/6/1
14	Communication test set	R&S	CMW500	108058	B.19.07 (E1962B)	2025/5/23	2026/5/22
15	Communication test set	Agilent	E5515C	MY50102567	V3.5.80	2025/5/23	2026/5/22

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

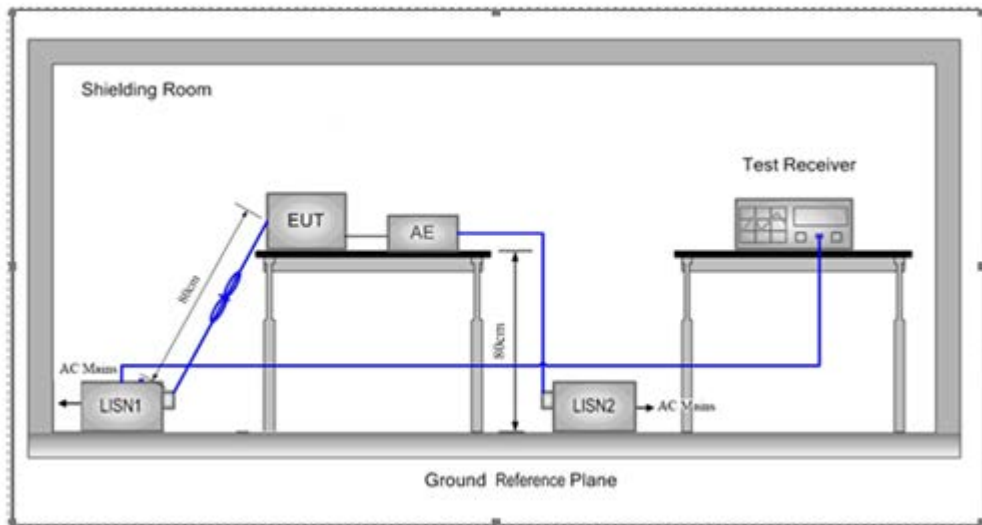

### 6.2 Limit

**Table 4 – AC power-line conducted emissions limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.


This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.



6.4 Test Result

L: Worst case-GFSK-1M(low channel)

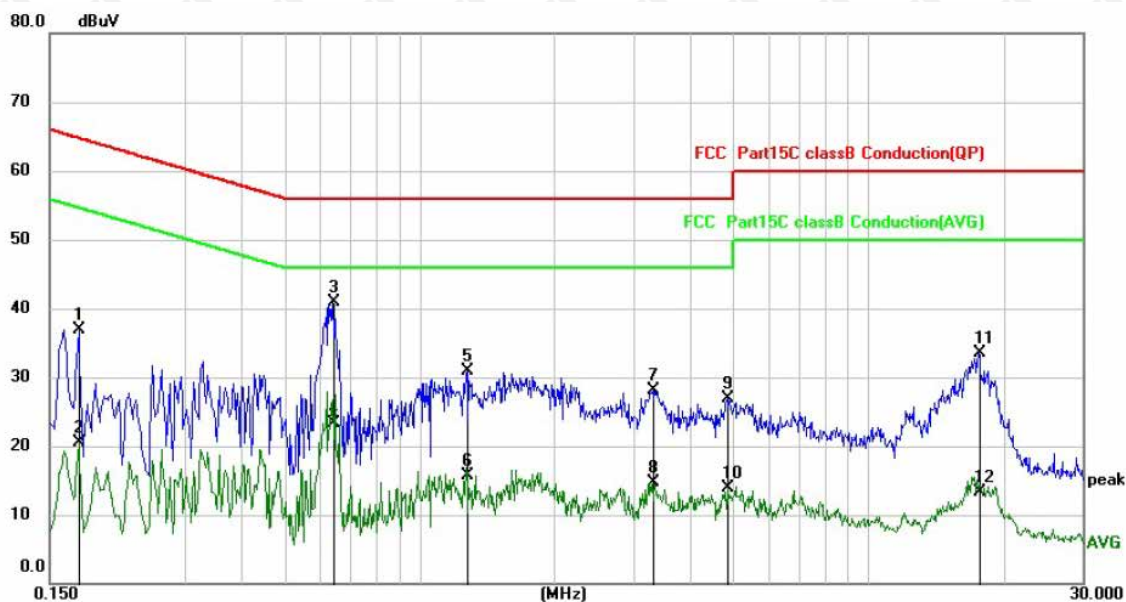


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector
1		0.1740	26.96	10.03	36.99	64.77	-27.78	QP
2		0.1740	10.42	10.03	20.45	54.77	-34.32	AVG
3	*	0.6419	30.80	10.04	40.84	56.00	-15.16	QP
4		0.6419	13.25	10.04	23.29	46.00	-22.71	AVG
5		1.2820	20.88	10.06	30.94	56.00	-25.06	QP
6		1.2820	5.71	10.06	15.77	46.00	-30.23	AVG
7		3.3260	17.98	10.11	28.09	56.00	-27.91	QP
8		3.3260	4.60	10.11	14.71	46.00	-31.29	AVG
9		4.8500	16.69	10.16	26.85	56.00	-29.15	QP
10		4.8500	3.70	10.16	13.86	46.00	-32.14	AVG
11		17.5700	22.86	10.63	33.49	60.00	-26.51	QP
12		17.5700	2.66	10.63	13.29	50.00	-36.71	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

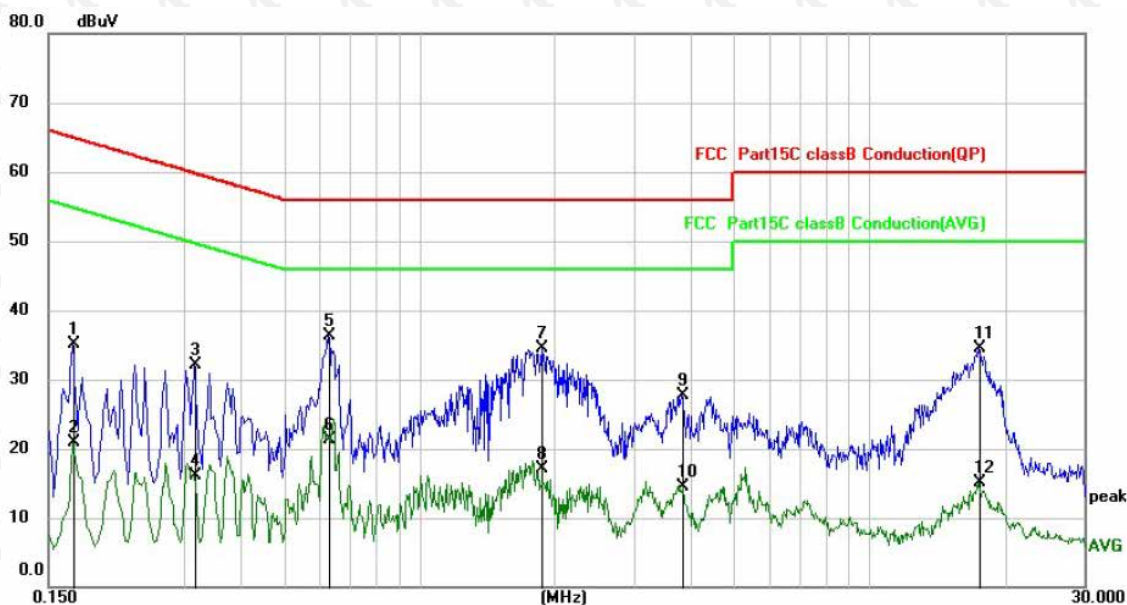

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector
1		0.1700	25.16	10.03	35.19	64.96	-29.77	QP
2		0.1700	10.93	10.03	20.96	54.96	-34.00	AVG
3		0.3180	22.06	10.03	32.09	59.76	-27.67	QP
4		0.3180	5.98	10.03	16.01	49.76	-33.75	AVG
5	*	0.6300	26.30	10.04	36.34	56.00	-19.66	QP
6		0.6300	11.24	10.04	21.28	46.00	-24.72	AVG
7		1.8740	24.38	10.07	34.45	56.00	-21.55	QP
8		1.8740	7.07	10.07	17.14	46.00	-28.86	AVG
9		3.8260	17.64	10.12	27.76	56.00	-28.24	QP
10		3.8260	4.30	10.12	14.42	46.00	-31.58	AVG
11		17.5419	23.90	10.63	34.53	60.00	-25.47	QP
12		17.5419	4.49	10.63	15.12	50.00	-34.88	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

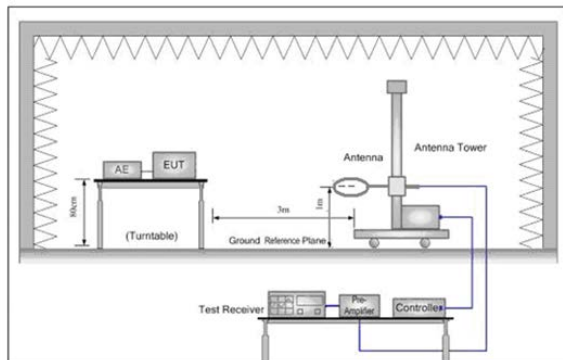


Figure 1. Below 30MHz

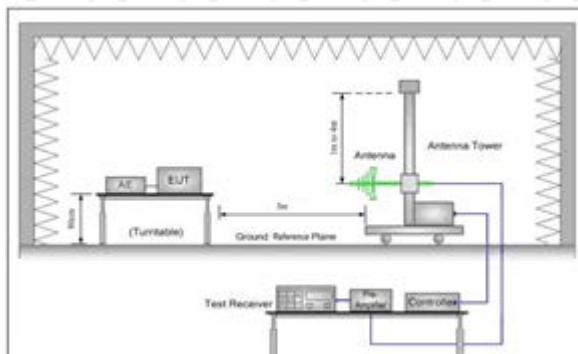


Figure 2. 30MHz to 1GHz

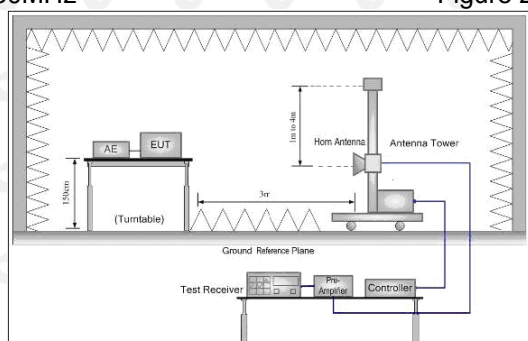


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m )	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average




7.4 Test Result

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK-1M(low channel)

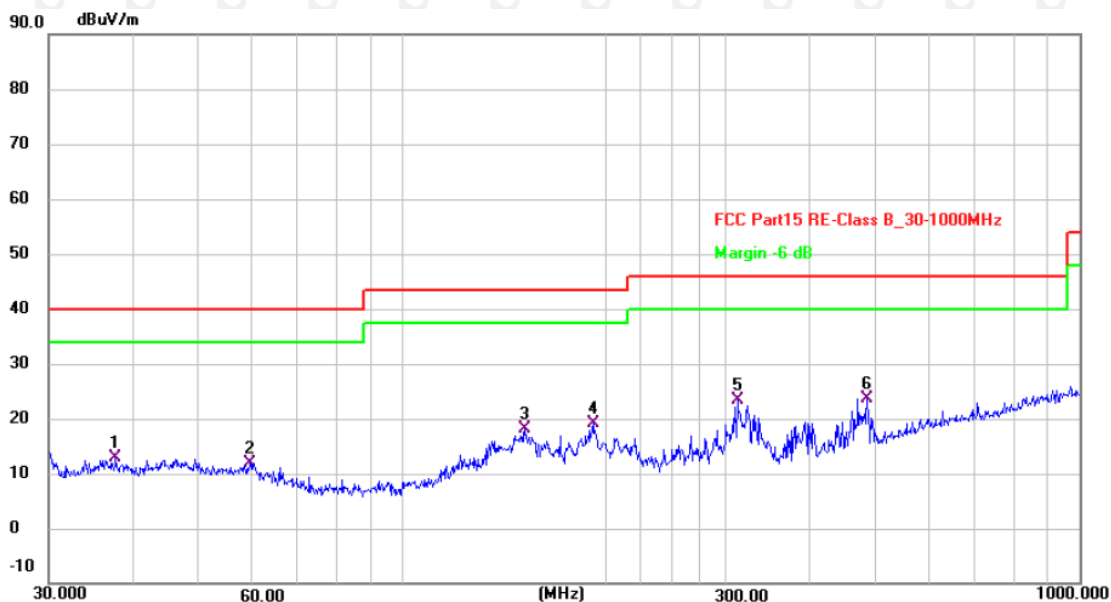

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	37.6798	26.49	-13.58	12.91	40.00	-27.09	QP
2	59.4405	26.67	-14.75	11.92	40.00	-28.08	QP
3	151.5972	30.99	-12.83	18.16	43.50	-25.34	QP
4	191.0738	34.86	-15.84	19.02	43.50	-24.48	QP
5	312.1794	36.53	-13.18	23.35	46.00	-22.65	QP
6 *	485.6093	32.88	-9.20	23.68	46.00	-22.32	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V  
 Worst case-GFSK-1M(low channel)

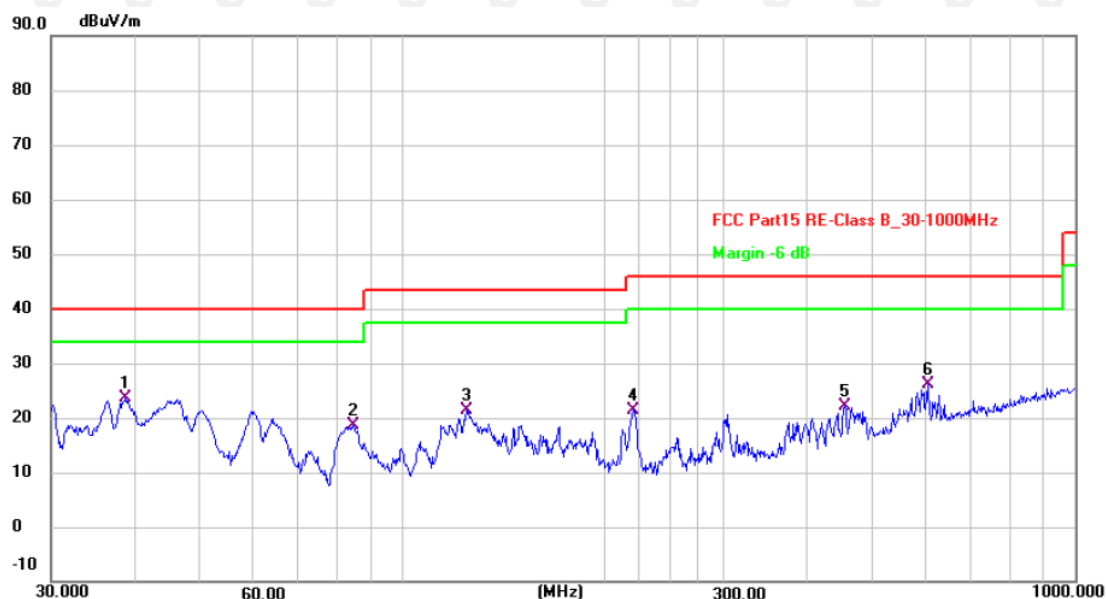

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	38.7518	37.14	-13.47	23.67	40.00	-16.33	QP
2	84.4054	36.64	-18.11	18.53	40.00	-21.47	QP
3	124.5690	36.44	-14.97	21.47	43.50	-22.03	QP
4	220.6171	37.56	-16.13	21.43	46.00	-24.57	QP
5	454.3100	31.98	-9.94	22.04	46.00	-23.96	QP
6	603.5392	31.85	-5.74	26.11	46.00	-19.89	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

CH Low (2402MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2402	110.14	-5.84	104.30	N/A	N/A	peak
2402	92.87	-5.84	87.03	N/A	N/A	AVG
4804	58.10	-3.64	54.46	74	-19.54	peak
4804	48.38	-3.64	44.74	54	-9.26	AVG
7206	60.20	-0.95	59.25	74	-14.75	peak
7206	49.95	-0.95	49.00	54	-5.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2402	109.12	-5.84	103.28	N/A	N/A	peak
2402	93.94	-5.84	88.10	N/A	N/A	AVG
4804	57.61	-3.64	53.97	74	-20.03	peak
4804	47.25	-3.64	43.61	54	-10.39	AVG
7206	60.84	-0.95	59.89	74	-14.11	peak
7206	50.88	-0.95	49.93	54	-4.07	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

CH Middle (2440MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2440	106.81	-5.71	101.10	N/A	N/A	peak
2440	93.06	-5.71	87.35	N/A	N/A	AVG
4880	54.32	-3.51	50.81	74	-23.19	peak
4880	45.90	-3.51	42.39	54	-11.61	AVG
7320	57.64	-0.82	56.82	74	-17.18	peak
7320	47.32	-0.82	46.50	54	-7.50	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2440	106.27	-5.71	100.56	N/A	N/A	peak
2440	91.46	-5.71	85.75	N/A	N/A	AVG
4880	54.57	-3.51	51.06	74	-22.94	peak
4880	45.93	-3.51	42.42	54	-11.58	AVG
7320	56.27	-0.82	55.45	74	-18.55	peak
7320	46.59	-0.82	45.77	54	-8.23	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



CH High (2480MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2480	107.23	-5.65	101.58	N/A	N/A	peak
2480	92.47	-5.65	86.82	N/A	N/A	AVG
4960	56.07	-3.43	52.64	74	-21.36	peak
4960	46.24	-3.43	42.81	54	-11.19	AVG
7440	57.27	-0.75	56.52	74	-17.48	peak
7440	47.18	-0.75	46.43	54	-7.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2480	107.01	-5.65	101.36	N/A	N/A	peak
2480	92.77	-5.65	87.12	N/A	N/A	AVG
4960	55.00	-3.43	51.57	74	-22.43	peak
4960	47.08	-3.43	43.65	54	-10.35	AVG
7440	55.13	-0.75	54.38	74	-19.62	peak
7440	45.86	-0.75	45.11	54	-8.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9kHz to the 25 GHz, The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report.
- (2). All modes of GFSK-1M and GFSK-2M were test at Low, Middle, and High channel, only the worst result of GFSK-1M Low Channel was reported for below 1GHz test.
- (3). For BT above 1GHz test all modes of GFSK-1M and GFSK-2M were test at Low, Middle, and High channel, only the worst result of GFSK-1M Low Channel was reported.
- (4). By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

**Restricted bands around fundamental frequency (Radiated)**

Operation Mode: TX CH Low (2402MHz)  
Horizontal (Worst case)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2310	53.98	-5.81	48.17	74	-25.83	peak
2310	/	-5.81	/	54	/	AVG
2390	55.58	-5.84	49.74	74	-24.26	peak
2390	/	-5.84	/	54	/	AVG
2400	53.97	-5.84	48.13	74	-25.87	peak
2400	/	-5.84	/	54	/	AVG

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2310	55.08	-5.81	49.27	74	-24.73	peak
2310	/	-5.81	/	54	/	AVG
2390	54.48	-5.84	48.64	74	-25.36	peak
2390	/	-5.84	/	54	/	AVG
2400	56.01	-5.84	50.17	74	-23.83	peak
2400	/	-5.84	/	54	/	AVG

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)

Horizontal (Worst case)

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.50	54.61	-5.65	48.96	74	-25.04	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	54.13	-5.65	48.48	74	-25.52	peak
2500.00	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.50	53.83	-5.65	48.18	74	-25.82	peak
2483.50	/	-5.65	/	54	/	AVG
2500.00	54.53	-5.65	48.88	74	-25.12	peak
2500.00	/	-5.65	/	54	/	AVG


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

When the peak value is smaller than the AVG limit, AVG is not reflected.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

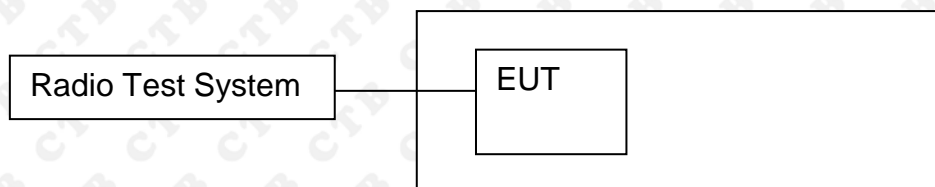

### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:  
Below 30MHz:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold  
Above 30MHz:  
RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold




## 8.4 Test Result

1M:

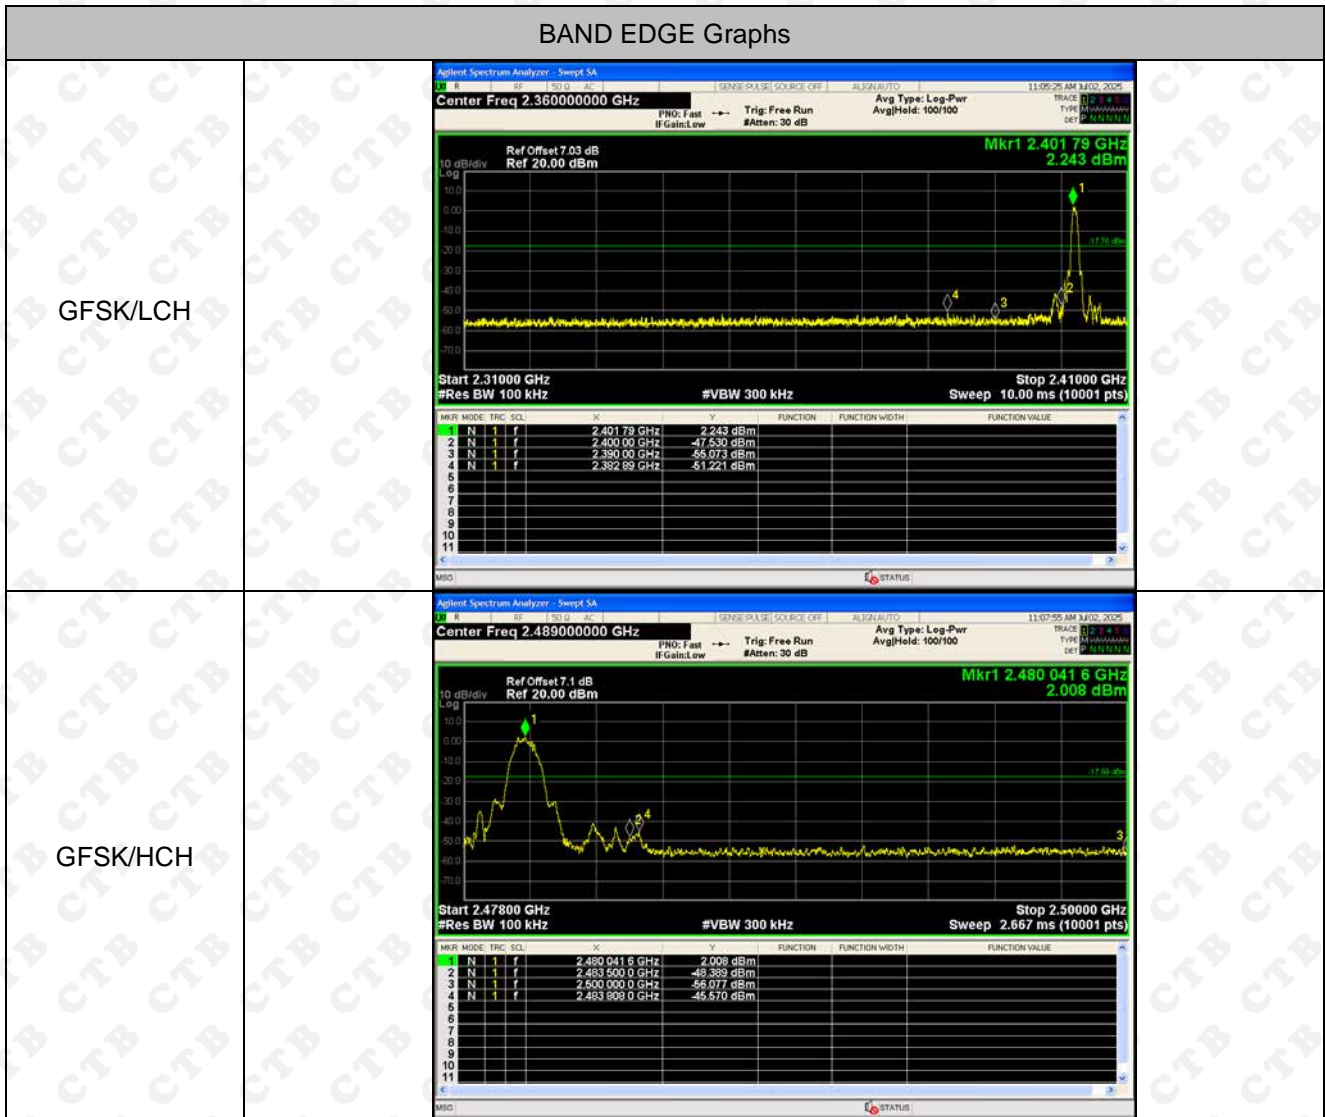


## RF Conducted Spurious Emissions Graphs


GFSK/LCH

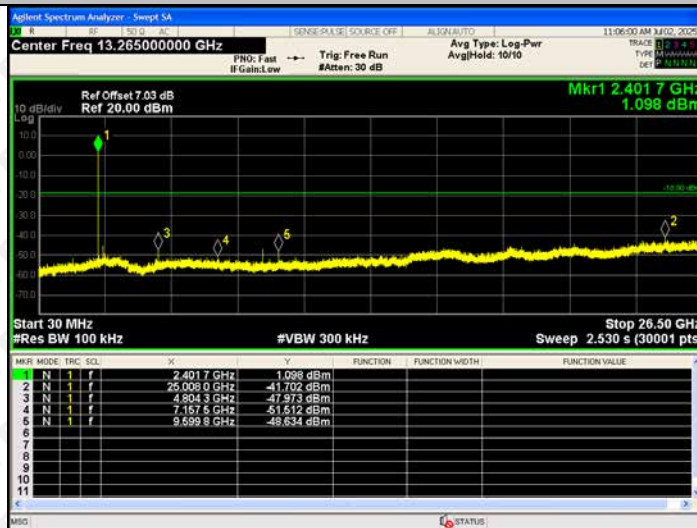

GFSK/MCH

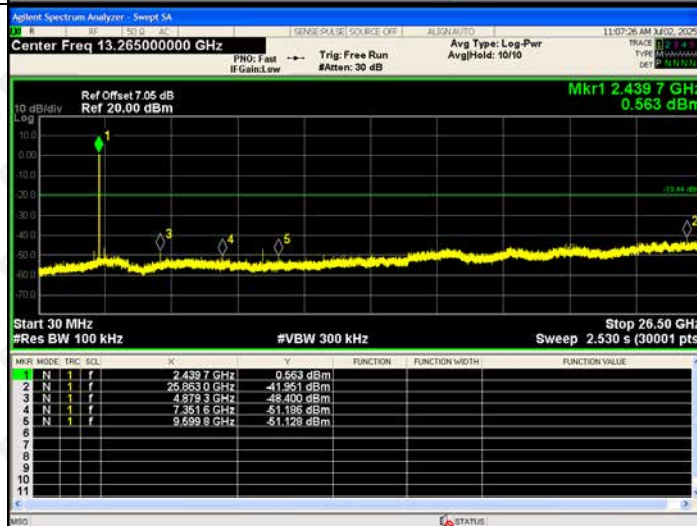


GFSK/HCH

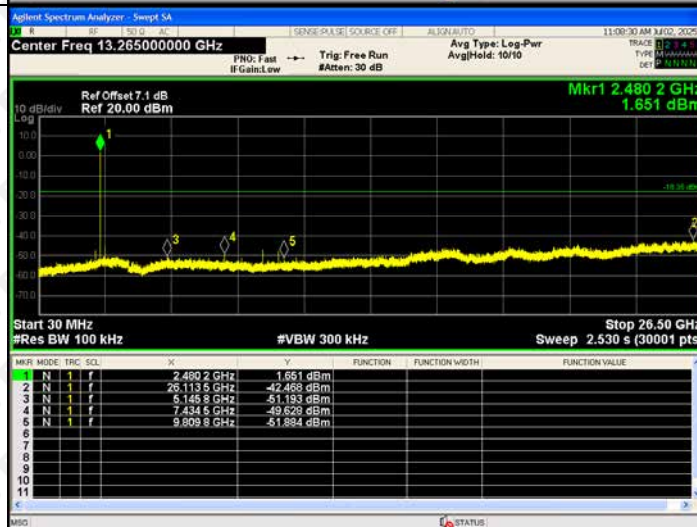


2M:

## BAND EDGE Graphs

GFSK/LCH

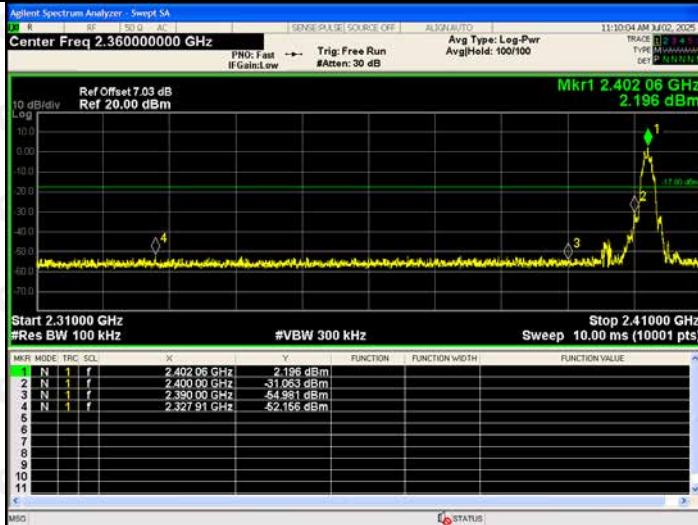


GFSK/HCH

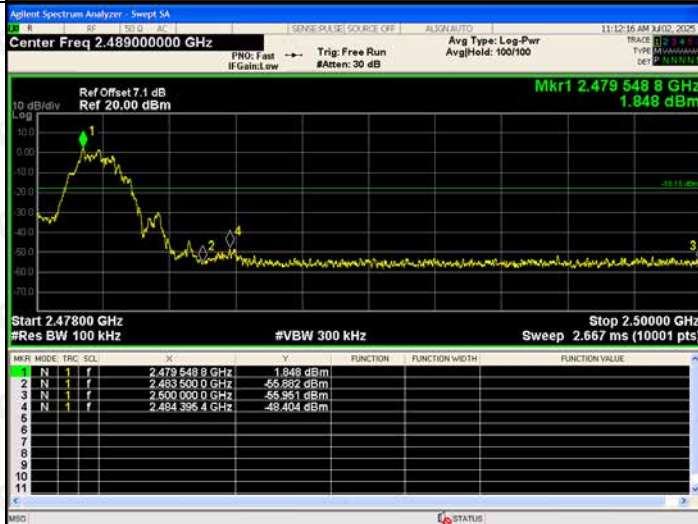




## RF Conducted Spurious Emissions Graphs


GFSK/LCH

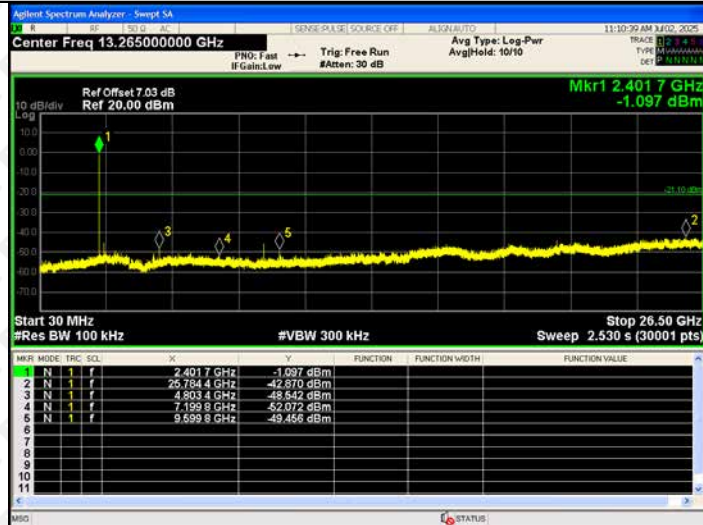

GFSK/MCH

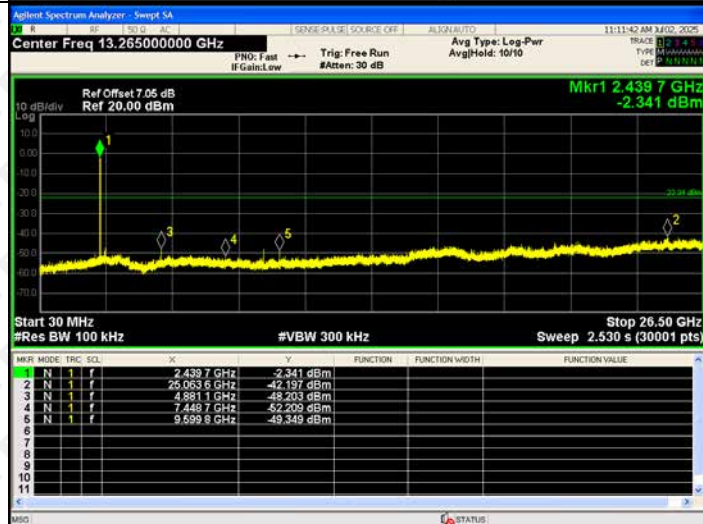


GFSK/HCH

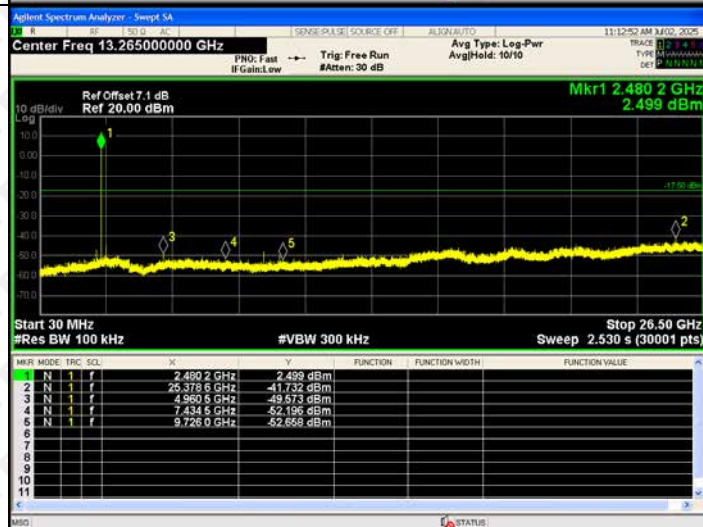



## 9. CODUCTED OUTPUT POWER

### 9.1 Block Diagram Of Test Setup

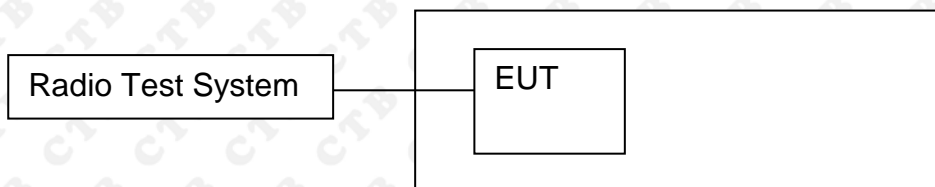

### 9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Channel power measurement. Sweep = auto; Detector Function = peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

## 9.4 Test Result

1M:

Mode	Channel.	Maximum Output Power [dBm]	Limit[dBm]	Verdict
GFSK	LCH	2.353	30	PASS
	MCH	2.896	30	PASS
	HCH	2.53	30	PASS

Duty Cycle

Mode	Channel.	Duty Cycle(%)	Correction Factor (dB)
GFSK	LCH	100	0
	MCH	100	0
	HCH	100	0

2M:




Mode	Channel.	Maximum Output Power [dBm]	Limit[dBm]	Verdict
GFSK	LCH	2.445	30	PASS
	MCH	3.053	30	PASS
	HCH	2.686	30	PASS

Duty Cycle

Mode	Channel.	Duty Cycle(%)	Correction Factor (dB)
GFSK	LCH	100	0
	MCH	100	0
	HCH	100	0




1M:

**Test Graph:**

<p>GFSK Low channel</p>		
<p>GFSK Mid channel</p>		
<p>GFSK High channel</p>		

2M:


Test Graph:

<p>GFSK Low channel</p>		
<p>GFSK Mid channel</p>		
<p>GFSK High channel</p>		



### 10. 6DB OCCUPIED BANDWIDTH

#### 10.1 Block Diagram Of Test Setup

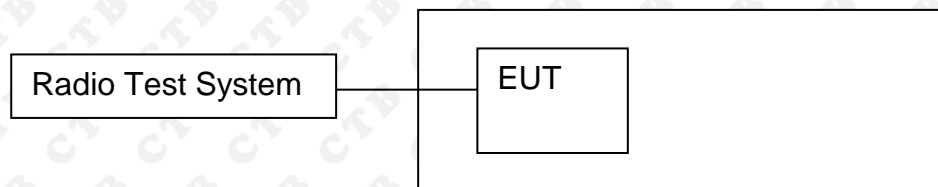

#### 10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS

#### 10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 10.4 Test Result

1M:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit (KHz)	Result
GFSK	Low channel	0.662	>= 500	PASS
	Mid channel	0.636	>= 500	PASS
	High channel	0.648	>= 500	PASS

2M:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit (KHz)	Result
GFSK	Low channel	1.134	>= 500	PASS
	Mid channel	1.134	>= 500	PASS
	High channel	1.136	>= 500	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

1M:

Test Graph:

<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied PW</p> <p>Center Freq: 2.40200000 GHz</p> <p>Ref Offset: 7.03 dB Ref: 27.03 dBm</p> <p>Mkr3: 2.402361 GHz -4.5029 dBm</p> <p>Center: 2.402 GHz #Res BW: 100 kHz</p> <p>Occupied Bandwidth: 1.0439 MHz</p> <p>Total Power: 8.50 dBm</p> <p>Transmit Freq Error: 29.978 kHz</p> <p>x dB Bandwidth: 662.3 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>	
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied PW</p> <p>Center Freq: 2.44000000 GHz</p> <p>Ref Offset: 7.05 dB Ref: 27.05 dBm</p> <p>Mkr3: 2.440349 GHz -2.5709 dBm</p> <p>Center: 2.44 GHz #Res BW: 100 kHz</p> <p>Occupied Bandwidth: 1.0473 MHz</p> <p>Total Power: 9.00 dBm</p> <p>Transmit Freq Error: 30.757 kHz</p> <p>x dB Bandwidth: 635.6 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>	
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied PW</p> <p>Center Freq: 2.48000000 GHz</p> <p>Ref Offset: 7.1 dB Ref: 27.10 dBm</p> <p>Mkr3: 2.480356 GHz -3.9012 dBm</p> <p>Center: 2.48 GHz #Res BW: 100 kHz</p> <p>Occupied Bandwidth: 1.0439 MHz</p> <p>Total Power: 8.66 dBm</p> <p>Transmit Freq Error: 31.616 kHz</p> <p>x dB Bandwidth: 648.5 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>	

2M:


Test Graph:

<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied PW</p> <p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Device: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref 27.03 dBm</p> <p>Mkr3 2.402611 GHz</p> <p>-7.8297 dBm</p> <p>Center 2.402 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 5 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth 2.0553 MHz</p> <p>Total Power 8.81 dBm</p> <p>Transmit Freq Error 44.002 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.134 MHz</p> <p>x dB -6.00 dB</p>
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied PW</p> <p>Center Freq 2.44000000 GHz</p> <p>Center Freq: 2.44000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Device: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.05 dB</p> <p>Ref 27.05 dBm</p> <p>Mkr3 2.44061 GHz</p> <p>-5.6854 dBm</p> <p>Center 2.44 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 5 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth 2.0612 MHz</p> <p>Total Power 9.28 dBm</p> <p>Transmit Freq Error 43.271 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.134 MHz</p> <p>x dB -6.00 dB</p>
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied PW</p> <p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Device: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.1 dB</p> <p>Ref 27.10 dBm</p> <p>Mkr3 2.480603 GHz</p> <p>-4.1958 dBm</p> <p>Center 2.48 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 5 MHz</p> <p>Sweep 1 ms</p> <p>Occupied Bandwidth 2.0549 MHz</p> <p>Total Power 9.07 dBm</p> <p>Transmit Freq Error 34.971 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 1.136 MHz</p> <p>x dB -6.00 dB</p>



## 11. POWER SPECTRAL DENSITY

### 11.1 Block Diagram Of Test Setup

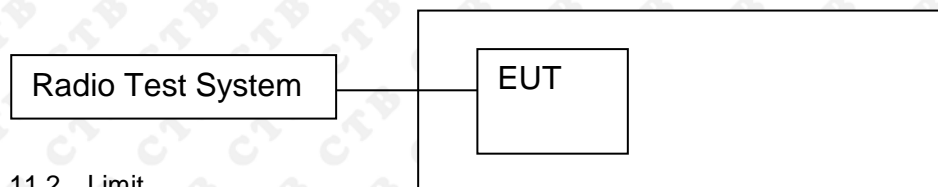

### 11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

### 11.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 11.4 Test Result

1M:

Mode	Channel.	Power Spectral Density (dBm/3KHz)	Limit(dBm/3KHz)	Verdict
GFSK	LCH	-13.255	8	PASS
GFSK	MCH	-12.689	8	PASS
GFSK	HCH	-13.043	8	PASS

2M:

Mode	Channel.	Power Spectral Density (dBm/3KHz)	Limit(dBm/3KHz)	Verdict
GFSK	LCH	-15.776	8	PASS
GFSK	MCH	-14.965	8	PASS
GFSK	HCH	-15.188	8	PASS






1M:  
Test Graph

Graphs	
GFSK/LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.402 038 GHz -13.255 dBm Span 2.000 MHz Sweep 210.9 ms (1001 pts)</p>
GFSK/MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.440 018 GHz -12.689 dBm Span 2.000 MHz Sweep 210.9 ms (1001 pts)</p>
GFSK/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.480 020 GHz -13.043 dBm Span 2.000 MHz Sweep 210.9 ms (1001 pts)</p>

**2M:  
Test Graph**

Graphs

<p>GFSK/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.402 045 GHz -15.776 dBm Span 5.000 MHz Sweep 527.2 ms (1001 pts)</p>
<p>GFSK/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.44000000 GHz Ref Offset 7.05 dB Ref 20.00 dBm Mkr1 2.440 010 GHz -14.965 dBm Span 5.000 MHz Sweep 527.2 ms (1001 pts)</p>
<p>GFSK/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.48000000 GHz Ref Offset 7.1 dB Ref 20.00 dBm Mkr1 2.480 010 GHz -15.188 dBm Span 5.000 MHz Sweep 527.2 ms (1001 pts)</p>

## 12. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:


The EUT antenna is chip antenna. The best case gain of the antenna is 2.5dBi.



**13. EUT TEST SETUP PHOTOGRAPHS**

## Radiated Emissions

Below 1G

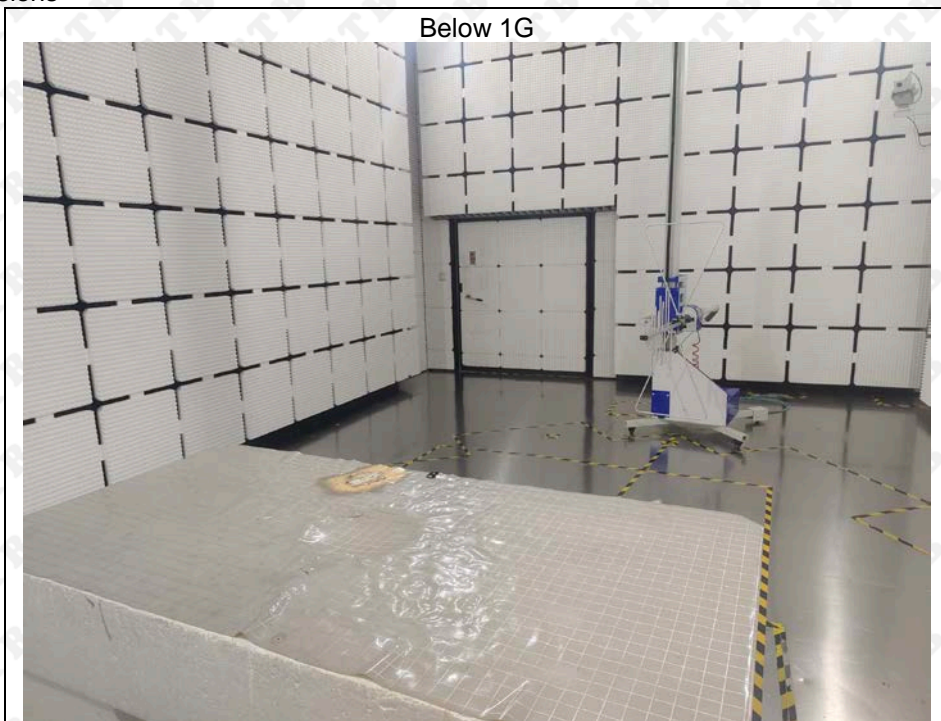


Above 1G





Conducted emission

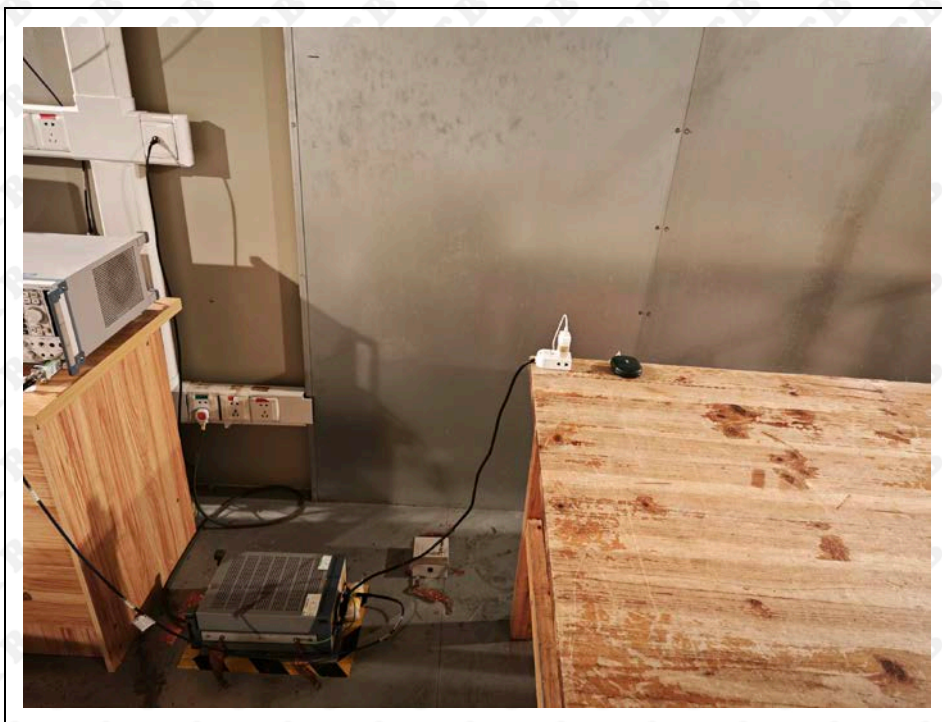

※※※※ END OF REPORT ※※※※