




FCC RADIO TEST REPORT

FCC ID : A4RGWSQ2
Equipment : Wireless Device
Model Name : GWSQ2
Applicant : Google LLC
1600 Amphitheatre Parkway,
Mountain View, CA, 94043 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Feb. 18, 2025 and testing was performed from Feb. 24, 2025 to Mar. 28, 2025. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements	21
4 List of Measuring Equipment.....	22
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR4D1913C	01	Initial issue of report	Apr. 09, 2025
FR4D1913C	02	Revise appendix A and appendix C This report is an updated version, replacing the report issued on Apr. 09, 2025.	Apr. 24, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Michelle Chen

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature
General Specs LTE/NTN, Bluetooth, BLE, BLE ASK, BLE GFSK, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, NFC, UWB, 60GHz and GNSS.
Antenna Type WLAN: PIFA Antenna

EUT Information List	
S/N	Performed Test Item
51161WRCVL125M	RF Conducted Measurement
51151WRCVL11SA	Radiated Spurious Emission
51161WRCVL11X9	Conducted Emission

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	-3.4

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH02-HY, CO05-HY, 03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find X plane as worst plane.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

This device support 26/52/106/242-tone RU.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel.

The power of 802.11ac modes are less than 802.11n mode, so all conducted and radiated tests are covered by 802.11n mode.

The final test modes include the worst data rates for each modulation shown in the table below.


Single Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ax HE20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :WLAN (2.4GHz) 802.11b Channel 06 Tx + USB cable (Charging from AC Adapter)
Remark: 1. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. 2. The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

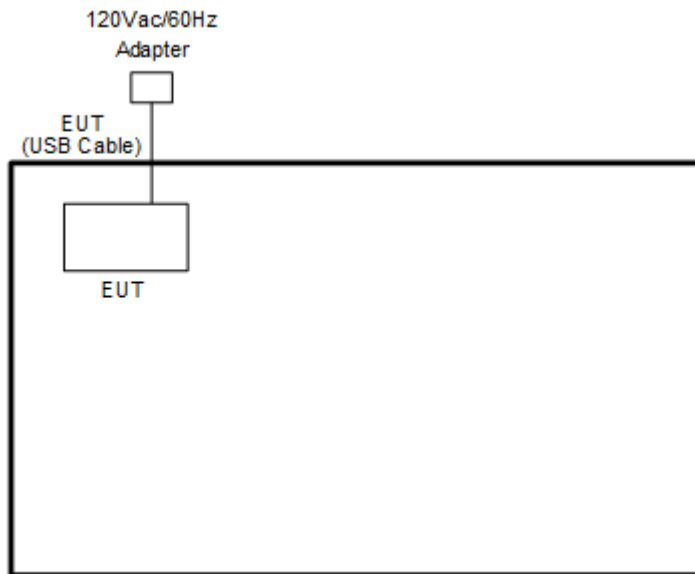

<WLAN Tx Mode>

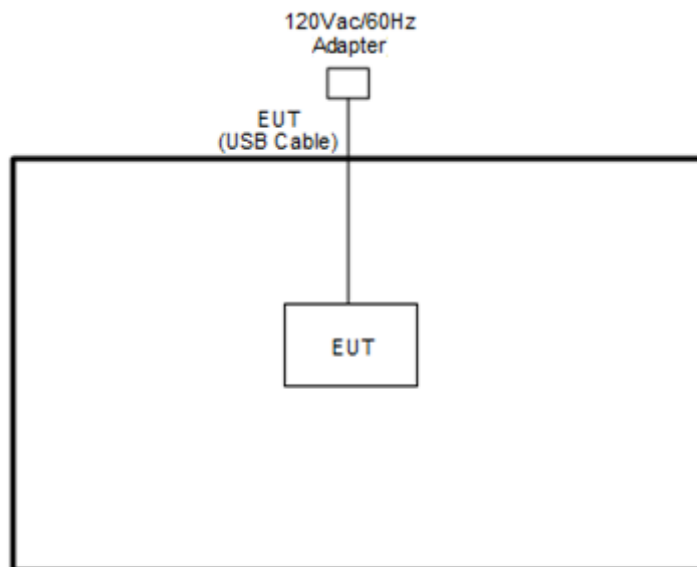



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Adapter	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “adb version 1.0.41” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 4.2 + 10 = 14.2 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup



3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup

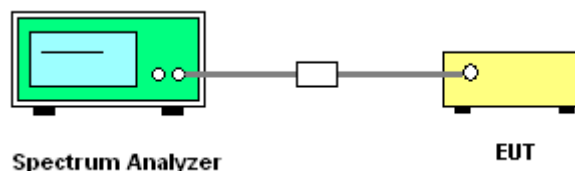

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

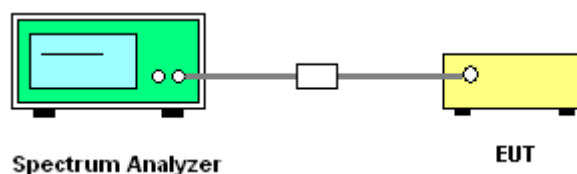

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.


7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.

For average measurement:


 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

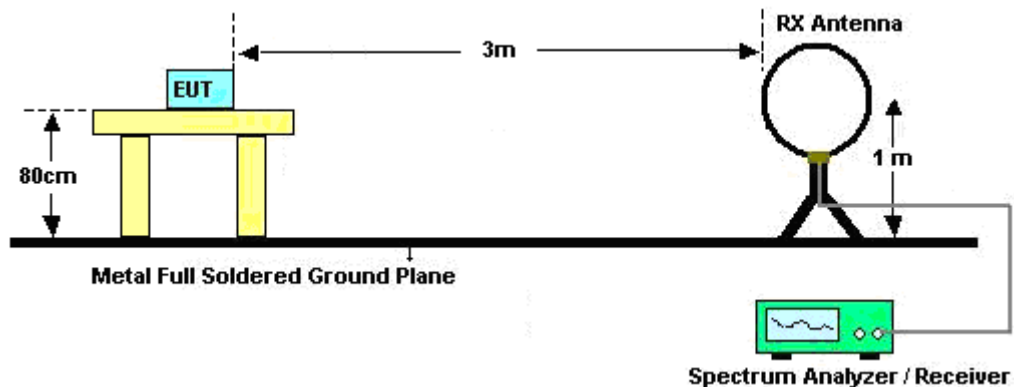


For radiated emissions from 30MHz to 1GHz

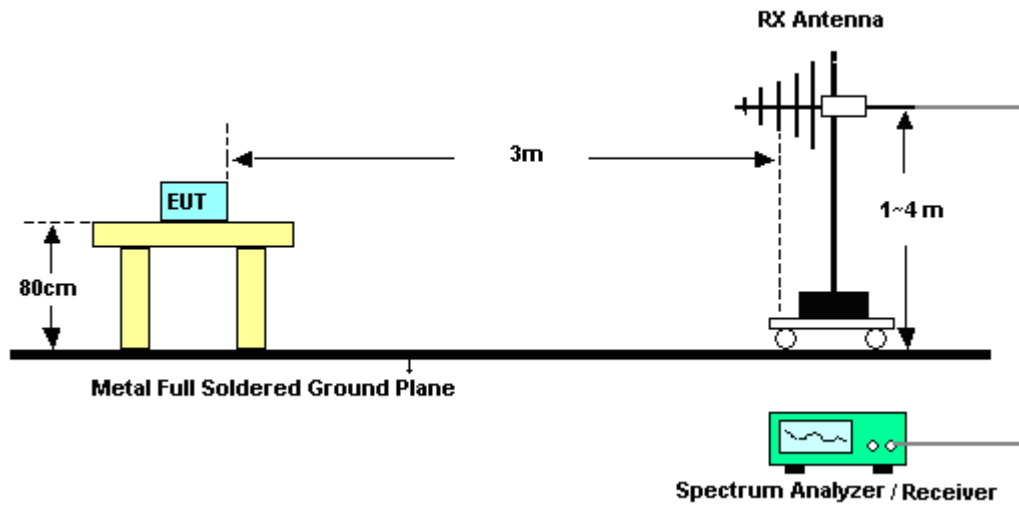

For radiated test from 1GHz to 18GHz

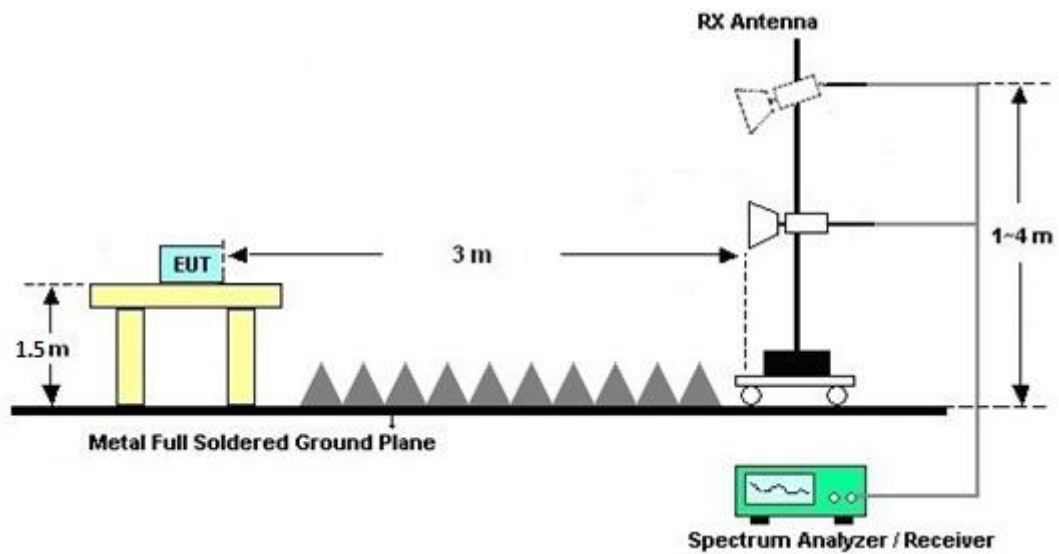

For radiated test above 18GHz

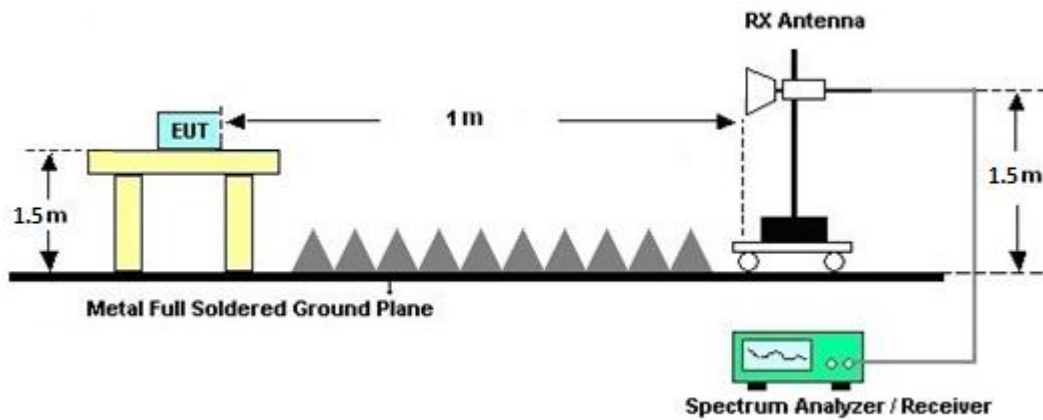

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

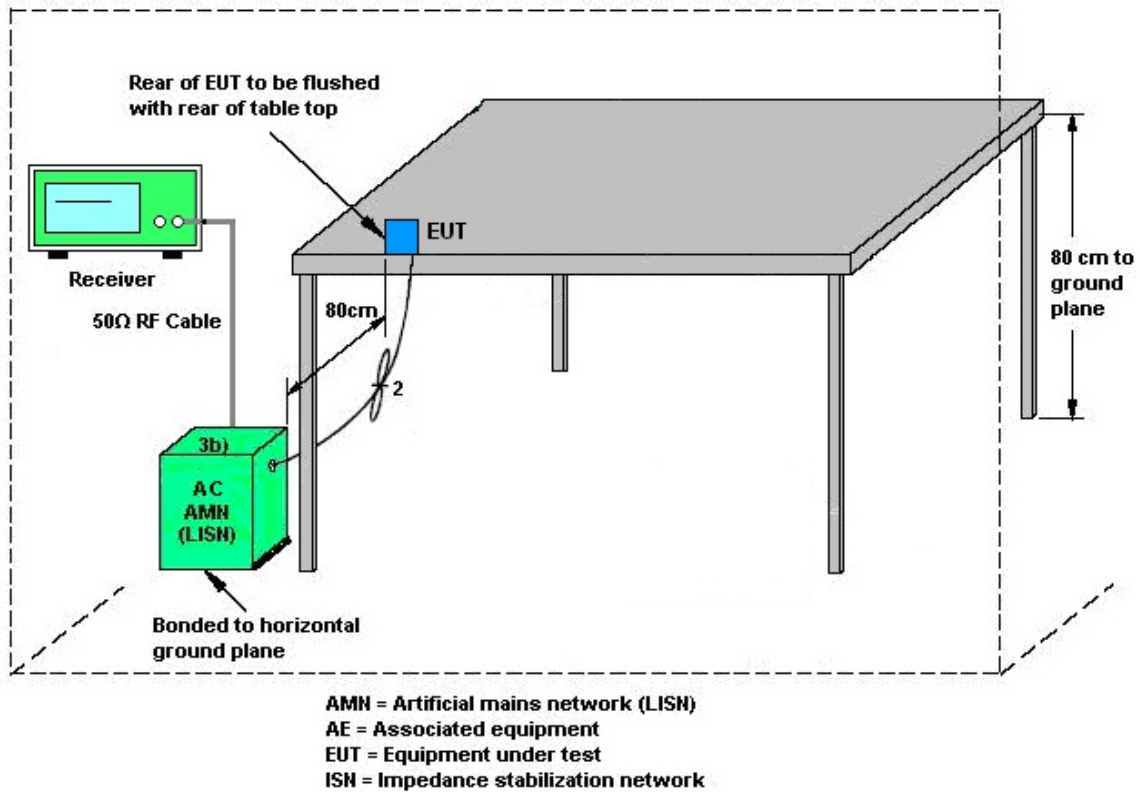

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

b) Unique (non-standard) antenna connector.

Use of a standard connector is also allowed if the connector is within the transmitter enclosure and can only be accessed by disassembly of the transmitter, where such disassembly is not normally required. The user manual must not show that user has access to the connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35419 & 03	30MHz~1GHz	Apr. 22, 2024	Mar. 14, 2025~ Mar. 20, 2025	Apr. 21, 2025	Radiation (03CH07-HY)
BT Base Station	Rohde & Schwarz	CBT	100815	BT 3.0 & 4.0	Feb. 26, 2025	Mar. 14, 2025~ Mar. 20, 2025	Feb. 25, 2026	Radiation (03CH07-HY)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00075962	1GHz ~ 18GHz	Nov. 28, 2024	Mar. 14, 2025~ Mar. 20, 2025	Nov. 27, 2025	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Mar. 06, 2025	Mar. 14, 2025~ Mar. 20, 2025	Mar. 05, 2026	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 19, 2024	Mar. 14, 2025~ Mar. 20, 2025	Apr. 18, 2025	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Oct. 01, 2024	Mar. 14, 2025~ Mar. 20, 2025	Sep. 30, 2025	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Aug. 05, 2024	Mar. 14, 2025~ Mar. 20, 2025	Aug. 04, 2025	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Mar. 23, 2024	Mar. 14, 2025~ Mar. 20, 2025	Mar. 22, 2025	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 26, 2024	Mar. 14, 2025~ Mar. 20, 2025	Mar. 25, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4 MY15682/4	30MHz to 18GHz	Feb. 20, 2025	Mar. 14, 2025~ Mar. 20, 2025	Feb. 19, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4	9kHz to 30MHz	Feb. 20, 2025	Mar. 14, 2025~ Mar. 20, 2025	Feb. 19, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 14, 2024	Mar. 14, 2025~ Mar. 20, 2025	Sep. 13, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 20, 2025	Mar. 14, 2025~ Mar. 20, 2025	Feb. 19, 2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 22, 2024	Mar. 14, 2025~ Mar. 20, 2025	Apr. 21, 2025	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Mar. 14, 2025~ Mar. 20, 2025	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Mar. 14, 2025~ Mar. 20, 2025	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Mar. 14, 2025~ Mar. 20, 2025	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Mar. 14, 2025~ Mar. 20, 2025	N/A	Radiation (03CH07-HY)
Attenuator	HONOVA	5910 SMA-50-005-1 9-NE	ATT-36	N/A	Feb. 11, 2025	Mar. 14, 2025~ Mar. 20, 2025	Feb. 10, 2026	Radiation (03CH07-HY)
Software	Audix	E3	N/A	N/A	N/A	Mar. 14, 2025~ Mar. 20, 2025	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	Feb. 24, 2025	Mar. 14, 2025~ Mar. 20, 2025	Feb. 23, 2026	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	00991	18GHz-40GHz	Jun. 04, 2024	Mar. 14, 2025~ Mar. 20, 2025	Jun. 03, 2025	Radiation (03CH07-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	Mar. 28, 2025	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 10, 2024	Mar. 28, 2025	Dec. 09, 2025	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 14, 2024	Mar. 28, 2025	Oct. 13, 2025	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 14, 2024	Mar. 28, 2025	Nov. 13, 2025	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	Mar. 28, 2025	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 30, 2024	Mar. 28, 2025	Jul. 29, 2025	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	MQT24082501	N/A	Oct. 15, 2024	Mar. 28, 2025	Oct. 14, 2025	Conduction (CO05-HY)
Hygrometer	TECEPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Feb. 24, 2025~ Mar. 28, 2025	Oct. 31, 2025	Conducted (TH02-HY)
Power Sensor	DARE	RPR3006W	13100030SNO31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Feb. 24, 2025~ Mar. 28, 2025	Jan. 08, 2026	Conducted (TH02-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Jul. 04, 2024	Feb. 24, 2025~ Mar. 28, 2025	Jul. 03, 2025	Conducted (TH02-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 04, 2024	Feb. 24, 2025~ Mar. 28, 2025	Jul. 03, 2025	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Feb. 24, 2025~ Mar. 28, 2025	Aug. 22, 2025	Conducted (TH02-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Feb. 24, 2025~ Mar. 28, 2025	May 19, 2025	Conducted (TH02-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Feb. 24, 2025~ Mar. 28, 2025	N/A	Conducted (TH02-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Willy Chang	Temperature:	21~25	°C
Test Date:	2025/2/24~2025/3/28	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant0	Ant1	Ant0	Ant1		
11b	1Mbps	1	1	2412	13.54	-	9.02	-	0.50	Pass
11b	1Mbps	1	6	2437	13.33	-	9.01	-	0.50	Pass
11b	1Mbps	1	11	2462	13.46	-	9.02	-	0.50	Pass
11g	6Mbps	1	1	2412	19.64	-	16.33	-	0.50	Pass
11g	6Mbps	1	6	2437	25.07	-	16.31	-	0.50	Pass
11g	6Mbps	1	11	2462	22.92	-	16.32	-	0.50	Pass
HT20	MCS0	1	1	2412	19.04	-	17.56	-	0.50	Pass
HT20	MCS0	1	6	2437	28.71	-	17.54	-	0.50	Pass
HT20	MCS0	1	11	2462	19.36	-	17.56	-	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant0	Ant1	SUM	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	
11b	1Mbps	1	1	2412	20.48	-		30.00	-	-3.40	-	17.08	-	36.00	-	Pass
11b	1Mbps	1	6	2437	20.53	-		30.00	-	-3.40	-	17.13	-	36.00	-	Pass
11b	1Mbps	1	11	2462	20.91	-		30.00	-	-3.40	-	17.51	-	36.00	-	Pass
11g	6Mbps	1	1	2412	18.89	-		30.00	-	-3.40	-	15.49	-	36.00	-	Pass
11g	6Mbps	1	6	2437	20.68	-		30.00	-	-3.40	-	17.28	-	36.00	-	Pass
11g	6Mbps	1	11	2462	18.89	-		30.00	-	-3.40	-	15.49	-	36.00	-	Pass
HT20	MCS0	1	1	2412	17.66	-		30.00	-	-3.40	-	14.26	-	36.00	-	Pass
HT20	MCS0	1	6	2437	20.42	-		30.00	-	-3.40	-	17.02	-	36.00	-	Pass
HT20	MCS0	1	11	2462	18.86	-		30.00	-	-3.40	-	15.46	-	36.00	-	Pass
VHT20	MCS0	1	1	2412	17.64	-		30.00	-	-3.40	-	14.24	-	36.00	-	Pass
VHT20	MCS0	1	6	2437	20.27	-		30.00	-	-3.40	-	16.87	-	36.00	-	Pass
VHT20	MCS0	1	11	2462	18.77	-		30.00	-	-3.40	-	15.37	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant0	Ant1	Worse + 3.01	Ant0	Ant1	Ant0	Ant1	
11b	1Mbps	1	1	2412	-0.73	-		-3.40	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-0.96	-		-3.40	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-0.38	-		-3.40	-	8.00	-	Pass
11g	6Mbps	1	1	2412	-5.94	-		-3.40	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-4.87	-		-3.40	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-4.36	-		-3.40	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-6.39	-		-3.40	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-4.76	-		-3.40	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-7.25	-		-3.40	-	8.00	-	Pass

Note: Measured power density (dBm) has offset with cable loss.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna											
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config.	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
						Ant0	Ant1	Ant0	Ant1		
HE20	MCS0	1	1	2412	Full	19.40	-	19.00	-	0.50	Pass
HE20	MCS0	1	6	2437	Full	25.70	-	18.90	-	0.50	Pass
HE20	MCS0	1	11	2462	Full	19.30	-	19.00	-	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna																	
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config.	Average Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant0	Ant1	SUM	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	Ant0	Ant1	
HE20	MCS0	1	1	2412	Full	18.12	-		30.00	-	-3.40	-	14.72	-	36.00	-	Pass
HE20	MCS0	1	1	2412	26/0	9.26	-		30.00	-	-3.40	-	5.86	-	36.00	-	Pass
HE20	MCS0	1	1	2412	52/37	12.14	-		30.00	-	-3.40	-	8.74	-	36.00	-	Pass
HE20	MCS0	1	1	2412	106/53	14.09	-		30.00	-	-3.40	-	10.69	-	36.00	-	Pass
HE20	MCS0	1	6	2437	Full	20.65	-		30.00	-	-3.40	-	17.25	-	36.00	-	Pass
HE20	MCS0	1	6	2437	26/4	10.41	-		30.00	-	-3.40	-	7.01	-	36.00	-	Pass
HE20	MCS0	1	6	2437	52/38	13.78	-		30.00	-	-3.40	-	10.38	-	36.00	-	Pass
HE20	MCS0	1	6	2437	106/53	15.02	-		30.00	-	-3.40	-	11.62	-	36.00	-	Pass
HE20	MCS0	1	11	2462	Full	18.89	-		30.00	-	-3.40	-	15.49	-	36.00	-	Pass
HE20	MCS0	1	11	2462	26/8	8.59	-		30.00	-	-3.40	-	5.19	-	36.00	-	Pass
HE20	MCS0	1	11	2462	52/40	10.64	-		30.00	-	-3.40	-	7.24	-	36.00	-	Pass
HE20	MCS0	1	11	2462	106/54	12.90	-		30.00	-	-3.40	-	9.50	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.


TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna													
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config.	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant0	Ant1	Worse + 3.01	Ant0	Ant1	Ant0	Ant1	
HE20	MCS0	1	1	2412	Full	-6.67	-		-3.40	-	8.00	-	Pass
HE20	MCS0	1	1	2412	26/0	-6.93	-		-3.40	-	8.00	-	Pass
HE20	MCS0	1	1	2412	52/37	-7.06	-		-3.40	-	8.00	-	Pass
HE20	MCS0	1	1	2412	106/53	-7.06	-		-3.40	-	8.00	-	Pass
HE20	MCS0	1	6	2437	Full	-5.74	-		-3.40	-	8.00	-	Pass
HE20	MCS0	1	6	2437	26/4	-6.15	-		-3.40	-	8.00	-	Pass
HE20	MCS0	1	6	2437	52/38	-5.96	-		-3.40	-	8.00	-	Pass
HE20	MCS0	1	6	2437	106/53	-5.77	-		-3.40	-	8.00	-	Pass
HE20	MCS0	1	11	2462	Full	-8.41	-		-3.40	-	8.00	-	Pass
HE20	MCS0	1	11	2462	26/8	-8.68	-		-3.40	-	8.00	-	Pass
HE20	MCS0	1	11	2462	52/40	-8.83	-		-3.40	-	8.00	-	Pass
HE20	MCS0	1	11	2462	106/54	-8.93	-		-3.40	-	8.00	-	Pass

Note: Measured power density (dBm) has offset with cable loss.


**6dB and 99% Occupied Bandwidth**

<802.11b>

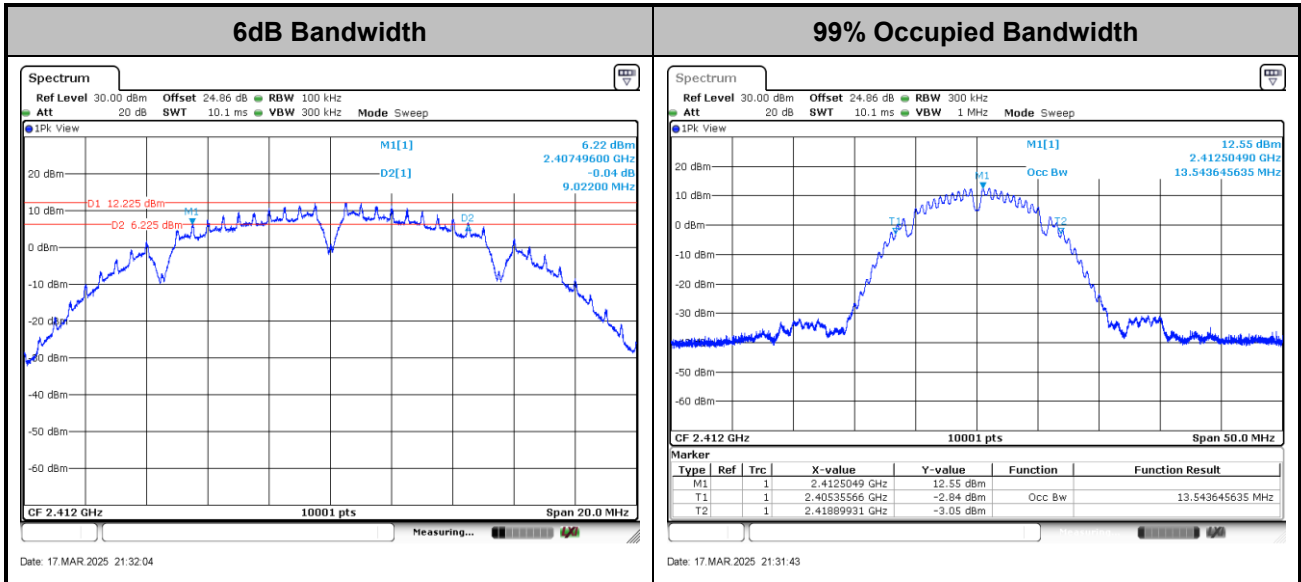

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11g>

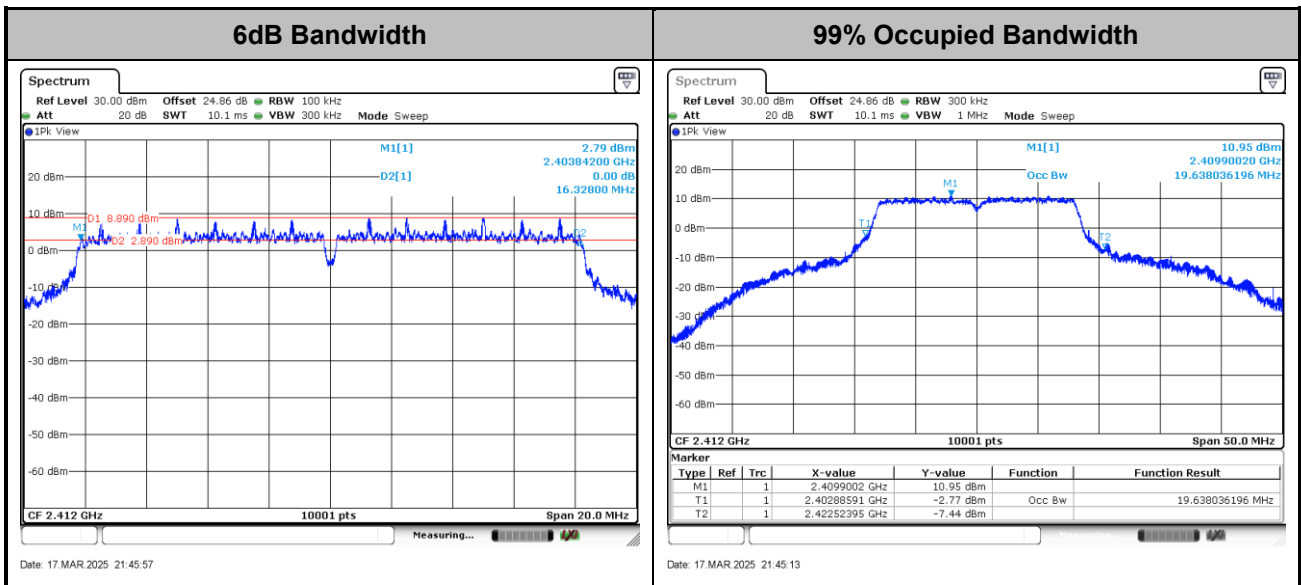

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11n HT20>

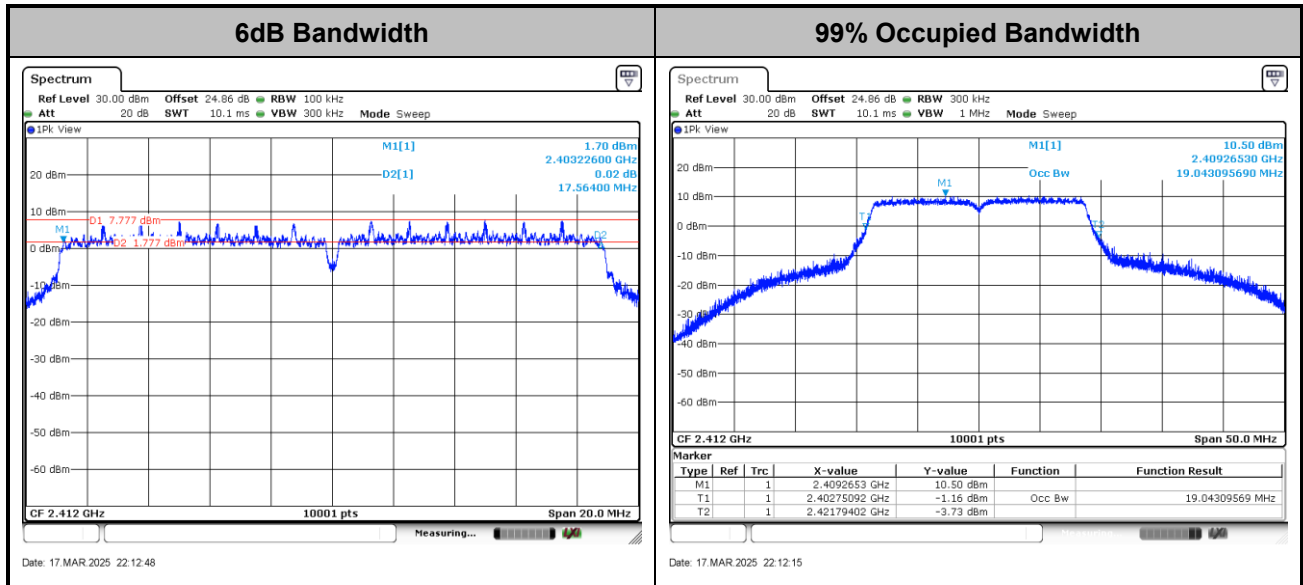

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ax HE20>

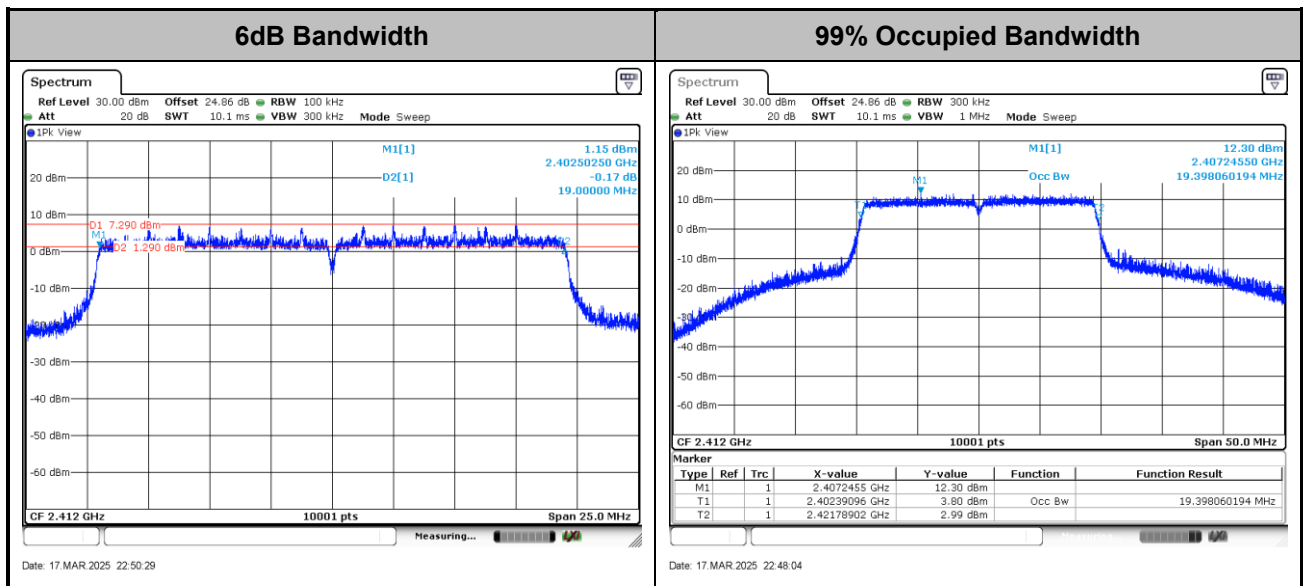


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



**Power Spectral Density(dBm/3kHz)**

<802.11b>

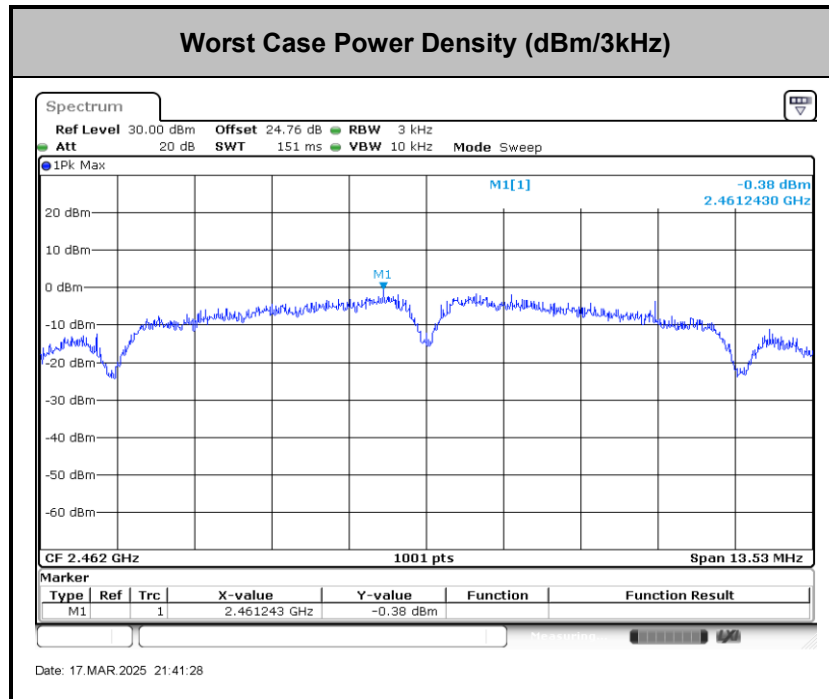

<802.11g>

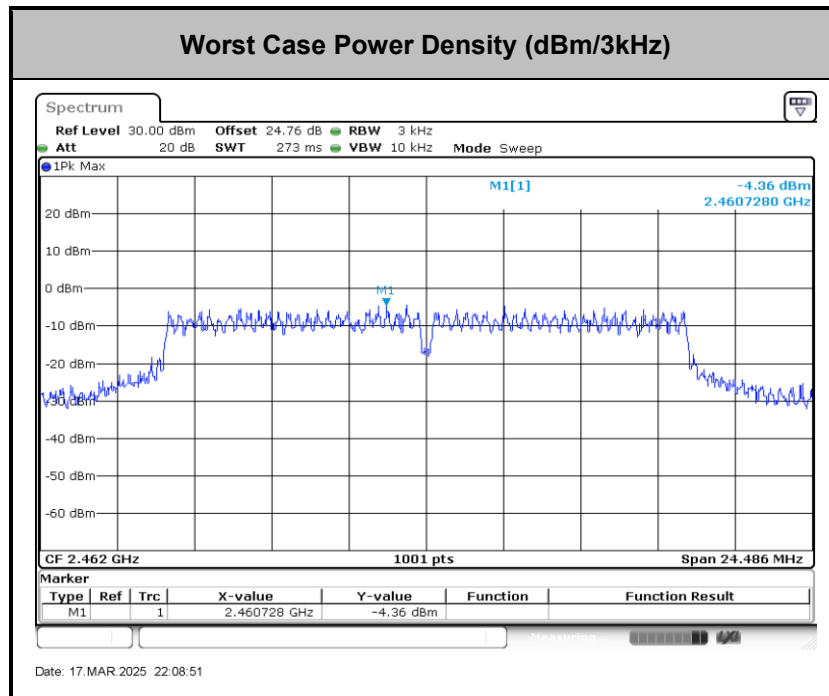
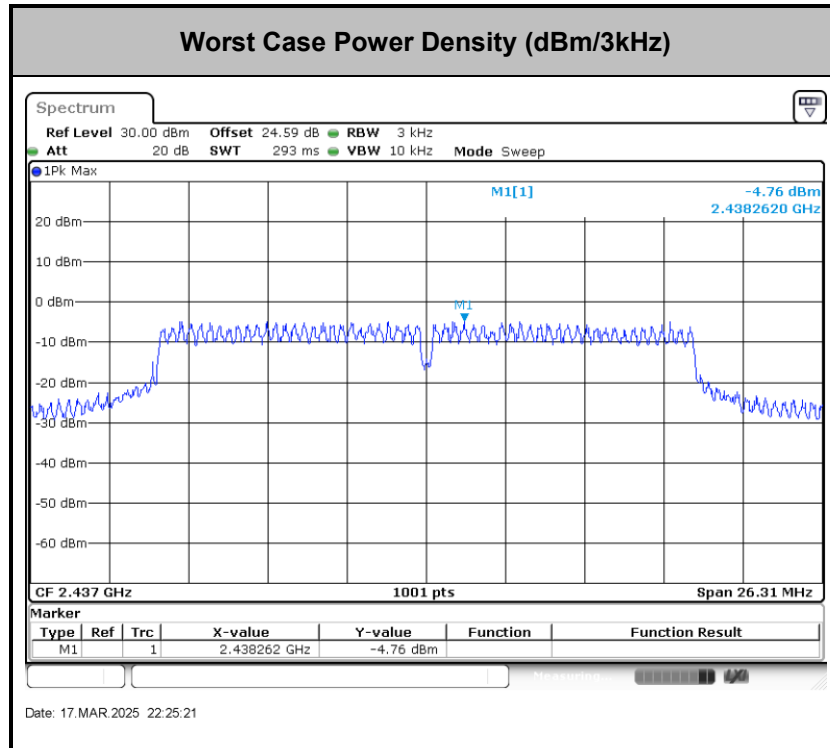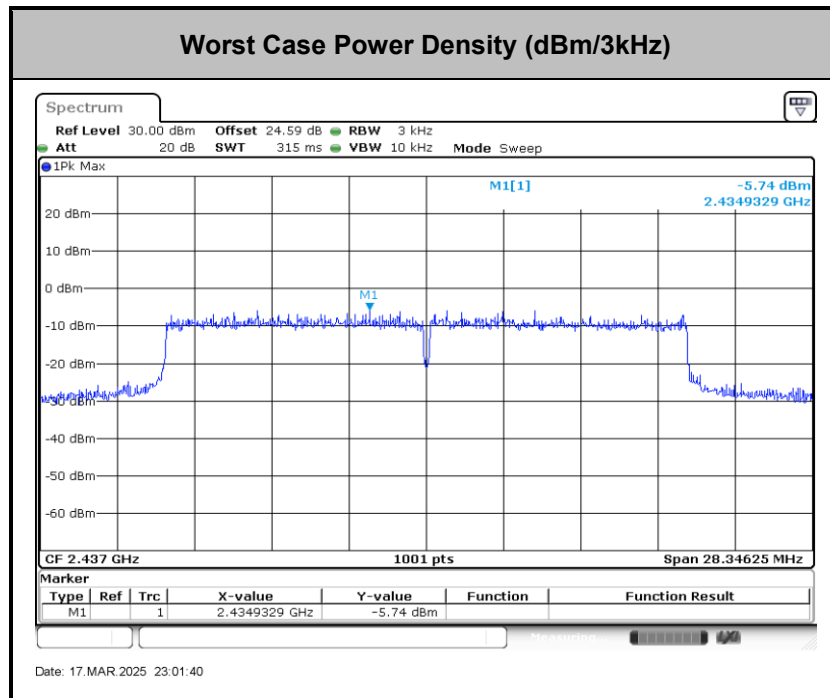
<802.11n HT20>

<802.11ax HE20>


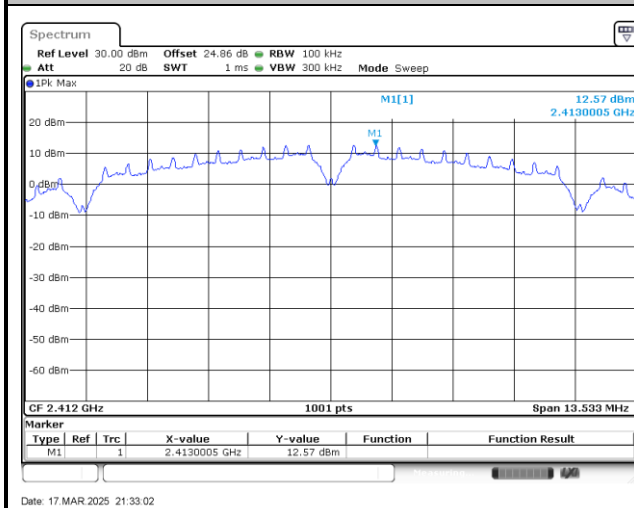


Band Edges and Spurious Emission


Test Mode : 802.11b

Test Channel : 01


100kHz PSD reference Level




Low Channel Plot

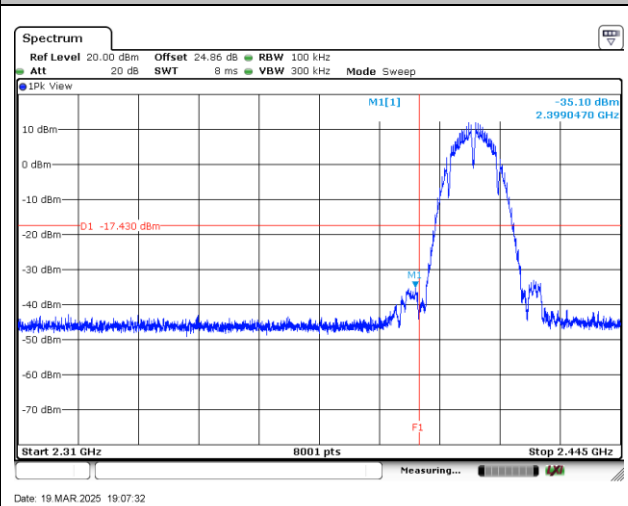

Spurious Emission 30MHz~1GHz

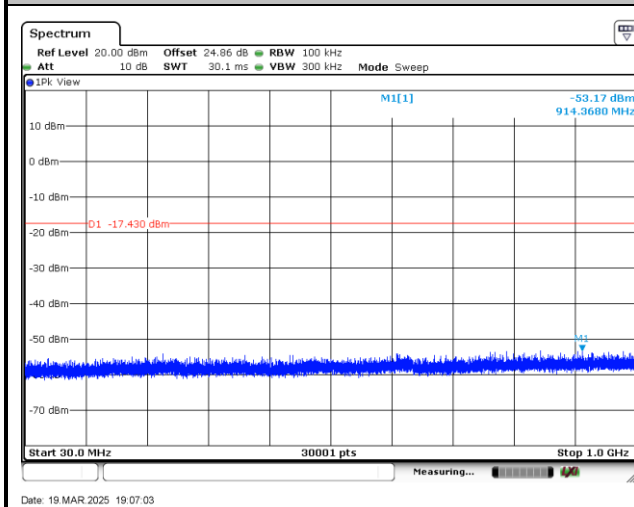

Spurious Emission 1GHz~26.5GHz

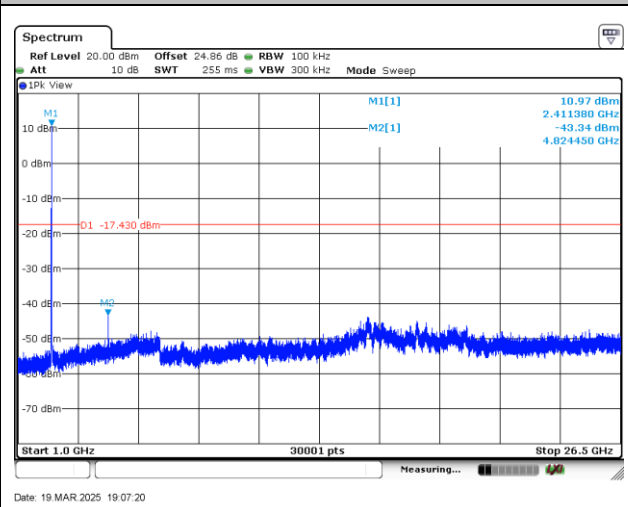




Test Mode : 802.11b


Test Channel : 06

100kHz PSD reference Level

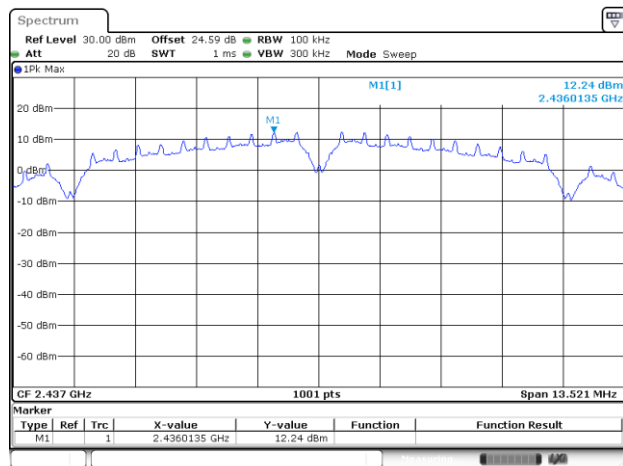


Middle Channel Plot

Spurious Emission 30MHz~1GHz

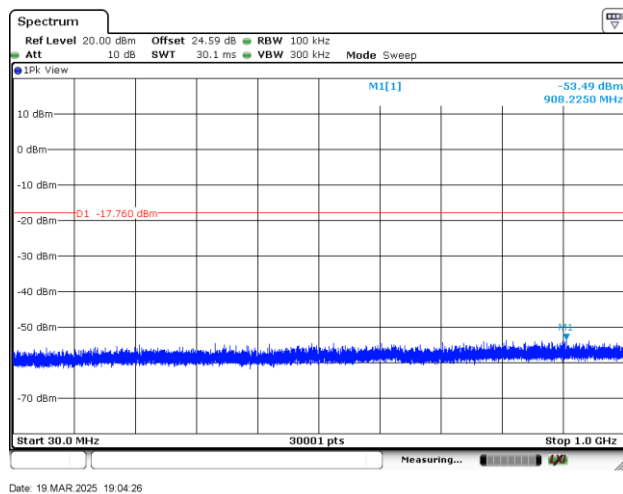

Spurious Emission 1GHz~26.5GHz

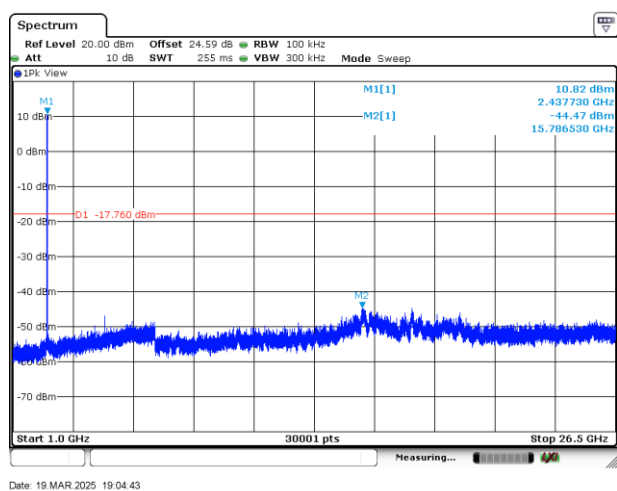





Test Mode : 802.11b

Test Channel : 11


100kHz PSD reference Level

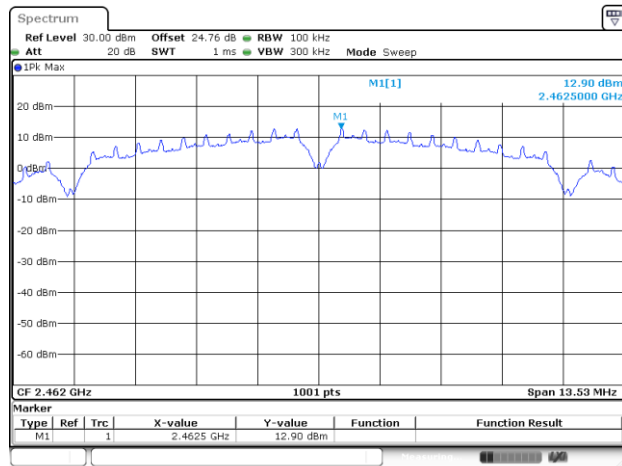


High Channel Plot

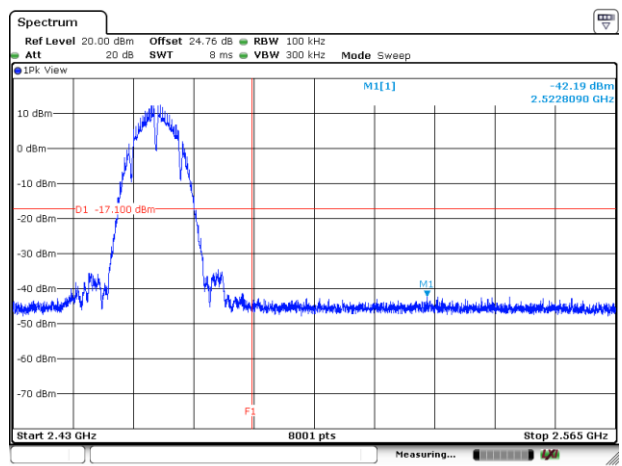

Spurious Emission 30MHz~1GHz

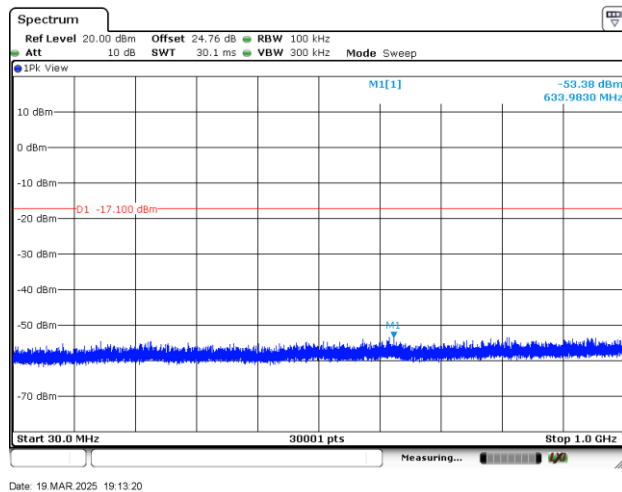

Spurious Emission 1GHz~26.5GHz

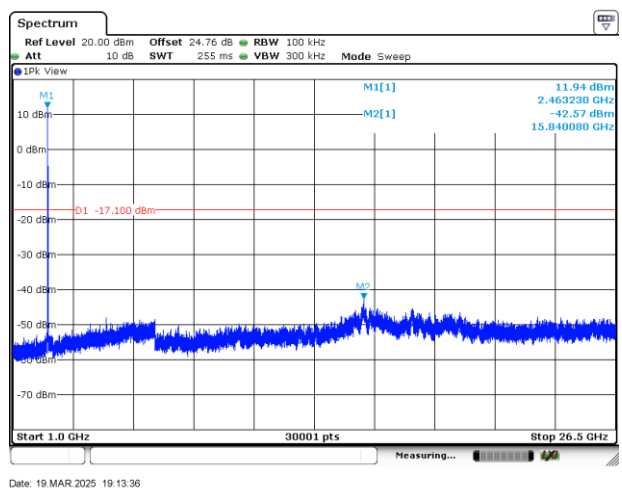





Test Mode : 802.11g

Test Channel : 01


100kHz PSD reference Level

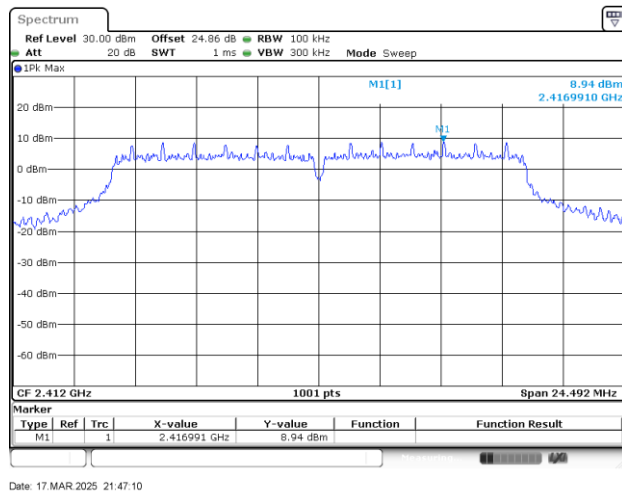


Low Channel Plot

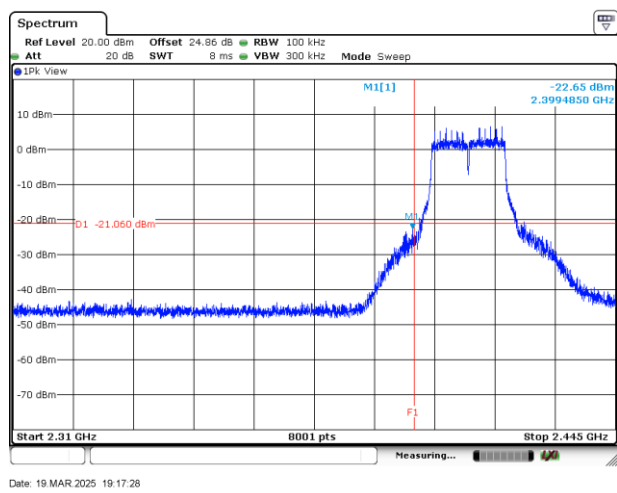

Spurious Emission 30MHz~1GHz

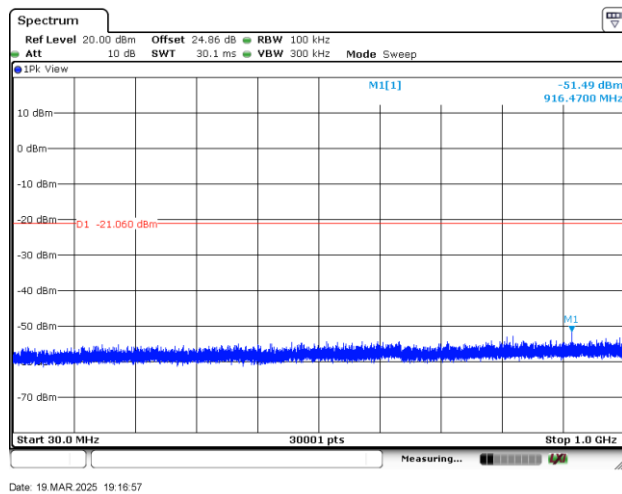

Spurious Emission 1GHz~26.5GHz

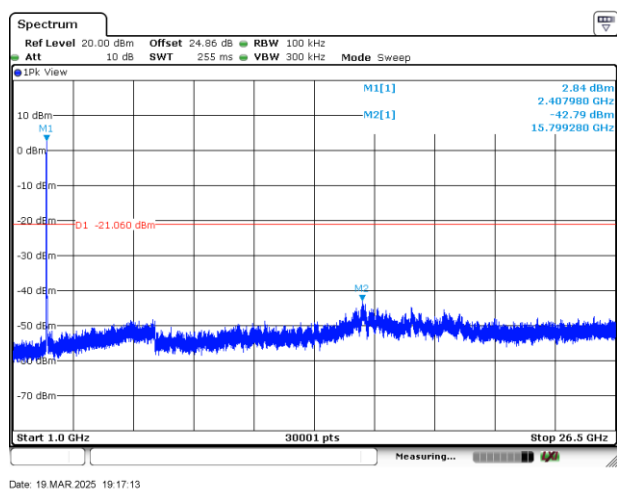




Test Mode : 802.11g


Test Channel : 06

100kHz PSD reference Level

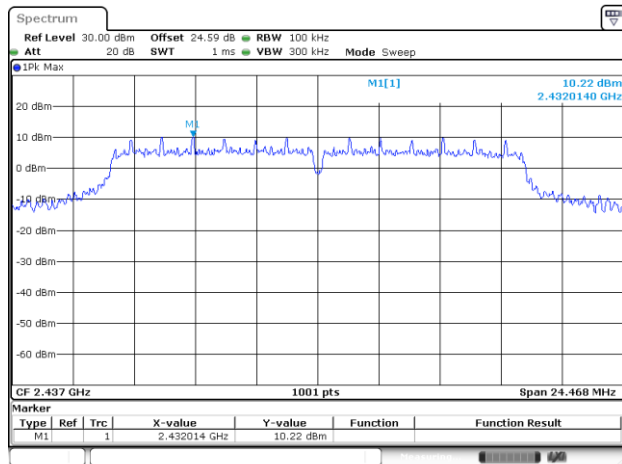


Middle Channel Plot

Spurious Emission 30MHz~1GHz

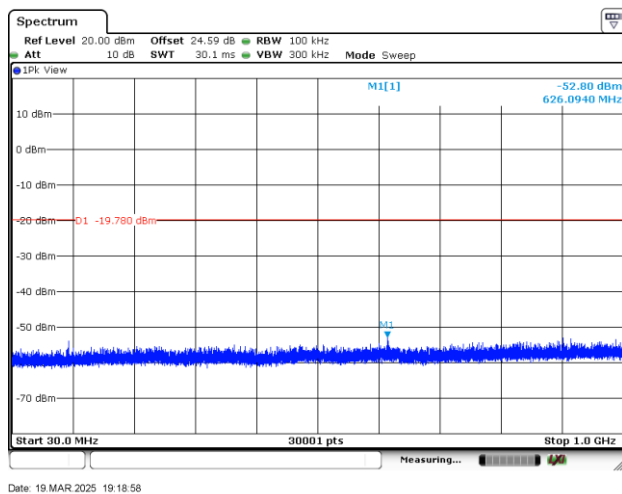

Spurious Emission 1GHz~26.5GHz

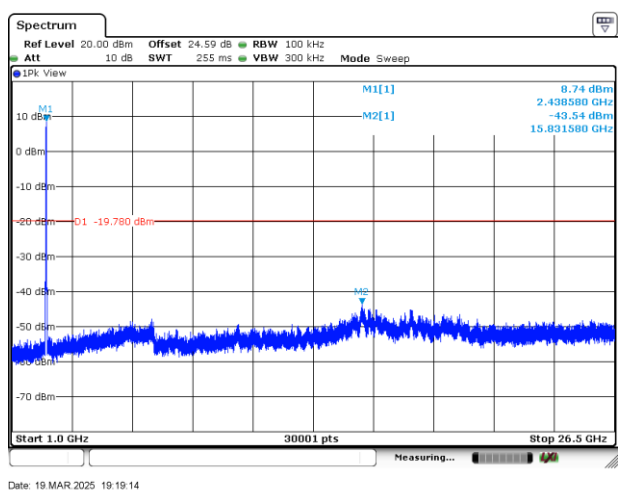





Test Mode : 802.11g

Test Channel : 11


100kHz PSD reference Level

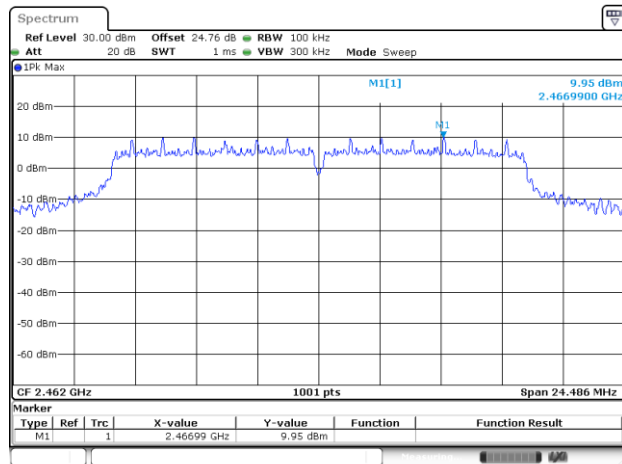


High Channel Plot

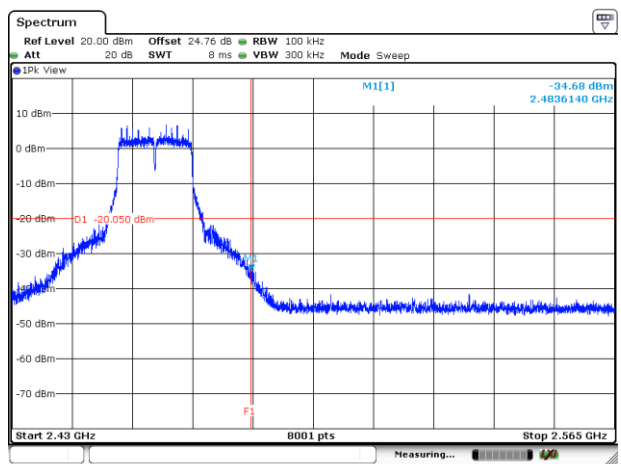

Spurious Emission 30MHz~1GHz

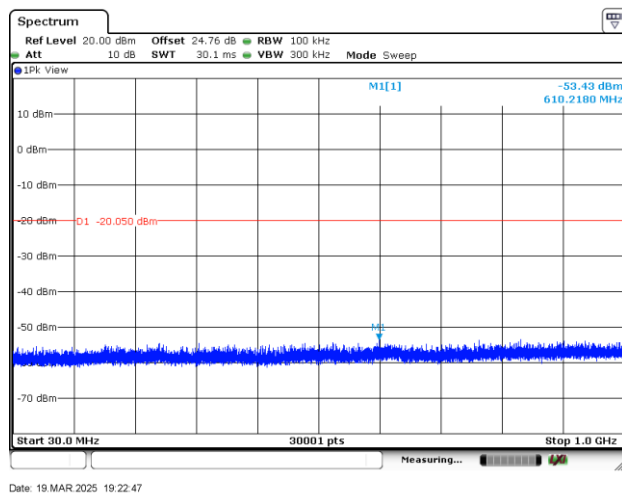

Spurious Emission 1GHz~26.5GHz

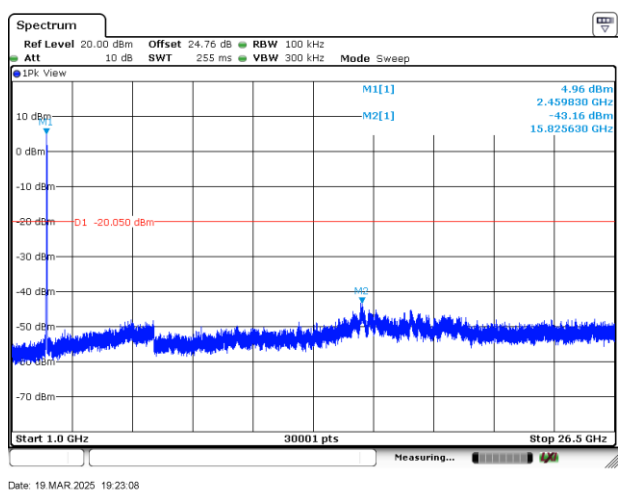





Test Mode : 802.11n HT20

Test Channel : 01


100kHz PSD reference Level

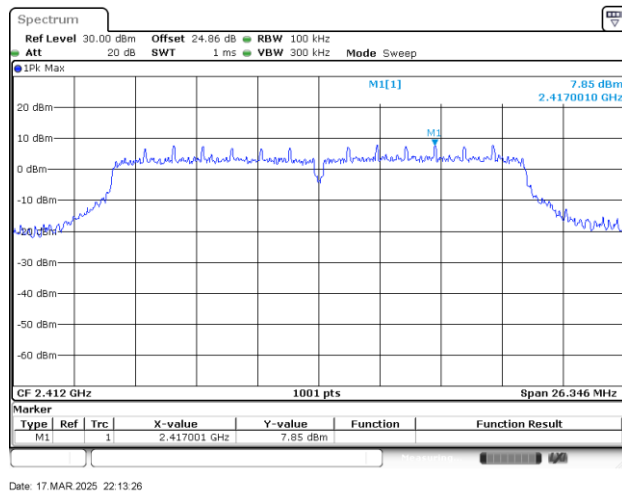


Low Channel Plot

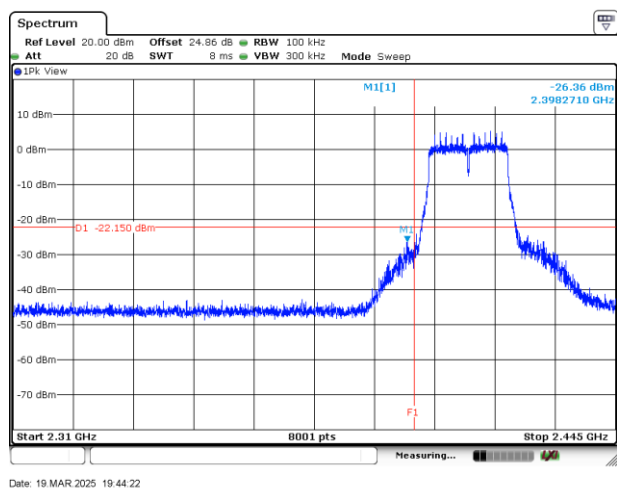

Spurious Emission 30MHz~1GHz

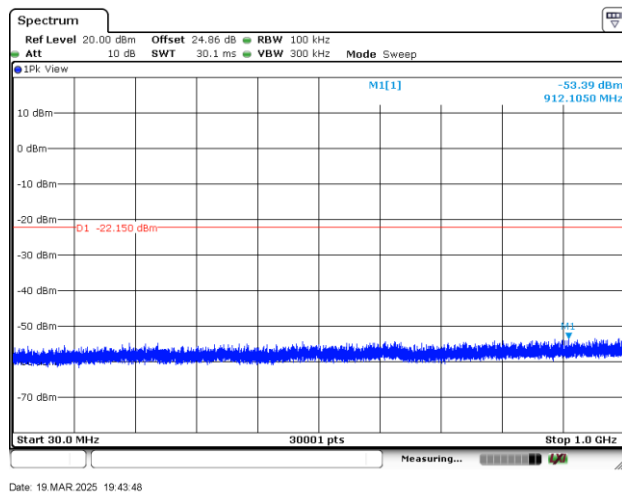

Spurious Emission 1GHz~26.5GHz

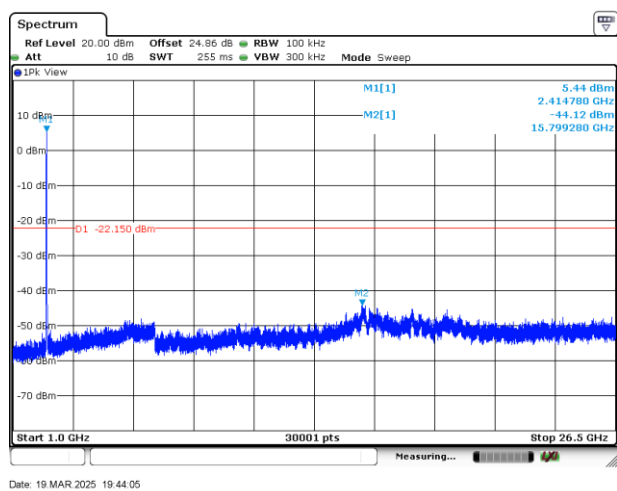




Test Mode : 802.11n HT20


Test Channel : 06

100kHz PSD reference Level

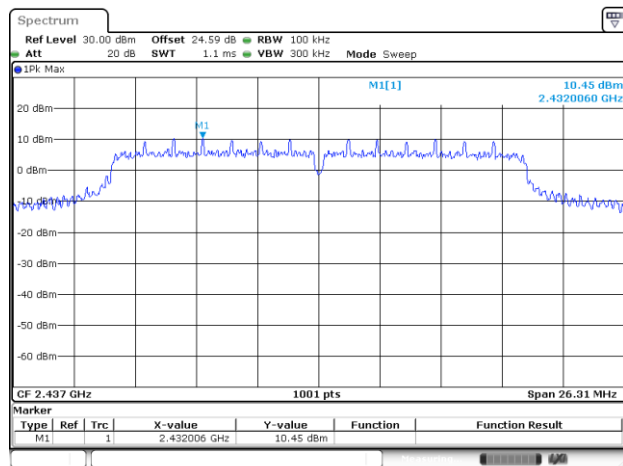


Middle Channel Plot

Spurious Emission 30MHz~1GHz

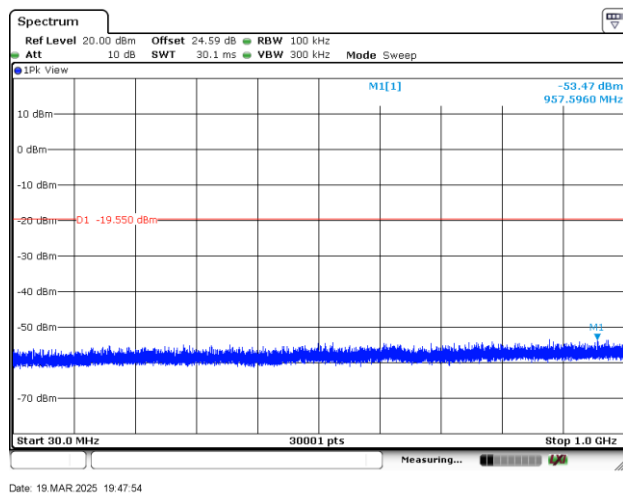

Spurious Emission 1GHz~26.5GHz

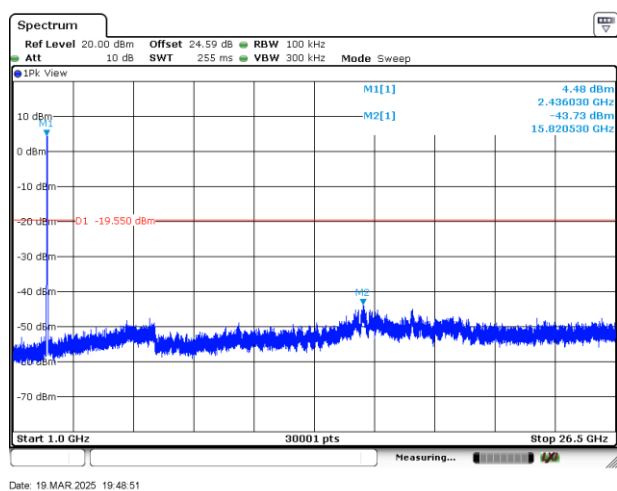





Test Mode : 802.11n HT20

Test Channel : 11


100kHz PSD reference Level

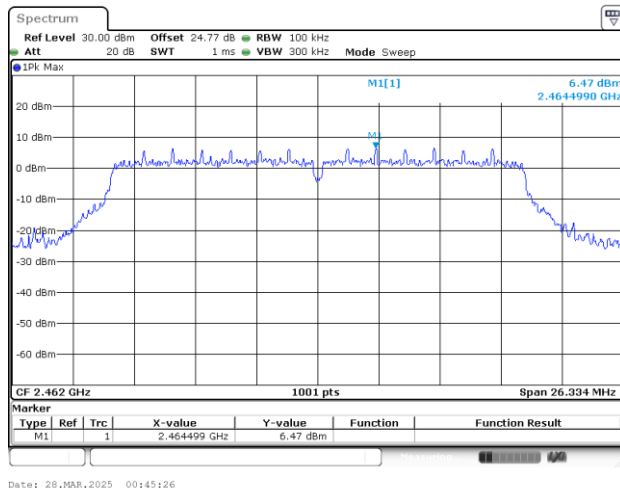


High Channel Plot

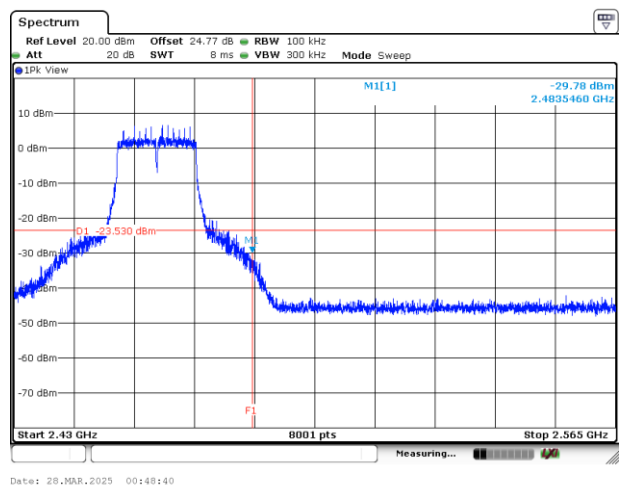

Spurious Emission 30MHz~1GHz

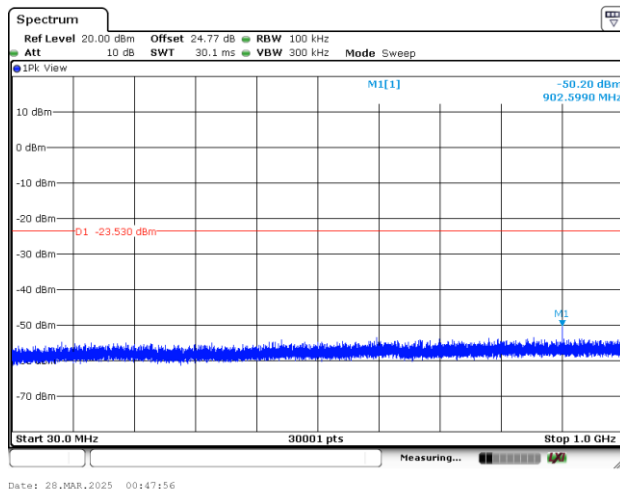

Spurious Emission 1GHz~26.5GHz

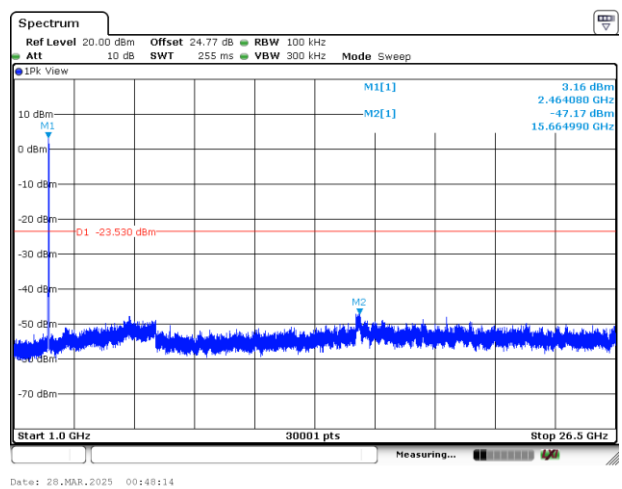





Test Mode : 802.11ax HE20_Full RU

Test Channel : 01


100kHz PSD reference Level

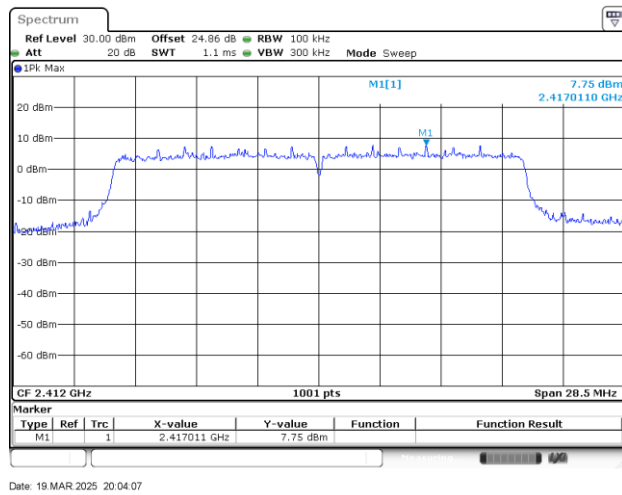


Low Channel Plot

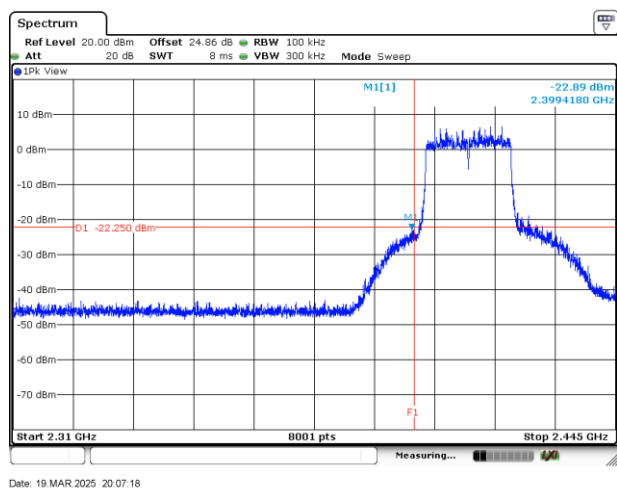

Spurious Emission 30MHz~1GHz

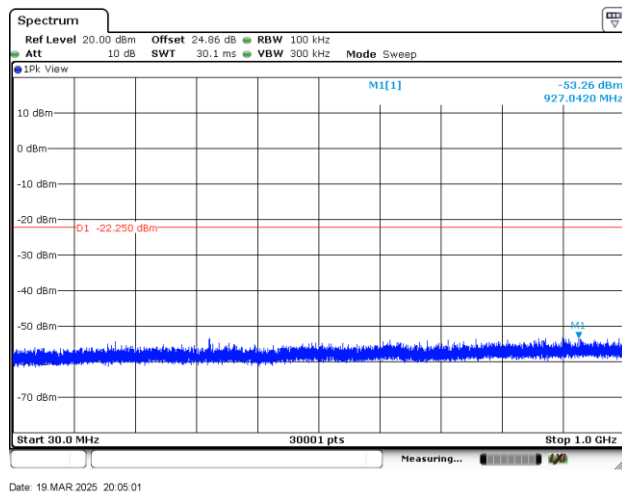

Spurious Emission 1GHz~26.5GHz

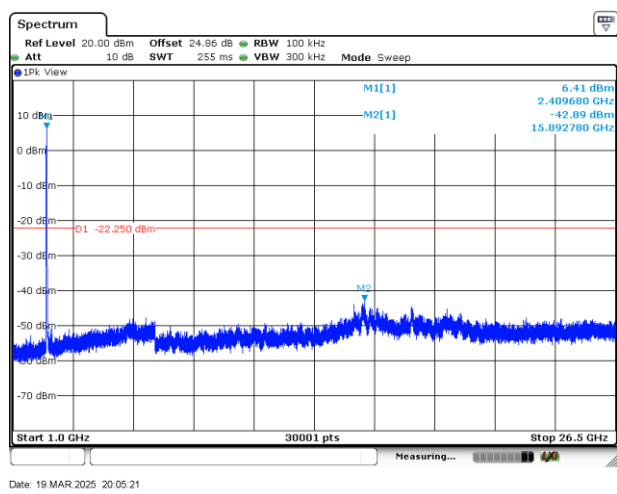




Test Mode : 802.11ax HE20_Full RU


Test Channel : 06

100kHz PSD reference Level

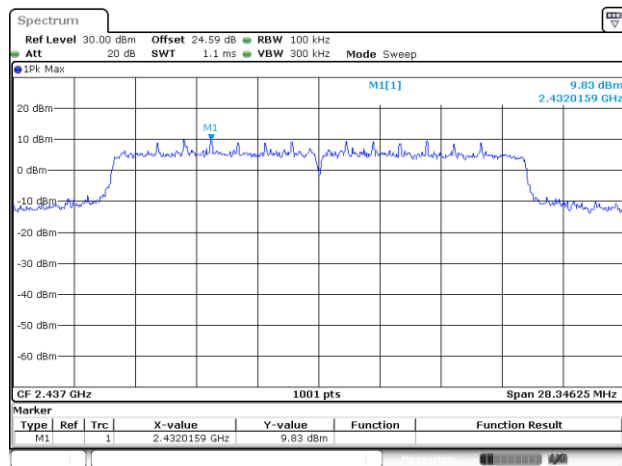


Middle Channel Plot

Spurious Emission 30MHz~1GHz

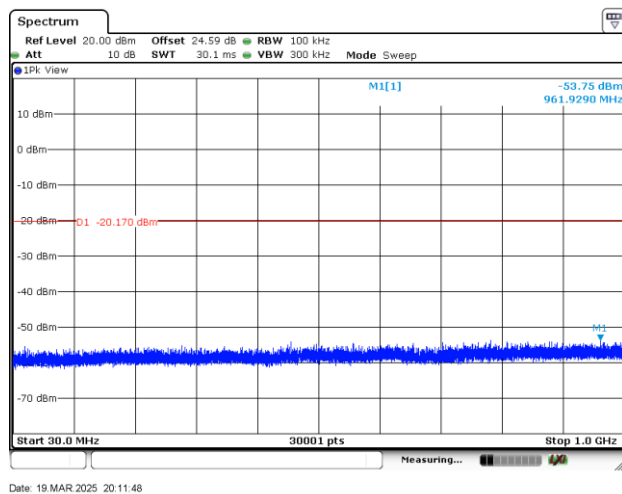

Spurious Emission 1GHz~26.5GHz

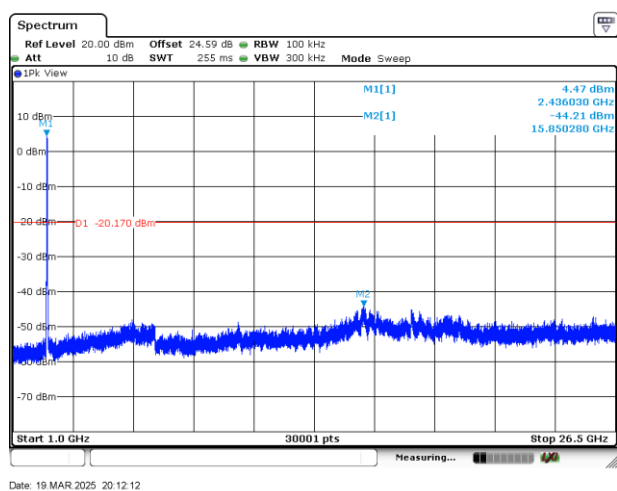





Test Mode : 802.11ax HE20_Full RU

Test Channel : 11


100kHz PSD reference Level

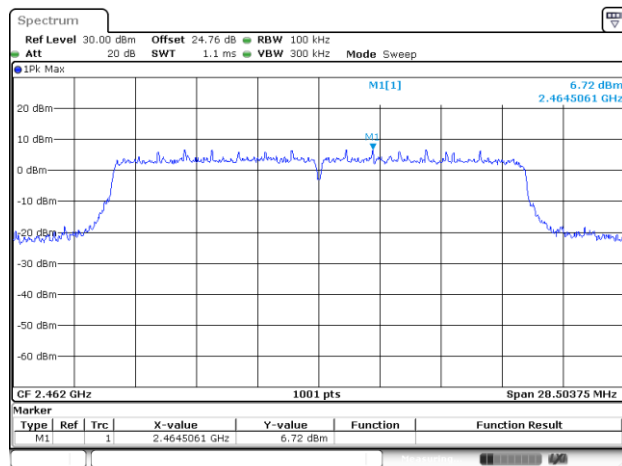


High Channel Plot

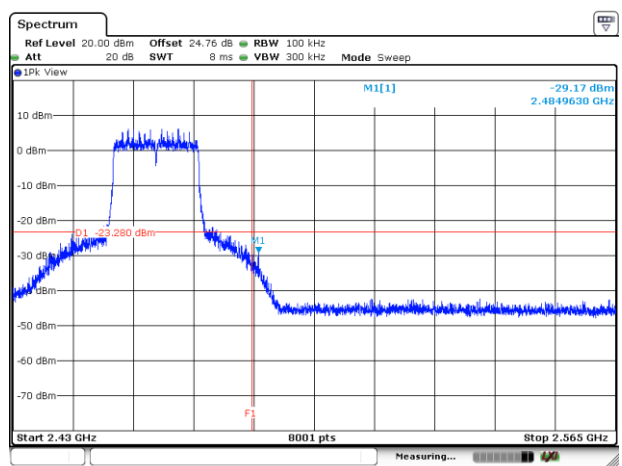

Spurious Emission 30MHz~1GHz

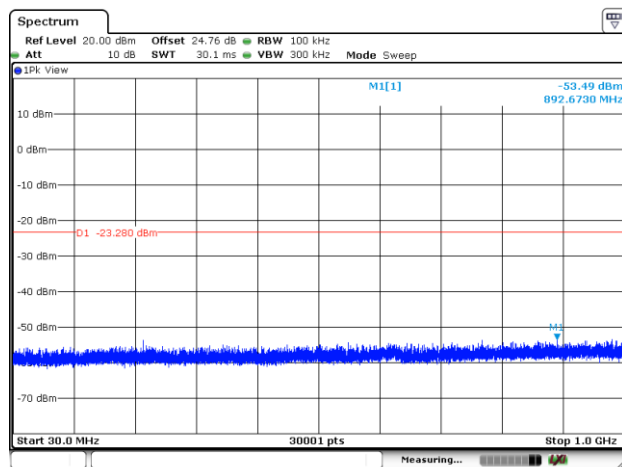

Spurious Emission 1GHz~26.5GHz

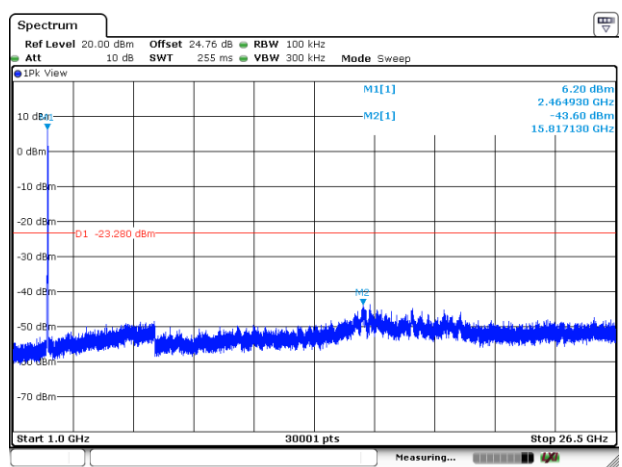




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26℃
		Relative Humidity :	45~55%

EUT Information

Report NO : 4D1913
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

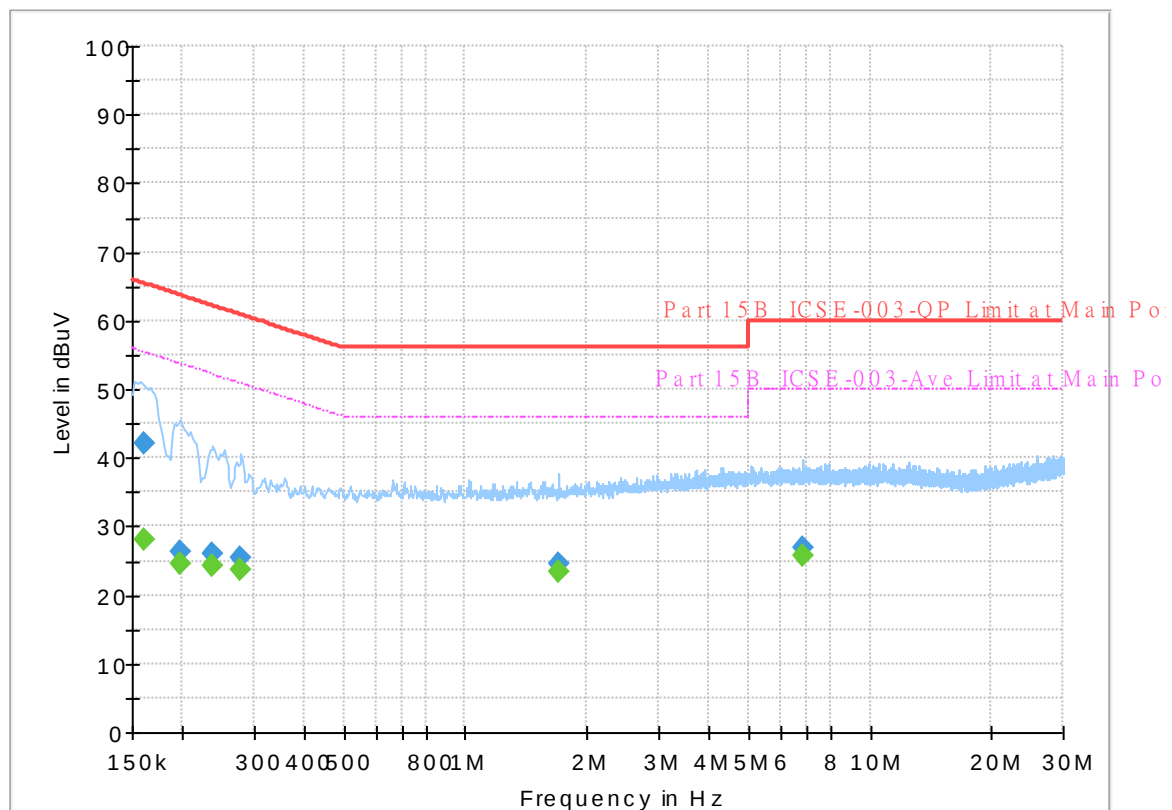

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.161250	---	28.01	55.40	27.39	L1	OFF	19.8
0.161250	42.09	---	65.40	23.31	L1	OFF	19.8
0.197250	---	24.61	53.73	29.12	L1	OFF	19.8
0.197250	26.35	---	63.73	37.38	L1	OFF	19.8
0.235500	---	24.25	52.25	28.00	L1	OFF	19.8
0.235500	25.91	---	62.25	36.34	L1	OFF	19.8
0.278250	---	23.80	50.87	27.07	L1	OFF	19.8
0.278250	25.29	---	60.87	35.58	L1	OFF	19.8
1.693500	---	23.33	46.00	22.67	L1	OFF	19.9
1.693500	24.54	---	56.00	31.46	L1	OFF	19.9
6.839250	---	25.79	50.00	24.21	L1	OFF	20.1
6.839250	26.95	---	60.00	33.05	L1	OFF	20.1

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

4D1913
Mode 1
120Vac/60Hz
Neutral

Full Spectrum

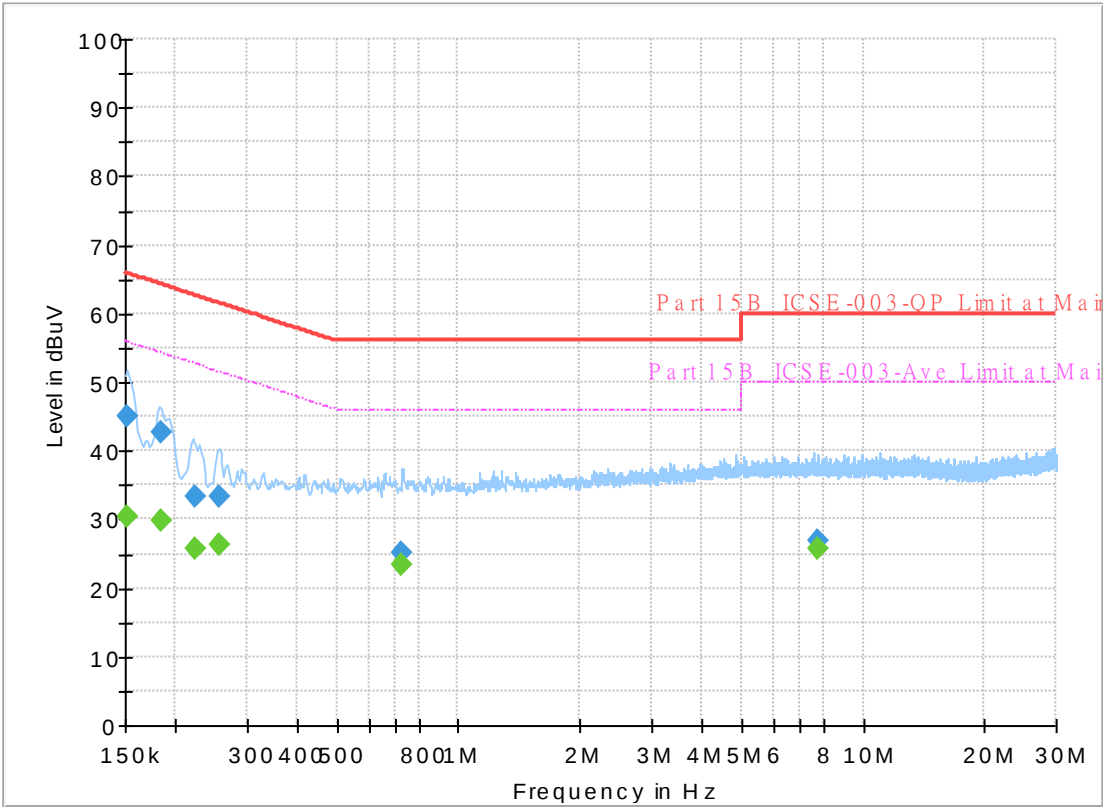

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.152250	---	30.36	55.88	25.52	N	OFF	19.8
0.152250	45.10	---	65.88	20.78	N	OFF	19.8
0.183750	---	29.92	54.31	24.39	N	OFF	19.8
0.183750	42.64	---	64.31	21.67	N	OFF	19.8
0.224250	---	25.85	52.66	26.81	N	OFF	19.8
0.224250	33.44	---	62.66	29.22	N	OFF	19.8
0.255750	---	26.42	51.57	25.15	N	OFF	19.8
0.255750	33.30	---	61.57	28.27	N	OFF	19.8
0.726000	---	23.50	46.00	22.50	N	OFF	19.8
0.726000	25.03	---	56.00	30.97	N	OFF	19.8
7.755000	---	25.68	50.00	24.32	N	OFF	20.2
7.755000	26.77	---	60.00	33.23	N	OFF	20.2



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	18.4~21.2°C
		Relative Humidity :	47.6~57.5%

Note symbol

-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	802.11ax HE20	01	2412	MCS0	Full RU	-
Mode 11	2400-2483.5	802.11ax HE20	01	2412	MCS0	Partial 26/0 RU	-
Mode 12	2400-2483.5	802.11ax HE20	01	2412	MCS0	Partial 52/37 RU	-
Mode 13	2400-2483.5	802.11ax HE20	01	2412	MCS0	Partial 106/53 RU	-
Mode 14	2400-2483.5	802.11ax HE20	06	2437	MCS0	Full RU	-
Mode 15	2400-2483.5	802.11ax HE20	11	2462	MCS0	Full RU	-
Mode 16	2400-2483.5	802.11ax HE20	11	2462	MCS0	Partial 26/8 RU	-
Mode 17	2400-2483.5	802.11ax HE20	11	2462	MCS0	Partial 52/40 RU	-
Mode 18	2400-2483.5	802.11ax HE20	11	2462	MCS0	Partial 106/54 RU	-
Mode 19	2400-2483.5	802.11g	11	2462	6Mbps	-	SHF
Mode 20	2400-2483.5	802.11g	11	2462	6Mbps	-	LF







C2. Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11b	01	2389.43	44.34	54.00	-9.66	H	Avg.	Pass	-	Band Edge
	802.11b	01	4824.00	42.99	74.00	-31.01	V	Peak	Pass	-	Harmonic
2	802.11b	06	2498.55	44.75	54.00	-9.25	V	Avg.	Pass	-	Band Edge
	802.11b	06	7311.00	43.25	54.00	-10.75	V	Avg.	Pass	-	Harmonic
3	802.11b	11	2499.43	44.75	54.00	-9.25	H	Avg.	Pass	-	Band Edge
	802.11b	11	7386.00	43.46	54.00	-10.54	V	Avg.	Pass	-	Harmonic
4	802.11g	01	2389.82	51.87	54.00	-2.13	V	Avg.	Pass	-	Band Edge
	802.11g	01	4824.00	42.07	74.00	-31.93	V	Peak	Pass	-	Harmonic
5	802.11g	06	2498.87	45.73	54.00	-8.27	V	Avg.	Pass	-	Band Edge
	802.11g	06	7311.00	39.18	54.00	-14.82	H	Avg.	Pass	-	Harmonic
6	802.11g	11	2483.51	52.45	54.00	-1.55	V	Avg.	Pass	-	Band Edge
	802.11g	11	7386.00	39.54	54.00	-14.46	V	Avg.	Pass	-	Harmonic
7	802.11n HT20	01	2389.95	51.63	54.00	-2.37	V	Avg.	Pass	-	Band Edge
	802.11n HT20	01	4824.00	42.48	74.00	-31.52	H	Peak	Pass	-	Harmonic
8	802.11n HT20	06	2497.17	46.11	54.00	-7.89	V	Avg.	Pass	-	Band Edge
	802.11n HT20	06	7311.00	38.81	54.00	-15.19	V	Avg.	Pass	-	Harmonic
9	802.11n HT20	11	2483.77	52.43	54.00	-1.57	V	Avg.	Pass	-	Band Edge
	802.11n HT20	11	7386.00	38.35	54.00	-15.65	V	Avg.	Pass	-	Harmonic
10	802.11ax HE20	01	2389.95	52.22	54.00	-1.78	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	01	4824.00	42.96	74.00	-31.04	V	Peak	Pass	Full RU	Harmonic
11	802.11ax HE20	01	2386.31	43.94	54.00	-10.06	V	Avg.	Pass	Partial 26/0 RU	Band Edge
12	802.11ax HE20	01	2387.61	44.05	54.00	-9.95	H	Avg.	Pass	Partial 52/37 RU	Band Edge
13	802.11ax HE20	01	2380.33	44.12	54.00	-9.88	H	Avg.	Pass	Partial 106/53 RU	Band Edge
14	802.11ax HE20	06	2497.42	46.06	54.00	-7.94	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	06	7311.00	38.68	54.00	-15.32	V	Avg.	Pass	Full RU	Harmonic
15	802.11ax HE20	11	2483.66	49.86	54.00	-4.14	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	11	7386.00	37.46	54.00	-16.54	V	Avg.	Pass	Full RU	Harmonic
16	802.11ax HE20	11	2498.90	44.86	54.00	-9.14	V	Avg.	Pass	Partial 26/8 RU	Band Edge
17	802.11ax HE20	11	2498.48	44.85	54.00	-9.15	H	Avg.	Pass	Partial 52/40 RU	Band Edge
18	802.11ax HE20	11	2493.12	44.82	54.00	-9.18	H	Avg.	Pass	Partial 106/54 RU	Band Edge
19	802.11g	11	24314.00	39.34	74.00	-34.66	V	Peak	Pass	-	SHF
20	802.11g	11	30.97	31.16	40.00	-8.84	V	Peak	Pass	-	LF

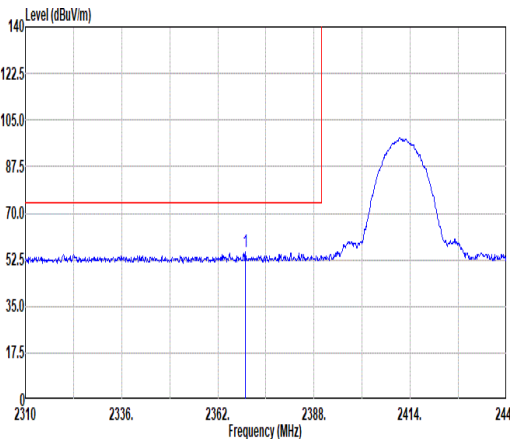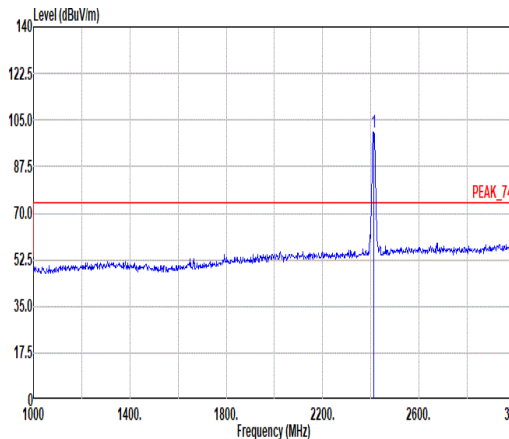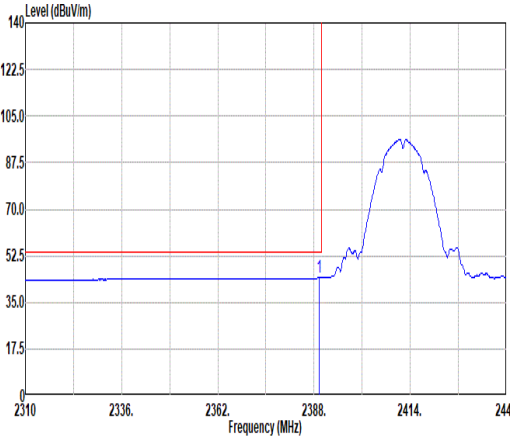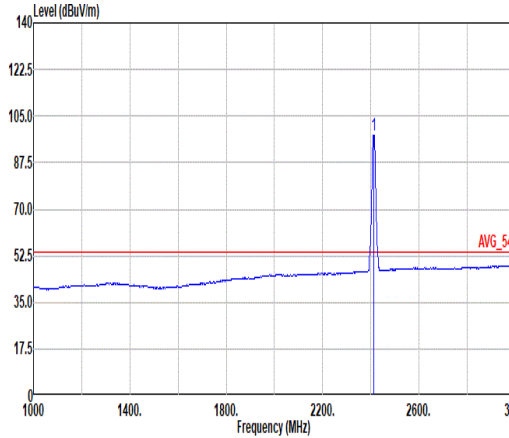

Mode	1																																																																																							
	Band Edge																																																																																							
	2400-2483.5_802.11b_CH01_2412MHz																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2369.41</td><td>55.53</td><td>74.00</td><td>-18.47</td><td>39.64</td><td>32.00</td><td>8.32</td><td>34.33</td><td>9.90</td><td>400</td><td>179</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2369.41	55.53	74.00	-18.47	39.64	32.00	8.32	34.33	9.90	400	179	PEAK	 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>100.32</td><td>-----</td><td>-----</td><td>84.19</td><td>32.14</td><td>8.40</td><td>34.31</td><td>9.90</td><td>400</td><td>179</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	100.32	-----	-----	84.19	32.14	8.40	34.31	9.90	400	179	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2369.41	55.53	74.00	-18.47	39.64	32.00	8.32	34.33	9.90	400	179	PEAK																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2412.00	100.32	-----	-----	84.19	32.14	8.40	34.31	9.90	400	179	PEAK																																																																												
Avg	 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.43</td><td>44.34</td><td>54.00</td><td>-9.66</td><td>28.30</td><td>32.10</td><td>8.36</td><td>34.32</td><td>9.90</td><td>400</td><td>179</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.43	44.34	54.00	-9.66	28.30	32.10	8.36	34.32	9.90	400	179	AVERAGE	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>97.79</td><td>-----</td><td>-----</td><td>81.66</td><td>32.14</td><td>8.40</td><td>34.31</td><td>9.90</td><td>400</td><td>179</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	97.79	-----	-----	81.66	32.14	8.40	34.31	9.90	400	179	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.43	44.34	54.00	-9.66	28.30	32.10	8.36	34.32	9.90	400	179	AVERAGE																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2412.00	97.79	-----	-----	81.66	32.14	8.40	34.31	9.90	400	179	AVERAGE																																																																												

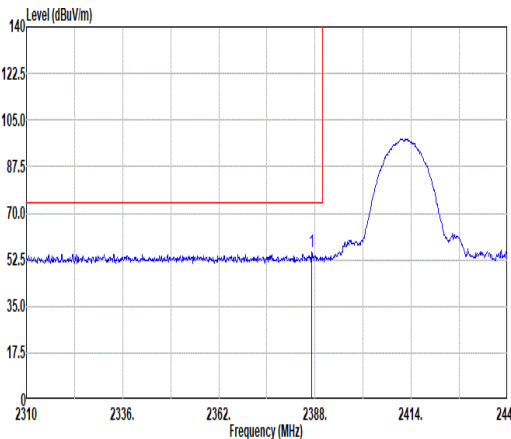
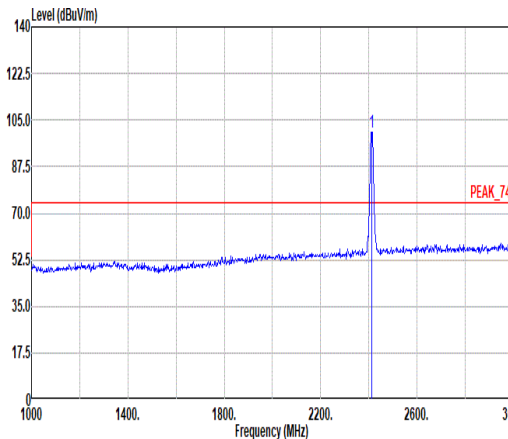
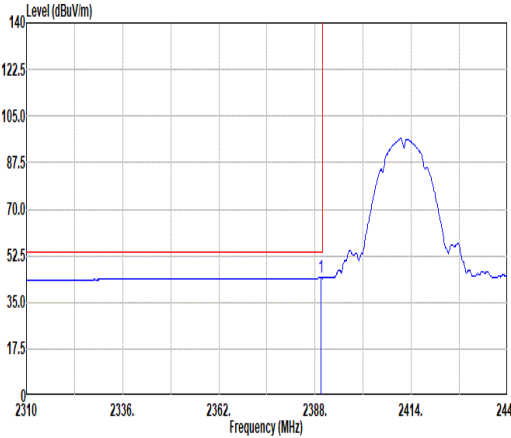
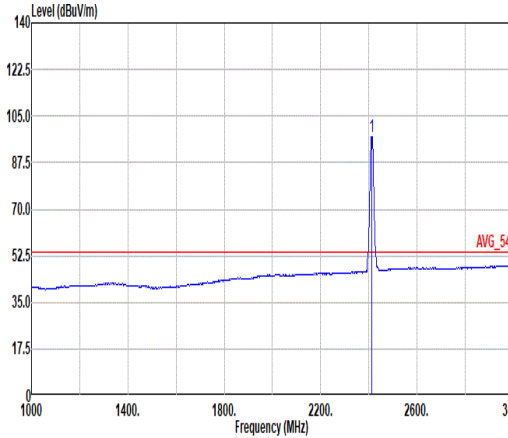


Mode	1																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																								
Avg																																																																																																															
	Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto						Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto																																																																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.09</td><td>55.37</td><td>74.00</td><td>-18.63</td><td>39.33</td><td>32.10</td><td>8.36</td><td>34.32</td><td>9.90</td><td>396</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.09	55.37	74.00	-18.63	39.33	32.10	8.36	34.32	9.90	396	360	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>100.51</td><td>-----</td><td>-----</td><td>84.38</td><td>32.14</td><td>8.40</td><td>34.31</td><td>9.90</td><td>396</td><td>360</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.51	-----	-----	84.38	32.14	8.40	34.31	9.90	396	360	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2387.09	55.37	74.00	-18.63	39.33	32.10	8.36	34.32	9.90	396	360	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	100.51	-----	-----	84.38	32.14	8.40	34.31	9.90	396	360	PEAK																																																																																																			
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>44.23</td><td>54.00</td><td>-9.77</td><td>28.19</td><td>32.10</td><td>8.36</td><td>34.32</td><td>9.90</td><td>396</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	44.23	54.00	-9.77	28.19	32.10	8.36	34.32	9.90	396	360	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>97.46</td><td>-----</td><td>-----</td><td>81.28</td><td>32.18</td><td>8.40</td><td>34.31</td><td>9.91</td><td>396</td><td>360</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.46	-----	-----	81.28	32.18	8.40	34.31	9.91	396	360	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2389.69	44.23	54.00	-9.77	28.19	32.10	8.36	34.32	9.90	396	360	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	97.46	-----	-----	81.28	32.18	8.40	34.31	9.91	396	360	AVERAGE																																																																																																			







Mode	1																																																																																							
	Harmonic																																																																																							
	2400-2483.5_802.11b_CH01_2412MHz																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>41.06</td><td>74.00</td><td>-32.94</td><td>53.03</td><td>34.25</td><td>11.95</td><td>59.14</td><td>0.97</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	41.06	74.00	-32.94	53.03	34.25	11.95	59.14	0.97	--	PEAK	Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>42.99</td><td>74.00</td><td>-31.01</td><td>54.96</td><td>34.25</td><td>11.95</td><td>59.14</td><td>0.97</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	42.99	74.00	-31.01	54.96	34.25	11.95	59.14	0.97	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	4824.00	41.06	74.00	-32.94	53.03	34.25	11.95	59.14	0.97	--	PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	4824.00	42.99	74.00	-31.01	54.96	34.25	11.95	59.14	0.97	--	PEAK																																																																													

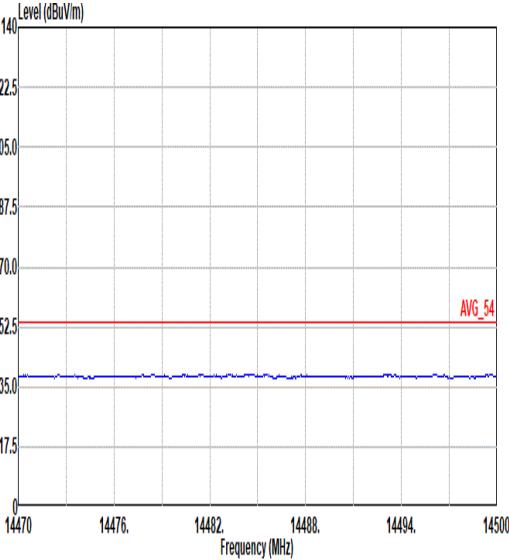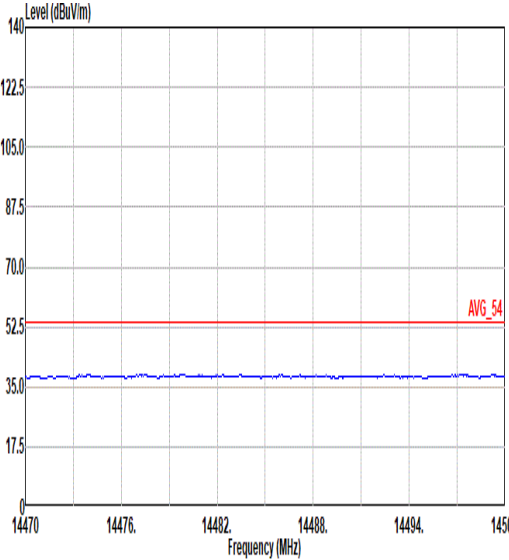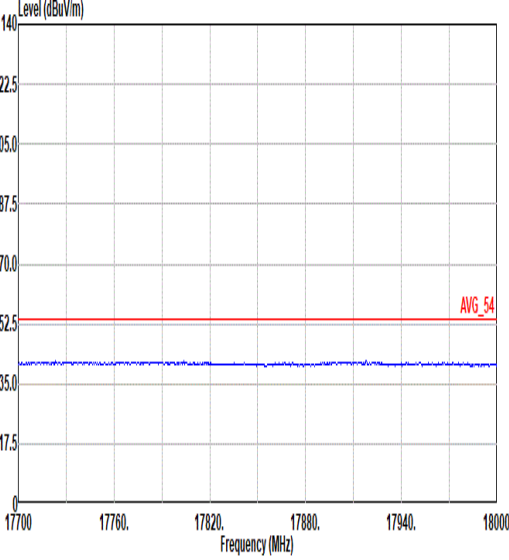
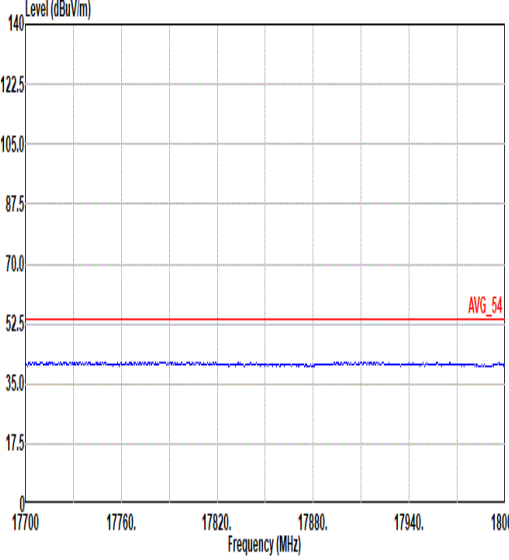


Mode	1	
	Harmonic	
	2400-2483.5_802.11b_CH01_2412MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

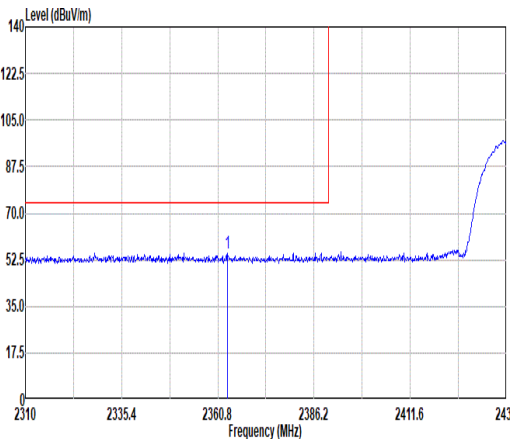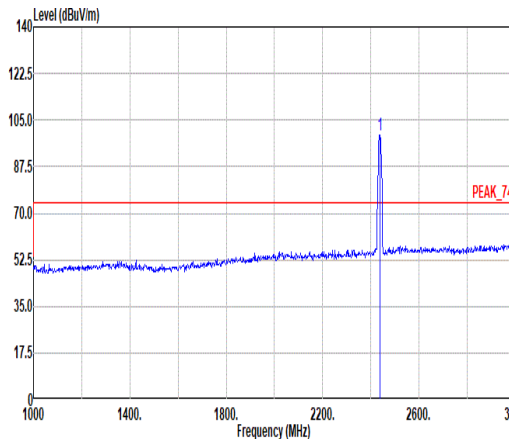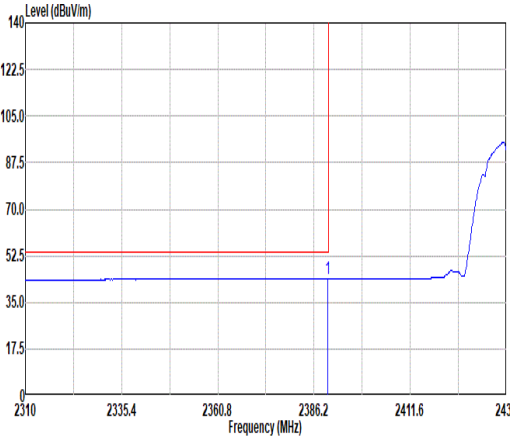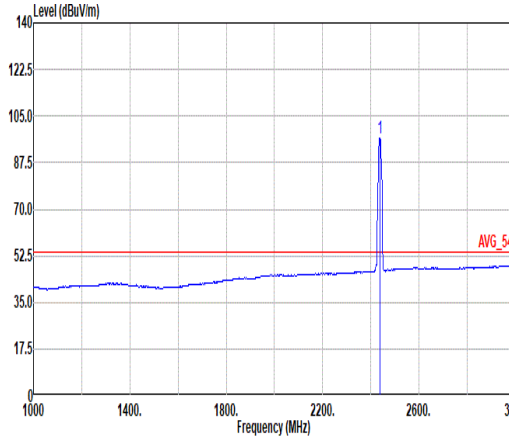

Mode	2																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_802.11b_CH06_2437MHz																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2363.34</td><td>54.99</td><td>74.00</td><td>-19.01</td><td>39.11</td><td>32.00</td><td>8.31</td><td>34.33</td><td>9.90</td><td>394</td><td>178</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2363.34	54.99	74.00	-19.01	39.11	32.00	8.31	34.33	9.90	394	178	PEAK	 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>99.55</td><td>-----</td><td>-----</td><td>83.30</td><td>32.20</td><td>8.44</td><td>34.30</td><td>9.91</td><td>394</td><td>178</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	99.55	-----	-----	83.30	32.20	8.44	34.30	9.91	394	178	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2363.34	54.99	74.00	-19.01	39.11	32.00	8.31	34.33	9.90	394	178	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2437.00	99.55	-----	-----	83.30	32.20	8.44	34.30	9.91	394	178	PEAK																																																																														
Avg	 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.88</td><td>43.85</td><td>54.00</td><td>-10.15</td><td>27.81</td><td>32.10</td><td>8.36</td><td>34.32</td><td>9.90</td><td>394</td><td>178</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	43.85	54.00	-10.15	27.81	32.10	8.36	34.32	9.90	394	178	AVERAGE	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>96.84</td><td>-----</td><td>-----</td><td>80.58</td><td>32.20</td><td>8.44</td><td>34.30</td><td>9.92</td><td>394</td><td>178</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	96.84	-----	-----	80.58	32.20	8.44	34.30	9.92	394	178	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.88	43.85	54.00	-10.15	27.81	32.10	8.36	34.32	9.90	394	178	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2437.00	96.84	-----	-----	80.58	32.20	8.44	34.30	9.92	394	178	AVERAGE																																																																														

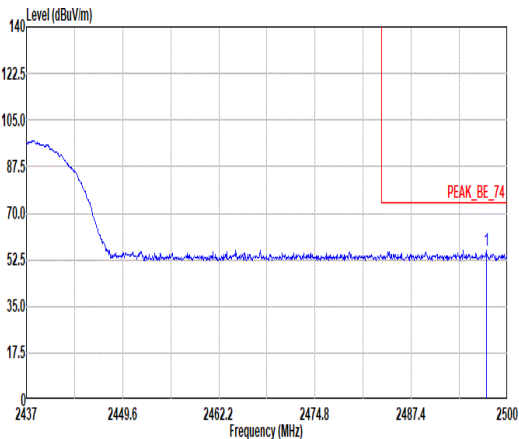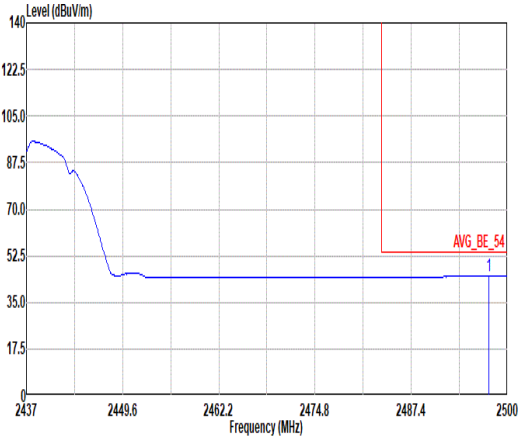

Mode	2																																												
	Band Edge - R																																												
	2400-2483.5_802.11b_CH06_2437MHz																																												
Pol.	Horizontal	Fundamental																																											
Peak	 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2497.23</td><td>55.93</td><td>74.00</td><td>-18.07</td><td>39.15</td><td>32.57</td><td>8.54</td><td>34.27</td><td>9.94</td><td>394</td><td>178</td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2497.23	55.93	74.00	-18.07	39.15	32.57	8.54	34.27	9.94	394	178	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1 2497.23	55.93	74.00	-18.07	39.15	32.57	8.54	34.27	9.94	394	178	PEAK																																		
Avg	 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2497.54</td><td>44.75</td><td>54.00</td><td>-9.25</td><td>27.96</td><td>32.58</td><td>8.54</td><td>34.27</td><td>9.94</td><td>394</td><td>178</td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2497.54	44.75	54.00	-9.25	27.96	32.58	8.54	34.27	9.94	394	178	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1 2497.54	44.75	54.00	-9.25	27.96	32.58	8.54	34.27	9.94	394	178	AVERAGE																																		



2

Mode

Band Edge - L


2400-2483.5_802.11b_CH06_2437MHz

Pol.

Vertical


Fundamental

Peak

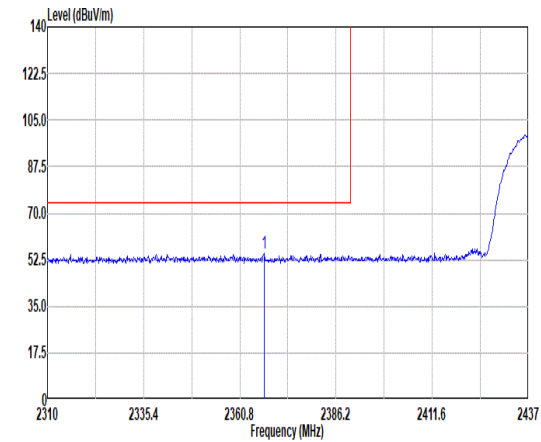

Site : 03CH07-HY
Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto


	Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	
		Level	Line Margin	Level	Factor	Loss	Factor	Factor				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2367.15	54.72	74.00	-19.28	38.83	32.00	8.32	34.33	9.90	350	123	PEAK

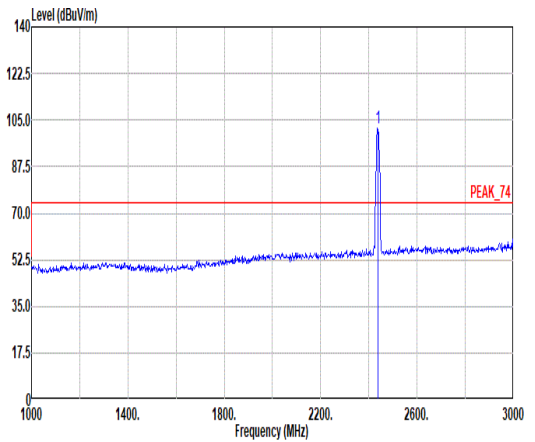

Site : 03CH07-HY
Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto


Freq	Level	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	
		Line	Margin	Level	Factor	Loss	Factor	Factor				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2437.00	101.80	-----	-----	85.55	32.20	8.44	34.30	9.91	350	123	PEAK

Avg

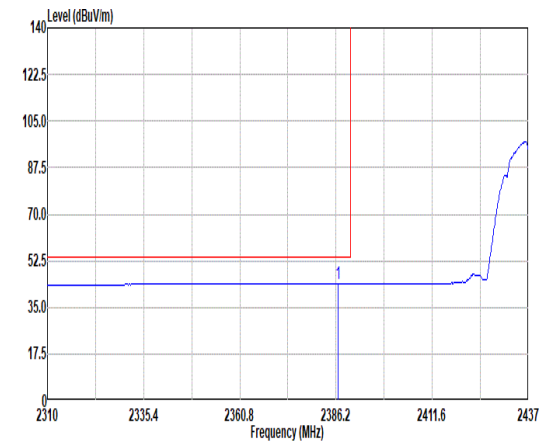

Site : 03CH07-HY
Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL
: RBW:1000.000kHz VBW:0.010kHz SMT:Auto



Freq	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg			
1	2386.71	43.86	54.00	-10.14	27.82	32.10	8.36	34.32	9.90				350	123	AVERAGE		

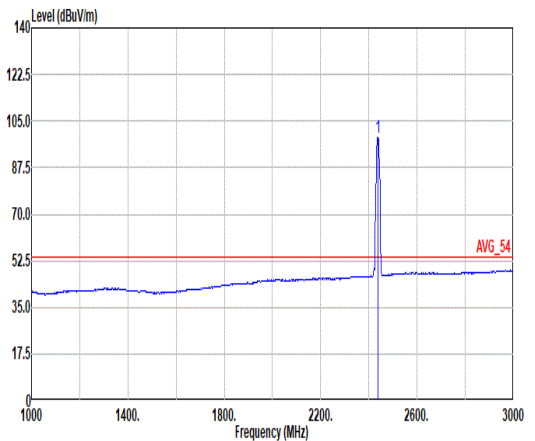

Site : 03CH07-HY
Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
: RBW:1000.000kHz VBW:0.010kHz SMT:Auto

Freq	Limit		Read		Ant	Cable		Preamp	Aux	APos	TPos		Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	cm	deg			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	2437.00	98.90	-----	-----	82.64	32.20	8.44	34.30	9.92	350	123	AVERAGE	

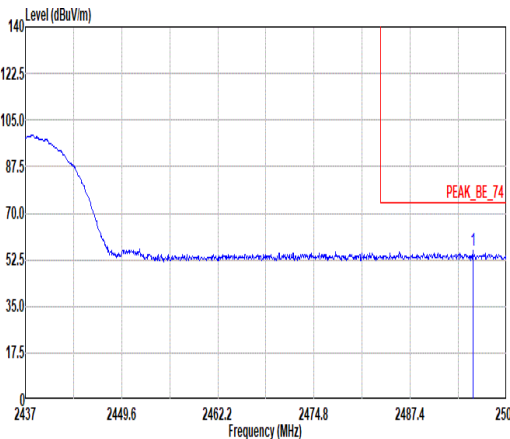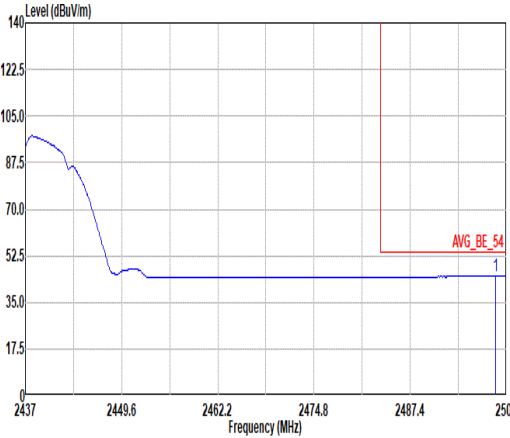

Mode	2																																											
	Band Edge - R																																											
	2400-2483.5_802.11b_CH06_2437MHz																																											
Pol.	Vertical	Fundamental																																										
Peak	 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2495.59</td><td>56.07</td><td>74.00</td><td>-17.93</td><td>39.30</td><td>32.56</td><td>8.54</td><td>34.27</td><td>9.94</td><td>350</td><td>123</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2495.59	56.07	74.00	-17.93	39.30	32.56	8.54	34.27	9.94	350	123	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1 2495.59	56.07	74.00	-17.93	39.30	32.56	8.54	34.27	9.94	350	123																																		
Avg	 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2498.55</td><td>44.75</td><td>54.00</td><td>-9.25</td><td>27.95</td><td>32.59</td><td>8.54</td><td>34.27</td><td>9.94</td><td>350</td><td>123</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2498.55	44.75	54.00	-9.25	27.95	32.59	8.54	34.27	9.94	350	123	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1 2498.55	44.75	54.00	-9.25	27.95	32.59	8.54	34.27	9.94	350	123																																		



2

Mode

Harmonic

2400-2483.5_802.11b_CH06_2437MHz

Pol.

Horizontal

Vertical

Peak

Avg





Site : 03CH07-HY
Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg
1	4874.00	40.87	74.00	-33.13	52.70	34.20	12.02	59.03	0.98 -- -- PEAK
2	7311.00	48.13	74.00	-25.87	54.46	35.70	14.68	57.73	1.02 295 116 PEAK
3	7311.00	42.79	54.00	-11.21	49.12	35.70	14.68	57.73	1.02 295 116 AVERAGE





Site : 03CH07-HY
Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg
1	4874.00	41.34	74.00	-32.66	53.17	34.20	12.02	59.03	0.98 -- -- PEAK
2	7311.00	48.61	74.00	-25.39	54.94	35.70	14.68	57.73	1.02 386 278 PEAK
3	7311.00	43.25	54.00	-10.75	49.58	35.70	14.68	57.73	1.02 386 278 AVERAGE

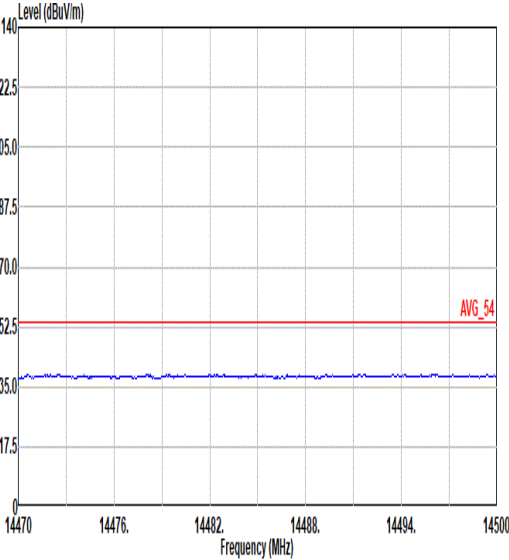
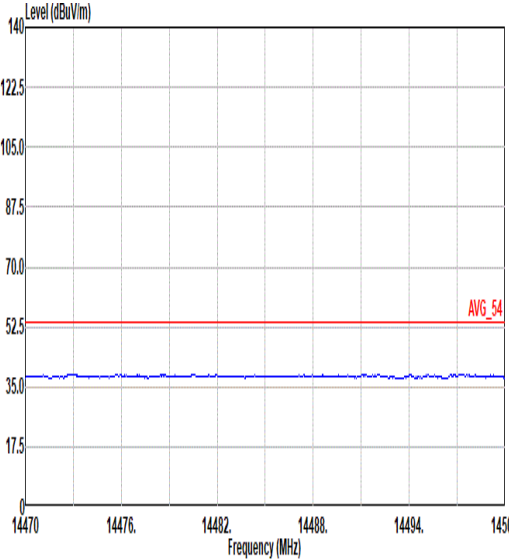
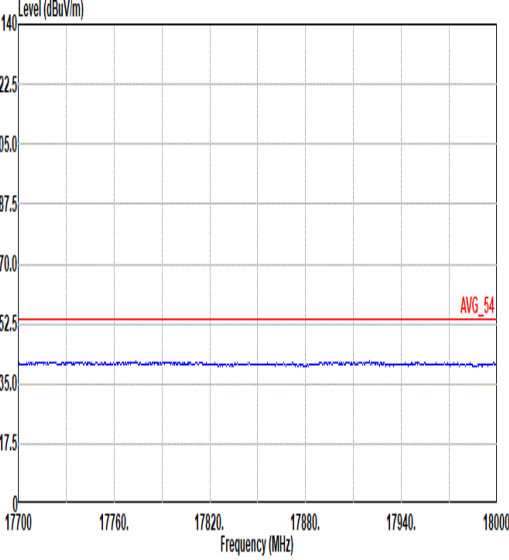
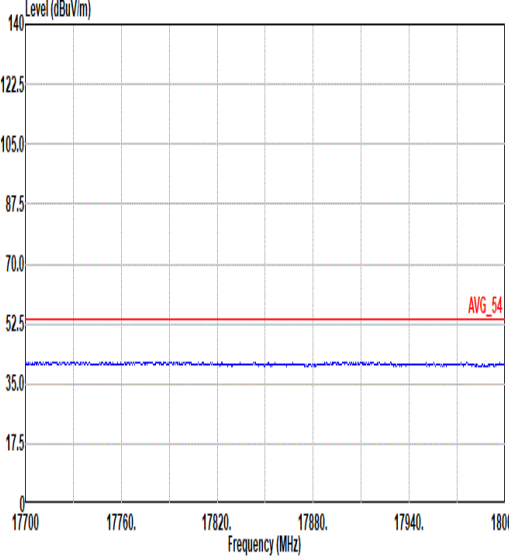


Mode	2	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

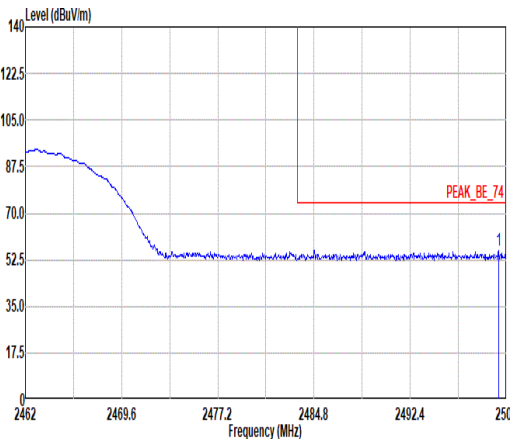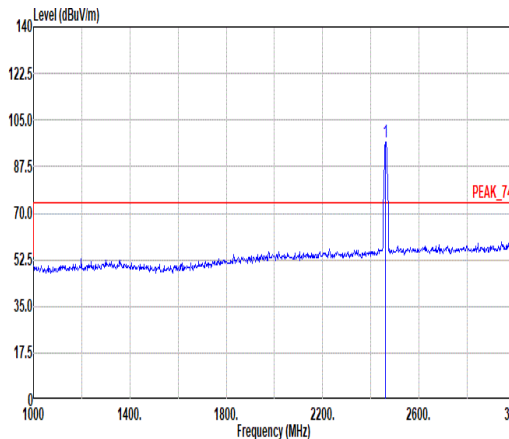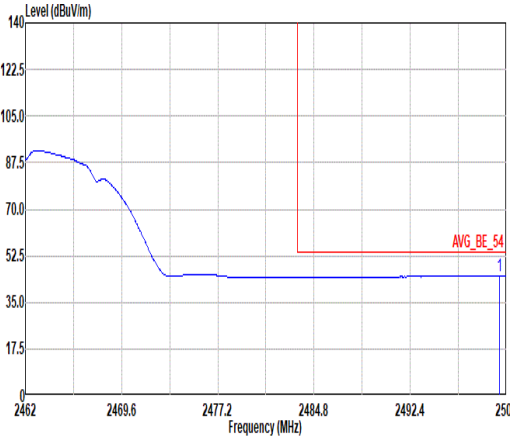
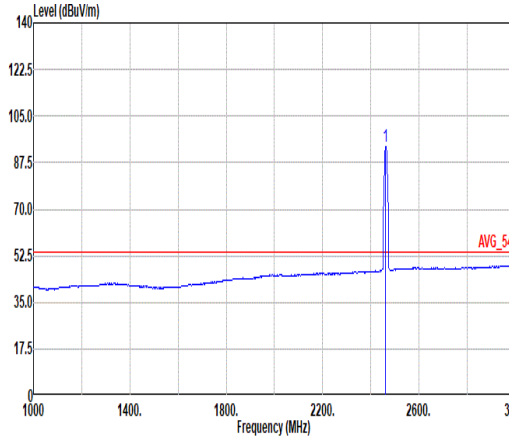


Mode	3																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.39</td><td>56.17</td><td>74.00</td><td>-17.83</td><td>39.37</td><td>32.59</td><td>8.54</td><td>34.27</td><td>9.94</td><td>328</td><td>182</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2499.39	56.17	74.00	-17.83	39.37	32.59	8.54	34.27	9.94	328	182	PEAK	Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>96.53</td><td>-----</td><td>-----</td><td>80.10</td><td>32.32</td><td>8.48</td><td>34.29</td><td>9.92</td><td>328</td><td>182</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	96.53	-----	-----	80.10	32.32	8.48	34.29	9.92	328	182
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2499.39	56.17	74.00	-17.83	39.37	32.59	8.54	34.27	9.94	328	182	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	96.53	-----	-----	80.10	32.32	8.48	34.29	9.92	328	182	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.43</td><td>44.75</td><td>54.00</td><td>-9.25</td><td>27.95</td><td>32.59</td><td>8.54</td><td>34.27</td><td>9.94</td><td>328</td><td>182</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2499.43	44.75	54.00	-9.25	27.95	32.59	8.54	34.27	9.94	328	182	AVERAGE	Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>93.56</td><td>-----</td><td>-----</td><td>77.09</td><td>32.34</td><td>8.49</td><td>34.29</td><td>9.93</td><td>328</td><td>182</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	93.56	-----	-----	77.09	32.34	8.49	34.29	9.93	328	182
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2499.43	44.75	54.00	-9.25	27.95	32.59	8.54	34.27	9.94	328	182	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	93.56	-----	-----	77.09	32.34	8.49	34.29	9.93	328	182	AVERAGE																																																																																							

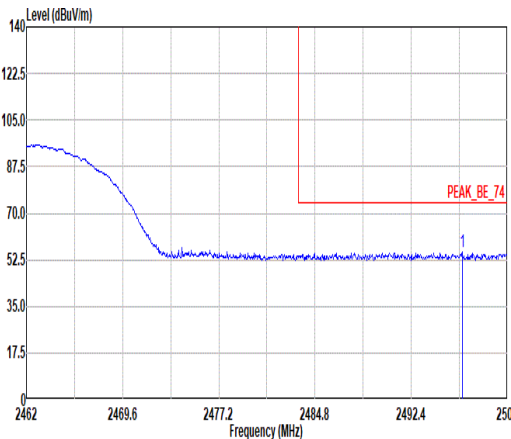
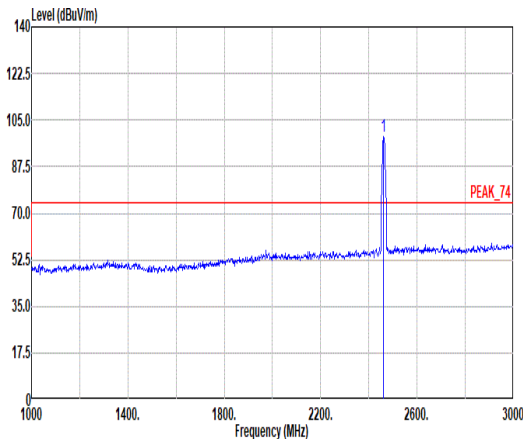
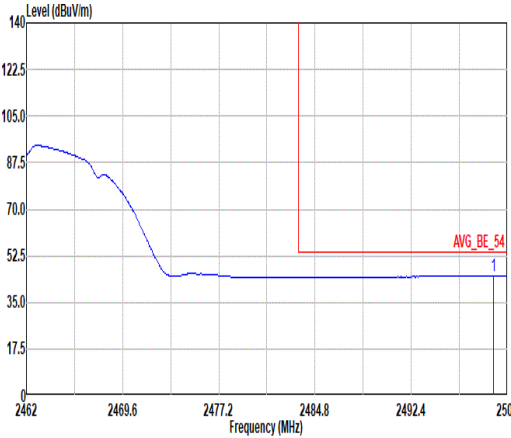
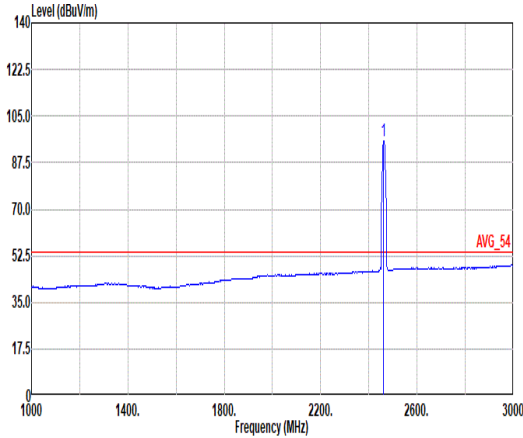


Mode	3																																																				
	Band Edge																																																				
	2400-2483.5_802.11b_CH11_2462MHz																																																				
Pol.	Vertical																																																				
Peak																																																					
	Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2496.43</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>38.65</td><td>32.56</td><td>8.54</td><td>34.27</td><td>9.94</td><td>195</td><td>73 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.43	55.42	74.00	-18.58	38.65	32.56	8.54	34.27	9.94	195
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2496.43	55.42	74.00	-18.58	38.65	32.56	8.54	34.27	9.94	195	73 PEAK																																										
Fundamental																																																					
	Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>98.56</td><td>-----</td><td>-----</td><td>82.13</td><td>32.32</td><td>8.48</td><td>34.29</td><td>9.92</td><td>195</td><td>73 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.56	-----	-----	82.13	32.32	8.48	34.29	9.92	195
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2462.00	98.56	-----	-----	82.13	32.32	8.48	34.29	9.92	195	73 PEAK																																										
Avg																																																					
	Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2498.90</td><td>44.73</td><td>54.00</td><td>-9.27</td><td>27.93</td><td>32.59</td><td>8.54</td><td>34.27</td><td>9.94</td><td>195</td><td>73 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.90	44.73	54.00	-9.27	27.93	32.59	8.54	34.27	9.94	195
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2498.90	44.73	54.00	-9.27	27.93	32.59	8.54	34.27	9.94	195	73 AVERAGE																																										
Fundamental																																																					
	Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>95.58</td><td>-----</td><td>-----</td><td>79.11</td><td>32.34</td><td>8.49</td><td>34.29</td><td>9.93</td><td>195</td><td>73 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	95.58	-----	-----	79.11	32.34	8.49	34.29	9.93	195
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																											
1	2462.00	95.58	-----	-----	79.11	32.34	8.49	34.29	9.93	195	73 AVERAGE																																										



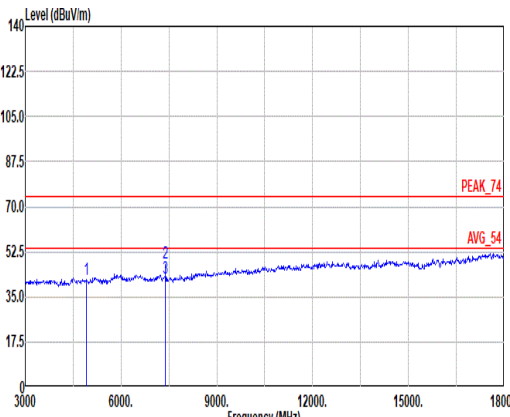
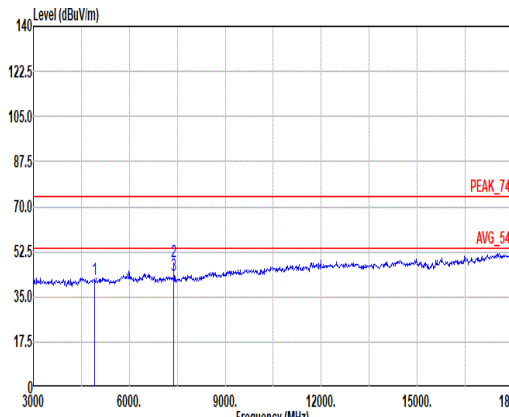


Mode	3																																																																																																																																														
	Harmonic																																																																																																																																														
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																														
Pol.	Horizontal	Vertical																																																																																																																																													
Peak Avg	 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>41.62</td><td>74.00</td><td>-32.38</td><td>53.22</td><td>34.25</td><td>12.09</td><td>58.92</td><td>0.98</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>48.08</td><td>74.00</td><td>-25.92</td><td>54.35</td><td>35.70</td><td>14.82</td><td>57.82</td><td>1.03</td><td>300</td><td>115</td><td>PEAK</td></tr><tr><td>3</td><td>7386.00</td><td>42.52</td><td>54.00</td><td>-11.48</td><td>48.79</td><td>35.70</td><td>14.82</td><td>57.82</td><td>1.03</td><td>300</td><td>115</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	41.62	74.00	-32.38	53.22	34.25	12.09	58.92	0.98	--	--	PEAK	2	7386.00	48.08	74.00	-25.92	54.35	35.70	14.82	57.82	1.03	300	115	PEAK	3	7386.00	42.52	54.00	-11.48	48.79	35.70	14.82	57.82	1.03	300	115	AVERAGE	 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>41.85</td><td>74.00</td><td>-32.15</td><td>53.45</td><td>34.25</td><td>12.09</td><td>58.92</td><td>0.98</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>48.37</td><td>74.00</td><td>-25.63</td><td>54.64</td><td>35.70</td><td>14.82</td><td>57.82</td><td>1.03</td><td>340</td><td>32</td><td>PEAK</td></tr><tr><td>3</td><td>7386.00</td><td>43.46</td><td>54.00</td><td>-10.54</td><td>49.73</td><td>35.70</td><td>14.82</td><td>57.82</td><td>1.03</td><td>340</td><td>32</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	41.85	74.00	-32.15	53.45	34.25	12.09	58.92	0.98	--	--	PEAK	2	7386.00	48.37	74.00	-25.63	54.64	35.70	14.82	57.82	1.03	340	32	PEAK	3	7386.00	43.46	54.00	-10.54	49.73	35.70	14.82	57.82	1.03	340	32	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																					
1	4924.00	41.62	74.00	-32.38	53.22	34.25	12.09	58.92	0.98	--	--	PEAK																																																																																																																																			
2	7386.00	48.08	74.00	-25.92	54.35	35.70	14.82	57.82	1.03	300	115	PEAK																																																																																																																																			
3	7386.00	42.52	54.00	-11.48	48.79	35.70	14.82	57.82	1.03	300	115	AVERAGE																																																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																				
1	4924.00	41.85	74.00	-32.15	53.45	34.25	12.09	58.92	0.98	--	--	PEAK																																																																																																																																			
2	7386.00	48.37	74.00	-25.63	54.64	35.70	14.82	57.82	1.03	340	32	PEAK																																																																																																																																			
3	7386.00	43.46	54.00	-10.54	49.73	35.70	14.82	57.82	1.03	340	32	AVERAGE																																																																																																																																			

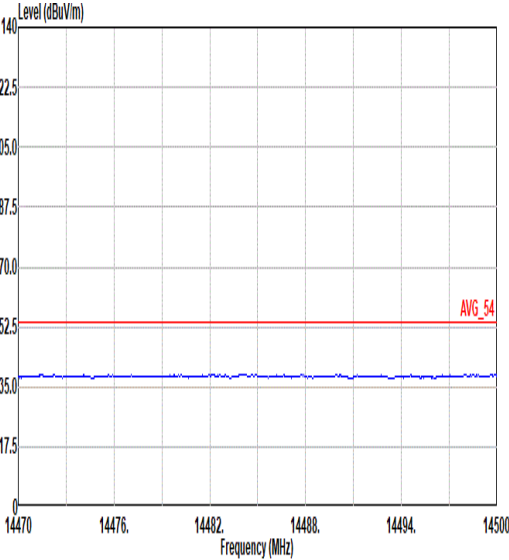
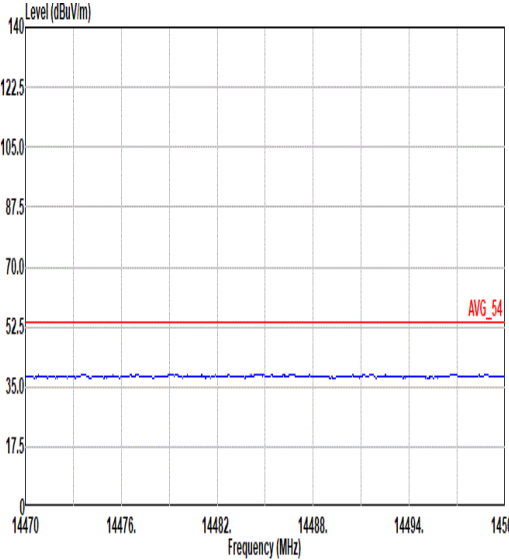
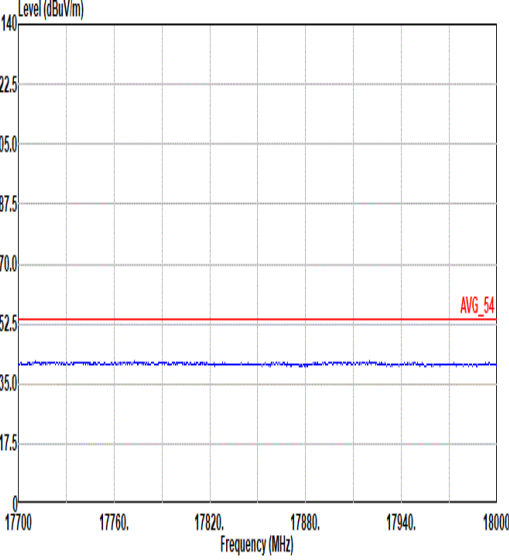
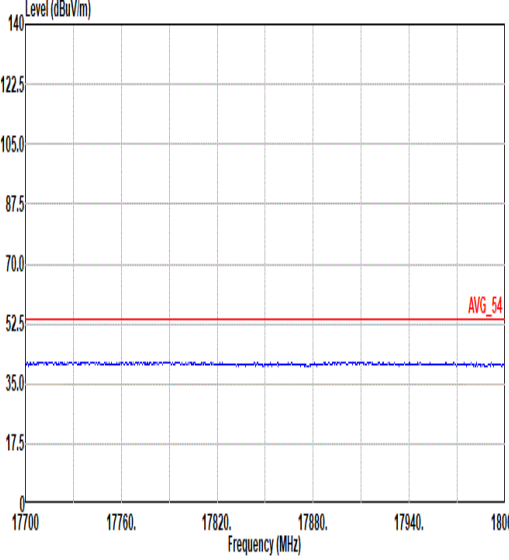


Mode	3	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

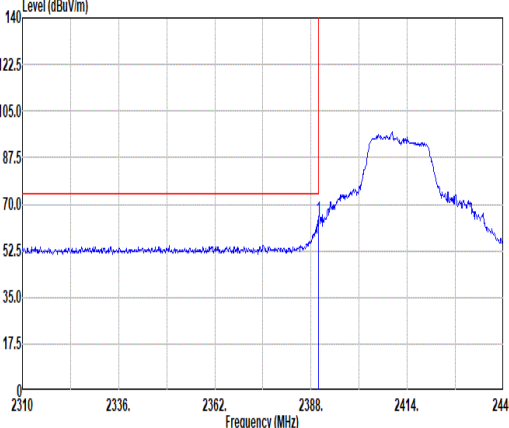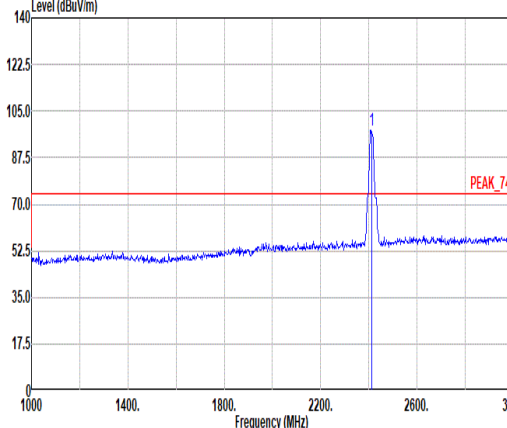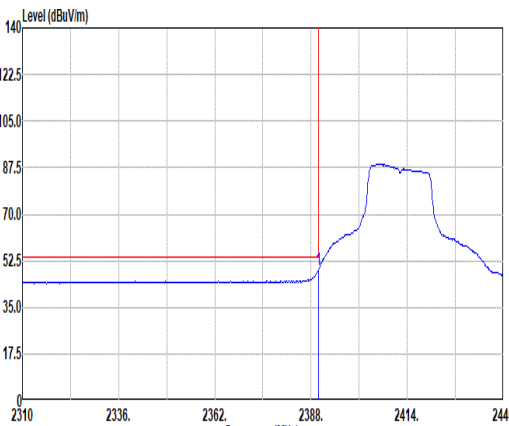
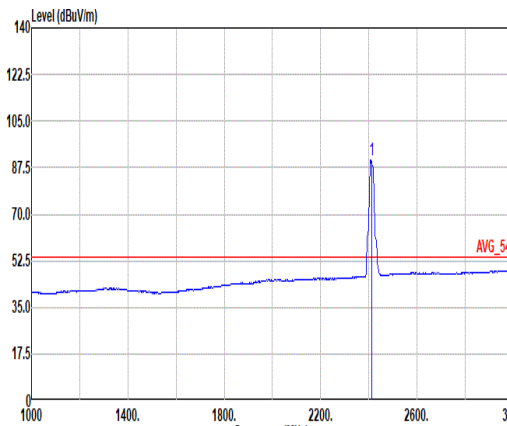


		4																																																																																																											
Mode		Band Edge																																																																																																											
		2400-2483.5_802.11g_CH01_2412MHz																																																																																																											
Pol.		Horizontal					Fundamental																																																																																																						
Peak																																																																																																													
	Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.95</td><td>64.66</td><td>74.00</td><td>-9.34</td><td>48.62</td><td>32.10</td><td>8.36</td><td>34.32</td><td>9.90</td><td>243</td><td>181 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2389.95	64.66	74.00	-9.34	48.62	32.10	8.36	34.32	9.90	243	181 PEAK	Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>97.81</td><td>-----</td><td>-----</td><td>81.73</td><td>32.10</td><td>8.39</td><td>34.31</td><td>9.90</td><td>243</td><td>181 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2412.00	97.81	-----	-----	81.73	32.10	8.39	34.31	9.90	243
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1 2389.95	64.66	74.00	-9.34	48.62	32.10	8.36	34.32	9.90	243	181 PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1 2412.00	97.81	-----	-----	81.73	32.10	8.39	34.31	9.90	243	181 PEAK																																																																																																			
Avg																																																																																																													
	Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.95</td><td>49.11</td><td>54.00</td><td>-4.89</td><td>33.07</td><td>32.10</td><td>8.36</td><td>34.32</td><td>9.90</td><td>243</td><td>181 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2389.95	49.11	54.00	-4.89	33.07	32.10	8.36	34.32	9.90	243	181 AVERAGE	Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>90.22</td><td>-----</td><td>-----</td><td>74.14</td><td>32.10</td><td>8.39</td><td>34.31</td><td>9.90</td><td>243</td><td>181 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2412.00	90.22	-----	-----	74.14	32.10	8.39	34.31	9.90	243
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1 2389.95	49.11	54.00	-4.89	33.07	32.10	8.36	34.32	9.90	243	181 AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1 2412.00	90.22	-----	-----	74.14	32.10	8.39	34.31	9.90	243	181 AVERAGE																																																																																																			

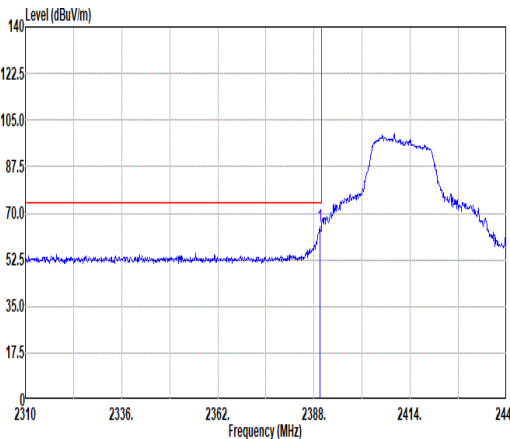
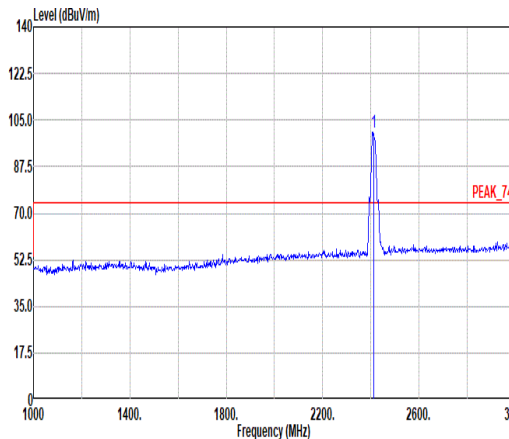
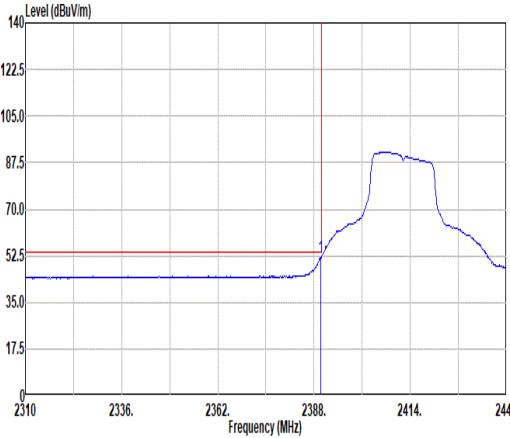
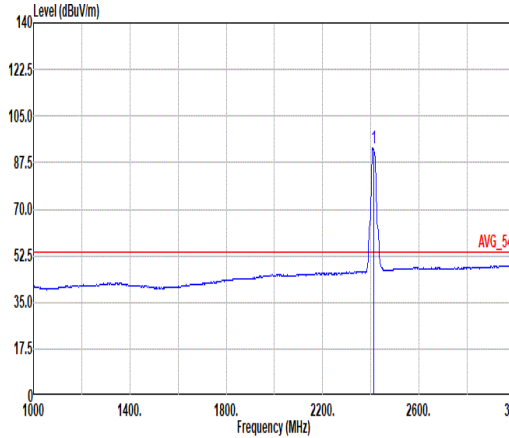


		4																																																																																											
Mode		Band Edge																																																																																											
		2400-2483.5_802.11g_CH01_2412MHz																																																																																											
Pol.		Vertical					Fundamental																																																																																						
Peak		 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz dBuV/m dB dBuV/m dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2389.56 64.84 74.00 -9.16 48.00 32.10 8.36 34.32 9.90 221 75</td><td>PEAK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dB dBuV/m dB/m dB dB dB cm deg									1 2389.56 64.84 74.00 -9.16 48.00 32.10 8.36 34.32 9.90 221 75	PEAK								 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz dBuV/m dB dBuV/m dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2412.00 100.35 ----- 84.27 32.10 8.39 34.31 9.90 221 75</td><td>PEAK</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dB dBuV/m dB/m dB dB dB cm deg									1 2412.00 100.35 ----- 84.27 32.10 8.39 34.31 9.90 221 75	PEAK							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor																																																																																						
MHz dBuV/m dB dBuV/m dB/m dB dB dB cm deg																																																																																													
1 2389.56 64.84 74.00 -9.16 48.00 32.10 8.36 34.32 9.90 221 75	PEAK																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor																																																																																						
MHz dBuV/m dB dBuV/m dB/m dB dB dB cm deg																																																																																													
1 2412.00 100.35 ----- 84.27 32.10 8.39 34.31 9.90 221 75	PEAK																																																																																												
Avg		 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz dBuV/m dB dBuV/m dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2389.82 51.87 54.00 -2.13 35.83 32.10 8.36 34.32 9.90 221 75</td><td>AVERAGE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dB dBuV/m dB/m dB dB dB cm deg									1 2389.82 51.87 54.00 -2.13 35.83 32.10 8.36 34.32 9.90 221 75	AVERAGE								 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz dBuV/m dB dBuV/m dB/m dB dB dB cm deg</th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><td>1 2412.00 92.93 ----- 76.85 32.10 8.39 34.31 9.90 221 75</td><td>AVERAGE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor		MHz dBuV/m dB dBuV/m dB/m dB dB dB cm deg									1 2412.00 92.93 ----- 76.85 32.10 8.39 34.31 9.90 221 75	AVERAGE							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor																																																																																						
MHz dBuV/m dB dBuV/m dB/m dB dB dB cm deg																																																																																													
1 2389.82 51.87 54.00 -2.13 35.83 32.10 8.36 34.32 9.90 221 75	AVERAGE																																																																																												
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq Level Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor	Factor																																																																																						
MHz dBuV/m dB dBuV/m dB/m dB dB dB cm deg																																																																																													
1 2412.00 92.93 ----- 76.85 32.10 8.39 34.31 9.90 221 75	AVERAGE																																																																																												

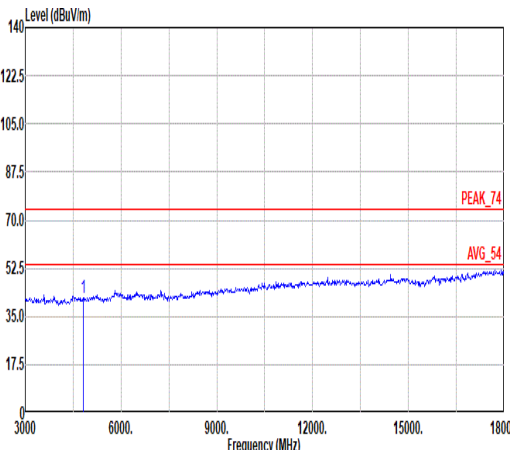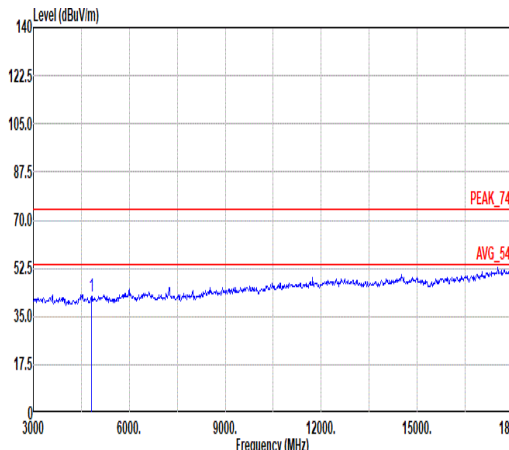

Mode	4																																																						
	Harmonic																																																						
	2400-2483.5_802.11g_CH01_2412MHz																																																						
Pol.	Horizontal						Vertical																																																
Peak Avg																																																							
	Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL						Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL																																																
<table><tr><th></th><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>41.73</td><td>74.00</td><td>-32.27</td><td>53.70</td><td>34.25</td><td>11.95</td><td>59.14</td><td>0.97</td><td>-- PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	41.73	74.00	-32.27	53.70	34.25	11.95	59.14	0.97	-- PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	4824.00	41.73	74.00	-32.27	53.70	34.25	11.95	59.14	0.97	-- PEAK																																													
<table><tr><th></th><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>42.07</td><td>74.00</td><td>-31.93</td><td>54.04</td><td>34.25</td><td>11.95</td><td>59.14</td><td>0.97</td><td>-- PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	42.07	74.00	-31.93	54.04	34.25	11.95	59.14	0.97	-- PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	4824.00	42.07	74.00	-31.93	54.04	34.25	11.95	59.14	0.97	-- PEAK																																													

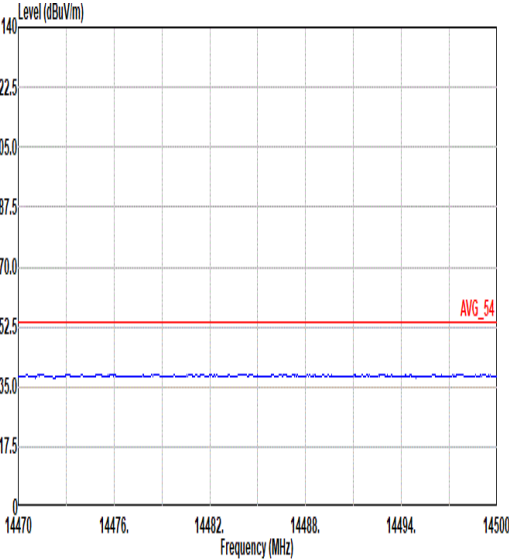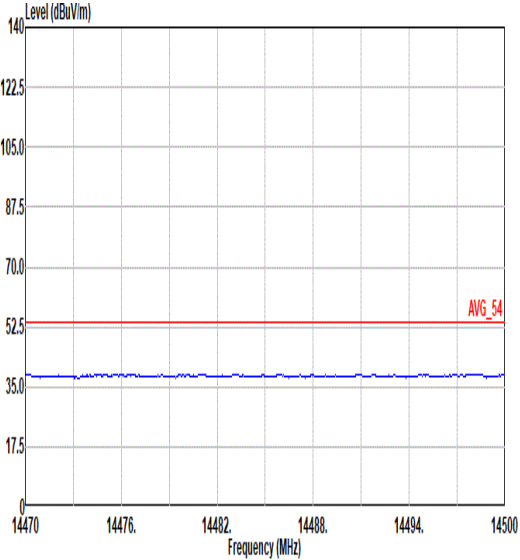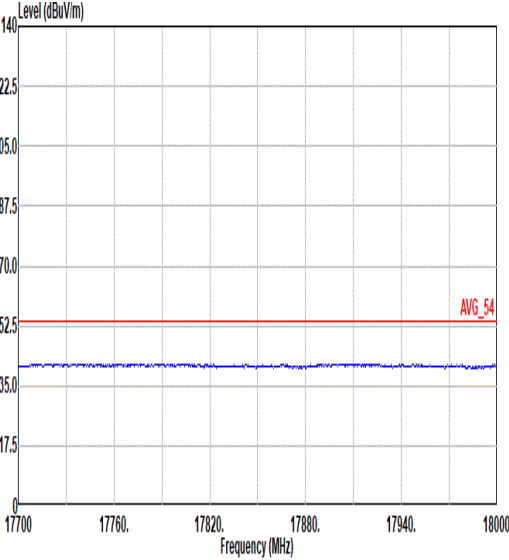
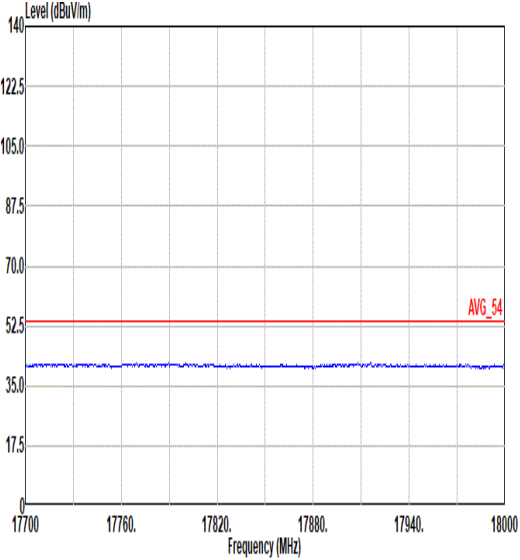


Mode	4	
	Harmonic	
	2400-2483.5_802.11g_CH01_2412MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL



		5										
Mode		Band Edge - L										
		2400-2483.5_802.11g_CH06_2437MHz										
Pol.		Horizontal										
Peak		<										

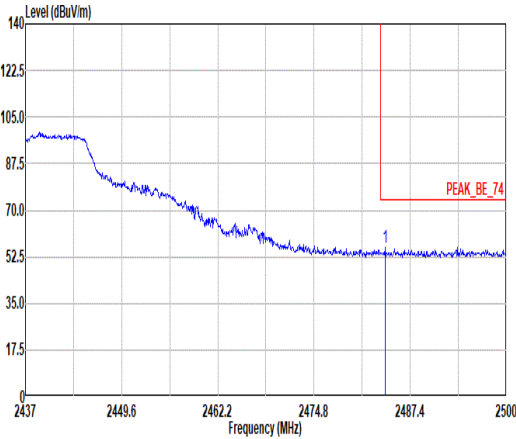
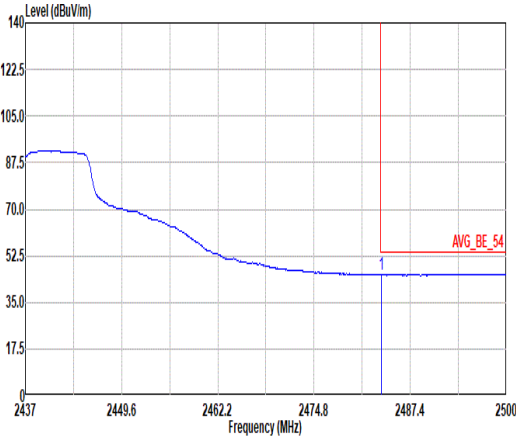


Mode	5																																									
	Band Edge - R																																									
	2400-2483.5_802.11g_CH06_2437MHz																																									
Pol.	Horizontal	Fundamental																																								
Peak	 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2484.12</td><td>56.09</td><td>74.00</td><td>-17.91</td><td>39.48</td><td>32.44</td><td>8.52</td><td>34.28</td><td>9.93</td><td>388 284 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2484.12	56.09	74.00	-17.91	39.48	32.44	8.52	34.28	9.93	388 284 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
1 2484.12	56.09	74.00	-17.91	39.48	32.44	8.52	34.28	9.93	388 284 PEAK																																	
Avg	 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2483.62</td><td>45.61</td><td>54.00</td><td>-8.39</td><td>29.00</td><td>32.44</td><td>8.52</td><td>34.28</td><td>9.93</td><td>388 284 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2483.62	45.61	54.00	-8.39	29.00	32.44	8.52	34.28	9.93	388 284 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
1 2483.62	45.61	54.00	-8.39	29.00	32.44	8.52	34.28	9.93	388 284 AVERAGE																																	





		5																																																			
Mode		Band Edge - L																																																			
		2400-2483.5_802.11g_CH06_2437MHz																																																			
Pol.		Vertical					Fundamental																																														
Peak																																																					
	Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="2">Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2319.53</td><td>55.06</td><td>74.00</td><td>-18.94</td><td>39.38</td><td>31.90</td><td>8.23</td><td>34.35</td><td>9.90</td><td>400</td><td>122 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2319.53	55.06	74.00	-18.94	39.38	31.90	8.23	34.35	9.90	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1 2319.53	55.06	74.00	-18.94	39.38	31.90	8.23	34.35	9.90	400	122 PEAK																																											
Fundamental																																																					
	Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="2">Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>101.75</td><td>-----</td><td>-----</td><td>85.49</td><td>32.20</td><td>8.44</td><td>34.30</td><td>9.92</td><td>400</td><td>122 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2437.00	101.75	-----	-----	85.49	32.20	8.44	34.30	9.92	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1 2437.00	101.75	-----	-----	85.49	32.20	8.44	34.30	9.92	400	122 PEAK																																											
Avg																																																					
	Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="2">Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.76</td><td>44.89</td><td>54.00</td><td>-9.11</td><td>28.85</td><td>32.10</td><td>8.36</td><td>34.32</td><td>9.90</td><td>400</td><td>122 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2389.76	44.89	54.00	-9.11	28.85	32.10	8.36	34.32	9.90	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1 2389.76	44.89	54.00	-9.11	28.85	32.10	8.36	34.32	9.90	400	122 AVERAGE																																											
Fundamental																																																					
	Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th colspan="2">Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>95.05</td><td>-----</td><td>-----</td><td>78.78</td><td>32.20</td><td>8.45</td><td>34.30</td><td>9.92</td><td>400</td><td>122 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2437.00	95.05	-----	-----	78.78	32.20	8.45	34.30	9.92	400
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1 2437.00	95.05	-----	-----	78.78	32.20	8.45	34.30	9.92	400	122 AVERAGE																																											



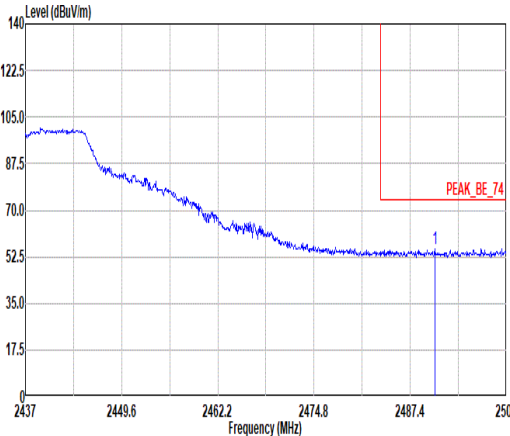
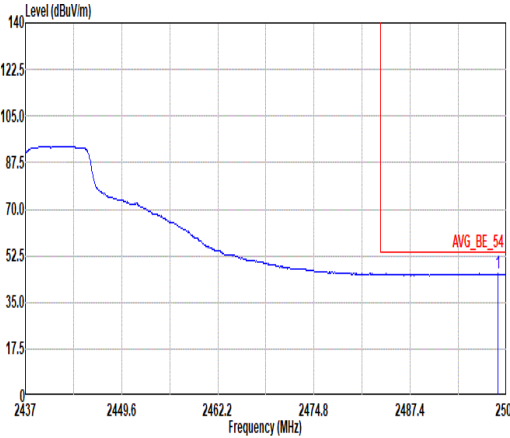


Mode	5																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11g_CH06_2437MHz																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2490.68</td><td>55.66</td><td>74.00</td><td>-18.34</td><td>38.95</td><td>32.51</td><td>8.53</td><td>34.27</td><td>9.94</td><td>400</td><td>122</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1 2490.68	55.66	74.00	-18.34	38.95	32.51	8.53	34.27	9.94	400	122	PEAK	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																													
1 2490.68	55.66	74.00	-18.34	38.95	32.51	8.53	34.27	9.94	400	122	PEAK																																													
Avg	 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2490.87</td><td>45.73</td><td>54.00</td><td>-8.27</td><td>28.93</td><td>32.59</td><td>8.54</td><td>34.27</td><td>9.94</td><td>400</td><td>122</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark	1 2490.87	45.73	54.00	-8.27	28.93	32.59	8.54	34.27	9.94	400	122	AVERAGE	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	Remark																																													
1 2490.87	45.73	54.00	-8.27	28.93	32.59	8.54	34.27	9.94	400	122	AVERAGE																																													

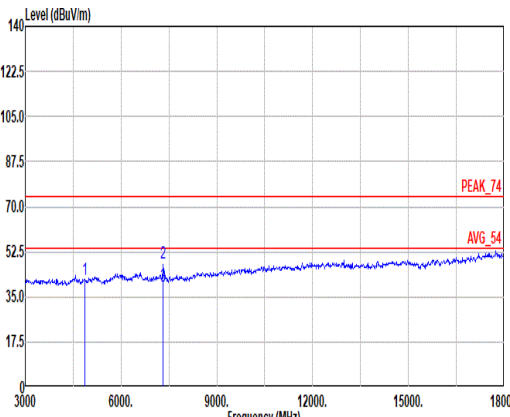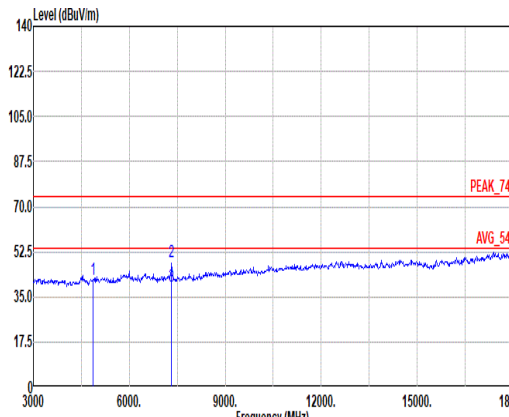

Mode	5																																																																												
	Harmonic																																																																												
	2400-2483.5_802.11g_CH06_2437MHz																																																																												
Pol.	Horizontal						Vertical																																																																						
Peak Avg																																																																													
	Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL						Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL																																																																						
<table><tr><th></th><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>41.81</td><td>74.00</td><td>-32.19</td><td>53.64</td><td>34.20</td><td>12.02</td><td>59.03</td><td>0.98</td><td>-- -- PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>47.87</td><td>74.00</td><td>-26.13</td><td>54.20</td><td>35.70</td><td>14.68</td><td>57.73</td><td>1.02</td><td>295 116 PEAK</td></tr><tr><td>3</td><td>7311.00</td><td>39.18</td><td>54.00</td><td>-14.82</td><td>45.51</td><td>35.70</td><td>14.68</td><td>57.73</td><td>1.02</td><td>295 116 AVERAGE</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	41.81	74.00	-32.19	53.64	34.20	12.02	59.03	0.98	-- -- PEAK	2	7311.00	47.87	74.00	-26.13	54.20	35.70	14.68	57.73	1.02	295 116 PEAK	3	7311.00	39.18	54.00	-14.82	45.51	35.70	14.68	57.73	1.02	295 116 AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																			
1	4874.00	41.81	74.00	-32.19	53.64	34.20	12.02	59.03	0.98	-- -- PEAK																																																																			
2	7311.00	47.87	74.00	-26.13	54.20	35.70	14.68	57.73	1.02	295 116 PEAK																																																																			
3	7311.00	39.18	54.00	-14.82	45.51	35.70	14.68	57.73	1.02	295 116 AVERAGE																																																																			

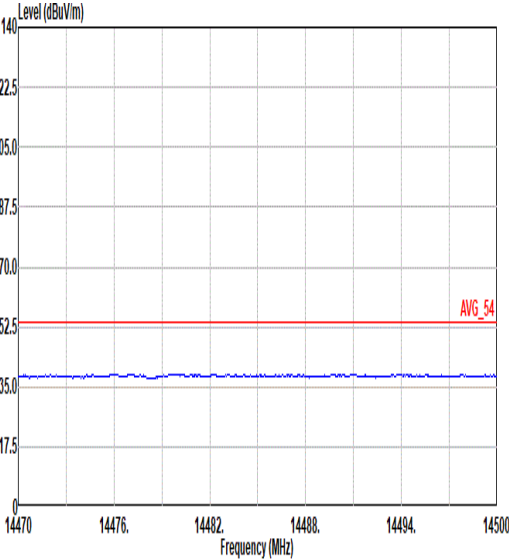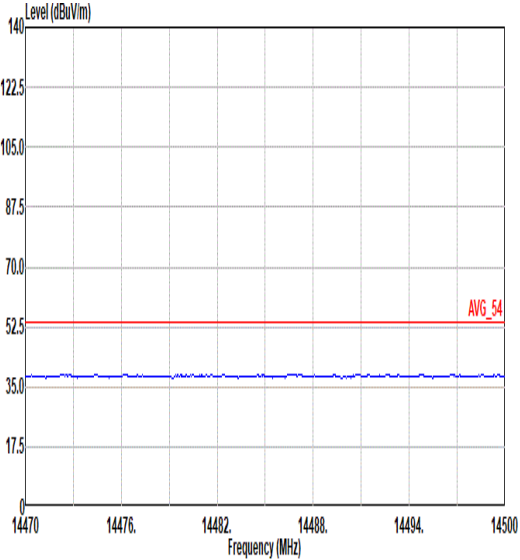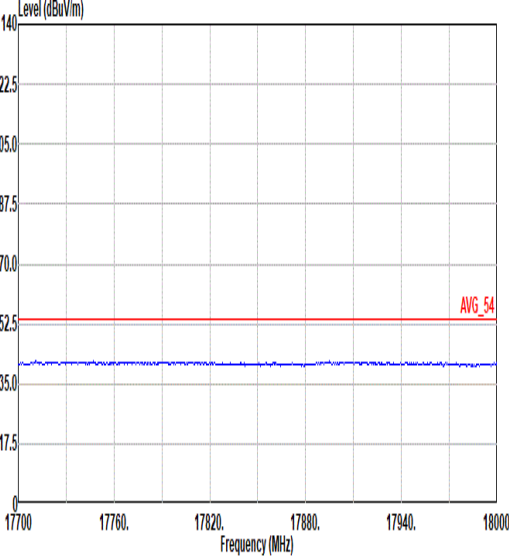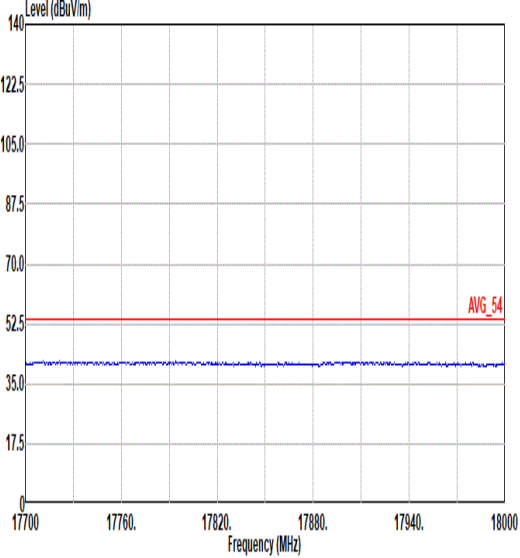

Mode	5	
	Harmonic	
	2400-2483.5_802.11g_CH06_2437MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL



6

Mode

Band Edge


2400-2483.5_802.11g_CH11_2462MHz

Pol.

Horizontal


Fundamental

Peak

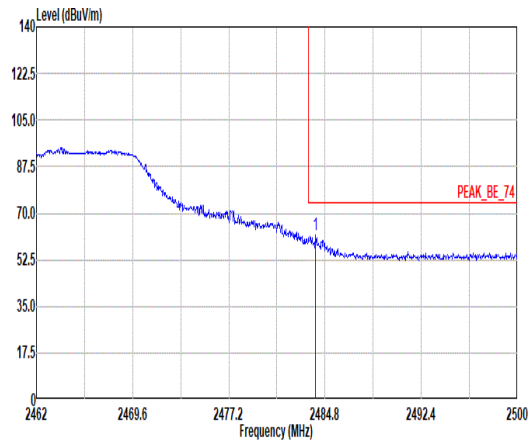

Site : 03CH07-HY
Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg
1	2484.04	61.58	74.00	-12.42	44.97	32.44	8.52	34.28	9.93	390 288 PEAK

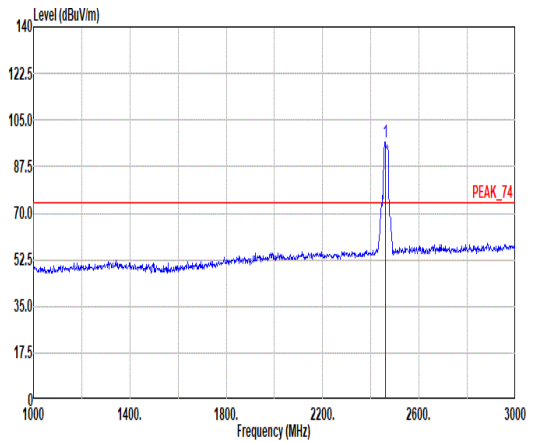

Site : 03CH07-HY
Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto


1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg
1	2462.00	96.69	-----	-----	80.30	32.28	8.48	34.29	9.92	390 288 PEAK

Avg

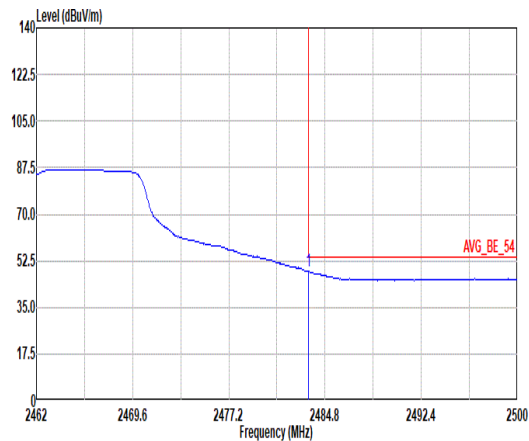

Site : 03CH07-HY
Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL
: RBW:1000.000kHz VBW:1.000kHz SMT:Auto





1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg
1	2483.51	48.45	54.00	-5.55	31.84	32.44	8.52	34.28	9.93	390 288 AVERAGE

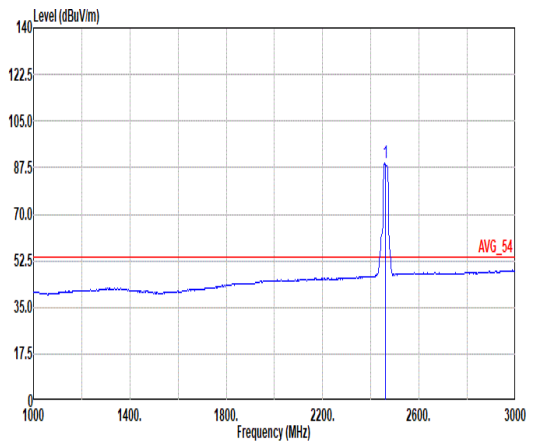

Site : 03CH07-HY
Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL
: RBW:1000.000kHz VBW:1.000kHz SMT:Auto

1	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg
1	2462.00	89.04	-----	-----	72.68	32.26	8.47	34.29	9.92	390 288 AVERAGE

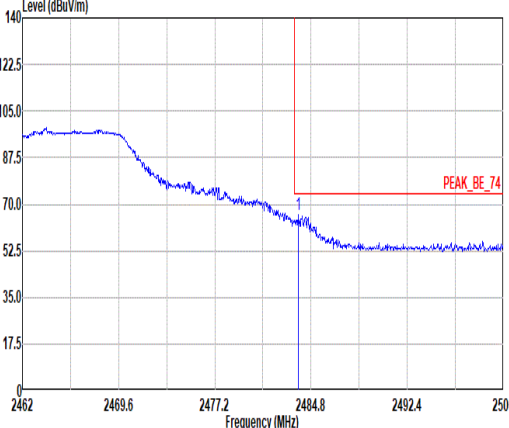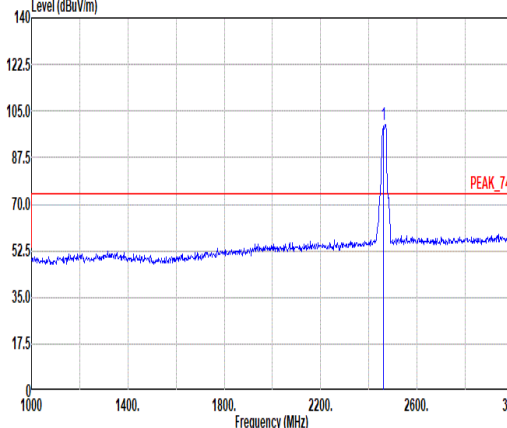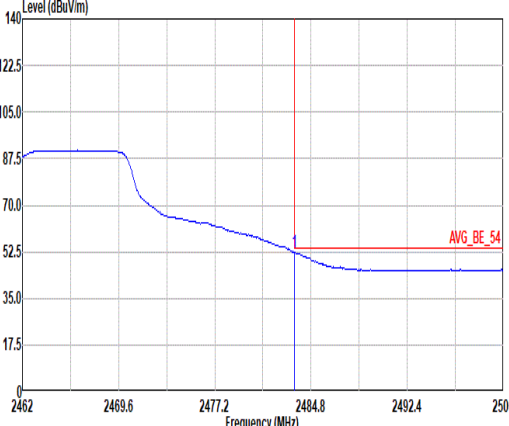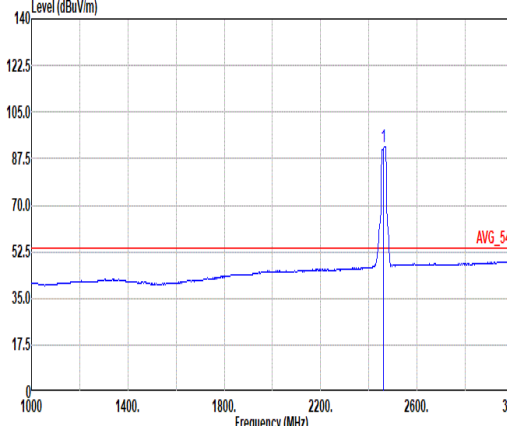

		6																																																																																																											
Mode		Band Edge																																																																																																											
		2400-2483.5_802.11g_CH11_2462MHz																																																																																																											
Pol.		Vertical					Fundamental																																																																																																						
Peak		 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.77</td><td>66.07</td><td>74.00</td><td>-7.93</td><td>49.46</td><td>32.44</td><td>8.52</td><td>34.28</td><td>9.93</td><td>298 85 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.77	66.07	74.00	-7.93	49.46	32.44	8.52	34.28	9.93	298 85 PEAK	 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>100.04</td><td>-----</td><td>-----</td><td>83.54</td><td>32.36</td><td>8.49</td><td>34.28</td><td>9.93</td><td>298 85 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	100.04	-----	-----	83.54	32.36	8.49	34.28	9.93	298 85 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2483.77	66.07	74.00	-7.93	49.46	32.44	8.52	34.28	9.93	298 85 PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2462.00	100.04	-----	-----	83.54	32.36	8.49	34.28	9.93	298 85 PEAK																																																																																																			
Avg		 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>52.45</td><td>54.00</td><td>-1.55</td><td>35.84</td><td>32.44</td><td>8.52</td><td>34.28</td><td>9.93</td><td>298 85 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	52.45	54.00	-1.55	35.84	32.44	8.52	34.28	9.93	298 85 AVERAGE	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:1.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>92.14</td><td>-----</td><td>-----</td><td>75.64</td><td>32.36</td><td>8.49</td><td>34.28</td><td>9.93</td><td>298 85 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	92.14	-----	-----	75.64	32.36	8.49	34.28	9.93	298 85 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2483.51	52.45	54.00	-1.55	35.84	32.44	8.52	34.28	9.93	298 85 AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2462.00	92.14	-----	-----	75.64	32.36	8.49	34.28	9.93	298 85 AVERAGE																																																																																																			



6

Mode

Harmonic

2400-2483.5_802.11g_CH11_2462MHz


Pol.

Horizontal

Vertical

Peak


Avg

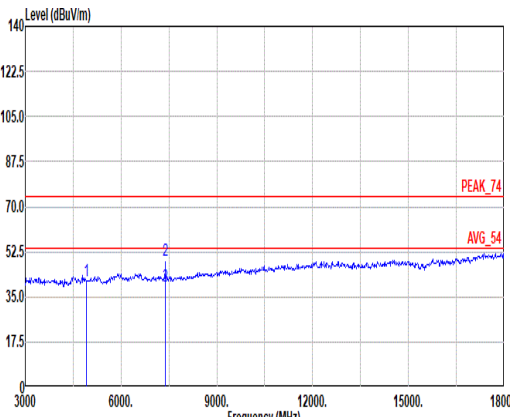

Site : 03CH07-HY

Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		
1	4924.00	41.40	74.00	-32.60	53.00	34.25	12.09	58.92	0.98	--	--	PEAK
2	7386.00	49.29	74.00	-24.71	55.56	35.70	14.82	57.82	1.03	304	115	PEAK
3	7386.00	39.04	54.00	-14.96	45.31	35.70	14.82	57.82	1.03	304	115	AVERAGE




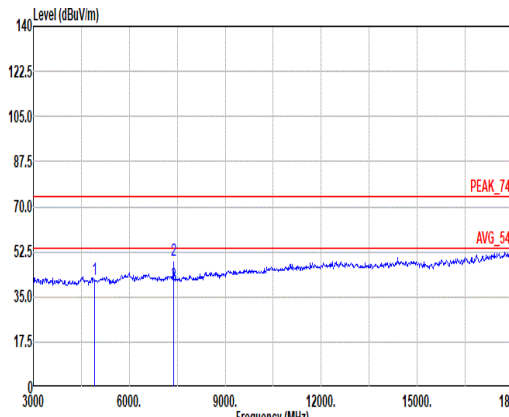


Site : 03CH07-HY

Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL

	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	4924.00	41.72	74.00	-32.28	53.32	34.25	12.09	58.92	0.98	--	--	PEAK
2	7386.00	48.96	74.00	-25.04	55.23	35.70	14.82	57.82	1.03	361	34	PEAK
3	7386.00	39.54	54.00	-14.46	45.81	35.70	14.82	57.82	1.03	361	34	AVERAGE

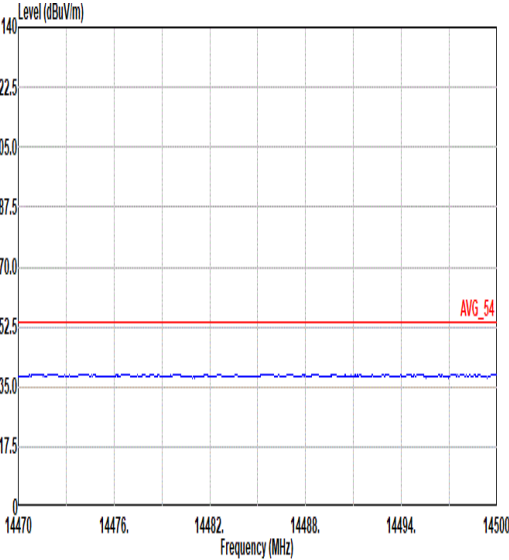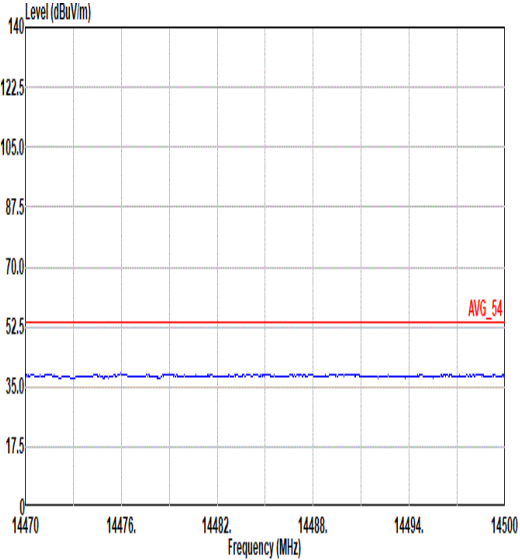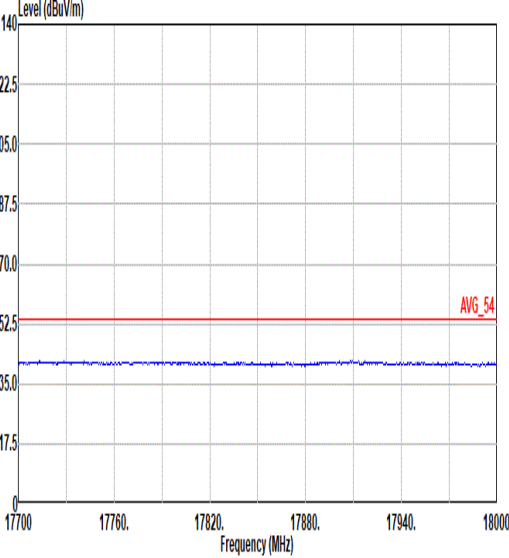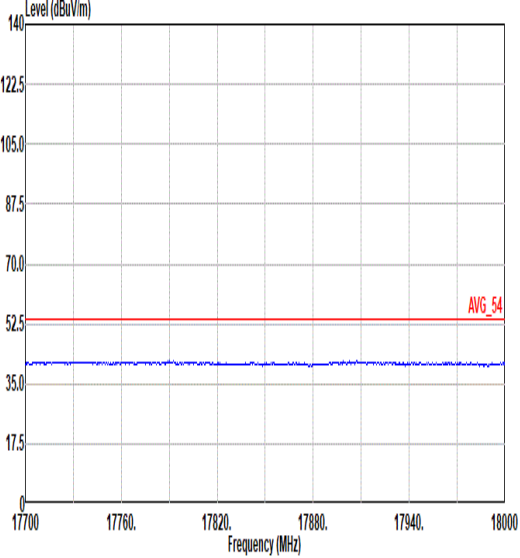

Mode	6	
	Harmonic	
	2400-2483.5_802.11g_CH11_2462MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL



7

Mode

Band Edge


2400-2483.5_802.11n_HT20_CH01_2412MHz

Pol.

Horizontal


Fundamental

Peak

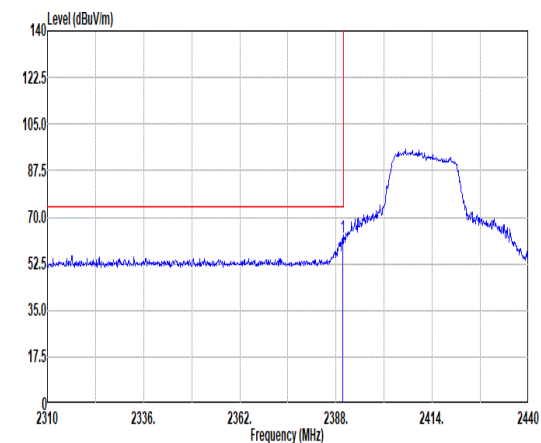

Site : 03CH07-HY
Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto


Freq	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark
	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Loss	Factor	Factor	dB	cm	deg	dB	cm	deg	
1	2389.82	62.24	74.00	-11.76	46.20	32.10	8.36	34.32	9.90	243	181	PEAK					

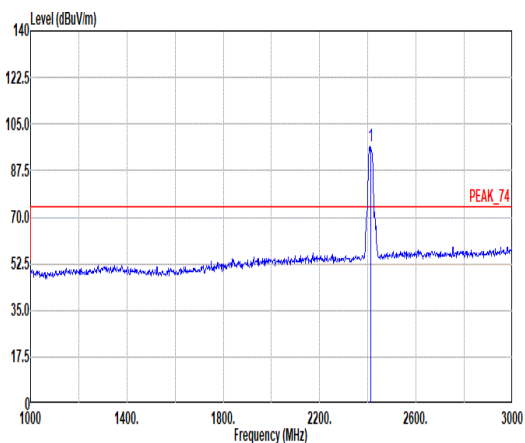

Site : 03CH07-HY
Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto


Freq	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark
	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Loss	Factor	Factor	dB	cm	deg	dB	cm	deg	
1	2412.00	96.92	74.00	-22.88	80.84	32.10	8.39	34.31	9.90	243	181	PEAK					

Avg

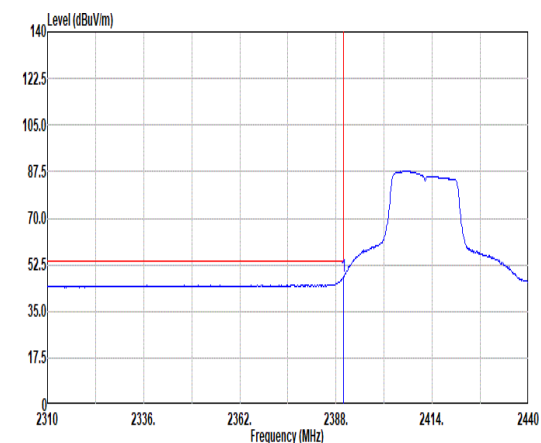

Site : 03CH07-HY
Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL
: RBW:1000.000kHz VBW:1.000kHz SMT:Auto

Freq	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark
	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Loss	Factor	Factor	dB	cm	deg	dB	cm	deg	
1	2389.95	47.89	54.00	-6.11	31.85	32.10	8.36	34.32	9.90	243	181	AVERAGE					

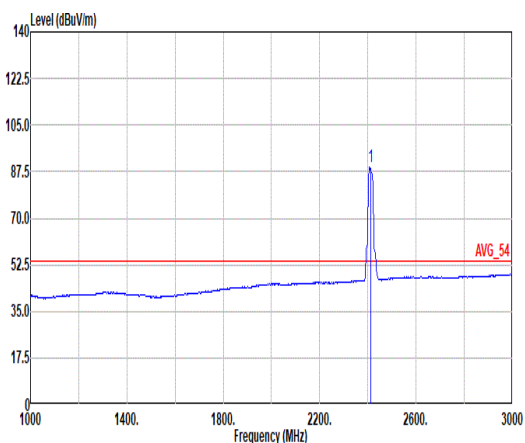

Site : 03CH07-HY
Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL
: RBW:1000.000kHz VBW:1.000kHz SMT:Auto

Freq	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark
	Level	Line Margin	Level	Margin	Factor	Loss	Factor	Loss	Factor	Factor	dB	cm	deg	dB	cm	deg	
1	2412.00	89.00	54.00	-35.00	73.00	32.10	8.39	34.31	9.90	243	181	AVERAGE					



7

Mode

Band Edge


2400-2483.5_802.11n_HT20_CH01_2412MHz

Pol.

Vertical


Fundamental

Peak

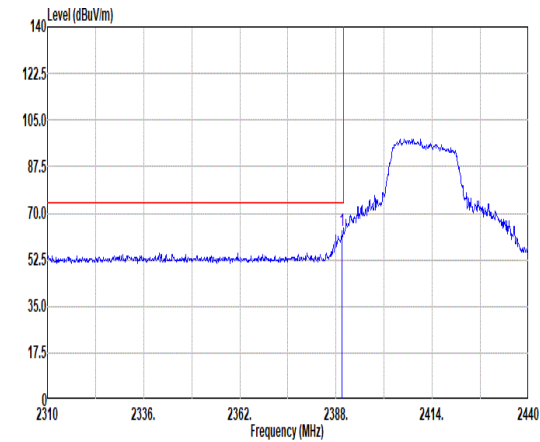

Site : 03CH07-HY
Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto


Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	
	Level	Line Margin	Level	Factor	Loss	Factor	Factor				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg
1	2389.69	63.58	74.00	-10.42	47.54	32.10	8.36	34.32	9.90	221	75 PEAK

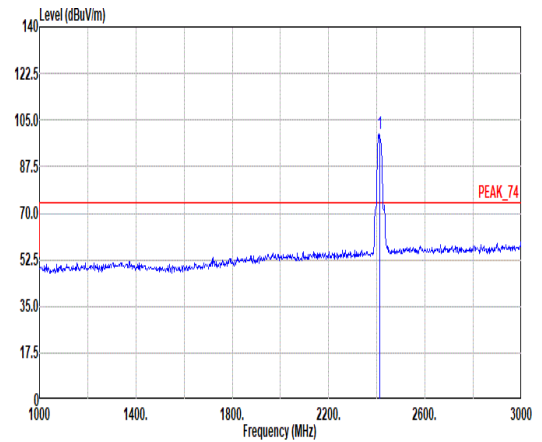

Site : 03CH07-HY
Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL
: RBW:1000.000kHz VBW:3000.000kHz SMT:Auto


Freq	Limit				Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	Level	Line	Margin		Level	Factor	Loss	Factor	Factor			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg
1	2412.00	99.75	-----		83.66	32.10	8.40	34.31	9.90	221	75	PEAK

Avg

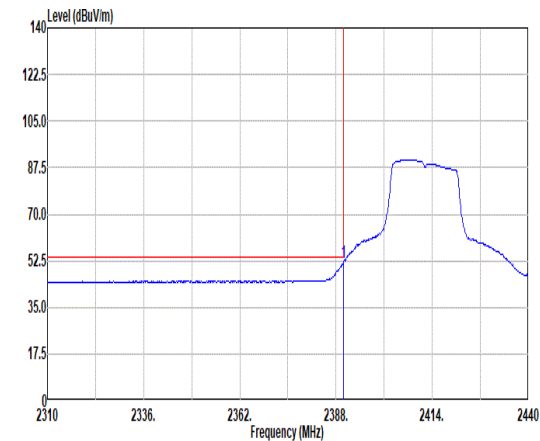

Site : 03CH07-HY
Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL
: RBW:1000.000kHz VBW:1.000kHz SMT:Auto



Freq	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		
	Level	Line Margin										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	2389.95	51.63	54.00	-2.37	35.59	32.10	8.36	34.32	9.90	221	75	AVERAGE

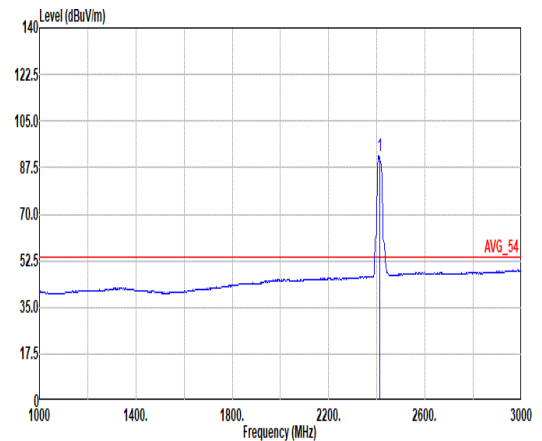





Site : 03CH07-HY
Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
: RBW:1000.000kHz VBW:1.000kHz SMT:Auto

Freq	Limit		Read		Ant		Cable		Preamp		Aux		APos		TPos		Remark
	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	Factor	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	dB	dB	cm	deg			
1	2412.00	91.71	-----	-----	75.63	32.10	8.39	34.31	9.90	221	75						AVERAGE

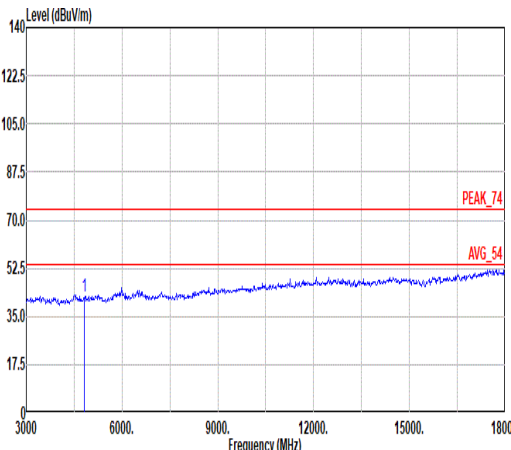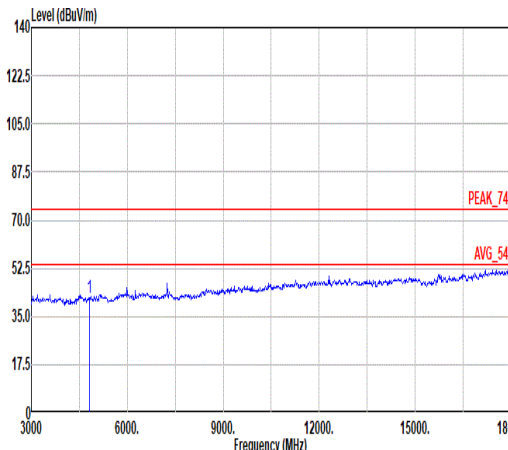

Mode	7																																																																																							
	Harmonic																																																																																							
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>42.48</td><td>74.00</td><td>-31.52</td><td>54.45</td><td>34.25</td><td>11.95</td><td>59.14</td><td>0.97</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	42.48	74.00	-31.52	54.45	34.25	11.95	59.14	0.97	--	PEAK	 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>41.95</td><td>74.00</td><td>-32.05</td><td>53.92</td><td>34.25</td><td>11.95</td><td>59.14</td><td>0.97</td><td>--</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	41.95	74.00	-32.05	53.92	34.25	11.95	59.14	0.97	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	4824.00	42.48	74.00	-31.52	54.45	34.25	11.95	59.14	0.97	--	PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	4824.00	41.95	74.00	-32.05	53.92	34.25	11.95	59.14	0.97	--	PEAK																																																																													

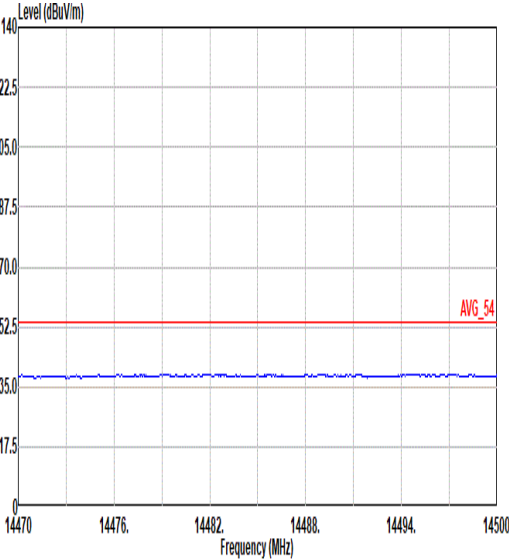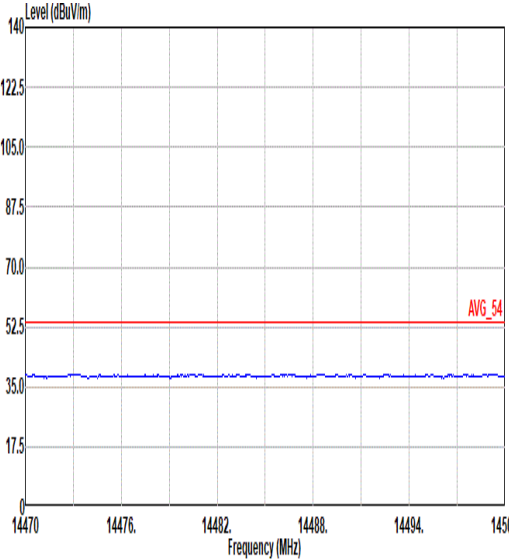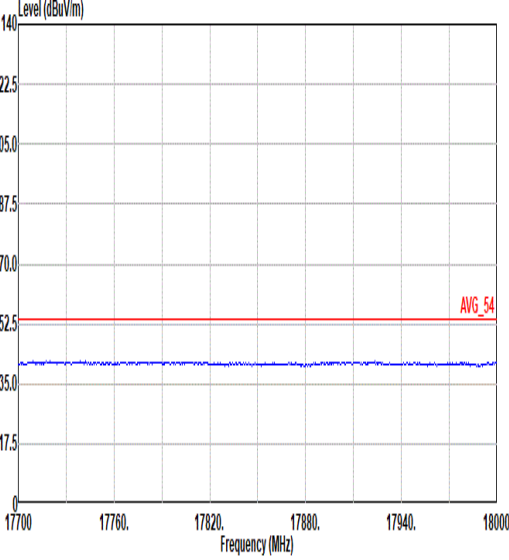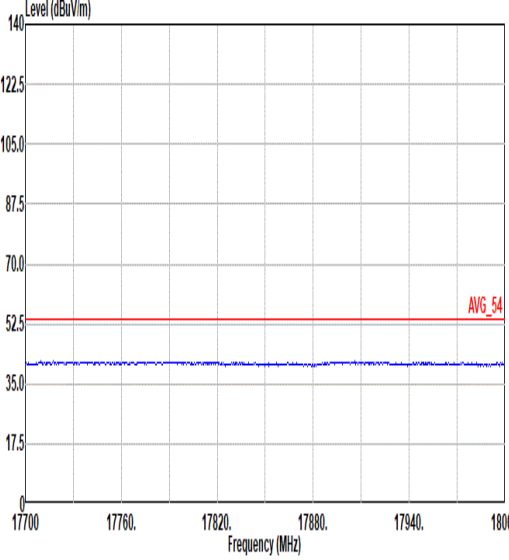

Mode	7	
	Harmonic	
	2400-2483.5_802.11n_HT20_CH01_2412MHz	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
17.7G ~18G Avg	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL