



31 January, 2012

Antenna International  
383 Main Avenue 6th Fl, Norwalk Connecticut  
United States

Dear Carl Fazio,

Enclosed you will find your file copy of a Part 15 report (FCC ID: A5EXP11-1).

For your reference, TCB will normally take another one week for reviewing the report. Approval will then be granted when no query is sorted.

Please contact me if you have any questions regarding the enclosed material.

Sincerely,

A handwritten signature in black ink, appearing to read "Shawn Xing", with a long horizontal stroke extending to the right.

Shawn Xing  
Manager

Enclosure

**Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch**

6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China  
Tel: (86 755) 8601 6288 Fax: (86 755) 8601 6751 Website: [www.china.intertek-etlsemko.com](http://www.china.intertek-etlsemko.com)



## ANTENNA INTERNATIONAL

Application  
For  
Certification  
**(FCC ID: A5EXP11-1)**  
Computer Peripheral

SZ11110301-1  
Billy Li  
31 January, 2012

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C\_PC\_a  
FCC ID: A5EXP11-1

---

# INTERTEK TESTING SERVICES

---

## LIST OF EXHIBITS

### *INTRODUCTION*

<i>EXHIBIT 1:</i>	General Description
<i>EXHIBIT 2:</i>	System Test Configuration
<i>EXHIBIT 3:</i>	Emission Results
<i>EXHIBIT 4:</i>	Equipment Photographs
<i>EXHIBIT 5:</i>	Product Labeling
<i>EXHIBIT 6:</i>	Technical Specifications
<i>EXHIBIT 7:</i>	Instruction Manual
<i>EXHIBIT 8:</i>	Miscellaneous Information
<i>EXHIBIT 9:</i>	Test Equipment List

# INTERTEK TESTING SERVICES

---

## MEASUREMENT / TECHNICAL REPORT

**ANTENNA INTERNATIONAL – MODEL: XP-IRIS  
FCC ID: A5EXP11-1**

**31 January, 2012**

This report concerns (check one:)      Original Grant  Class II Change

Equipment Type: JBP-Class B Computing Device Peripheral

---

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)?      Yes       No

If yes, defer until: \_\_\_\_\_  
date

Company Name agrees to notify the Commission by: \_\_\_\_\_  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

---

Transition Rules Request per 15.37?      Yes       No

If no, assumed Part 15, Subpart C for intentional radiator – the new 47 CFR [10-1-10 Edition] provision.

---

Report prepared by:

Shawn Xing  
Intertek Testing Services Shenzhen Ltd.  
Kejiyuan Branch  
6F, D Block, Huahan Building, Langshan Road  
Nanshan District, Shenzhen, P. R. China  
Phone: (86 755) 8601 6288  
Fax: (86 755) 8601 6751

---

---

# INTERTEK TESTING SERVICES

---

---

## Table of Contents

<b>1.0</b>	<b><u>General Description</u></b> .....	2
1.1	Product Description.....	2
1.2	Related Submittal(s) Grants.....	2
1.3	Test Methodology.....	3
1.4	Test Facility.....	3
<b>2.0</b>	<b><u>System Test Configuration</u></b> .....	5
2.1	Justification.....	5
2.2	EUT Exercising Software.....	5
2.3	Special Accessories.....	5
2.4	Equipment Modification.....	5
2.5	Measurement Uncertainty.....	6
2.6	Support Equipment List and Description.....	6
<b>3.0</b>	<b><u>Emission Results</u></b> .....	8
3.1	Field Strength Calculation.....	9
3.2	Radiated Emission Configuration Photograph.....	11
3.3	Radiated Emission Data.....	12
3.4	Conducted Emission Configuration Photograph.....	16
3.5	Conducted Emission Data.....	17
<b>4.0</b>	<b><u>Equipment Photographs</u></b> .....	21
<b>5.0</b>	<b><u>Product Labelling</u></b> .....	23
<b>6.0</b>	<b><u>Technical Specifications</u></b> .....	25
<b>7.0</b>	<b><u>Instruction Manual</u></b> .....	27
<b>8.0</b>	<b><u>Miscellaneous Information</u></b> .....	29
8.1	Emissions Test Procedures.....	30
<b>9.0</b>	<b><u>Test Equipment List</u></b> .....	33

## INTERTEK TESTING SERVICES

---

### List of attached file

Exhibit Type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated photos	radiated photos.pdf
Test Setup Photo	Conducted photos	conducted photos.pdf
External Photo	External Photos	external photos.pdf
Internal Photo	Internal Photos	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
ID Label / Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Letter of Agency	agency.pdf

# INTERTEK TESTING SERVICES

---

## EXHIBIT 1

### GENERAL DESCRIPTION

## **INTERTEK TESTING SERVICES**

---

### **1.0 General Description**

#### **1.1 Product Description**

The Equipment Under Test (EUT) is a XP-IRIS TM. The device can be used for data transfer by a charging pedestal through PC to internal ARCHOS 32 internet tablet. The EUT is powered by DC 3.7V rechargeable battery through the internet tablet.

#### **1.2 Related Submittal(s) Grants**

This is an application for certification of a computer peripheral and the internal ARCHOS internet tablet has been approved with FCC ID: SOV8200.



## INTERTEK TESTING SERVICES

---

### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

### 1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch** and located at 6F, D Block, Huahan Building, Langshan Road, Nanshan District, Shenzhen, P. R. China. This test facility and site measurement data have been fully placed on file with the FCC.

---

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 2**

**SYSTEM TEST CONFIGURATION**

---

## INTERTEK TESTING SERVICES

---

### 2.0 **System Test Configuration**

#### 2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.4 (2003).

The device is powered by a 3.7V fully charged battery during the test. The worst case data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. The step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

The frequency range from 30MHz to 2GHz was searched for spurious emissions from the device. Only those emissions reported were detected. All other emissions were at least 20 dB below the applicable limits.

#### 2.2 EUT Exercising Software

N/A.

#### 2.3 Special Accessories

There is one ferrite core attached with the shielding signal USB cable of the charger.

#### 2.4 Equipment Modification

Any modifications installed previous to testing by Antenna International will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd. Kejiyuan Branch.

---

## INTERTEK TESTING SERVICES

---

### 2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

### 2.6 Support Equipment List and Description

This product was tested in the following configuration:


Refer List:

Description	Manufacturer	Model No.
Laptop	Lenovo	T61
Hard Disk	Smart.drive	HD-003
USB Cable	Smart.drive	Unshielded, Length 155cm
1394 Cable	Smart.drive	Unshielded, Length 180cm
Earphone	N/A	120cm
INTERNET TABLET	ARCHOS	8200
Charger	Antenna International	80cm shielding USB cable with one ferrite core attached

All the items listed under section 2.0 of this report are

*Confirmed by:*

*Shawn Xing*  
*Manager*  
*Intertek Testing Services Shenzhen Ltd.*  
*Kejiyuan Branch*  
*Agent for Antenna International*

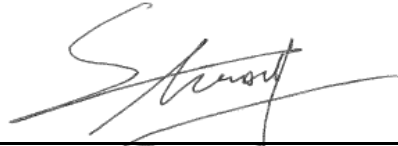  
\_\_\_\_\_ *Signature*

\_\_\_\_\_ *31 January, 2012* *Date*

---

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 3**  
**EMISSION RESULTS**

## INTERTEK TESTING SERVICES

---

### 3.0 Emission Results

Data is included worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

---

## INTERTEK TESTING SERVICES

---

### 3.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

---

## INTERTEK TESTING SERVICES

---

### 3.1 Field Strength Calculation (cont'd)

#### Example

Assume a receiver reading of 62.0dB $\mu$ V is obtained. The antenna factor of 7.4dB and cable factor of 1.6dB is added. The amplifier gain of 29dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0dB, and the resultant average factor was -10dB. The net field strength for comparison to the appropriate emission limit is 32dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 62.0\text{dB}\mu\text{V}$$

$$AF = 7.4\text{dB}$$

$$CF = 1.6\text{dB}$$

$$AG = 29.0\text{dB}$$

$$PD = 0\text{dB}$$

$$AV = -10\text{dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32\text{dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32\text{dB}\mu\text{V/m})/20] = 39.8\mu\text{V/m}$$



## INTERTEK TESTING SERVICES

---

### 3.2 Radiated Emission Configuration Photograph

Worst Case Radiated Emission  
At  
660.015MHz (PC Download Mode)

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos.pdf.

## INTERTEK TESTING SERVICES


---

### 3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 7.4dB margin (PC Download Mode)

#### **TEST PERSONNEL:**



---

*Signature*

Billy Li, Team Leader  
*Typed / Printed Name*

31 January, 2012  
*Date*

## INTERTEK TESTING SERVICES

---

Company: Antenna International

Date of Test: 31 January, 2012

Model: XP-IRIS

Operating Mode: PC Download With INTERNET TABLET

**Table 1**

### **Radiated Emissions**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	179.865	41.3	20.0	9.9	31.2	43.5	-12.3
Horizontal	299.990	41.2	20.0	15.4	36.6	46.0	-9.4
Horizontal	660.015	36.5	20.0	22.1	38.6	46.0	-7.4
Vertical	300.145	35.9	20.0	15.4	31.3	46.0	-14.7
Vertical	419.940	28.8	20.0	17.8	26.6	46.0	-19.4
Vertical	780.001	31.3	20.0	24.1	35.4	46.0	-10.6
Vertical	1725.430	36.1	20.0	27.4	43.5	54.0	-10.5

- NOTES:
1. All measurements were made at 3 meters. Harmonic emissions not detected at the 3 meter distances were measured at 10 meter and an inverse proportional extrapolation was performed to compare the signal level to the 3 meter limit. No other harmonic emissions than those reported were detected at a test distance of 10 meter.
  2. Negative value in the margin column shows emission below limit.
  3. All emissions below 1000MHz are below the QP limit and all emissions above 1000MHz are below the AV limit.
  4. Peak detector was used when the frequency above 1000MHz and QP detector was used when the frequency below 1000MHz.

Test Engineer: Billy Li

## INTERTEK TESTING SERVICES

---

Company: Antenna International

Date of Test: 31 January, 2012

Model: XP-IRIS

Worst Case Operating Mode: Playing through INTERNET TABLET

**Table 2**

### **Radiated Emissions**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	178.253	40.3	20.0	9.8	30.1	43.5	-13.4
Horizontal	292.335	37.1	20.0	15.4	32.5	46.0	-13.5
Horizontal	661.400	33.6	20.0	22.1	35.7	46.0	-10.3
Vertical	302.560	35.2	20.0	15.4	30.6	46.0	-15.4
Vertical	420.190	27.4	20.0	17.9	25.3	46.0	-20.7
Vertical	782.530	27.5	20.0	24.1	31.6	46.0	-14.4
Vertical	1732.500	35.4	20.0	27.5	42.9	54.0	-11.1

- NOTES:
1. All measurements were made at 3 meters. Harmonic emissions not detected at the 3 meter distances were measured at 10 meter and an inverse proportional extrapolation was performed to compare the signal level to the 3 meter limit. No other harmonic emissions than those reported were detected at a test distance of 10 meter.
  2. Negative value in the margin column shows emission below limit.
  3. All emissions below 1000MHz are below the QP limit and all emissions above 1000MHz are below the AV limit.
  4. Peak detector was used when the frequency above 1000MHz and QP detector was used when the frequency below 1000MHz.

Test Engineer: Billy Li

---

## INTERTEK TESTING SERVICES

---

Company: Antenna International  
Model: XP-IRIS  
Operating Mode: Keyboard Operating

Date of Test: 31 January, 2012

**Table 3**

**Radiated Emissions**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
Horizontal	182.650	35.1	20.0	10.1	25.2	43.5	-18.3
Horizontal	330.256	25.0	20.0	16.3	21.3	46.0	-24.7
Horizontal	654.100	24.4	20.0	21.7	26.1	46.0	-19.9
Vertical	290.245	29.8	20.0	14.9	24.7	46.0	-21.3
Vertical	420.258	29.3	20.0	17.2	26.5	46.0	-19.5
Vertical	765.885	26.6	20.0	23.5	30.1	46.0	-15.9
Vertical	1746.350	35.4	20.0	27.9	43.3	54.0	-10.7

- NOTES:
1. All measurements were made at 3 meters. Harmonic emissions not detected at the 3 meter distances were measured at 10 meter and an inverse proportional extrapolation was performed to compare the signal level to the 3 meter limit. No other harmonic emissions than those reported were detected at a test distance of 10 meter.
  2. Negative value in the margin column shows emission below limit.
  3. All emissions below 1000MHz are below the QP limit and all emissions above 1000MHz are below the AV limit.
  4. Peak detector was used when the frequency above 1000MHz and QP detector was used when the frequency below 1000MHz.

Test Engineer: Billy Li

## INTERTEK TESTING SERVICES

---

### 3.4 Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration  
at  
0.198 MHz

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.


## INTERTEK TESTING SERVICES

---

### 3.5 Conducted Emission Data

Judgement: Passed by 16.9 dB margin

#### **TEST PERSONNEL:**



---

*Signature*

Billy Li, Team Leader  

---

*Typed/Printed Name*

31 January, 2012  

---


*Date*

# INTERTEK TESTING SERVICES

Company: Antenna International  
 Model: XP-IRIS  
 Worst Case Operating Mode: PC Download

Date of Test: 31 January, 2012

## Conducted Emission Test - FCC

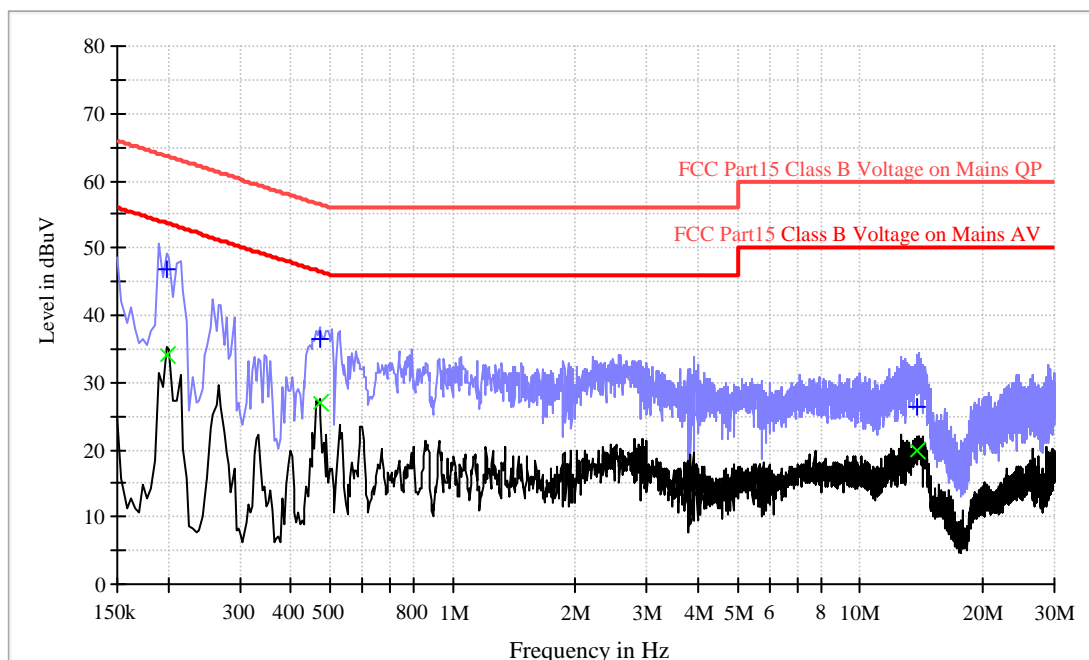

### Result Table-QP

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.198000	46.8	L1	9.6	16.9	63.7
0.470000	36.6	L1	9.6	19.9	56.5
0.530000	32.9	L1	9.6	23.1	56.0
1.192000	28.6	L1	9.6	27.4	56.0
2.441000	30.6	L1	9.8	25.4	56.0
13.858000	26.5	L1	10.0	33.5	60.0

### Result Table-AV

Frequency (MHz)	Average (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.198000	34.0	L1	9.6	19.7	53.7
0.470000	26.9	L1	9.6	19.6	46.5
0.530000	24.6	L1	9.6	21.4	46.0
1.192000	22.9	L1	9.6	23.1	46.0
2.441000	24.5	L1	9.8	21.5	46.0
13.858000	19.9	L1	10.0	30.1	50.0

Test Engineer: Billy Li




# INTERTEK TESTING SERVICES

Company: Antenna International  
 Model: XP-IRIS  
 Worst Case Operating Mode: PC Download

Date of Test: 31 January, 2012

## Conducted Emission Test - FCC

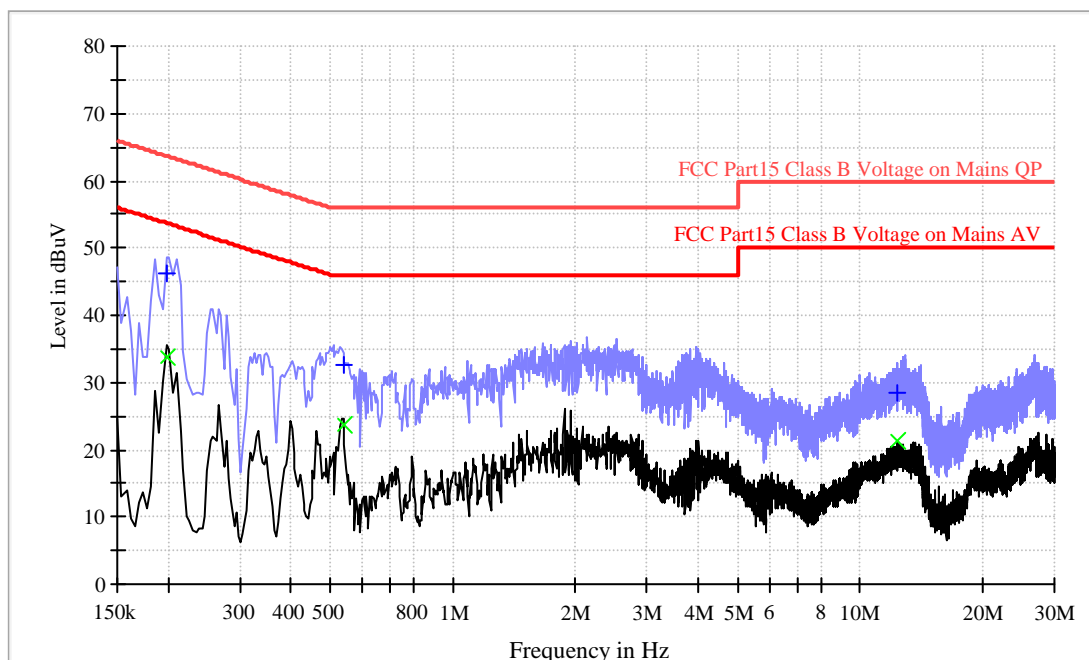

### Result Table-QP

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.198000	46.3	N	9.6	17.4	63.7
0.538000	32.6	N	9.6	23.4	56.0
0.540000	32.4	N	9.6	23.6	56.0
1.192000	28.4	N	9.6	27.6	56.0
2.441000	30.5	N	9.8	25.5	56.0
12.398000	28.3	N	10.0	31.7	60.0

### Result Table-AV

Frequency (MHz)	Average (dB $\mu$ V)	Line	Corr. (dB)	Margin (dB)	Limit (dB $\mu$ V)
0.198000	33.8	N	9.6	19.9	53.7
0.538000	23.7	N	9.6	22.3	46.0
0.540000	24.3	N	9.6	21.7	46.0
1.192000	22.6	N	9.6	23.4	46.0
2.441000	24.3	N	9.8	21.7	46.0
12.398000	21.3	N	10.0	28.7	50.0

Test Engineer: Billy Li

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 4**

**EQUIPMENT PHOTOGRAPHS**

## INTERTEK TESTING SERVICES

---

### 4.0 Equipment Photographs

For electronic filing, photographs of the tested EUT are saved with filename: external photos.pdf and internal photos.pdf.

**EXHIBIT 5**  
**PRODUCT LABELLING**

## INTERTEK TESTING SERVICES

---

### 5.0 **Product Labelling**

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

---

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 6**

**TECHNICAL SPECIFICATIONS**

## INTERTEK TESTING SERVICES

---

### 6.0 Technical Specifications

For electronic filing, the block diagram of the tested EUT is saved with filename: block.pdf.

**EXHIBIT 7**  
**INSTRUCTION MANUAL**



## INTERTEK TESTING SERVICES

---

### 7.0 Instruction Manual

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold / leased in the United States.

---

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 8**

**MISCELLANEOUS INFORMATION**

## INTERTEK TESTING SERVICES

---

### 8.0 Miscellaneous Information

This miscellaneous information includes emission measuring procedure.

---

## INTERTEK TESTING SERVICES

---

### 8.1 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of computer peripheral operating under Part 15, Subpart B rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.4 – 2003.

The computer peripheral equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately one meter in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The antenna height and polarization are varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions are in QP mode from the frequency band 30MHz to 1GHz with RBW setting 120kHz and in PK & AV mode from frequency band 1GHz to 2GHz with RBW setting 1MHz. Detector function for conducted emissions are in QP & AV mode and IFBW setting is 9kHz from the frequency band 150kHz to 30MHz.

For radiated emission, the frequency range scanned is 30MHz to 2GHz. For line-conducted emissions, the range scanned is 150kHz to 30MHz.

## INTERTEK TESTING SERVICES

---

### 8.1 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

Conducted measurements are made as described in ANSI C63.4 – 2003.

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 9**

**TEST EQUIPMENT LIST**

## INTERTEK TESTING SERVICES

---

### 9.0 Test Equipment List

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
SZ061-03	BiConiLog Antenna	ETS	3142C	00066460	02-Jul-11	02-Jan-13
SZ185-01	EMI Receiver	R&S	ESCI	100547	08-Mar-11	08-Mar-12
SZ061-08	Horn Antenna	ETS	3115	00092346	15-Oct-11	15-Oct-12
SZ056-03	Spectrum Analyzer	R&S	FSP 30	101148	08-Mar-11	08-Mar-12
SZ181-04	Preamplifier	Agilent	8449B	3008A02474	08-Mar-11	08-Mar-12
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	4102	06-Mar-11	06-Mar-12
SZ062-02	RF Cable	RADIALL	RG 213U	--	24-Sep-11	24-Mar-12
SZ062-06	RF Cable	RADIALL	0.04-26.5GHz	--	03-Sep-11	03-Mar-12
SZ062-12	RF Cable	RADIALL	0.04-26.5GHz	--	03-Sep-11	03-Mar-12
SZ185-02	EMI Test Receiver	R&S	ESCI	100692	05-Nov-11	05-Nov-12
SZ187-01	Two-Line V-Network	R&S	ENV216	100072	05-Nov-11	05-Nov-12
SZ187-02	Two-Line V-Network	R&S	ENV216	100073	05-Nov-11	05-Nov-12
SZ188-03	Shielding Room	ETS	RFD-100	4100	16-Sep-10	16-Sep-13