



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 90 AND IC RSS-119, RSS-GEN TEST REPORT

| | |
|-----------------------------|------------------------------------------------------------------------|
| APPLICANT | MOTOROLA SOLUTIONS, INC. |
| | 1301 EAST ALGONQUIN RD. SCHAUMBURG IL 60196 USA |
| FCC ID | ABZ99FT4089 |
| IC CERTIFICATION | 109AB-99FT4089 |
| MODEL NUMBER | AAH02RDH9JA2AN |
| PRODUCT DESCRIPTION | UHF1 PORTABLE RADIO |
| DATE SAMPLE RECEIVED | 8/1/2011 |
| DATE TESTED | 8/24/2011 |
| TESTED BY | Nam Nguyen |
| APPROVED BY | Mario de Aranzeta |
| TIMCO REPORT NO. | 1715BT11TestReport_Rev.doc |
| TEST RESULTS | <input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL |

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



Certificate # 0955-01

TABLE OF CONTENTS

| | |
|----------------------------------------------------------|-------------------------------------|
| GENERAL REMARKS | 3 |
| GENERAL INFORMATION | 4 |
| TEST PROCEDURES..... | 5 |
| RF POWER OUTPUT | 6 |
| MODULATION CHARACTERISTICS..... | 7 |
| AUDIO FREQUENCY RESPONSE | 8 |
| AUDIO LOW PASS FILTER | 9 |
| AUDIO INPUT VERSUS MODULATION..... | 10 |
| OCCUPIED BANDWIDTH | 11 |
| SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)..... | 15 |
| FIELD STRENGTH OF SPURIOUS EMISSIONS | 18 |
| RECEIVER RADIATED SPURIOUS EMISSIONS..... | Error! Bookmark not defined. |
| FREQUENCY STABILITY | 21 |
| TRANSIENT FREQUENCY BEHAVIOR..... | 22 |
| EMC EQUIPMENT LIST..... | 25 |

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

The test results relate only to the items tested.

Summary

The device under test does:

fulfill the general approval requirements as identified in this test report
 not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.



Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669

Authorized Signatory Name:



Mario de Aranzeta C.E.T.
Compliance Engineer/ Lab. Supervisor

Date: April 18, 2012

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

GENERAL INFORMATION
DUT Specification

| | |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| DUT Description | ANDORRA UHF1 PORTABLE RADIO |
| FCC ID | ABZ99FT4089 |
| IC Certification | 109AB-99FT4089 |
| Model Number | AAH02RDH9JA2AN |
| Serial Number | N/A |
| Operating Frequency | (406.00 –512.00) MHz |
| Test Frequencies | (406.125, 450.25, 460.125, 469.75, and 511.9875) MHz |
| Type of Emission | 11K0F3E, 7K60F1D 7K60F1E, 7K60F1W, 7K60FXD, 7K60FXE |
| Modulation | FM & C4FM (APCO 25) |
| DUT Power Source | <input type="checkbox"/> 110–120Vac/50– 60Hz <input type="checkbox"/> DC Power 12V <input checked="" type="checkbox"/> Battery Operated Exclusively |
| Test Item | <input type="checkbox"/> Prototype <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Production |
| Type of Equipment | <input type="checkbox"/> Fixed <input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable |
| Test Conditions | Temperature: 26°C Relative humidity: 50%. |
| Modification to the DUT | None |
| Test Exercise | The DUT was placed in continuous transmit mode. |
| Applicable Standards | ANSI/TIA 603-C:2004, FCC CFR 47 Part 90, IC RSS-119, RSS-GEN |
| Test Facility | Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA. |

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc



TEST PROCEDURES

Power Line Conducted Interference: The procedure used was ANSI/TIA 603-C: 2004 using a 50uH LISN. Both lines were observed with the DUT transmitting. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

Bandwidth 20 dB: The measurements were made with the spectrum analyzer's resolution bandwidth (RBW) = 1 MHz and the video bandwidth (VBW) = 3 MHz and the span set as shown on plot.

Power Output: The RF power output was measured at the antenna feed point using a peak power meter.

Antenna Conducted Emissions: The RBW = 100 kHz, VBW = 300 kHz and the span set to 10 MHz and the spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental. Above 1 GHz the resolution bandwidth was 1 MHz and the VBW = 3 MHz and the span to 50 MHz.

Radiation Interference: The test procedure used was ANSI/TIA 603-C: 2004 using an Agilent spectrum receiver with pre-selector. The bandwidth (RBW) of the spectrum receiver was 100 kHz up to 1 GHz and 1 MHz above 1 GHz with an appropriate sweep speed. The VBW above 1 GHz was 3 MHz. The analyzer was calibrated in dB above a micro volt at the output of the antenna.

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

RF POWER OUTPUT

Rule Part No.: FCC Part 2.1046(a), IC RSS-119 4.1 and 5.4, RSS-GEN 4.8

Test Requirements:

Method of Measurement: RF power is measured by connecting a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

Test Setup Diagram:



Test Data:

OUTPUT POWER:

| Tuned Freq (MHz) | Power (W) | |
|---------------------|-----------|-----|
| | Hi | Low |
| 406.13 | 3.9 | 1.1 |
| 450.25 | 4.2 | 1.2 |
| 460.13 | 4.2 | 1.2 |
| 469.75 | 3.8 | 1.1 |
| 511.98 | 4.0 | 1.1 |

Part 2.1033 (C)(8) DC Input into the final amplifier

FOR LOW POWER SETTING INPUT POWER: $(7.2V)(0.98A) = 7.06$ Watts

FOR HIGH POWER SETTING INPUT POWER: $(7.2V)(1.75A) = 12.60$ Watts

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc



MODULATION CHARACTERISTICS

Part 2.1033(c)

Part 2.1033(c) (4) Type of Emission: 11K2F1D , 11K2F2D, 11K2F3E

FCC Part 90.209, IC RSS-119 5.5

FCC Part 90.207

Type of Emission: 11K0F3E

$$Bn = 2M + 2DK$$

$$M = 3000$$

$$D = 2500$$

$$K=1$$

$$Bn = 2(3000)+2(2500) = 11.0k$$

The transceiver is also capable of transmitting APCO 25 (P25) Phase 1 C4FM with the following emission designators: 7K60F1D, 7K60F1E, 7K60FXD, 7K60FXE, and 7K60F1W

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

AUDIO FREQUENCY RESPONSE

Rule Part No.: FCC Part 2.1047(a)(b), IC RSS-119 5.2


Test Requirements:

Method of Measurement:


The audio frequency response was measured in accordance with ANSI/TIA 603-C: 2004. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 – 5000Hz shall be submitted. The audio frequency response curve is shown below.

AUDIO FREQUENCY RESPONSE PLOT

Narrow channel BW:

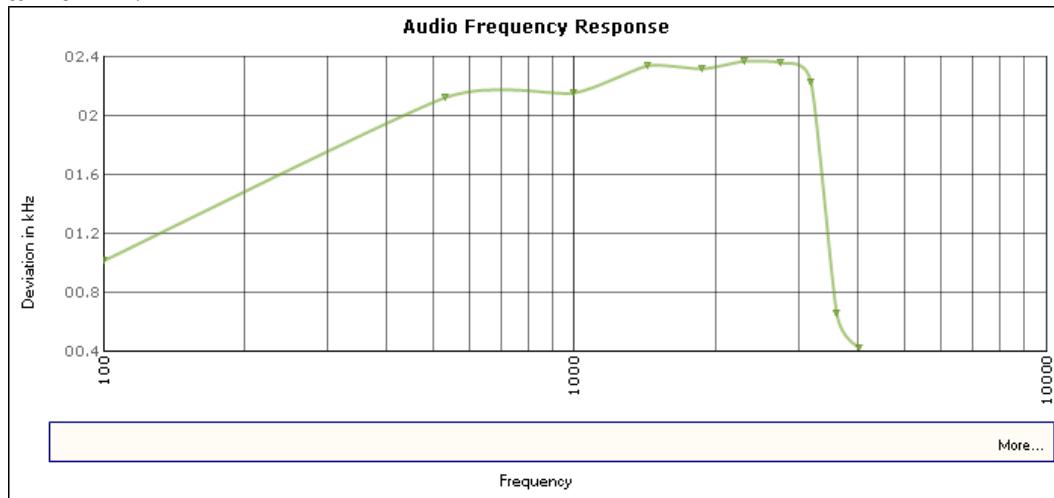

Wide channel BW:

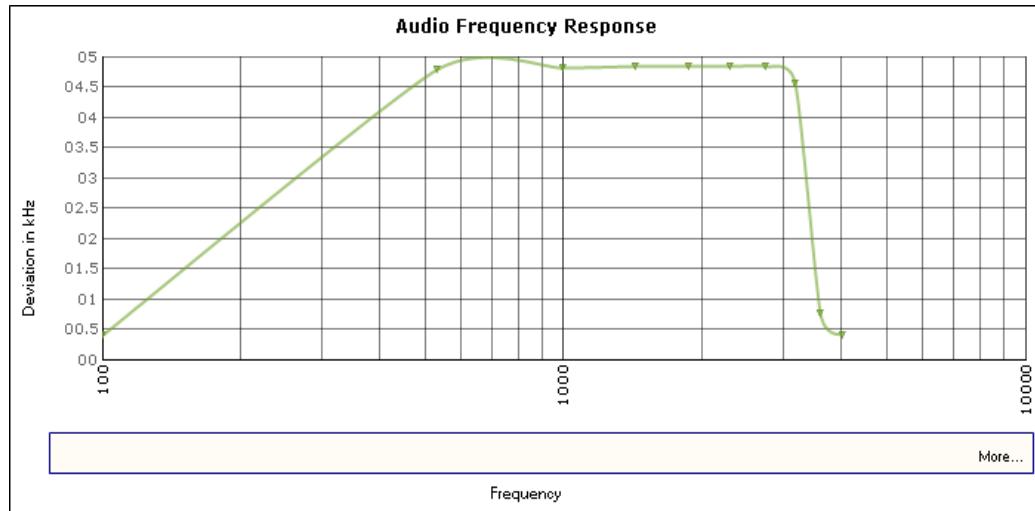

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc


AUDIO LOW PASS FILTER

VOICE MODULATED COMMUNICATION EQUIPMENT


Part 2.1047(a) Voice modulated communication equipment: For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

AUDIO LOW PASS FILTER

Narrow channel BW:

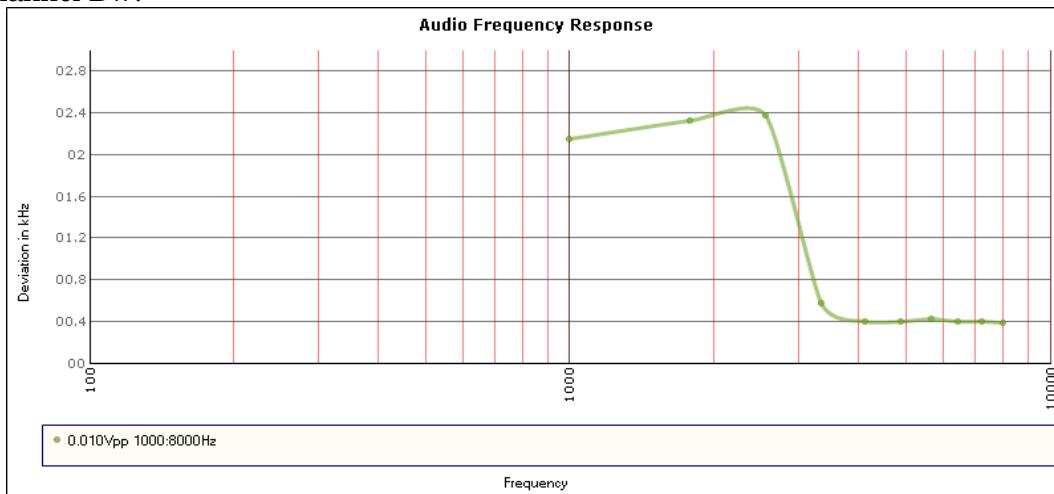

Wide channel BW:

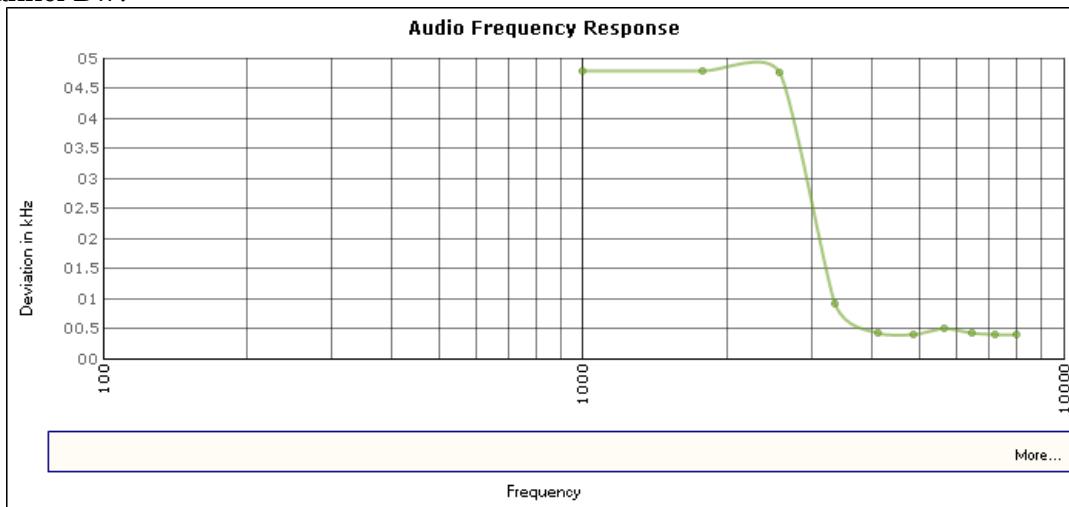

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

AUDIO INPUT VERSUS MODULATION

Rule Part No.: FCC Part 2.1047(b) & 90, IC RSS-119 5.2


Test Requirements:

Method of Measurement: **Modulation cannot exceed 100%,** The audio input level needed for a particular percentage of modulation was measured in accordance with ANSI/TIA 603-C:2004. The audio input curves versus modulation are shown below. Curves are provided for audio input frequencies of 300, 1000, and 2500 Hz.

Test data:

Modulation Limiting Plot

Narrow channel BW:

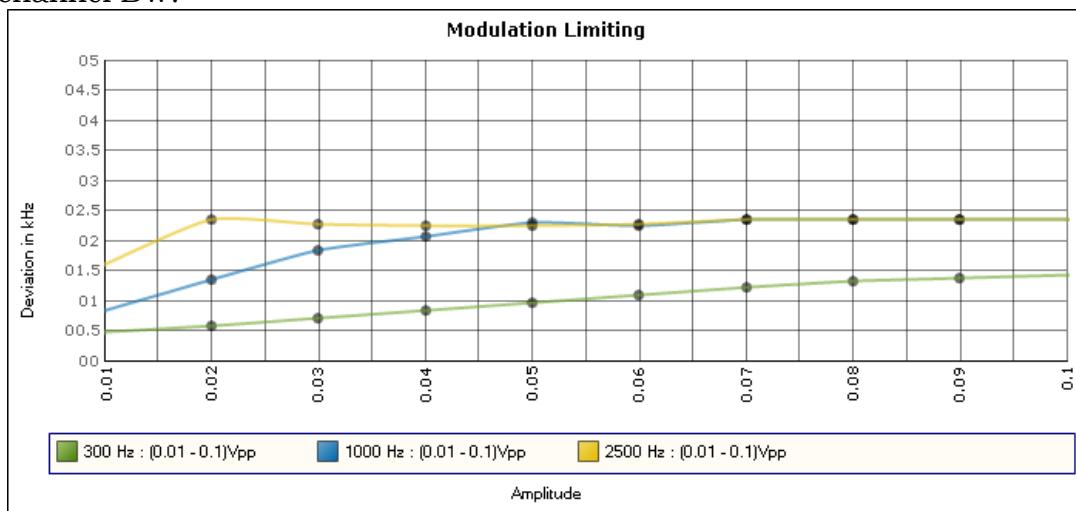

Wide channel BW:



Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

OCCUPIED BANDWIDTH

FCC Part 2.1049(c), RSS-GEN 4.6 EMISSION BANDWIDTH

Part 90.210(c) 12.5kHz Channel Spacing Not Equipped with a Low Pass Filter

For transmitters that are not equipped with an audio low pass filter pursuant to S90.211 (b), the power of any emission must be attenuated below the un-modulated carrier output power as follows; (1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5 kHz but not more than 10 kHz: At least $83 \log(fd/5)$ dB; (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 10 kHz, but not more than 250% of the authorized bandwidth: At least $29 \log(fd/11)$ dB or 50 dB, whichever is the lesser attenuation; (3) On any frequency removed from the center of the authorized bandwidth by more than 250% of the authorized bandwidth: At least $43 + 10 \log(Po)$ dB.

Part 90.210(d) Emission Mask D - 12.5 kHz channel BW equipment.

For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(fd - 2.88)$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 12.5 kHz: At least $50 + 10\log(P)$ dB or 70 dB, whichever is the lesser attenuation.

Part 90.210(e) Emission Mask E - 6.25 kHz channel BW equipment.

For transmitters designed to operate with a 6.25 kHz bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 3.0 kHz removed from f_0 : Zero dB.
- (2) On any frequency from the center of the authorized bandwidth by a displacement frequency (fd in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(fd - 3.0)$ dB or $55 + 10 \log(P)$ or 65, whichever is the lesser attenuation.
- (3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least $55 + 10\log(P)$ dB or 65 dB, whichever is the lesser attenuation.

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089


Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

OCCUPIED BANDWIDTH MEASUREMENT

Test procedure: ANSI/TIA-603-C:2004 para 2.2.11.

Test Setup Diagram:

OCCUPIED BANDWIDTH MEASUREMENT

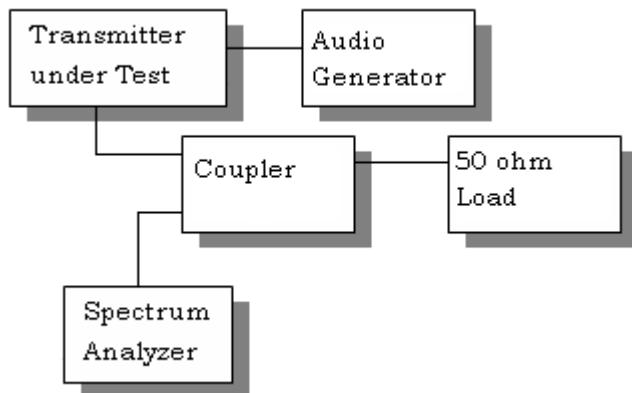

Test Data: See the plots below

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089


IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

Analog 12.5 kHz channel spacing (11K0F3E)

NOTES:

 MOTOROLA SOLUTIONS, INC. - MODEL: AAH02RDH9JA2AN
 OCCUPIED BANDWIDTH PLOT

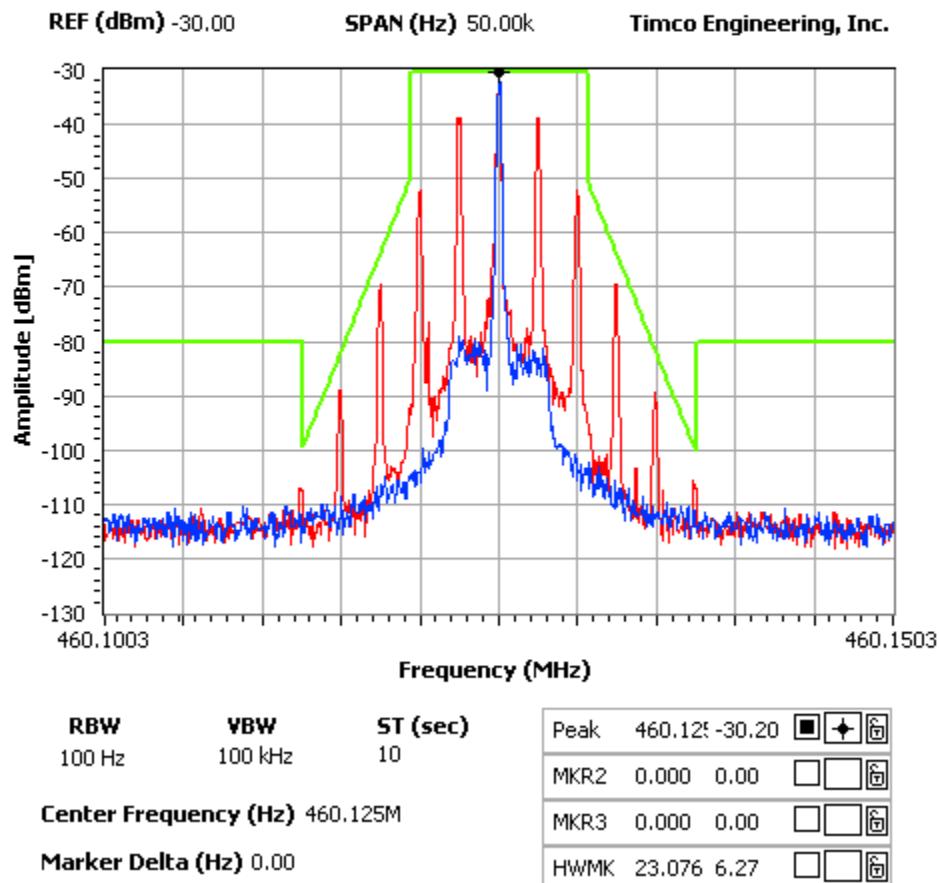FCC 90.210 Mask D


Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089


IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

Digital 12.5 kHz channel spacing (O.153 Test Pattern)

NOTES:

 MOTOROLA SOLUTIONS, INC. - MODEL: AAH02RDH9JA2AN
 OCCUPIED BANDWIDTH PLOT

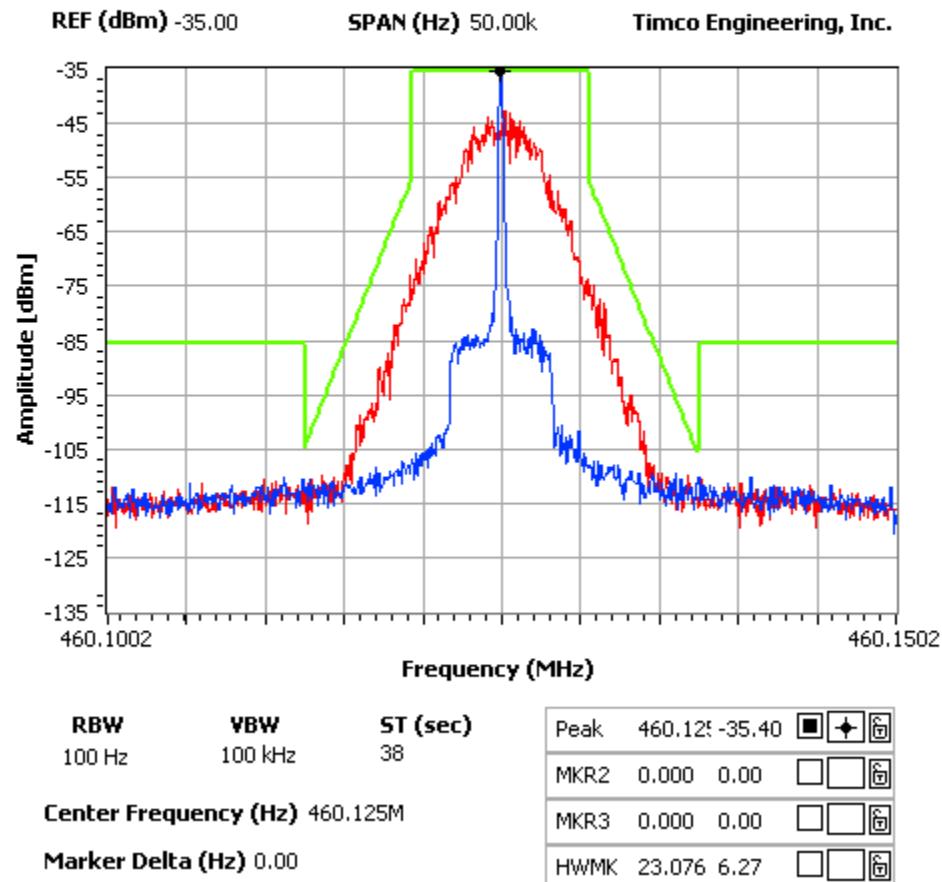FCC 90.210 Mask D


Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)

Rule Part No.: FCC Part 2.1051(a), RSS-GEN 7.1.4

Requirements: 25 kHz Channel Spacing = 49 dBc (for 4 Watts)

Method of Measurement: The carrier was modulated 100% using a 2500 Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard ANSI/TIA 603-C: 2004.

FCC Limit for:

25 kHz Channel Spacing = 49

12.5 kHz Spacing = 56

6.25 kHz Channel Spacing = N/A

Test Data:

| TF HIGH POWER | EF | dB below carrier | | TF LOW POWER | EF | dB below carrier |
|-------------------------|---------|---------------------|--|------------------------|---------|---------------------|
| 406.125 | 812.25 | 79.4 | | 406.125 | 812.25 | 75.1 |
| | 1218.38 | 83.7 | | | 1218.38 | 82.3 |
| | 1624.50 | 90.8 | | | 1624.50 | 85 |
| | 2030.63 | 82.3 | | | 2030.63 | 76.5 |
| | 2436.75 | 81.6 | | | 2436.75 | 75.7 |
| | 2842.88 | 82.9 | | | 2842.88 | 77.8 |
| | 3249.00 | 83.4 | | | 3249.00 | 78 |
| | 3655.13 | 83.3 | | | 3655.13 | 78.2 |
| | 4061.25 | 83.2 | | | 4061.25 | 78.3 |
| | | | | | | |

| TF HIGH POWER | EF | dB below carrier | | TF LOW POWER | EF | dB below carrier |
|-------------------------|---------|---------------------|--|------------------------|---------|---------------------|
| 450.25 | 900.50 | 97.7 | | 450.25 | 900.50 | 83.1 |
| | 1350.75 | 83.5 | | | 1350.75 | 82.6 |
| | 1801.00 | 89.6 | | | 1801.00 | 85.1 |
| | 2251.25 | 81.4 | | | 2251.25 | 75.7 |
| | 2701.50 | 80.8 | | | 2701.50 | 78.1 |
| | 3151.75 | 83.7 | | | 3151.75 | 77.6 |
| | 3602.00 | 83 | | | 3602.00 | 77.7 |
| | 4052.25 | 82.4 | | | 4052.25 | 77.9 |
| | 4502.50 | 81.6 | | | 4502.50 | 76.8 |
| | | | | | | |

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

| TF HIGH POWER | EF | dB below carrier | | TF LOW POWER | EF | dB below carrier |
|--------------------------|-----------|-----------------------------|--|-------------------------|-----------|-----------------------------|
| 460.125 | 920.25 | 94.4 | | 460.125 | 920.25 | 82.1 |
| | 1380.38 | 88.6 | | | 1380.38 | 85.1 |
| | 1840.50 | 90.1 | | | 1840.50 | 85.5 |
| | 2300.63 | 82 | | | 2300.63 | 77 |
| | 2760.75 | 80.2 | | | 2760.75 | 76.6 |
| | 3220.88 | 83.4 | | | 3220.88 | 78.4 |
| | 3681.00 | 82.7 | | | 3681.00 | 77.3 |
| | 4141.13 | 82.7 | | | 4141.13 | 76.6 |
| | 4601.25 | 81.9 | | | 4601.25 | 76.8 |
| | | | | | | |

| TF HIGH POWER | EF | dB below carrier | | TF LOW POWER | EF | dB below carrier |
|--------------------------|-----------|-----------------------------|--|-------------------------|-----------|-----------------------------|
| 469.75 | 939.50 | 93.1 | | 469.75 | 939.50 | 78.5 |
| | 1409.25 | 90.2 | | | 1409.25 | 80.5 |
| | 1879.00 | 89.5 | | | 1879.00 | 83.2 |
| | 2348.75 | 81.5 | | | 2348.75 | 75.8 |
| | 2818.50 | 82.3 | | | 2818.50 | 77 |
| | 3288.25 | 83.3 | | | 3288.25 | 77.6 |
| | 3758.00 | 82.9 | | | 3758.00 | 77.4 |
| | 4227.75 | 81.9 | | | 4227.75 | 77.3 |
| | 4697.50 | 82.5 | | | 4697.50 | 77.5 |
| | | | | | | |

| TF HIGH POWER | EF | dB below carrier | | TF LOW POWER | EF | dB below carrier |
|--------------------------|-----------|-----------------------------|--|-------------------------|-----------|-----------------------------|
| 511.9875 | 1023.98 | 89.5 | | 511.9875 | 1023.98 | 77.1 |
| | 1535.96 | 90.4 | | | 1535.96 | 83.8 |
| | 2047.95 | 81.4 | | | 2047.95 | 76.2 |
| | 2559.94 | 80.1 | | | 2559.94 | 76.7 |
| | 3071.93 | 82.5 | | | 3071.93 | 76.7 |
| | 3583.91 | 82.8 | | | 3583.91 | 76.7 |
| | 4095.90 | 82.3 | | | 4095.90 | 76.5 |
| | 4607.89 | 81.5 | | | 4607.89 | 75.6 |
| | 5119.88 | 82 | | | 5119.88 | 77.2 |
| | | | | | | |


Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

Method of Measuring Conducted Spurious Emissions

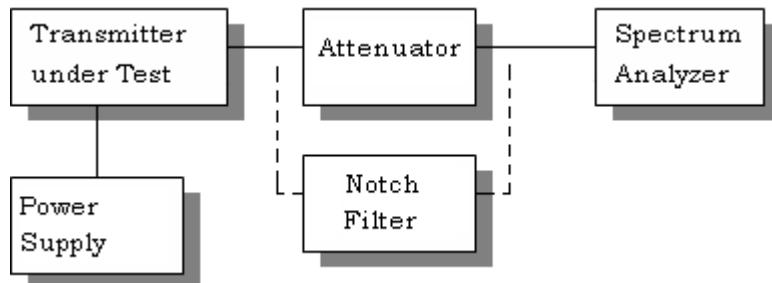

METHOD OF MEASUREMENT: The procedure used was ANSI/TIA 603-C:2004. The measurements were made at TIMCO ENGINEERING INC. 849 N.W. State Road 45, Newberry, Florida 32669.

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc


FIELD STRENGTH OF SPURIOUS EMISSIONS

Rule Parts. No.: FCC Part 2.1053, RSS-GEN 4.9

Requirements: The FCC limits for radiated emissions are the same as previously stated for the conducted emissions.

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 MHz to at least the tenth harmonic of the fundamental. This test was conducted per ANSI/TIA 603-C:2004 using the substitution method. Measurements were made at the test site of TIMCO ENGINEERING, INC. located at 849 NW State Road 45, Newberry, FL 32669.

Test Setup Diagram:

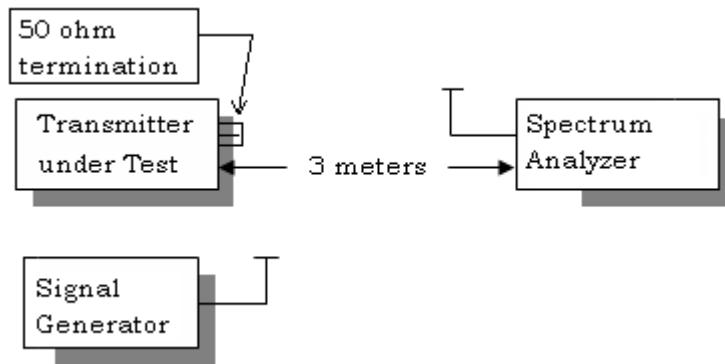

Test Data:

High Power

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 406.13 | 0 | 0 |
| 812.25 | H | 86.0 |
| 1218.38 | V | 94.7 |
| 1624.50 | H | 91.2 |
| 2030.63 | H | 98.9 |
| 2436.75 | H | 95.0 |
| 2842.88 | H | 98.0 |
| 3249.00 | H | 93.1 |
| 3655.13 | H | 93.7 |
| 4061.25 | H | 93.3 |

Low Power

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 406.13 | 0 | 0 |
| 812.25 | H | 84.9 |
| 1218.38 | H | 89.2 |
| 1624.50 | V | 85.4 |
| 2030.63 | H | 92.4 |
| 2436.75 | H | 90.4 |
| 2842.88 | H | 88.9 |
| 3249.00 | H | 88.5 |
| 3655.13 | H | 88.1 |
| 4061.25 | H | 88.5 |

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

Test Data:

High Power

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 450.25 | 0 | 0 |
| 900.50 | H | 88.5 |
| 1350.75 | V | 91.0 |
| 1801.00 | V | 85.1 |
| 2251.25 | H | 97.3 |
| 2701.50 | H | 96.8 |
| 3151.75 | H | 95.0 |
| 3602.00 | H | 93.8 |
| 4052.25 | H | 92.6 |
| 4502.50 | H | 91.5 |

Low Power

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 450.25 | 0 | 0 |
| 900.50 | H | 87.1 |
| 1350.75 | V | 84.8 |
| 1801.00 | H | 83.1 |
| 2251.25 | H | 90.4 |
| 2701.50 | H | 90.0 |
| 3151.75 | H | 89.2 |
| 3602.00 | H | 88.1 |
| 4052.25 | H | 87.2 |
| 4502.50 | H | 86.1 |

High Power

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 460.01 | 0 | 0 |
| 920.03 | H | 86.0 |
| 1380.04 | V | 95.4 |
| 1840.05 | V | 90.4 |
| 2300.06 | H | 99.9 |
| 2760.08 | H | 97.4 |
| 3220.09 | H | 93.1 |
| 3680.10 | H | 94.2 |
| 4140.11 | H | 93.6 |
| 4600.13 | H | 90.3 |

Low Power

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 460.01 | 0 | 0 |
| 920.03 | H | 90.8 |
| 1380.04 | V | 88.7 |
| 1840.05 | H | 83.9 |
| 2300.06 | H | 89.2 |
| 2760.08 | H | 90.3 |
| 3220.09 | H | 87.8 |
| 3680.10 | H | 87.9 |
| 4140.11 | H | 86.7 |
| 4600.13 | H | 83.1 |

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

Test Data:

HIGH POWER

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 469.75 | 0 | 0 |
| 939.50 | H | 87.3 |
| 1409.25 | H | 93.7 |
| 1879.00 | H | 88.7 |
| 2348.75 | H | 99.1 |
| 2818.50 | H | 98.7 |
| 3288.25 | H | 94.5 |
| 3758.00 | H | 92.0 |
| 4227.75 | H | 92.5 |
| 4697.50 | H | 91.9 |

LOW POWER

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 469.75 | 0 | 0 |
| 939.50 | H | 85.6 |
| 1409.25 | H | 87.5 |
| 1879.00 | H | 82.8 |
| 2348.75 | H | 91.0 |
| 2818.50 | H | 85.1 |
| 3288.25 | H | 88.5 |
| 3758.00 | H | 86.4 |
| 4227.75 | H | 85.3 |
| 4697.50 | H | 86.0 |

HIGH POWER

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 511.99 | 0 | 0 |
| 1023.98 | H | 88.2 |
| 1535.96 | V | 90.5 |
| 2047.95 | H | 97.6 |
| 2559.94 | H | 95.0 |
| 3071.93 | H | 96.0 |
| 3583.91 | H | 94.1 |
| 4095.90 | H | 92.1 |
| 4607.89 | H | 90.5 |
| 5119.88 | H | 90.1 |

LOW POWER

| Emission Frequency MHz | Ant. Polarity | dB Below Carrier (dBc) |
|------------------------|---------------|------------------------|
| 511.99 | 0 | 0 |
| 1023.98 | H | 86.1 |
| 1535.96 | H | 87.8 |
| 2047.95 | H | 91.4 |
| 2559.94 | H | 86.9 |
| 3071.93 | H | 89.0 |
| 3583.91 | H | 87.9 |
| 4095.90 | H | 86.4 |
| 4607.89 | H | 85.1 |
| 5119.88 | H | 84.6 |

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

FREQUENCY STABILITY

Rule Parts. No.: FCC Part 2.1055, Part 90.213, RSS-119 5.3, RSS-GEN 7.2.4

Requirements: Temperature range requirements: -30 to +50° C.
 Voltage Variation +, -15%
 ±1.5 PPM

Method of Measurements: ANSI/TIA 603-C: 2004

Test Data:

| Assigned Frequency (Ref. Frequency) (MHz) | | 460.012532 |
|-------------------------------------------|-----------------|---------------------------|
| Temperature (°C) | Frequency (MHz) | Frequency Stability (PPM) |
| -30 | 460.012052 | -1.04 |
| -20 | 460.012200 | -0.72 |
| -10 | 460.012442 | -0.20 |
| 0 | 460.012482 | -0.11 |
| +10 | 460.012493 | -0.08 |
| +20 | 460.012552 | 0.04 |
| +30 | 460.012591 | 0.13 |
| +40 | 460.012605 | 0.16 |
| +50 | 460.012589 | 0.12 |

| Assigned Frequency (Ref. Frequency) (MHz) | | |
|-------------------------------------------|-----------------|---------------------------|
| % Battery (%) | Frequency (MHz) | Frequency Stability (PPM) |
| -15% | 460.012536 | 0.01 |
| | 460.012532 | 0.00 |
| +15% | 460.012555 | 0.05 |

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

TRANSIENT FREQUENCY BEHAVIOR

FCC Part 2.1055(a)(1)
FCC Part 90.214, IC RSS-119 5.8

REQUIREMENTS: Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum transient frequencies within the maximum frequency difference limits during the time intervals indicated:

| Time Intervals | Maximum frequency difference | All Equipment | |
|----------------|------------------------------|---------------|-------------|
| | | 150-174 MHz | 421-512 MHz |
| | | | |

Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels

| | | | |
|---------|----------------|---------|---------|
| t_1^4 | ± 25.0 kHz | 5.0 ms | 10.0 ms |
| t_2 | ± 12.5 kHz | 20.0 ms | 25.0 ms |
| t_3^4 | ± 25.0 kHz | 5.0 ms | 10.0 ms |

Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels

| | | | |
|---------|----------------|---------|---------|
| t_1^4 | ± 12.5 kHz | 5.0 ms | 10.0 ms |
| t_2 | ± 6.25 kHz | 20.0 ms | 25.0 ms |
| t_3^4 | ± 12.5 kHz | 5.0 ms | 10.0 ms |

Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels

| | | | |
|---------|-----------------|---------|---------|
| t_1^4 | ± 6.25 kHz | 5.0 ms | 10.0 ms |
| t_2 | ± 3.125 kHz | 20.0 ms | 25.0 ms |
| t_3^4 | ± 6.25 kHz | 5.0 ms | 10.0 ms |


Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

Narrow channel BW:

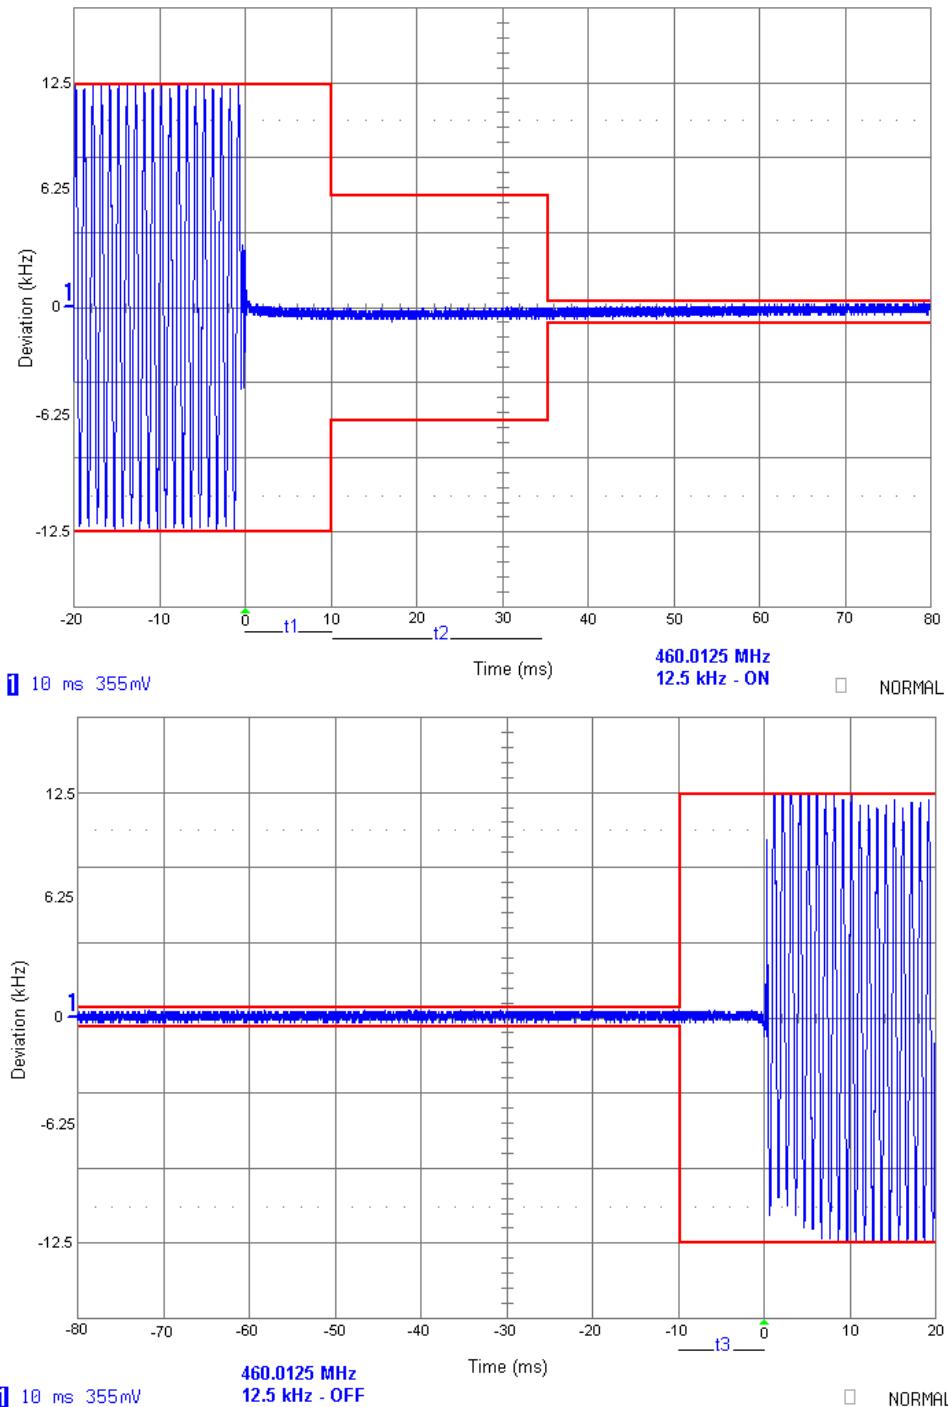

Applicant: MOTOROLA SOLUTIONS, INC.


FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

TEST PROCEDURE: ANSI/TIA 603-C:2004 PARA 2.2.19

1. Using the variable attenuator the transmitter level was set to 40 dB below the test receivers maximum input level, then the transmitter was turned off.
2. With the transmitter off the signal generator was set 20 dB below the level of the transmitter in the above step, this level will be maintained with the signal generator through-out the test.
3. Reduce the attenuation between the transmitter and the RF detector by 30 dB. With the levels set as above the transient frequency behavior was observed & recorded.

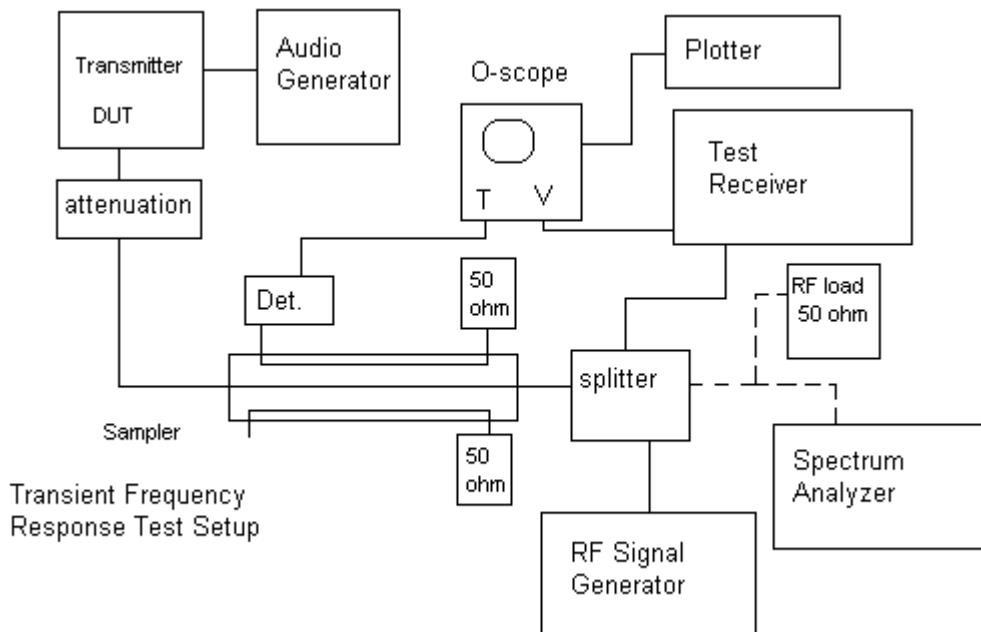

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc

EMC EQUIPMENT LIST

| Device | Manufacturer | Model | Serial Number | Cal/Char Date | Due Date |
|---------------------------------------|---------------------|---------------|--------------------------|----------------------|-----------------|
| 3-Meter Semi-Anechoic Chamber | Panashield | N/A | N/A | Listed 5/10/10 | 5/10/12 |
| AC Voltmeter | HP | 400FL | 2213A14499 | CAL 6/12/11 | 6/12/13 |
| Antenna: Dipole Kit | Electro-Metrics | TDA-30/1-4 | 153 | CHAR 10/10/09 | 10/10/11 |
| Antenna: Passive Loop | EMC Test Systems | EMCO 6512 | 9706-1211 | CAL. 10/1/09 | 10/2/11 |
| Frequency Counter | HP | 5385A | 2730A03025 | CAL 9/4/09 | 9/4/11 |
| Hygro-Thermometer | Extech | 445703 | 0602 | CAL 6/15/11 | 6/15/13 |
| Modulation Analyzer | HP | 8901A | 3435A06868 | CAL 8/26/09 | 8/26/11 |
| Digital Multimeter | Fluke | FLUKE-77 | 35053830 | CAL 11/18/09 | 11/18/11 |
| Analyzer Tan Tower Preamplifier | HP | 8449B-H02 | 3008A00372 | CAL 11/21/09 | 11/21/11 |
| Analyzer Tan Tower Quasi-Peak Adapter | HP | 85650A | 3303A01690 | CAL 11/22/09 | 11/22/11 |
| Analyzer Tan Tower RF Preselector | HP | 85685A | 3221A01400 | CAL 11/21/09 | 11/21/11 |
| Analyzer Tan Tower Spectrum Analyzer | HP | 8566B Opt 462 | 3138A07786 3144A20661 | CAL 11/24/09 | 11/24/11 |
| Temperature Chamber | Tenney Engineering | TTRC | 11717-7 | CHAR 4/25/10 | 4/25/12 |
| Antenna | ETS | 3117 | 41534 | 9/22/2010 | 9/22/2012 |
| Antenna | Electro metrics | LPA-25 | 1122 | 5/04/2011 | 5/04/2013 |
| Antenna | Electro metrics | BIA-25 | 1171 | 1/15/2010 | 1/15/2012 |

Applicant: MOTOROLA SOLUTIONS, INC.

FCC ID: ABZ99FT4089

IC: - 109AB-99FT4089

Report: Z:\M\MOTOROLA_SCHAUMBURG LARRY LARSEN\1715BT11\1715BT11TestReport_Rev.doc