

VHF DIGITAL TRANSCEIVER

IC-F5330D

UHF DIGITAL TRANSCEIVER

IC-F6330D

Thank you for choosing this Icom product.
READ ALL INSTRUCTIONS carefully and completely
before using this product.

Icom is not responsible for the destruction, damage to, or performance of any Icom or non-Icom equipment, if the malfunction is because of:
• Force majeure, including, but not limited to, fires, earthquakes, storms, floods, lightning, other natural disasters, disturbances, riots, war, or radioactive contamination.
• The use of Icom transceivers with any equipment that is not manufactured or approved by Icom.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand, and/or other countries. AMBE+2 is a trademark and property of Digital Voice Systems Inc. The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Icom Inc. is under license. All other products or brands are registered trademarks or trademarks of their respective holders.

Icom Inc.

1-1-32 Kamiminami, Hirano-ku,
Osaka 547-0003, Japan

A7656D-1EX-0a
Printed in Japan
© 2021 Icom Inc.

SAFETY TRAINING INFORMATION



Your Icom radio generates RF electromagnetic energy during transmit mode. This radio is designed for and classified as "Occupational Use Only," meaning it must be used only during the course of employment by individuals aware of the hazards, and the ways to minimize such hazards. This radio is NOT intended for use by the "General Population" in an uncontrolled environment.

For compliance with FCC and IC RF Exposure Requirements, the transmitter antenna installation shall comply with the following three conditions:

1. The transmitter antenna gain shall not exceed 0 dB.
2. IC-F5330D: The antenna is required to be located outside of a vehicle and kept at a distance of 57 centimeters (23 inches) or more between the transmitting antenna of this device and any persons during operation. For small vehicle as worst case, the antenna shall be located on the roof top at any place on the center line along the vehicle in order to achieve 57 centimeters (23 inches) separation distance. In order to ensure this distance is met, the installation of the antenna must be mounted at least 57 centimeters (23 inches) away from the nearest edge of the vehicle in order to protect against exposure to bystanders.

2. IC-F6330D: The antenna is required to be located outside of a vehicle and kept at a distance of 41 centimeters (17 inches) or more between the transmitting antenna of this device and any persons during operation. For small vehicle as worst case, the antenna shall be located on the roof top at any place on the center line along the vehicle in order to achieve 41 centimeters (17 inches) separation distance. In order to ensure this distance is met, the installation of the antenna must be mounted at least 41 centimeters (17 inches) away from the nearest edge of the vehicle in order to protect against exposure to bystanders.

3. IC-F5330D: Transmit only when people outside the vehicle are at least the recommended minimum distance of 136 centimeters (54 inches) away from the properly installed antenna. This separation distance will ensure that there is sufficient distance from a properly installed externally-mounted antenna to satisfy the RF exposure requirements in the applicable RF exposure compliance standards.

3. IC-F6330D: Transmit only when people outside the vehicle are at least the recommended minimum distance of 117 centimeters (47 inches) away from the properly installed antenna. This separation distance will ensure that there is sufficient distance from a properly installed externally-mounted antenna to satisfy the RF exposure requirements in the applicable RF exposure compliance standards.

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

CAUTION: Changes or modifications to this transceiver, not expressly approved by Icom Inc., could void your authority to operate this transceiver under FCC regulations.

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

CAUTION: Changes or modifications to this transceiver, not expressly approved by Icom Inc., could void your authority to operate this transceiver under FCC regulations.

IMPORTANT

SAVE THESE INSTRUCTIONS—This instruction sheet contains basic operating instructions for the transceiver.

This instruction sheet includes some functions that are usable only when your dealer presets them. The transceiver may have other functions and operations that are not described in this instruction sheet. Ask your dealer for preset function details.

EXPLICIT DEFINITIONS

WORD	DEFINITION
⚠ DANGER!	Personal death, serious injury or an explosion may occur.
⚠ WARNING!	Personal injury, fire hazard or electric shock may occur.
CAUTION	Equipment damage may occur.
NOTE	If disregarded, inconvenience only. No risk of personal injury, fire or electric shock.

PRECAUTIONS

⚠ DANGER HIGH RF VOLTAGE! NEVER touch an antenna or antenna connector while transmitting. This could cause an electrical shock or burn.

⚠ DANGER! NEVER operate the transceiver near unshielded electrical blasting caps or in an explosive atmosphere. This could cause an explosion and death.

⚠ DANGER! NEVER place the transceiver where air bag deployment may be obstructed during mobile operations.

⚠ WARNING! NEVER connect the transceiver to an AC outlet. This may pose a fire hazard or result in an electric shock.

⚠ WARNING! NEVER operate the transceiver during a lightning storm. It may result in an electric shock, cause a fire or damage the transceiver. Always disconnect the power source and antenna before a storm.

⚠ WARNING! NEVER let metal, wire, or other objects contact the transceiver inside or make incorrect contact with connectors on the rear panel. This could cause an electric shock or damage the transceiver.

⚠ WARNING! NEVER place the transceiver where the vehicle's normal operation may be hindered or where it could cause bodily injury.

⚠ WARNING! NEVER operate the transceiver if you notice an abnormal odor, sound, or smoke. Immediately turn OFF the power and remove the DC power cable. Contact your Icom dealer or distributor for advice.

⚠ WARNING! NEVER put the transceiver in an unstable place where the transceiver may suddenly move or fall. This could cause an injury or damage the transceiver.

CAUTION: DO NOT connect the transceiver to a power source of more than 16 V DC such as a 24 V battery. This could damage the transceiver.

CAUTION: DO NOT cut the DC power cable between the DC plug and fuse holder. If an incorrect connection is made after cutting, the transceiver might be damaged.

CAUTION: DO NOT expose the transceiver to rain, snow or any liquids. They could damage the transceiver and microphone.

CAUTION: DO NOT use the non-specified microphone. Other microphones have different pin assignments and may damage the transceiver.

CAUTION: DO NOT use the transceiver in areas with temperatures below -30°C (-22°F) or above +60°C (+140°F), or in areas subject to direct sunlight, such as the dashboard.

CAUTION: DO NOT place or leave the transceiver in excessively dusty environments. This could damage the transceiver.

CAUTION: DO NOT use harsh solvents such as Benzine or alcohol when cleaning. This could damage the equipment surfaces. If the surface becomes dusty or dirty, wipe it clean with a soft, dry cloth.

CAUTION: DO NOT reverse the DC power cable polarity. This could damage the transceiver.

CAUTION: DO NOT block the air vent when installing the transceiver. This transceiver has an air vent on the bottom panel of the transceiver to meet the IPX4 requirements.

NEVER place the transceiver in an insecure place to avoid inadvertent use by unauthorized persons.

NEVER operate the transceiver without running the vehicle's engine. The vehicle's battery will quickly run out when the transceiver transmits while the vehicle's engine is OFF.

BE CAREFUL! The transceiver may become hot after continuously transmitting for long periods of time.

For the European versions:



CAUTION: Hot surfaces. **DO NOT** touch the transceiver's surface after continuously transmitting for long periods of time. The transceiver's chassis radiates heat, and it will become hot to protect the power amplifier unit from overheating. Touching it may cause a burn.

About E-marking: Detailed installation notes for Icom mobile transceivers to be fitted into vehicles are available. Please contact your Icom dealer or distributor.

ABOUT GPS/GLONASS RECEIVER

DO NOT install the GPS antenna near the transceiver or the antenna. A GPS or GLONASS receiver may not work if the transceiver transmits or receives in the frequency ranges as shown below.

For the IC-F5330D

	GPS Receiver	GLONASS Receiver
Transmit	142.850 ~ 142.860	145.275 ~ 145.945
	157.135 ~ 157.145	159.805 ~ 160.540
Receive	146.845 ~ 147.110	149.745 ~ 150.790

For the IC-F6330D

	GPS Receiver	GLONASS Receiver
Transmit		400.000 ~ 401.343
Receive	443.545 ~ 444.065	449.335 ~ 451.425

VOICE CODING TECHNOLOGY

The AMBE+2™ voice coding Technology embodied in this product is protected by intellectual property rights including patent rights, copyrights and trade secrets of Digital Voice Systems, Inc. This voice coding Technology is licensed solely for use within this Communications Equipment. The use of this Technology is explicitly prohibited from attempting to extract, remove, decompile, reverse engineer, or disassemble the Object Code, or in any other way convert the Object Code into a human-readable form. U.S. Patent Nos. #8,595,002, #8,359,197, #8,315,860, #8,200,497, #7,970,606, and #6,912,495 B2.


ABOUT CE AND DOC

 Hereby, Icom Inc. declares that the versions of IC-F5330D and IC-F6330D which have the "CE" symbol on the product, comply with the essential requirements of the Radio Equipment Directive, 2014/53/EU, and the restriction of the use of certain hazardous substances in electrical and electronic equipment Directive, 2011/65/EU. The full text of the EU declaration of conformity is available at the following Internet address: <https://www.icomjapan.com/support/>

DISPOSAL

 The crossed-out wheeled-bin symbol on your product, literature, or packaging reminds you that in the European Union, all electrical and electronic products, batteries, and accumulators (rechargeable batteries) must be taken to designated collection locations at the end of their working life. Do not dispose of these products as unsorted municipal waste. Dispose of them according to the laws in your area.

SUPPLIED ACCESSORIES

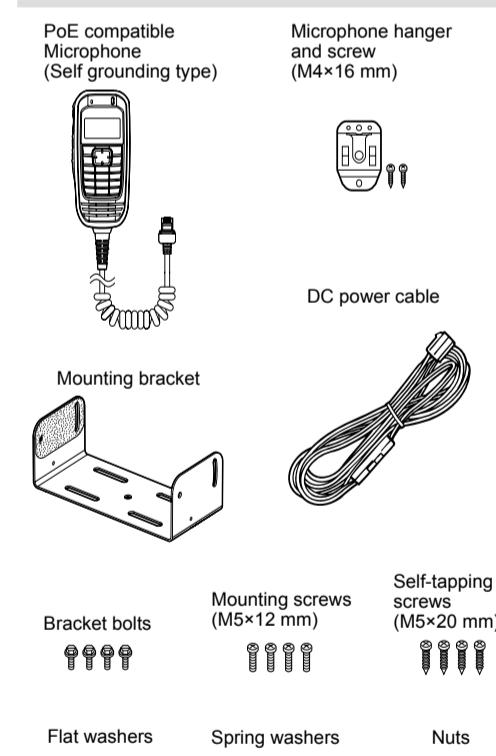

NOTE: Some accessories are not supplied, or the shape is different, depending on the transceiver version.

OPTIONS

• SP-30/SP-35/SP-35L EXTERNAL SPEAKERS

Input impedance: 4 Ω

SP-35/SP-35L: Rated input 5 W, Maximum input 7 W

SP-30: Rated input 20 W, Maximum input 30 W

• OPC-1939/OPC-2078 ACC CABLE

Used to connect an external device.

OPC-1939: D-sub 15-pin, an external level converter (user supplied) is required.

OPC-2078: D-sub 25-pin, built-in level converter

• OPC-2478/OPC-2479 DC POWER CABLE

• VS-3 Bluetooth® HEADSET

The Bluetooth headset with a [PTT] switch.

• About the third party Bluetooth® headsets:

Icom has checked the PTT operation with some 3M Peltor headsets such as the WS Headset XP, WS ProTac XP and WS Alert XP. (Compatibility not guaranteed.)

REPLACING FUSES

Fuses are installed in the supplied DC power cable. If a fuse blows, track down the source of the problem, repair it, and replace the damaged fuse with a new rated one.

① The shape of fuses and its cases are different, depending on the supplied DC power cable.


② Fuse rating: 32 V, 20 A for the OPC-2478

250 V, 10 A for the OPC-2479

NOTE: Use only specified fuses (10 A or 20 A).
25 W transceiver: 10 A, 45 W or 50 W transceivers: 20 A

OPC-2478

OPC-2479

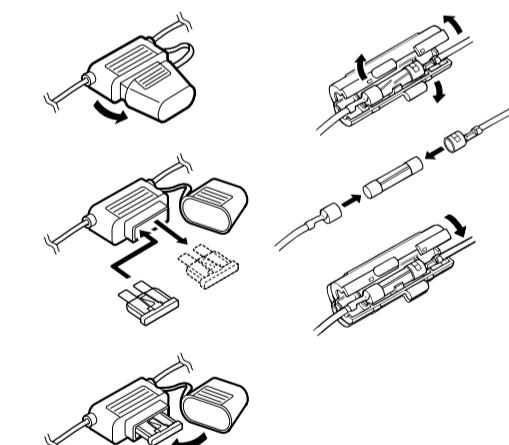

Fuse Coding explanation:

OPC-2478

Fuse Coding: FUSE 32 V 20 A

Fuse Voltage Rating: 32 Volts

Fuse Current Rating: 20 Amperes

OPC-2479

Fuse Coding: FUSE 250 V 10 A

Fuse Voltage Rating: 250 Volts


Fuse Current Rating: 10 Amperes

ANTENNA

A key element in the performance of any communication system is the antenna. Contact your dealer for information regarding antennas and how to install them.

PANEL DESCRIPTION

◊ Microphone

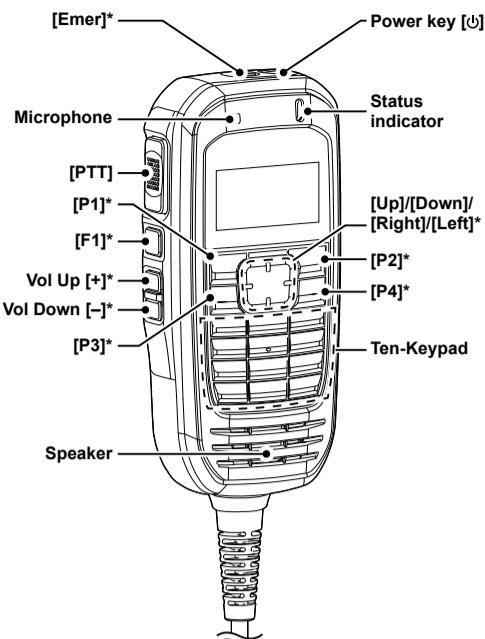


*The assigned function may differ, depending on the presetting. Ask your dealer or the transceiver's administrator for details.

Status indicator:

Lights red: Transmitting

Lights green: Receiving or squelch is open.

◊ Main unit

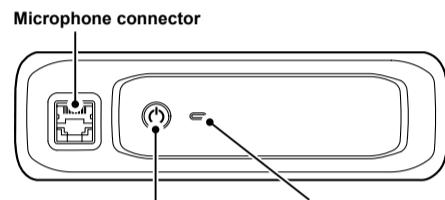

Microphone connector:

PoE output voltage: 54 V

PoE output current: 0.6 A

Power indicator:

Lights orange: Power ON

Lights green: Connected with the microphone.


Lights red: Disconnected from the microphone.

Status indicator:

Lights red: Transmitting

Lights green: Receiving or squelch is open.

FUNCTION DISPLAY

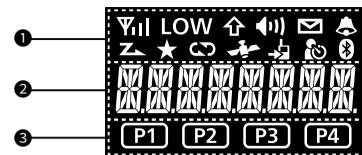

① ICON AREA

Displays the icons, as shown below.

	Displays the relative receive signal strength level.
	Displayed when the low output power is selected.
	Displayed when the Shift function is ON. The user can use a Dealer Assignable key's secondary function in the Shift mode. Ask your dealer for details.
	Displayed when the channel is in the audible (unmuted) mode.
	Blinks after messages (Message or Status Message) have been received.
	Displayed when a matching signal is received, depending on the presetting.
	<ul style="list-style-type: none"> Blinks while scanning. Displayed when a scan is paused.
	Displayed when the channel is selected as a scan target channel.
	<ul style="list-style-type: none"> Displayed when the Encryption function is ON. Blinks when decoding an encrypted signal.
	<ul style="list-style-type: none"> Displayed when valid position data is received. Blinks when searching for satellites.
	Displayed when the Talk Around function is ON.
	Displayed when the Lone Worker function is ON.
	<ul style="list-style-type: none"> Blinks when the Bluetooth function is ON. Displayed when the transceiver is paired with a Bluetooth device.

② ALPHANUMERIC READOUT

Displays messages such as channel text.

③ DEALER ASSIGNABLE KEY ICONS

Displayed when you pushed the Dealer Assignable keys [P1], [P2], [P3], and [P4] to use the function assigned to them.

BASIC OPERATION

◊ Turning ON the transceiver

- Hold down [Φ] for more than 2 seconds until the Status indicator or Power indicator lights orange.

NOTE: Entering the password may be required to turn ON the transceiver, depending on the presetting. Ask your dealer or the transceiver's administrator for details.

◊ Receiving

- Push [Up] or [Down] to select a channel.
- When a call is received, the Status indicator lights green.
- Push [+] or [-] to adjust the audio output level to a comfortable listening level.

◊ Transmitting

CAUTION: DO NOT transmit without an antenna.


- Wait until the channel is clear to avoid interference.
- While holding down [PTT], speak at your normal voice level.
- Release [PTT] to receive.

IMPORTANT:

To maximize the readability of your signal:

- After pushing [PTT], pause briefly before you start speaking.
- Hold the microphone 5 ~ 10 cm (2 ~ 4 inches) from your mouth, then speak at your normal voice level.

CONNECTIONS

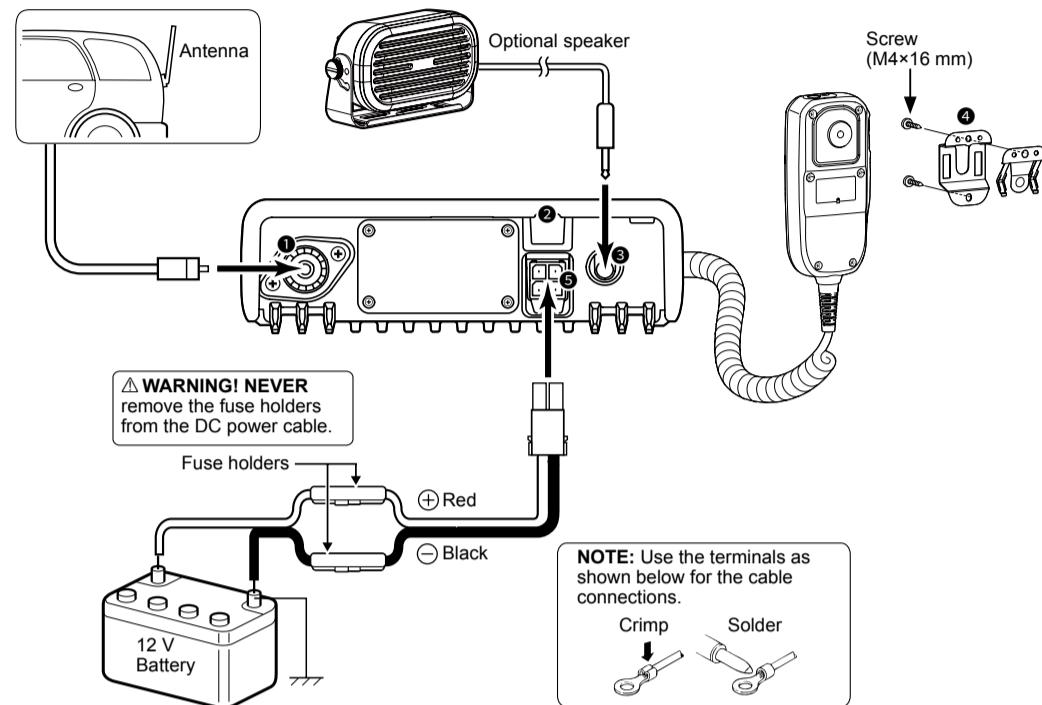

MOUNTING THE TRANSCEIVER

Mount the transceiver on a flat surface using the mounting bracket supplied with your transceiver.

- Drill 4 holes on a flat surface where you want to install the mounting bracket.
 - When using the supplied nuts: Approximately 5.5 ~ 6 mm (d)
 - When using the supplied self-tapping screws: Approximately 2 ~ 3 mm (d)
- Attach the mounting bracket on the flat surface using the supplied screws, nuts, and washers.
- Attach the transceiver to the mounting bracket using the supplied bracket bolts.

Mounting example:

